



## Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: [www.cqa-cert.com](http://www.cqa-cert.com)

Report Template Version: V04

Report Template Revision Date: 2018-07-06

# TEST REPORT

**Report No.:** CQASZ20240801587E-03  
**Applicant:** TOPDON TECHNOLOGY Co., Ltd.  
**Address of Applicant:** Unit 2005 20/F, Qianhai Shimao Tower, Qianhai Shenzhen-Hong kong Cooperation Zone Shenzhen China  
**Equipment Under Test (EUT):**  
**Product:** THINKTOOL mini, Professional Diagnostic Tool  
**Model No.:** TKT02, ArtiDiag800BT, ArtiDiag800 BT 2  
**Test Model No.:** TKT02  
**Brand Name:** TOPDON  
**FCC ID:** 2AVYW-AD800BT  
**Standards:** 47 CFR Part 15, Subpart C  
**Date of Receipt:** 2024-08-02  
**Date of Test:** 2024-08-02 to 2024-08-14  
**Date of Issue:** 2024-08-29  
**Test Result :** **PASS\***

\*In the configuration tested, the EUT complied with the standards specified above

**Tested By:** Lewis Zhou  
( Lewis Zhou )

**Reviewed By:** Timo Lei  
( Timo Lei )

**Approved By:** Alex  
( Alex Wang )



## 1 Version

### Revision History Of Report

| Report No.           | Version | Description    | Issue Date |
|----------------------|---------|----------------|------------|
| CQASZ20210801378E-03 | Rev.01  | Initial report | 2021-10-27 |
| CQASZ20211001867E-03 | Rev.02  | Update report  | 2021-12-10 |
| CQASZ20240801587E-03 | Rev.03  | Update report  | 2024-08-29 |

#### Note1:

This test report (Ref. No.: CQASZ20211001867E-03)

All test data comes from source test reports (Ref. No.: CQASZ20210801378E-03).

Only on the basis of the original report Change EUT Name, Model No., Applicant, Address of Applicant, Manufacturer, Address of Manufacturer, Brand Name , Photographs of EUT .The tested samples have not been changed.

#### Note2:

This test report (Ref. No.: CQASZ20240801587E-03)

All test data comes from source test reports (Ref. No.: CQASZ20211001867E-03).

On the basis of the original report Change the series model No.

Because the charging pad are different Add radiation test results, Conducted emission test results, Photographs of EUT.

## 2 Test Summary

| Test Item                                                         | Test Requirement                                    | Test method      | Result |
|-------------------------------------------------------------------|-----------------------------------------------------|------------------|--------|
| Antenna Requirement                                               | 47 CFR Part 15, Subpart C Section 15.203/15.247 (c) | ANSI C63.10 2013 | PASS   |
| AC Power Line Conducted Emission                                  | 47 CFR Part 15, Subpart C Section 15.207            | ANSI C63.10 2013 | PASS   |
| Conducted Peak & Average Output Power                             | 47 CFR Part 15, Subpart C Section 15.247 (b)(3)     | ANSI C63.10 2013 | PASS   |
| 6dB Occupied Bandwidth                                            | 47 CFR Part 15, Subpart C Section 15.247 (a)(2)     | ANSI C63.10 2013 | PASS   |
| Power Spectral Density                                            | 47 CFR Part 15, Subpart C Section 15.247 (e)        | ANSI C63.10 2013 | PASS   |
| Band-edge for RF Conducted Emissions                              | 47 CFR Part 15, Subpart C Section 15.247(d)         | ANSI C63.10 2013 | PASS   |
| RF Conducted Spurious Emissions                                   | 47 CFR Part 15, Subpart C Section 15.247(d)         | ANSI C63.10 2013 | PASS   |
| Radiated Spurious Emissions                                       | 47 CFR Part 15, Subpart C Section 15.205/15.209     | ANSI C63.10 2013 | PASS   |
| Restricted bands around fundamental frequency (Radiated Emission) | 47 CFR Part 15, Subpart C Section 15.205/15.209     | ANSI C63.10 2013 | PASS   |

### 3 Contents

|                                                             | Page      |
|-------------------------------------------------------------|-----------|
| <b>1 VERSION .....</b>                                      | <b>2</b>  |
| <b>2 TEST SUMMARY .....</b>                                 | <b>3</b>  |
| <b>3 CONTENTS .....</b>                                     | <b>4</b>  |
| <b>4 GENERAL INFORMATION .....</b>                          | <b>5</b>  |
| 4.1 CLIENT INFORMATION .....                                | 5         |
| 4.2 GENERAL DESCRIPTION OF EUT .....                        | 5         |
| 4.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD ..... | 5         |
| 4.4 TEST ENVIRONMENT AND MODE .....                         | 8         |
| 4.5 DESCRIPTION OF SUPPORT UNITS .....                      | 12        |
| 4.6 TEST LOCATION .....                                     | 12        |
| 4.7 TEST FACILITY .....                                     | 12        |
| 4.8 STATEMENT OF THE MEASUREMENT UNCERTAINTY .....          | 13        |
| 4.9 DEVIATION FROM STANDARDS .....                          | 13        |
| 4.10 ABNORMALITIES FROM STANDARD CONDITIONS .....           | 13        |
| 4.11 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....      | 13        |
| 4.12 EQUIPMENT LIST .....                                   | 14        |
| <b>5 TEST RESULTS AND MEASUREMENT DATA .....</b>            | <b>15</b> |
| 5.1 ANTENNA REQUIREMENT .....                               | 15        |
| 5.2 CONDUCTED EMISSIONS .....                               | 16        |
| 5.3 CONDUCTED PEAK & AVERAGE OUTPUT POWER .....             | 20        |
| 5.4 6dB OCCUPY BANDWIDTH .....                              | 22        |
| 5.5 POWER SPECTRAL DENSITY .....                            | 36        |
| 5.6 BAND-EDGE FOR RF CONDUCTED EMISSIONS .....              | 44        |
| 5.7 RF CONDUCTED SPURIOUS EMISSIONS .....                   | 50        |
| 5.8 RADIATED SPURIOUS EMISSIONS .....                       | 69        |
| 5.8.1 Radiated emission below 1GHz .....                    | 72        |
| 5.8.2 Transmitter emission above 1GHz .....                 | 74        |
| 5.9 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY .....     | 76        |
| <b>6 PHOTOGRAPHS - EUT TEST SETUP .....</b>                 | <b>82</b> |
| 6.1 RADIATED SPURIOUS EMISSION .....                        | 82        |
| 6.2 CONDUCTED EMISSION .....                                | 83        |
| <b>7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS .....</b>     | <b>84</b> |

## 4 General Information

### 4.1 Client Information

|                          |                                                                                                  |
|--------------------------|--------------------------------------------------------------------------------------------------|
| Applicant:               | TOPDON TECHNOLOGY Co., Ltd.                                                                      |
| Address of Applicant:    | Unit 2005 20/F, Qianhai Shimao Tower, Qianhai Shenzhen-Hong kong Cooperation Zone Shenzhen China |
| Manufacturer:            | TOPDON TECHNOLOGY Co., Ltd.                                                                      |
| Address of Manufacturer: | Unit 2005 20/F, Qianhai Shimao Tower, Qianhai Shenzhen-Hong kong Cooperation Zone Shenzhen China |
| Factory:                 | THINKCAR TECH CO., LTD.                                                                          |
| Address of Factory:      | 2606, building 4, phase II, TiananYungu, Gangtou community, Bantian, Longgang District, Shenzhen |

### 4.2 General Description of EUT

|                                  |                                                                                                                                                                                          |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name:                    | THINKTOOL mini, Professional Diagnostic Tool                                                                                                                                             |
| Model No.:                       | TKT02, ArtiDiag800BT, ArtiDiag800 BT 2                                                                                                                                                   |
| Test Model No.:                  | TKT02                                                                                                                                                                                    |
| Trade Mark:                      | TOPDON                                                                                                                                                                                   |
| Hardware Version:                | BSK-Y8-V3                                                                                                                                                                                |
| Software Version:                | V1.1.6                                                                                                                                                                                   |
| Test sample SN:                  | 988980001306V0                                                                                                                                                                           |
| EUT Power Supply:                | lithium battery:DC7.6V, 3150mAh, Limited Charge Voltage:DC 8.7V<br>Adapter:<br>MODEL: PSYB0502500<br>INPUT: 100-240V~50/60Hz 0.6A Max<br>OUTPUT: 5V 2.5A, 12.5W                          |
| EUT Supports Radios application: | Bluetooth Dual mode: 2402-2480MHz<br>2.4GHz: Wi-Fi: 802.11b/g/n(HT20): 2412MHz~2462MHz;<br>802.11n(HT40): 2422MHz~2452MHz<br>5GHz: Wi-Fi: U-NII-1: 5.15-5.25GHz; U-NII-3: 5.725-5.850GHz |

### 4.3 Product Specification subjective to this standard

|                      |                                                                                                                                                                   |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operation Frequency: | IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz<br>IEEE 802.11n(HT40): 2422MHz to 2452MHz                                                                              |
| Channel Numbers:     | IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels<br>IEEE 802.11n HT40: 7 Channels                                                                                   |
| Channel Separation:  | 5MHz                                                                                                                                                              |
| Type of Modulation:  | IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK)<br>IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK)<br>IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK) |
| Transfer Rate:       | IEEE for 802.11b:<br>1Mbps/2Mbps/5.5Mbps/11Mbps<br>IEEE for 802.11g :<br>6Mbps/9Mbps/12Mbps/18Mbps/24Mbps/36Mbps/48Mbps/54Mbps<br>IEEE for 802.11n(HT20) :        |

|                       |                                                                                                                                                              |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                       | 6.5Mbps/13Mbps/19.5Mbps/26Mbps/39Mbps/52Mbps/58.5Mbps/65Mbps<br>IEEE for 802.11n(HT40) :<br>13.5Mbps/27Mbps/40.5Mbps/54Mbps/81Mbps/108Mbps/121.5Mbps/135Mbps |
| Product Type:         | <input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location                                           |
| Test Software of EUT: | RF Test (manufacturer declare)                                                                                                                               |
| Antenna Type:         | internal antenna with ipex connector                                                                                                                         |
| Antenna Gain:         | 4.53dBi                                                                                                                                                      |

Model No.: TKT02, ArtiDiag800BT, ArtiDiag800 BT 2.

Only the model TKT02 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being color of appearance and model name.

| Operation Frequency each of channel(802.11b/g/n HT20) |           |         |           |         |           |         |           |
|-------------------------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                                               | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1                                                     | 2412MHz   | 4       | 2427MHz   | 7       | 2442MHz   | 10      | 2457MHz   |
| 2                                                     | 2417MHz   | 5       | 2432MHz   | 8       | 2447MHz   | 11      | 2462MHz   |
| 3                                                     | 2422MHz   | 6       | 2437MHz   | 9       | 2452MHz   |         |           |
| Operation Frequency each of channel(802.11n HT40)     |           |         |           |         |           |         |           |
| Channel                                               | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 3                                                     | 2422MHz   | 6       | 2437MHz   | 9       | 2452MHz   |         |           |
| 4                                                     | 2427MHz   | 7       | 2442MHz   |         |           |         |           |
| 5                                                     | 2432MHz   | 8       | 2447MHz   |         |           |         |           |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

| Channel             | Frequency |
|---------------------|-----------|
| The Lowest channel  | 2412MHz   |
| The Middle channel  | 2437MHz   |
| The Highest channel | 2462MHz   |


For 802.11n (HT40):

| Channel             | Frequency |
|---------------------|-----------|
| The Lowest channel  | 2422MHz   |
| The Middle channel  | 2437MHz   |
| The Highest channel | 2452MHz   |

Note:

Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

#### 4.4 Test Environment and Mode

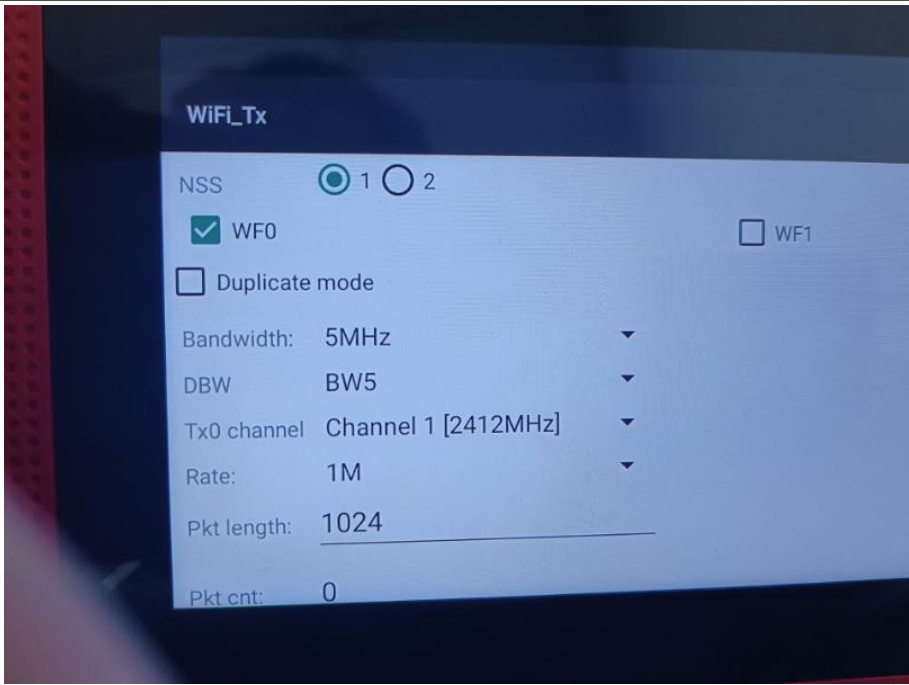
|                                                                                      |                                                                                          |
|--------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| <b>Operating Environment:</b>                                                        |                                                                                          |
| <b>Radiated Emissions:</b>                                                           |                                                                                          |
| Temperature:                                                                         | 25.3 °C                                                                                  |
| Humidity:                                                                            | 55 % RH                                                                                  |
| Atmospheric Pressure:                                                                | 1009 mbar                                                                                |
| <b>Conducted Emissions:</b>                                                          |                                                                                          |
| Temperature:                                                                         | 25.6 °C                                                                                  |
| Humidity:                                                                            | 60 % RH                                                                                  |
| Atmospheric Pressure:                                                                | 1009 mbar                                                                                |
| <b>Radio conducted item test (RF Conducted test room):</b>                           |                                                                                          |
| Temperature:                                                                         | 25.5 °C                                                                                  |
| Humidity:                                                                            | 52 % RH                                                                                  |
| Atmospheric Pressure:                                                                | 1009 mbar                                                                                |
| <b>Test mode:</b>                                                                    |                                                                                          |
| Transmitting mode:                                                                   | Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate. |
| <b>Run Software:</b>                                                                 |                                                                                          |
|  |                                                                                          |

| Operated Mode for Worst Duty Cycle: |               |                               |
|-------------------------------------|---------------|-------------------------------|
| Test Mode                           | Duty Cycle(x) | Average correction factor(dB) |
| IEEE802.11b                         | 99.31         | 0.030                         |
| IEEE802.11g                         | 93.87         | 0.275                         |
| IEEE802.11n (HT20)                  | 93.61         | 0.287                         |
| IEEE802.11n (HT40)                  | 83.34         | 0.791                         |

**Remark:**


- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor =  $10 * \log(1/ \text{Duty cycle})$ ;

Test Graph\_ IEEE802.11b Duty Cycle:

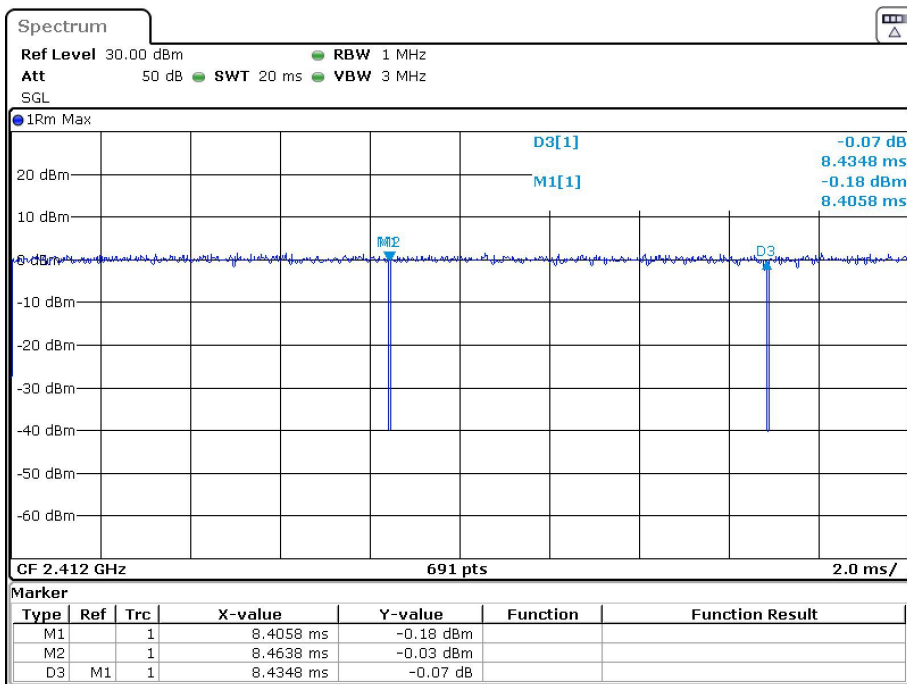


Date: 29.SEP.2021 13:03:42

Test Graph\_ IEEE802.11g Duty Cycle:

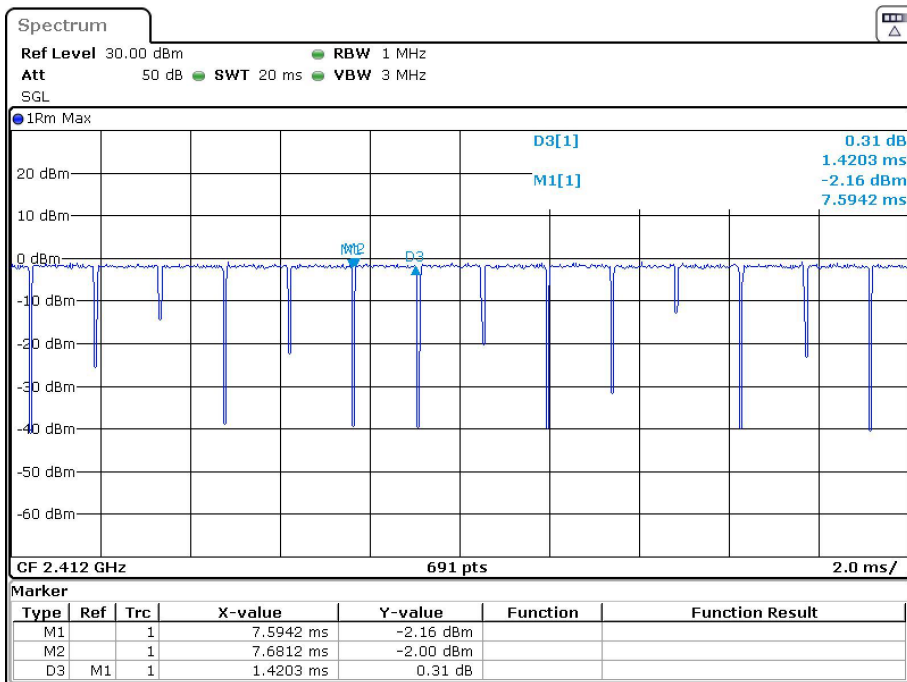


Date: 29.SEP.2021 13:05:14

Test Graph\_ IEEE802.11 n (HT20) Duty Cycle:

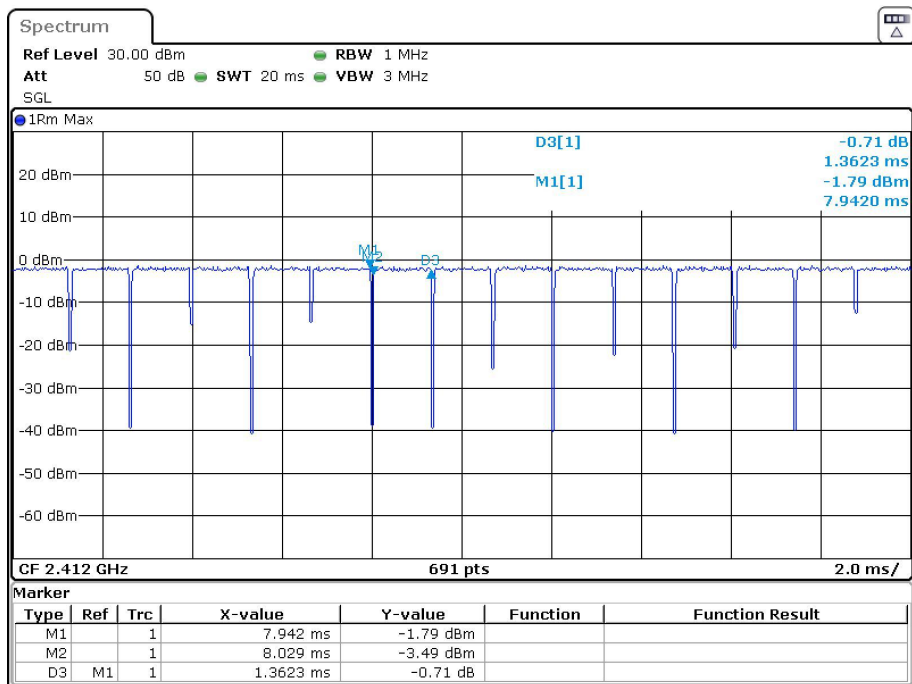

Date: 29.SEP.2021 13:06:25

Test Graph\_ IEEE802.11 n (HT40) Duty Cycle:

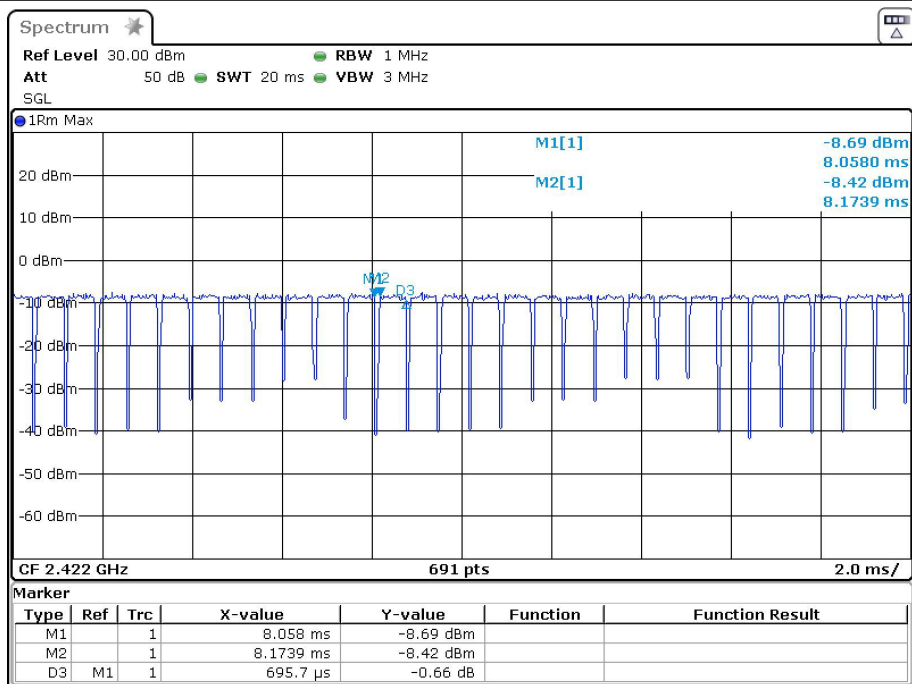

Date: 29.SEP.2021 13:07:34

## 4.5 Description of Support Units

The EUT has been tested with associated equipment below.

### 1) Support equipment

| Description | Manufacturer | Model No. | Certification | Supplied by |
|-------------|--------------|-----------|---------------|-------------|
|             |              |           |               |             |

### 2) Cable

| Cable No. | Description | Manufacturer | Cable Type/Length | Supplied by |
|-----------|-------------|--------------|-------------------|-------------|
| /         | /           | /            | /                 | /           |

## 4.6 Test Location

All tests were performed at:

**Shenzhen Huaxia Testing Technology Co., Ltd.,**

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

## 4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

## 4.8 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

| No. | Item                               | Uncertainty        | Notes |
|-----|------------------------------------|--------------------|-------|
| 1   | Radiated Emission (Below 1GHz)     | 5.12dB             | (1)   |
| 2   | Radiated Emission (Above 1GHz)     | 4.60dB             | (1)   |
| 3   | Conducted Disturbance (0.15~30MHz) | 3.34dB             | (1)   |
| 4   | Radio Frequency                    | $3 \times 10^{-8}$ | (1)   |
| 5   | Duty cycle                         | 0.6 %.             | (1)   |
| 6   | Occupied Bandwidth                 | 1.1%               | (1)   |
| 7   | RF conducted power                 | 0.86dB             | (1)   |
| 8   | RF power density                   | 0.74               | (1)   |
| 9   | Conducted Spurious emissions       | 0.86dB             | (1)   |
| 10  | Temperature test                   | 0.8℃               | (1)   |
| 11  | Humidity test                      | 2.0%               | (1)   |
| 12  | Supply voltages                    | 0.5 %.             | (1)   |
| 13  | Frequency Error                    | 5.5 Hz             | (1)   |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

## 4.9 Deviation from Standards

None.

## 4.10 Abnormalities from Standard Conditions

None.

## 4.11 Other Information Requested by the Customer

None.

## 4.12 Equipment List


| Test Equipment                            | Manufacturer | Model No.              | Instrument No. | Calibration Date | Calibration Due Date |
|-------------------------------------------|--------------|------------------------|----------------|------------------|----------------------|
| EMI Test Receiver                         | R&S          | ESR7                   | CQA-005        | 2023/9/8         | 2024/9/7             |
| Spectrum analyzer                         | R&S          | FSU26                  | CQA-038        | 2023/9/8         | 2024/9/7             |
| Spectrum analyzer                         | R&S          | FSU40                  | CQA-075        | 2023/9/8         | 2024/9/7             |
| Preamplifier                              | MITEQ        | AFS4-00010300-18-10P-4 | CQA-035        | 2023/9/8         | 2024/9/7             |
| Preamplifier                              | MITEQ        | AMF-6D-02001800-29-20P | CQA-036        | 2023/9/8         | 2024/9/7             |
| Preamplifier                              | EMCI         | EMC184055SE            | CQA-089        | 2023/9/8         | 2024/9/7             |
| Loop antenna                              | Schwarzbeck  | FMZB1516               | CQA-060        | 2021/9/16        | 2024/9/15            |
| Bilog Antenna                             | R&S          | HL562                  | CQA-011        | 2021/9/16        | 2024/9/15            |
| Horn Antenna                              | R&S          | HF906                  | CQA-012        | 2021/9/16        | 2024/9/15            |
| Horn Antenna                              | Schwarzbeck  | BBHA 9170              | CQA-088        | 2021/9/16        | 2024/9/15            |
| Coaxial Cable (Above 1GHz)                | CQA          | N/A                    | C007           | 2023/9/8         | 2024/9/7             |
| Coaxial Cable (Below 1GHz)                | CQA          | N/A                    | C013           | 2023/9/8         | 2024/9/7             |
| RF cable(9KHz~40GHz)                      | CQA          | RF-01                  | CQA-079        | 2023/9/8         | 2024/9/7             |
| Antenna Connector                         | CQA          | RFC-01                 | CQA-080        | 2023/9/8         | 2024/9/7             |
| Power Sensor                              | KEYSIGHT     | U2021XA                | CQA-30         | 2023/9/8         | 2024/9/7             |
| N1918A Power Analysis Manager Power Panel | Agilent      | N1918A                 | CQA-074        | 2023/9/8         | 2024/9/7             |
| Power meter                               | R&S          | NRVD                   | CQA-029        | 2023/9/8         | 2024/9/7             |
| Power divider                             | MIDWEST      | PWD-2533-02-SMA-79     | CQA-067        | 2023/9/8         | 2024/9/7             |
| EMI Test Receiver                         | R&S          | ESR7                   | CQA-005        | 2023/9/8         | 2024/9/7             |
| LISN                                      | R&S          | ENV216                 | CQA-003        | 2023/9/8         | 2024/9/7             |
| Coaxial cable                             | CQA          | N/A                    | CQA-C009       | 2023/9/8         | 2024/9/7             |
| DC power                                  | KEYSIGHT     | E3631A                 | CQA-028        | 2023/9/8         | 2024/9/7             |

Test software:


|                                   | Manufacturer | Software brand |
|-----------------------------------|--------------|----------------|
| Radiated Emissions test software  | Tonscend     | JS1120-3       |
| Conducted Emissions test software | Audix        | e3             |
| RF Conducted test software        | Audix        | e3             |

## 5 Test results and Measurement Data

### 5.1 Antenna Requirement
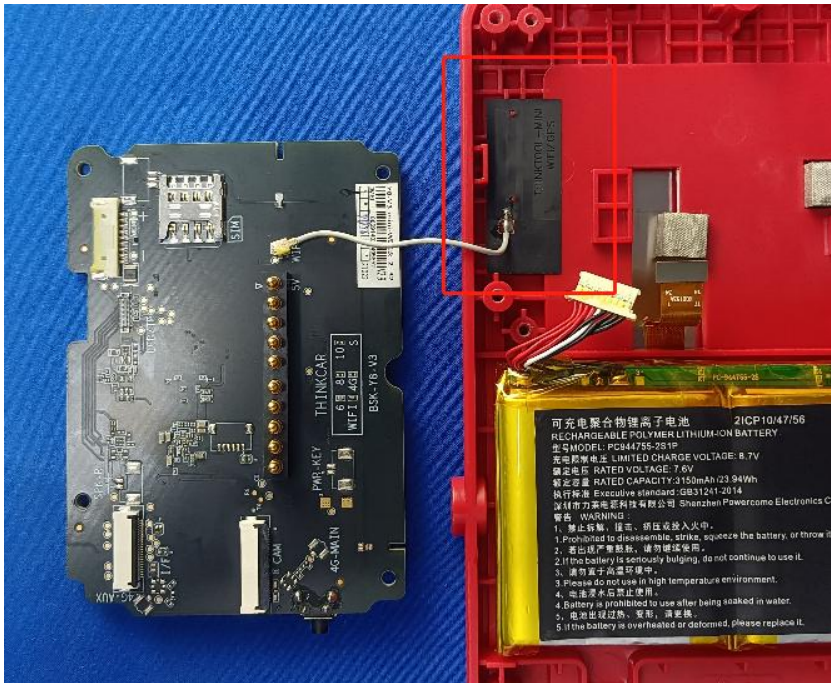
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                     |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Standard requirement:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 47 CFR Part 15C Section 15.203 /247(c)                                              |
| <p>15.203 requirement:<br/>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement:<br/>The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> |                                                                                     |
| EUT Antenna:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |  |
| The antenna is internal antenna with ipex connector. The best case gain of the antenna is 4.53dBi.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                     |


## 5.2 Conducted Emissions
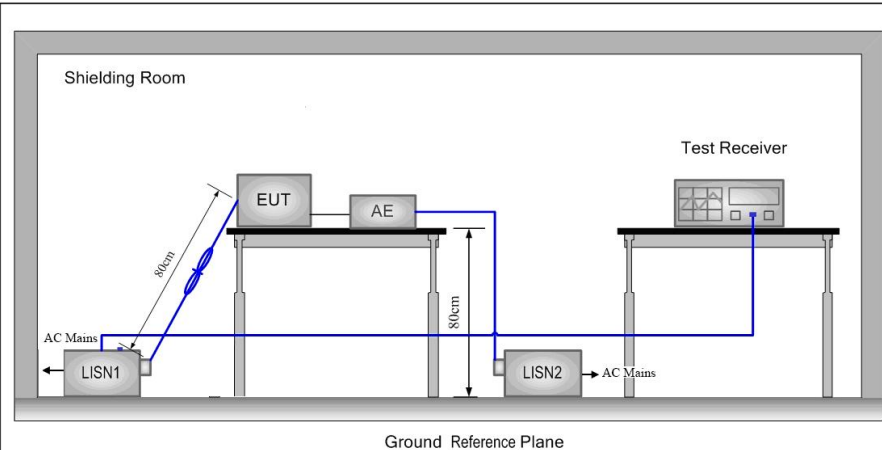
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |              |           |
|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------|
| Test Requirement:                                | 47 CFR Part 15C Section 15.207                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |              |           |
| Test Method:                                     | ANSI C63.10: 2013                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |              |           |
| Test Frequency Range:                            | 150kHz to 30MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |              |           |
| Limit:                                           | Frequency range (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Limit (dBuV) |           |
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Quasi-peak   | Average   |
|                                                  | 0.15-0.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 66 to 56*    | 56 to 46* |
|                                                  | 0.5-5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 56           | 46        |
|                                                  | 5-30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 60           | 50        |
| * Decreases with the logarithm of the frequency. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |              |           |
| Test Procedure:                                  | <ol style="list-style-type: none"> <li>1) The mains terminal disturbance voltage test was conducted in a shielded room.</li> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a <math>50\Omega/50\mu\text{H} + 5\Omega</math> linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</li> <li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</li> </ol> |              |           |
| Test Setup:                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |              |           |

|                        |                                                                                                                                            |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.                                               |
| Final Test Mode:       | Through Pre-scan, find the 1Mbps of rate of 802.11b at middle channel is the worst case.<br>Only the worst case is recorded in the report. |
| Test Voltage:          | AC120V/60Hz                                                                                                                                |
| Test Results:          | Pass                                                                                                                                       |

## Measurement Data

Live Line:

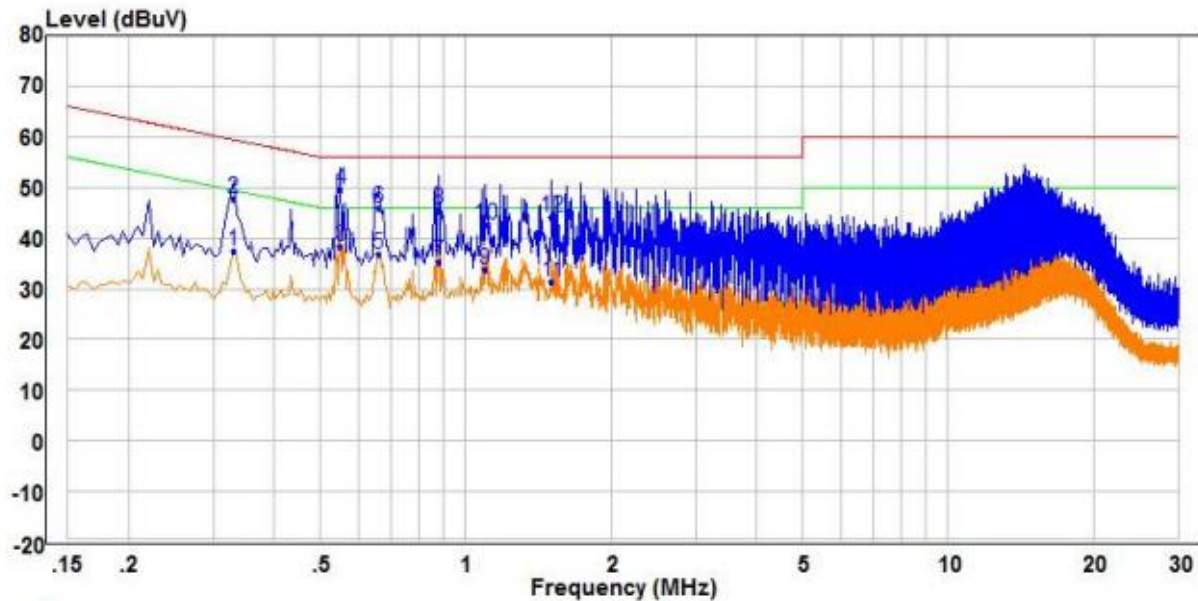


|      | Freq  | Read Level | Factor | Level | Limit Line | Over Limit | Remark  | Pol/Phase |
|------|-------|------------|--------|-------|------------|------------|---------|-----------|
|      | MHz   | dBuV       | dB     | dBuV  | dBuV       | dB         |         |           |
| 1    | 0.330 | 27.93      | 9.53   | 37.46 | 49.45      | -11.99     | Average | Line      |
| 2    | 0.330 | 38.36      | 9.53   | 47.89 | 59.45      | -11.56     | QP      | Line      |
| 3 AV | 0.550 | 28.55      | 9.75   | 38.30 | 46.00      | -7.70      | Average | Line      |
| 4 PP | 0.550 | 39.85      | 9.75   | 49.60 | 56.00      | -6.40      | QP      | Line      |
| 5    | 0.660 | 27.04      | 9.86   | 36.90 | 46.00      | -9.10      | Average | Line      |
| 6    | 0.660 | 36.26      | 9.86   | 46.12 | 56.00      | -9.88      | QP      | Line      |
| 7    | 0.880 | 25.54      | 9.78   | 35.32 | 46.00      | -10.68     | Average | Line      |
| 8    | 0.880 | 35.78      | 9.78   | 45.56 | 56.00      | -10.44     | QP      | Line      |
| 9    | 1.095 | 23.78      | 9.95   | 33.73 | 46.00      | -12.27     | Average | Line      |
| 10   | 1.095 | 32.61      | 9.95   | 42.56 | 56.00      | -13.44     | QP      | Line      |
| 11   | 1.510 | 20.55      | 10.86  | 31.41 | 46.00      | -14.59     | Average | Line      |
| 12   | 1.510 | 33.32      | 10.86  | 44.18 | 56.00      | -11.82     | QP      | Line      |

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

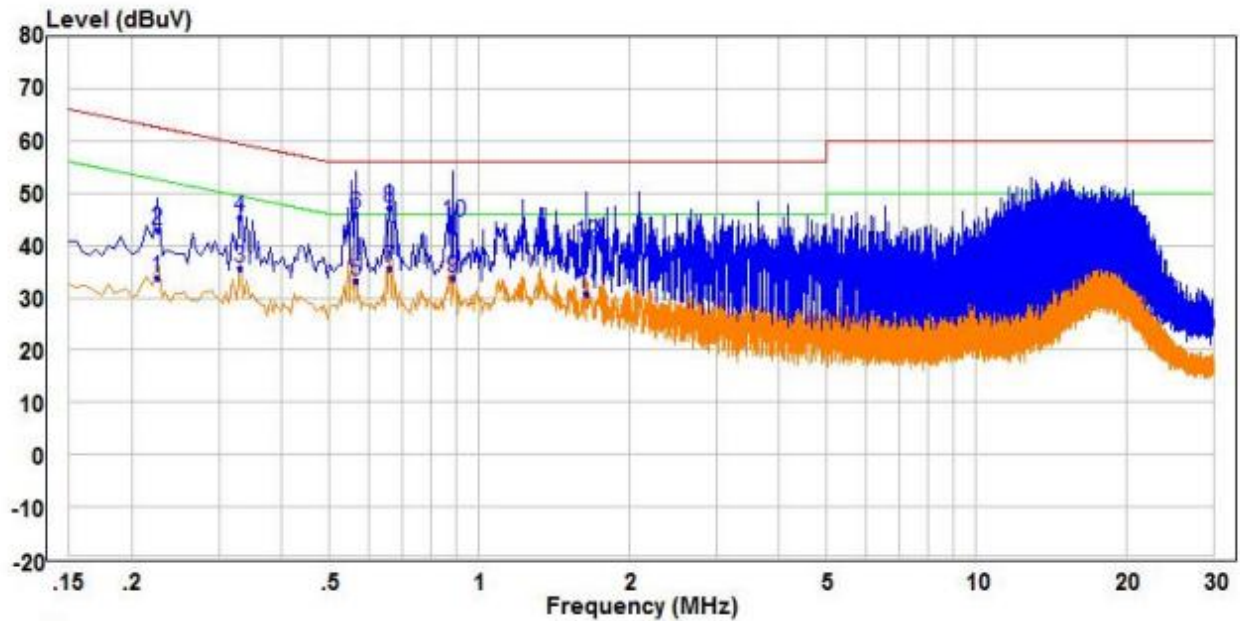


|      | Freq  | Read Level | Factor | Level | Limit Line | Over Limit | Remark  | Pol/Phase |
|------|-------|------------|--------|-------|------------|------------|---------|-----------|
|      | MHz   | dBuV       | dB     | dBuV  | dBuV       | dB         |         |           |
| 1    | 0.225 | 24.17      | 9.57   | 33.74 | 52.63      | -18.89     | Average | Neutral   |
| 2    | 0.225 | 33.32      | 9.57   | 42.89 | 62.63      | -19.74     | QP      | Neutral   |
| 3    | 0.330 | 26.20      | 9.52   | 35.72 | 49.45      | -13.73     | Average | Neutral   |
| 4    | 0.330 | 35.87      | 9.52   | 45.39 | 59.45      | -14.06     | QP      | Neutral   |
| 5    | 0.565 | 23.48      | 9.77   | 33.25 | 46.00      | -12.75     | Average | Neutral   |
| 6    | 0.565 | 36.12      | 9.77   | 45.89 | 56.00      | -10.11     | QP      | Neutral   |
| 7 AV | 0.660 | 25.64      | 9.86   | 35.50 | 46.00      | -10.50     | Average | Neutral   |
| 8 PP | 0.660 | 37.28      | 9.86   | 47.14 | 56.00      | -8.86      | QP      | Neutral   |
| 9    | 0.885 | 24.04      | 9.78   | 33.82 | 46.00      | -12.18     | Average | Neutral   |
| 10   | 0.885 | 34.66      | 9.78   | 44.44 | 56.00      | -11.56     | QP      | Neutral   |
| 11   | 1.650 | 20.92      | 9.73   | 30.65 | 46.00      | -15.35     | Average | Neutral   |
| 12   | 1.650 | 30.69      | 9.73   | 40.42 | 56.00      | -15.58     | QP      | Neutral   |

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.


### 5.3 Conducted Peak & Average Output Power

|                        |                                                                                                                                                                                                                                                                            |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (b)(3)                                                                                                                                                                                                                                      |
| Test Method:           | ANSI C63.10: 2013                                                                                                                                                                                                                                                          |
| Test Setup:            |                                                                                                                                                                                          |
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates                                                                                                                                                                                                                      |
| Final Test Mode:       | Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report. |
| Limit:                 | 30dBm                                                                                                                                                                                                                                                                      |
| Test Results:          | Pass                                                                                                                                                                                                                                                                       |

**Measurement Data**

| 802.11b mode                                        |                         |                            |             |        |
|-----------------------------------------------------|-------------------------|----------------------------|-------------|--------|
| Test channel                                        | Peak Output Power (dBm) | Average Output Power (dBm) | Limit (dBm) | Result |
| Lowest                                              | 12.68                   | 9.38                       | 30.00       | Pass   |
| Middle                                              | 14                      | 9.34                       | 30.00       | Pass   |
| Highest                                             | 13.09                   | 9.53                       | 30.00       | Pass   |
| 802.11g mode                                        |                         |                            |             |        |
| Test channel                                        | Peak Output Power (dBm) | Average Output Power (dBm) | Limit (dBm) | Result |
| Lowest                                              | 12.57                   | 8.47                       | 30.00       | Pass   |
| Middle                                              | 14.13                   | 8.75                       | 30.00       | Pass   |
| Highest                                             | 13.19                   | 8.67                       | 30.00       | Pass   |
| 802.11n(HT20)mode                                   |                         |                            |             |        |
| Test channel                                        | Peak Output Power (dBm) | Average Output Power (dBm) | Limit (dBm) | Result |
| Lowest                                              | 13.06                   | 8.55                       | 30.00       | Pass   |
| Middle                                              | 14.66                   | 8.9                        | 30.00       | Pass   |
| Highest                                             | 13.83                   | 8.7                        | 30.00       | Pass   |
| 802.11n(HT40)mode                                   |                         |                            |             |        |
| Test channel                                        | Peak Output Power (dBm) | Average Output Power (dBm) | Limit (dBm) | Result |
| Lowest                                              | 12.55                   | 7.79                       | 30.00       | Pass   |
| Middle                                              | 13.07                   | 7.85                       | 30.00       | Pass   |
| Highest                                             | 12.66                   | 7.87                       | 30.00       | Pass   |
| Remark:                                             |                         |                            |             |        |
| 1. Average Output Power was for reference only      |                         |                            |             |        |
| 2. Average Output Power had added duty cycle factor |                         |                            |             |        |


## 5.4 6dB Occupy Bandwidth
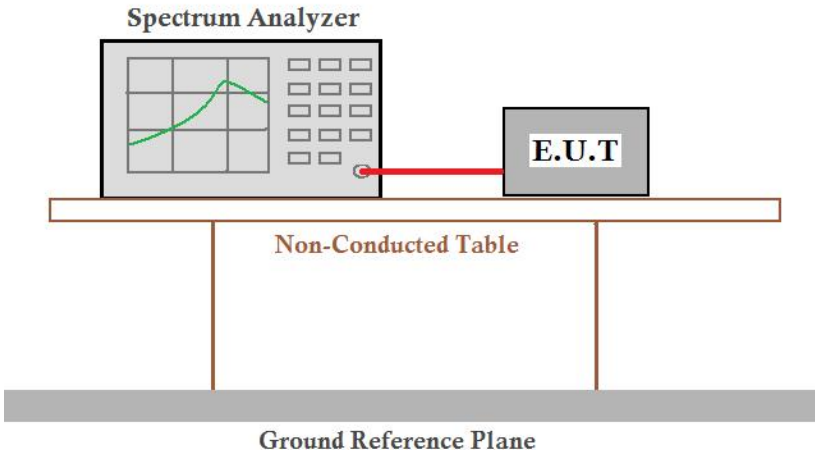
|                        |                                                                                                                                                                                                                                                                               |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (a)(2)                                                                                                                                                                                                                                         |
| Test Method:           | ANSI C63.10: 2013                                                                                                                                                                                                                                                             |
| Test Setup:            |  <p>Offset=cable loss+ attenuation factor</p>                                                                                                                                               |
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates                                                                                                                                                                                                                         |
| Final Test Mode:       | Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).<br>Only the worst case is recorded in the report. |
| Limit:                 | $\geq 500$ kHz                                                                                                                                                                                                                                                                |
| Test Results:          | Pass                                                                                                                                                                                                                                                                          |


**Measurement Data**

| 802.11b mode                      |                            |               |             |        |
|-----------------------------------|----------------------------|---------------|-------------|--------|
| Test channel                      | 6dB Occupy Bandwidth (MHz) | 99% OBW [MHz] | Limit (MHz) | Result |
| Lowest                            | 8.120                      | 12.720        | $\geq 0.5$  | Pass   |
| Middle                            | 8.120                      | 12.920        | $\geq 0.5$  | Pass   |
| Highest                           | 8.120                      | 12.720        | $\geq 0.5$  | Pass   |
| 802.11g mode                      |                            |               |             |        |
| Test channel                      | 6dB Occupy Bandwidth (MHz) | 99% OBW [MHz] | Limit (MHz) | Result |
| Lowest                            | 15.520                     | 16.720        | $\geq 0.5$  | Pass   |
| Middle                            | 15.560                     | 16.680        | $\geq 0.5$  | Pass   |
| Highest                           | 15.200                     | 16.680        | $\geq 0.5$  | Pass   |
| 802.11n(HT20) mode                |                            |               |             |        |
| Test channel                      | 6dB Occupy Bandwidth (MHz) | 99% OBW [MHz] | Limit (MHz) | Result |
| Lowest                            | 15.520                     | 17.760        | $\geq 0.5$  | Pass   |
| Middle                            | 15.200                     | 17.760        | $\geq 0.5$  | Pass   |
| Highest                           | 15.200                     | 17.760        | $\geq 0.5$  | Pass   |
| 802.11n(HT40)mode                 |                            |               |             |        |
| Test channel                      | 6dB Occupy Bandwidth (MHz) | 99% OBW [MHz] | Limit (MHz) | Result |
| Lowest                            | 35.280                     | 36.480        | $\geq 0.5$  | Pass   |
| Middle                            | 35.280                     | 36.320        | $\geq 0.5$  | Pass   |
| Highest                           | 35.280                     | 36.320        | $\geq 0.5$  | Pass   |
| Remark:                           |                            |               |             |        |
| 1. 99% OBW was for reference only |                            |               |             |        |

Test plot as follows:

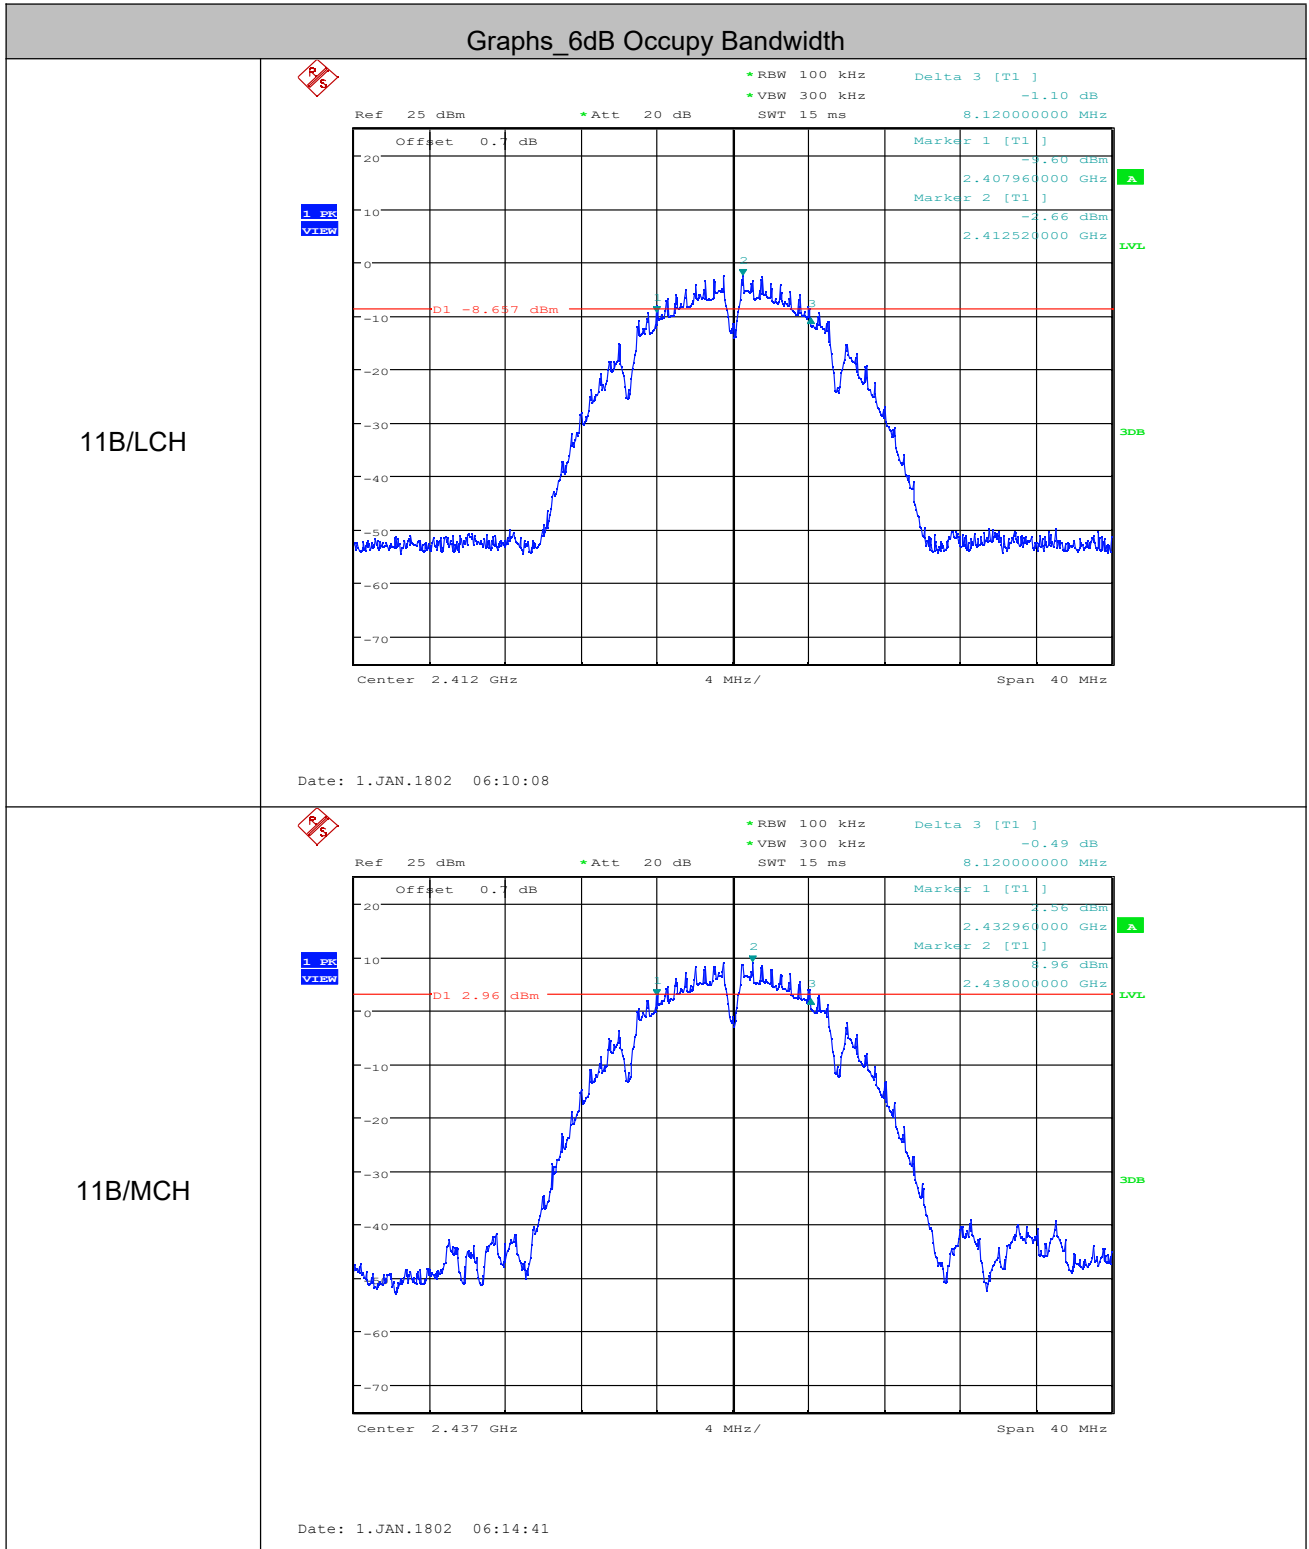


11B/HCH

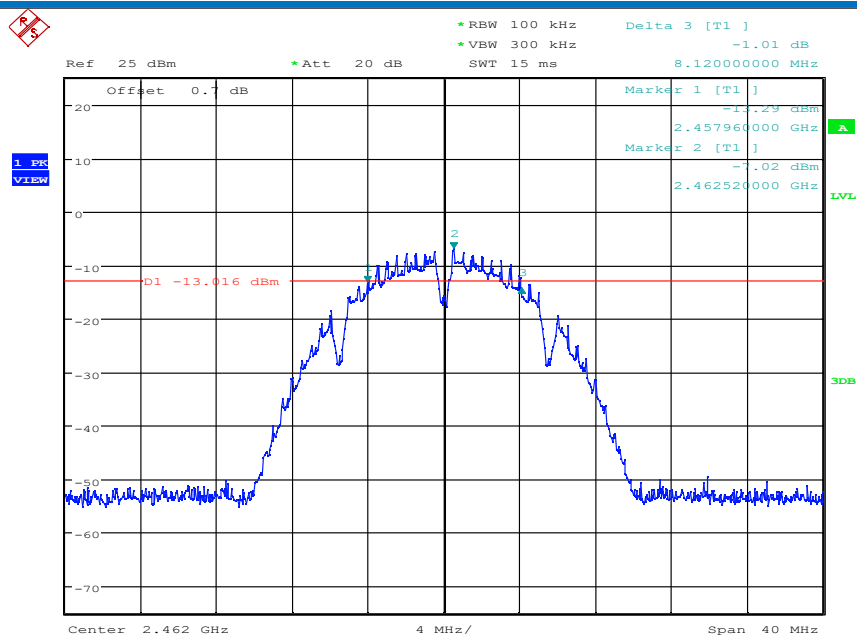


Date: 1.JAN.1802 06:23:20

11G/LCH

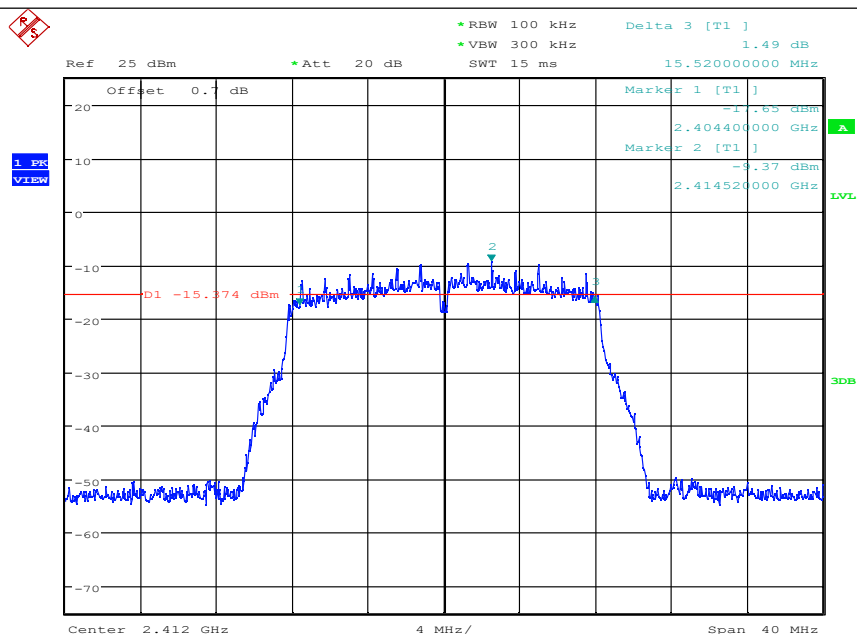


Date: 1.JAN.1802 03:34:47

11G/MCH

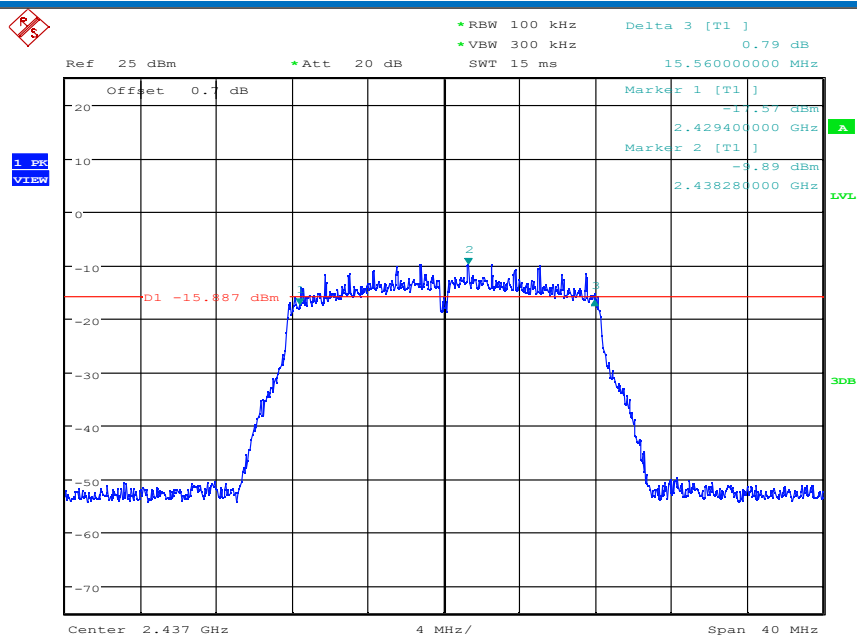


Date: 1.JAN.1802 03:39:25

11G/HCH

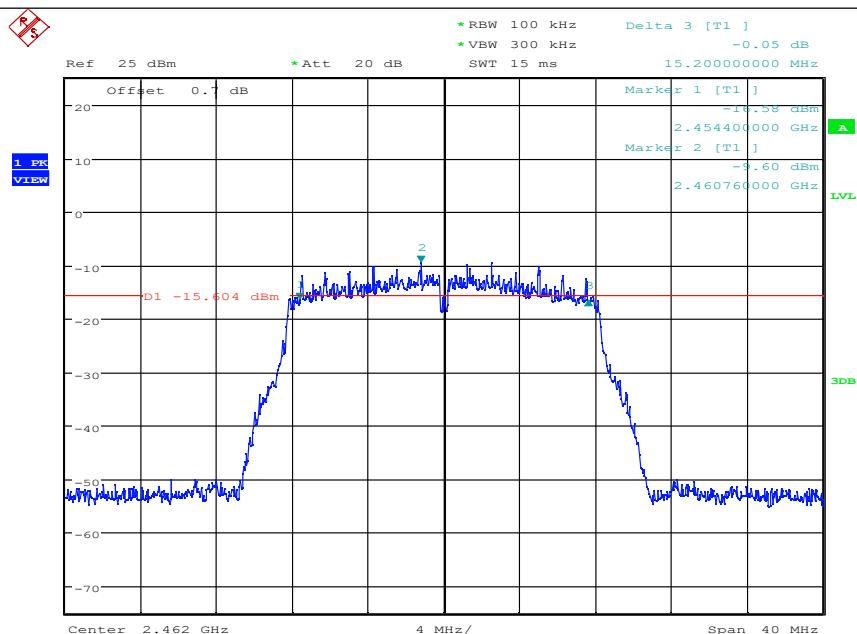


Date: 1.JAN.1802 03:43:34

11N20SISO/LCH

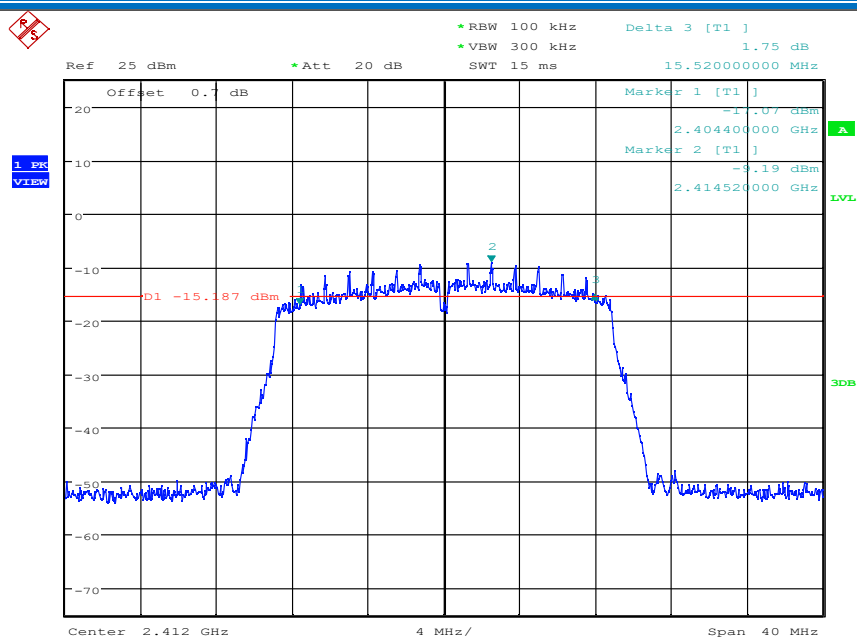


Date: 1.JAN.1802 03:49:14

11N20SISO/MCH

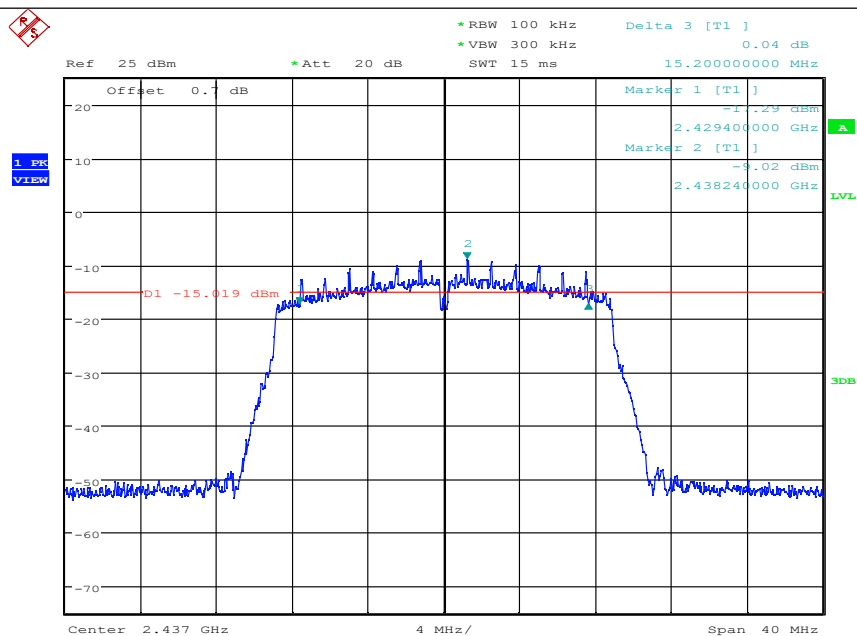


Date: 1.JAN.1802 05:14:24

11N20SISO/HCH

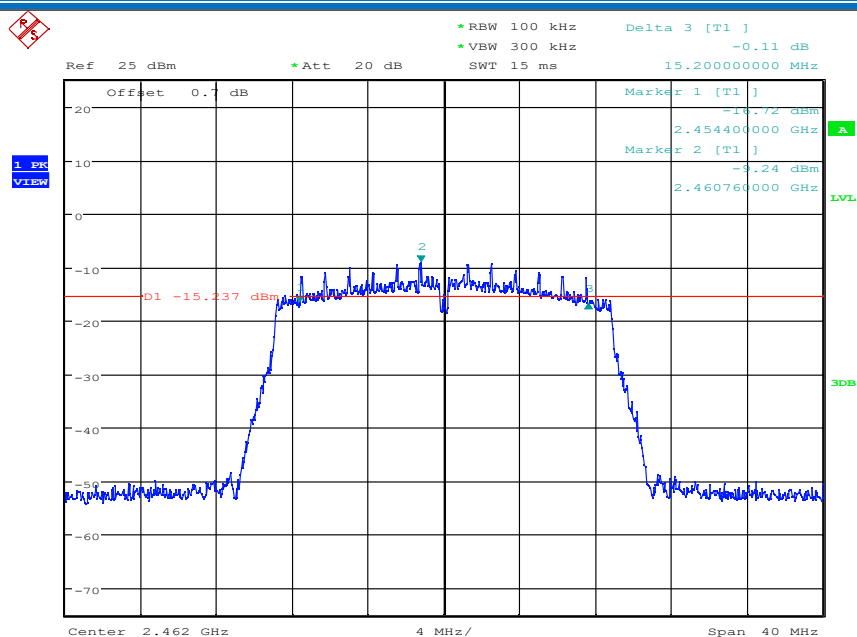


Date: 1.JAN.1802 05:23:52

11N40SISO/LCH

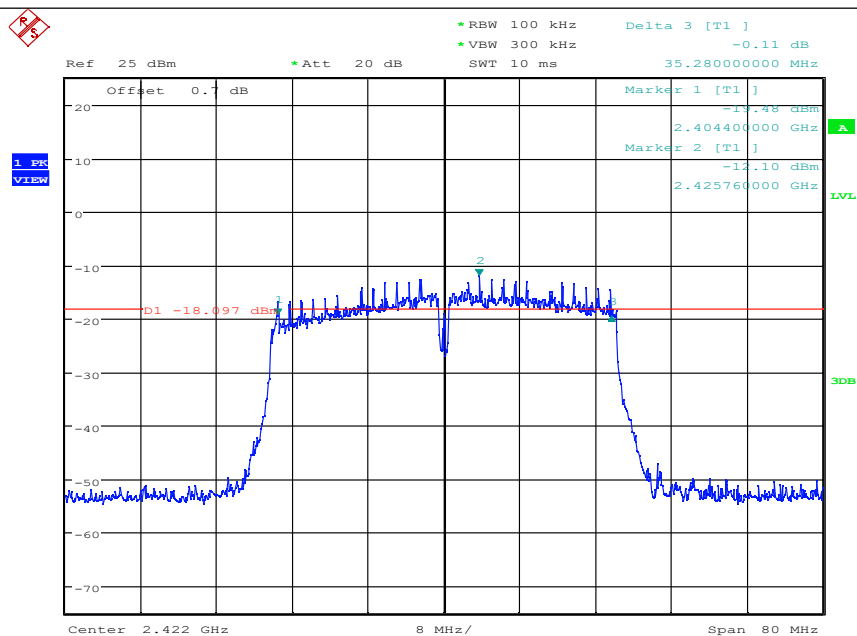


Date: 1.JAN.1802 05:44:51

11N40SISO/MCH

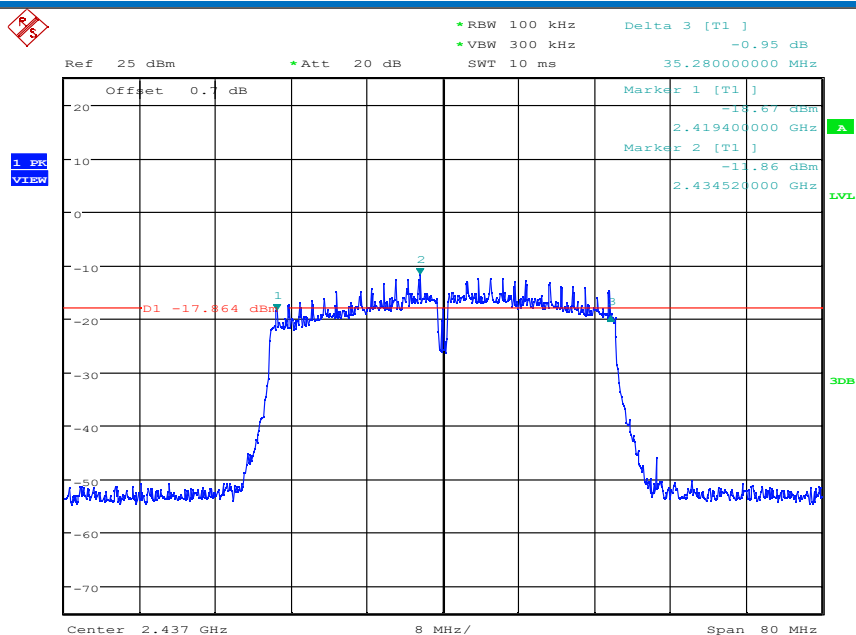

Date: 1.JAN.1802 05:49:22


11N40SISO/HCH

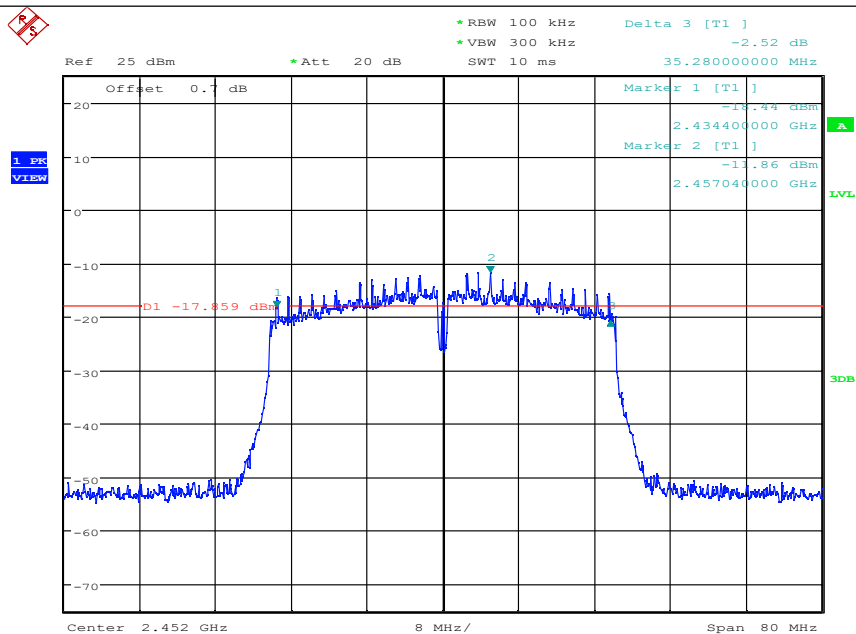

Date: 1.JAN.1802 05:55:36


Graphs\_99% OBW

11B/LCH

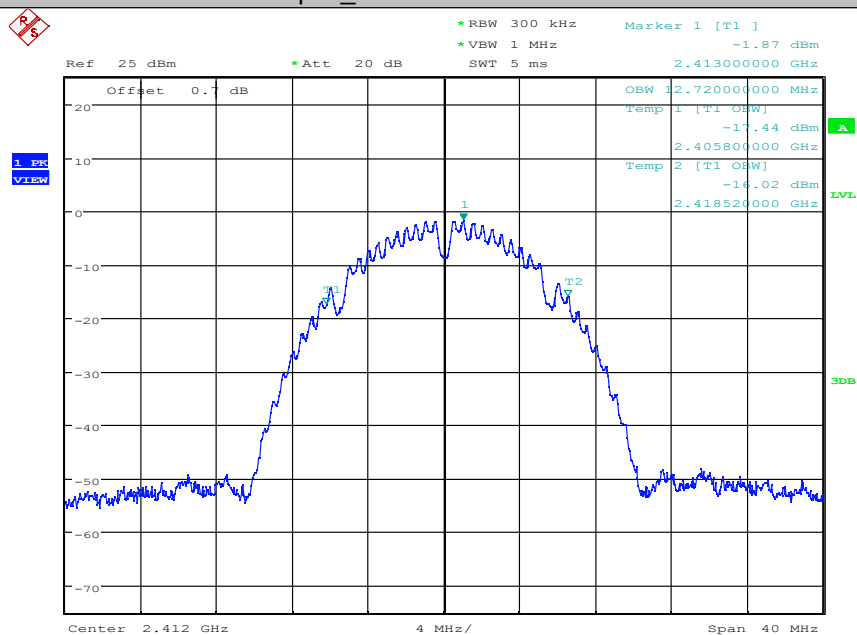


Date: 1.JAN.1802 06:10:30

11B/MCH

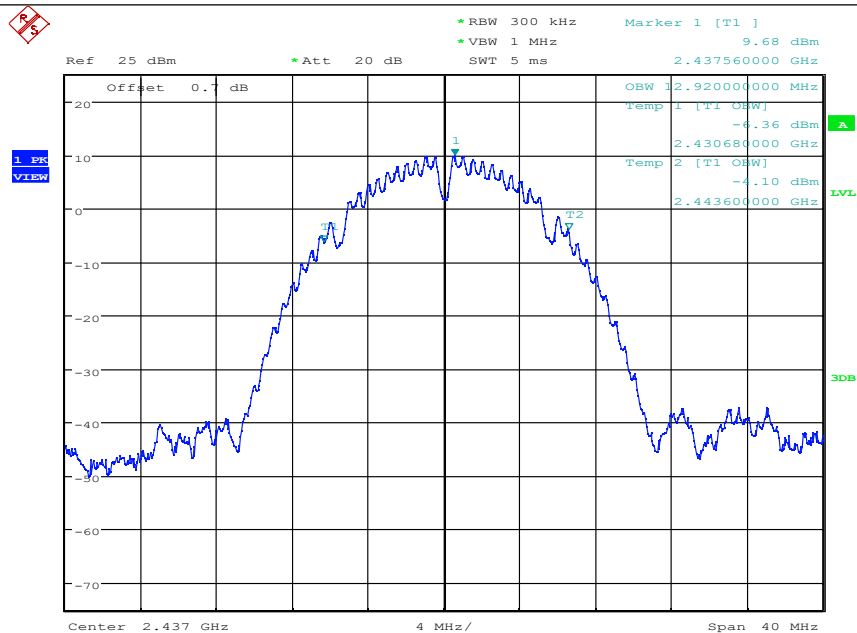


Date: 1.JAN.1802 06:15:03

11B/HCH

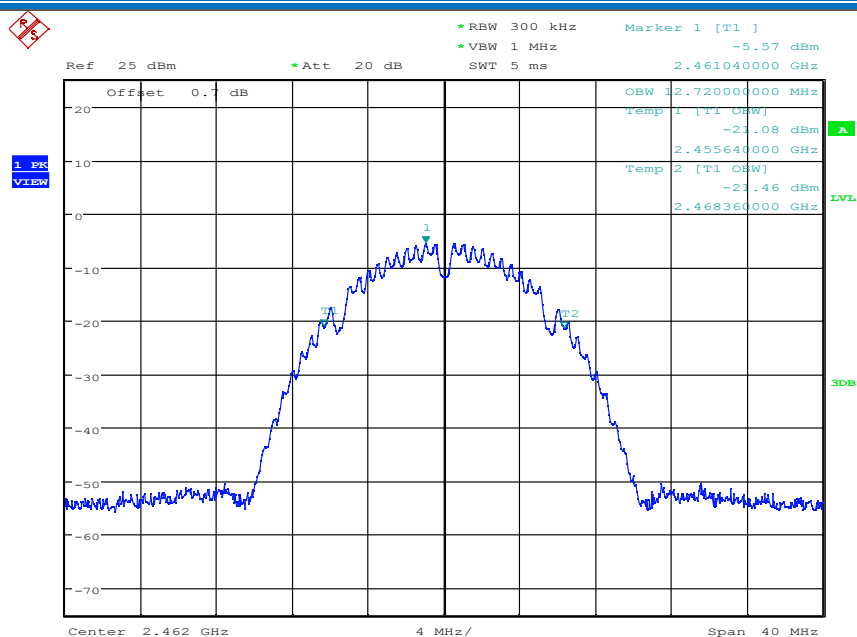


Date: 1.JAN.1802 06:23:43

11G/LCH

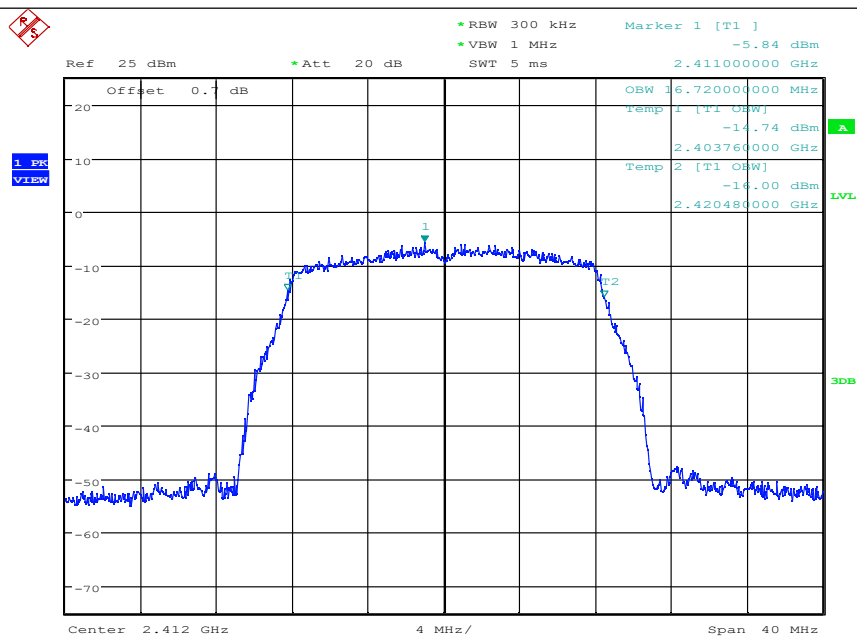


Date: 1.JAN.1802 03:35:09


11G/MCH

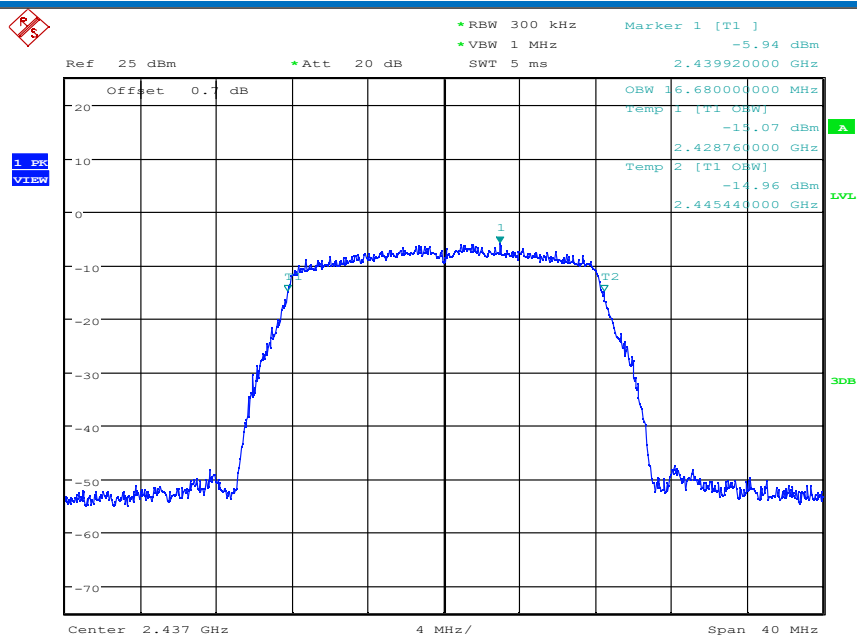

11G/HCH

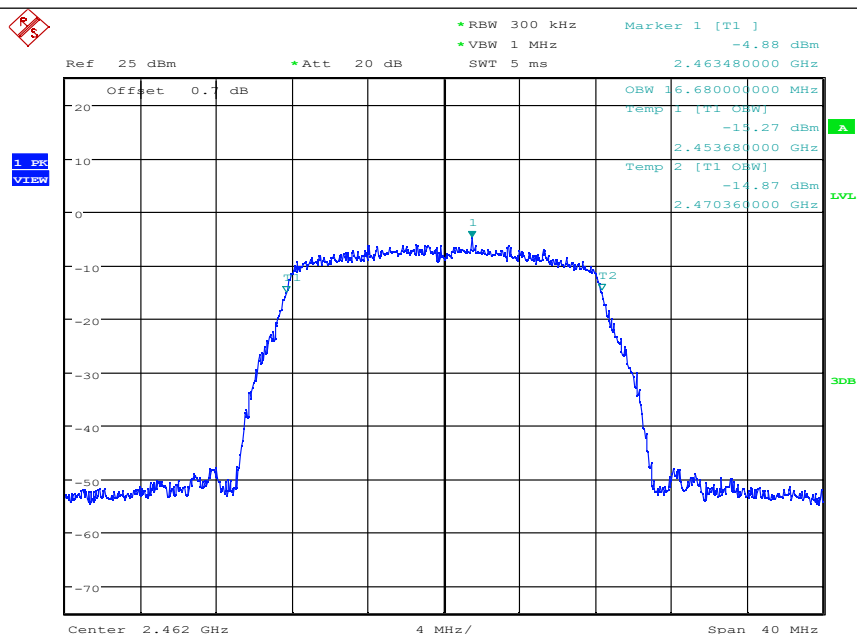


11N20SISO/LCH

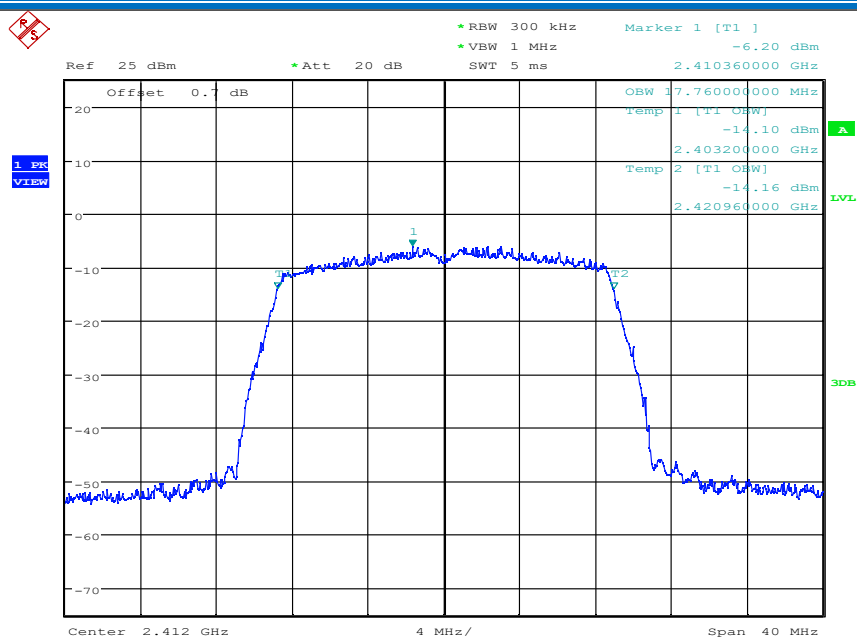


Date: 1.JAN.1802 03:49:57

11N20SISO/MCH

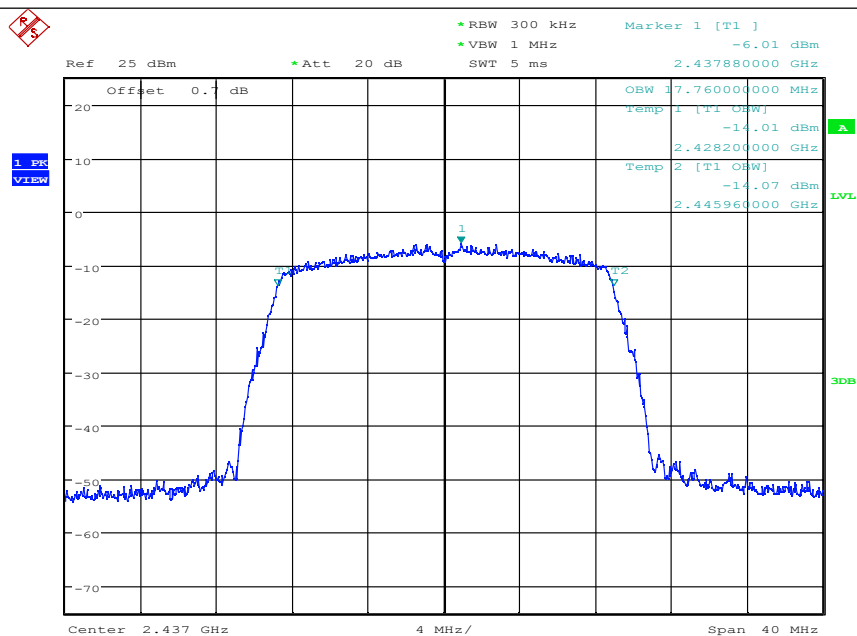


Date: 1.JAN.1802 05:15:07

11N20SISO/HCH

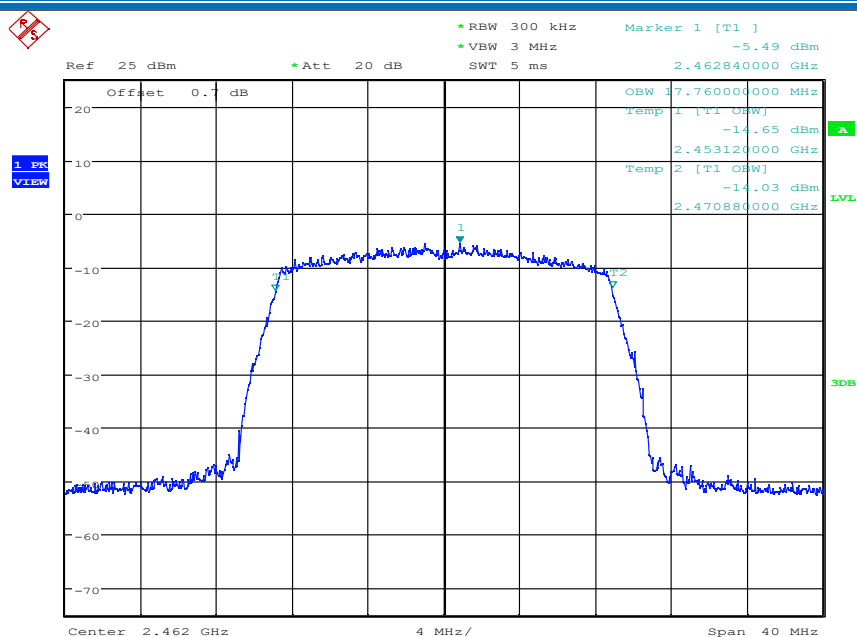


Date: 1.JAN.1802 05:24:35

11N40SISO/LCH

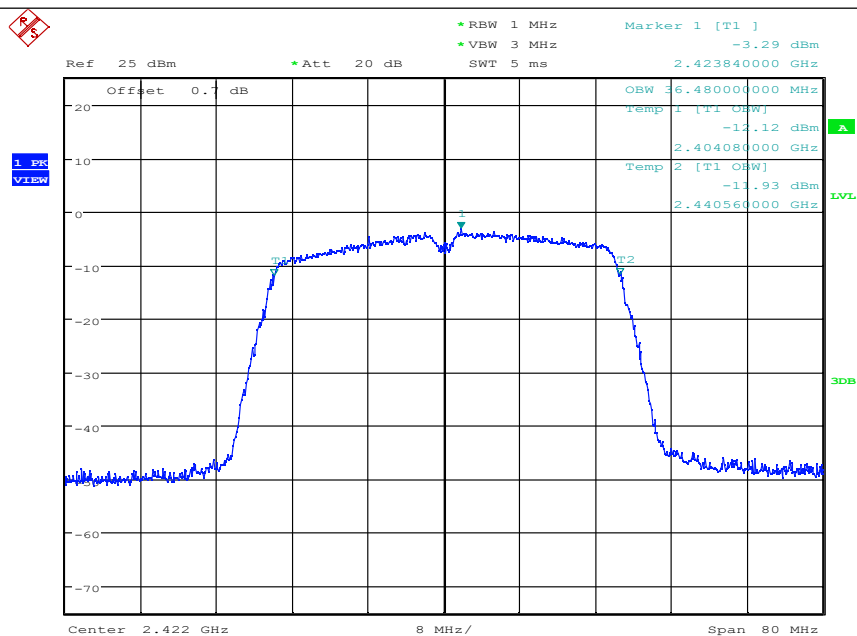


Date: 1.JAN.1802 05:45:13

11N40SISO/MCH

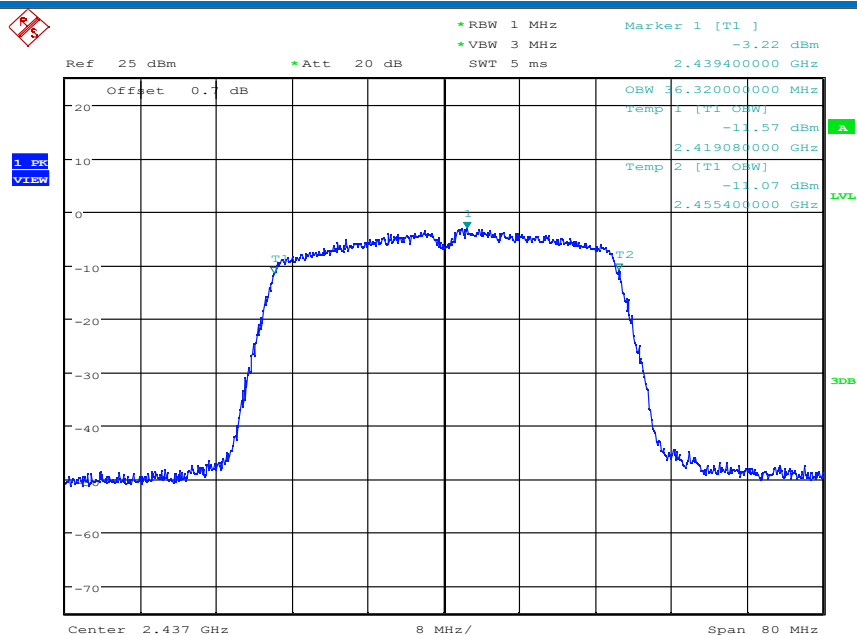


Date: 1.JAN.1802 05:49:45

11N40SISO/HCH

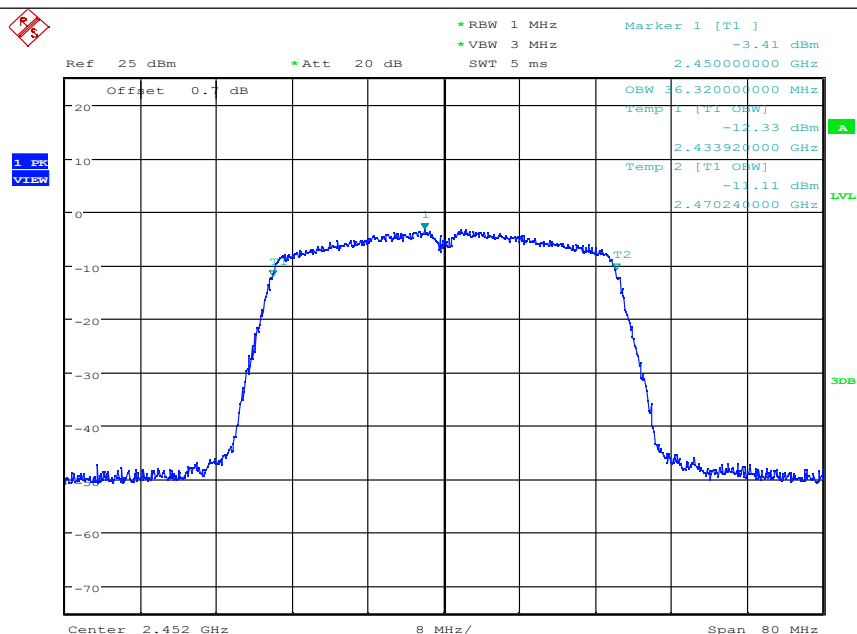

Date: 1.JAN.1802 05:55:59


## 5.5 Power Spectral Density
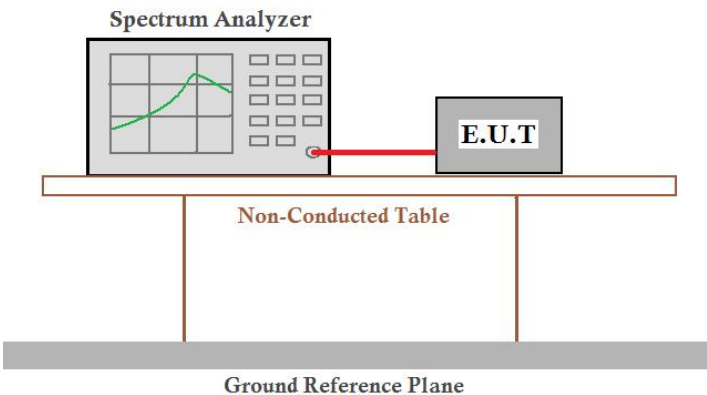
|                        |                                                                                                                                                                                                                                                                            |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (e)                                                                                                                                                                                                                                         |
| Test Method:           | ANSI C63.10: 2013                                                                                                                                                                                                                                                          |
| Test Setup:            |  <p>Offset=cable loss+ attenuation factor</p>                                                                                                                                            |
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates                                                                                                                                                                                                                      |
| Final Test Mode:       | Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report. |
| Limit:                 | $\leq 8.00\text{dBm}/3\text{kHz}$                                                                                                                                                                                                                                          |
| Test Results:          | Pass                                                                                                                                                                                                                                                                       |


## Measurement Data

| 802.11b mode       |                                   |                  |        |
|--------------------|-----------------------------------|------------------|--------|
| Test channel       | Power Spectral Density (dBm/3kHz) | Limit (dBm/3kHz) | Result |
| Lowest             | -10.990                           | $\leq 8.00$      | Pass   |
| Middle             | -8.710                            | $\leq 8.00$      | Pass   |
| Highest            | -9.760                            | $\leq 8.00$      | Pass   |
| 802.11g mode       |                                   |                  |        |
| Test channel       | Power Spectral Density (dBm/3kHz) | Limit (dBm/3kHz) | Result |
| Lowest             | -18.570                           | $\leq 8.00$      | Pass   |
| Middle             | -17.590                           | $\leq 8.00$      | Pass   |
| Highest            | -18.040                           | $\leq 8.00$      | Pass   |
| 802.11n(HT20) mode |                                   |                  |        |
| Test channel       | Power Spectral Density (dBm/3kHz) | Limit (dBm/3kHz) | Result |
| Lowest             | -18.540                           | $\leq 8.00$      | Pass   |
| Middle             | -16.340                           | $\leq 8.00$      | Pass   |
| Highest            | -17.470                           | $\leq 8.00$      | Pass   |
| 802.11n(HT40) mode |                                   |                  |        |
| Test channel       | Power Spectral Density (dBm/3kHz) | Limit (dBm/3kHz) | Result |
| Lowest             | -21.990                           | $\leq 8.00$      | Pass   |
| Middle             | -21.310                           | $\leq 8.00$      | Pass   |
| Highest            | -22.070                           | $\leq 8.00$      | Pass   |


Test plot as follows:

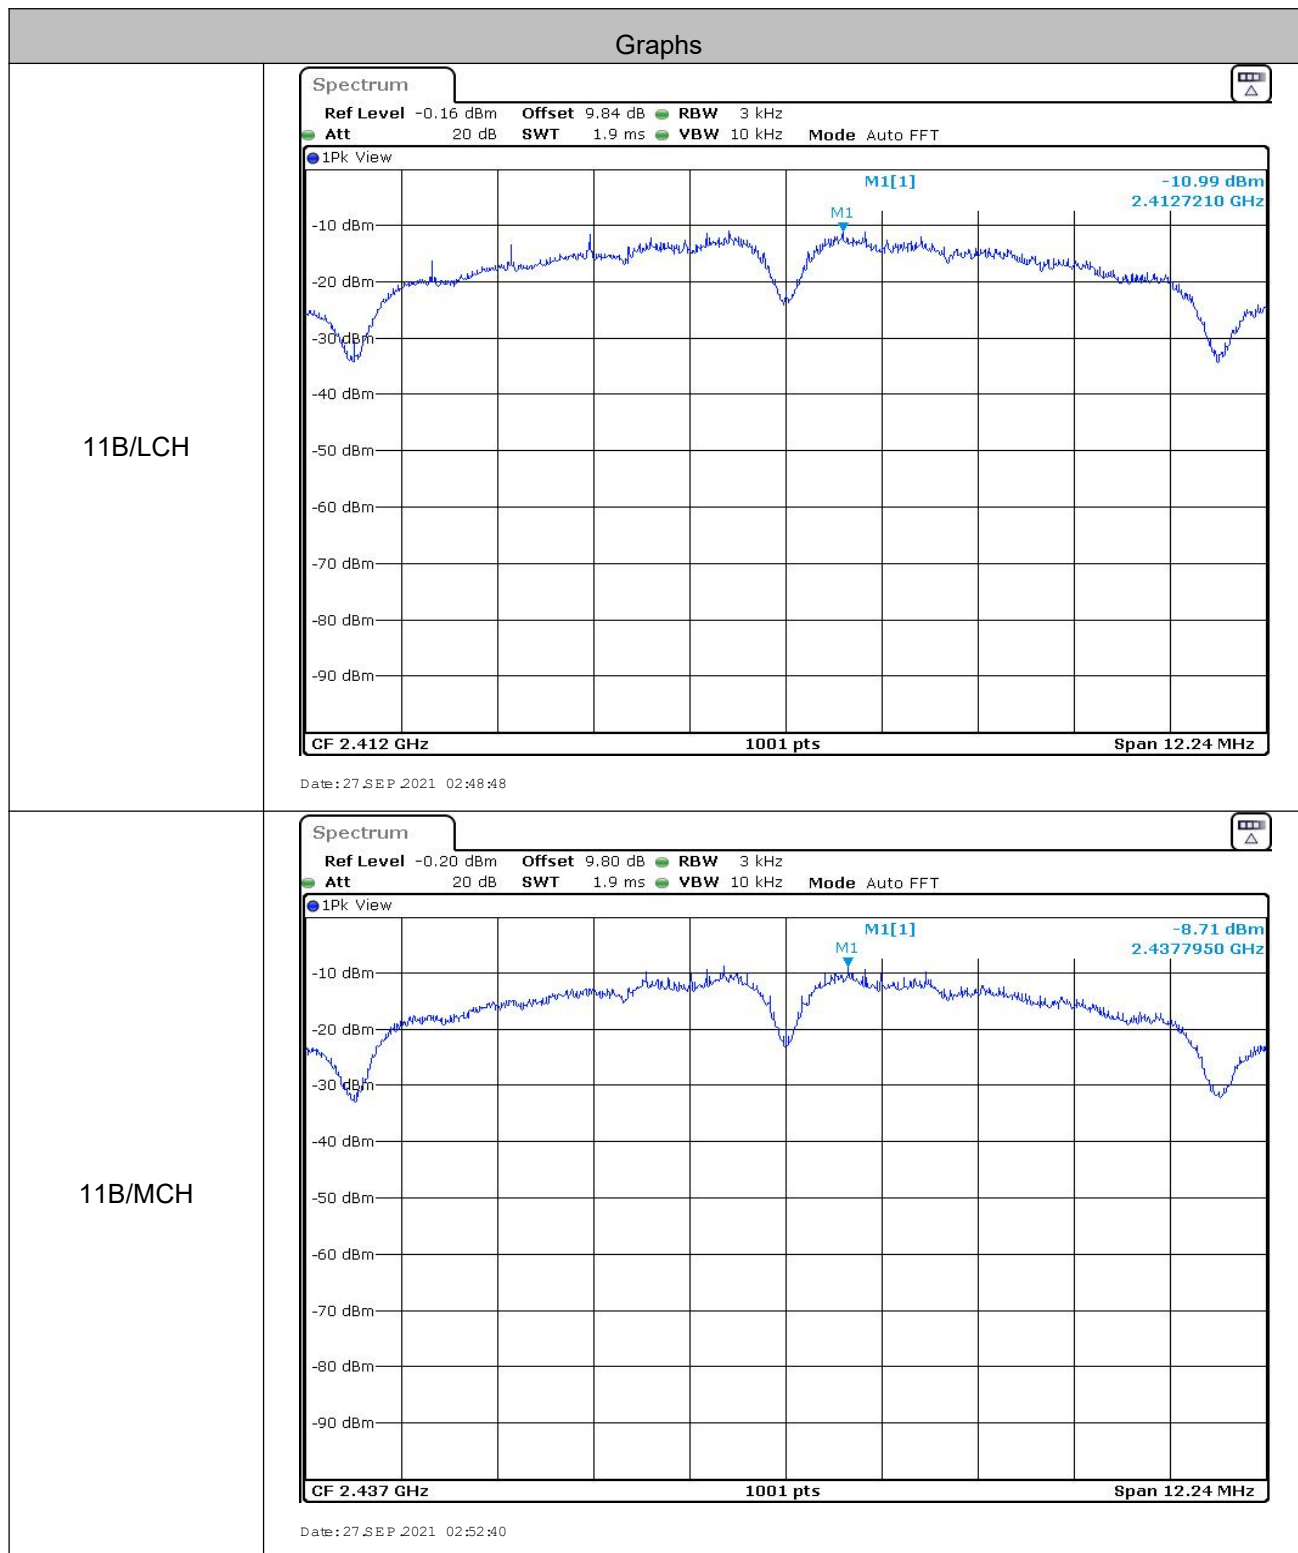


11B/HCH

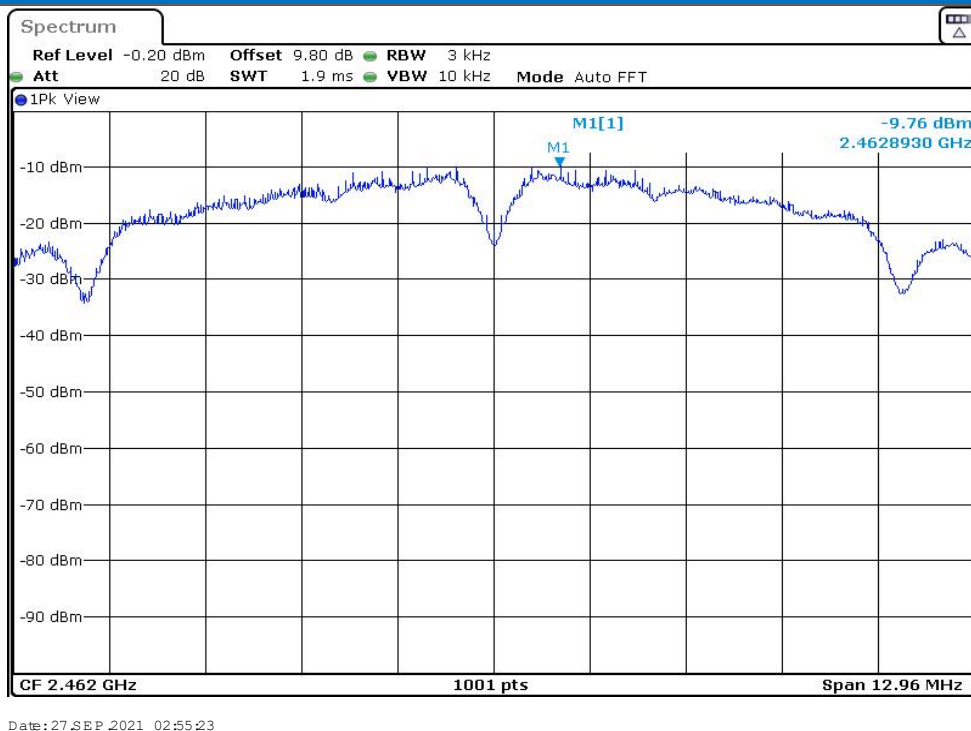


11G/LCH

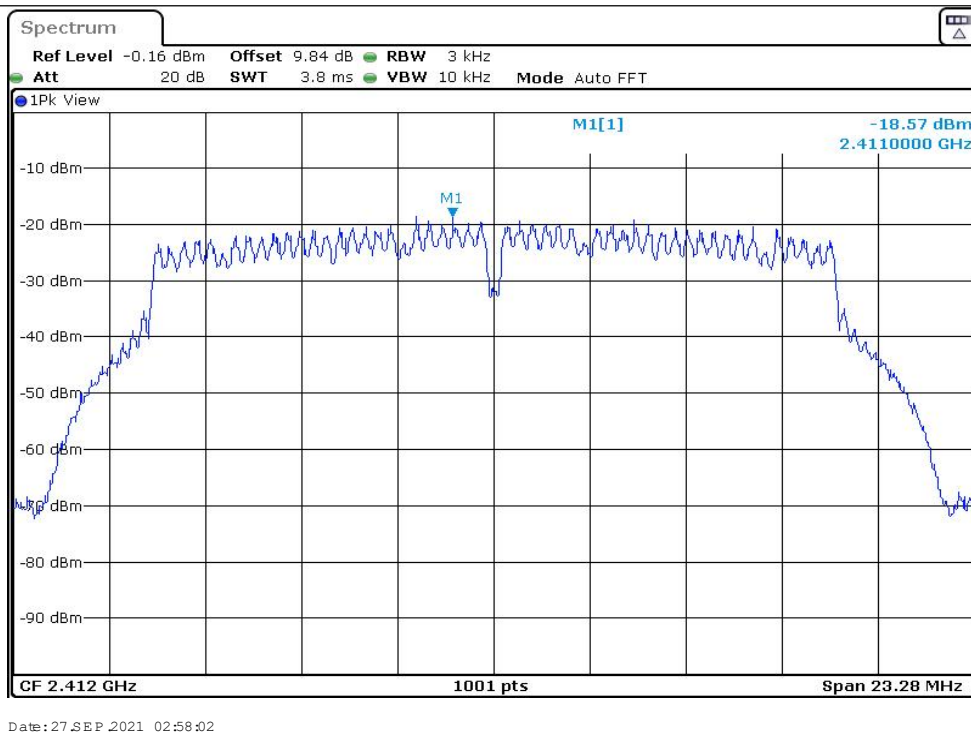


11G/MCH

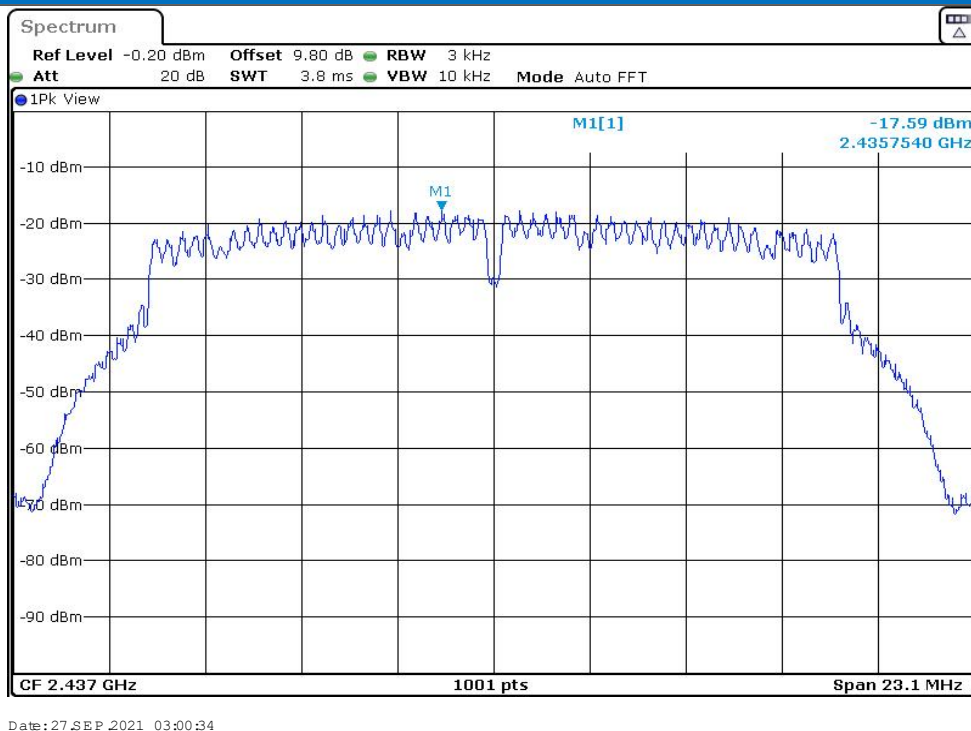


11G/HCH

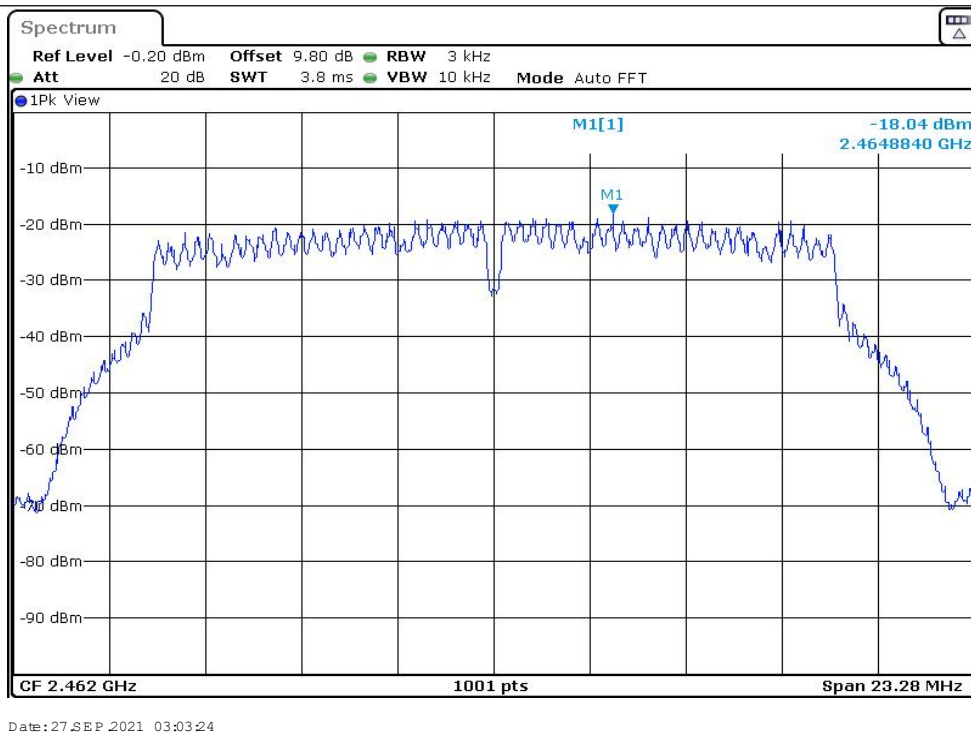


11N20SISO/LCH

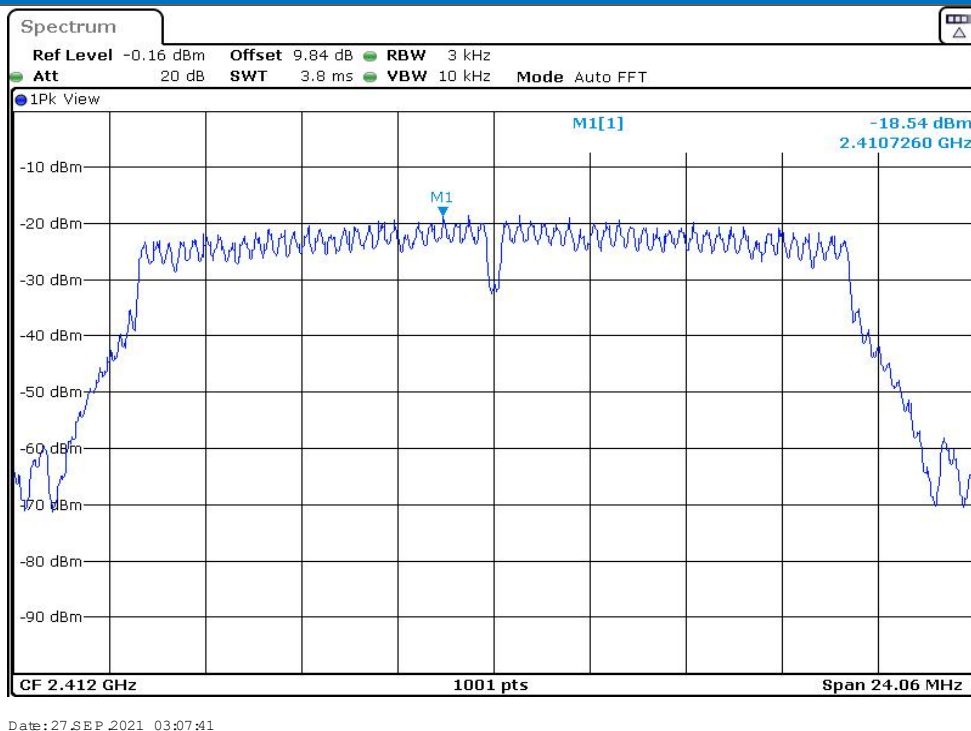


11N20SISO/MCH

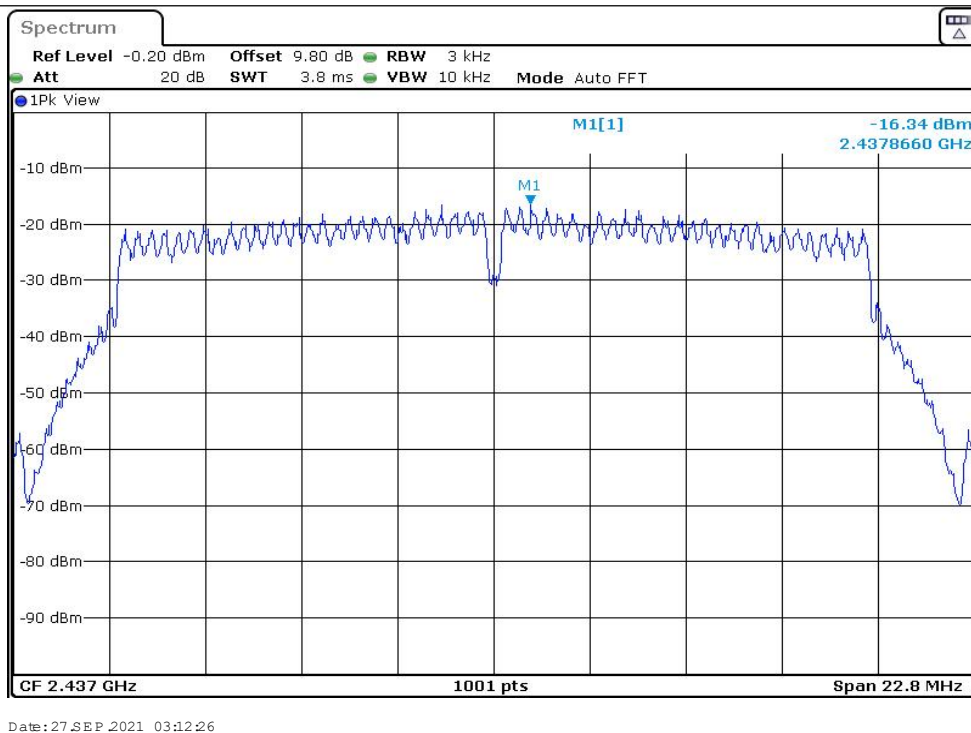


11N20SISO/HCH

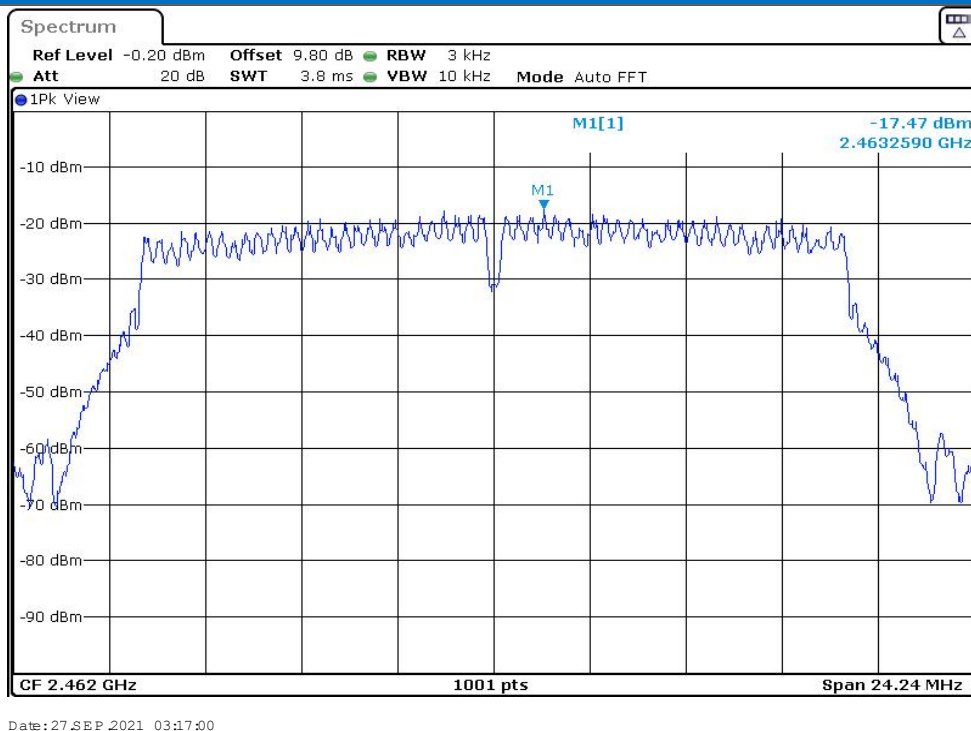


11N40SISO/LCH

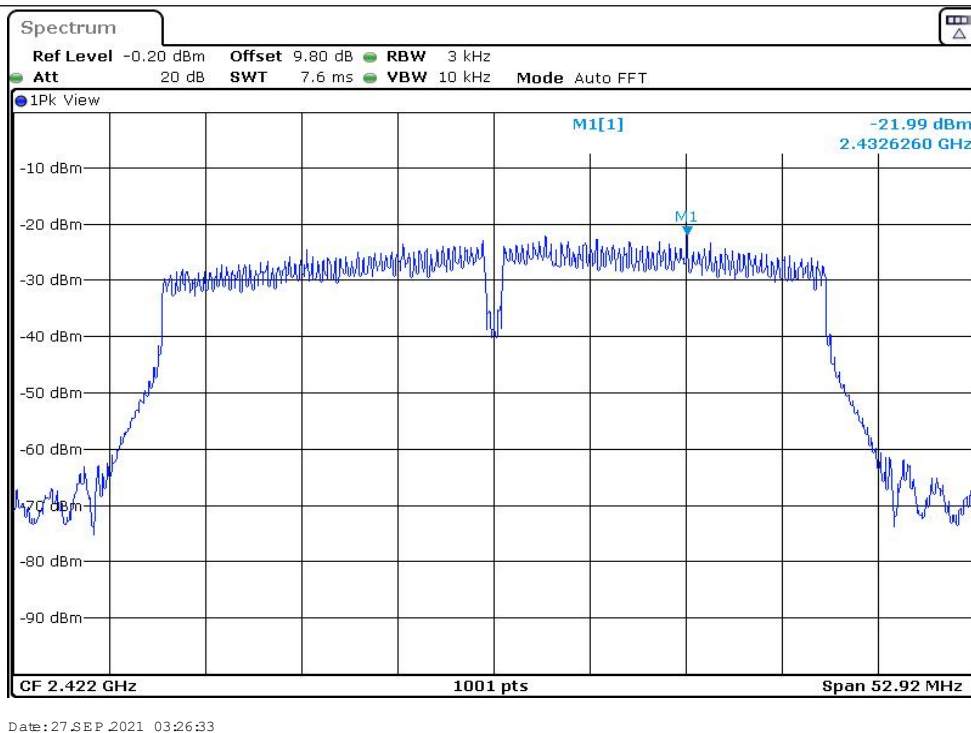


11N40SISO/MCH

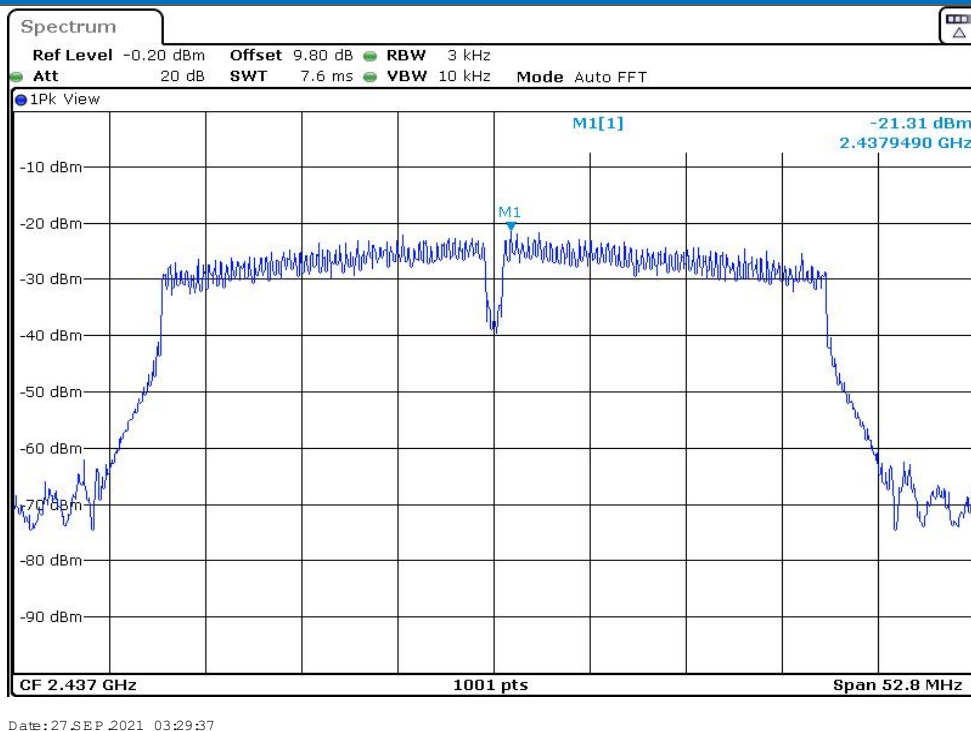

11N40SISO/HCH

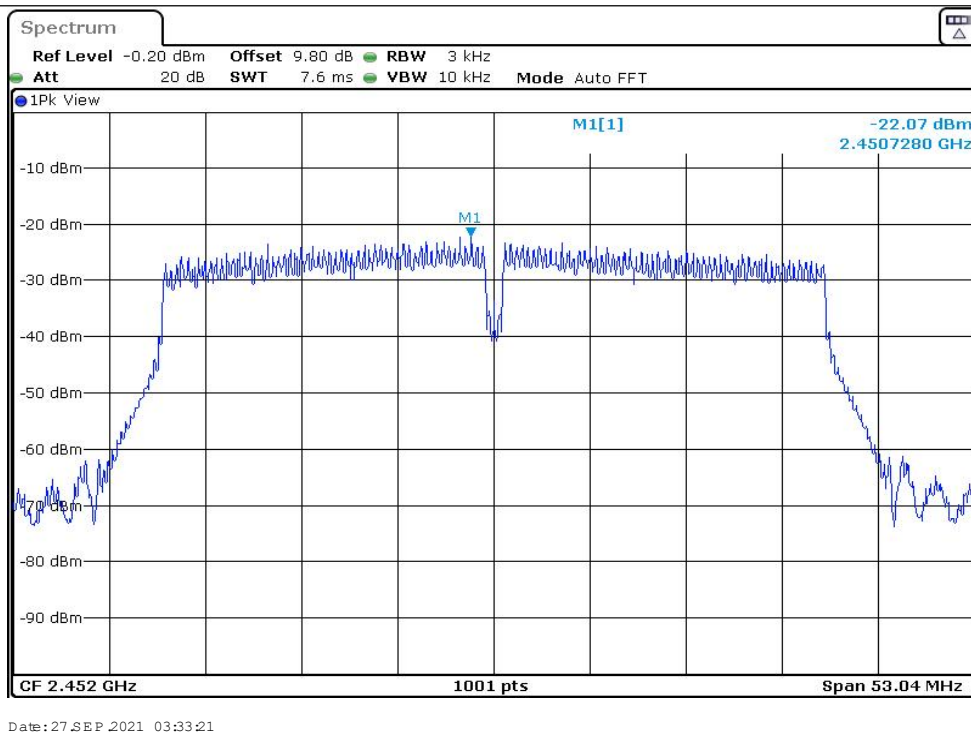


## 5.6 Band-edge for RF Conducted Emissions
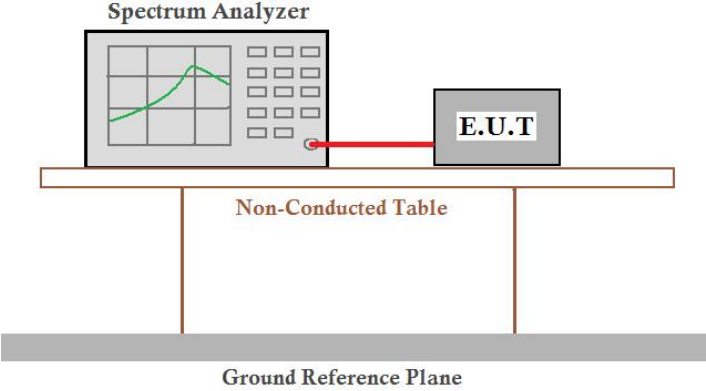
|                        |                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                      |
| Test Method:           | ANSI C63.10: 2013                                                                                                                                                                                                                                                                                                                                                                       |
| Test Setup:            |  <p>Offset=cable loss+ attenuation factor</p>                                                                                                                                                                                                                                                         |
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates                                                                                                                                                                                                                                                                                                                                   |
| Final Test Mode:       | Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.                                                                                                              |
| Limit:                 | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test Results:          | Pass                                                                                                                                                                                                                                                                                                                                                                                    |


**Test Data:**

| Test mode: 802.11b       |                |                     |            |        |
|--------------------------|----------------|---------------------|------------|--------|
| Test channel             | Frequency(MHz) | Emission Level(dBm) | Limit(dBm) | Result |
| Lowest                   | 2400           | -44.970             | -22.27     | Pass   |
| Highest                  | 2483.5         | -53.270             | -22.12     | Pass   |
| Test mode: 802.11g       |                |                     |            |        |
| Test channel             | Frequency(MHz) | Emission Level(dBm) | Limit(dBm) | Result |
| Lowest                   | 2400           | -43.930             | -28.88     | Pass   |
| Highest                  | 2483.5         | -52.670             | -29.33     | Pass   |
| Test mode: 802.11n(HT20) |                |                     |            |        |
| Test channel             | Frequency(MHz) | Emission Level(dBm) | Limit(dBm) | Result |
| Lowest                   | 2400           | -43.940             | -29.26     | Pass   |
| Highest                  | 2483.5         | -52.640             | -29.07     | Pass   |
| Test mode: 802.11n(HT40) |                |                     |            |        |
| Test channel             | Frequency(MHz) | Emission Level(dBm) | Limit(dBm) | Result |
| Lowest                   | 2400           | -45.080             | -32.54     | Pass   |
| Highest                  | 2483.5         | -53.340             | -31.5      | Pass   |

Test plot as follows:

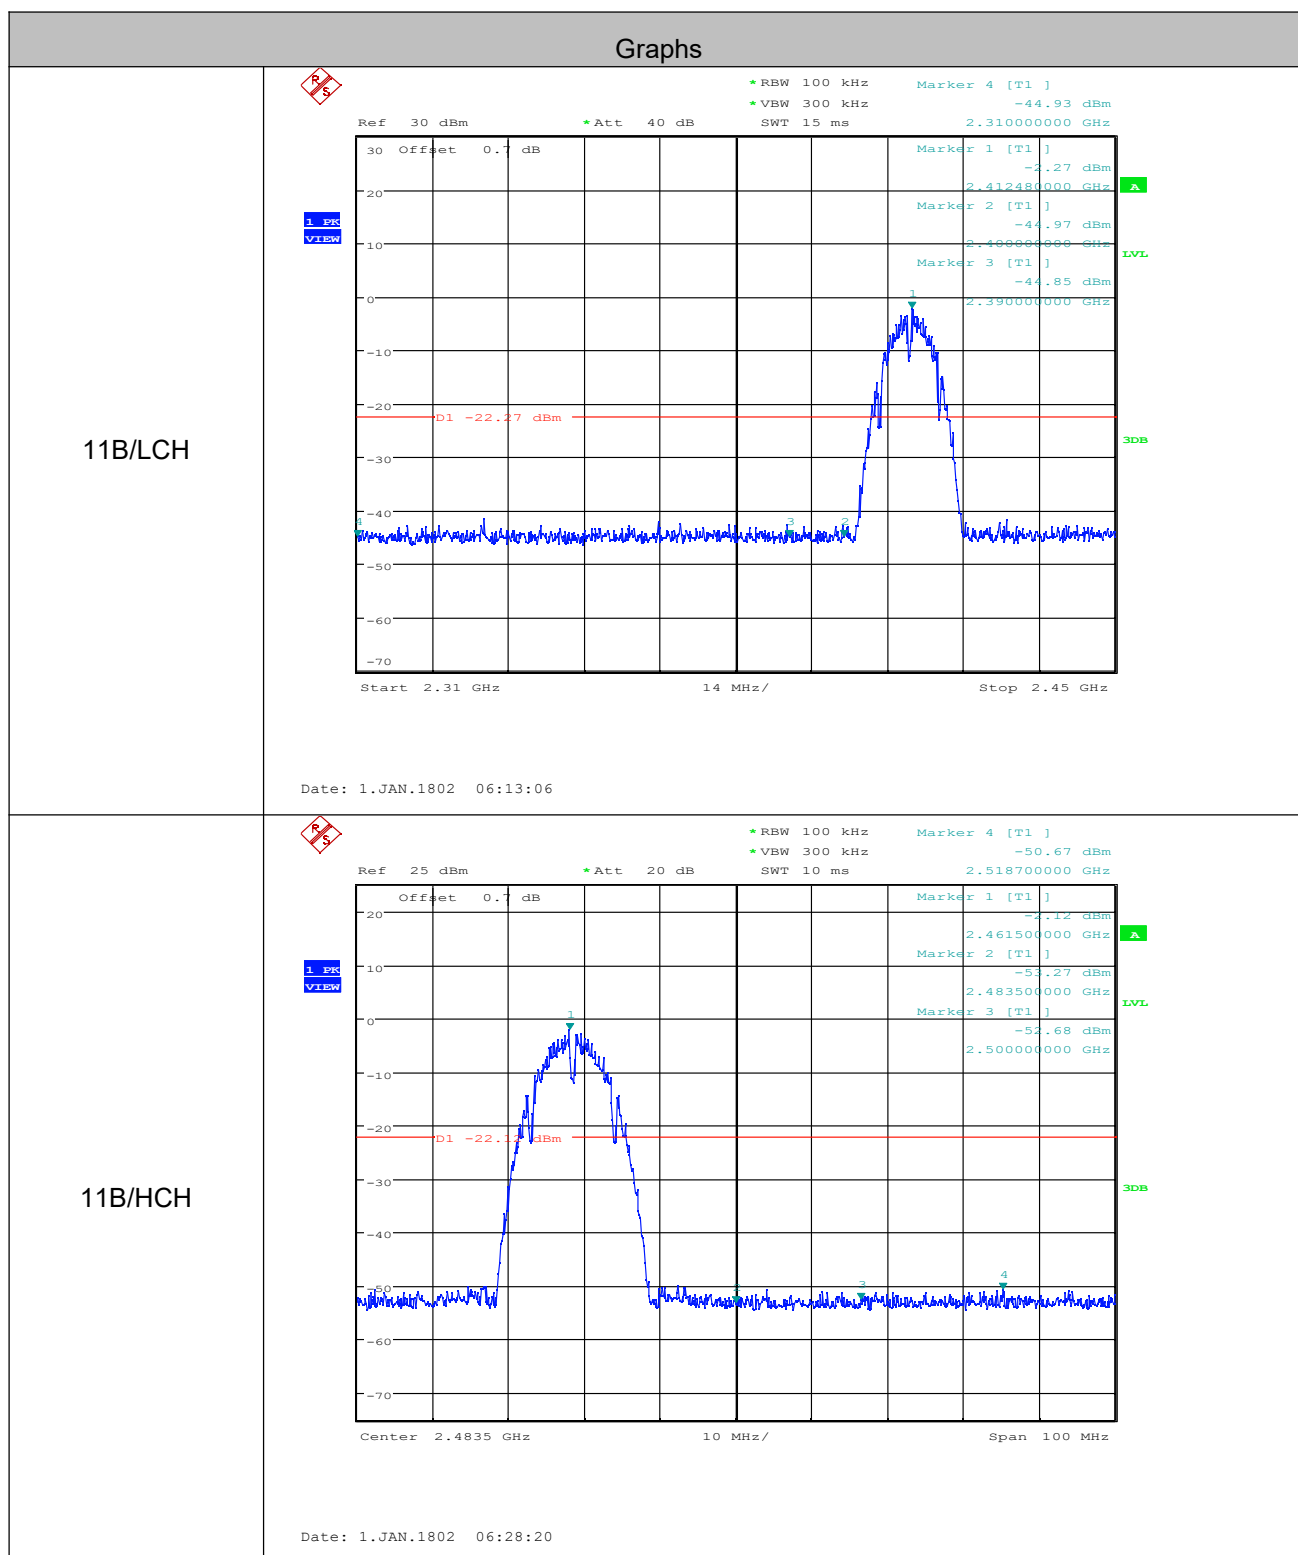


11G/LCH

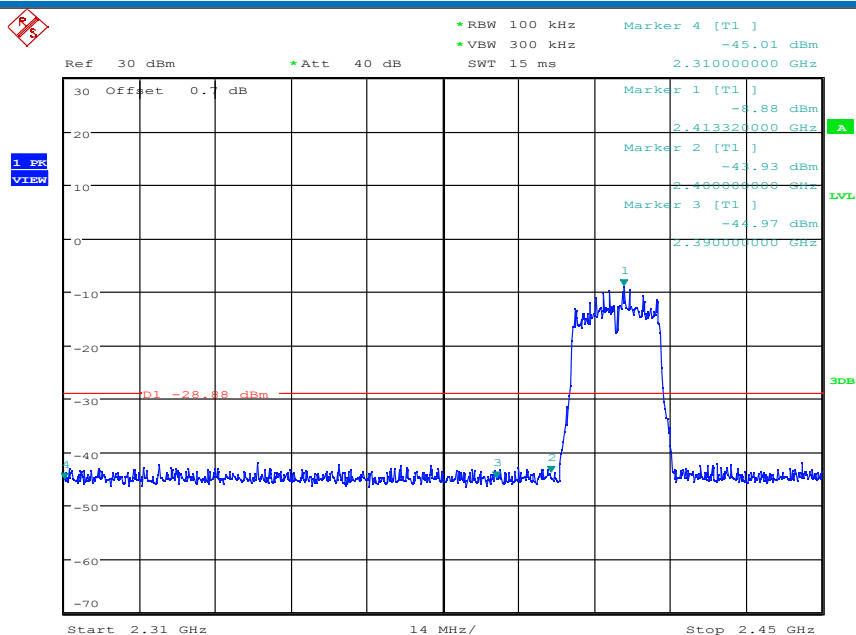


Date: 1.JAN.1802 03:37:45

11G/HCH

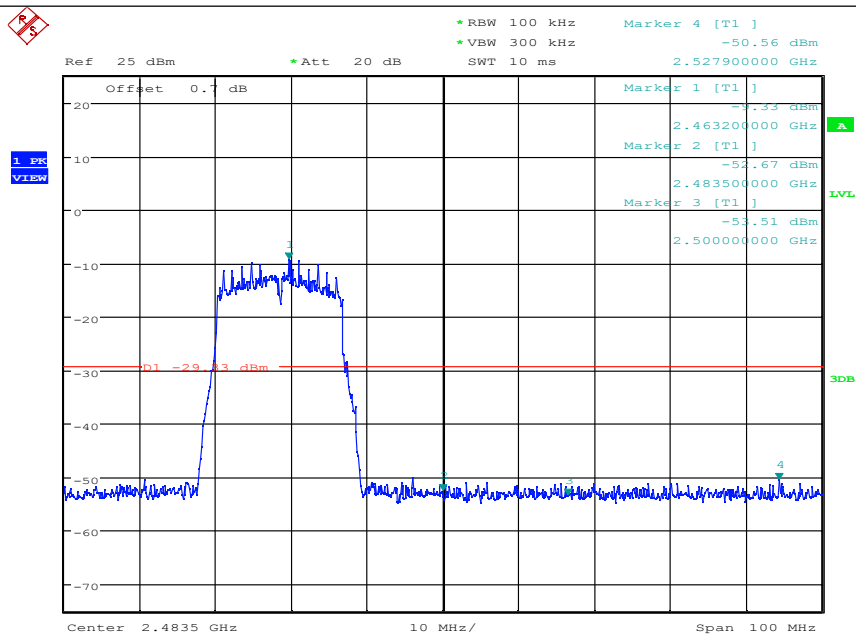


Date: 1.JAN.1802 03:46:28

11N20SISO/LCH

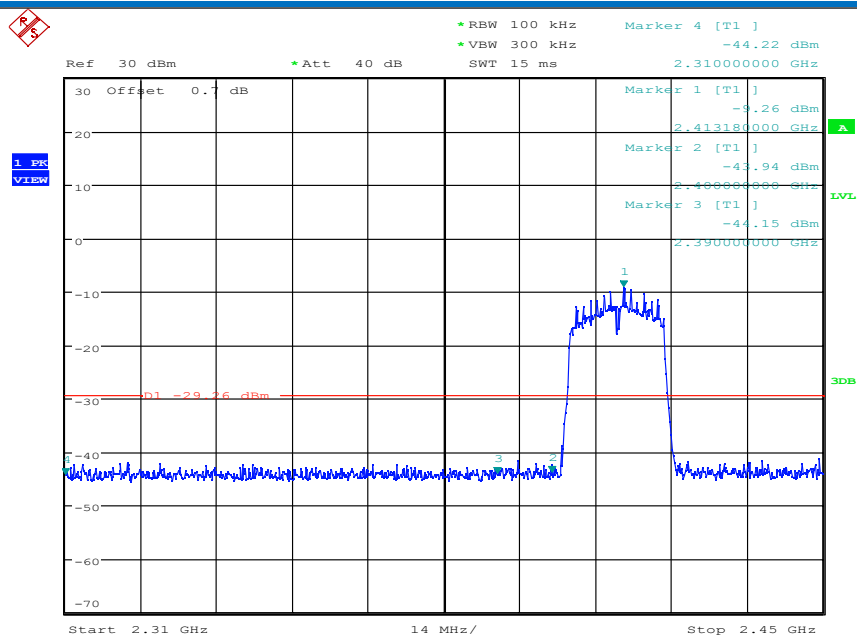


Date: 1.JAN.1802 03:54:33

11N20SISO/HCH

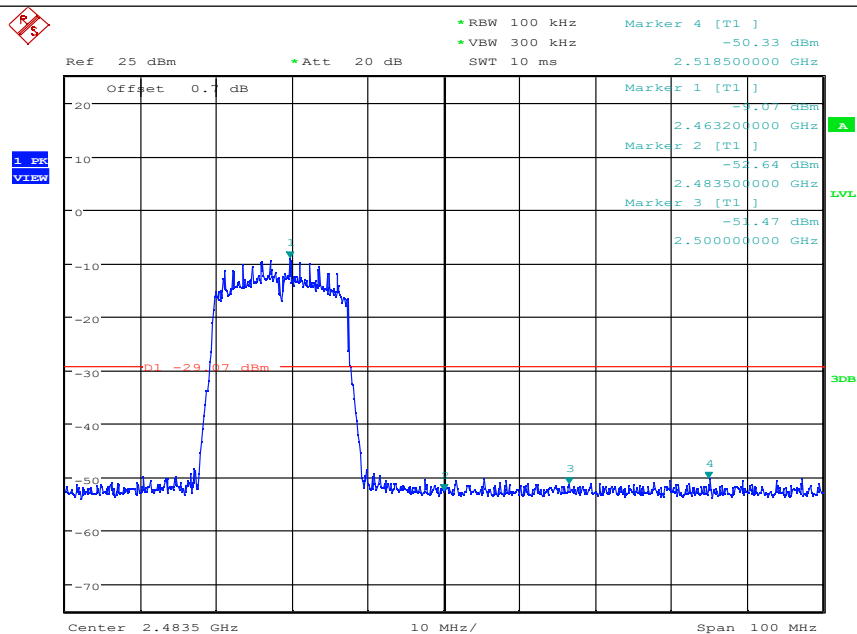


Date: 1.JAN.1802 05:29:06

11N40SISO/LCH

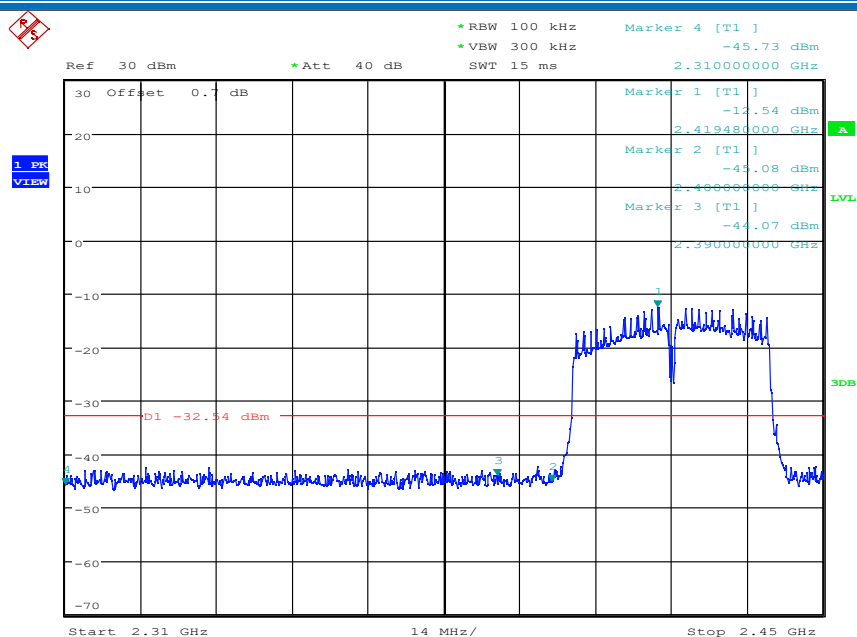


Date: 1.JAN.1802 05:47:48

11N40SISO/HCH

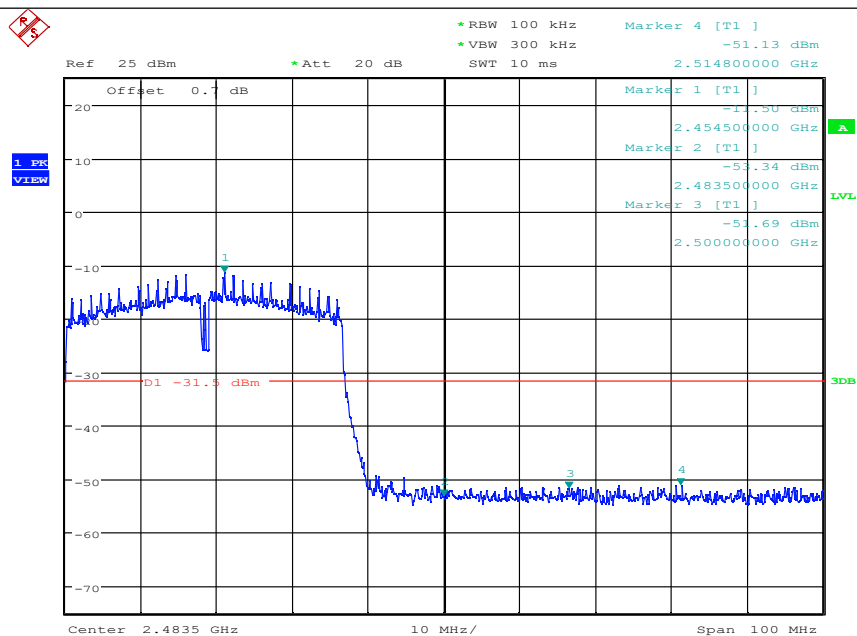




Date: 1.JAN.1802 05:58:30

## 5.7 RF Conducted Spurious Emissions

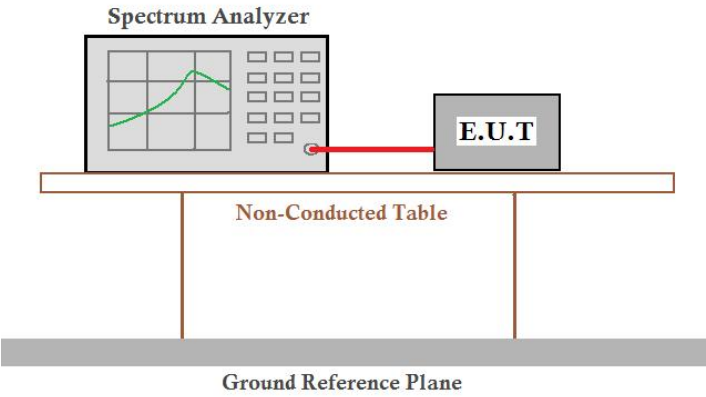
|                        |                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                      |
| Test Method:           | ANSI C63.10: 2013                                                                                                                                                                                                                                                                                                                                                                       |
| Test Setup:            |  <p>Offset=cable loss+ attenuation factor</p>                                                                                                                                                                                                                                                         |
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates                                                                                                                                                                                                                                                                                                                                   |
| Final Test Mode:       | Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.                                                                                                              |
| Limit:                 | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test Results:          | Pass                                                                                                                                                                                                                                                                                                                                                                                    |

Test plot as follows:

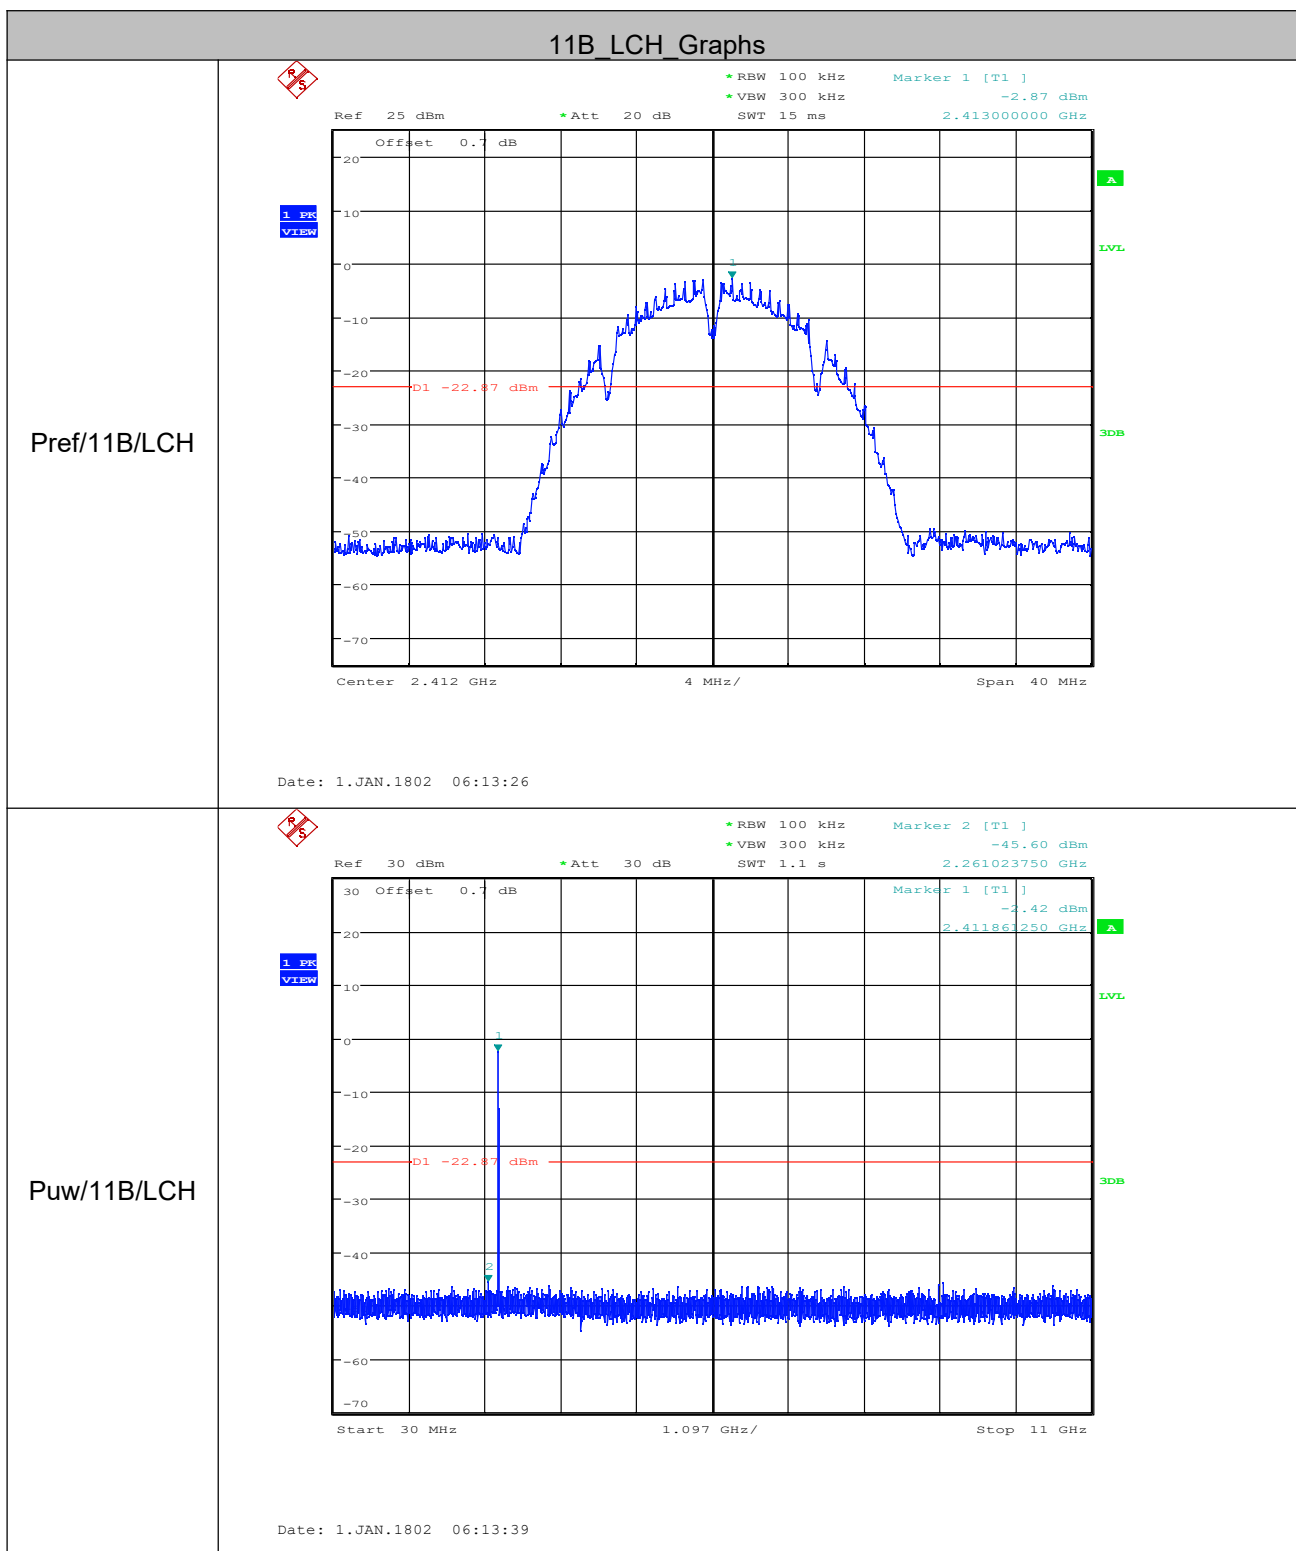


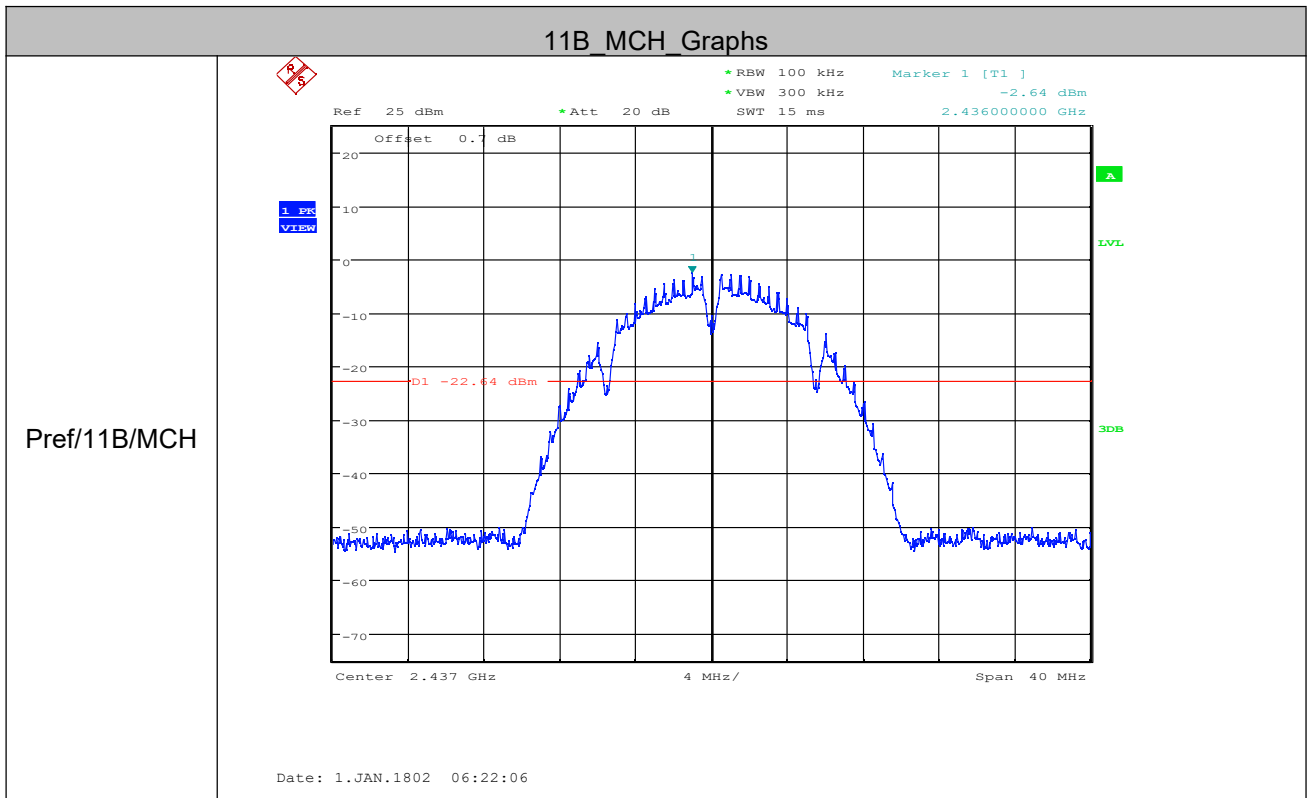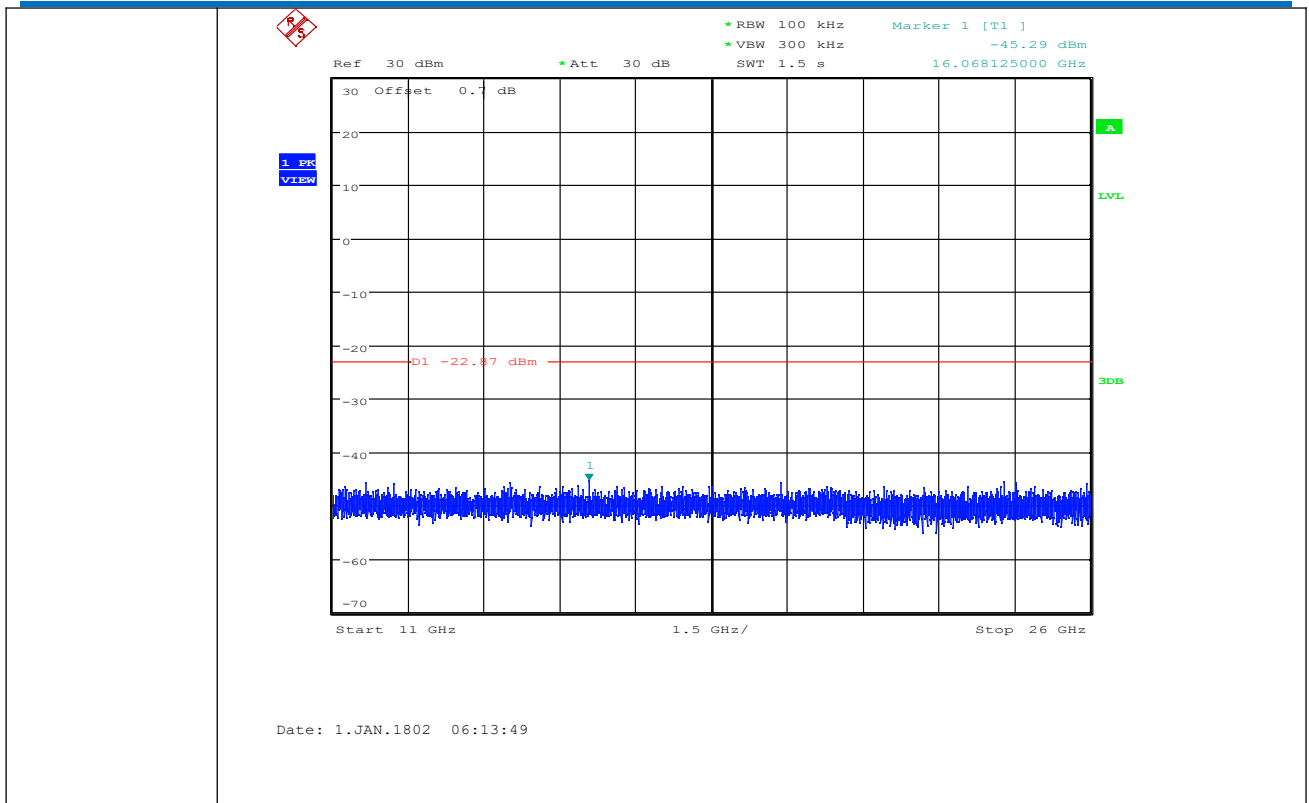

Puw/11B/MCH

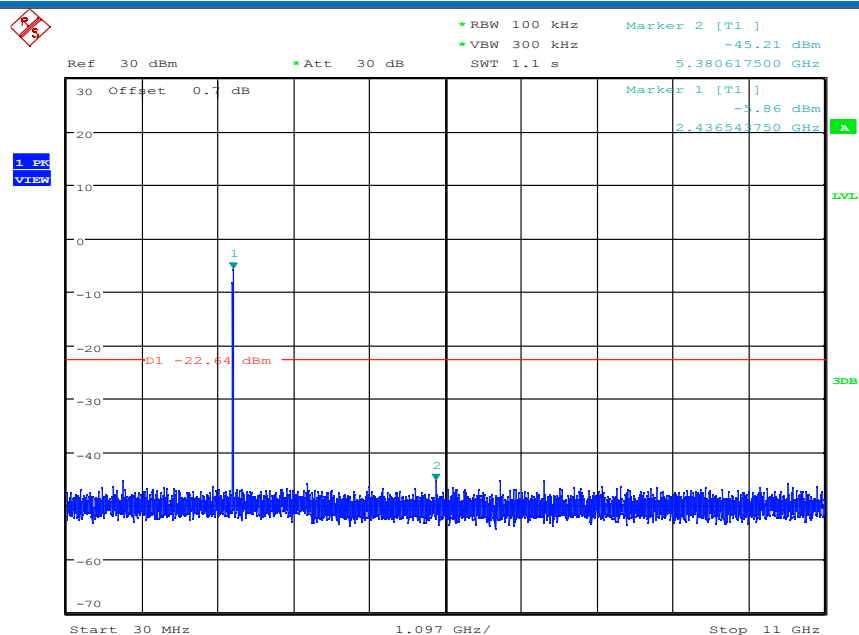


Date: 1.JAN.1802 06:22:19

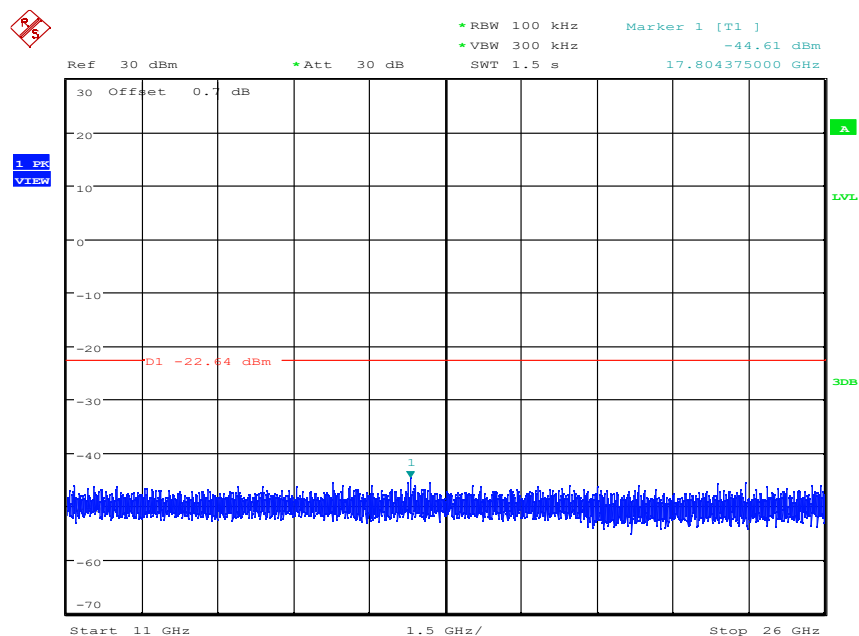

Date: 1.JAN.1802 06:22:30


11B\_HCH\_Graphs

Pref/11B/HCH


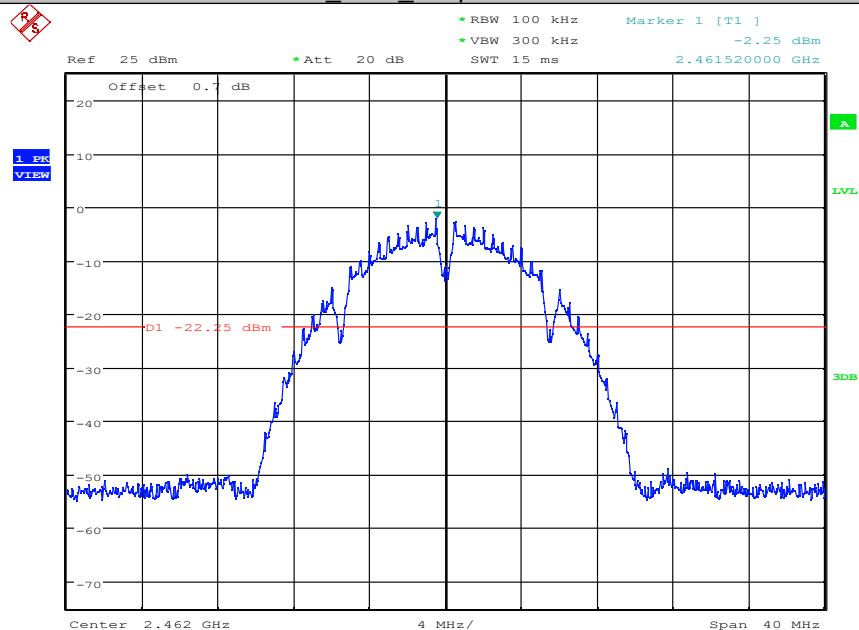


Date: 1.JAN.1802 06:28:39


Puw/11B/HCH

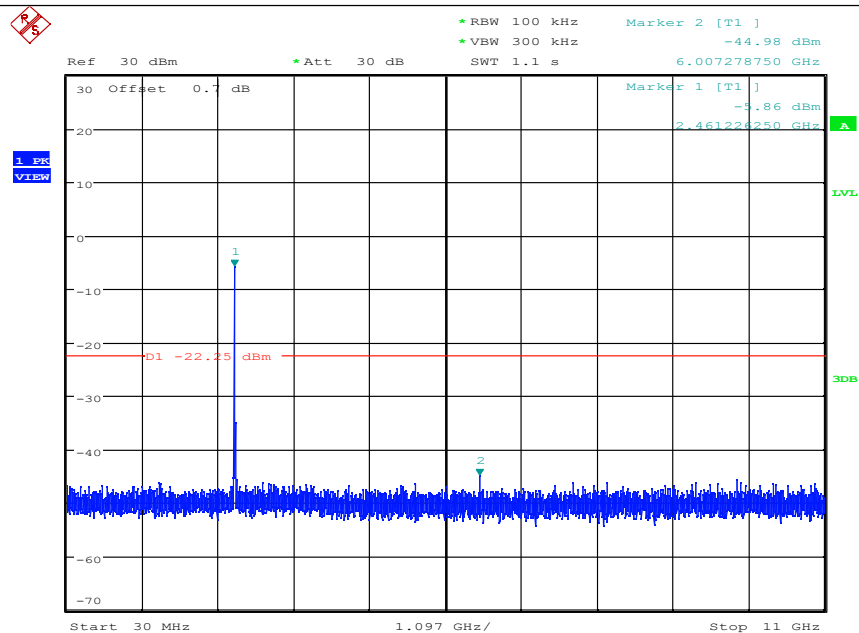


Date: 1.JAN.1802 06:28:51

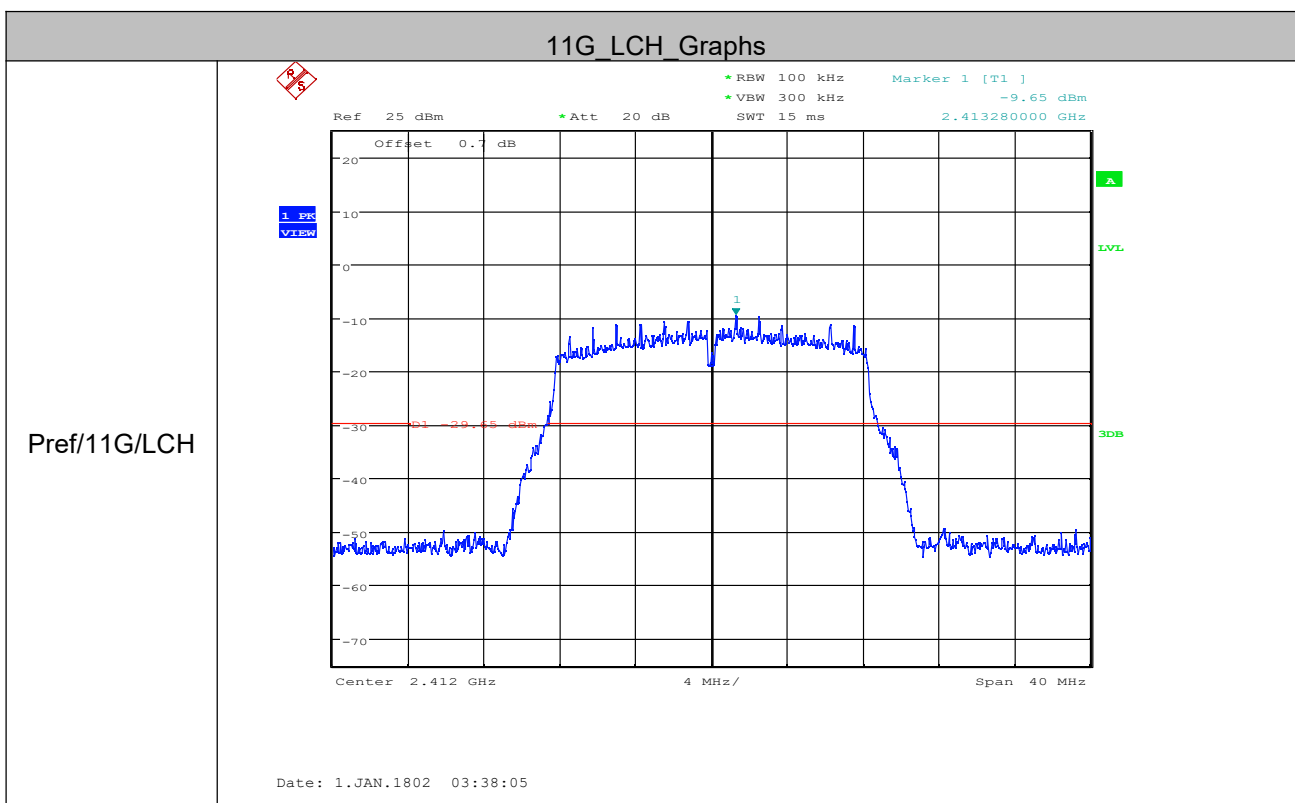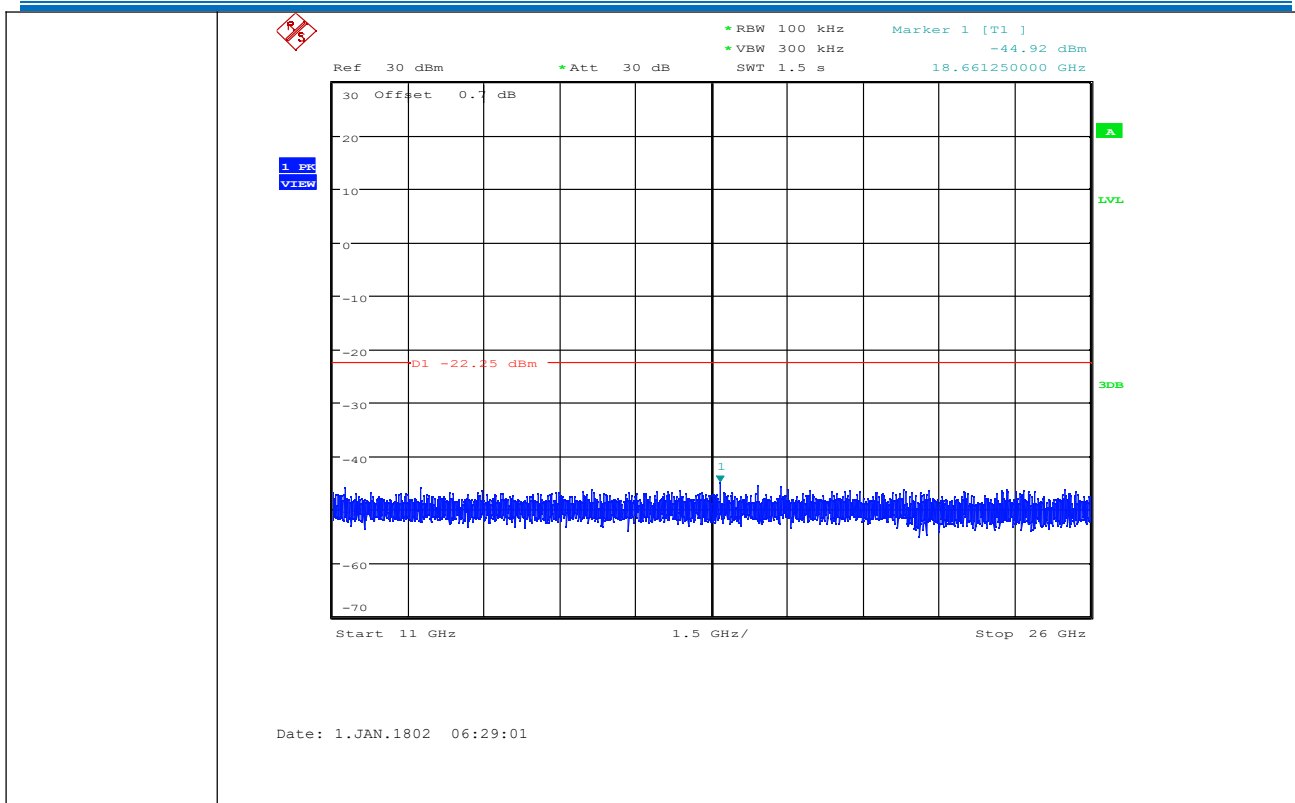


Puw/11G/LCH


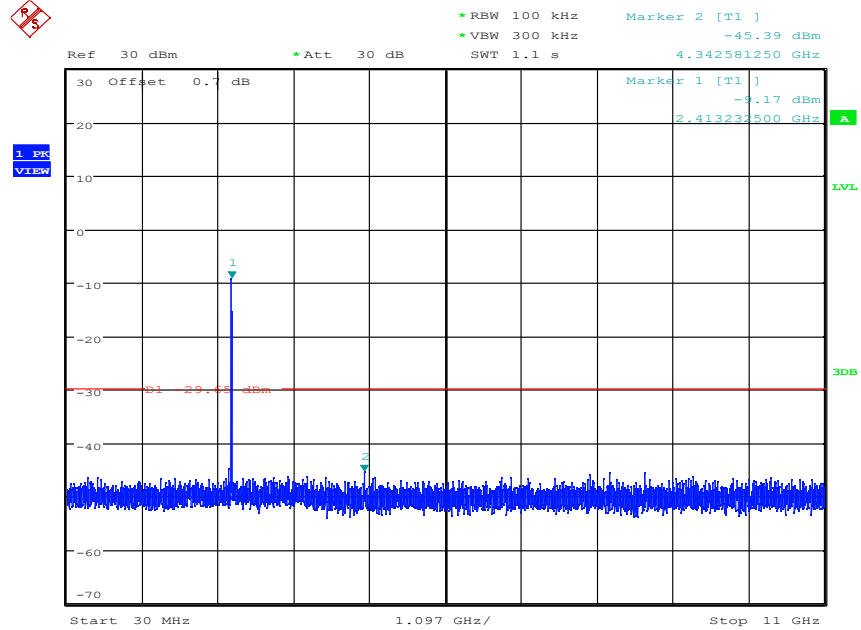


Date: 1.JAN.1802 03:38:18

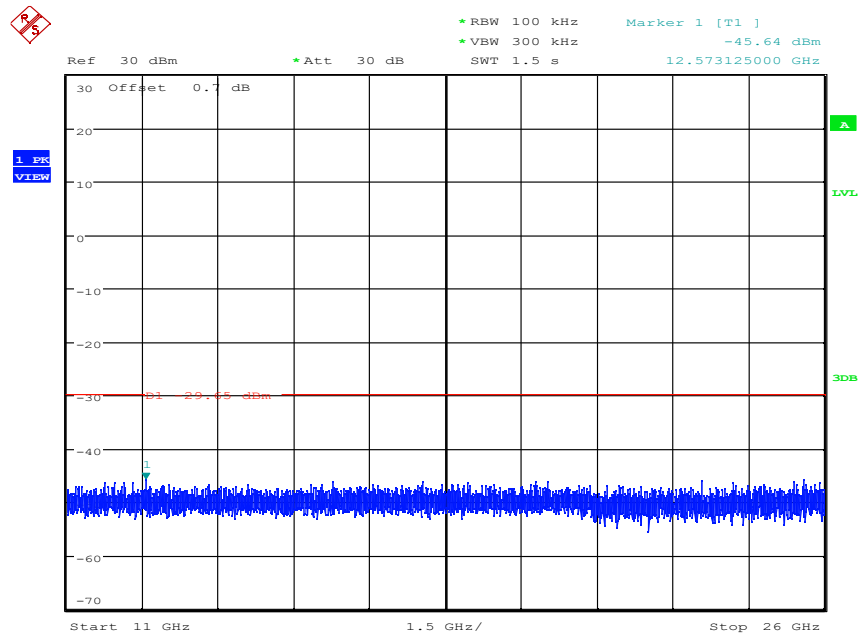


Date: 1.JAN.1802 03:38:29

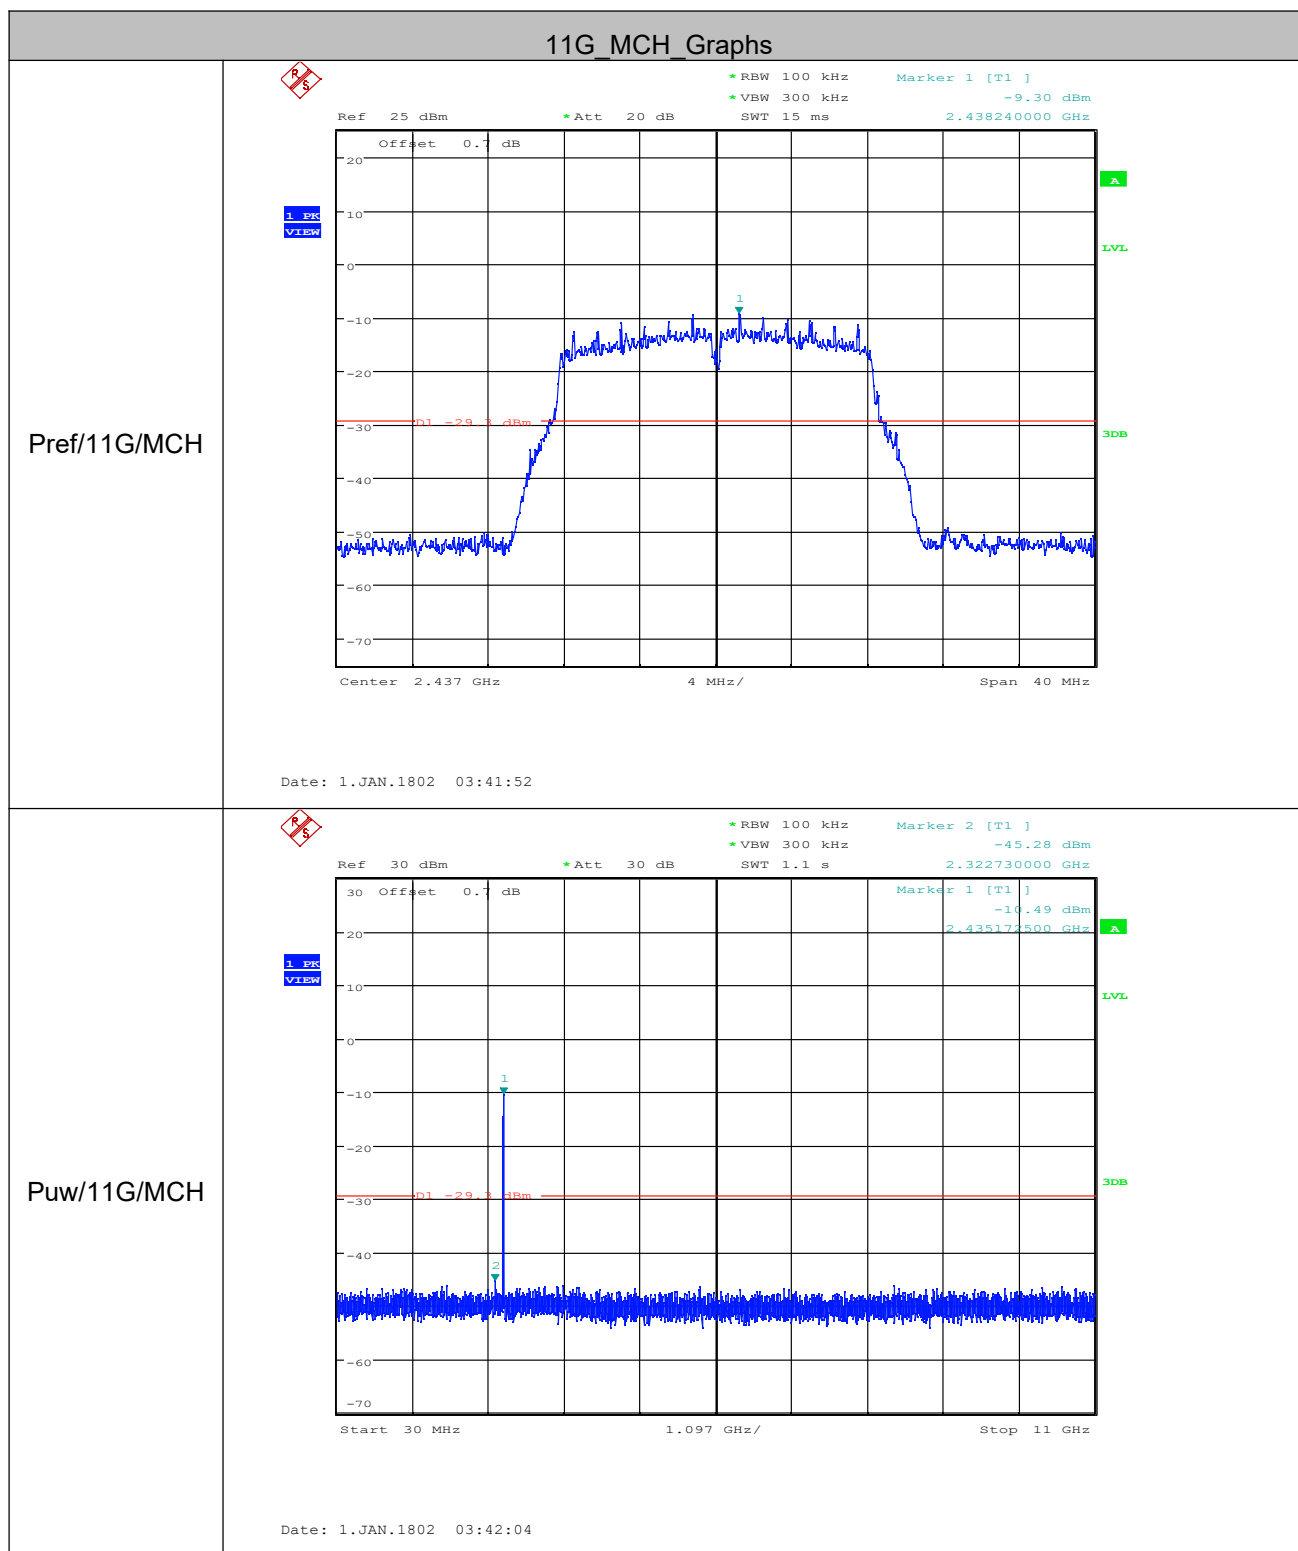


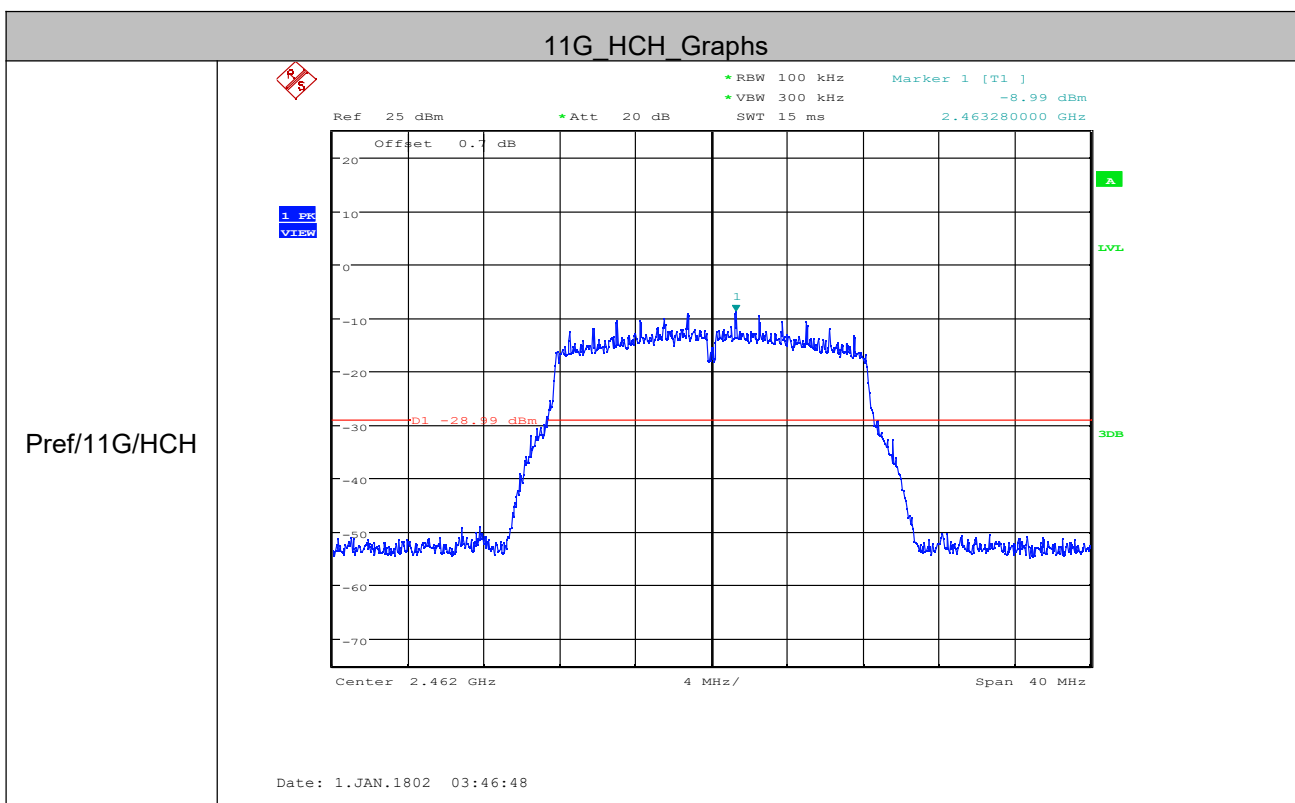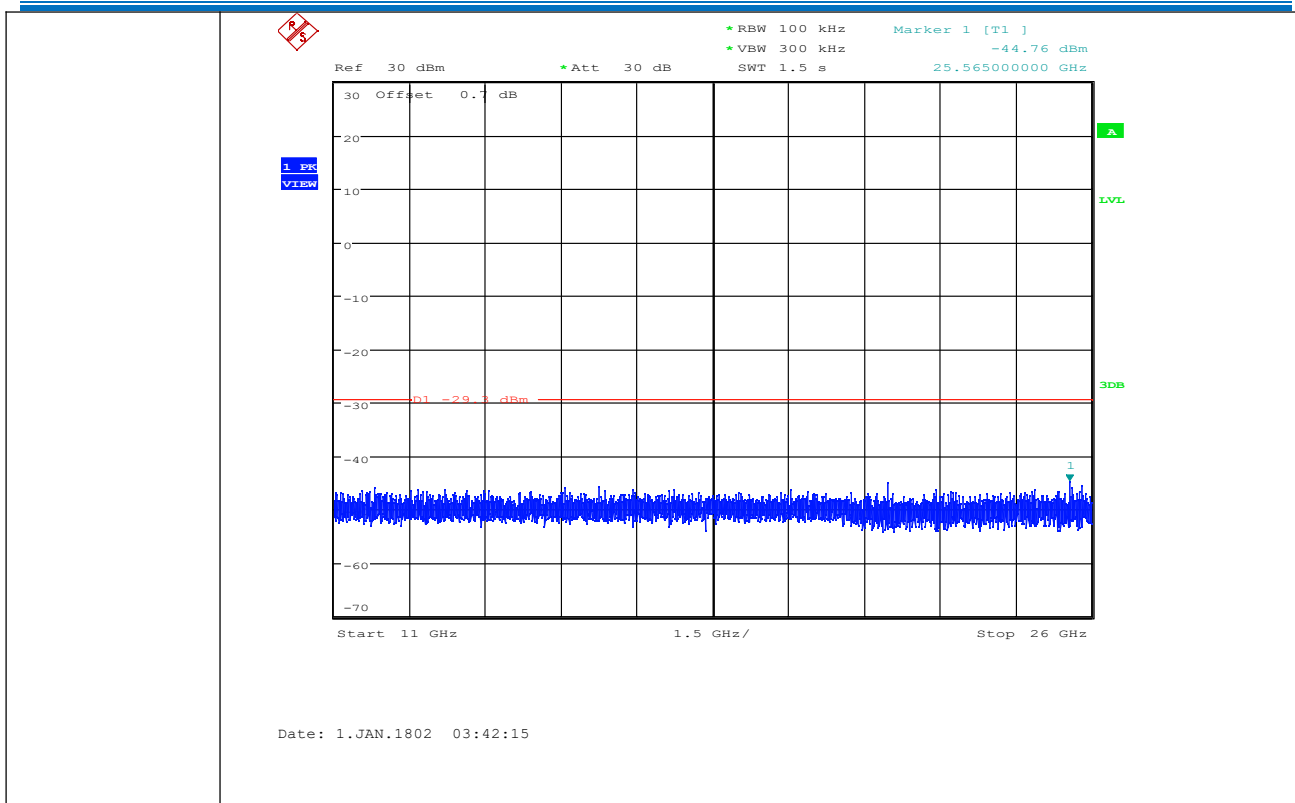

Puw/11G/HCH

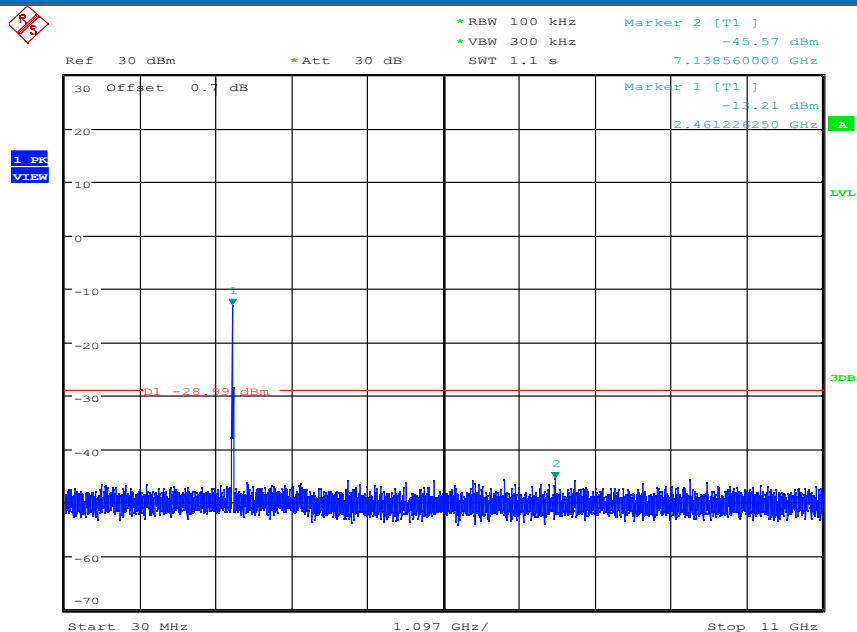


Date: 1.JAN.1802 03:47:01

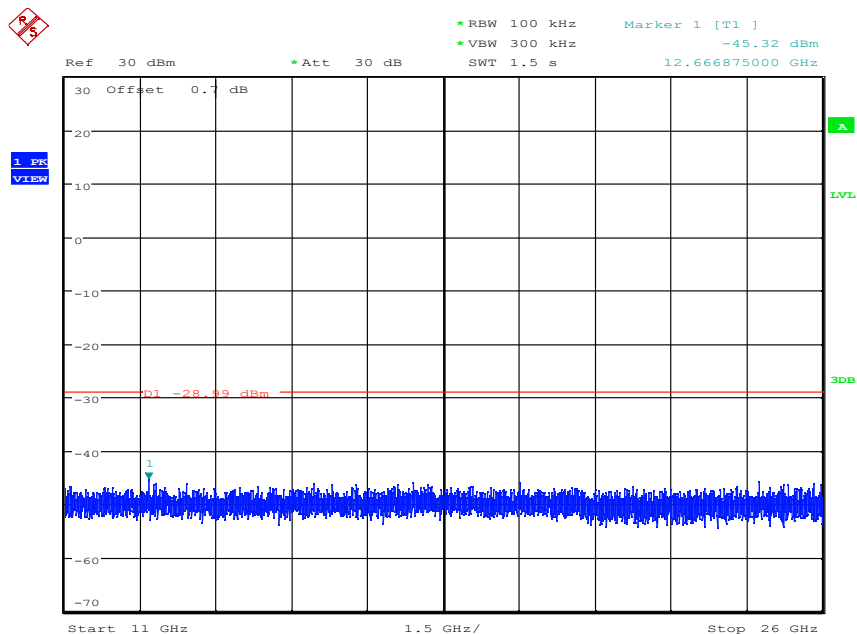

Date: 1.JAN.1802 03:47:12


11N20SISO\_LCH\_Graphs

Pref/11N20SIS  
O/LCH


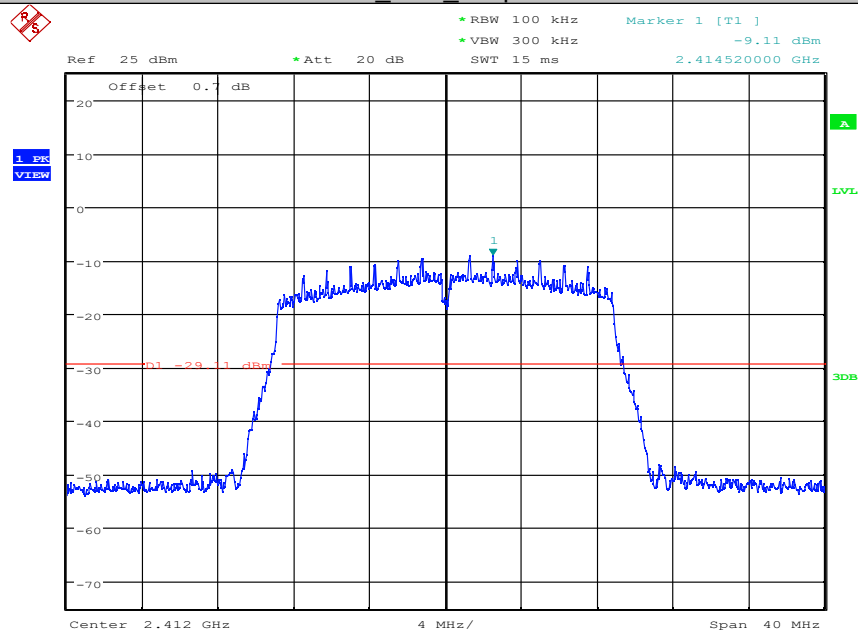


Date: 1.JAN.1802 03:55:14


/11N20SISO/L  
CH

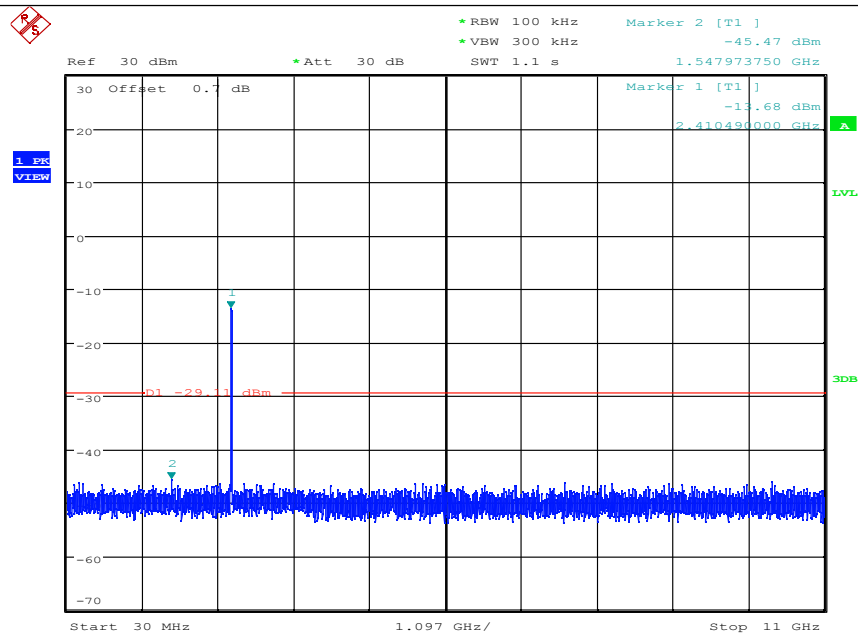


Date: 1.JAN.1802 03:55:26

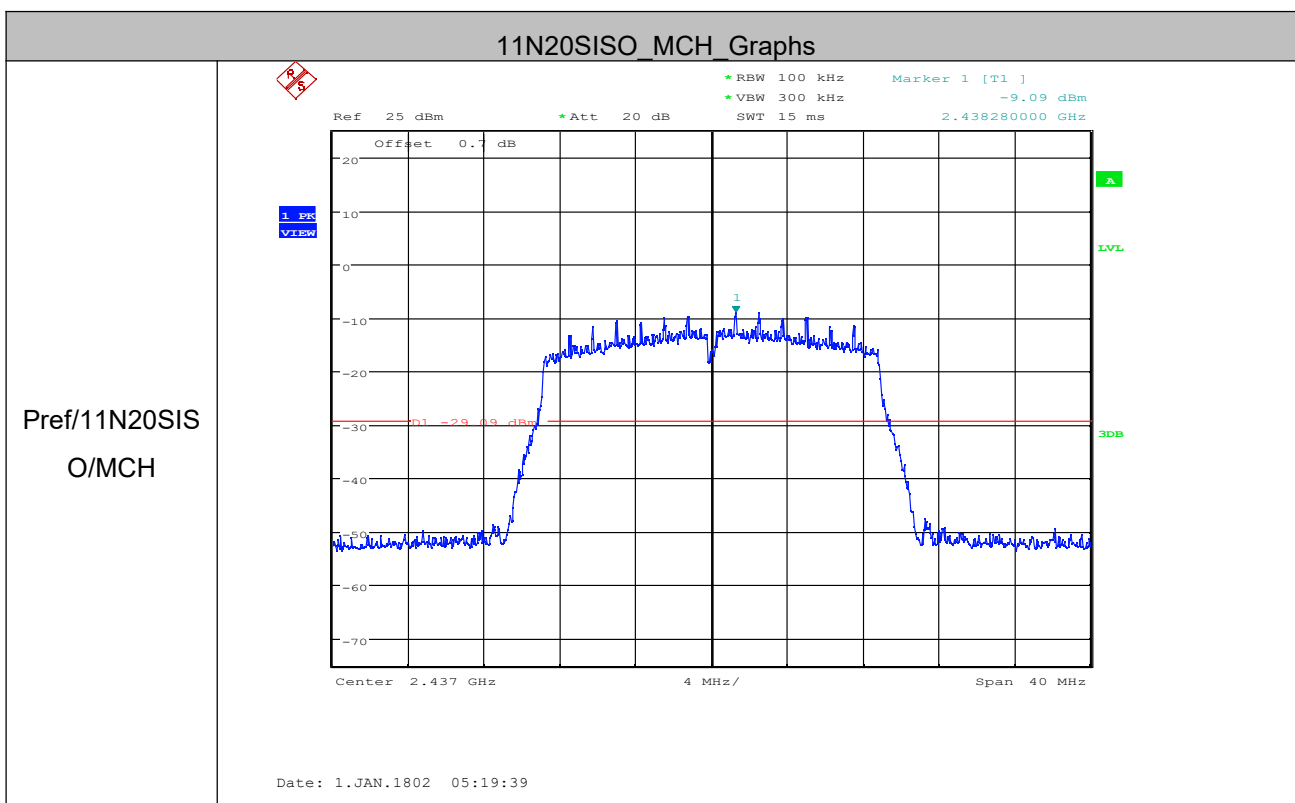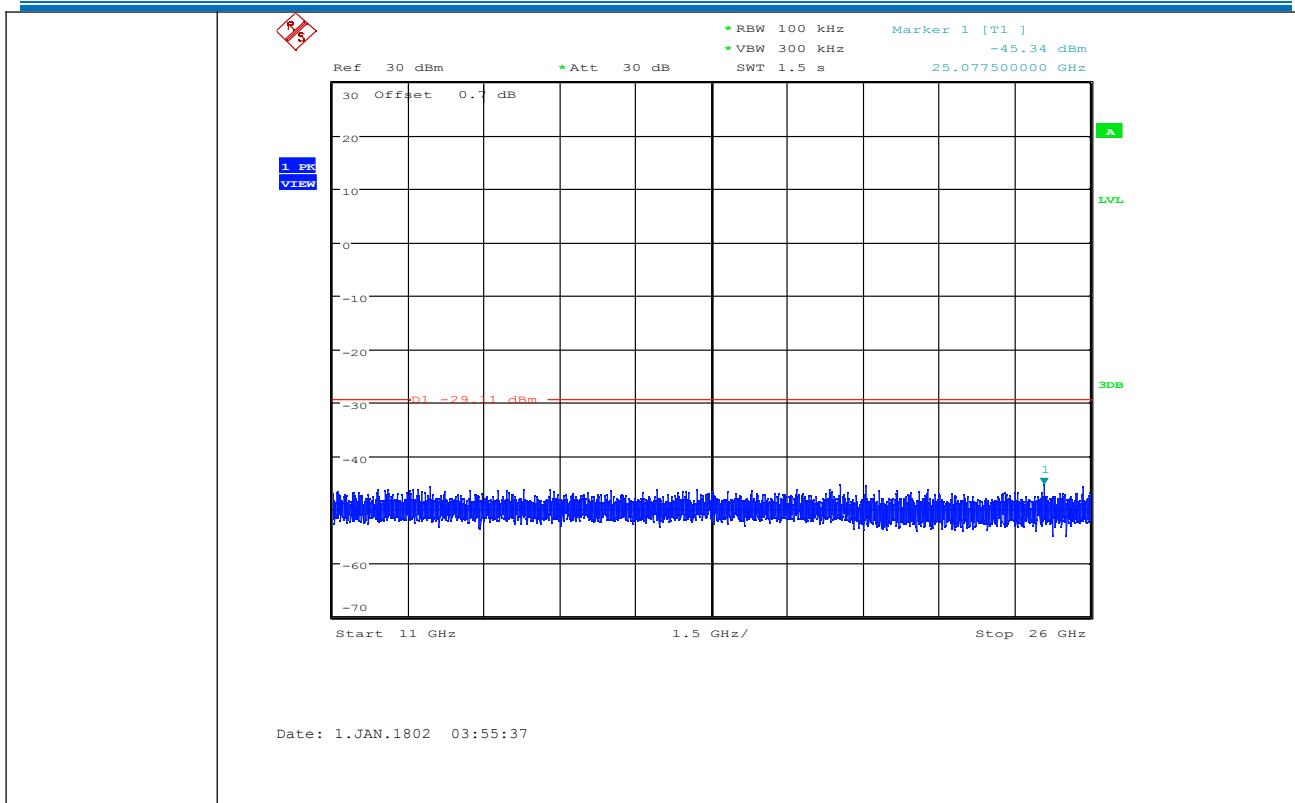

Puw/11N20SIS  
O/MCH

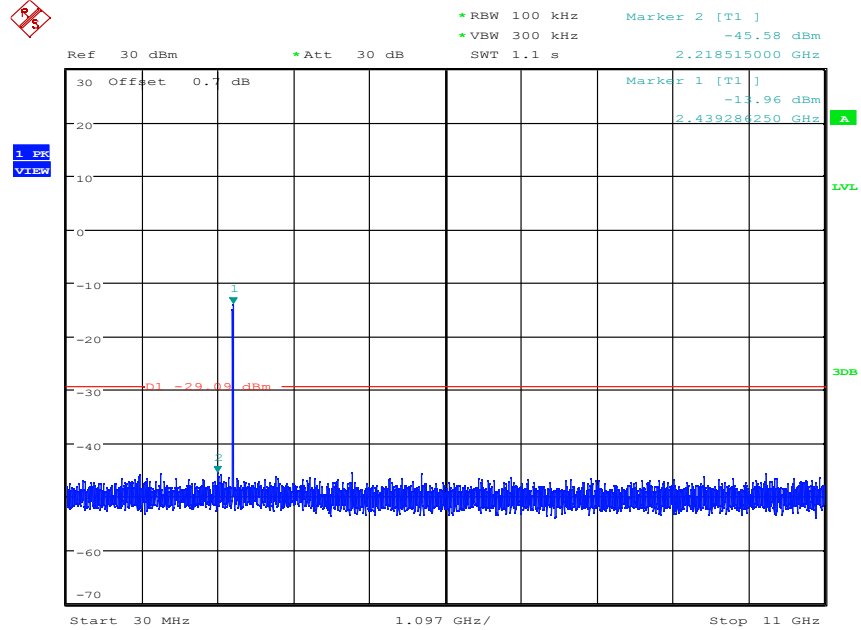


Date: 1.JAN.1802 05:19:52

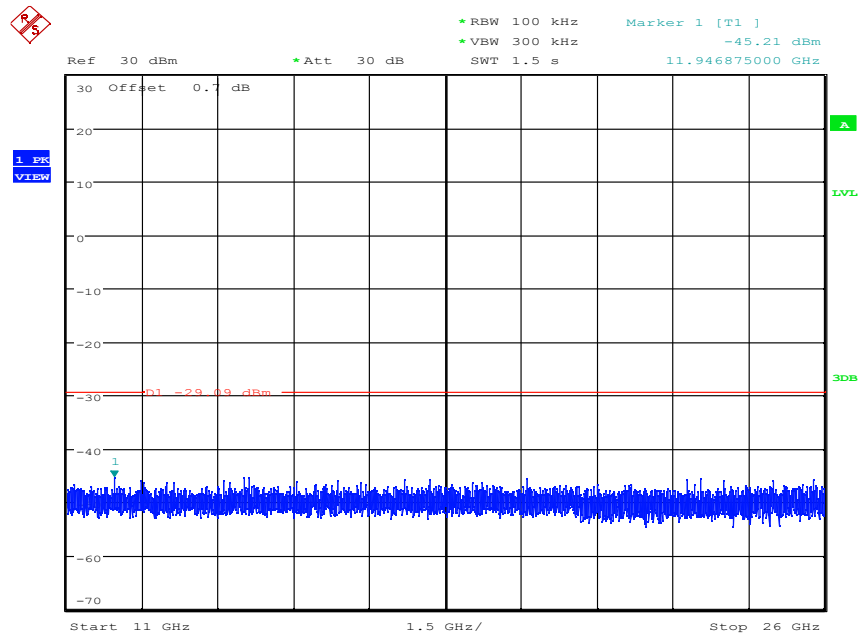

Date: 1.JAN.1802 05:20:02


11N20SISO\_HCH\_Graphs

Pref/11N20SIS  
O/HCH


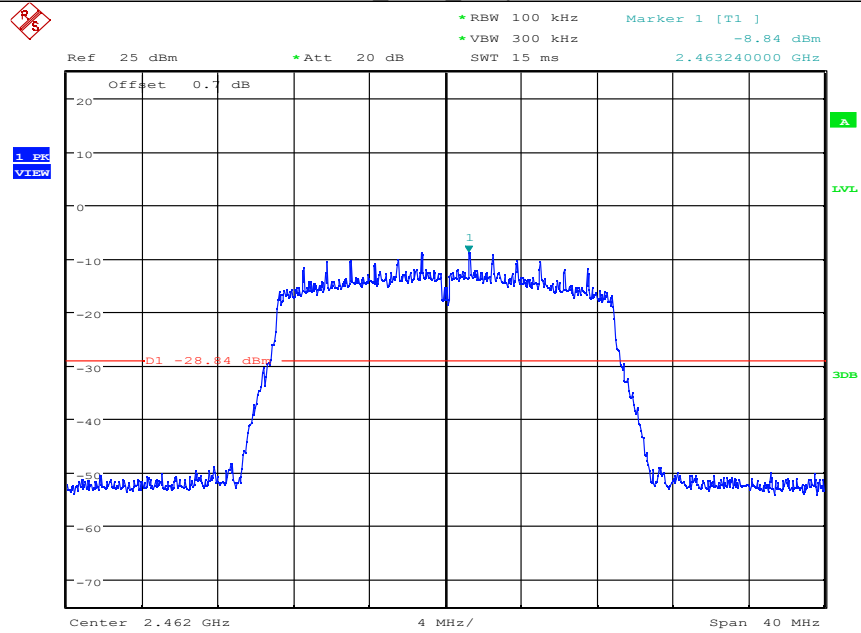


Date: 1.JAN.1802 05:29:47

Puw/11N20SIS  
O/HCH

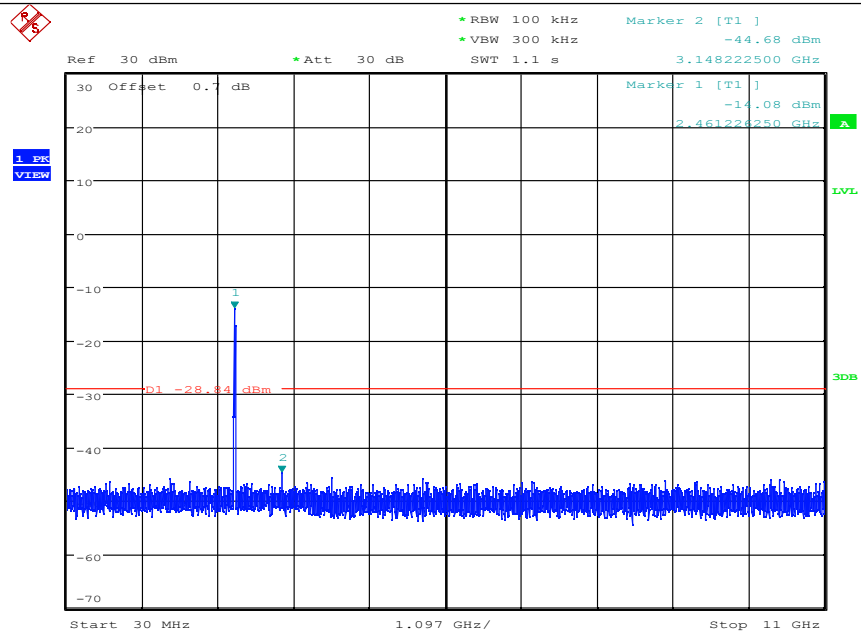


Date: 1.JAN.1802 05:30:00

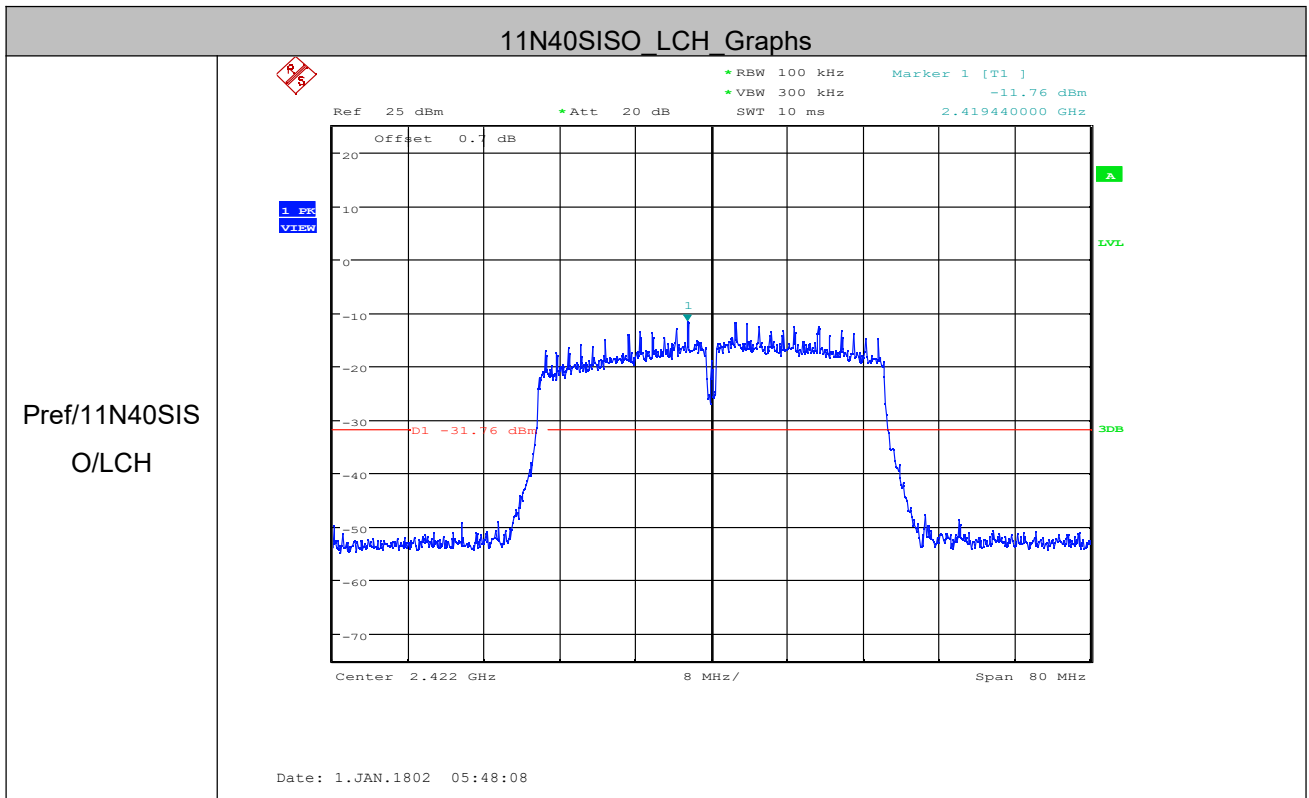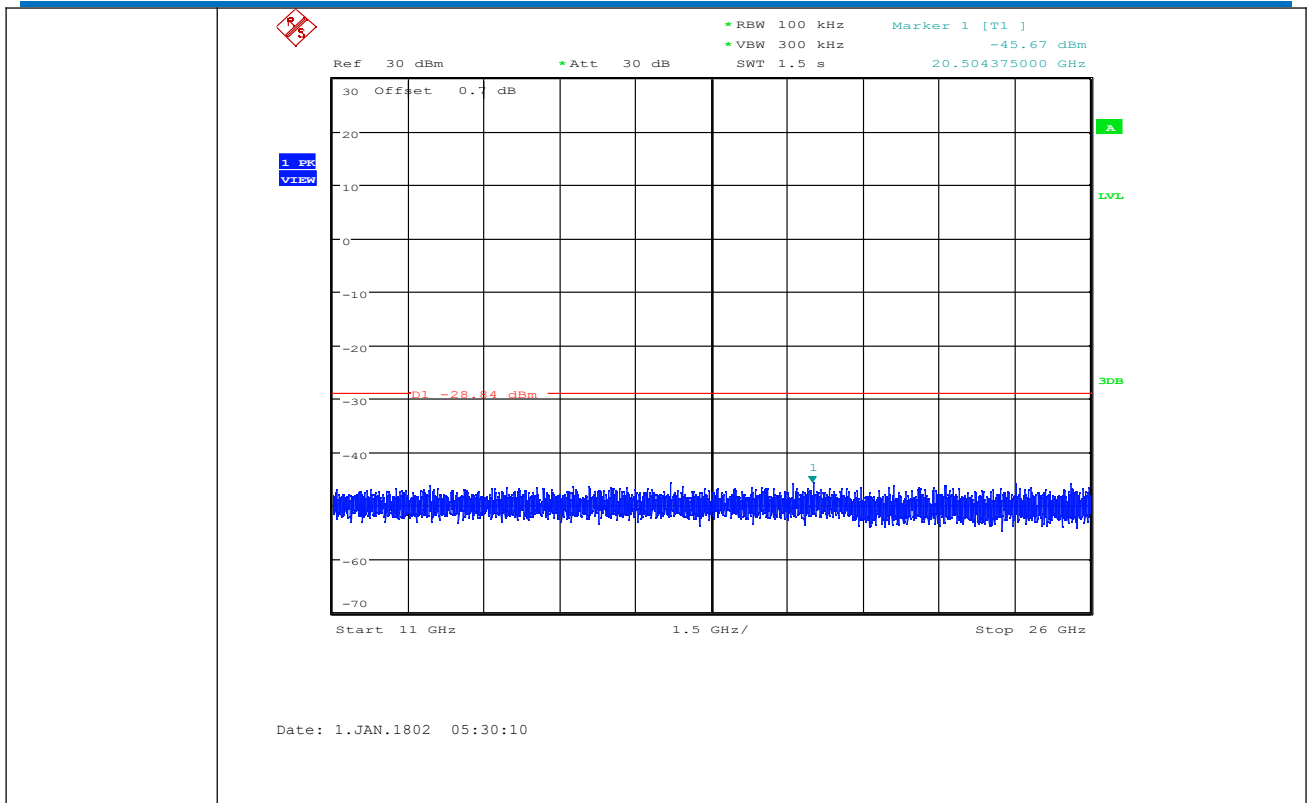

Puw/11N40SIS  
O/LCH




1 PK  
VIEW

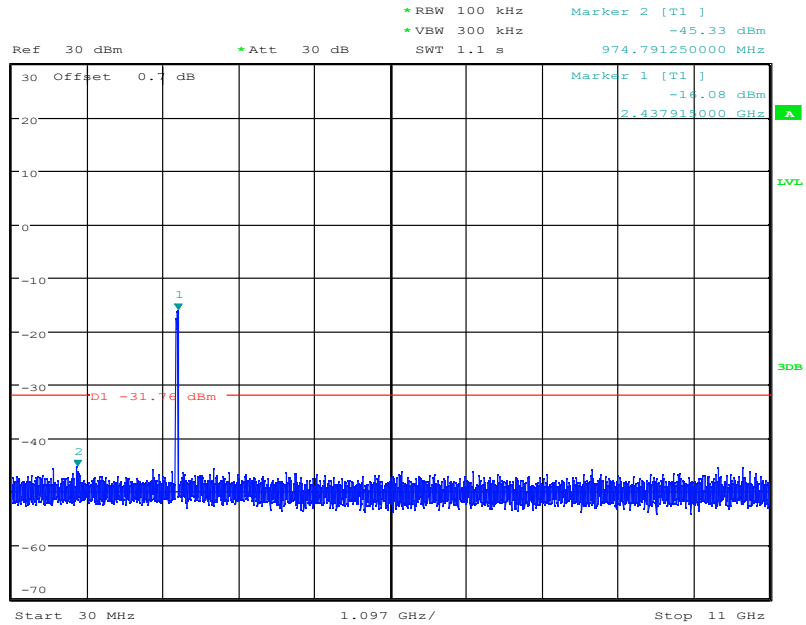

Date: 1.JAN.1802 05:48:21




1 PK  
VIEW

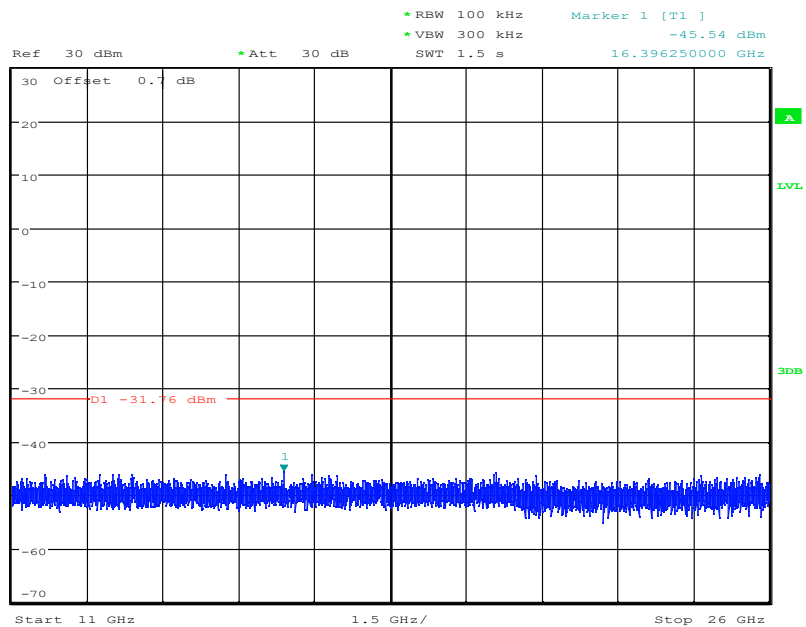

Date: 1.JAN.1802 05:48:32


11N40SISO\_MCH\_Graphs

Pref/11N40SIS  
O/MCH


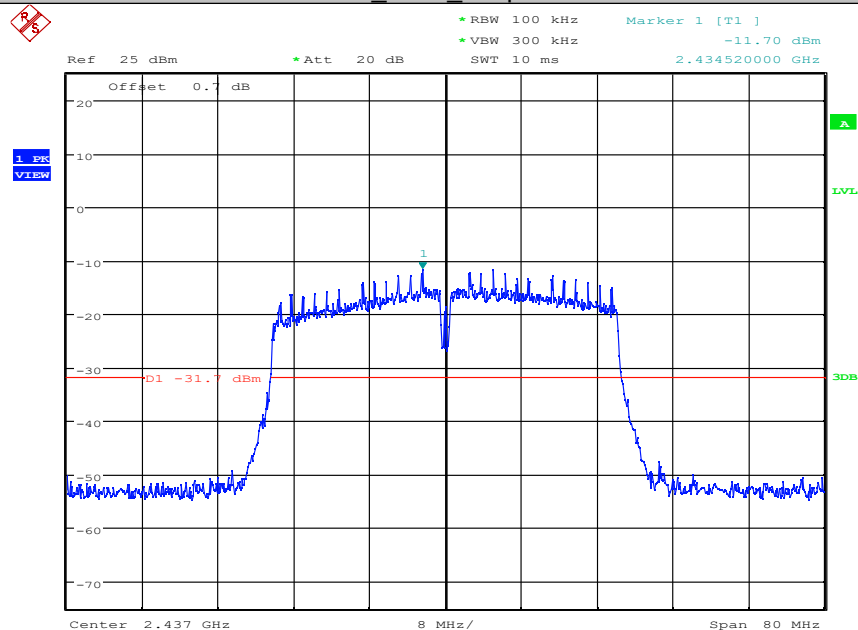


Date: 1.JAN.1802 05:52:16


Puw/11N40SIS  
O/MCH

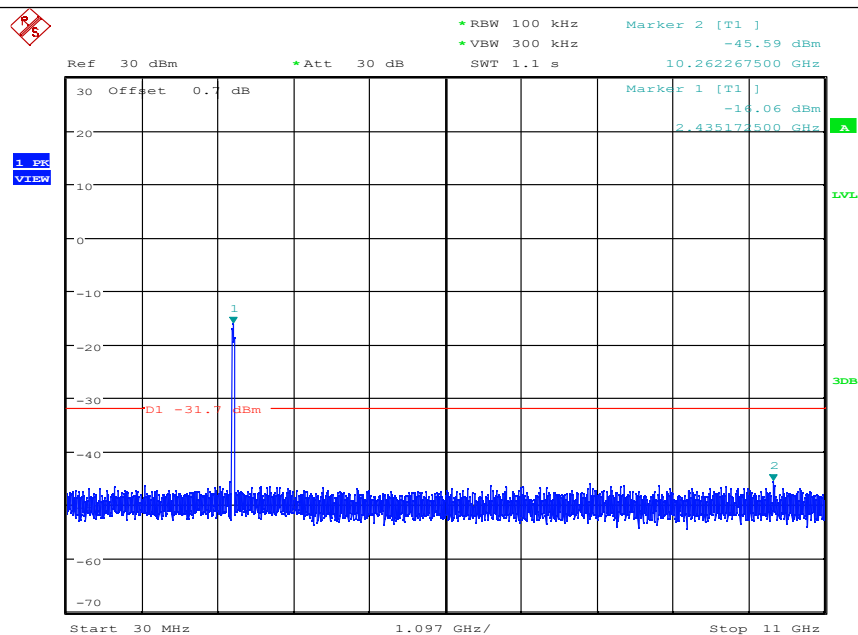


Date: 1.JAN.1802 05:52:29

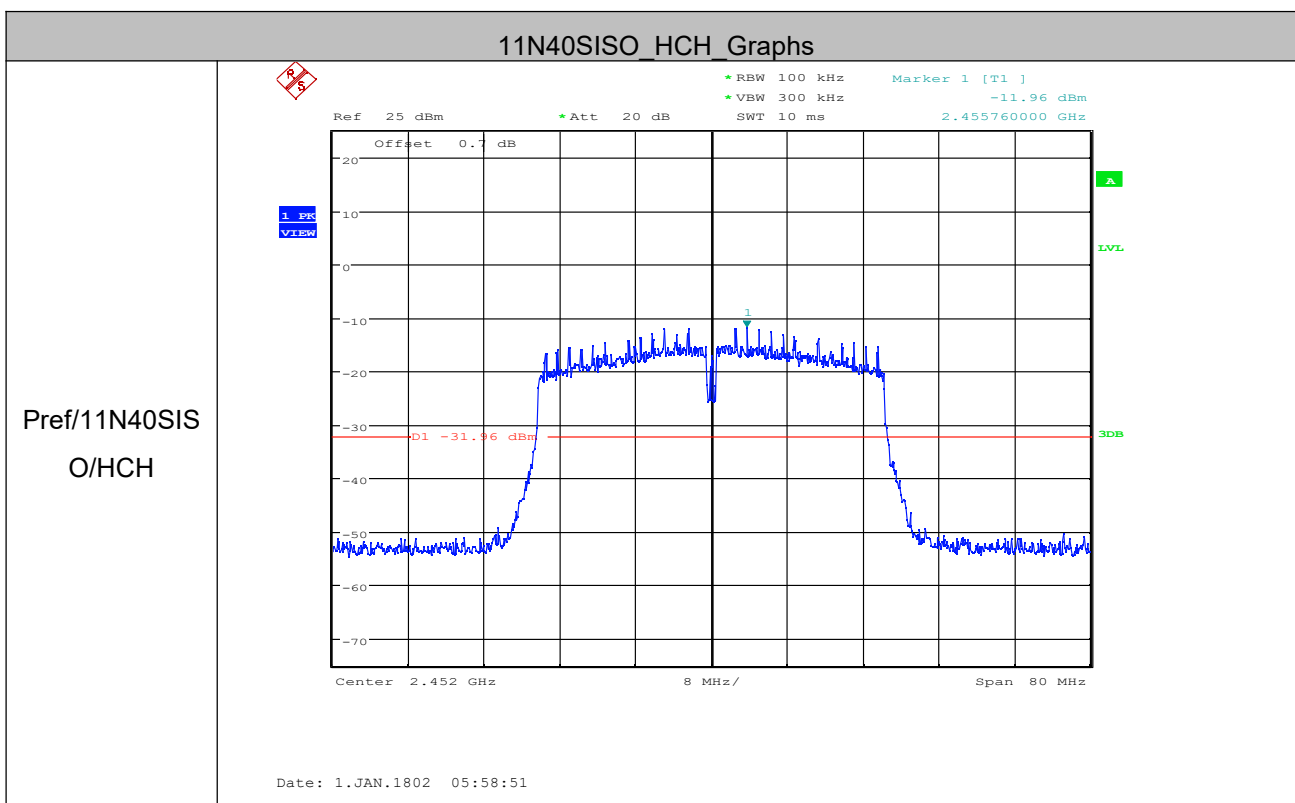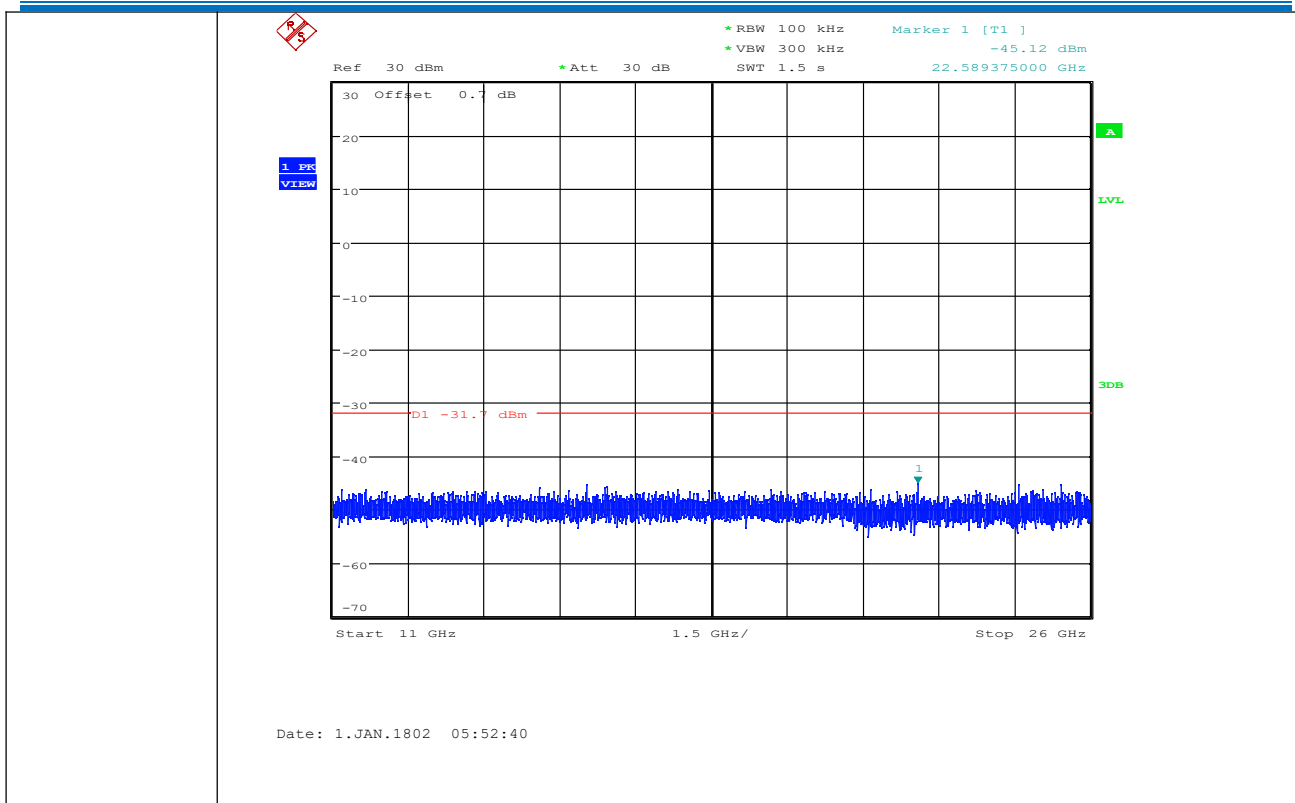

Puw/11N40SIS  
O/HCH

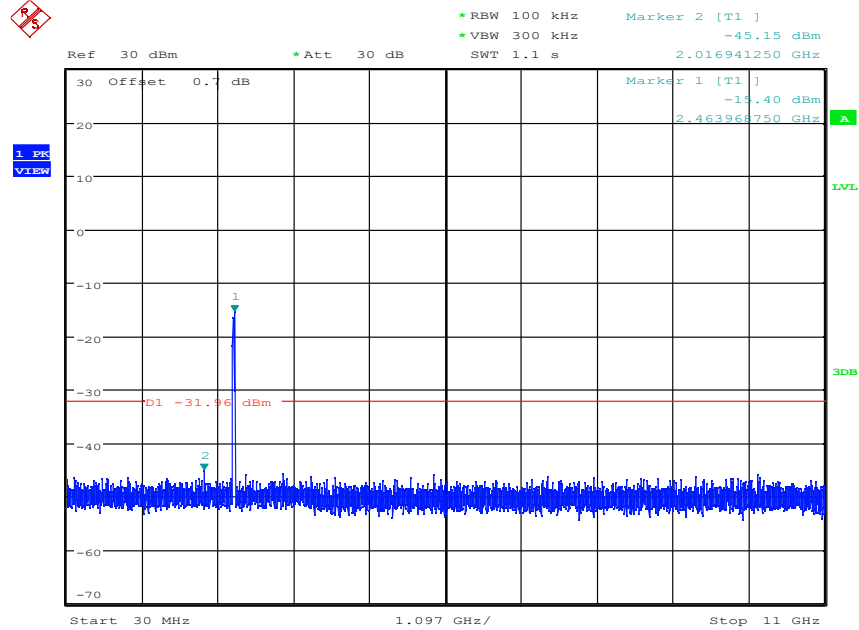

Date: 1.JAN.1802 05:59:03

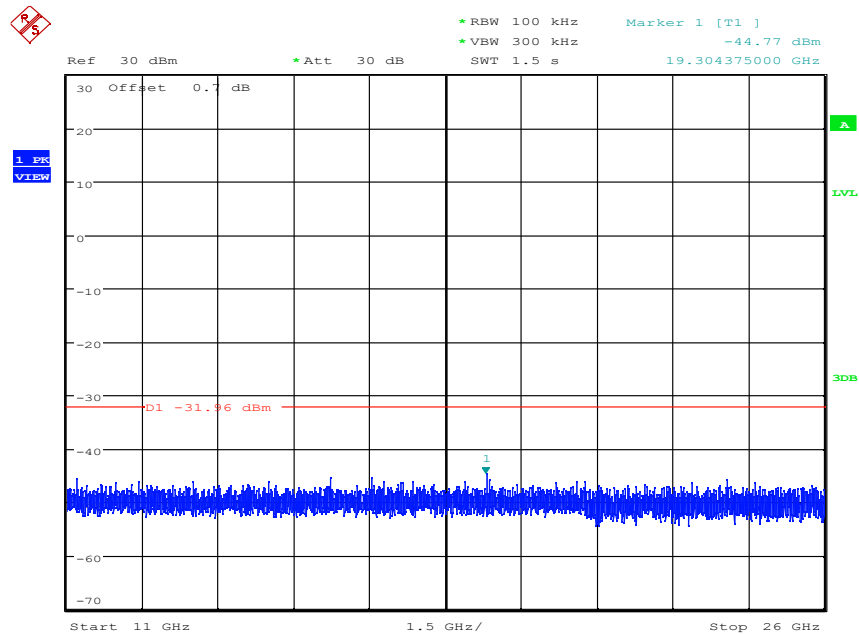

Date: 1.JAN.1802 05:59:14

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

## 5.8 Radiated Spurious Emissions

|                   |                                                                                                                                                                                                                                                                             |                                     |                   |            |                             |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|-------------------|------------|-----------------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.209 and 15.205                                                                                                                                                                                                                                   |                                     |                   |            |                             |
| Test Method:      | ANSI C63.10 2013                                                                                                                                                                                                                                                            |                                     |                   |            |                             |
| Test Site:        | Measurement Distance: 3m (Semi-Anechoic Chamber)                                                                                                                                                                                                                            |                                     |                   |            |                             |
| Receiver Setup:   | Frequency                                                                                                                                                                                                                                                                   | Detector                            | RBW               | VBW        | Remark                      |
|                   | 0.009MHz-0.090MHz                                                                                                                                                                                                                                                           | Peak                                | 10kHz             | 30kHz      | Peak                        |
|                   | 0.009MHz-0.090MHz                                                                                                                                                                                                                                                           | Average                             | 10kHz             | 30kHz      | Average                     |
|                   | 0.090MHz-0.110MHz                                                                                                                                                                                                                                                           | Quasi-peak                          | 10kHz             | 30kHz      | Quasi-peak                  |
|                   | 0.110MHz-0.490MHz                                                                                                                                                                                                                                                           | Peak                                | 10kHz             | 30kHz      | Peak                        |
|                   | 0.110MHz-0.490MHz                                                                                                                                                                                                                                                           | Average                             | 10kHz             | 30kHz      | Average                     |
|                   | 0.490MHz -30MHz                                                                                                                                                                                                                                                             | Quasi-peak                          | 10kHz             | 30kHz      | Quasi-peak                  |
|                   | 30MHz-1GHz                                                                                                                                                                                                                                                                  | Quasi-peak                          | 100 kHz           | 300kHz     | Quasi-peak                  |
|                   | Above 1GHz                                                                                                                                                                                                                                                                  | Peak                                | 1MHz              | 3MHz       | Peak                        |
|                   |                                                                                                                                                                                                                                                                             | Peak                                | 1MHz              | 10Hz       | Average                     |
| Limit:            | Frequency                                                                                                                                                                                                                                                                   | Field strength<br>(microvolt/meter) | Limit<br>(dBuV/m) | Remark     | Measurement<br>distance (m) |
|                   | 0.009MHz-0.490MHz                                                                                                                                                                                                                                                           | 2400/F(kHz)                         | -                 | -          | 300                         |
|                   | 0.490MHz-1.705MHz                                                                                                                                                                                                                                                           | 24000/F(kHz)                        | -                 | -          | 30                          |
|                   | 1.705MHz-30MHz                                                                                                                                                                                                                                                              | 30                                  | -                 | -          | 30                          |
|                   | 30MHz-88MHz                                                                                                                                                                                                                                                                 | 100                                 | 40.0              | Quasi-peak | 3                           |
|                   | 88MHz-216MHz                                                                                                                                                                                                                                                                | 150                                 | 43.5              | Quasi-peak | 3                           |
|                   | 216MHz-960MHz                                                                                                                                                                                                                                                               | 200                                 | 46.0              | Quasi-peak | 3                           |
|                   | 960MHz-1GHz                                                                                                                                                                                                                                                                 | 500                                 | 54.0              | Quasi-peak | 3                           |
|                   | Above 1GHz                                                                                                                                                                                                                                                                  | 500                                 | 54.0              | Average    | 3                           |
|                   | Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device. |                                     |                   |            |                             |

Test Setup:

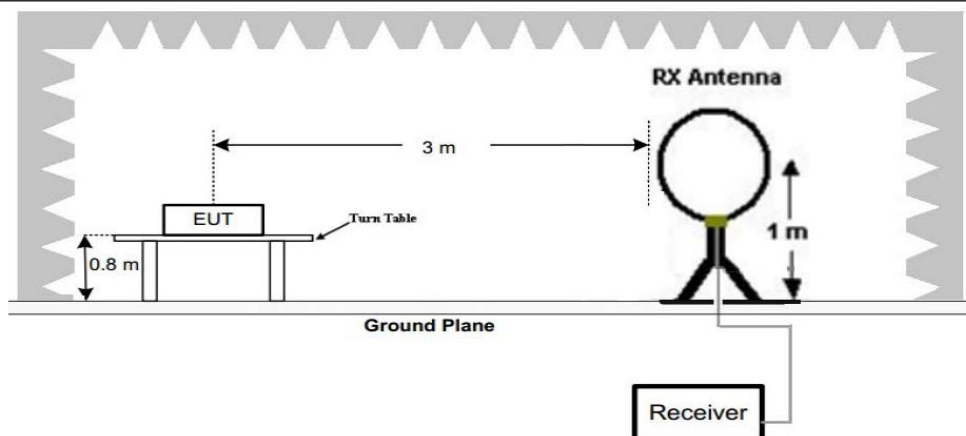


Figure 1. Below 30MHz

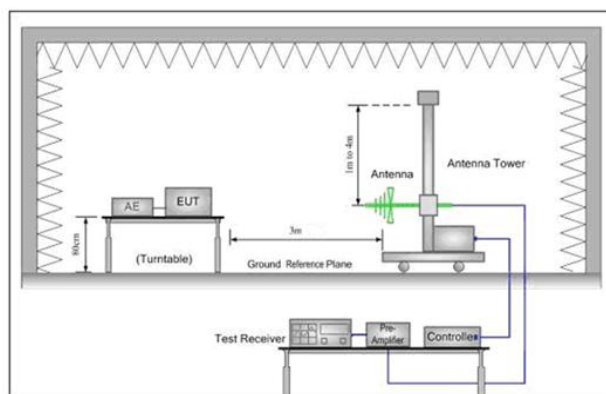


Figure 2. 30MHz to 1GHz

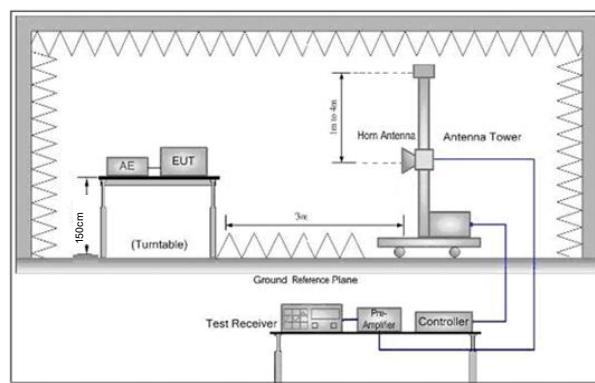


Figure 3. Above 1 GHz


Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.  
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.  
Note: For the radiated emission test above 1GHz:  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                        | <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel, the middle channel, the Highest channel.</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case .</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p> |
| Exploratory Test Mode: | <p>Transmitting with all kind of modulations, data rates.</p> <p>Transmitting mode, Charge + Transmitting mode.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Final Test Mode:       | <p>Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case.</p> <p>Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).</p> <p>For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b at middle channel is the worst case.</p> <p>Only the worst case is recorded in the report.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Test Results:          | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

### 5.8.1 Radiated emission below 1GHz

| 30MHz~1GHz |                      |          |
|------------|----------------------|----------|
| Test mode: | Charge +Transmitting | Vertical |

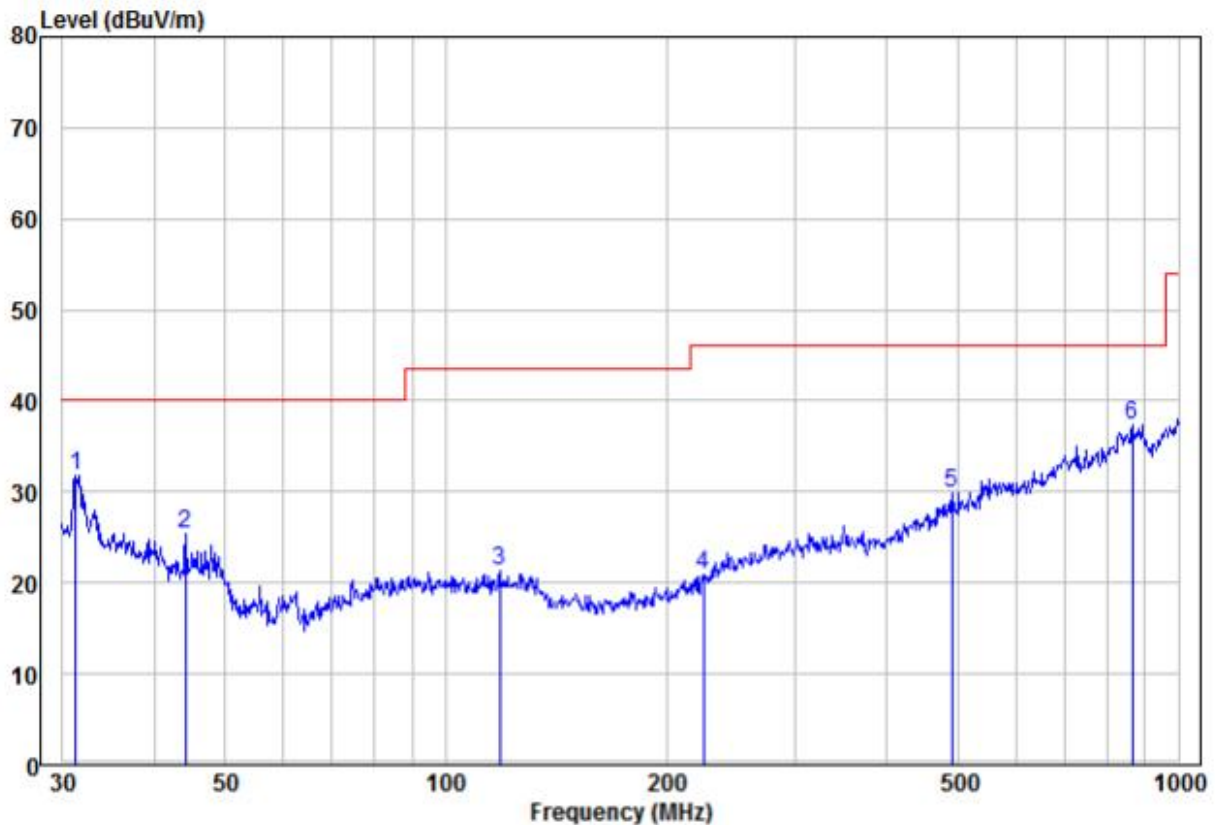

|            | Read  |        |        | Limit  | Over   |        |           |
|------------|-------|--------|--------|--------|--------|--------|-----------|
| Freq       | Level | Factor | Level  | Line   | Limit  | Remark | Pol/Phase |
| MHz        | dBuV  | dB/m   | dBuV/m | dBuV/m | dB     |        |           |
| 1 pp 31.29 | 16.08 | 15.81  | 31.89  | 40.00  | -8.11  | Peak   | VERTICAL  |
| 2 44.12    | 13.86 | 11.54  | 25.40  | 40.00  | -14.60 | Peak   | VERTICAL  |
| 3 118.60   | 9.63  | 11.81  | 21.44  | 43.50  | -22.06 | Peak   | VERTICAL  |
| 4 224.52   | 9.73  | 11.24  | 20.97  | 46.00  | -25.03 | Peak   | VERTICAL  |
| 5 490.74   | 9.79  | 19.98  | 29.77  | 46.00  | -16.23 | Peak   | VERTICAL  |
| 6 866.09   | 10.62 | 26.78  | 37.40  | 46.00  | -8.60  | Peak   | VERTICAL  |

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

|            |                      |            |
|------------|----------------------|------------|
| Test mode: | Charge +Transmitting | Horizontal |
|------------|----------------------|------------|

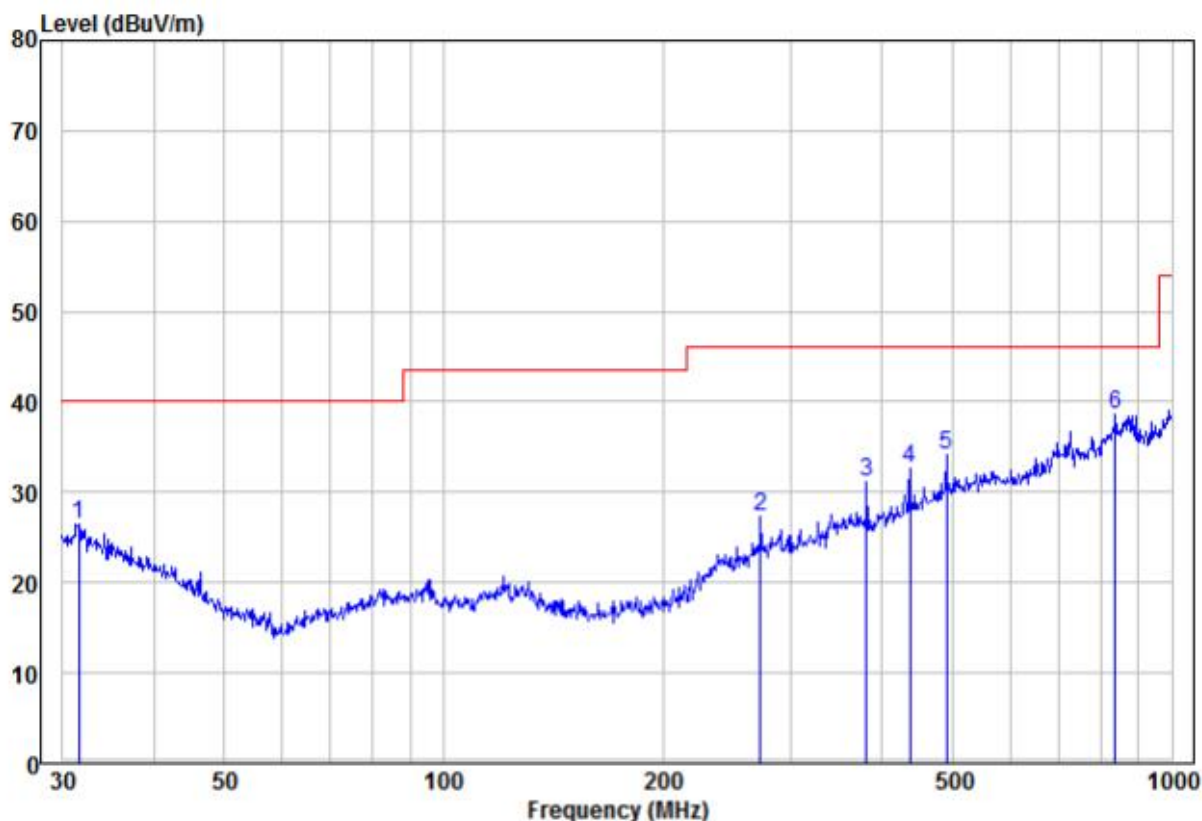

|      | Freq   | Read Level | Factor | Level  | Limit Line | Over Limit | Remark | Pol/Phase  |
|------|--------|------------|--------|--------|------------|------------|--------|------------|
|      | MHz    | dBuV       | dB/m   | dBuV/m | dBuV/m     | dB         |        |            |
| 1    | 31.51  | 10.66      | 15.76  | 26.42  | 40.00      | -13.58     | Peak   | HORIZONTAL |
| 2    | 272.28 | 12.86      | 14.38  | 27.24  | 46.00      | -18.76     | Peak   | HORIZONTAL |
| 3    | 381.25 | 14.81      | 16.40  | 31.21  | 46.00      | -14.79     | Peak   | HORIZONTAL |
| 4    | 437.12 | 14.56      | 18.14  | 32.70  | 46.00      | -13.30     | Peak   | HORIZONTAL |
| 5    | 490.74 | 14.22      | 19.98  | 34.20  | 46.00      | -11.80     | Peak   | HORIZONTAL |
| 6 pp | 836.24 | 11.72      | 26.81  | 38.53  | 46.00      | -7.47      | Peak   | HORIZONTAL |

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

### 5.8.2 Transmitter emission above 1GHz

| Test mode: |               | 802.11b(1Mbps) |                | Test channel: |        | Lowest        |           |
|------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|
| Frequency  | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)      | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 4824.000   | 53.50         | -4.26          | 49.24          | 74            | -24.76 | peak          | H         |
| 4824.000   | 37.94         | -4.26          | 33.68          | 54            | -20.32 | AVG           | H         |
| 7236.000   | 52.08         | 1.18           | 53.26          | 74            | -20.74 | peak          | H         |
| 7236.000   | 37.27         | 1.18           | 38.45          | 54            | -15.55 | AVG           | H         |
| 4824.000   | 54.28         | -4.26          | 50.02          | 74            | -23.98 | peak          | V         |
| 4824.000   | 38.21         | -4.26          | 33.95          | 54            | -20.05 | AVG           | V         |
| 7236.000   | 51.64         | 1.18           | 52.82          | 74            | -21.18 | peak          | V         |
| 7236.000   | 36.60         | 1.18           | 37.78          | 54            | -16.22 | AVG           | V         |

| Test mode: |               | 802.11b(1Mbps) |                | Test channel: |        | Middle        |           |
|------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|
| Frequency  | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)      | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 4874.000   | 52.51         | -4.12          | 48.39          | 74            | -25.61 | peak          | H         |
| 4874.000   | 36.57         | -4.12          | 32.45          | 54            | -21.55 | AVG           | H         |
| 7311.000   | 48.80         | 1.46           | 50.26          | 74            | -23.74 | peak          | H         |
| 7311.000   | 36.82         | 1.46           | 38.28          | 54            | -15.72 | AVG           | H         |
| 4874.000   | 53.69         | -4.12          | 49.57          | 74            | -24.43 | peak          | V         |
| 4874.000   | 36.10         | -4.12          | 31.98          | 54            | -22.02 | AVG           | V         |
| 7311.000   | 50.01         | 1.46           | 51.47          | 74            | -22.53 | peak          | V         |
| 7311.000   | 35.74         | 1.46           | 37.20          | 54            | -16.80 | AVG           | V         |

| Test mode: |               | 802.11b(1Mbps) |                | Test channel: |        | Highest       |           |
|------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|
| Frequency  | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)      | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 4924.000   | 52.56         | -4.03          | 48.53          | 74            | -25.47 | peak          | H         |
| 4924.000   | 37.20         | -4.03          | 33.17          | 54            | -20.83 | AVG           | H         |
| 7386.000   | 49.51         | 1.66           | 51.17          | 74            | -22.83 | peak          | H         |
| 7386.000   | 37.00         | 1.66           | 38.66          | 54            | -15.34 | AVG           | H         |
| 4924.000   | 55.05         | -4.03          | 51.02          | 74            | -22.98 | peak          | V         |
| 4924.000   | 38.82         | -4.03          | 34.79          | 54            | -19.21 | AVG           | V         |
| 7386.000   | 49.35         | 1.66           | 51.01          | 74            | -22.99 | peak          | V         |
| 7386.000   | 36.00         | 1.66           | 37.66          | 54            | -16.34 | AVG           | V         |

Remark:

- 1) The 1Mbps of rate of 802.11b is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
 Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

## 5.9 Restricted bands around fundamental frequency

|                   |                                                  |                    |                  |
|-------------------|--------------------------------------------------|--------------------|------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.209 and 15.205        |                    |                  |
| Test Method:      | ANSI C63.10 2013                                 |                    |                  |
| Test Site:        | Measurement Distance: 3m (Semi-Anechoic Chamber) |                    |                  |
| Limit:            | Frequency                                        | Limit (dBuV/m @3m) | Remark           |
|                   | 30MHz-88MHz                                      | 40.0               | Quasi-peak Value |
|                   | 88MHz-216MHz                                     | 43.5               | Quasi-peak Value |
|                   | 216MHz-960MHz                                    | 46.0               | Quasi-peak Value |
|                   | 960MHz-1GHz                                      | 54.0               | Quasi-peak Value |
|                   | Above 1GHz                                       | 54.0               | Average Value    |
|                   |                                                  | 74.0               | Peak Value       |
| Test Setup:       |                                                  |                    |                  |

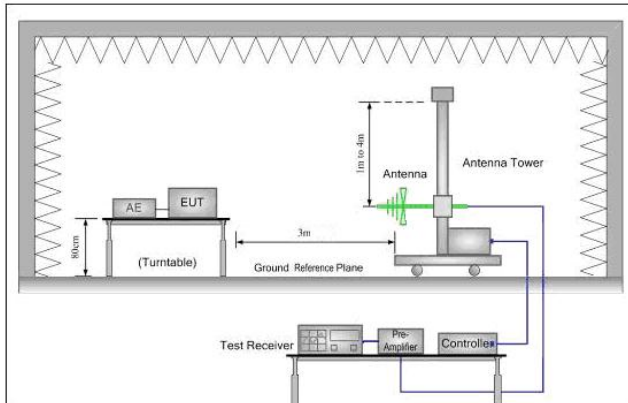


Figure 1. 30MHz to 1GHz

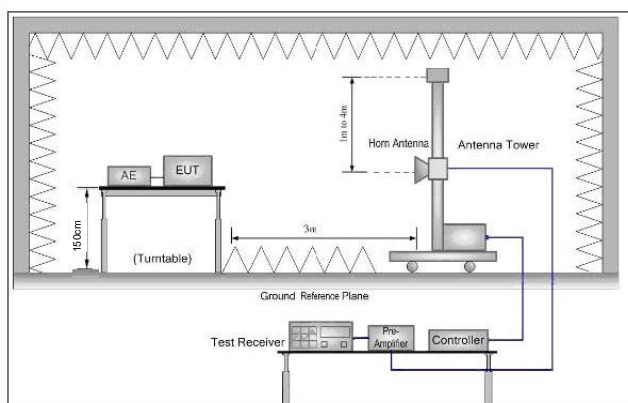


Figure 2. Above 1 GHz

### Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
  - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
  - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
  - For each suspected emission, the EUT was arranged to its worst case and

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                        | <p>then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</p> <p>g. Test the EUT in the lowest channel, the middle channel, the Highest channel.</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case .</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p> |
| Exploratory Test Mode: | <p>Transmitting with all kind of modulations, data rates.</p> <p>Transmitting mode.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Final Test Mode:       | <p>Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case.</p> <p>Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).</p> <p>Only the worst case is recorded in the report.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Test Results:          | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

**Test data:**

| Worse case mode: |               | 802.11b(1Mbps) |                | Test channel: |        | Lowest        |           |
|------------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 2390.000         | 58.90         | -9.2           | 49.70          | 74            | -24.30 | peak          | H         |
| 2390.000         | 44.97         | -9.2           | 35.77          | 54            | -18.23 | AVG           | H         |
| 2400.000         | 60.01         | -9.39          | 50.62          | 74            | -23.38 | peak          | H         |
| 2400.000         | 46.95         | -9.39          | 37.56          | 54            | -16.44 | AVG           | H         |
| 2390.000         | 59.00         | -9.2           | 49.80          | 74            | -24.20 | peak          | V         |
| 2390.000         | 44.17         | -9.2           | 34.97          | 54            | -19.03 | AVG           | V         |
| 2400.000         | 59.97         | -9.39          | 50.58          | 74            | -23.42 | peak          | V         |
| 2400.000         | 46.48         | -9.39          | 37.09          | 54            | -16.91 | AVG           | V         |

| Worse case mode: |               | 802.11b(1Mbps) |                | Test channel: |        | Highest       |           |
|------------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 2483.500         | 57.50         | -9.29          | 48.21          | 74            | -25.79 | peak          | H         |
| 2483.500         | 43.81         | -9.29          | 34.52          | 54            | -19.48 | AVG           | H         |
| 2483.500         | 57.55         | -9.29          | 48.26          | 74            | -25.74 | peak          | V         |
| 2483.500         | 45.50         | -9.29          | 36.21          | 54            | -17.79 | AVG           | V         |

| Worse case mode: |               | 802.11g(6Mbps) |                | Test channel: |        | Lowest   |           |
|------------------|---------------|----------------|----------------|---------------|--------|----------|-----------|
| Frequency        | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   | Type     | H/V       |
| 2390.000         | 58.42         | -9.2           | 49.22          | 74            | -24.78 | peak     | H         |
| 2390.000         | 44.05         | -9.2           | 34.85          | 54            | -19.15 | AVG      | H         |
| 2400.000         | 59.38         | -9.39          | 49.99          | 74            | -24.01 | peak     | H         |
| 2400.000         | 46.17         | -9.39          | 36.78          | 54            | -17.22 | AVG      | H         |
| 2390.000         | 58.34         | -9.2           | 49.14          | 74            | -24.86 | peak     | V         |
| 2390.000         | 44.64         | -9.2           | 35.44          | 54            | -18.56 | AVG      | V         |
| 2400.000         | 59.51         | -9.39          | 50.12          | 74            | -23.88 | peak     | V         |
| 2400.000         | 46.01         | -9.39          | 36.62          | 54            | -17.38 | AVG      | V         |

| Worse case mode: |               | 802.11g(6Mbps) |                | Test channel: |        | Highest  |           |
|------------------|---------------|----------------|----------------|---------------|--------|----------|-----------|
| Frequency        | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   | Type     | H/V       |
| 2483.500         | 57.82         | -9.29          | 48.53          | 74            | -25.47 | peak     | H         |
| 2483.500         | 43.67         | -9.29          | 34.38          | 54            | -19.62 | AVG      | H         |
| 2483.500         | 57.57         | -9.29          | 48.28          | 74            | -25.72 | peak     | V         |
| 2483.500         | 45.79         | -9.29          | 36.50          | 54            | -17.50 | AVG      | V         |

| Worse case mode: |               | 802.11n(HT20)(6.5Mbps) |                | Test channel: |        | Lowest        |           |
|------------------|---------------|------------------------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor                 | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)                   | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 2390.000         | 59.08         | -9.2                   | 49.88          | 74            | -24.12 | peak          | H         |
| 2390.000         | 44.02         | -9.2                   | 34.82          | 54            | -19.18 | AVG           | H         |
| 2400.000         | 59.60         | -9.39                  | 50.21          | 74            | -23.79 | peak          | H         |
| 2400.000         | 46.54         | -9.39                  | 37.15          | 54            | -16.85 | AVG           | H         |
| 2390.000         | 58.42         | -9.2                   | 49.22          | 74            | -24.78 | peak          | V         |
| 2390.000         | 44.11         | -9.2                   | 34.91          | 54            | -19.09 | AVG           | V         |
| 2400.000         | 59.29         | -9.39                  | 49.90          | 74            | -24.10 | peak          | V         |
| 2400.000         | 46.32         | -9.39                  | 36.93          | 54            | -17.07 | AVG           | V         |

| Worse case mode: |               | 802.11n(HT20)(6.5Mbps) |                | Test channel: |        | Highest       |           |
|------------------|---------------|------------------------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor                 | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)                   | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 2483.500         | 58.42         | -9.29                  | 49.13          | 74            | -24.87 | peak          | H         |
| 2483.500         | 43.85         | -9.29                  | 34.56          | 54            | -19.44 | AVG           | H         |
| 2483.500         | 57.66         | -9.29                  | 48.37          | 74            | -25.63 | peak          | V         |
| 2483.500         | 45.46         | -9.29                  | 36.17          | 54            | -17.83 | AVG           | V         |

| Worse case mode: |               | 802.11n(HT40)(13.5Mbps) |                | Test channel: |        | Lowest   |           |
|------------------|---------------|-------------------------|----------------|---------------|--------|----------|-----------|
| Frequency        | Meter Reading | Factor                  | Emission Level | Limits        | Over   | Detector | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)                    | (dBμV/m)       | (dBμV/m)      | (dB)   | Type     | H/V       |
| 2390.000         | 58.51         | -9.2                    | 49.31          | 74            | -24.69 | peak     | H         |
| 2390.000         | 44.19         | -9.2                    | 34.99          | 54            | -19.01 | AVG      | H         |
| 2400.000         | 60.08         | -9.39                   | 50.69          | 74            | -23.31 | peak     | H         |
| 2400.000         | 46.26         | -9.39                   | 36.87          | 54            | -17.13 | AVG      | H         |
| 2390.000         | 59.08         | -9.2                    | 49.88          | 74            | -24.12 | peak     | V         |
| 2390.000         | 44.54         | -9.2                    | 35.34          | 54            | -18.66 | AVG      | V         |
| 2400.000         | 59.43         | -9.39                   | 50.04          | 74            | -23.96 | peak     | V         |
| 2400.000         | 46.03         | -9.39                   | 36.64          | 54            | -17.36 | AVG      | V         |

| Worse case mode: |               | 802.11n(HT40)(13.5Mbps) |                | Test channel: |        | Highest  |           |
|------------------|---------------|-------------------------|----------------|---------------|--------|----------|-----------|
| Frequency        | Meter Reading | Factor                  | Emission Level | Limits        | Over   | Detector | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)                    | (dBμV/m)       | (dBμV/m)      | (dB)   | Type     | H/V       |
| 2483.500         | 57.93         | -9.29                   | 48.64          | 74            | -25.36 | peak     | H         |
| 2483.500         | 43.74         | -9.29                   | 34.45          | 54            | -19.55 | AVG      | H         |
| 2483.500         | 57.54         | -9.29                   | 48.25          | 74            | -25.75 | peak     | V         |
| 2483.500         | 46.40         | -9.29                   | 37.11          | 54            | -16.89 | AVG      | V         |

**Note:**


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

*Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor*

## 6 Photographs - EUT Test Setup

### 6.1 Radiated Spurious Emission

9kHz~30MHz:

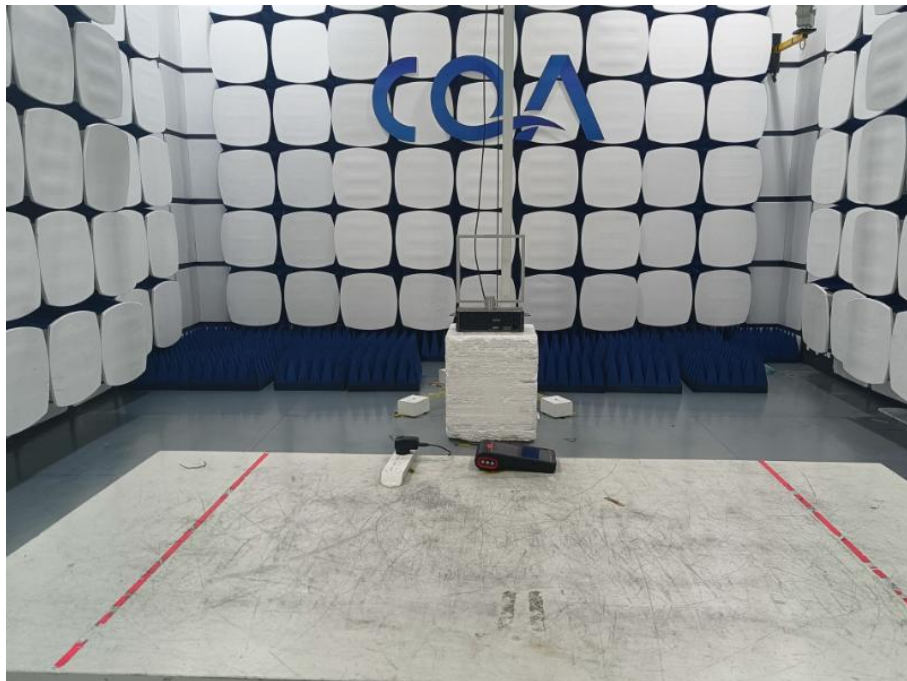


30MHz~1GHz:



Above 1GHz:



## 6.2 Conducted Emission

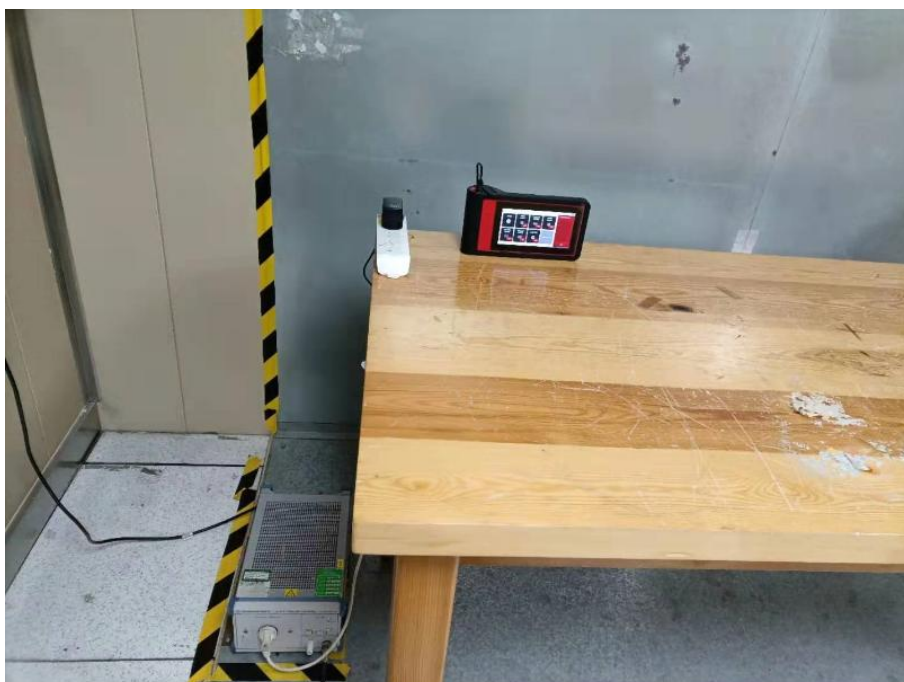

## 7 Photographs - EUT Constructional Details

Refer to PHOTOGRAPHS OF EUT for CQASZ20240801587E-01.

\*\*\* End of Report \*\*\*