

FCC Test Report

FCC ID : NKR-P68

Equipment : Wireless module

Model No. : DHUR-P68

Brand Name : Panasonic

Applicant : Wistron NeWeb Corporation

Address : 20 Park Avenue II, Hsinchu Science Park,

Hsinchu 308, Taiwan, R.O.C.

Standard : 47 CFR FCC Part 15.247

Received Date : Oct. 22, 2019

Tested Date : Oct. 25 ~ Nov. 01, 2019

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

Along Chen / Assistant Manager Gary Chang / Manager

Testing Laboratory

Report No.: FR9O2201AD Page: 1 of 60



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	
1.3	Test Setup Chart	8
1.4	The Equipment List	g
1.5	Test Standards	11
1.6	Deviation from Test Standard and Measurement Procedure	11
1.7	Measurement Uncertainty	11
2	TEST CONFIGURATION	12
2.1	Testing Condition	12
2.2	The Worst Test Modes and Channel Details	12
3	TRANSMITTER TEST RESULTS	13
3.1	Conducted Emissions	13
3.2	Unwanted Emissions into Restricted Frequency Bands	16
3.3	Unwanted Emissions into Non-Restricted Frequency Bands	33
3.4	Conducted Output Power	38
3.5	Number of Hopping Frequency	41
3.6	20dB and Occupied Bandwidth	44
3.7	Channel Separation	49
3.8	Number of Dwell Time	54
4	TEST LABORATORY INFORMATION	60



Release Record

Report No.	Version	Description	Issued Date
FR9O2201AD	Rev. 01	Initial issue	Nov. 28, 2019

Report No.: FR9O2201AD Page: 3 of 60



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.644MHz 45.59 (Margin -10.41dB) - QP	Pass
15.247(d)	Radiated Emissions	[dBuV/m at 3m]: 194.85MHz	Pass
15.209	Radiated Emissions	33.51 (Margin -9.99dB) - PK	F d 3 3
15.247(d)	Band Edge	Meet the requirement of limit	Pass
15.247(b)(1)	Conducted Output Power	Power [dBm]: 12.59	Pass
15.247(a)(1)(iii)	Number of Hopping Channels	Meet the requirement of limit	Pass
15.247(a)(1)	Hopping Channel Separation	Meet the requirement of limit	Pass
15.247(a)(1)(iii)	Dwell Time	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Report No.: FR9O2201AD Page: 4 of 60



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information							
Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number	Data Rate			
2400-2483.5	BR	2402-2480	0-78 [79]	1 Mbps			
2400-2483.5	EDR	2402-2480	0-78 [79]	2 Mbps			
2400-2483.5	EDR	2402-2480	0-78 [79]	3 Mbps			

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.

Note 2: Bluetooth BR uses a GFSK.

Note 3: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK and 8DPSK.

1.1.2 Antenna Details

Ant. No.	Туре	Gain (dBi)	Connector	Remarks
1	PIFA -5.95		No	

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	5Vdc from host
Hardware Version	v1.0
Software Version	v1.0

1.1.4 Accessories

N/A

Report No.: FR9O2201AD Page: 5 of 60



1.1.5 Channel List

	Frequency	band (MHz)			2400~2483.5		
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

Report No.: FR9O2201AD Page: 6 of 60



1.1.6 Test Tool and Duty Cycle

Test Tool	WCN Combo Tool, Version: W1747				
	Modulation Mode	Duty Cycle (%)	Duty Factor (dB)		
Duty Cycle and Duty Factor	DH5	77.91	1.08		
	3DH5	78.03	1.08		

1.1.7 Power Index of Test Tool

Modulation Mode		Test Frequency (MHz)	
Wodulation wode	2402	2441	2480
GFSK/1Mbps	default	default	default
π/4-DQPSK /2Mbps	default	default	default
8DPSK/3Mbps	default	default	default


Report No.: FR9O2201AD Page: 7 of 60



1.2 Local Support Equipment List

	Support Equipment List						
No.	Equipment	Brand	Model	FCC ID	Remarks		
1	Notebook	DELL	Latitude E5470	DoC			

1.3 Test Setup Chart

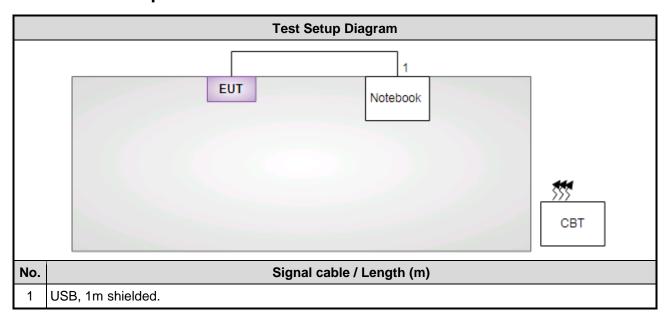

Report No.: FR9O2201AD Page: 8 of 60



1.4 The Equipment List

Test Item	Conducted Emission	Conducted Emission						
Test Site	Conduction room 1 /	Conduction room 1 / (CO01-WS)						
Tested Date	Oct. 31, 2019	Oct. 31, 2019						
Instrument	Manufacturer Model No. Serial No. Calibration Date Calibration Until							
Receiver	R&S	ESR3	101657	Jan. 08, 2019	Jan. 07, 2020			
LISN	R&S	ENV216	101579	Mar. 08, 2019	Mar. 07, 2020			
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 22, 2019	Oct. 21, 2020			
Measurement Software AUDIX e3 6.120210k NA NA								
Note: Calibration Int	erval of instruments list	ed above is one year.	•					

Test Item	Radiated Emission	Radiated Emission						
Test Site	966 chamber1 / (03Cl	H01-WS)						
Tested Date	Oct. 25 ~ Oct. 28, 201	Oct. 25 ~ Oct. 28, 2019						
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until			
Spectrum Analyzer	R&S	FSV40	101498	Dec. 27, 2018	Dec. 26, 2019			
Receiver	R&S	ESR3	101658	Dec. 11, 2018	Dec. 10, 2019			
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 12, 2019	Jul. 11, 2020			
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 18, 2018	Dec. 17, 2019			
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2018	Nov. 14, 2019			
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 09, 2018	Nov. 08, 2019			
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 07, 2019	Oct. 06, 2020			
Preamplifier	EMC	EMC02325	980225	Jul. 09, 2019	Jul. 08, 2020			
Preamplifier	Agilent	83017A	MY39501308	Oct. 08, 2019	Oct. 07, 2020			
Preamplifier	EMC	EMC184045B	980192	Aug. 01, 2019	Jul. 31, 2020			
RF Cable	EMC	EMC104-SM-SM-80 00	181106	Oct. 07, 2019	Oct. 06, 2020			
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 07, 2019	Oct. 06, 2020			
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 07, 2019	Oct. 06, 2020			
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 07, 2019	Oct. 06, 2020			
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 07, 2019	Oct. 06, 2020			
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Oct. 07, 2019	Oct. 06, 2020			
Measurement Software	AUDIX	e3	6.120210g	NA	NA			
Note: Calibration Inter	val of instruments liste	d above is one year.						

Report No.: FR9O2201AD Page: 9 of 60



Test Item	RF Conducted									
Test Site	(TH01-WS)									
Tested Date	Nov. 01, 2019									
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until					
Bluetooth Tester	R&S	CBT	100959	Oct. 18, 2019	Oct. 17, 2020					
Spectrum Analyzer	R&S	FSV40	101063	Apr. 17, 2019	Apr. 16, 2020					
Spectrum Analyzer	R& S	FSV40	101499	Jan. 07, 2019	Jan. 06, 2020					
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Dec. 05, 2018	Dec. 04, 2019					
Power Meter	Anritsu	ML2495A	1241002	Oct. 23, 2019	Oct. 22, 2020					
Power Sensor	Anritsu	MA2411B	1207366	Oct. 23, 2019	Oct. 22, 2020					
DC POWER SOURCE	GW INSTEK	GPC-6030D	GES855395	Oct. 29, 2019	Oct. 28, 2020					
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA					
Note: Calibration Inte	Note: Calibration Interval of instruments listed above is one year.									

Report No.: FR9O2201AD Page : 10 of 60



1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247 ANSI C63.10-2013 FCC KDB 558074 D01 15.247 Meas Guidance v05r02

1.6 Deviation from Test Standard and Measurement Procedure

None

1.7 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty								
Parameters	Uncertainty							
Bandwidth	±34.130 Hz							
Conducted power	±0.808 dB							
Power density	±0.583 dB							
Conducted emission	±2.715 dB							
AC conducted emission	±2.92 dB							
Radiated emission ≤ 1GHz	±3.41 dB							
Radiated emission > 1GHz	±4.59 dB							
Time	±0.1%							

Report No.: FR9O2201AD Page: 11 of 60



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	22°C / 58%	Akun Chung
Radiated Emissions	03CH01-WS	24°C / 63%	Mike Shu
RF Conducted	TH01-WS	22°C / 64%	Brad Wu

FCC Designation No.: TW2732FCC site registration No.: 181692

➤ ISED#: 10807A

➤ CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate (Mbps)	Test Configuration
Conducted Emissions	GFSK	2402	1Mbps	
Radiated Emissions ≤ 1GHz	GFSK	2402	1Mbps	
Radiated Emissions > 1GHz	GFSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480	1Mbps 3Mbps	
Conducted Output Power	GFSK л/4 DQPSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480 2402, 2441, 2480	1Mbps 2Mbps 3Mbps	
Number of Hopping Channels	GFSK л/4 DQPSK 8DPSK	2402~2480 2402~2480 2402~2480	1Mbps 2Mbps 3Mbps	
Hopping Channel Separation 20dB and Occupied bandwidth	GFSK л/4 DQPSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480 2402, 2441, 2480	1Mbps 2Mbps 3Mbps	
Dwell Time	GFSK л/4 DQPSK 8DPSK	2441 2441 2441	1Mbps 2Mbps 3Mbps	

NOTE:

Report No.: FR9O2201AD Page: 12 of 60

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The Y-plane results were found as the worst case and were shown in this report.



3 Transmitter Test Results

3.1 Conducted Emissions


3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit								
Frequency Emission (MHz) Quasi-Peak Average								
0.15-0.5	66 - 56 *	56 - 46 *						
0.5-5	56	46						
5-30	60	50						
Note 1: * Decreases with the logarithm of the frequency.								

3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V/60Hz

3.1.3 Test Setup

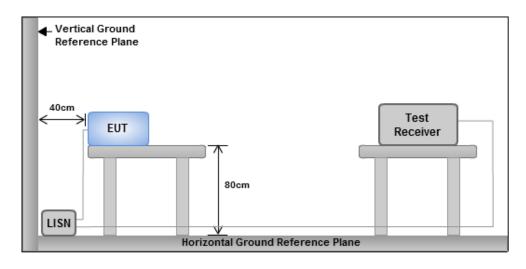


Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR9O2201AD Page: 13 of 60




3.1.4 Test Result of Conducted Emissions

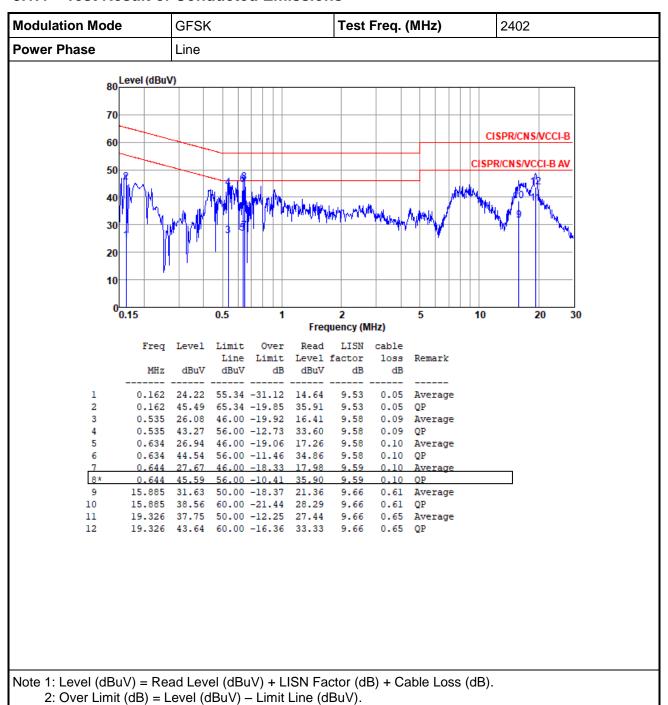

Report No.: FR9O2201AD Page: 14 of 60



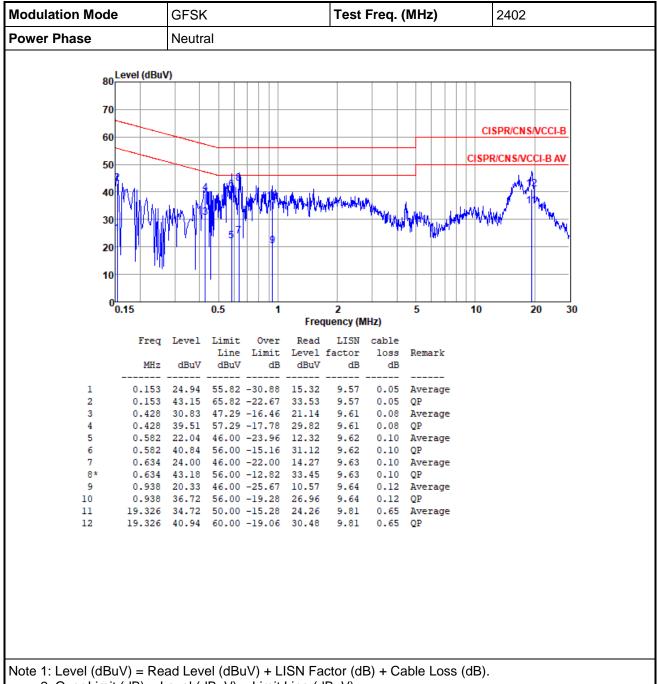

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Report No.: FR9O2201AD Page: 15 of 60



3.2 Unwanted Emissions into Restricted Frequency Bands

3.2.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit											
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)								
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300								
0.490~1.705	24000/F(kHz)	33.8 - 23	30								
1.705~30.0	30	29	30								
30~88	100	40	3								
88~216	150	43.5	3								
216~960	200	46	3								
Above 960	500	54	3								

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:**

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Report No.: FR9O2201AD Page: 16 of 60



3.2.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:

3.

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. Radiated emission above 1GHz / Peak value RBW=1MHz, VBW=3MHz and Peak detector

Radiated emission above 1GHz / Average value for harmonics
The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula for DH5 packet type which has worst duty factor:


20log (Duty cycle) = 20log
$$\frac{1s / 1600 * 5}{100 \text{ ms}}$$
 = -30.1dB

4. Radiated emission above 1GHz / Average value for other emissions RBW=1MHz, VBW=1/T and Peak detector

Report No.: FR9O2201AD Page: 17 of 60




3.2.3 Test Setup

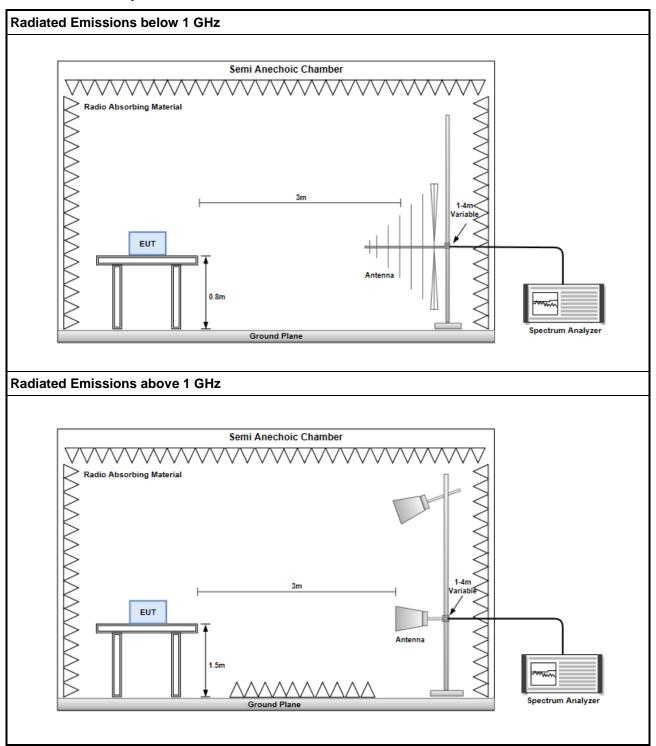

Report No.: FR9O2201AD Page: 18 of 60



3.2.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

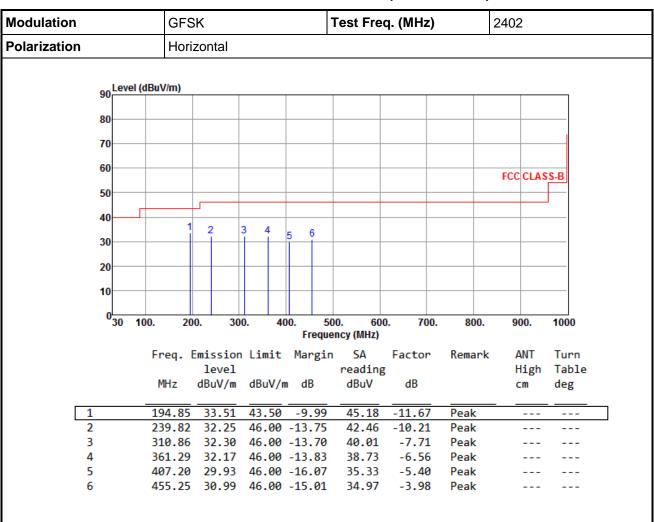

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR9O2201AD Page: 19 of 60



Modulation	GFSK		Test Fred	q. (MHz)		2402			
Polarization	Vertical								
90 Level (dE	BuV/m)								
00									
80									
70									
60									
						FCC CLAS	S-B		
50									
40									
30	1 2	3 4 5 6							
30									
20									
10									
⁰ 30 100	. 200. 30		00. 600	700.	800.	900.	1000		
			ency (MHz)						
		n Limit Margi		Factor	Remark	ANT	Turn		
	level MHz dBuV/m		reading dBuV	dB		High cm	Table deg		
	1112 454711	abav/iii ab	abav	ub.		CIII	ucg		
1	181.40 27.10		37.25	-10.15	Peak				
		46.00 -18.86	37.32	-10.18	Peak				
		46.00 -15.11		-7.75	Peak				
		46.00 -15.12 46.00 -13.75		-6.59 -5.41	Peak Peak				
	466.32 32.25 455.14 30.55		34.53	-3.41	Peak				

*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR9O2201AD Page: 20 of 60



3.2.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK

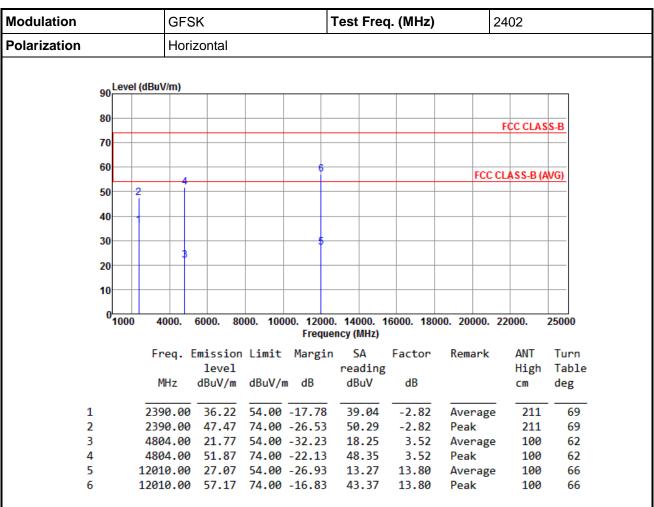

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR9O2201AD Page: 21 of 60



Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical		

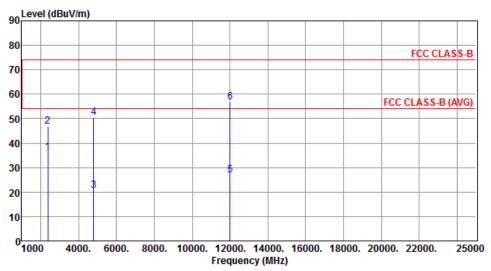

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ü	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	36.22	54.00	-17.78	39.04	-2.82	Average	269	341
2	2390.00	46.86	74.00	-27.14	49.68	-2.82	Peak	269	341
3	4804.00	20.51	54.00	-33.49	16.99	3.52	Average	100	134
4	4804.00	50.61	74.00	-23.39	47.09	3.52	Peak	100	134
5	12010.00	26.76	54.00	-27.24	12.96	13.80	Average	100	136
6	12010.00	56.86	74.00	-17.14	43.06	13.80	Peak	100	136

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR9O2201AD Page: 22 of 60



4

5

6

7

8

Modulation			GFS	SK		-	Test Fred	q. (MHz)	2	441		
Polarization			Hori	Horizontal								
	90 <mark>l</mark>	Level (dBuV/m)									
	80											
	70									FCC CLAS	S-B	
	60		. 6	8					FCC C	LASS-B (A	WG)	
	50	2	Ť									
	40		3								-	
	30											
	20		5	7								
	10											
	0,	1000	4000.	6000. 80	000. 100		. 14000. 1 ency (MHz)	6000. 1800	00. 20000. 2	2000.	25000	
			Fred	Emission	limit			Factor	Remark	ANT	Turn	
			rreq.	level	LIMIC	riai giii	reading		Kelliul K	High	Table	
			MHz	dBuV/m	dBuV/ı	m dB	dBuV	dB		cm	deg	
:	1		2390.00	37.81	54.00	-16.19	40.63	-2.82	Average	217	63	
	2		2390.00			-26.93	49.89	-2.82	Peak	217	63	
=	3		2483.50	36.31	54.00	-17.69	39.27	-2.96	Average	217	63	

50.97

16.30

46.40

12.72

-2.96

3.59

3.59

9.15

9.15

Peak

Peak

Peak

Average

Average

217

100

100

100

100

63

62

62

69

69

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor, cable loss and amplifier gain

2483.50 48.01 74.00 -25.99

4882.00 19.89 54.00 -34.11

4882.00 49.99 74.00 -24.01

7323.00 21.87 54.00 -32.13


7323.00 51.97 74.00 -22.03 42.82

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR9O2201AD Page: 23 of 60



Modulation GFSI						Test Freq. (MHz) 2441						
Polarization Vertical												
ام	_evel (dBu\	//m)										
90												

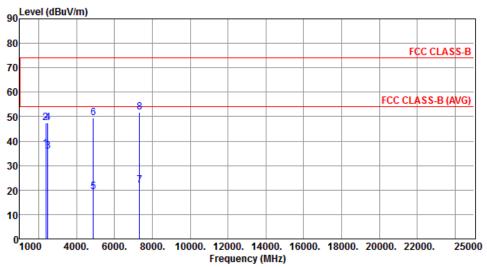


	Freq. [Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.02	54.00	-16.98	39.84	-2.82	Average	269	341
2	2390.00	47.47	74.00	-26.53	50.29	-2.82	Peak	269	341
3	2483.50	35.90	54.00	-18.10	38.86	-2.96	Average	269	341
4	2483.50	47.56	74.00	-26.44	50.52	-2.96	Peak	269	341
5	4882.00	19.41	54.00	-34.59	15.82	3.59	Average	100	132
6	4882.00	49.51	74.00	-24.49	45.92	3.59	Peak	100	132
7	7323.00	21.80	54.00	-32.20	12.65	9.15	Average	100	133
8	7323.00	51.90	74.00	-22.10	42.75	9.15	Peak	100	133

*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR9O2201AD Page: 24 of 60



Modulation	GFSK	Test Freq. (MHz)	248	2480		
Polarization						
90 Level (d	iBuV/m)					

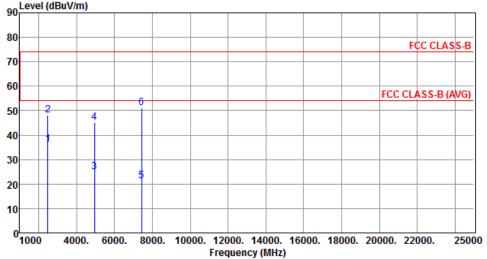


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2483.50	36.16	54.00	-17.84	41.40	-5.24	Average	206	62
2	2483.50	48.00	74.00	-26.00	53.24	-5.24	Peak	206	62
3	4960.00	24.94	54.00	-29.06	-6.30	31.24	Average	100	59
4	4960.00	45.04	74.00	-28.96	44.10	0.94	Peak	100	59
5	7440.00	21.14	54.00	-32.86	-14.84	35.98	Average	100	65
6	7440.00	51.24	74.00	-22.76	43.51	7.73	Peak	100	65

*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR9O2201AD Page: 25 of 60



Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical		

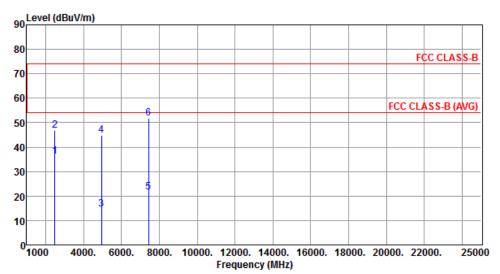


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2483.50	36.18	54.00	-17.82	41.42	-5.24	Average	263	345
2	2483.50	46.86	74.00	-27.14	52.10	-5.24	Peak	263	345
3	4960.00	14.73	54.00	-39.27	-16.51	31.24	Average	100	135
4	4960.00	44.83	74.00	-29.17	43.89	0.94	Peak	100	135
5	7440.00	21.59	54.00	-32.41	-14.39	35.98	Average	100	134
6	7440.00	51.69	74.00	-22.31	43.96	7.73	Peak	100	134

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR9O2201AD Page: 26 of 60



3.2.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 8DPSK

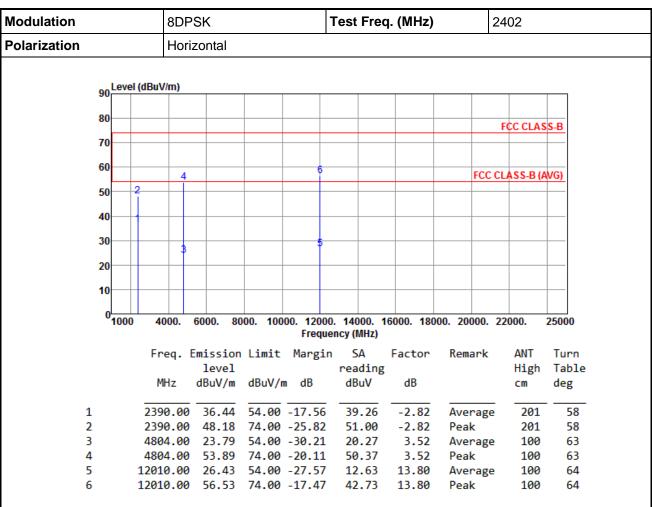

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR9O2201AD Page: 27 of 60



Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Vertical		

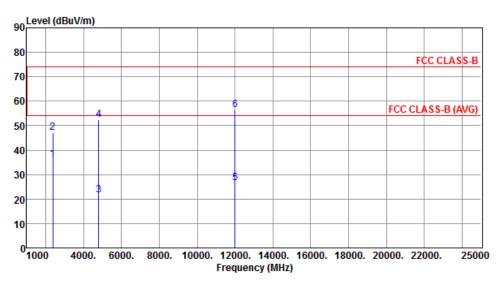


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	36.11	54.00	-17.89	38.93	-2.82	Average	267	343
2	2390.00	47.07	74.00	-26.93	49.89	-2.82	Peak	267	343
3	4804.00	21.52	54.00	-32.48	18.00	3.52	Average	100	131
4	4804.00	52.62	74.00	-21.38	49.10	3.52	Peak	100	131
5	12010.00	26.45	54.00	-27.55	12.65	13.80	Average	100	135
6	12010.00	56.55	74.00	-17.45	42.75	13.80	Peak	100	135

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR9O2201AD Page: 28 of 60



Modulation 80		SK	Test Freq.	Test Freq. (MHz)			2441		
Polarization Horizontal									
_ Lev	el (dBuV/m)								
80							FCC CLA	SS-B	

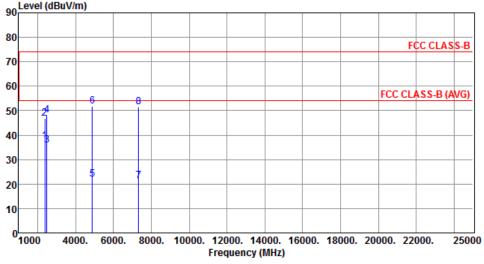


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	37.68	54.00	-16.32	40.50	-2.82	Average	199	53
2	2390.00	46.85	74.00	-27.15	49.67	-2.82	Peak	199	53
3	2483.50	35.81	54.00	-18.19	38.77	-2.96	Average	199	53
4	2483.50	48.01	74.00	-25.99	50.97	-2.96	Peak	199	53
5	4882.00	21.86	54.00	-32.14	18.27	3.59	Average	100	63
6	4882.00	51.96	74.00	-22.04	48.37	3.59	Peak	100	63
7	7323.00	21.40	54.00	-32.60	12.25	9.15	Average	100	66
8	7323.00	51.50	74.00	-22.50	42.35	9.15	Peak	100	66

*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR9O2201AD Page: 29 of 60



Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Vertical		

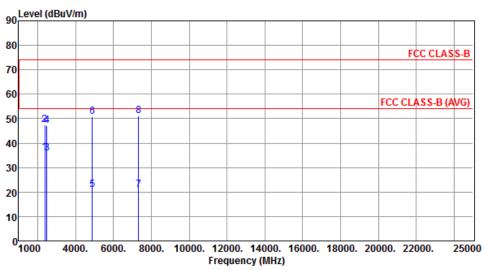


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	36.22	54.00	-17.78	39.04	-2.82	Average	260	344
2	2390.00	47.55	74.00	-26.45	50.37	-2.82	Peak	260	344
3	2483.50	35.96	54.00	-18.04	38.92	-2.96	Average	260	344
4	2483.50	47.01	74.00	-26.99	49.97	-2.96	Peak	260	344
5	4882.00	20.86	54.00	-33.14	17.27	3.59	Average	100	138
6	4882.00	50.96	74.00	-23.04	47.37	3.59	Peak	100	138
7	7323.00	20.95	54.00	-33.05	11.80	9.15	Average	100	169
8	7323.00	51.05	74.00	-22.95	41.90	9.15	Peak	100	169

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR9O2201AD Page: 30 of 60



Modulation	8DPSK		Test Freq	ı. (MHz)	24	2480		
Polarization Horizontal								
90 Level (c 80 70	IBuV/m)					FCC CLASS		

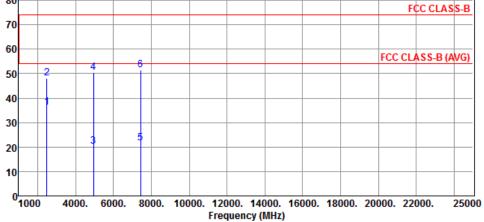


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483 50	36.28	54 00	-17 72	39.24	-2.96	Average	202	60
2	2483.50				51.17	-2.96	Peak	202	60
3	4960.00	20.42	54.00	-33.58	16.61	3.81	Average	100	61
4	4960.00	50.52	74.00	-23.48	46.71	3.81	Peak	100	61
5	7440.00	21.47	54.00	-32.53	12.54	8.93	Average	100	67
6	7440.00	51.57	74.00	-22.43	42.64	8.93	Peak	100	67

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR9O2201AD Page: 31 of 60



Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Vertical		

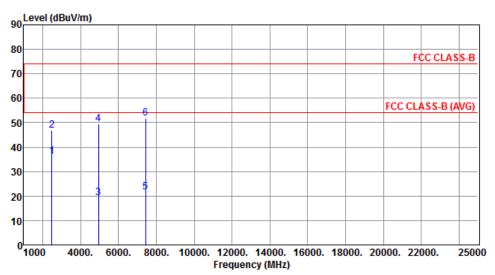

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	36.28	54.00	-17.72	39.24	-2.96	Average	261	340
2	2483.50	46.94	74.00	-27.06	49.90	-2.96	Peak	261	340
3	4960.00	19.36	54.00	-34.64	15.55	3.81	Average	100	131
4	4960.00	49.46	74.00	-24.54	45.65	3.81	Peak	100	131
5	7440.00	21.57	54.00	-32.43	12.64	8.93	Average	100	131
6	7440.00	51.67	74.00	-22.33	42.74	8.93	Peak	100	131

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR9O2201AD Page: 32 of 60



3.3 Unwanted Emissions into Non-Restricted Frequency Bands

3.3.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.3.2 Test Procedures


Reference level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Scan Frequency range is up to 25GHz
- 4. Use the peak marker function to determine the maximum amplitude level


3.3.3 Test Setup



Report No.: FR9O2201AD Page: 33 of 60




3.3.4 Unwanted Emissions into Non-Restricted Frequency Bands

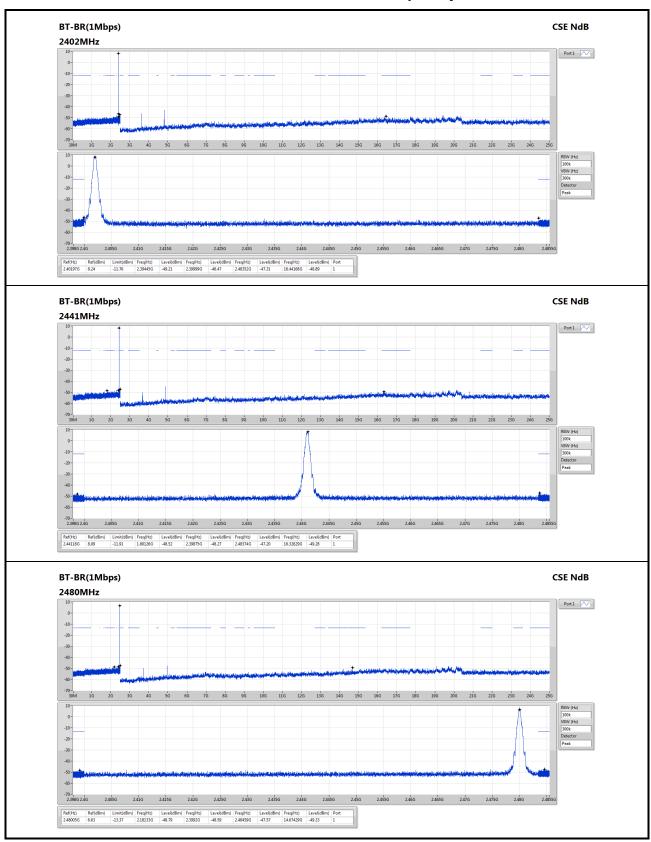


Report No.: FR9O2201AD



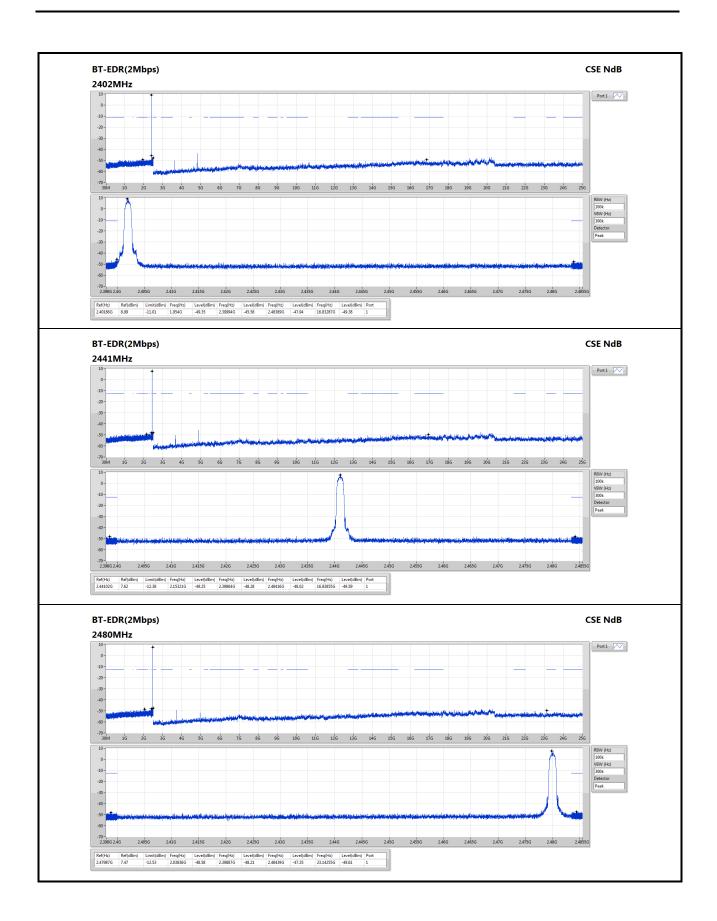


Report No.: FR9O2201AD Page: 35 of 60



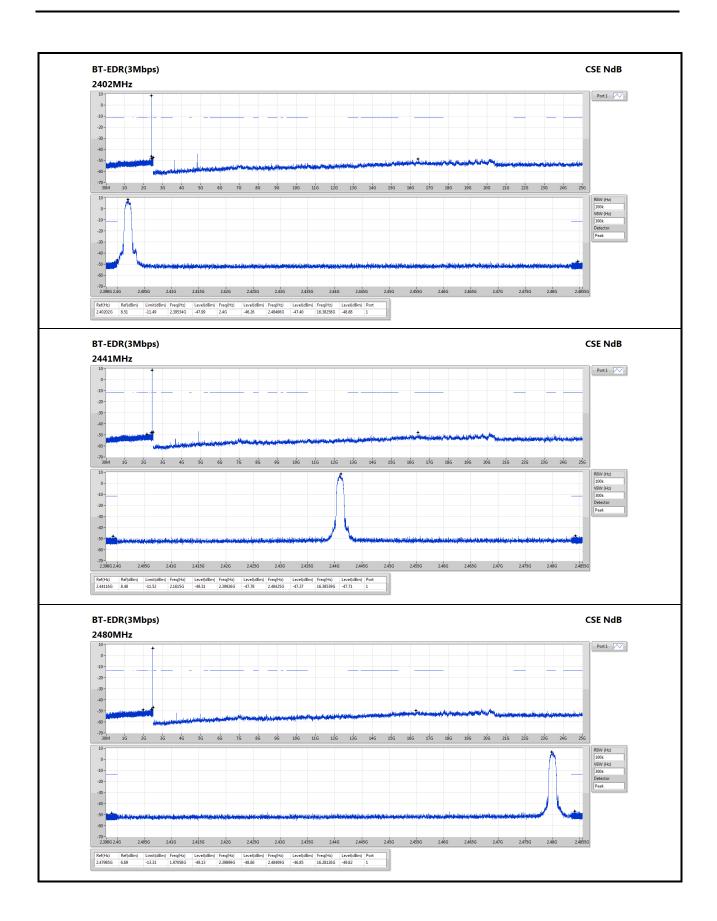

Report No.: FR9O2201AD Page: 36 of 60



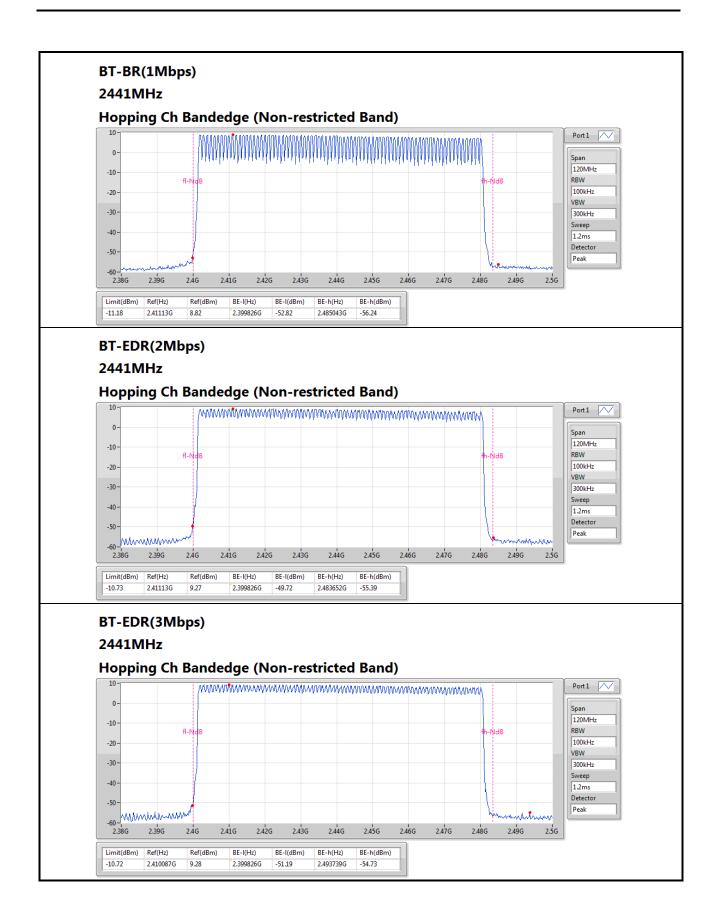

Report No.: FR9O2201AD Page: 37 of 60



3.4 Conducted Output Power

3.4.1 Limit of Conducted Output Power

1 Watt For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band.
0.125 Watt For all other frequency hopping systems in the 2400–2483.5 MHz band.
0.125 Watt For Frequency hopping systems operating in the 2400–2483.5 MHz band have hopping channel carrier frequencies that are separated by two-thirds of the 20 dB bandwidth of the hopping channel.

3.4.2 Test Procedures

- 1. A wideband power meter is used for power measurement. Bandwidth of power senor and meter is 50MHz
- 2 If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power

3.4.3 Test Setup



Report No.: FR9O2201AD Page: 38 of 60



3.4.4 Test Result of Conducted Output Power

Peak Power

Summary

Mode	Power	Power
	(dBm)	(W)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	9.76	0.00946
BT-EDR(2Mbps)	12.24	0.01675
BT-EDR(3Mbps)	12.59	0.01816

Result

Mode	Result	Gain	Power	Power Limit
		(dBi)	(dBm)	(dBm)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	-5.95	9.76	21.00
2441MHz	Pass	-5.95	9.15	21.00
2480MHz	Pass	-5.95	8.25	21.00
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	-5.95	12.24	21.00
2441MHz	Pass	-5.95	11.87	21.00
2480MHz	Pass	-5.95	10.87	21.00
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	-5.95	12.59	21.00
2441MHz	Pass	-5.95	12.13	21.00
2480MHz	Pass	-5.95	11.23	21.00

Report No.: FR9O2201AD Page: 39 of 60



Average Power

Summary

Mode	Power	Power
	(dBm)	(W)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	9.51	0.00893
BT-EDR(2Mbps)	9.45	0.00881
BT-EDR(3Mbps)	9.44	0.00879

Result

Mode	Result	Gain	Power	Power Limit
		(dBi)	(dBm)	(dBm)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	-5.95	9.51	-
2441MHz	Pass	-5.95	8.91	-
2480MHz	Pass	-5.95	8.02	-
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	-5.95	9.45	-
2441MHz	Pass	-5.95	9.05	-
2480MHz	Pass	-5.95	8.06	-
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	-5.95	9.44	-
2441MHz	Pass	-5.95	9.04	-
2480MHz	Pass	-5.95	8.09	-

Note: Average power is for reference only.

Report No.: FR9O2201AD Page: 40 of 60



3.5 Number of Hopping Frequency


3.5.1 Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

3.5.2 Test Procedures

- 1. Set RBW = 100kHz, VBW = 300kHz, Sweep time = Auto, Detector = Peak Trace max hold.
- 2 Allow trace to stabilize.

3.5.3 Test Setup



Report No.: FR9O2201AD Page: 41 of 60



3.5.4 Test Result of Number of Hopping Frequency

Summary


· · · · · · · · · · · · · · · · · · ·		
Mode	Max-Hop No	
2.4-2.4835GHz	-	
BT-BR(1Mbps)	79	
BT-EDR(2Mbps)	79	
BT-EDR(3Mbps)	79	

Result

Mode	Result	Hopping No	Limit
BT-BR(1Mbps)	-	-	-
2441MHz	Pass	79	15
BT-EDR(2Mbps)	-	-	-
2441MHz	Pass	79	15
BT-EDR(3Mbps)	-	-	-
2441MHz	Pass	79	15

Report No.: FR9O2201AD Page: 42 of 60



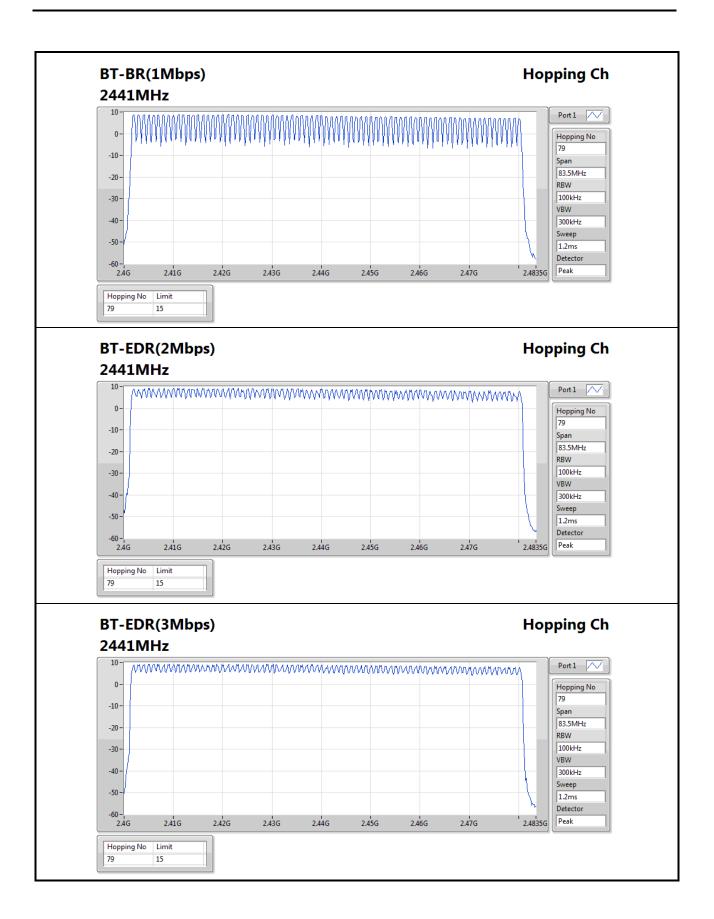

Report No.: FR9O2201AD Page: 43 of 60



3.6 20dB and Occupied Bandwidth

3.6.1 Test Procedures


20dB Bandwidth

- Set RBW=10kHz VBW= 30kHz for BT BR mode, RBW=20kHz, VBW=100kHz for other modes, Sweep time = Auto, Detector=Peak, Trace max hold
- 2 Allow trace to stabilize
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

- Set RBW=10kHz VBW= 30kHz for BT BR mode, RBW=20kHz, VBW=100kHz for other modes, Sweep time = Auto, Detector=Sample, Trace max hold
- 2 Allow trace to stabilize
- 3. Use Occupied bandwidth function of spectrum analyzer to measuring 99% occupied bandwidth

3.6.2 Test Setup



Report No.: FR9O2201AD Page: 44 of 60



3.6.3 Test result of 20dB and Occupied Bandwidth

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-BR(1Mbps)	920.29k	875.543k	876KF1D	920.29k	871.925k
BT-EDR(2Mbps)	1.333M	1.183M	1M18G1D	1.322M	1.172M
BT-EDR(3Mbps)	1.29M	1.179M	1M18G1D	1.283M	1.179M

Max-N dB = Maximum 20dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth; Min-N dB = Minimum 20dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth;


Result

Mode	Result	Limit	Port 1-N dB	Port 1-OBW
		(Hz)	(Hz)	(Hz)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	Inf	920.29k	871.925k
2441MHz	Pass	Inf	920.29k	875.543k
2480MHz	Pass	Inf	920.29k	871.925k
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	Inf	1.333M	1.172M
2441MHz	Pass	Inf	1.322M	1.183M
2480MHz	Pass	Inf	1.322M	1.179M
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	Inf	1.29M	1.179M
2441MHz	Pass	Inf	1.283M	1.179M
2480MHz	Pass	Inf	1.286M	1.179M

Port X-N dB = Port X 20dB down bandwidth; Port X-OBW = Port X 99% occupied bandwidth;


Report No.: FR9O2201AD Page: 45 of 60



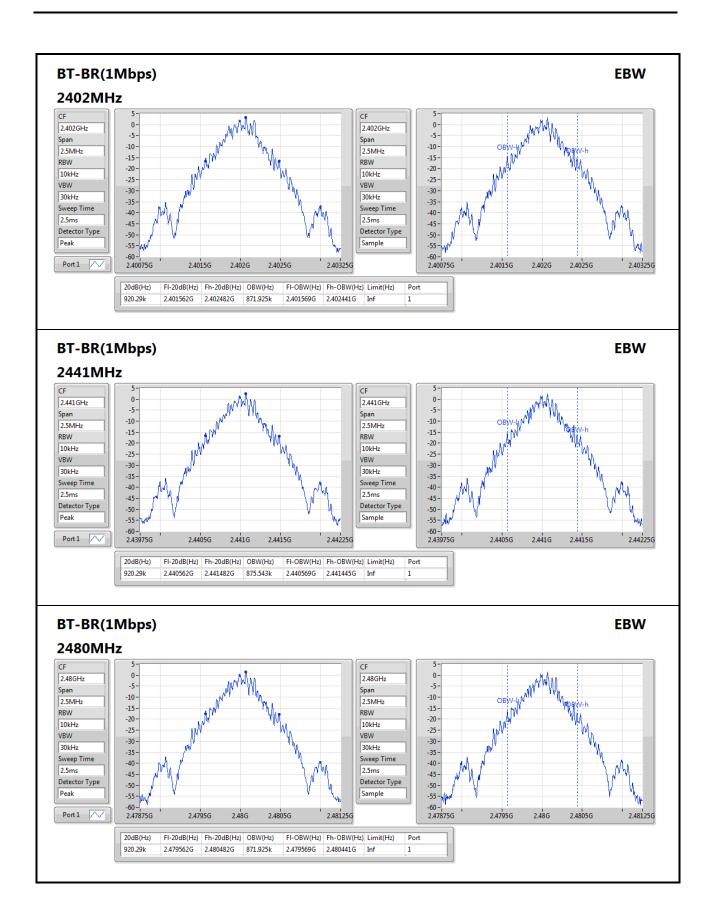


Report No.: FR9O2201AD Page: 46 of 60



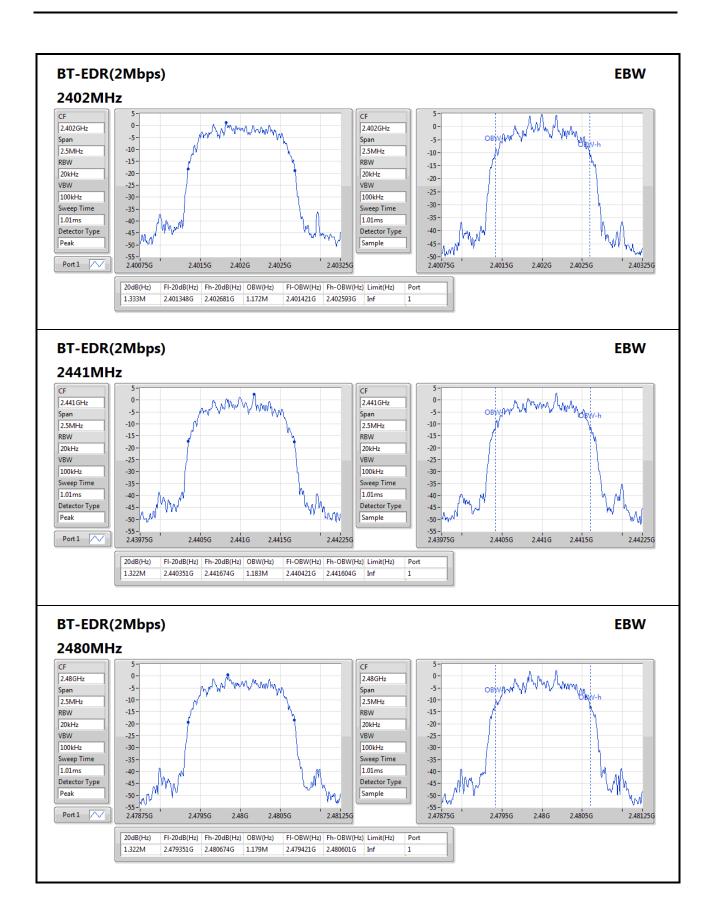

Report No.: FR9O2201AD Page: 47 of 60



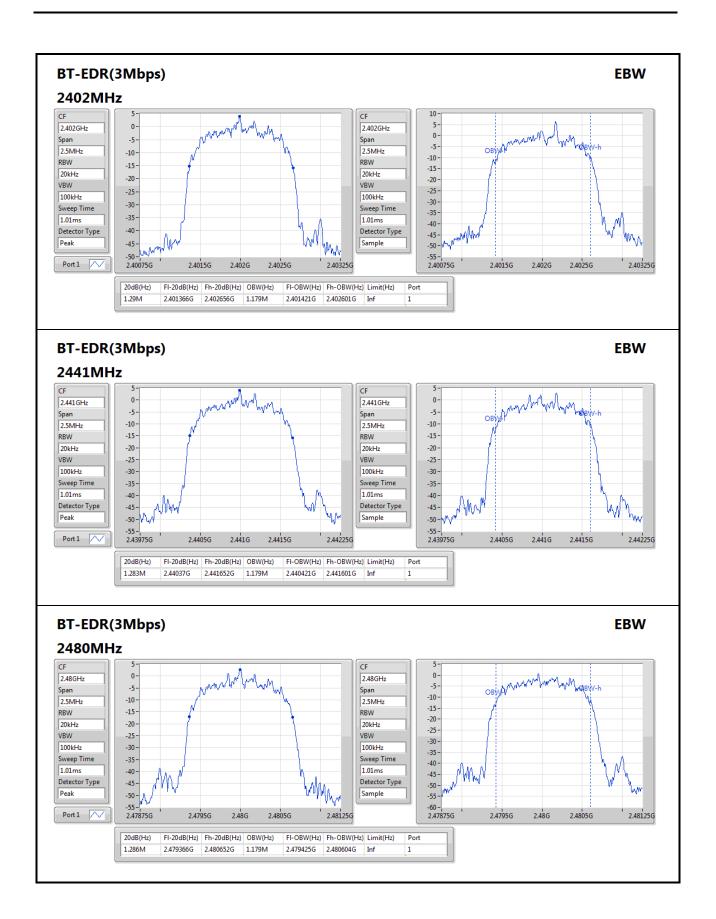

Report No.: FR9O2201AD Page: 48 of 60



3.7 Channel Separation


3.7.1 Limit of Channel Separation

- Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

3.7.2 Test Procedures

- 1. Set RBW=30kHz, VBW=100kHz, Sweep time = Auto, Detector=Peak Trace max hold
- 2 Allow trace to stabilize
- 3 Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The EUT shall show compliance with the appropriate regulatory limit

3.7.3 Test Setup



Report No.: FR9O2201AD Page: 49 of 60



3.7.4 Test result of Channel Separation

Summary


Mode	Max-Space	Min-Space
	(Hz)	(Hz)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	1.004348M	1M
BT-EDR(2Mbps)	1M	1M
BT-EDR(3Mbps)	1.004348M	1M

Result

Mode	Result	FI	Fh	Ch.Space	Limit
		(Hz)	(Hz)	(Hz)	(Hz)
BT-BR(1Mbps)	-	-	-	-	-
2402MHz	Pass	2.402G	2.403G	1M	612.91314k
2441MHz	Pass	2.441G	2.442004G	1.004348M	612.91314k
2480MHz	Pass	2.479G	2.480004G	1.004348M	612.91314k
BT-EDR(2Mbps)	-	-	-	-	-
2402MHz	Pass	2.402G	2.403G	1M	887.778k
2441MHz	Pass	2.441G	2.442G	1M	880.452k
2480MHz	Pass	2.479G	2.48G	1M	880.452k
BT-EDR(3Mbps)	-	-	-	-	-
2402MHz	Pass	2.402G	2.403G	1M	859.14k
2441MHz	Pass	2.441004G	2.442004G	1M	854.478k
2480MHz	Pass	2.479G	2.480004G	1.004348M	856.476k


Report No.: FR9O2201AD Page : 50 of 60



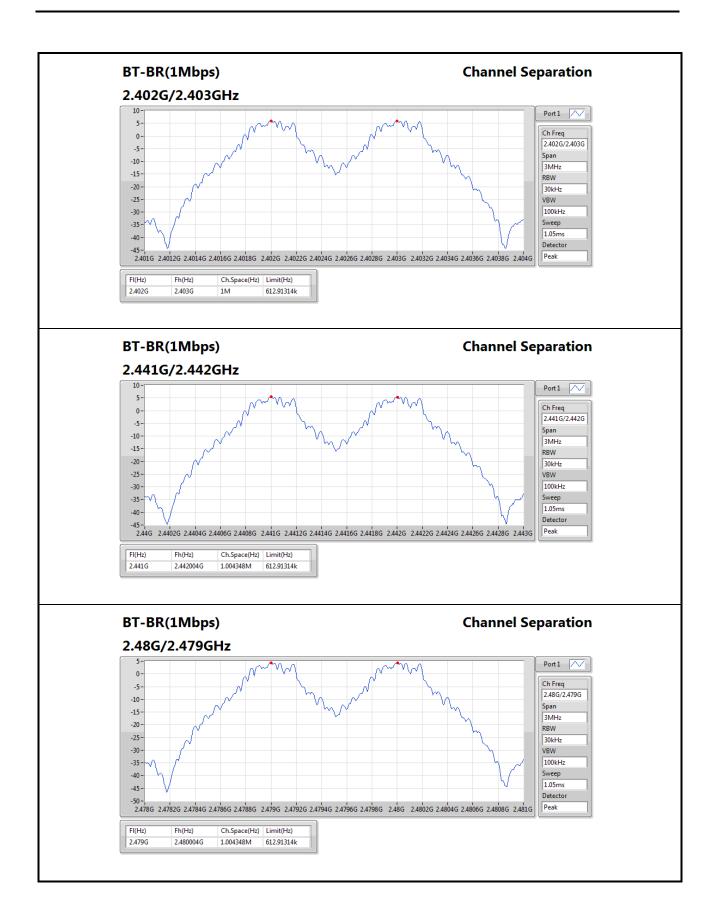


Report No.: FR9O2201AD Page: 51 of 60



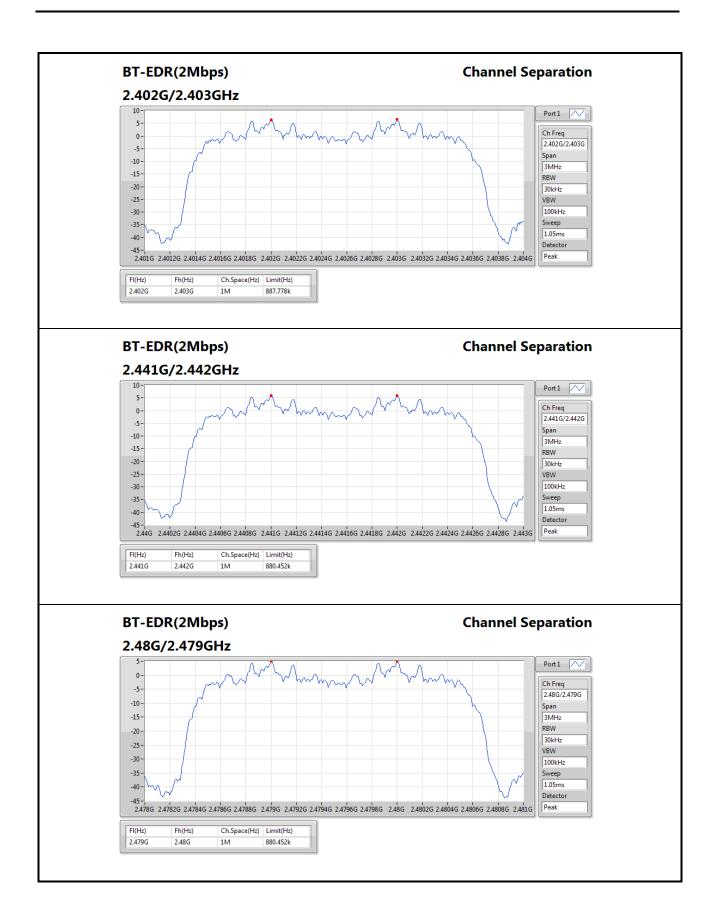

Report No.: FR9O2201AD Page: 52 of 60



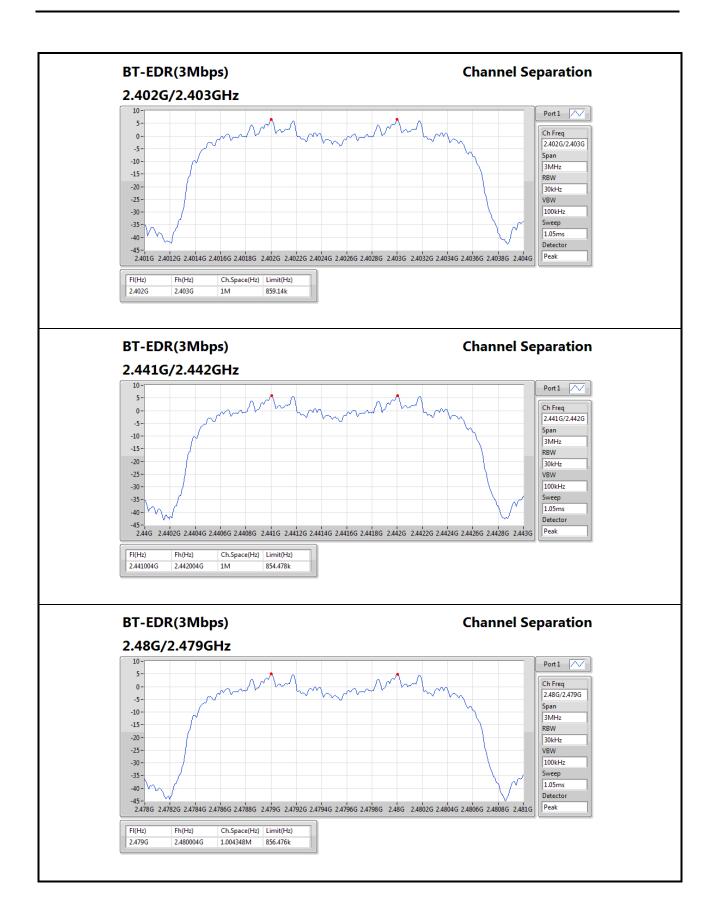

Report No.: FR9O2201AD Page: 53 of 60



3.8 Number of Dwell Time

3.8.1 Limit of Dwell time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.8.2 Test Procedures

- 1. Set RBW=300kHz,VBW=1MHz,Sweep time = 10 ms, Detector=Peak, Span=0Hz,Trace max hold
- 2 Enable gating and trigger function of spectrum analyzer to measure burst on time.
- The DH1 packet can cover a single time slot. A maximum length packet has duration of 1 time slots. Non AFH mode

The hopping rate is 1600 hops/second so the maximum dwell time is 1/1600 seconds. DH1 Packet permit maximum 1600 / 79 / 2 = 10.12 hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds. AFH mode

The hopping rate is 800 hops/second so the maximum dwell time is 1/800 seconds. DH1 Packet permit maximum 800/20/2 = 20 hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $20 \times 8 = 160$ within 8 seconds.

4. The DH3 packet can cover up to 3 time slots. A maximum length packet has duration of 3 time slots. Non AFH mode

The hopping rate is 1600 hops/second so the maximum dwell time is 3/1600 seconds. DH3 Packet permit maximum 1600 / 79 / 4 = 5.06 hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160 \text{ within } 31.6 \text{ seconds}$. AFH mode

The hopping rate is 800hops/second so the maximum dwell time is 3/800 seconds. DH3 Packet permit maximum 800 / 20 / 4 = 10 hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $10 \times 8 = 80$ within 8 seconds.

The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots.


Non AFH mode

The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms. DH5 Packet permit maximum 1600/79/6 = 3.37 hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds

AFH mode

The hopping rate is 800 hops/second so the maximum dwell time is 5/800 seconds. DH5 Packet permit maximum 800/20 / 6 = 6.667 hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $6.667 \times 8 = 53.33$ within 8 seconds

3.8.3 Test Setup



Report No.: FR9O2201AD Page: 54 of 60



3.8.4 Test Result of Dwell Time

Summary

Mode	Max-Dwell	
	(s)	
2.4-2.4835GHz	-	
BT-BR(1Mbps)	308.985507m_DH5	
BT-EDR(2Mbps)	308.985507m_DH5	
BT-EDR(3Mbps)	308.985507m_DH5	

Result/ Non AFH mode

Mode	Result	Period	Dwell	Limit	Tx On
		(s)	(s)	(s)	(s)
BT-BR(1Mbps)	-	-	-	-	-
2441MHz	Pass	31.6	308.985507m_DH5	400m	2.898551m
2441MHz	Pass	31.6	264.347826m_DH3	400m	1.652174m
2441MHz	Pass	31.6	125.217391m_DH1	400m	391.304348u
BT-EDR(2Mbps)	-	-	-	-	-
2441MHz	Pass	31.6	308.985507m_DH5	400m	2.898551m
2441MHz	Pass	31.6	264.347826m_DH3	400m	1.652174m
2441MHz	Pass	31.6	129.855072m_DH1	400m	405.797101u
BT-EDR(3Mbps)	-	-	-	-	-
2441MHz	Pass	31.6	308.985507m_DH5	400m	2.898551m
2441MHz	Pass	31.6	262.028986m_DH3	400m	1.637681m
2441MHz	Pass	31.6	125.217391m_DH1	400m	391.304348u

Report No.: FR9O2201AD Page: 55 of 60




Result/ AFH mode

Mode	Result	Period	Dwell	Limit	Tx On
		(s)	(s)	(s)	(s)
BT-BR(1Mbps)	-	-	-	-	-
2441MHz	Pass	8	154.5797m_DH5	400m	2.898551m
2441MHz	Pass	8	132.1739m_DH3	400m	1.652174m
2441MHz	Pass	8	62.6087m_DH1	400m	391.304348u
BT-EDR(2Mbps)	-	-	-	-	-
2441MHz	Pass	8	154.5797m_DH5	400m	2.898551m
2441MHz	Pass	8	132.1739m_DH3	400m	1.652174m
2441MHz	Pass	8	64.92754m_DH1	400m	405.797101u
BT-EDR(3Mbps)	-	-	-	-	-
2441MHz	Pass	8	154.5797m_DH5	400m	2.898551m
2441MHz	Pass	8	131.0145m_DH3	400m	1.637681m
2441MHz	Pass	8	62.6087m_DH1	400m	391.304348u


Report No.: FR9O2201AD Page : 56 of 60



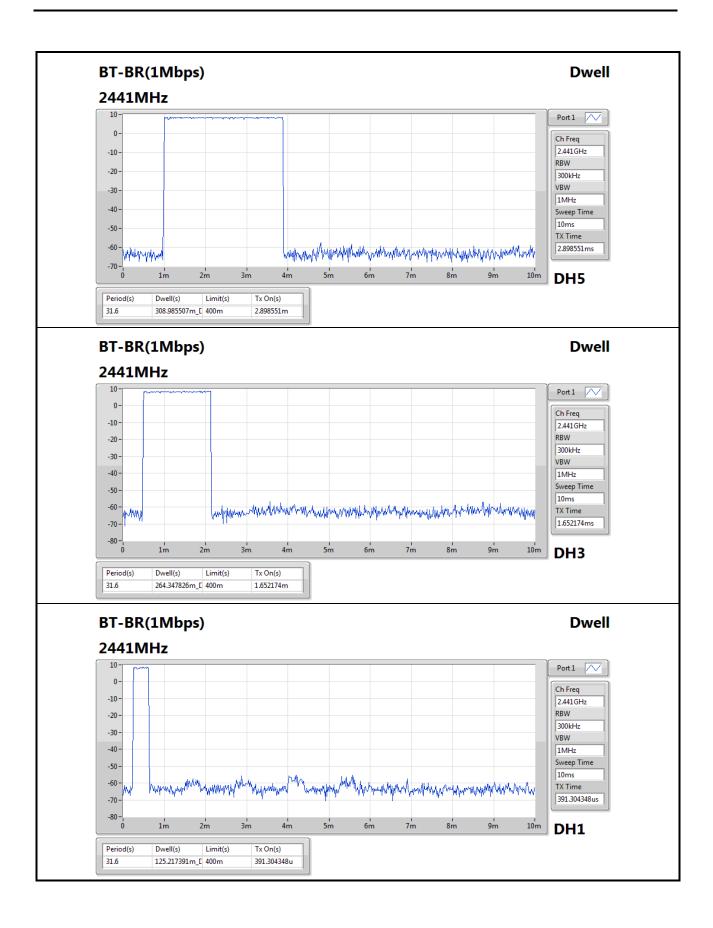


Report No.: FR9O2201AD Page: 57 of 60



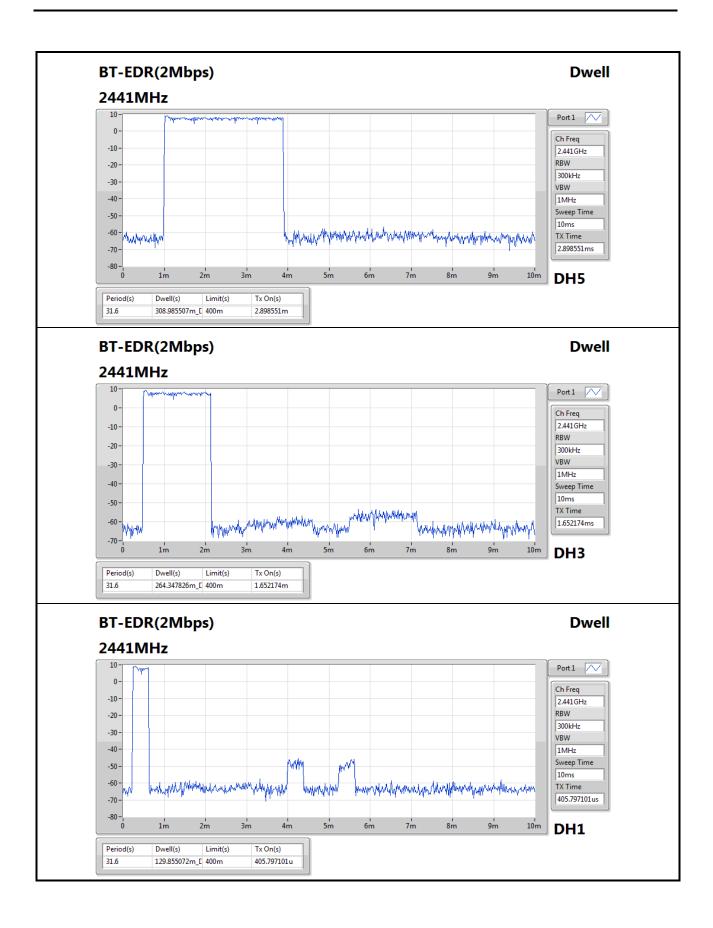

Report No.: FR9O2201AD Page: 58 of 60



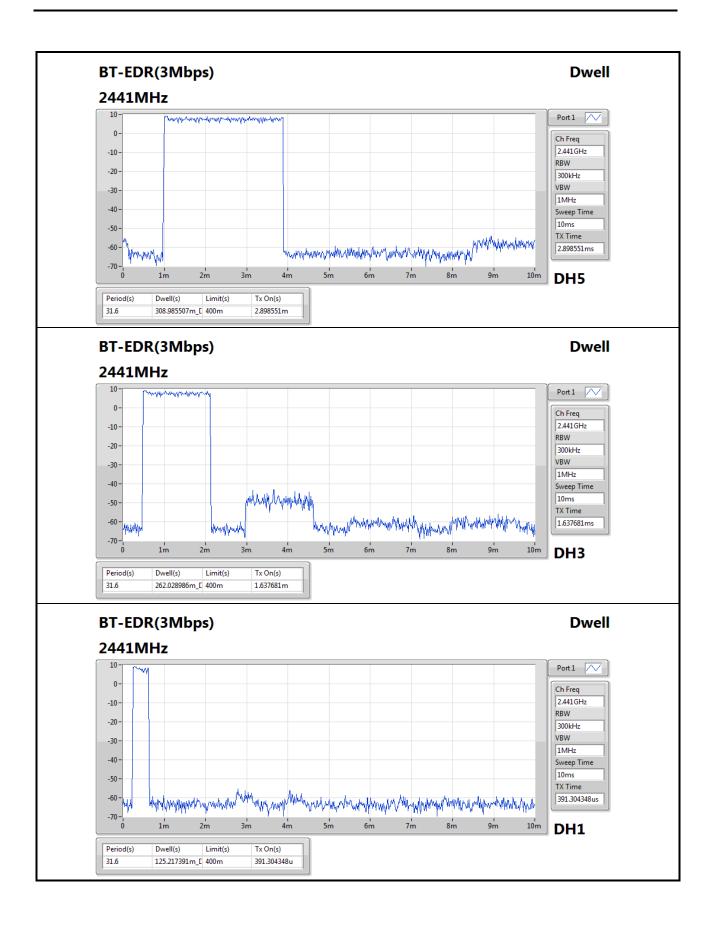

Report No.: FR9O2201AD Page: 59 of 60



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website http://www.icertifi.com.tw.

Linkou

Tel: 886-2-2601-1640 No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City,

Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END===

Report No.: FR9O2201AD Page: 60 of 60