

70mm



EverFlourish FCC ID: VBA-EFEV100D1
IC: 7098A-EFEV100D1
HVIN: EFEV100D40W



EV100D-40W

**ELECTRIC VEHICLE
SUPPLY EQUIPMENT**

RATED INPUT/OUTPUT VOLTAGE: 240 Vac

MAXIMUM OUTPUT POWER: 9.6kW

MAXIMUM INPUT/OUTPUT CURRENT: 40A

OPERATING TEMPERATURE RANGE: -30 °C ~+50 °C

ENCLOSURE TYPE RATING: TYPE4(CONTROL ENCLOSURE)

NOMINAL FREQUENCY: 60 Hz

**MANUFACTURER: NINGBO EVERFLOURISH SMART TECHNOLOGY
CORP., LTD**

**77 WUXIANG EAST ROAD, YINZHOU WUXIANG TOWN, NINGBO,
ZHEJIANG 315111, CHINA**

50mm

70mm



EverFlourish

FCC ID: VBA-EFEV100D1

IC:7098A-EFEV100D1

HVIN:EFEV100D48W



EV100D-48W

**ELECTRIC VEHICLE
SUPPLY EQUIPMENT**

RATED INPUT/OUTPUT VOLTAGE: 240 Vac

MAXIMUM OUTPUT POWER: 11.5kW

MAXIMUM INPUT/OUTPUT CURRENT: 48A

OPERATING TEMPERATURE RANGE: -30 °C ~+50 °C

ENCLOSURE TYPE RATING: TYPE4(CONTROL ENCLOSURE)

NOMINAL FREQUENCY: 60 Hz

**MANUFACTURER: NINGBO EVERFLOURISH SMART TECHNOLOGY
CORP.,LTD**

**77 WUXIANG EAST ROAD, YINZHOU WUXIANG TOWN, NINGBO,
ZHEJIANG 315111, CHINA**

50mm

40A


材质:毛PC+3M胶

红色: C:0 M:86 Y:99 K:0

黄色: DEWALT Yellow

C:0 M:28 Y:98 K:0

70X50MM

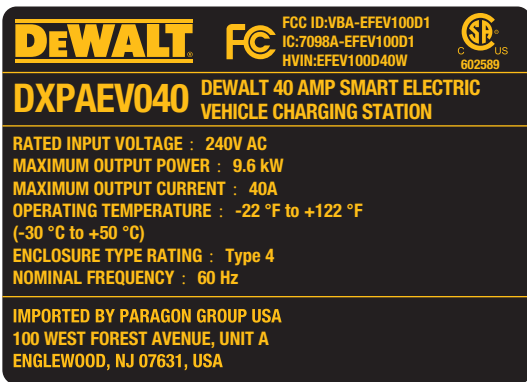

C10715-R5-1

48A

材质:毛PC+3M胶

红色: C:0 M:86 Y:99 K:0

黄色: DEWALT Yellow

C:0 M:28 Y:98 K:0

70X50MM

DEWALT



FCC ID:VBA-EFEV100D1
IC:7098A-EFEV100D1
HVIN:EFEV100D48W



DXPAEV048

**DEWALT 48 AMP SMART ELECTRIC
VEHICLE CHARGING STATION**

RATED INPUT VOLTAGE : 240V AC

MAXIMUM OUTPUT POWER : 11.5 kW

MAXIMUM OUTPUT CURRENT : 48A

OPERATING TEMPERATURE : -22 °F to +122 °F


(-30 °C to +50 °C)

ENCLOSURE TYPE RATING : Type 4

NOMINAL FREQUENCY : 60 Hz

**IMPORTED BY PARAGON GROUP USA
100 WEST FOREST AVENUE, UNIT A
ENGLEWOOD, NJ 07631, USA**

C10716-R6-1

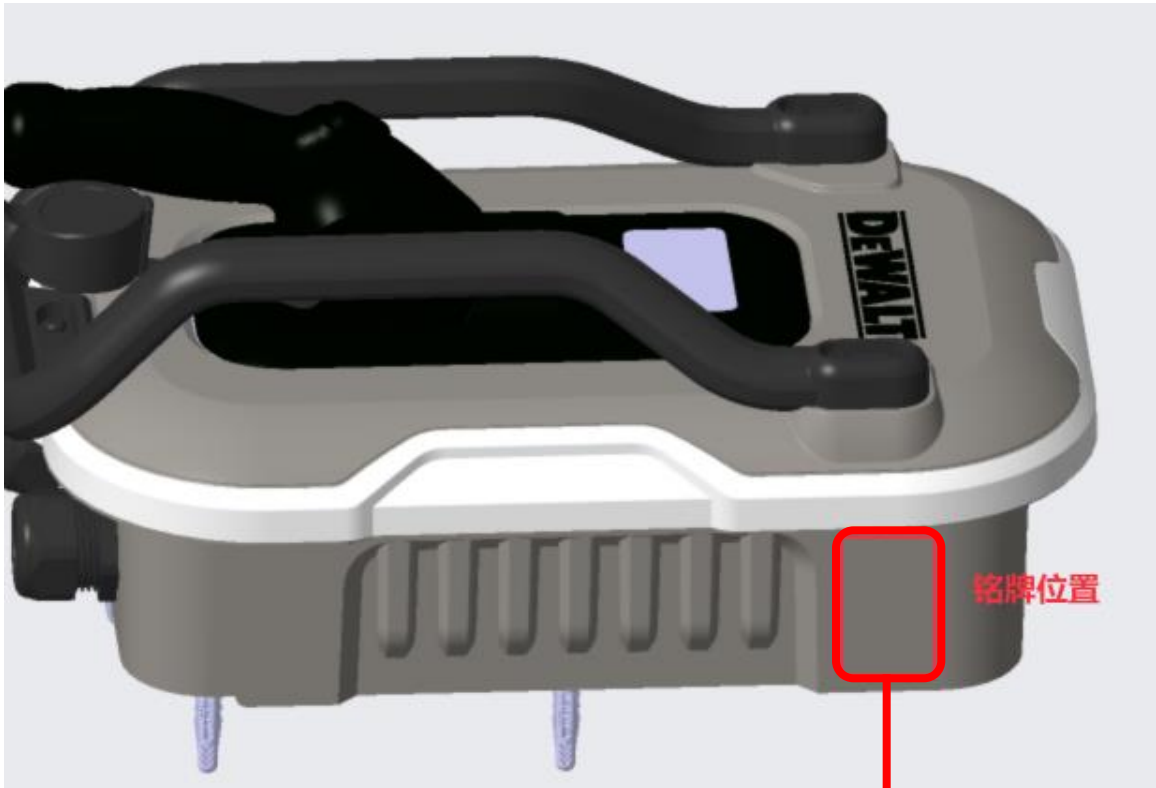

Label Location