
F1 Thermal Image Scope Onboard Antenna Specification V1.0

Author	黄可成
Reviewer	/
Approver	/

Manufacturer: Jiangmen Suntak Circuit Technology Co., Ltd.
Address: No. 363, Lianhai Road, High-tech Zone, Jiangmen City

Table of Content

1. Antenna Characteristic Specification 2

 1.1 Antenna Structure 2

 1.2 Antenna Technical Parameters and Interface 2

2. Antenna Test Conditions 3

 2.1 Test Equipment 3

 2.2 Test Result 3

 Return Loss (S11)..... 3

 Antenna Efficiency..... 4

 Antenna 2D Radiation Pattern 4

Revision History 5

1. Antenna Characteristic Specification

This specification describes the physical characteristics and electrical performance of the following 2.4 GHz Wi-Fi antennas.

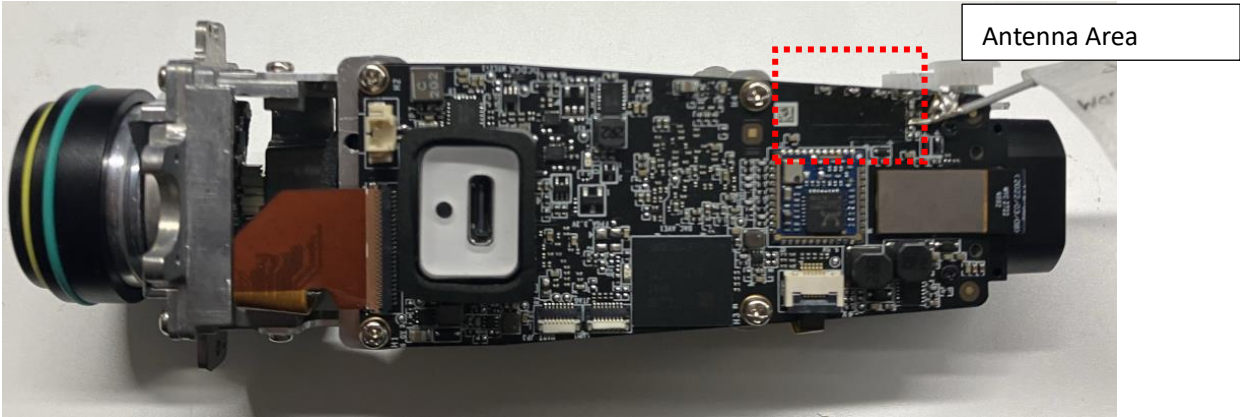


Figure 1.Antenna Actual Effect Picture

1.1 Antenna Structure

The antenna is mainly composed of on-board wiring on the PCB.

1.2 Antenna Technical Parameters and Interface

Design Specifications	Typical	Units
Form	On-board PCB	\
Frequency	2400-2500	MHz
Gain	High channel: 1.83	dB
	Medium channel: 1.48	dB
	Low channel: 1.1	dB
Antenna Efficiency	38	%
VSWR	< 3	\
Polarization	Linear Polarization	\
Axial Ratio	\	\
Radiation pattern	Omnibearing	\
impedance	50	ohm
Power handling	33	dBm
Interface	\	\
Overall dimensions	15mm*5mm	\
Weight	\	\
Operation Temp.	-30-70	°C

Storing Temp.	-30-70	℃
---------------	--------	---

2. Antenna Test Conditions

2.1 Test Equipment

Antenna Vector Network Analyzer ROHDE&SCHWARZ ZNB 20

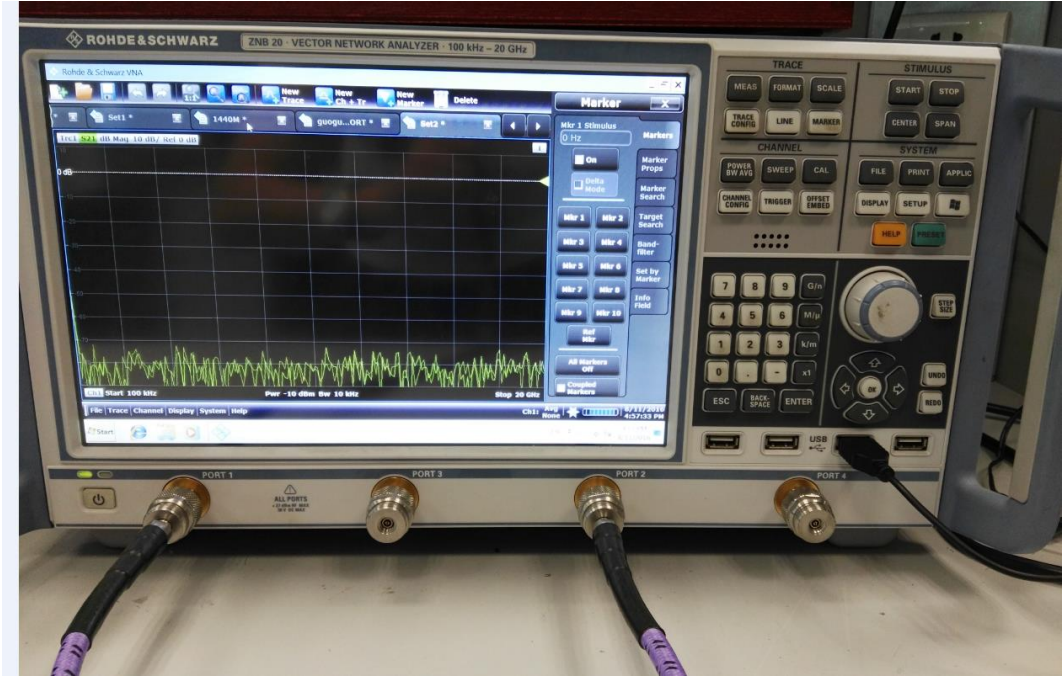


Figure 2.Vector Network Analyzer

2.2 Test Result

Return Loss (S11)

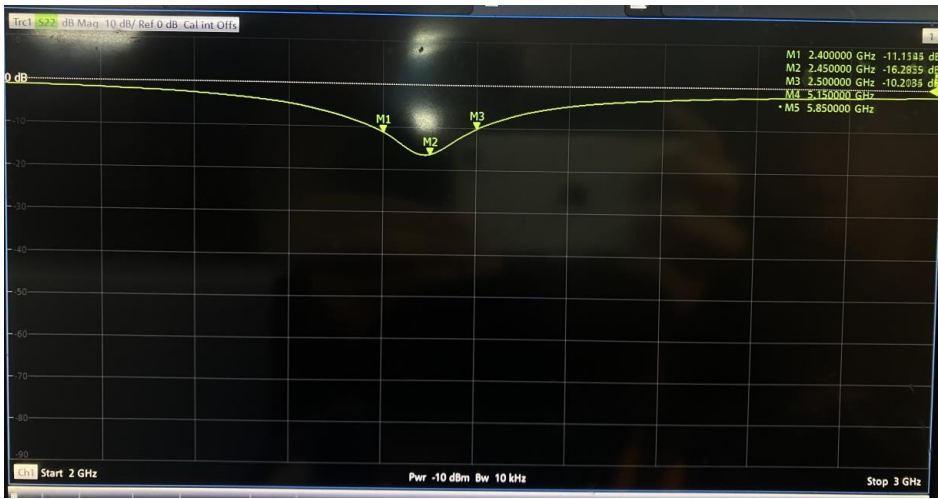



Figure 4.Return Loss


The above data show that the antenna syntony is realized well, and the resistance condition matches well.

Antenna Efficiency

Frequency /MHz	Efficiency /%
2400	34.04
2410	35.83
2420	37.83
2430	39.41
2440	40.87
2450	40.51
2460	40.63
2470	40.00
2480	39.04
2490	37.62
2500	37.08

Antenna 2D Radiation Pattern

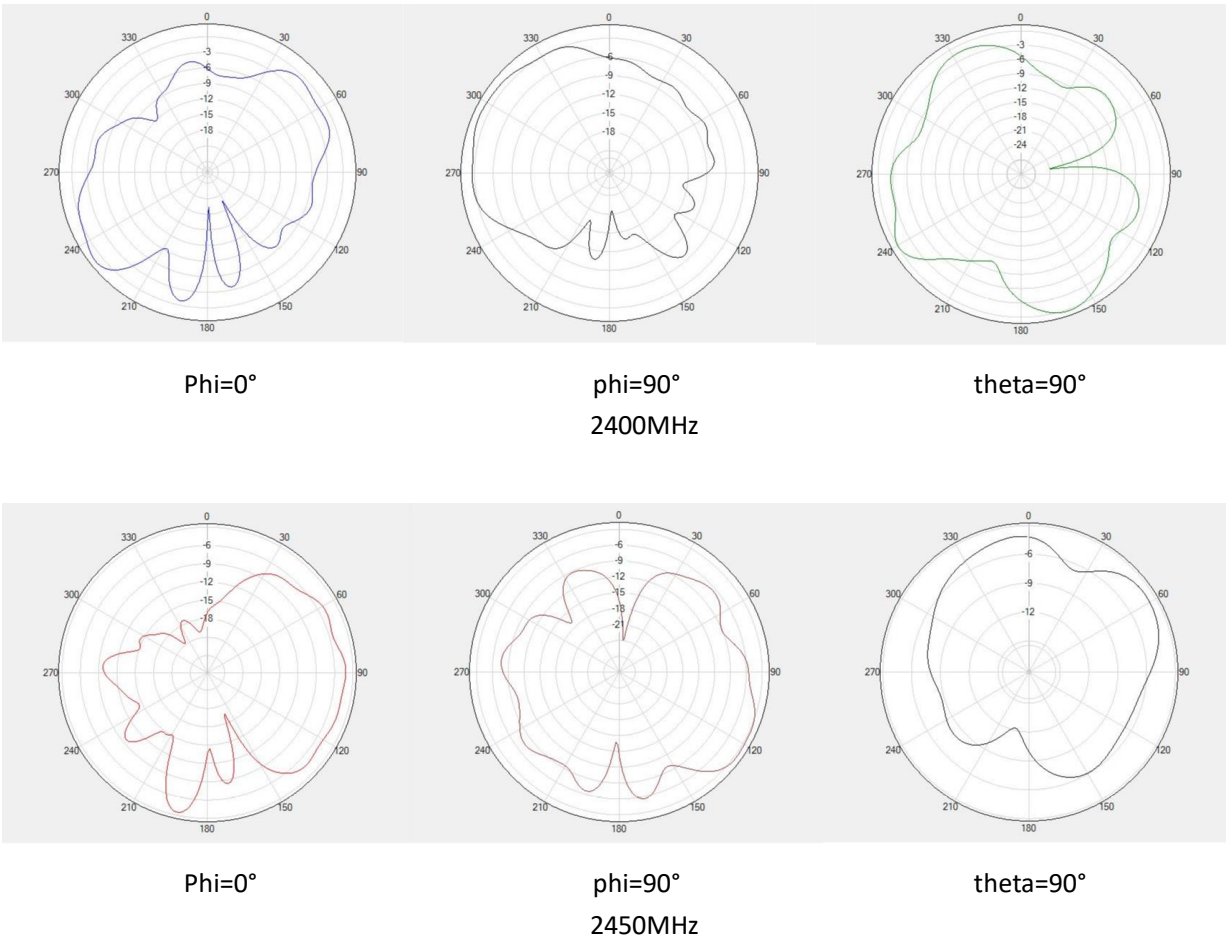

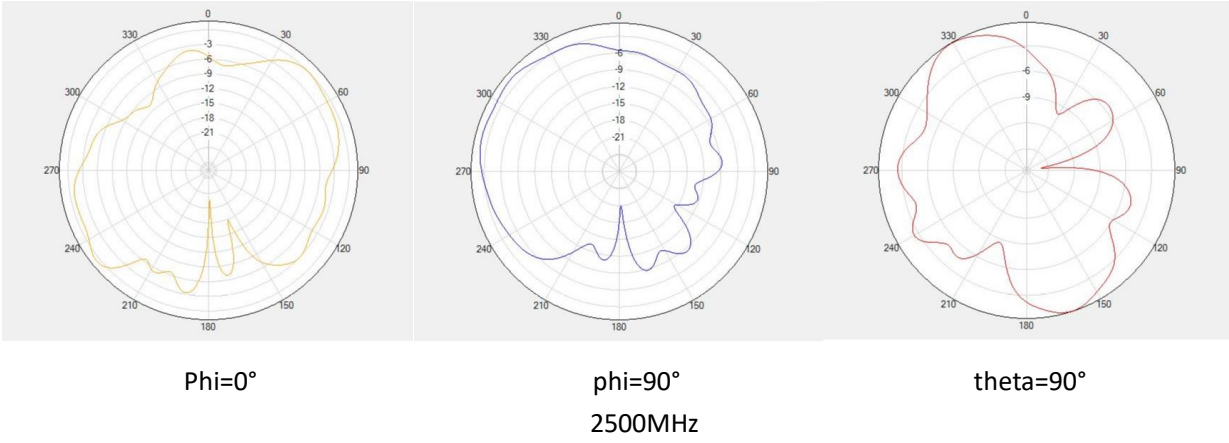

Revision History

Revision	Content	Date	Author
V1.0	First Edition	Dec. 22, 2022	黄可成