 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			1(1)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

## SAR Compliance Test Report

<b>Testing Lab:</b>	Research In Motion Limited 305 Phillip Street Waterloo, Ontario Canada N2L 3W8 Phone: 519-888-7465 Fax: 519-880-8173 Web site: www.rim.net	<b>Applicant:</b>	Research In Motion Limited 295 Phillip Street Waterloo, Ontario Canada N2L 3W8 Phone: 519-888-7465 Fax: 519-888-6906 Web site: www.rim.net
---------------------	--	-------------------	--

**Statement of Compliance:** Research In Motion Limited, declares under its sole responsibility that the product to which this declaration relates, is in conformity with the appropriate RF exposure standards, recommendations and guidelines. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(none)

**Device Category:** This wireless handheld is a portable device, designed to be used in direct contact with the user's head, hand and to be carried in an approved holster when carried on the user's body.

**RF exposure environment:** This wireless portable device has been shown to be in compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in OET Bulletin 65 Supplement C (Edition 01-01), FCC 96-326 and IEEE Std. C95.1-1999 and had been tested in accordance with the measurement procedures specified in OET Bulletin 65 Supplement C (Edition 01-01) and ANSI/IEEE Std. C95.3-1991.

**Approved by:**

**Signatures**

**Date**

Paul G. Cardinal, Ph.D.  
Manager, Compliance & Certification




July 23, 2003

**Tested and documented by:**  
Daoud Attayi  
Compliance Specialist



July 07, 2003




 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			2(2)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	


## CONTENTS

GENERAL INFORMATION	1
1.0 OPERATING CONFIGURATIONS AND TEST CONDITIONS	4
1.1 PICTURE OF HANDHELD	4
1.2 ANTENNA DESCRIPTION	4
1.3 HANDHELD DESCRIPTION	4
1.4 BODY WORN ACCESSORIES	5
1.5 HEADSETS	6
1.6 PROCEDURE USED TO ESTABLISHING THE TEST SIGNAL	6
2.0 DESCRIPTION OF THE TEST EQUIPMENT	6
2.1 SAR MEASUREMENT SYSTEM	6
2.2 DESCRIPTION OF THE TEST SETUP	8
2.2.1 HANDHELD AND BASE STATION SIMULATOR	8
2.2.2 DASY SETUP	8
3.0 ELECTRIC FIELD PROBE CALIBRATION	8
3.1 PROBE SPECIFICATION	8
3.2 PROBE CALIBRATION AND MEASUREMENT ERROR	9
4.0 SAR MEASUREMENT SYSTEM VERIFICATION	9
4.1 SYSTEM ACCURACY VERIFICATION for Head Adjacent Use	9
5.0 PHANTOM DESCRIPTION	10
6.0 TISSUE DIELECTRIC PROPERTY	11
6.1 COMPOSITION OF TISSUE SIMULANT	11
6.1.1 EQUIPMENT	11
6.1.2 PREPARATION PROCEDURE	11
6.2 ELECTRICAL PARAMETERS OF THE TISSUE SIMULATING LIQUID	12
6.2.1 EQUIPMENT	12
6.2.2 TEST CONFIGURATION	13
6.2.3 TEST PROCEDURE	13
7.0 SAR SAFETY LIMITS	15
8.0 DEVICE POSITIONING	16
8.1 DEVICE HOLDER	16
8.2 DESCRIPTION OF TEST POSITION	17
8.2.1 TEST POSITION OF DEVICE RELATIVE TO HEAD	17
8.2.1.1 DEFINITION OF THE "CHEEK" POSITION	18
8.2.1.2 DEFINITION OF THE "TILTED" POSITION	19
8.2.2 BODY -WORN TEST CONFIGURATION	19



 RESEARCH IN MOTION	Document SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE		Page 3(3)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>




 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			4(4)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

9.0 HIGH LEVEL EVALUATION	20
9.1 MAXIMUM SEARCH	20
9.2 EXTRAPOLATION	
9.3 BOUNDARY CORRECTION	20
9.4 PEAK SEARCH FOR 1G AND 10G AVERAGED SAR	20
10.0 MEASUREMENT UNCERTAINTIES	21
11.0 SAR TEST RESULTS	22
11.1 HEAD CONFIGURATION	22
11.2 BODY -WORN CONFIGURATION USING HOLSTERS	22
11.3 BODY -WORN CONFIGURATION USING FOLDING LEATHER CASE	23
12.0 REFERENCES	24

APPENDIX A: SAR DISTRIBUTION COMPARISON FOR THE ACCURACY VERIFICATION  
APPENDIX B: SAR DISTRIBUTION PLOTS FOR HEAD CONFIGURATION  
APPENDIX C: SAR DISTRIBUTION PLOTS FOR BODY-WORN CONFIGURATION  
APPENDIX D: PROBE & DIPOLE CALIBRATION DATA  
APPENDIX E: SAR TEST SETUP PHOTOGRAPHS



 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			5(5)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

## 1.0 OPERATING CONFIGURATIONS AND TEST CONDITIONS

### 1.1 Picture of Handheld

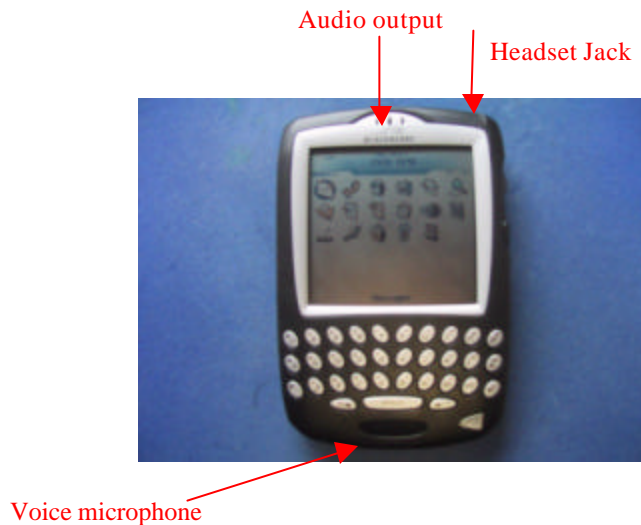


Figure 1. BlackBerry Wireless Handheld

### 1.2 Antenna description

Type	Internal fixed antenna
Location	Left Side
Configuration	Internal fixed antenna


Table 1. Antenna description

### 1.3 Handheld description

Handheld Model	R6030GE		
FCC ID	L6AR6030GE		
Serial Number	203TB-362A6		
Prototype or Production Unit	Pre-production		
Mode(s) of Operation	GSM 900	DCS 1800	PCS 1900
Maximum conducted RF Output Power	33.00 dBm	30.00 dBm	30.00 dBm
Tolerance in Power Setting	32.7 ± 0.3 dB	29.7 ± 0.3 dB	29.7 ± 0.3 dB
Duty Cycle	1:8	1:8	1:8
Transmitting Frequency Range (s)	880.20-914.80 MHz	1710.20-1784.80 MHz	1850.20-1909.80 MHz


Table 2. Test device description



	Document SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			Page 6(6)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

**Note:** GSM 900 and DCS 1800 bands cannot be used in North America, therefore there is no SAR results presented in this report for FCC submission. A separate report is generated for the above two bands.



	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			7(7)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

#### 1.4 Body worn accessories

##### Holsters and Leather Case

The holsters, with integral belt-clip, is designed to allow the BlackBerry handheld to slide in only one way, and that is with the keyboard side facing the user (facing the belt-clip) while in the holster. This positioning has the benefit of protecting the keypad and the large LCD from damage.


The middle portion of Figure 2 shows the holster with the handheld keyboard side facing the user and with the keyboard side facing away from user. Photo to the right shows that the device with keyboard away from the user does not fit into the holster.



**Figure 2. Top photo shows Body-Worn Plastic Holster ASY-03991-001, Leather Swivel Hoslter HDW-04890-001 and Folding Leather case HDW-04889-001**

The device-to-phantom spacing when the handheld is in holster is 15 mm as shown in the bottom portion of Figure 2.



 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			8(8)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

## 1.5 Headsets

The RIM Blackberry Wireless handheld was tested with and without headset model number HDW-03458-001. The SAR values are shown in Table 15.

## 1.6 Procedure used to establish the test signal

The Handheld was put into test mode for the SAR measurements by enabling a call via a Rohde & Schwartz CMU 200 Base Station Simulator test instrument. A SIM card was placed in the Handheld to enable the interaction between the BSS communications test instrument and the Handheld. The CMU 200 communications test instrument then sent out a command for the Handheld to transmit at full power at the specified frequency.

## 2.0 DESCRIPTION OF THE TEST EQUIPMENT


### 2.1 SAR measurement system

SAR measurements were performed using a Dosimetric Assessment System (DASY3), an automated SAR measurement system manufactured by Schmid & Partner Engineering AG (SPEAG), of Zurich, Switzerland.

The DASY3 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software.
- An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A DAE module which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the Electro-optical coupler (EOC).
- A unit to operate the optical surface detector which is connected to the EOC.
- The EOC performs the conversion from an optical signal into the digital electric signal of the DAE. The EOC is connected to the PC plug-in card.
- The functions of the PC plug-in card based on a DSP is to perform the time critical tasks such as signal filtering, surveillance of the robot operation fast movement interrupts.
- A computer operating Windows NT.
- DASY3 software version 3.1C.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM Twin Phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes (see Application Note).
- System validation dipoles allowing for the validation of proper functioning of the system.



 RESEARCH IN MOTION	Document SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			Page 9(9)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

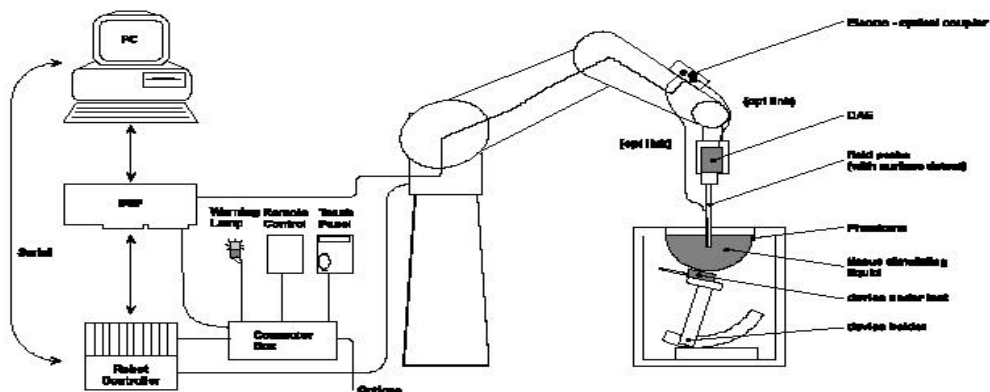



Figure 3: System Description

### 2.1.1 Equipment List

Manufacturer	Test Equipment	Model Number	Serial Number	Cal. Due Date
SCHMID & Partner Engineering AG	E-field probe	ET3DV6	1642	26/07/2003
SCHMID & Partner Engineering AG	Data Acquisition Electronics (DAE3)	DAE3 V1	472	13/09/2003
SCHMID & Partner Engineering AG	Dipole Validation Kit	D1900V2	545	12/11/2003
Agilent Technologies	Signal generator	HP 8648C	4037U03155	20/09/2003
Agilent Technologies	Power meter	E4419B	GB40202821	20/09/2003
Agilent Technologies	Power sensor	8482A	US37295126	21/09/2003
Amplifier Research	Amplifier	5S1G4M3	300986	CNR
Agilent Technologies	Network analyzer	8753ES	US39174857	21/09/2003
Rohde & Schwarz	Digital communication tester	CMU 200	100250	03/04/2004

Table 3. Equipment list



 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			10(10)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

## 2.2 Description of the test setup

Before a SAR test is conducted the Handheld and the DASY equipment are setup as follows:

### 2.2.1 Handheld and base station simulator setup

- Insert SIM card into the Handheld's SIM card slot and power it up.
- Turn on the CMU 200 test set and set the carrier frequency and power to the appropriate values.
- Connect an antenna to the RF IN/OUT of the communication test set and place it close to the Handheld.

### 2.2.2 DASY setup


- Turn the computer on and log on to Windows NT.
- Start DASY3 software by clicking on the icon located on the Windows desktop. Once the software loads, click on the Change to Robot toolbar button to open the State and Robot Monitoring Windows.
- Once the DASY State dialog opens you can ignore all errors and click OK to open the Robot Monitoring window.
- Mount the DAE unit and the probe. Turn on the DAE unit.
- Turn the Robot Controller on by turning the main power switch to the horizontal position
- Align the probe and click the align probe in the light beam button to correct the probe offset.
- Open a program and configure it to the proper parameters
- Establish a connection between the Handheld and the communications test instrument. Place the Handheld on the stand and adjust it under the phantom.
- Start SAR measurements.

## 3.0 ELECTRIC FIELD PROBE CALIBRATION

### 3.1 Probe Specification

SAR measurements were conducted using the dosimetric probe ET3DV6, designed by Schmid & Partner Engineering AG for the measurement of SAR. The probe is constructed using the thin film technique, with printed resistive lines on ceramic substrates. It has a symmetrical design with triangular core, built-in optical fiber for the surface detection system and built-in shielding against static discharge. The probe is sensitive to E-fields and thus incorporates three small dipoles arranged so that the overall response is close to isotropic. The table below summarizes the technical data for the probe.



 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			11(11)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

Property	Data
Frequency range	30 MHz – 3 GHz
Linearity	$\pm 0.1$ dB
Directivity (rotation around probe axis)	$= \pm 0.2$ dB
Directivity (rotation normal to probe axis)	$\pm 0.4$ dB
Dynamic Range	5 mW/kg – 100 W/kg
Probe positioning repeatability	$\pm 0.2$ mm
Spatial resolution	$< 0.125$ mm <sup>3</sup>

**Table 4. Probe specification**

### 3.2 Probe calibration and measurement errors

The probe was calibrated on 26/07/2002 with an accuracy better than  $\pm 10\%$ . The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe were tested. The probe calibration parameters are shown on Appendix D.

## 4.0 SAR MEASUREMENT SYSTEM VERIFICATION


Prior to conducting SAR evaluation, the measurements were validated using the dipole validation kit and a flat phantom. A power level of 1.0 W was applied to the dipole antenna. The verification results are in the table below with a comparison to reference values. Printouts are shown in Appendix A. All the measured parameters are satisfactory.

### 4.1 System accuracy verification for Head Adjacent use


f (MHz)	Limits / Measured	SAR (W/kg) 1 g/ 10 g	Dielectric Parameters		Liquid Temp (°C)
			$\epsilon_r$	$\sigma$ [S/m]	
PCS 1900	Measured	43.7 / 22.2	38.9	1.48	21.2
	Recommended Limits	43.2 / 22.0	40.0	1.45	N/A

**Table 5. System accuracy (Validation for Head Adjacent use)**



 RESEARCH IN MOTION	Document SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			Page 12(12)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	



 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			13(13)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

## 5.0 PHANTOM DESCRIPTION

The SAM Twin Phantom, manufactured by SPEAG, was used during the SAR measurements. The phantom is made of a fiberglass shell integrated with a wooden table.

The SAM Twin Phantom is a fiberglass shell phantom with 2 mm shell thickness. It has three measurement areas:

- Left hand
- Right hand
- Flat phantom

The phantom table dimensions are: 100x50x85 cm (LxWxH). The table is intended for use with free standing robots.


The bottom shelf contains three pair of bolts for locking the device holder in place. The device holder positions are adjusted to the standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different solutions).

A white cover is provided to top the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on the cover are possible; however the optical surface detector does not work properly at the cover surface. Place a sheet of white paper on the cover when using optical surface detection.



**Figure 4**  
**SAM Twin Phantom**



 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			14(14)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

## 6.0 TISSUE DIELECTRIC PROPERTY

### 6.1 Composition of tissue simulant

The composition of the brain and muscle simulating liquids for 800-900 MHz and 1800-1900 MHz are shown in the table below.

INGREDIENT	MIXTURE 800-900MHz		MIXTURE 1800-1900MHz	
	Brain %	Muscle %	Brain %	Muscle %
Water	51.07	65.45	54.88	69.91
Sugar	47.31	34.31	0	0
Salt	1.15	0.62	0.21	0.13
HEC	0.23	0	0	0
Bactericide	0.24	0.10	0	0
DGBE	0	0	44.91	29.96

**Table 6. Tissue simulant recipe**

#### 6.1.1 Equipment

Manufacturer	Test Equipment	Model Number	Serial Number	Cal. Due Date
Pyrex, England	Graduated Cylinder	N/A	N/A	N/A
Pyrex, USA	Beaker	N/A	N/A	N/A
Acculab	Weight Scale	V1-1200	018WB2003	N/A
Hart Scientific	Digital Thermometer	61161-302	21352860	10/09/2003
IKA Works Inc.	Hot Plate	RC Basic	3.107433	N/A


**Table 7. Tissue simulant preparation equipment**

#### 6.1.2 Preparation procedure

##### 800-900 MHz liquids

- Fill the container with **water**. Begin heating and stirring.
- Add the **Cellulose**, the **preservative substance** and the **salt**. After several hours, the liquid will become more transparent again. The container must be covered to prevent evaporation.
- Add **Sugar**. Stir it well until the sugar is sufficiently dissolved.
- Keep the liquid hot but below the boiling point for at least an hour. The container must be covered to prevent evaporation.
- Remove the container from, and turn the hotplate off and allow the liquid to cool off to room temperature prior to performing dielectric measurements.



 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			15(15)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

### 1800-1900 MHz liquid

- Fill the container with **water**. Begin heating and stirring.
- Add the **salt** and **Glycol**. The container must be covered to prevent evaporation.
- Keep the liquid hot but below the boiling point for at least an hour. The container must be covered to prevent evaporation.
- Remove the container from, and turn the hotplate off and allow the liquid to cool off to room temperature prior to performing dielectric measurements.

## 6.2 Electrical parameters of the tissue simulating liquid

The tissue dielectric parameters shall be measured before a batch can be used for SAR measurements to ensure that the simulated tissue was properly made and will simulate the desired human characteristic. Limits and measured electrical parameters are show in the table below.

Recommended limits are adopted from IEEE Std P1528/D1.2, April 21, 2003

“Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, SPEAG dipole calibration certificates and from FCC Tissue Dielectric Properties web page at <http://www.fcc.gov/fcc-bin/dielec.sh>

f (MHz)	Tissue Type	Limits / Measured	Dielectric Parameters		Liquid Temp (°C)
			$\epsilon_r$	$\sigma$ [S/m]	
PCS 1900	Head	Measured	38.9	1.48	21.2
		Recommended Limits	40.0	1.45	N/A
	Muscle	Measured	52.4	1.60	20.3
		Recommended Limits	53.3	1.52	N/A

**Table 8. Electrical parameters of tissue simulating liquid**


### 6.2.1 Equipment

Manufacturer	Test Equipment	Model Number	Serial Number	Cal. Due Date
Agilent Technologies	Network Analyzer	8753ES	US39174857	21/09/2003
Agilent Technologies	Dielectric probe kit	HP 85070C	US9936135	CNR
Dell	PC using GPIB card	GX110	347	N/A
Hart Scientific	Digital Thermometer	61161-302	21352860	10/09/2003

**Table 9. Equipment required for electrical parameter measurements**



### 6.2.2 Test Configuration

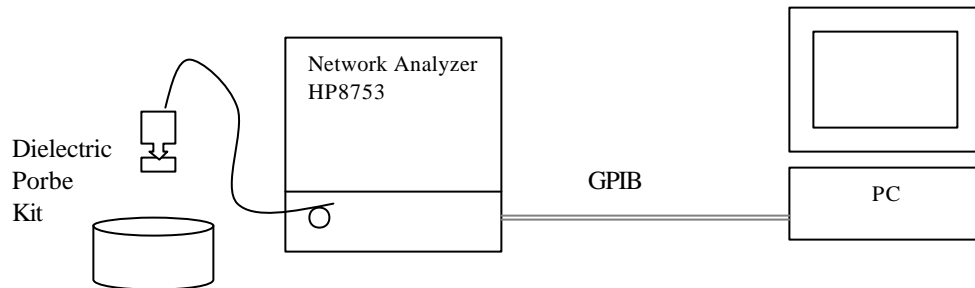

**Figure 5: Test configuration**


### 6.2.3 Procedure

1. Turn NWA on and allow at least 30 minutes for warm up.
2. Mount dielectric probe kit so that interconnecting cable to NWA will not be moved during measurements or calibration.
3. Pour de-ionized water and measure water temperature ( $\pm 1^\circ$ ).
4. Set water temperature in HP-Software (Calibration Setup).
5. Perform calibration.
6. Validate calibration with dielectric material of known properties (e.g. polished ceramic slab with  $>8\text{mm}$  thickness  $\epsilon' = 10.0$ ,  $\epsilon'' = 0.0$ ). If measured parameters do not fit within tolerance, repeat calibration ( $\pm 0.2$  for  $\epsilon'$ :  $\pm 0.1$  for  $\epsilon''$ ).
7. Relative permittivity  $\epsilon_r = \epsilon'$  and conductivity can be calculated from  $\epsilon''$   

$$\sigma = \omega \epsilon_0 \epsilon''$$
8. Measure liquid shortly after calibration.
9. Stir the liquid to be measured. Take a sample ( $\sim 50\text{ml}$ ) with a syringe from the center of the liquid container.
10. Pour the liquid into a small glass flask. Hold the syringe at the bottom of the flask to avoid air bubbles.
11. Put the dielectric probe in the glass flask. Check that there are no air bubbles in front of the opening in the dielectric probe kit.
12. Perform measurements.
13. Adjust medium parameters in DASY3 for the frequencies necessary for the measurements ('Setup Config', select medium (e.g. Brain 900 MHz) and press 'Option'-button).
14. Select the current medium for the frequency of the validation (e.g. Setup Medium Brain 900 MHz).

Sample calculation for 1900 MHz head tissue dielectric parameters using data from Table 10.



 <b>RESEARCH IN MOTION</b>	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			17(17)
Author Data	Dates of Test	Test Report No	FCC ID	
<b>Daoud Attavi</b>	<b>July 03 - 04, 2003</b>	<b>RIM-0025-0307-01</b>	<b>L6AR6030GE</b>	

Relative permittivity  $\epsilon_r = \epsilon' = 38.86$  Conductivity  $\sigma = \omega \epsilon_0 \epsilon'' = 2 \times 3.1416 \times 1900 \text{ e+6} \times 8.854\text{e-12} \times 14.03 = 1.48 \text{ S/m}$

**Title**

**SubTitle**

July 03, 2003 10:49 AM

**Title**


**SubTitle**

July 04, 2003 09:30 AM

Frequency	e'	e''	Frequency	e'	e''
1.700000000 GHz	39.6685	13.5010	1.700000000 GHz	53.1461	14.4846
1.710000000 GHz	39.6217	13.5410	1.710000000 GHz	53.0995	14.4827
1.720000000 GHz	39.5857	13.5592	1.720000000 GHz	53.0692	14.5303
1.730000000 GHz	39.5466	13.5699	1.730000000 GHz	53.0355	14.5441
1.740000000 GHz	39.5236	13.6117	1.740000000 GHz	53.0364	14.5663
1.750000000 GHz	39.5236	13.6117	1.750000000 GHz	52.9794	14.5960
1.750000000 GHz	39.4874	13.6178	1.760000000 GHz	52.9621	14.6443
1.760000000 GHz	39.4219	13.6350	1.770000000 GHz	52.9441	14.6456
1.770000000 GHz	39.3911	13.6566	1.780000000 GHz	52.9211	14.6951
1.780000000 GHz	39.3522	13.6678	1.790000000 GHz	52.9043	14.7321
1.790000000 GHz	39.3042	13.7028	1.800000000 GHz	52.8483	14.7807
1.800000000 GHz	39.2775	13.7252	1.810000000 GHz	52.7965	14.8188
1.810000000 GHz	39.2213	13.7470	1.820000000 GHz	52.7621	14.8533
1.820000000 GHz	39.1693	13.7787	1.830000000 GHz	52.7121	14.9053
1.830000000 GHz	39.1538	13.8186	1.840000000 GHz	52.6695	14.9549
1.840000000 GHz	39.0905	13.8423	1.850000000 GHz	52.6102	14.9830
1.850000000 GHz	39.0566	13.8723	1.860000000 GHz	52.5642	15.0073
1.860000000 GHz	39.0218	13.9089	1.870000000 GHz	52.5380	15.0436
1.870000000 GHz	38.9735	13.9359	1.880000000 GHz	52.4998	15.0763
1.880000000 GHz	38.9495	13.9809	1.890000000 GHz	52.4674	15.0932
1.890000000 GHz	38.9102	13.9847	1.900000000 GHz	52.4315	15.1282
1.900000000 GHz	38.8620	14.0299	1.910000000 GHz	52.3934	15.1547
1.910000000 GHz	38.8368	14.0668	1.920000000 GHz	52.3581	15.1862
			1.930000000 GHz	52.3090	15.2164
			1.940000000 GHz	52.2614	15.2383
			1.950000000 GHz	52.2333	15.2753

**Table 10. 1900 MHz head and muscle tissue dielectric parameters**



 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			18(18)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

## 7.0 SAR SAFETY LIMITS

Standards/Guideline	Localized SAR Limit (W/kg) General public (uncontrolled)	Localized SAR Limits (W/kg) Workers (controlled)
ICNIRP (1998) Standard	2.0 (10g)	10.0 (10g)
IEEE C95.1 (1999) Standard	1.6 (1g)	8.0 (1g)

**Table 11. SAR safety limits for Controlled / Uncontrolled environment**


Human Exposure	Localized SAR Limits (W/kg) 10g, ICNIRP (1998) Standard	Localized SAR Limits (W/kg) 1g, IEEE C95.1 (1999) Standard
Spatial Average (averaged over the whole body)	0.08	0.08
Spatial Peak (averaged over any X g of tissue)	2.00	1.60
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.00	4.00 (10g)

**Table 12. SAR safety limits**

**Uncontrolled Environments** are defined as locations where there is exposure of individuals who have no knowledge or control of their exposure.

**Controlled Environments** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).




 RESEARCH IN MOTION	Document SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			Page 19(19)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

## 8.0 DEVICE POSITIONING

### 8.1 Device holder for SAM Twin Phantom


The Handheld was positioned for all test configurations using the DASY3 holder. The device holder facilitates the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening. The devices can be easily, accurately and with repeatability positioned according to FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

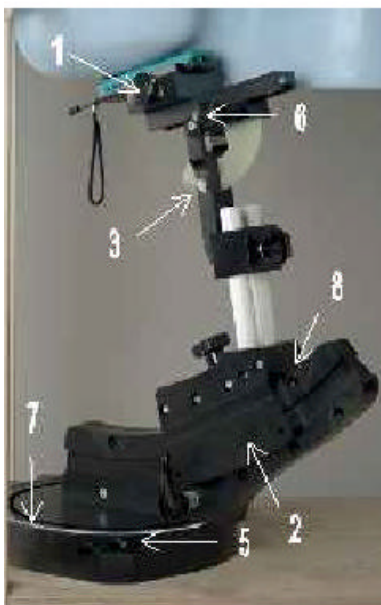

**Figure 6**  
**Device Holder**


1. Put the phone in the clamp mechanism (1) and hold it straight while tightening. (Curved phones or phones with asymmetrical ear pieces should be positioned so that the ear piece is in the symmetry plane of the clamp).
2. Adjust the sliding carriage (2) to 90°. Then adjust the phone holder angle (3) until the reference line of the phone is horizontal (parallel to the flat phantom bottom). The phone reference line is defined as the front tangential line between the ear piece and the center of the device bottom (or the center of the flip hinge). For devices with parallel front and back sides, the phone holder angle (3) is 0°.
3. Place the device holder at the desired phantom section and move it securely against the positioning pins (4). The screw in front of the turning plate can be applied for correct positioning (5). (Do not tighten it too strongly).
4. Shift the phone clamp (6) so that the ear piece is exactly below the ear marking of the phantom. The phone is now correctly positioned in the holder for all standard phantom measurements, even



 <b>RESEARCH IN MOTION</b>	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			20(20)
Author Data	Dates of Test	Test Report No	FCC ID	
<b>Daoud Attayi</b>	<b>July 03 - 04, 2003</b>	<b>RIM-0025-0307-01</b>	<b>L6AR6030GE</b>	

after changing the phantom or phantom section.



 RESEARCH IN MOTION	Document SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			Page 21(21)
Author Data Daoud Attayi	Dates of Test July 03 - 04, 2003	Test Report No RIM-0025-0307-01	FCC ID L6AR6030GE	


5. Adjust the device position angles to the desired measurement position.
6. After fixing the device angles, move the phone fixture up until the phone touches the ear marking.  
(The point of contact depends on the design of the device and the positioning angle).

## 8.2 Description of the test positioning


### 8.2.1 Test Positions of Device Relative to Head

The handset was tested in two test positions against the head phantom, the “cheek” position and the “tilted” position, on both left and right sides of the phantom.

The handset was tested in the above positions according to IEEE 1528-Draft 6.1 “Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques”.

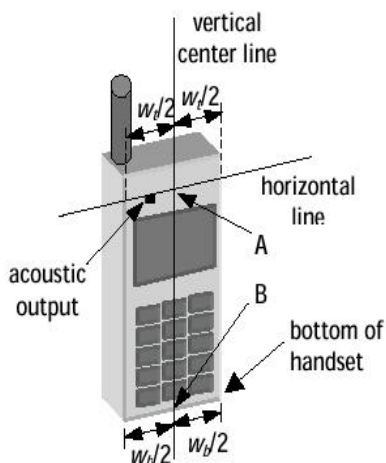


**Figure 7a – Handset vertical and horizontal reference lines – fixed case**

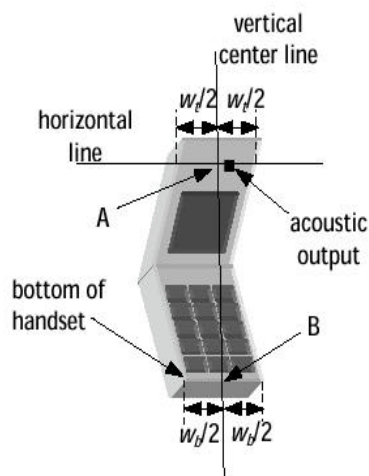


**Figure 7b – Handset vertical and horizontal reference lines – “clam-shell”**




 RESEARCH IN MOTION	Document SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			Page 22(22)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

### 8.2.1.1 Definition of the “cheek” position

- 1) Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece, open the cover.
- 2) Define two imaginary lines on the handset: the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A on Figures 7a and 7b), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 7a). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 7b), especially for clamshell handsets, handsets with flip pieces, and other irregularly shaped handsets.
- 3) Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 7), such that the plane defined by the vertical center line and the horizontal center line is in a plane approximately parallel to the sagittal plane of the phantom.
- 4) Translate the handset towards the phantom along the line passing through RE and LE until the handset touches the ear.
- 5) While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is the plane normal to MB ("mouth-back") - NF ("neck-front") including the line MB (reference plane).
- 6) Rotate the phone around the vertical centerline until the phone (horizontal line) is symmetrical with respect to the line NF.
- 7) While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, rotate the handset about the line NF until any point on the handset is in contact with a phantom point below the ear (cheek).

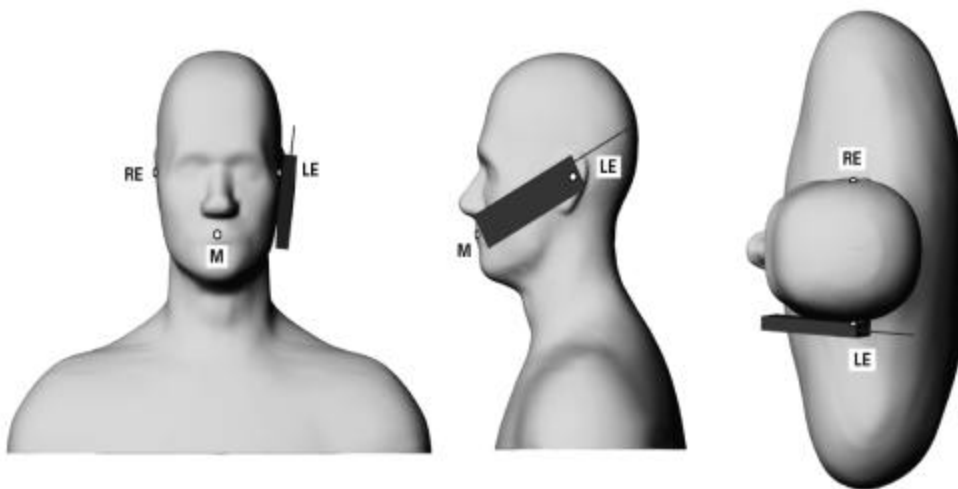




 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			23(23)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	


**Figure 8 – Phone position 1, “cheek” or “touch” position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning, are indicated. The shoulders are shown for illustration purposes only.**



 RESEARCH IN MOTION	Document SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE		Page 24(24)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>

#### 8.2.1.2 Definition of the “Tilted” Position

- 1) Repeat steps 1 to 7 of 5.4.1 (in this report 8.2.1.1) to replace the device in the “cheek position.”
- 2) While maintaining the device in the reference plane (described above) and pivoting against the ear, move the device outward away from the mouth by an angle of 15 degrees, or until the antenna touches the phantom.

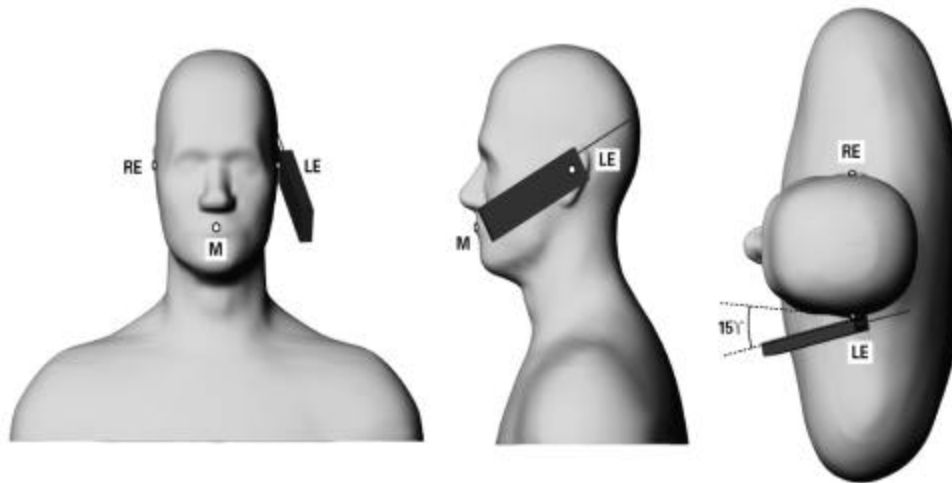


**Figure 9 – Phone position 2, “tilted position.”** The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning, are indicated. The shoulders are shown for illustration purposes only.

#### 8.2.2 Body Holster Configuration

A body worn holster, as shown on Figure 2, was tested with the Wireless Handheld for FCC RF exposure compliance. The EUT was positioned in the holster case and the belt clip was placed against the flat section of the phantom. A headset was then connected to the handheld to simulate hands-free operation in a body worn holster configuration.



 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			25(25)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

## 9.0 High Level Evaluation

### 9.1 Maximum search

The maximum search is automatically performed after each coarse scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the coarse scan measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations.

### 9.2 Extrapolation

The extrapolation can be used in z-axis scans with automatic surface detection. The SAR values can be extrapolated to the inner phantom surface. The extrapolation distance is the sum of the probe sensor offset, the surface detection distance and the grid offset. The extrapolation is based on fourth order polynomial functions. The extrapolation is only available for SAR values.

### 9.3 Boundary correction

The correction of the probe boundary effect in the vicinity of the phantom surface is done in the standard (worst case) evaluation; the boundary effect is reduced by different weights for the lowest measured points in the extrapolation routine. The result is a slight overestimation of the extrapolated SAR values (2% to 8%) depending on the SAR distribution and gradient. The advanced evaluation makes a full compensation of the boundary effect before doing the extrapolation. This is only possible for probes with specifications on the boundary effect.

### 9.4 Peak search for 1g and 10g cube averaged SAR

The 1g and 10g peak evaluations are only available for the predefined cube 5x5x7 scan. The routines are verified and optimized for the grid dimensions used in these cube measurements.

The measure volume of 32x32x35mm mm contains about 35g of tissue. The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume in a 1mm grid (35000 points). In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is then moved around until the highest averaged SAR is found. This last procedure is repeated for a 10 g cube. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.



 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			26(26)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

## 10.0 MEASUREMENT UNCERTAINTIES

Uncertainty Component	Tolerance ( $\pm$ %)	Probability Distribution	Sensitivity coefficient (1-g)	Sensitivity coefficient (10-g)	1-g Standard Uncertainty ( $\pm$ %)	10-g Standard Uncertainty ( $\pm$ %)
<b>Measurement System</b>						
Probe Calibration ( $k=1$ )	3.3	Normal	1	1	3.3	3.3
Axial Isotropy	4.7	Rectangle	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	Rectangle	0.7	0.7	3.9	3.9
Boundary Effect	11.0	Rectangle	1	1	6.4	6.4
Linearity	4.7	Rectangle	1	1	2.7	2.7
System Detection Limits	1.0	Rectangle	1	1	0.6	0.6
Readout Electronics	1.0	Normal	1	1	1.0	1.0
Response Time	0.8	Rectangle	1	1	0.5	0.5
Integration Time	1.8	Rectangle	1	1	1.1	1.1
RF Ambient Conditions	3.0	Rectangle	1	1	1.7	1.7
Probe Positioner Mechanical Tolerance	0.4	Rectangle	1	1	0.2	0.2
Probe Positioning with respect to Phantom Shell	2.9	Rectangle	1	1	1.7	1.7
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	3.9	Rectangle	1	1	2.3	2.3
<b>Test sample Related</b>						
Test Sample Positioning		Normal	1	1	6.7	6.7
Device Holder Uncertainty		Normal	1	1	5.9	5.9
Output Power Variation - SAR drift measurement	5	Rectangle	1	1	2.9	2.9
<b>Phantom and Tissue Parameters</b>						
Phantom Uncertainty (shape and thickness tolerances)	4.0	Rectangle	1	1	2.3	2.3
Liquid Conductivity - deviation from target values	5.0	Rectangle	0.7	0.5	2.0	1.4
Liquid Conductivity - measurement uncertainty	10.0	Rectangle	0.7	0.5	4.0	2.9
Liquid Permittivity - deviation from target values	5.0	Rectangle	0.6	0.5	1.7	1.4
Liquid Permittivity - measurement uncertainty	5.0	Rectangle	0.6	0.5	1.7	1.4
<b>Combined Standard Uncertainty</b>		RSS			14.5	14.1
<b>Expanded Uncertainty (95% CONFIDENCE LEVEL)</b>					29.0	28.2

Table 13. Measurement uncertainty



## 11.0 TEST RESULTS

### 11.1 SAR measurement results at highest power measured against the head

Mode	f (MHz)	Conducted Output Power (dBm)	SAR, averaged over 1 g (W/Kg)			SAR, averaged over 1 g (W/Kg)		
			Left-hand			Right-hand		
			Liquid Temp (°C)	Cheek	Tilted	Liquid Temp (°C)	Cheek	Tilted
PCS 1900	1850.20	30.30	21.0	1.30	-	21.5	0.82	-
	* 1880.00	30.10	21.1	1.42	0.41	21.6	0.91	0.32
	1908.80	29.80	21.0	<b>1.48</b>	-	21.5	0.92	-

Table 14. SAR results for head configuration

### 11.2 SAR measurement results at highest power measured against the body using Holsters

Mode	f (MHz)	Conducted Output Power (dBm)	Liquid Temp (°C)	Holster type	SAR, averaged over 1 g (W/kg)	SAR, averaged over 1 g with headset (W/kg)
PCS 1900	1850.20	30.20	-	Plastic Holster	-	-
	* 1880.00	30.00	20.3	Plastic Holster	<b>0.27</b>	* 0.26
	1908.80	29.80	-	Plastic Holster	-	-
	1850.20	30.20	-	Leather Swivel Holster	-	-
	* 1880.00	30.00	20.3	Leather Swivel Holster	0.23	* 0.23
	1908.80	29.80	-	Leather Swivel Holster	-	-

Table 15. SAR results with Holsters for body configuration



 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			28(28)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	


**11.3 SAR measurement results at highest power measured against the body using Folding Leather Case for inside a shirt pocket configuration**

Mode	f (MHz)	Conducted Output Power (dBm)	Liquid Temp (°C)	Side touching flat phantom	SAR, averaged over 1 g (W/kg)
PCS 1900	1850.20	30.20	-	Front	-
	* 1880.00	30.00	20.6	Front	<b>0.60</b>
	1908.80	29.80	-	Front	-
	1850.20	30.20	20.8	Back	1.26
	1880.00	30.00	20.6	Back	1.24
	1908.80	29.80	20.6	Back	1.15

**Table 16. SAR results with Folding Leather Case for inside a shirt pocket configuration**

\* Supplement C: Middle channel testing is sufficient only if SAR < 3dB below limit see PN 02-1438




 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			29(29)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

## 12.0 REFERENCES


- [1] EN 50360: 2001, Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300 MHz – 3 GHz)
- [2] EN 50361: 2001, Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz – 3 GHz)
- [3] ICNIRP, International Commission on Non-Ionizing Radiation Protection (1998), Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic fields (up to 300 GHz).
- [4] Council Recommendation 1999/519/EC of July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz)
- [5] IEEE C95.3-1991, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave.
- [6] IEEE C95.1-1999, IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.
- [7] OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields.
- [8] FCC 96-326, Guidelines for Evaluating the Environmental Effects of Radio-Frequency Radiation.
- [9] DASY 3 DOSIMETRIC ASSESSMENT SYSTEM SOFTWARE MANUAL  
Schmid & Partner Engineering AG, August 99.
- [10] IEEE P1528/D1.2 Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.



	Document SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE		Page 30(30)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>

## APPENDIX A: SAR DISTRIBUTION COMPARISON FOR THE ACCURACY VERIFICATION



	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			31(31)
Author Data	Dates of Test	Test Report No	FCC ID	
<b>Daoud Attayi</b>	<b>July 03 - 04, 2003</b>	<b>RIM-0025-0307-01</b>	<b>L6AR6030GE</b>	

07/03/03

## Dipole 1900 MHz

SAM 1; Flat

Probe: ET3DV6 - SN1642; ConvF(5.30,5.30,5.30); Crest factor: 1.0; Head 1900 MHz:  $\sigma = 1.48 \text{ mho/m}$   $\epsilon_r = 38.9$   $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: Peak: 84.9 mW/g, SAR (1g): 43.7 mW/g, SAR (10g): 22.2 mW/g, (Worst-case extrapolation)


Penetration depth: 7.7 (7.2, 8.9) [mm]

Powerdrift: 0.04 dB


Date Tested: July 03, 03

Ambient Temperature: 23.1 (°C)

Liquid Temperature: 21.2 (°C)

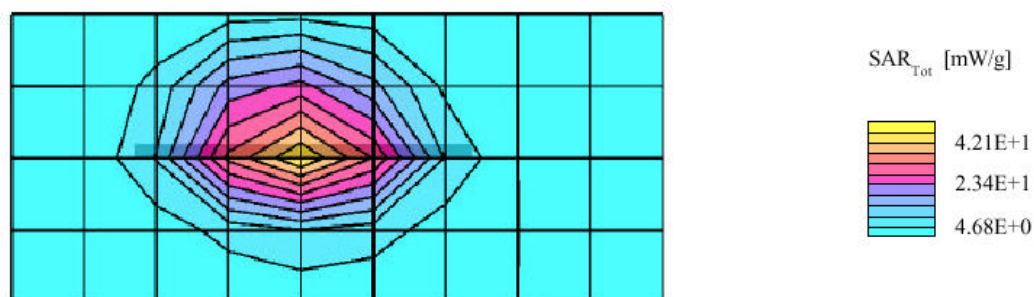




 RESEARCH IN MOTION	Document SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE		Page 32(32)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>

## APPENDIX B: SAR DISTRIBUTION PLOTS FOR HEAD CONFIGURATION



	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			33(33)
Author Data	Dates of Test	Test Report No	FCC ID	
Daoud Attayi	July 03 - 04, 2003	RIM-0025-0307-01	L6AR6030GE	

07/03/03

## BlackBerry Wireless Handheld Model No. R6030GE

SAM 1; Left Hand

Probe: ET3DV6 - SN1642; ConvF(5.30,5.30,5.30); Crest factor: 8.0; Head 1900 MHz:  $\sigma = 1.48 \text{ mho/m}$   $\epsilon_r = 38.9$   $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: Peak: 3.10 mW/g, SAR (1g): 1.48 mW/g, SAR (10g): 0.668 mW/g \* Max outside, (Worst-case extrapolation)

Penetration depth: 7.8 (7.2, 9.1) [mm]

Powerdrift: 0.23 dB

Date Tested: July 03, 03


Ambient Temperature: 22.8 (°C)

Liquid Temperature: 21.6 (°C)


Band: GSM 1900 MHz

Channel: 810

Configuration: Touch left

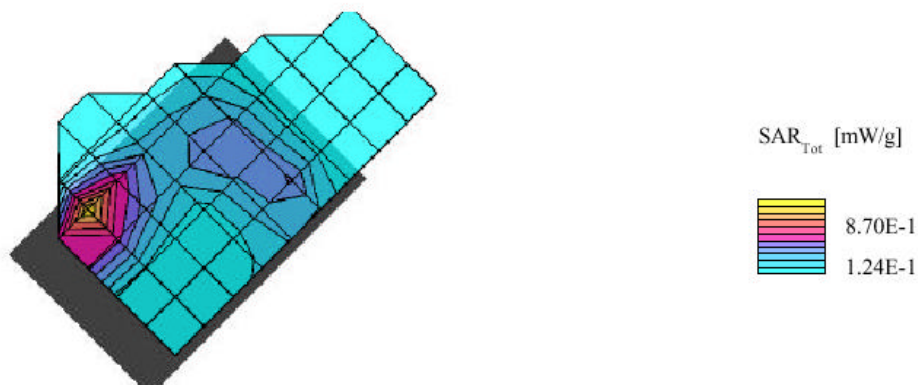



	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			34(34)
Author Data	Dates of Test	Test Report No	FCC ID	
<b>Daoud Attayi</b>	<b>July 03 - 04, 2003</b>	<b>RIM-0025-0307-01</b>	<b>L6AR6030GE</b>	

07/03/03

## BlackBerry Wireless Handheld Model No. R6030GE

SAM 1; Left Hand

Probe: ET3DV6 - SN1642; ConvF(5.30,5.30,5.30); Crest factor: 8.0; Head 1900 MHz:  $\sigma = 1.48 \text{ mho/m}$   $\epsilon_r = 38.9$   $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: Peak: 0.754 mW/g, SAR (1g): 0.407 mW/g, SAR (10g): 0.221 mW/g, (Worst-case extrapolation)

Penetration depth: 8.6 (7.7, 10.1) [mm]

Powerdrift: 0.13 dB

Date Tested: July 03, 03


Ambient Temperature: 22.8 (°C)

Liquid Temperature: 21.6 (°C)


Band: GSM 1900 MHz

Channel: 661

Configuration: Tilt left

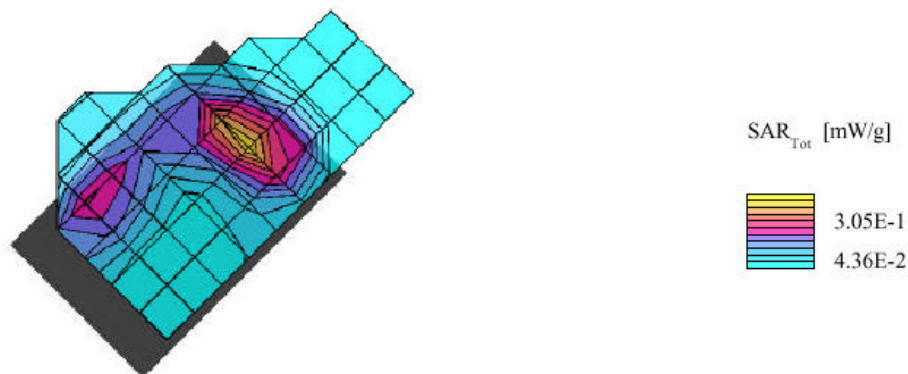



	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			35(35)
Author Data	Dates of Test	Test Report No	FCC ID	
Daoud Attayi	July 03 - 04, 2003	RIM-0025-0307-01	L6AR6030GE	

07/03/03

## BlackBerry Wireless Handheld Model No. R6030GE

SAM 1; Right Hand

Probe: ET3DV6 - SN1642; ConvF(5.30,5.30,5.30); Crest factor: 8.0; Head 1900 MHz:  $\sigma = 1.48 \text{ mho/m}$   $\epsilon_r = 38.9$   $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: Peak: 1.79 mW/g, SAR (1g): 0.916 mW/g, SAR (10g): 0.449 mW/g, (Worst-case extrapolation)

Penetration depth: 8.0 (7.3, 9.6) [mm]

Powerdrift: -0.02 dB

Date Tested: July 03, 03


Ambient Temperature: 23.0 (°C)

Liquid Temperature: 21.0 (°C)


Band: GSM 1900 MHz

Channel: 810

Configuration: Touch right

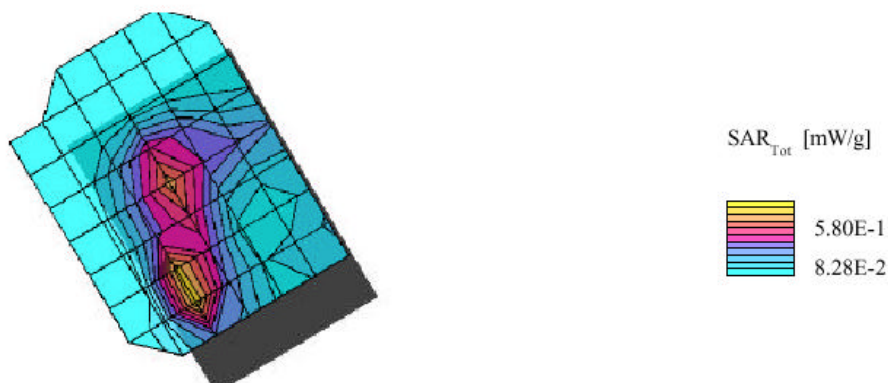



	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			36(36)
Author Data	Dates of Test	Test Report No	FCC ID	
Daoud Attayi	July 03 - 04, 2003	RIM-0025-0307-01	L6AR6030GE	

07/03/03

## BlackBerry Wireless Handheld Model No. R6030GE

SAM 1; Right Hand

Probe: ET3DV6 - SN1642; ConvF(5.30,5.30,5.30); Crest factor: 8.0; Head 1900 MHz:  $\sigma = 1.48 \text{ mho/m}$   $\epsilon_r = 38.9$   $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: Peak: 0.581 mW/g, SAR (1g): 0.316 mW/g, SAR (10g): 0.172 mW/g \* Max outside, (Worst-case extrapolation)

Penetration depth: 8.7 (7.9, 10.1) [mm]

Powerdrift: -0.06 dB

Date Tested: July 03, 03


Ambient Temperature: 23.0 (°C)

Liquid Temperature: 21.1 (°C)


Band: GSM 1900 MHz

Channel: 661

Configuration: Tilt right

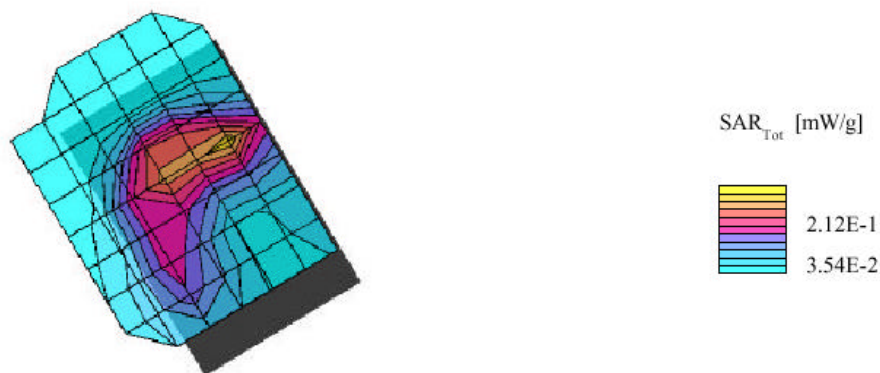




 RESEARCH IN MOTION	Document SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			Page 37(37)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

## APPENDIX C: SAR DISTRIBUTION PLOTS FOR BODY-WORN CONFIGURATION



 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			38(38)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

07/04/03

## BlackBerry Wireless Handheld Model No. R6030GE

SAM 2; Flat

Probe: ET3DV6 - SN1642; ConvF(4.80,4.80,4.80); Crest factor: 8.0; Muscle 1900 MHz:  $\sigma = 1.60 \text{ mho/m}$   $\epsilon_r = 52.4 \rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: Peak: 0.471 mW/g, SAR (1g): 0.267 mW/g, SAR (10g): 0.154 mW/g, (Worst-case extrapolation)

Penetration depth: 9.9 (8.8, 11.5) [mm]

Powerdrift: 0.07 dB

Date Tested: July 04, 03


Ambient Temperature: 22.1 (°C)

Liquid Temperature: 20.3 (°C)

Band: GSM 1900 MHz

Channel: 661


Configuration: Body-worn with holster

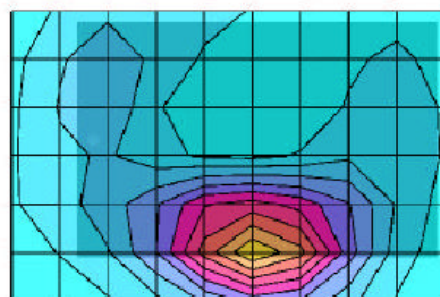

SAR<sub>Tot</sub> [mW/g]





	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			39(39)
Author Data	Dates of Test	Test Report No	FCC ID	
Daoud Attayi	July 03 - 04, 2003	RIM-0025-0307-01	L6AR6030GE	

07/04/03

## BlackBerry Wireless Handheld Model No. R6030GE

SAM 2; Flat

Probe: ET3DV6 - SN1642; ConvF(4.80,4.80,4.80); Crest factor: 8.0; Muscle 1900 MHz:  $\sigma = 1.60 \text{ mho/m}$   $\epsilon_r = 52.4$   $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: Peak: 0.458 mW/g, SAR (1g): 0.258 mW/g, SAR (10g): 0.148 mW/g, (Worst-case extrapolation)

Penetration depth: 9.7 (8.5, 11.4) [mm]

Powerdrift: 0.43 dB

Date Tested: July 04, 03


Ambient Temperature: 22.5 (°C)

Liquid Temperature: 20.4 (°C)


Band: GSM 1900 MHz

Channel: 661

Configuration: Body-worn with holster and headset

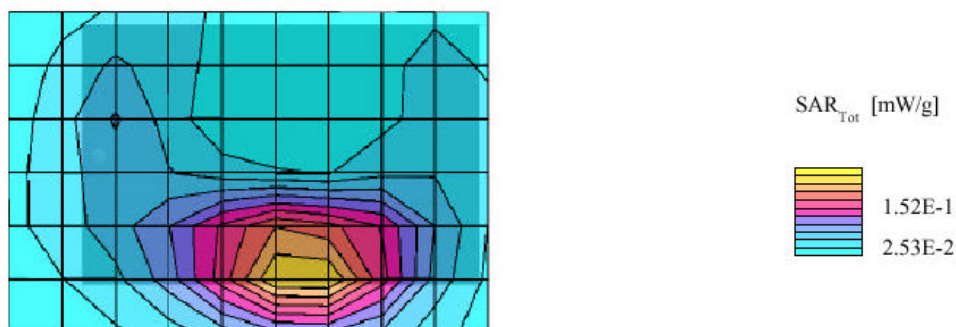



	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			40(40)
Author Data	Dates of Test	Test Report No	FCC ID	
Daoud Attayi	July 03 - 04, 2003	RIM-0025-0307-01	L6AR6030GE	

07/04/03

## BlackBerry Wireless Handheld Model No. R6030GE

SAM 2; Flat

Probe: ET3DV6 - SN1642; ConvF(4.80,4.80,4.80); Crest factor: 8.0; Muscle 1900 MHz:  $\sigma = 1.60 \text{ mho/m}$   $\epsilon_r = 52.4$   $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: Peak: 0.399 mW/g, SAR (1g): 0.226 mW/g, SAR (10g): 0.133 mW/g, (Worst-case extrapolation)

Penetration depth: 10.1 (8.7, 12.2) [mm]

Powerdrift: -0.30 dB

Date Tested: July 04, 03


Ambient Temperature: 22.1 (°C)

Liquid Temperature: 20.3 (°C)


Band: GSM 1900 MHz

Channel: 661


Configuration: Body-worn with leather swivel holster

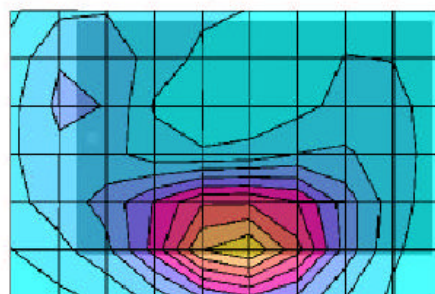

SAR<sub>Tot</sub> [mW/g]





	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			41(41)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

07/04/03

## BlackBerry Wireless Handheld Model No. R6030GE

SAM 2; Flat

Probe: ET3DV6 - SN1642; ConvF(4.80,4.80,4.80); Crest factor: 8.0; Muscle 1900 MHz:  $\sigma = 1.60 \text{ mho/m}$   $\epsilon_r = 52.4$   $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: Peak: 0.400 mW/g, SAR (1g): 0.225 mW/g, SAR (10g): 0.131 mW/g, (Worst-case extrapolation)

Penetration depth: 9.8 (8.3, 12.1) [mm]

Powerdrift: -0.09 dB

Date Tested: July 04, 03


Ambient Temperature: 22.5 (°C)

Liquid Temperature: 20.3 (°C)


Band: GSM 1900 MHz

Channel: 661


Configuration: Body-worn with leather swivel holster with headset

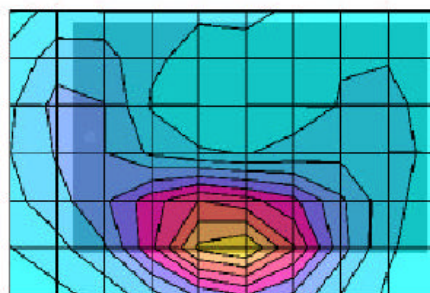

SAR<sub>Tot</sub> [mW/g]





	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			42(42)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

07/04/03

## BlackBerry Wireless Handheld Model No. R6030GE

SAM 2; Flat

Probe: ET3DV6 - SN1642; ConvF(4.80,4.80,4.80); Crest factor: 8.0; Muscle 1900 MHz:  $\sigma = 1.60 \text{ mho/m}$   $\epsilon_r = 52.4$   $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: Peak: 1.14 mW/g, SAR (1g): 0.603 mW/g, SAR (10g): 0.315 mW/g, (Worst-case extrapolation)

Penetration depth: 9.4 (8.5, 10.8) [mm]

Powerdrift: -0.44 dB

Date Tested: July 04, 03


Ambient Temperature: 22.5 (°C)

Liquid Temperature: 20.6 (°C)


Band: GSM 1900 MHz

Channel: 661

Configuration: Body-worn with Case-Folding Leather for shirt pocket (front side)

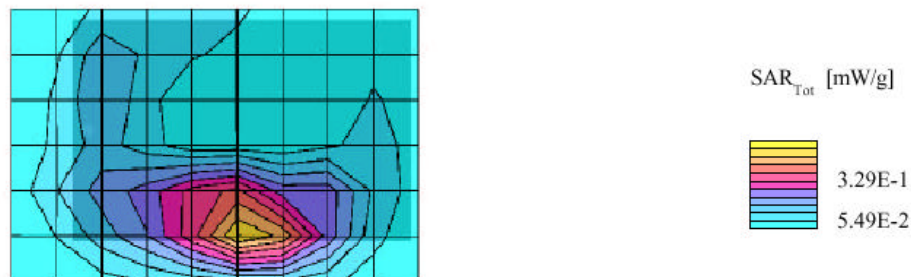



	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			43(43)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

07/04/03

## BlackBerry Wireless Handheld Model No. R6030GE

SAM 2; Flat

Probe: ET3DV6 - SN1642; ConvF(4.80,4.80,4.80); Crest factor: 8.0; Muscle 1900 MHz:  $\sigma = 1.60 \text{ mho/m}$   $\epsilon_r = 52.4$   $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: Peak: 2.53 mW/g, SAR (1g): 1.26 mW/g, SAR (10g): 0.600 mW/g, (Worst-case extrapolation)

Penetration depth: 8.1 (7.6, 9.2) [mm]

Powerdrift: -0.20 dB

Date Tested: July 04, 03


Ambient Temperature: 22.6 (°C)

Liquid Temperature: 20.8 (°C)


Band: GSM 1900 MHz

Channel: 512

Configuration: Body-worn with Case-Folding Leather for shirt pocket (back side)

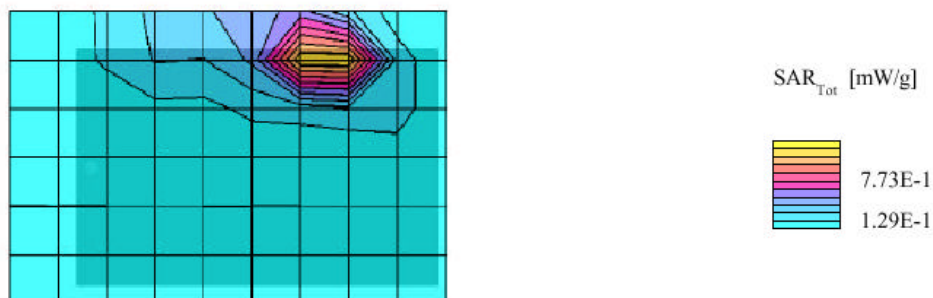




	Document SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE		Page 44(44)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>

#### APPENDIX D: PROBE & DIPOLE CALIBRATION DATA



 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			45(45)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

## Schmid & Partner Engineering AG

**Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79**

### Calibration Certificate

#### Dosimetric E-Field Probe

Type:

**ET3DV6**

Serial Number:

**1642**

Place of Calibration:

**Zurich**

Date of Calibration:

**July 26, 2002**

Calibration Interval:

**12 months**

Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.


Calibrated by:

*D. Vetter*

Approved by:

*Daoud Attayi*



 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			46(46)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

**Schmid & Partner  
Engineering AG**

**Zeughausstrasse 43, 8004 Zurich, Switzerland, Telephone +41 1 245 97 00, Fax +41 1 245 97 79**


# Probe ET3DV6

## SN:1642

Manufactured:	November 7, 2001
Last calibration:	November 26, 2001
Recalibrated:	July 26, 2002

**Calibrated for System DASY3**



 <b>RESEARCH IN MOTION</b>	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			47(47)
Author Data	Dates of Test	Test Report No	FCC ID	
<b>Daoud Attayi</b>	<b>July 03 - 04, 2003</b>	<b>RIM-0025-0307-01</b>	<b>L6AR6030GE</b>	

**ET3DV6 SN:1642**

**July 26, 2002**

## **DASY3 - Parameters of Probe: ET3DV6 SN:1642**

### **Sensitivity in Free Space**

NormX      **1.62**  $\mu\text{V}/(\text{V}/\text{m})^2$   
 NormY      **1.85**  $\mu\text{V}/(\text{V}/\text{m})^2$   
 NormZ      **1.61**  $\mu\text{V}/(\text{V}/\text{m})^2$

### **Diode Compression**

DCP X      **96**      mV  
 DCP Y      **96**      mV  
 DCP Z      **96**      mV

### **Sensitivity in Tissue Simulating Liquid**

**Head                      900 MHz                       $\epsilon_r = 41.5 \pm 5\%$                        $\sigma = 0.97 \pm 5\%$  mho/m**

ConvF X	<b>6.5</b> $\pm 8.9\%$ (k=2)	Boundary effect:	
ConvF Y	<b>6.5</b> $\pm 8.9\%$ (k=2)	Alpha	<b>0.34</b>
ConvF Z	<b>6.5</b> $\pm 8.9\%$ (k=2)	Depth	<b>2.68</b>

**Head                      1800 MHz                       $\epsilon_r = 40.0 \pm 5\%$                        $\sigma = 1.40 \pm 5\%$  mho/m**

ConvF X	<b>5.4</b> $\pm 8.9\%$ (k=2)	Boundary effect:	
ConvF Y	<b>5.4</b> $\pm 8.9\%$ (k=2)	Alpha	<b>0.53</b>
ConvF Z	<b>5.4</b> $\pm 8.9\%$ (k=2)	Depth	<b>2.33</b>

### **Boundary Effect**

**Head                      900 MHz                      Typical SAR gradient: 5 % per mm**

Probe Tip to Boundary		<b>1 mm</b>	<b>2 mm</b>
SAR <sub>be</sub> [%] Without Correction Algorithm		<b>9.9</b>	<b>5.7</b>
SAR <sub>be</sub> [%] With Correction Algorithm		<b>0.4</b>	<b>0.5</b>


**Head                      1800 MHz                      Typical SAR gradient: 10 % per mm**

Probe Tip to Boundary		<b>1 mm</b>	<b>2 mm</b>
SAR <sub>be</sub> [%] Without Correction Algorithm		<b>12.0</b>	<b>7.8</b>
SAR <sub>be</sub> [%] With Correction Algorithm		<b>0.2</b>	<b>0.2</b>

### **Sensor Offset**

Probe Tip to Sensor Center	<b>2.7</b>	mm
Optical Surface Detection	<b>1.1 <math>\pm</math> 0.2</b>	mm




 RESEARCH IN MOTION	Document SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE	Page 48(48)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>
		FCC ID <b>L6AR6030GE</b>

ET3DV6 SN:1642

July 26, 2002


### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

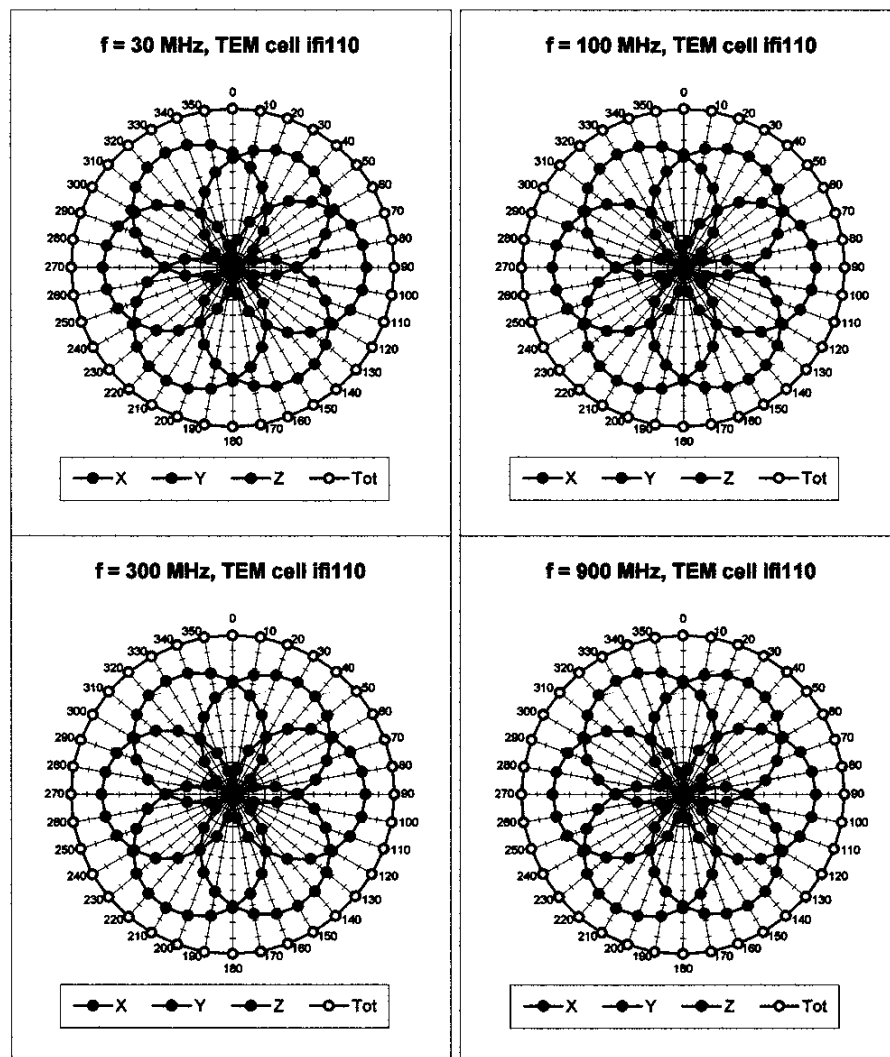




ET3DV6 SN:1642


July 26, 2002

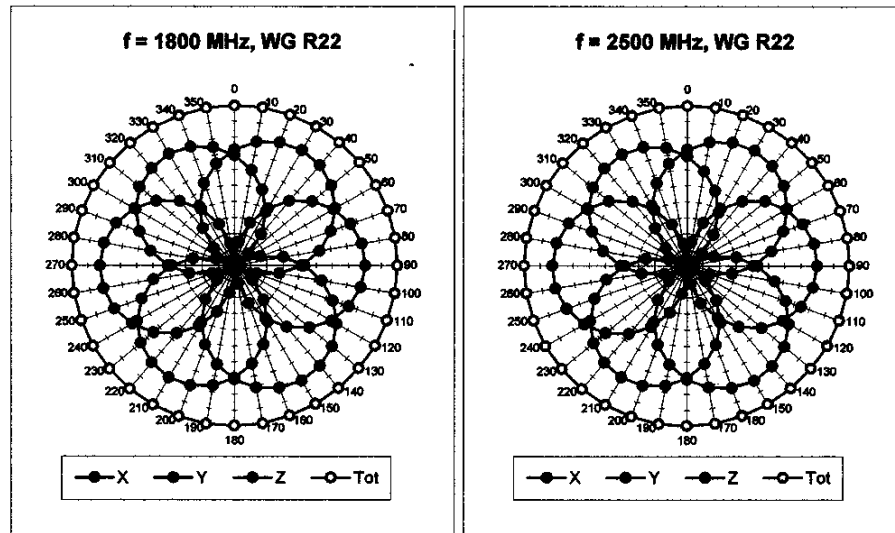

### Isotropy Error ( $\phi$ ), $\theta = 0^\circ$

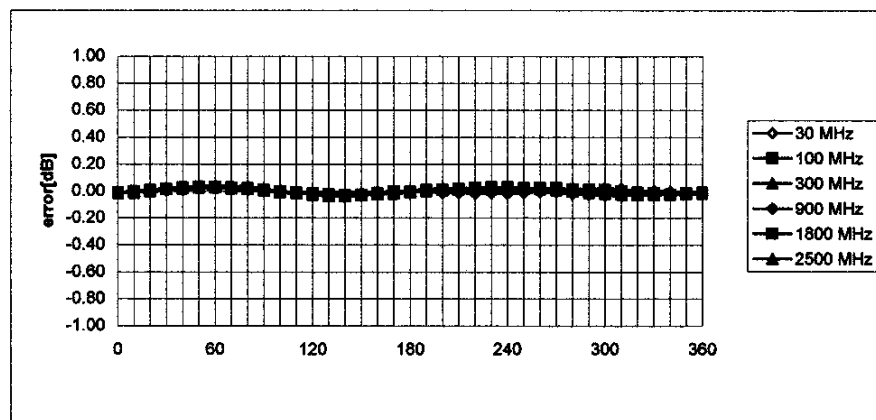




 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			50(50)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

ET3DV6 SN:1642

July 26, 2002

## Frequency Response of E-Field

( TEM-Cell:ifi110, Waveguide R22)


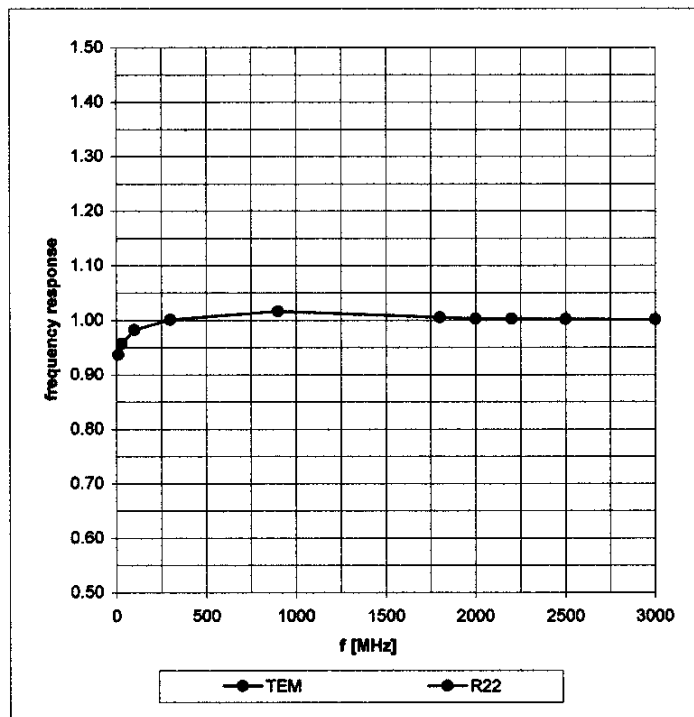




ET3DV6 SN:1642

July 26, 2002

### Dynamic Range f(SAR<sub>brain</sub>) ( Waveguide R22 )

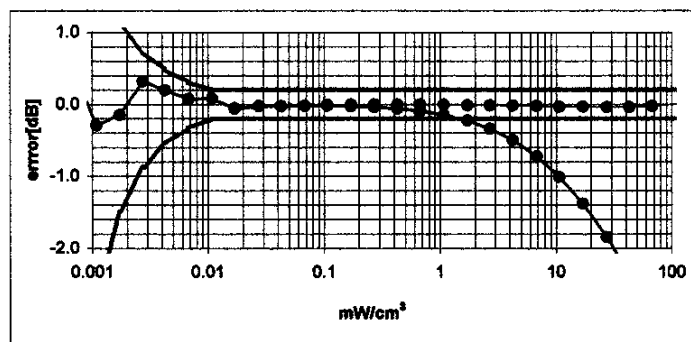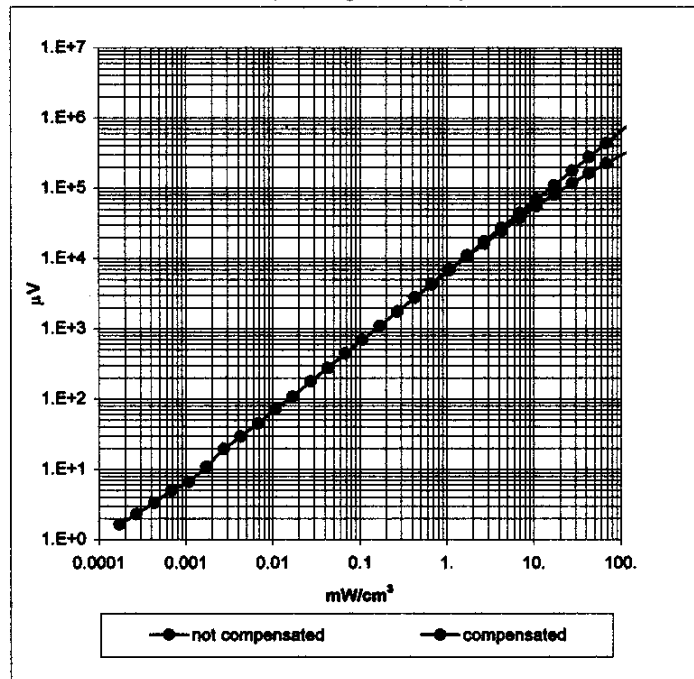




ET3DV6 SN:1642

July 26, 2002

## Conversion Factor Assessment

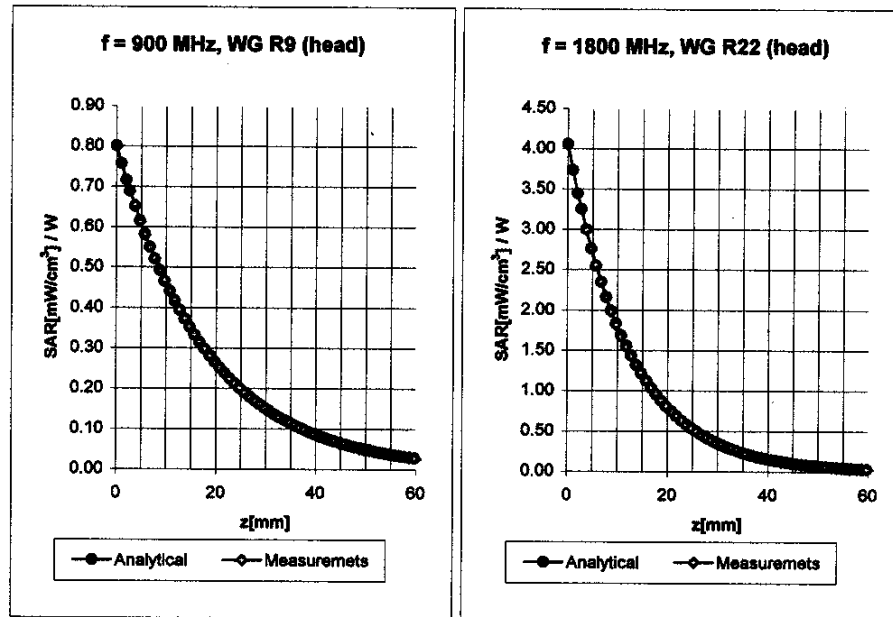


Head	900 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.97 \pm 5\% \text{ mho/m}$
ConvF X	$6.5 \pm 8.9\% (k=2)$	Boundary effect:	
ConvF Y	$6.5 \pm 8.9\% (k=2)$	Alpha	0.34
ConvF Z	$6.5 \pm 8.9\% (k=2)$	Depth	2.68
Head	1800 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\% \text{ mho/m}$
ConvF X	$5.4 \pm 8.9\% (k=2)$	Boundary effect:	
ConvF Y	$5.4 \pm 8.9\% (k=2)$	Alpha	0.53
ConvF Z	$5.4 \pm 8.9\% (k=2)$	Depth	2.33



ET3DV6 SN:1642

July 26, 2002

## Conversion Factor Assessment

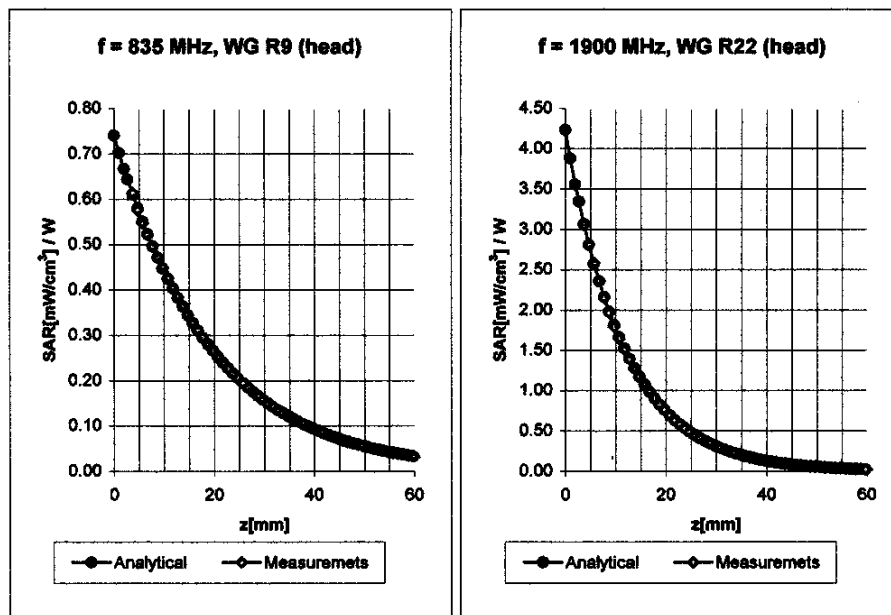


Head	835 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.90 \pm 5\% \text{ mho/m}$
	ConvF X	$6.5 \pm 8.9\% (k=2)$	Boundary effect:
	ConvF Y	$6.5 \pm 8.9\% (k=2)$	Alpha <b>0.34</b>
	ConvF Z	$6.5 \pm 8.9\% (k=2)$	Depth <b>2.65</b>
Head	1900 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\% \text{ mho/m}$
	ConvF X	$5.3 \pm 8.9\% (k=2)$	Boundary effect:
	ConvF Y	$5.3 \pm 8.9\% (k=2)$	Alpha <b>0.57</b>
	ConvF Z	$5.3 \pm 8.9\% (k=2)$	Depth <b>2.28</b>



ET3DV6 SN:1642

July 26, 2002

## Conversion Factor Assessment

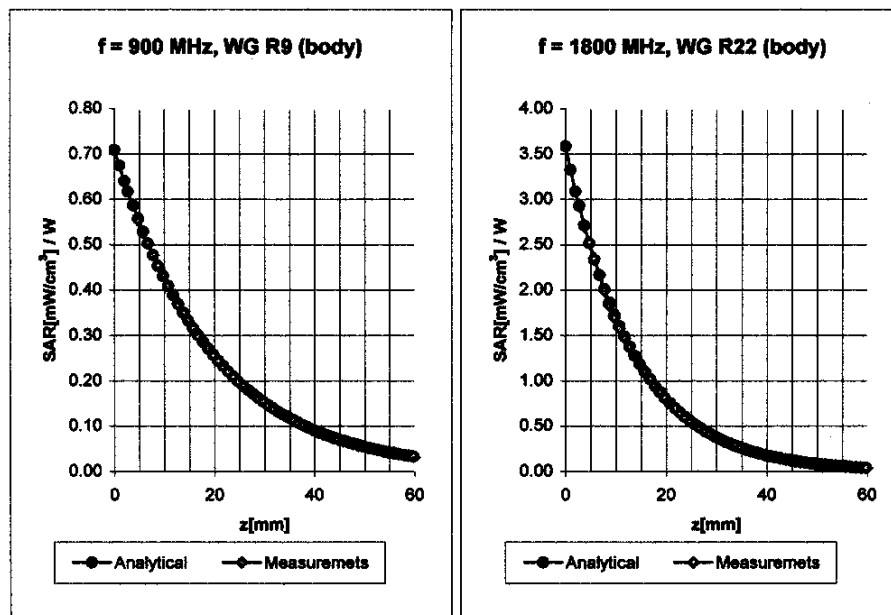


<b>Body</b>	<b>900 MHz</b>	$\epsilon_r = 55.2 \pm 5\%$	$\sigma = 0.97 \pm 5\% \text{ mho/m}$
ConvF X	<b>6.3 <math>\pm 8.9\%</math> (k=2)</b>	Boundary effect:	
ConvF Y	<b>6.3 <math>\pm 8.9\%</math> (k=2)</b>	Alpha	<b>0.36</b>
ConvF Z	<b>6.3 <math>\pm 8.9\%</math> (k=2)</b>	Depth	<b>2.63</b>
<b>Body</b>	<b>1800 MHz</b>	$\epsilon_r = 53.3 \pm 5\%$	$\sigma = 1.52 \pm 5\% \text{ mho/m}$
ConvF X	<b>5.2 <math>\pm 8.9\%</math> (k=2)</b>	Boundary effect:	
ConvF Y	<b>5.2 <math>\pm 8.9\%</math> (k=2)</b>	Alpha	<b>0.61</b>
ConvF Z	<b>5.2 <math>\pm 8.9\%</math> (k=2)</b>	Depth	<b>2.30</b>



ET3DV6 SN:1642

July 26, 2002

## Conversion Factor Assessment

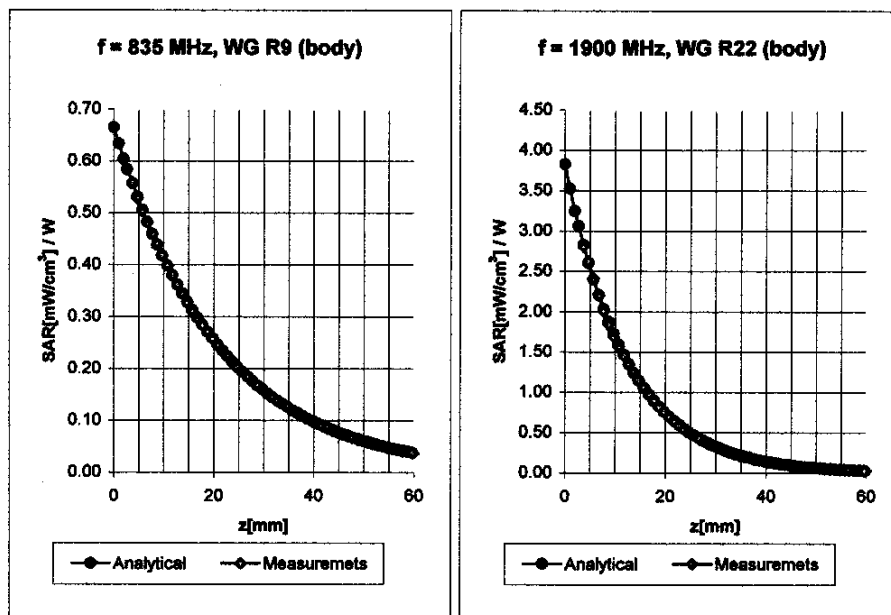

Body                      835 MHz                       $\epsilon_r = 56.0 \pm 5\%$                        $\sigma = 1.05 \pm 5\%$  mho/m

ConvF X                      **6.4**  $\pm 8.9\%$  (k=2)

Boundary effect:

ConvF Y                      **6.4**  $\pm 8.9\%$  (k=2)

Alpha                      **0.36**

ConvF Z                      **6.4**  $\pm 8.9\%$  (k=2)

Depth                      **2.66**

Body                      1900 MHz                       $\epsilon_r = 53.3 \pm 5\%$                        $\sigma = 1.52 \pm 5\%$  mho/m

ConvF X                      **4.8**  $\pm 8.9\%$  (k=2)

Boundary effect:


ConvF Y                      **4.8**  $\pm 8.9\%$  (k=2)

Alpha                      **0.74**

ConvF Z                      **4.8**  $\pm 8.9\%$  (k=2)

Depth                      **2.07**




 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			56(56)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

ET3DV6 SN:1642


July 26, 2002

### Deviation from Isotropy in HSL

Error ( $\theta, \phi$ ),  $f = 900$  MHz

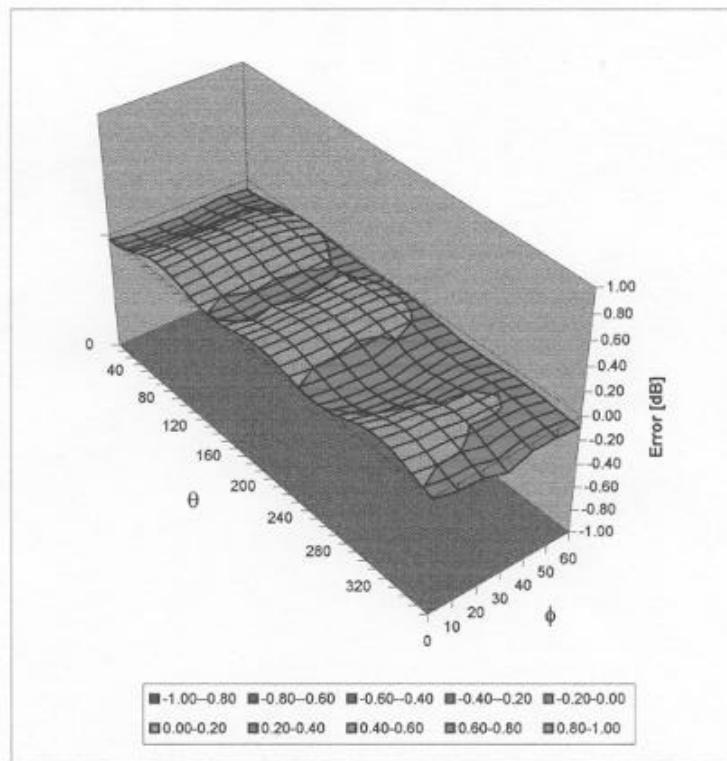



	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			57(57)
Author Data	Dates of Test	Test Report No	FCC ID	
Daoud Attayi	July 03 - 04, 2003	RIM-0025-0307-01	L6AR6030GE	

## Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

### Calibration Certificate

#### 1900 MHz System Validation Dipole

Type:

**D1900V2**

Serial Number:

**545**

Place of Calibration:

**Zurich**

Date of Calibration:

**November 26, 2001**

Calibration Interval:

**24 months**


Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.


Calibrated by:



Approved by:





 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			58(58)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

**Schmid & Partner  
Engineering AG**

**Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79**

# DASY3


## Dipole Validation Kit

**Type: D1900V2**

**Serial: 545**

**Manufactured: November 15, 2001**  
**Calibrated: November 26, 2001**



 RESEARCH IN MOTION	Document SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			Page 59(59)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

## 1. Measurement Conditions

The measurements were performed in the flat section of the new generic twin phantom filled with brain simulating sugar solution of the following electrical parameters at 1900 MHz:

Relative permittivity	<b>40.0</b>	$\pm 5\%$
Conductivity	<b>1.45 mho/m</b>	$\pm 10\%$

The DASY3 System (Software version 3.1d) with a dosimetric E-field probe ET3DV6 (SN:1507, conversion factor 5.31 at 1800 MHz) was used for the measurements.

The dipole feedpoint was positioned below the center marking and oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 20mm was aligned with the dipole. The 5x5x7 fine cube was chosen for cube integration. Probe isotropy errors were cancelled by measuring the SAR with normal and 90° turned probe orientations and averaging.

The dipole input power (forward power) was 250mW  $\pm 3\%$ . The results are normalized to 1W input power.


## 2. SAR Measurement

Standard SAR-measurements were performed with the head phantom according to the measurement conditions described in section 1. The results (see figure) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values are:

averaged over 1 cm <sup>3</sup> (1 g) of tissue:	<b>43.2 mW/g</b>
averaged over 10 cm <sup>3</sup> (10 g) of tissue:	<b>22.0 mW/g</b>

Note: If the liquid parameters for validation are slightly different from the ones used for initial calibration, the SAR-values will be different as well. The estimated sensitivities of SAR-values and penetration depths to the liquid parameters are listed in the DASY Application Note 4: 'SAR Sensitivities'.



 RESEARCH IN MOTION	Document SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			Page 60(60)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

### **3. Dipole Impedance and Return Loss**

The impedance was measured at the SMA-connector with a network analyzer and numerically transformed to the dipole feedpoint. The transformation parameters from the SMA-connector to the dipole feedpoint are:

Electrical delay: **1.216 ns** (one direction)  
Transmission factor: **0.992** (voltage transmission, one direction)

The dipole was positioned at the flat phantom sections according to section 1 and the distance holder was in place during impedance measurements.

Feedpoint impedance at 1900 MHz:  $\text{Re}\{Z\} = 50.4 \Omega$

$\text{Im}\{Z\} = 1.9 \Omega$

Return Loss at 1900 MHz **- 34.3 dB**

### **4. Handling**

Do not apply excessive force to the dipole arms, because they might bend. Bending of the dipole arms stresses the soldered connections near the feedpoint leading to a damage of the dipole.


### **5. Design**

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.


### **6. Power Test**


After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.



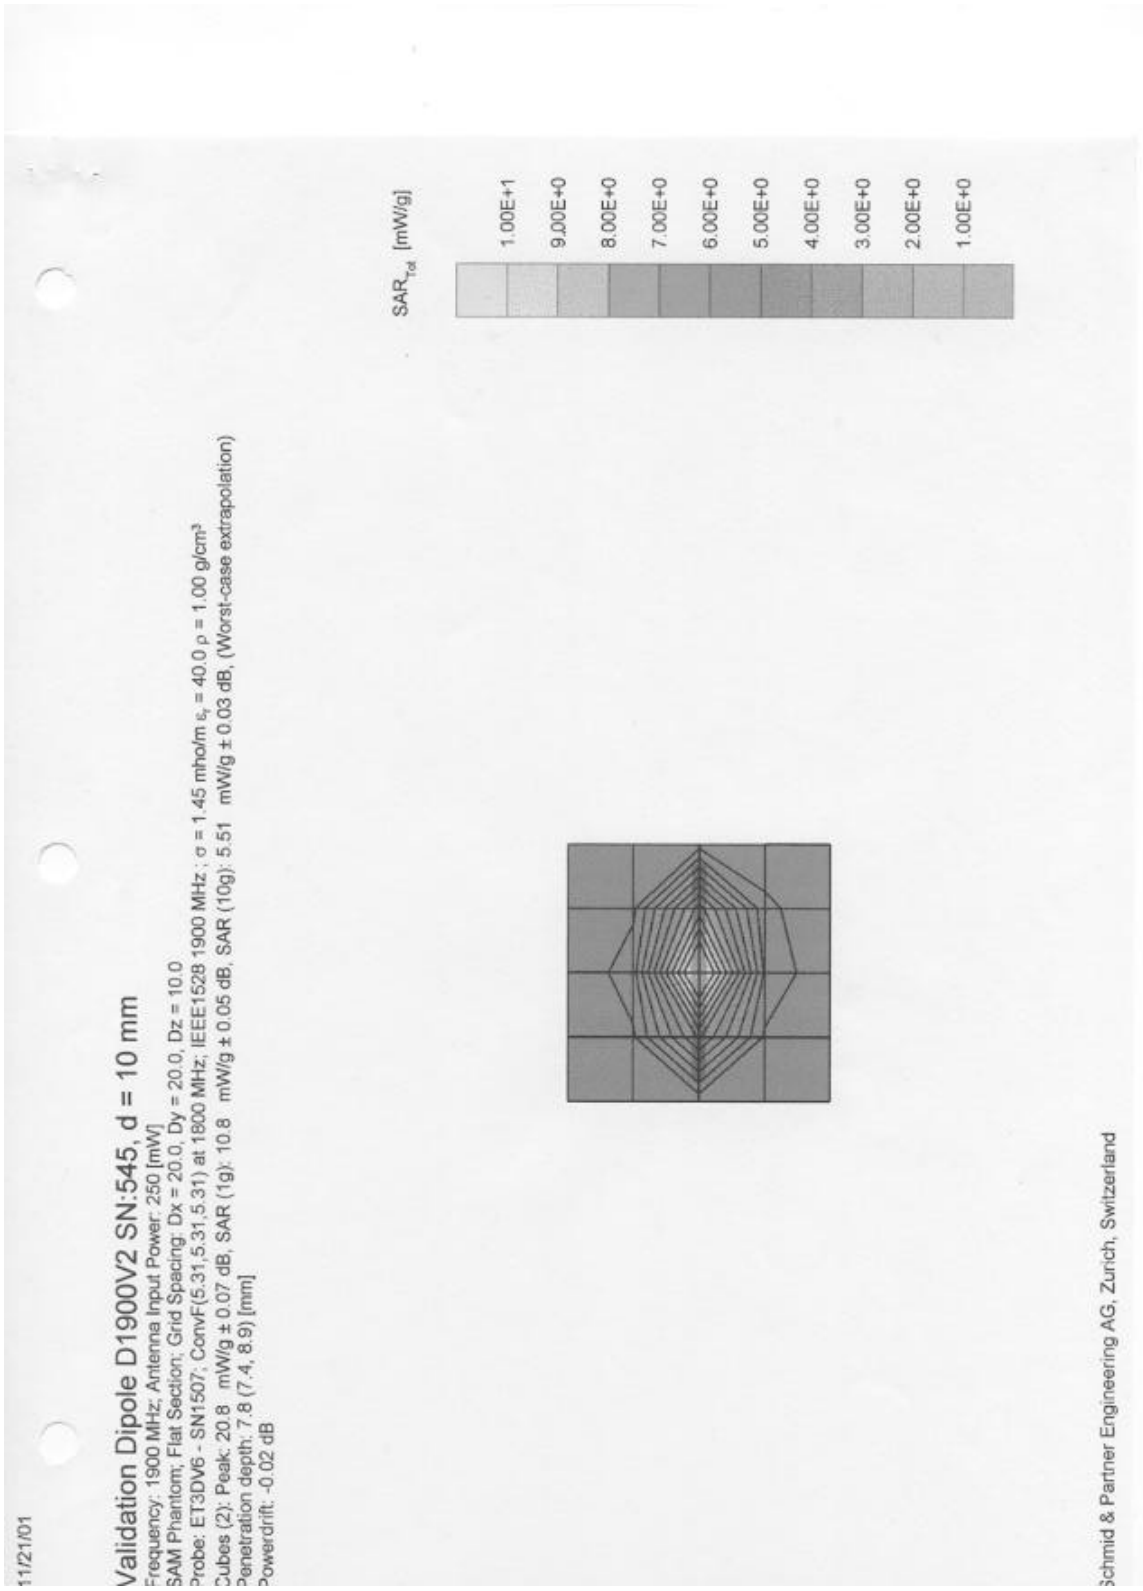




 RESEARCH IN MOTION	Document SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE	Page 62(62)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b> FCC ID <b>L6AR6030GE</b>

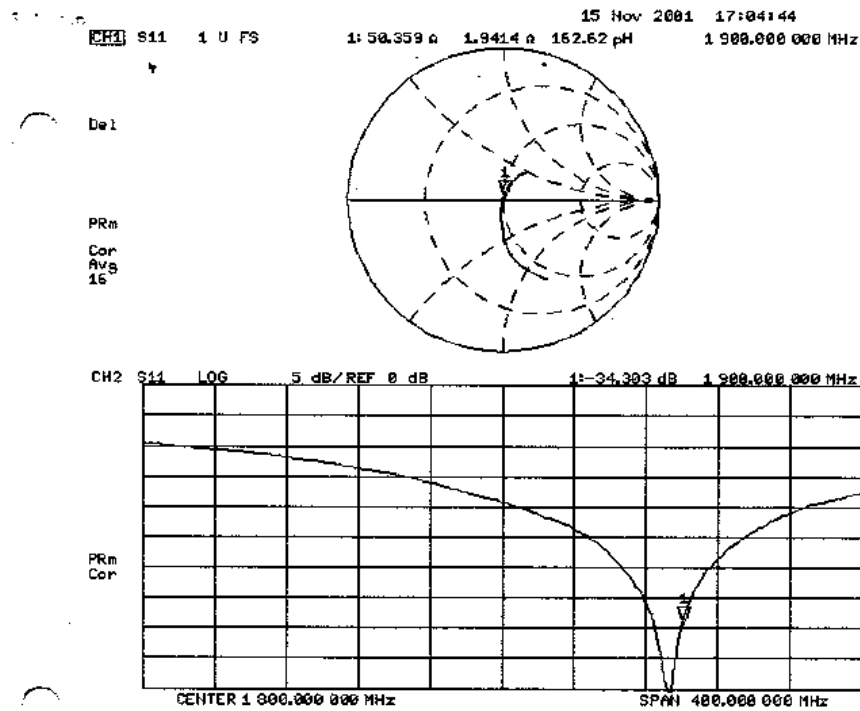


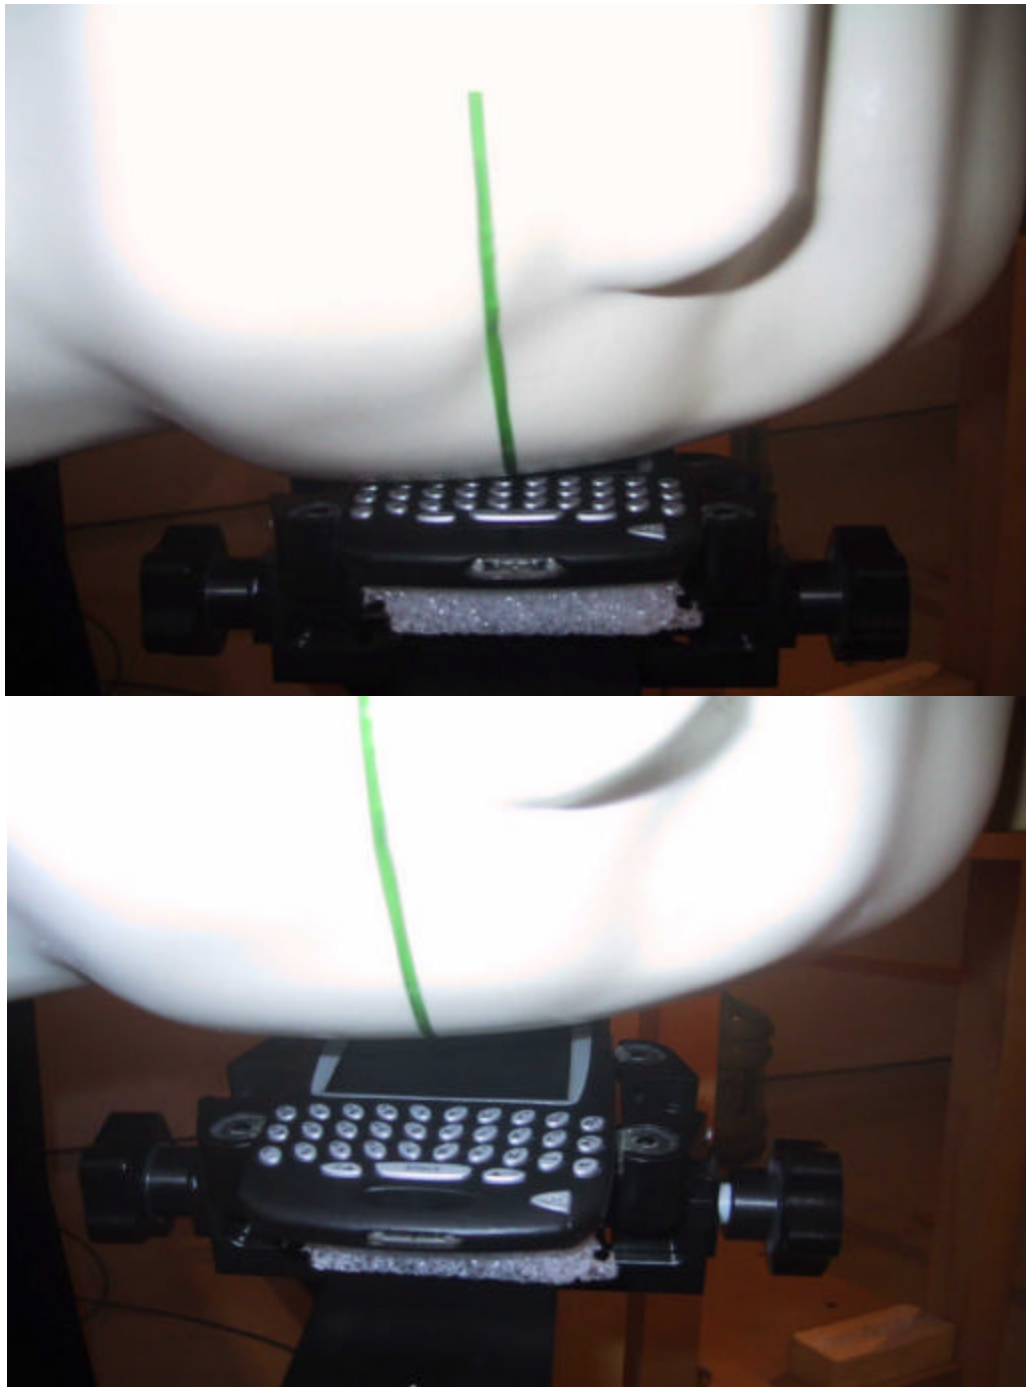


	Document SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			Page 63(63)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	

## APPENDIX E: SAR SET UP PHOTOS




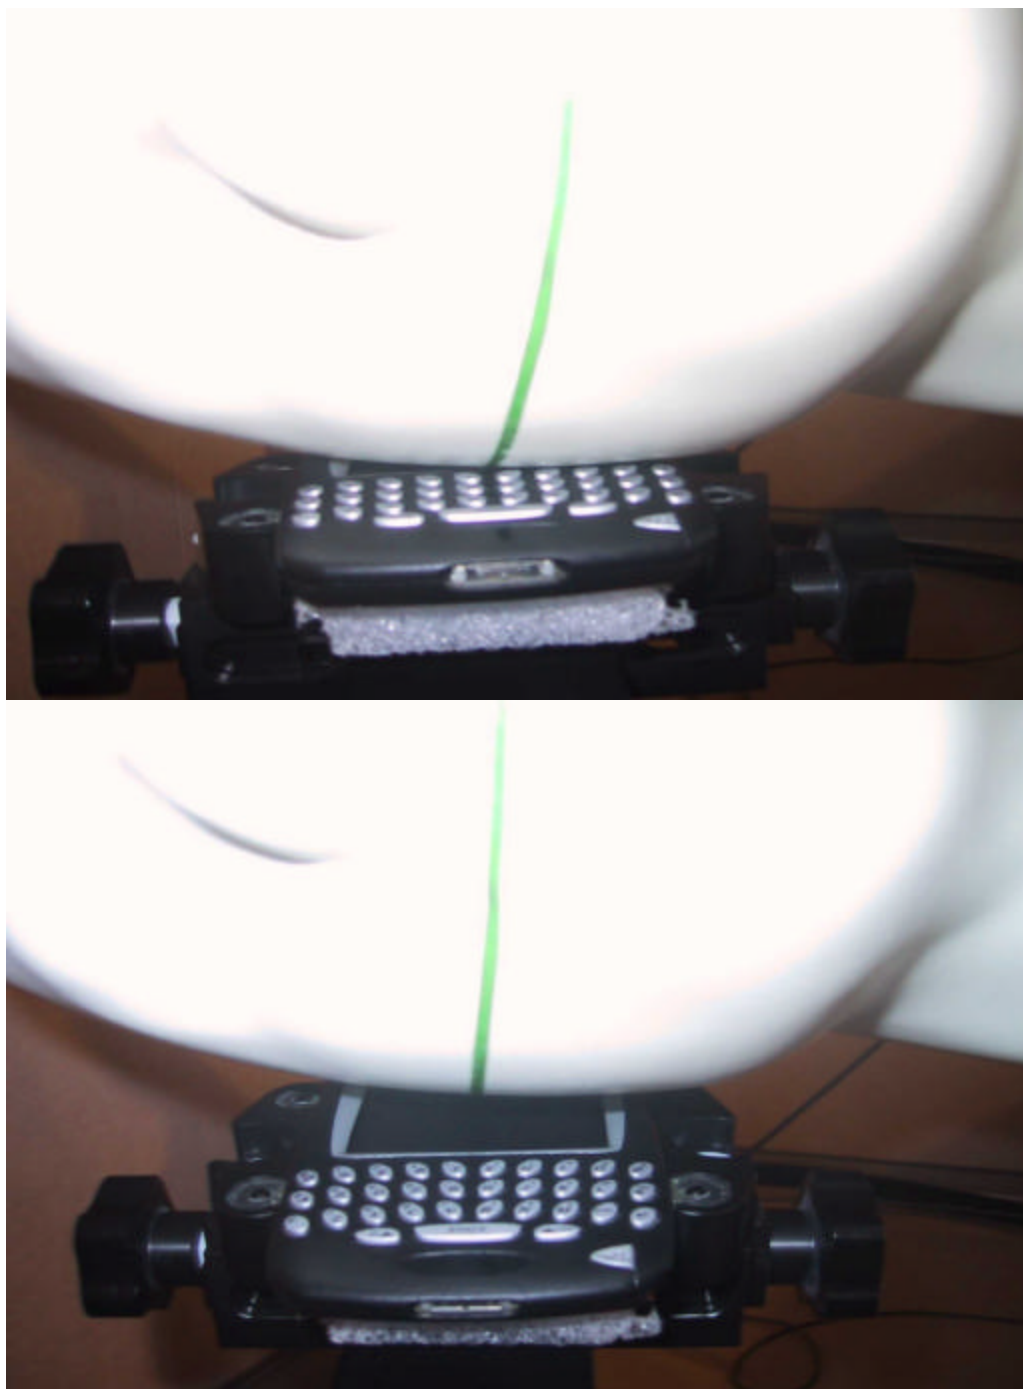
 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			64(64)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	



**Figure E1. Left ear configuration**




 RESEARCH IN MOTION	Document SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			Page 65(65)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	



**Figure E2. Right ear configuration**




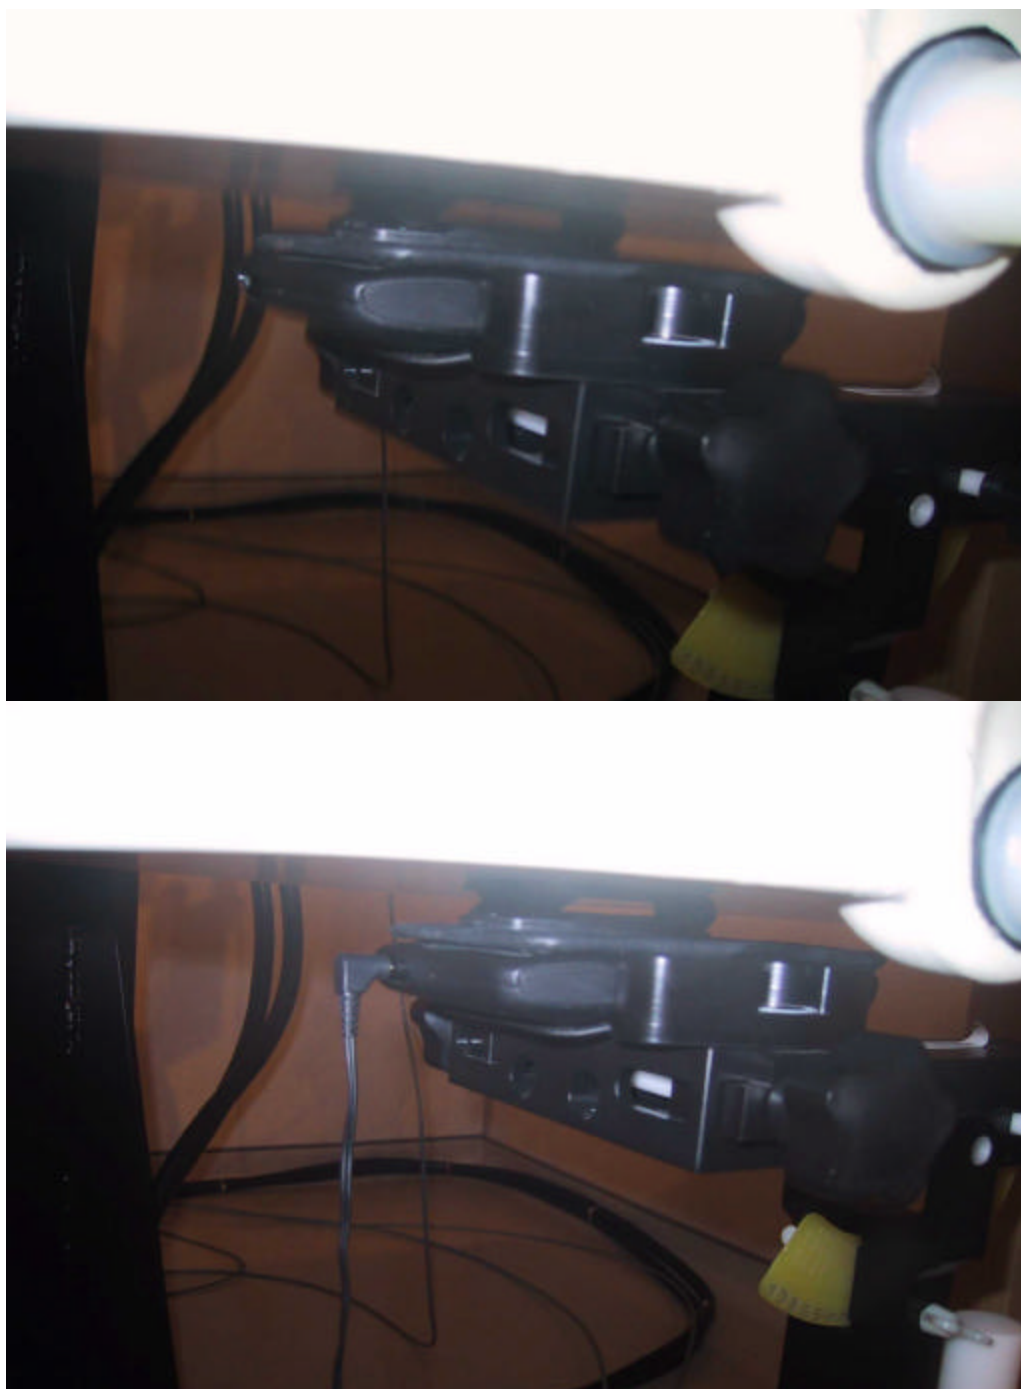
 RESEARCH IN MOTION	Document SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			Page 66(66)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	



**Figure E3. Body worn configuration with Plastic Holster ASY-0399-001 and headset**




 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			67(67)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>July 03 - 04, 2003</b>	Test Report No <b>RIM-0025-0307-01</b>	FCC ID <b>L6AR6030GE</b>	



**Figure E4. Body worn configuration with Leather Swivel Holster HDW-04890-001 and headset**



 RESEARCH IN MOTION	Document			Page
	SAR Compliance Test Report for BlackBerry Wireless Handheld Model No. R6030GE			68(68)
Author Data	Dates of Test	Test Report No	FCC ID	
Daoud Attayi	July 03 - 04, 2003	RIM-0025-0307-01	L6AR6030GE	



**Figure E5. Body worn with Folding Leather Case HDW-04889-001 for inside a shirt pocket configuration front and back side**