

# Test Report

## TEST PROCEDURES AND TEST SITE DESCRIPTION

### MEASUREMENT ITEMS

- 5-1 Field Strength of Spurious Radiated Emission
- 5-2 Power Line Conducted Emissions

NOTE: Measurements in Scan Mode vs. Non-Scan Mode

-----

The measurement data reported in the original file represented a non-scan mode for both of power line conducted emission and spurious radiated emission because no emission level exceeded that of the levels in the scan mode.

In scan mode, the receiver only stays at a particular frequency for as short as 20 ms in certain channels as the scanning interval may change depending on the number of the memorized channels. This means that true emission levels may change along with the number of the memorized channels in the scanning mode due to changes in the duty cycle of the emission level.

Therefore, we measured the device where each memorized channel was scanned for 3 different points of frequencies in each receiver coverage range as shown in the original file and we confirm that no emission level exceeds the level reported from the ones measured in the non-scan mode.

## 5-1 Field Strength of Spurious Radiated Emission

### Test Procedure:

The measurements were performed in accordance with the ANSI C63.4-1992. Field Strength measurements of radiated spurious emissions were made at the open test site of a 3 meter range maintained by Uniden Corporation in Japan. Complete description and measurement data of this test site have been placed on file with the Commission.

The radio frequency spectrum was scanned in the range of 30 MHz to 4 GHz in accordance with the section 15.33(b) of the FCC Rules. The frequency below 1 GHz, the measurement was carried out by using CISPR quasi-peak detector, the Spectrum Analyzer HP E74004A in accordance with the sections 15.33(a) and 15.35(a). The frequency above 1 GHz, the measurement was carried out by using the HP E74004A Spectrum Analyzer in accordance with the section 15.35(b).

A bilog antenna CBL6111 was used to cover the range from 30 MHz to 1000 MHz. Narrowband tuned dipole antennas were used over the entire 30 to 1000 MHz range for precision measurements of field strength. Above 1000 MHz, a horn antenna was used.

For each spurious or harmonic frequency, the antenna was raised and lowered to obtain a maximum reading on the Spectrum Analyzer with antenna horizontally polarized. Then the turntable, on which the equipment under test was placed, was rotated a minimum of 360 degrees to further increase the reading on the Spectrum Analyzer. This procedure was repeated with the antenna vertically polarized. The unit under test was placed in its normal operating position on a turntable approximately 1 meter in height, with a normal power lead.

In order to convert the measured emission levels into field strength in dBuV/m, the actual field strength ( $E_f$ ) is determined by algebraically adding the measured emission level ( $E_m$ ) and the antenna correction factor (ACF) including the cable loss at the appropriate frequency.

$$E_f \text{ [dBuV/m]} = E_m \text{ [dBuV/m]} + \text{ACF [dB]}$$

FCC Limits:

Frequency	Field Strength at 3 meter	
30 - 88 MHz	40 dBuV/m	(100 uV/m)
88 - 216 MHz	43.5 dBuV/m	(150 uV/m)
216 - 960 MHz	46 dBuV/m	(200 uV/m)
Above 960 MHz	54 dBuV/m	(500 uV/m)

Test Results: Refer to the attached test reports. All emissions not reported were more than 20 dB below the limits.

5-2 Power Line Conducted Emissions

Test Procedure:

The measurements were performed in accordance with the ANSI C63.4-1992. During the measurements, a standard voltage source is fed into the unit under test through a power line impedance stabilization network.

FCC Limit:

The radio frequency voltage that is conducted back into the AC power line on any frequencies within the band from 450kHz to 30MHz shall not exceed 250uV (48 dBuV).

Test Results: Refer to the attached test reports. All emissions not reported were more than 20 dB below the limits.

**T E S T   R E S U L T S**  
=====

## 5-1 Test Result: Field Strength of Radiated Emissions

Tuned Frequency (MHz)	Emission Frequency (MHz)	FSM Reading (dBuV)	Amplifier Gain (dB)	Measured Level (dBuV)	Pol.	ACF (dB)	Field Strength (dBuV/m)	FCC Limit (dBuV/m)	MARGIN (dB)
(1) Test Results (25.000 - 54.000 MHz Band)									
25.005	1649.000	51.8	29.0	22.8	H	24.8	47.6	54.0	6.4
49.900	1724.200	50.1	28.9	21.2	V	25.0	46.2	54.0	7.8
(2) Test Results (54.000 - 108.000 MHz Band)									
54.050	1852.250	51.6	28.9	22.7	H	25.0	47.7	54.0	6.3
72.005	1344.975	46.1	29.0	17.1	V	25.0	42.1	54.0	11.9
107.900	1468.000	51.9	29.0	22.9	H	24.8	47.7	54.0	6.3
(3) Test Results (108.000 - 137.000 MHz Band)									
118.800	1498.000	52.1	29.0	23.1	V	24.8	47.9	54.0	6.1
127.175	1522.000	53.0	29.0	24.0	V	24.8	48.8	54.0	5.2
135.500	1571.000	52.8	29.0	23.8	H	24.8	48.6	54.0	5.4
(4) Test Results (137.000 - 174.000 MHz Band)									
138.150	1587.000	53.5	29.0	24.5	H	24.8	49.3	54.0	4.7
162.400	1344.975	47.9	29.0	18.9	V	25.0	43.9	54.0	10.1
173.225	1108.575	48.3	29.1	19.2	V	22.5	41.7	54.0	12.3
(5) Test Results (174.000 - 311.000 MHz Band)									
197.750	1734.050	52.2	29.0	23.2	V	25.0	48.2	54.0	5.8
216.050	1344.975	46.7	29.0	17.7	V	25.0	42.7	54.0	11.3
310.9875	1344.975	47.0	29.0	18.0	V	25.0	43.0	54.0	11.0
(6) Test Results (311.000 - 512.000 MHz Band)									
311.0500	896.800	50.4	29.0	21.4	V	19.3	40.7	46.0	5.3
406.875	896.800	50.1	29.0	21.1	V	19.3	40.4	46.0	5.6
511.9125	896.800	50.2	29.0	21.2	V	19.3	40.5	46.0	5.5
(7) Test Results (806.000 - 1300.000 MHz Band)									
806.000	1699.575	51.3	29.1	22.2	V	25.0	47.2	54.0	6.8
857.200	1906.425	49.5	28.9	20.6	V	28.1	48.7	54.0	5.3
954.9125	1724.200	53.8	28.9	24.9	V	22.5	47.4	54.0	6.6
1240.0000	2569.000	55.2	29.1	26.1	H	23.9	50.0	54.0	4.0
1299.9125	1837.475	52.2	29.0	23.2	H	25.0	48.2	54.0	5.8

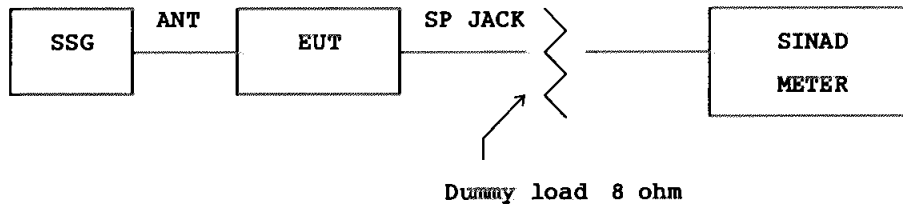
Note: Other emissions not reported were more than 20dB below the FCC limits.

**5-3 Test Result: Cellular image rejection**

15.121(b)

**Rationale:**

In order for measuring image(spurious) rejection ratio on scanning receiver, use of one SSG method would be suitable rather than two or three SSG method since cellular image reception would be considered as unwanted reception solely at outside of cellular band.

**Test set-up:**

Conditions: AF Signal : 1 kHz  
 Deviation : +/- 3kHz (for frequency modulation)  
 Modulation : 60 % (for amplitude modulation)

Test frequencies: 824.01MHz, 836.52MHz, 849.00MHz  
 869.01MHz, 881.52MHz, 894.00MHz

**A) Initial screening**

- A-1) Disable the output signal of SSG. Disconnect dummy load and enable the EUT to confirm the presence of audio noise on speaker.
- A-2) Set the EUT with "Squelched Threshold" to prevent audio signal.
- A-3) Set the frequency of SSG to cellular band, and apply 60dBuV of RF output to EUT. Note that 60dBuV signal level corresponds approx. 66dB above the "Squelched Threshold" sensitivity of -6dBuV (not, receiving sensitivity). This is approx. 28dB (= 66 - 38) above the FCC limit.
- A-4) Enable EUT and search the cellular frequencies on the all of receiving range.
- A-5) List the all of detected frequencies if EUT detects them, and the following steps shall be taken to determine the actual image rejection ratio individually.
- A-6) Repeat the above procedure for remaining frequencies.
- A-7) Go to Part B of the test.

**B) Measuring the image rejection ratio**

- B-1) Based on Initial screening, both of EUT and SSG shall be set to the frequency at which obtained in A-5) in the above. Connect the dummy load and set the squelch volume of EUT to unsquelched for obtaining the audio signal.
- B-2) Adjust and record the RF output of SSG to obtain 12dB SINAD on EUT. SSG level at which obtaining the 12dB SINAD is receiving sensitivity of EUT (not, tight squelch sensitivity).
- B-3) Adjust the frequency of SSG to the corresponded cellular frequency associated with A-5. Adjust and record the RF output of SSG to obtain 12dB SINAD on EUT.
- B-4) Image rejection ratio is obtained as differences between B-2) and B-3).

## CELL

## C) Test Data

Spec. : At least 38dB

UB-305C (BC780XLT-VA1)

Cellular Frequency (MHz)	Image/spurious (Frequency stopped on EUT) (MHz)	Image Rjection Ratio (dB)
824.01	62.6500	43.5
	809.1625	52.0
	853.7125	62.5
	914.0125	48.5
	1280.5625	61.0
836.52	75.2800	46.5
849.00	29.2000	49.5
	819.3000	63.0
	819.8000	53.0
	850.4000	67.0
	851.1000	62.5
	851.2500	62.5
	863.8500	50.0
	919.5000	58.5
	919.7500	59.0
	919.8750	59.0
	939.0000	55.0
	940.8000	61.0
	1274.7000	53.0
	1274.7625	53.5
	1274.7750	53.5
	1274.7500	56.5
869.01	107.6000	43.5
	807.2875	66.5
	854.1625	52.0
	898.7125	65.0
881.52	120.2750	49.0
	913.4875	69.5
894.00	44.2000	57.5
	132.6000	49.5
	815.5000	68.0
	849.4500	69.0
	849.8000	54.0
	864.3000	64.5
	908.8500	51.5
	918.3000	63.0
	923.7000	64.0



## 5-2 Test Result: Power Line Conducted Emissions

Tuned Frequency (MHz)	Emission Frequency (MHz)	Measured Level (dBuV)
25.0050	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	
72.0050	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	
127.1750	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	
162.4000	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	
216.0500	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	
406.8750	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	
857.2000	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	
1299.9125	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	

All emissions not reported were more than 20 dB below the limit.  
(See attached example for 25.005MHz reception.)

