


EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

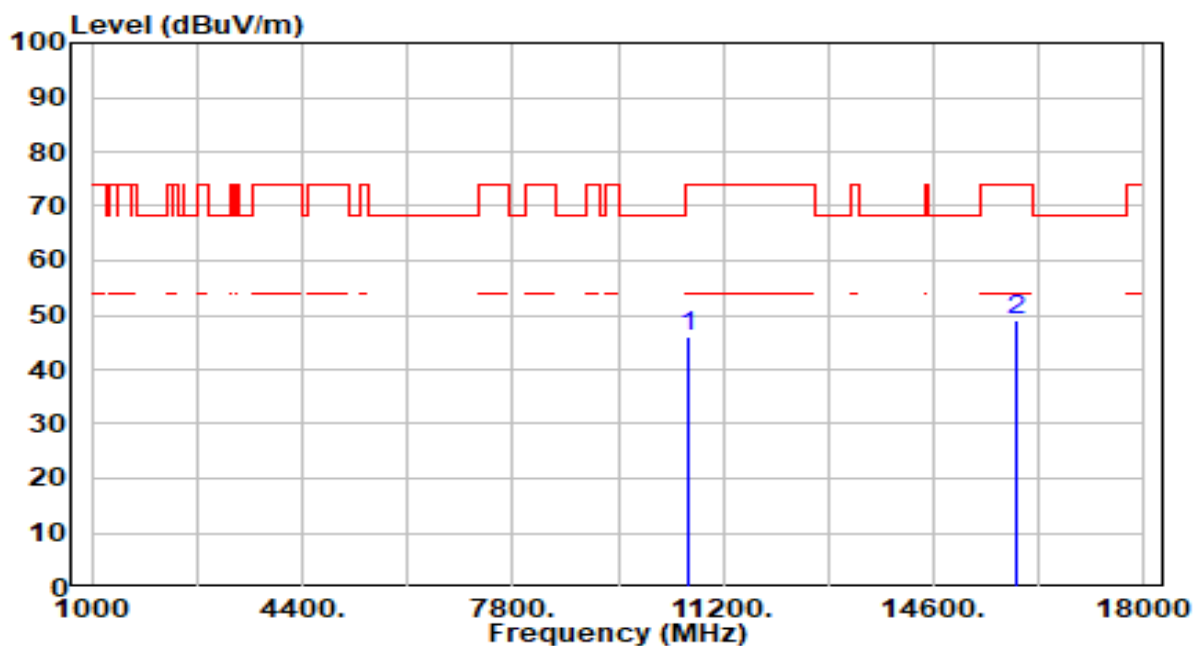


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10620.000	41.58	4.56	46.14	-27.86	74.00	100	69	Peak
2	*	15930.000	42.36	6.66	49.02	-24.98	74.00	100	16	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

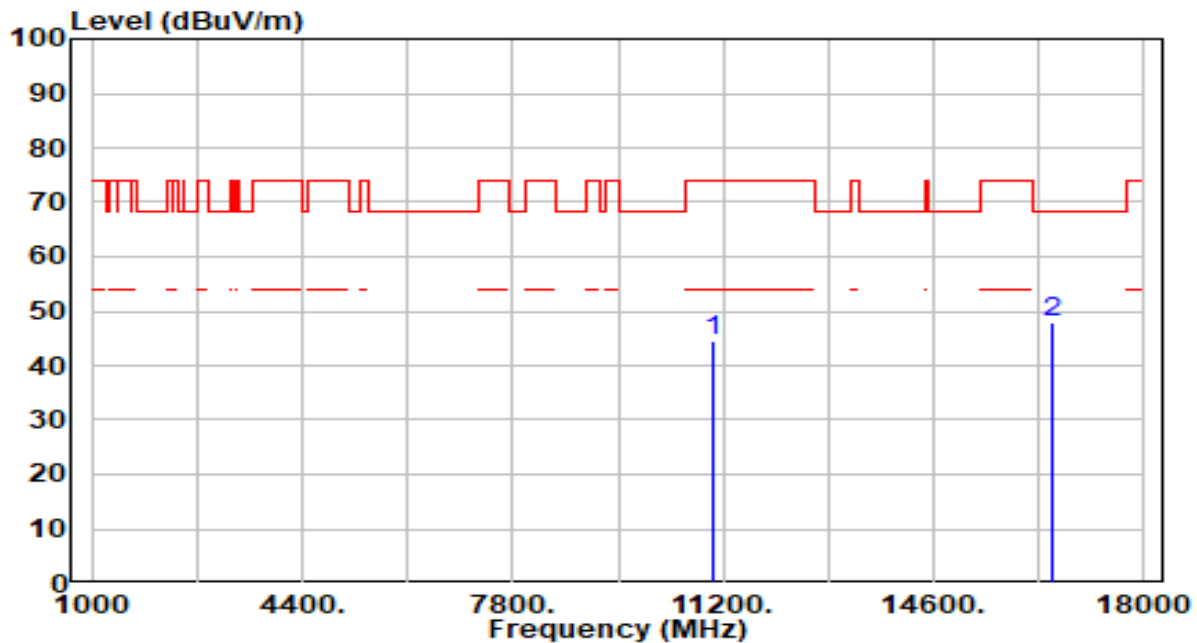


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	40.06	4.49	44.55	-29.45	74.00	100	233	Peak
2	*	16530.000	42.06	6.05	48.10	-20.10	68.20	100	166	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

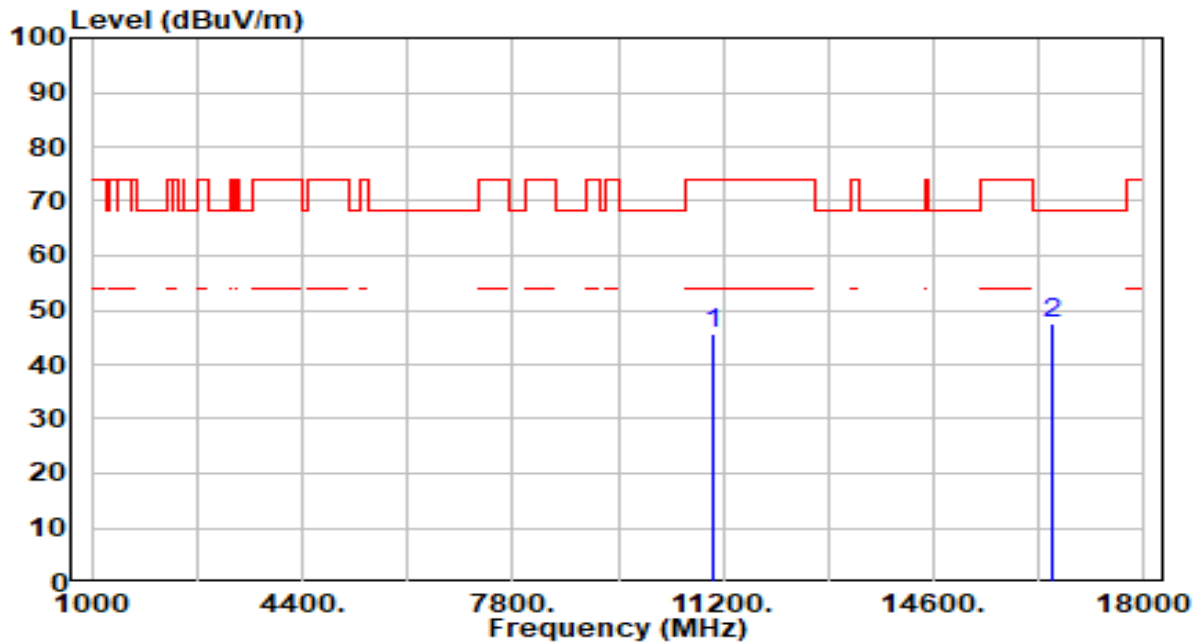


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	41.08	4.49	45.57	-28.43	74.00	100	214	Peak
2	*	16530.000	41.36	6.05	47.40	-20.80	68.20	100	18	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 110_ANT 0+1	Test Voltage	By PoE

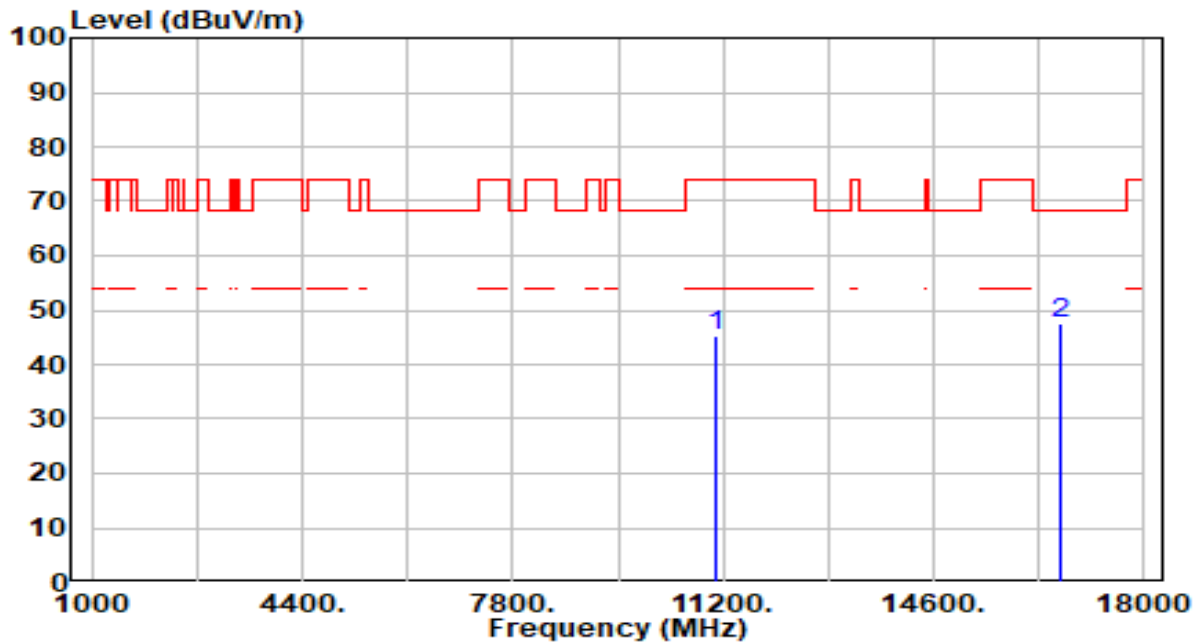


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	40.53	4.71	45.24	-28.76	74.00	100	62	Peak
2	*	16650.000	41.63	6.00	47.63	-20.57	68.20	100	75	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 110_ANT 0+1	Test Voltage	By PoE

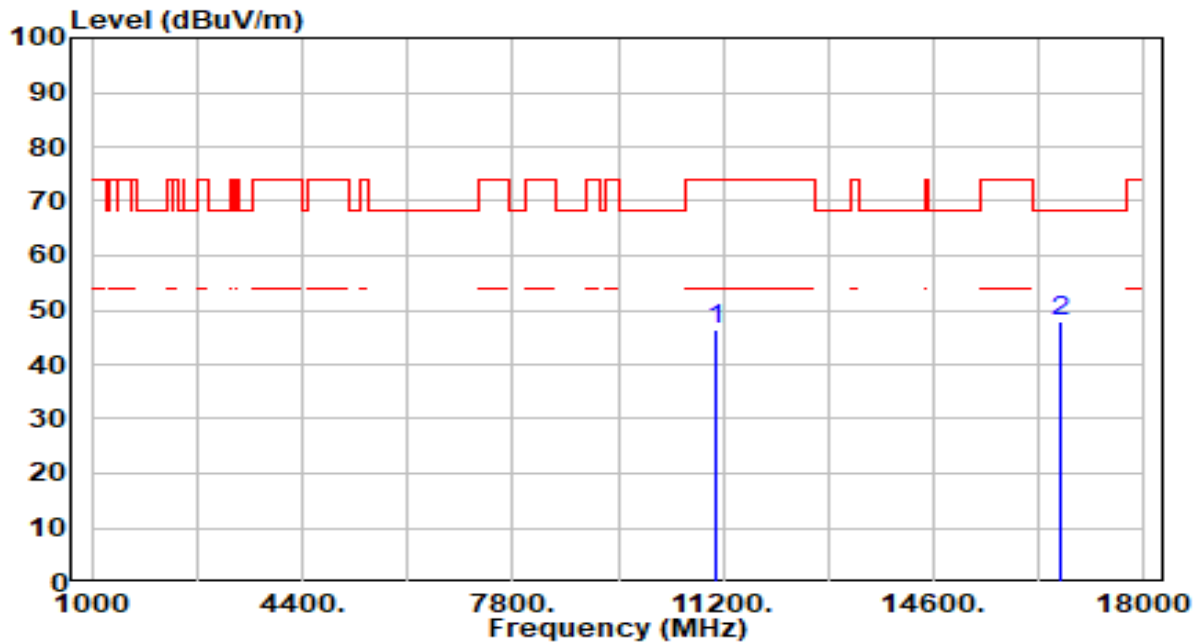


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	41.64	4.71	46.35	-27.65	74.00	100	88	Peak
2	*	16650.000	41.95	6.00	47.95	-20.25	68.20	100	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	By PoE

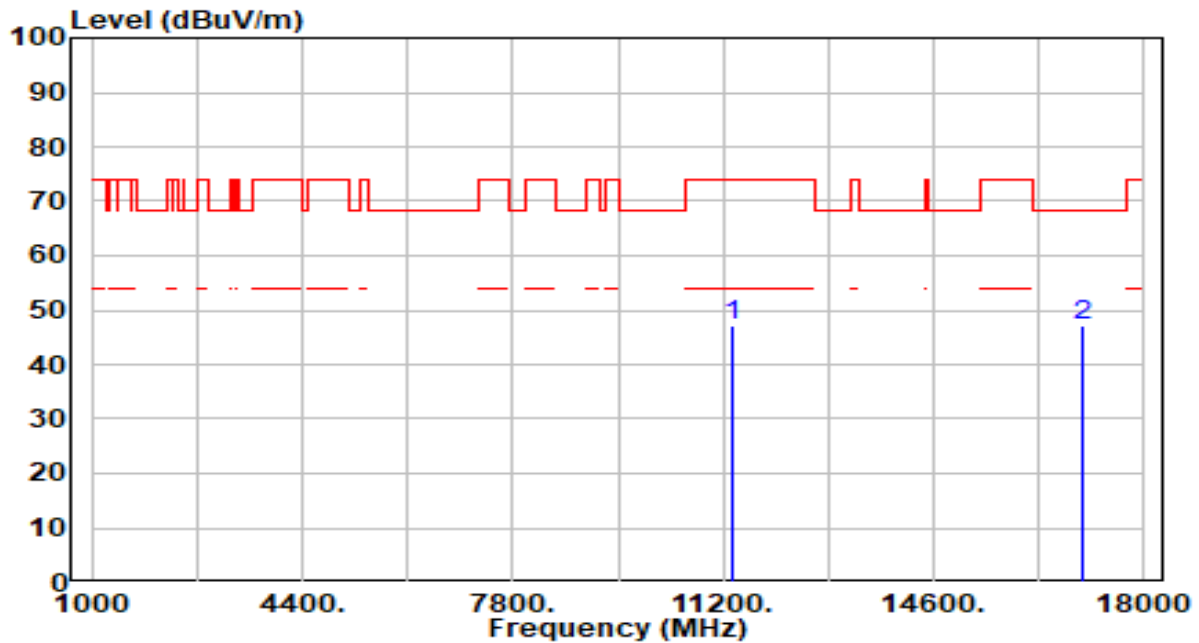


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	41.93	5.14	47.08	-26.92	74.00	100	53	Peak
2	*	17010.000	41.49	5.74	47.23	-20.97	68.20	100	151	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	By PoE

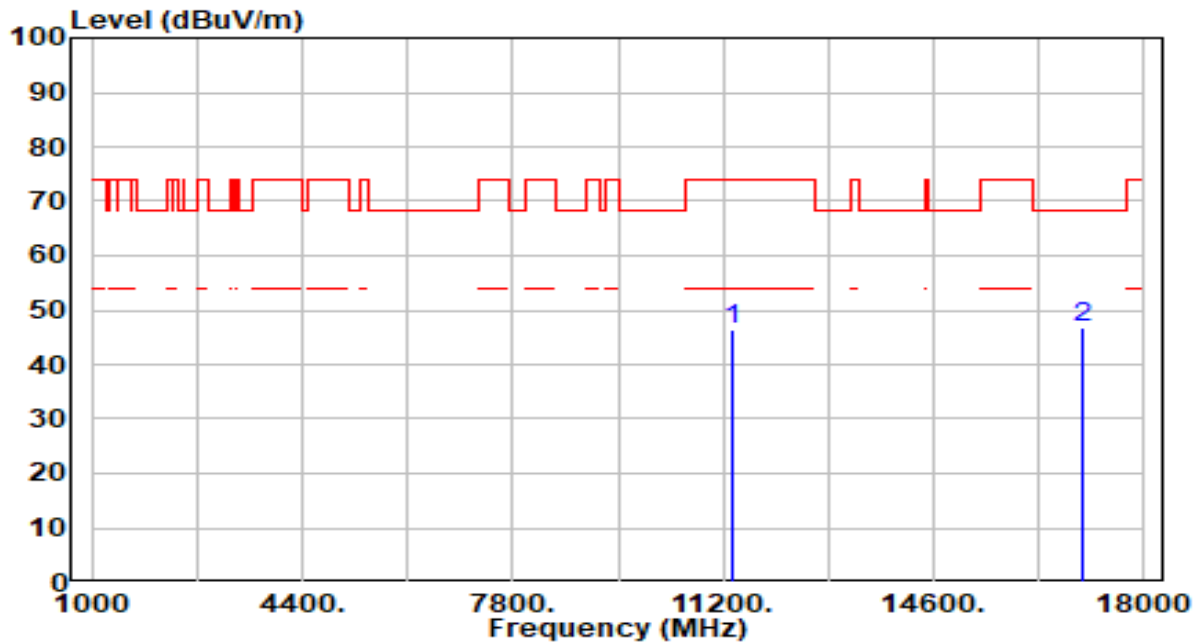


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	41.28	5.14	46.42	-27.58	74.00	100	354	Peak
2	*	17010.000	41.04	5.74	46.78	-21.42	68.20	100	38	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 142_ANT 0+1	Test Voltage	By PoE

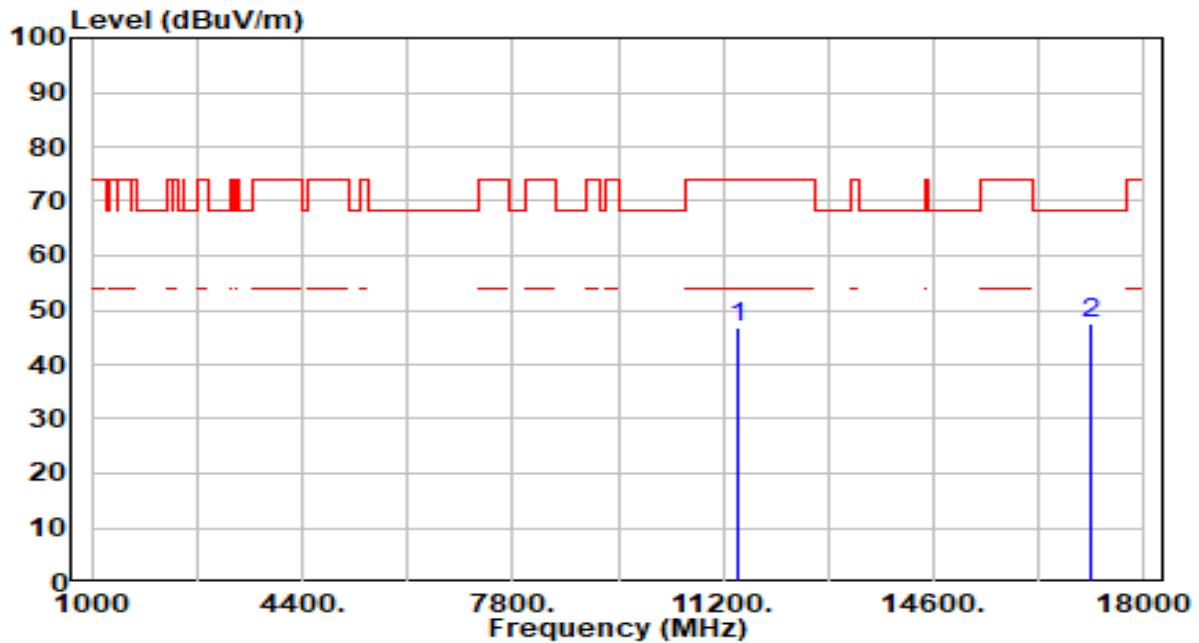


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	41.58	5.23	46.81	-27.19	74.00	100	281	Peak
2	*	17130.000	42.20	5.48	47.68	-20.52	68.20	100	78	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 142_ANT 0+1	Test Voltage	By PoE

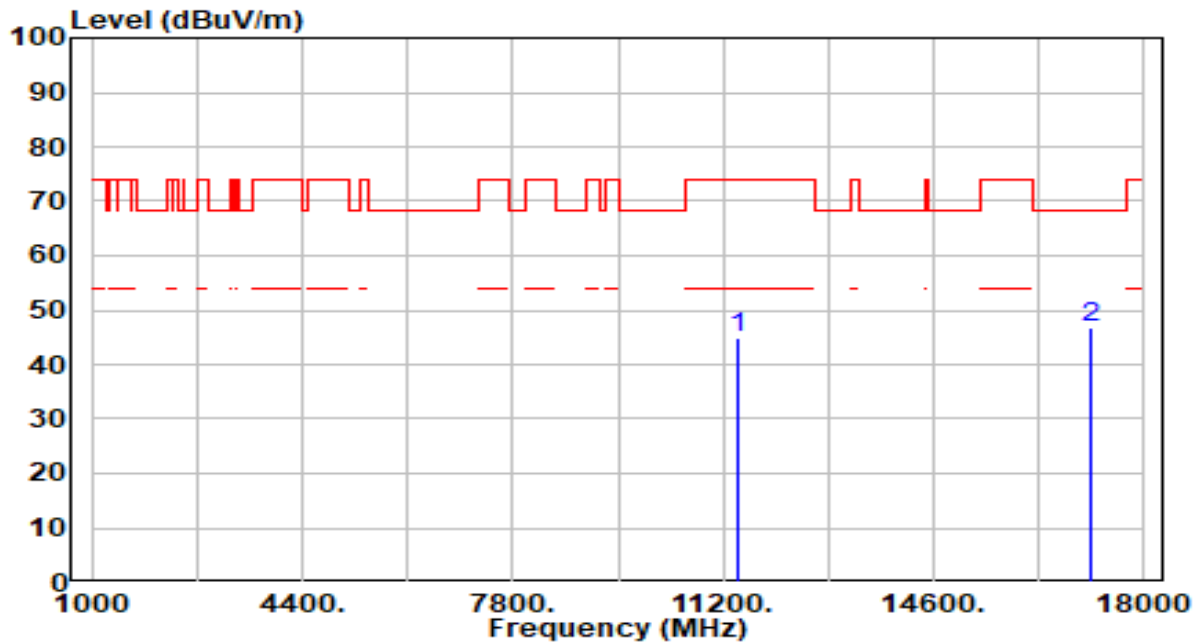


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	39.80	5.23	45.03	-28.97	74.00	100	151	Peak
2	*	17130.000	41.24	5.48	46.71	-21.49	68.20	100	91	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	By PoE

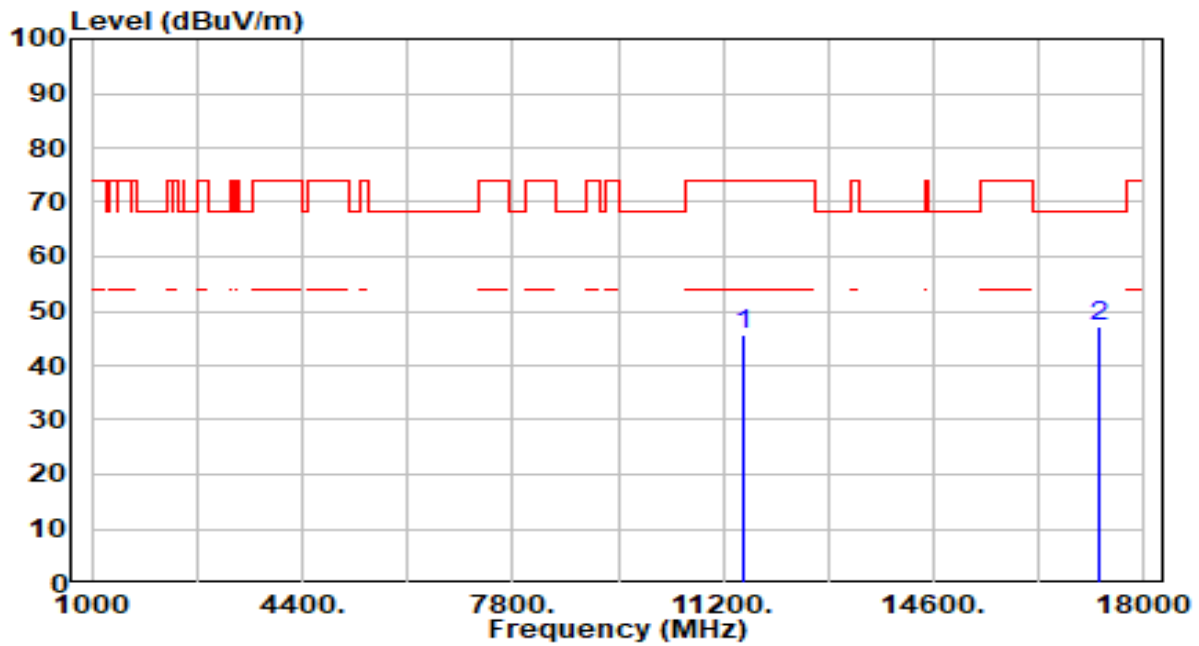


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	40.19	5.29	45.48	-28.52	74.00	100	230	Peak
2	* 17265.000	42.03	5.18	47.21	-20.99	68.20	100	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	By PoE

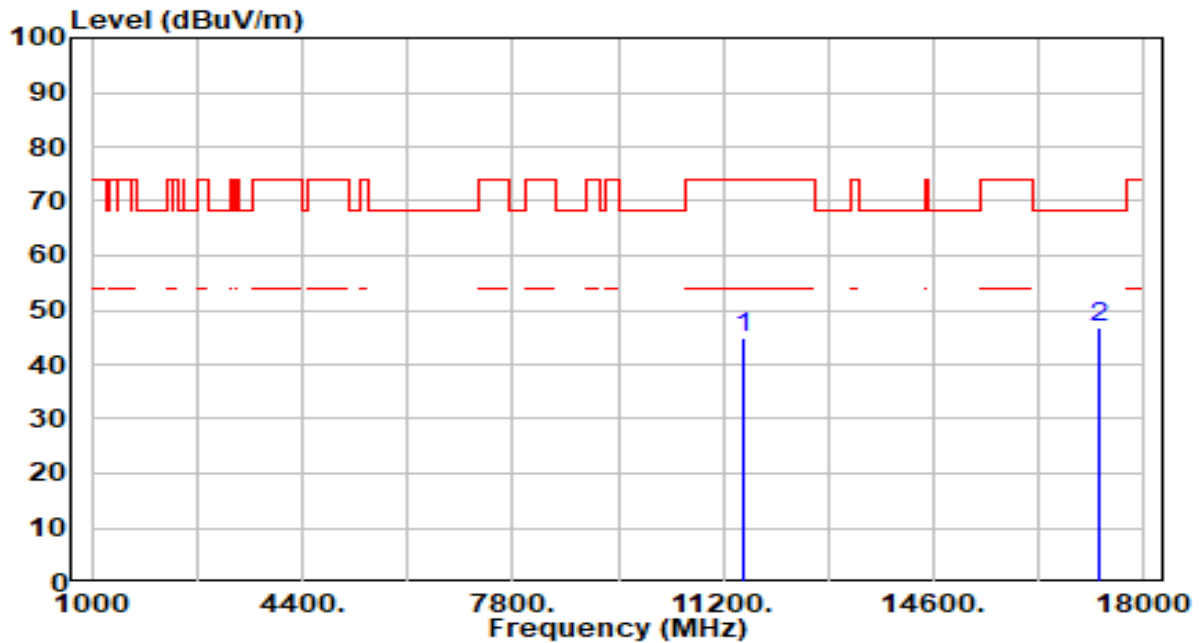


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	39.54	5.29	44.83	-29.17	74.00	100	10	Peak
2	*	17265.000	41.43	5.18	46.61	-21.59	68.20	100	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	By PoE

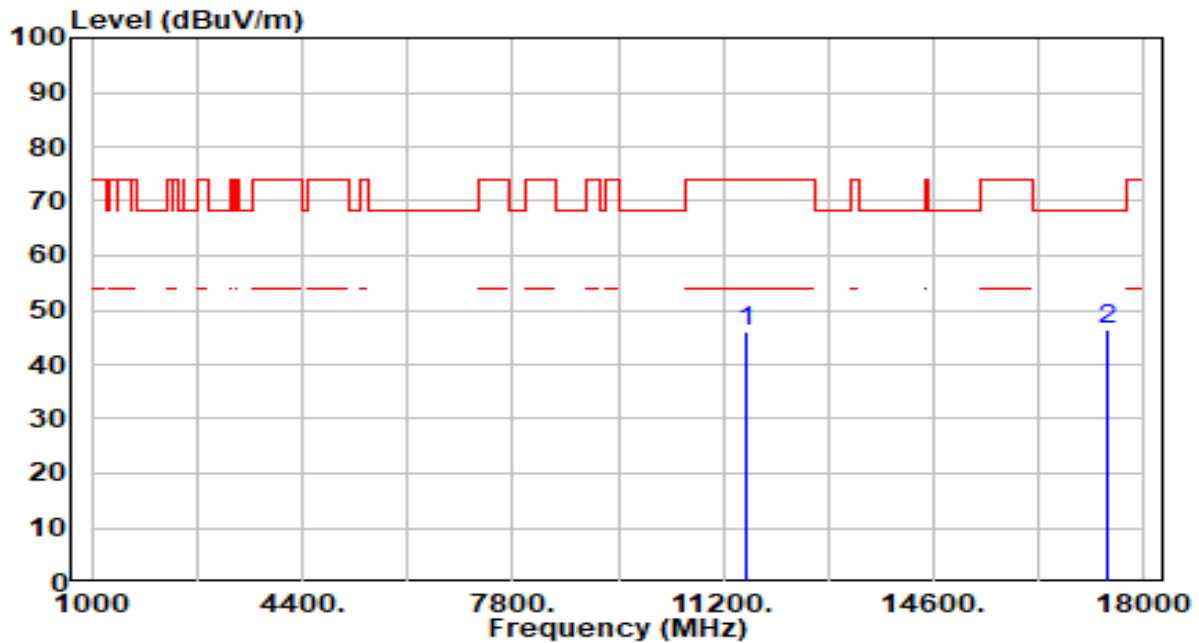


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	40.63	5.37	46.00	-28.00	74.00	100	111	Peak
2	*	17385.000	41.67	4.92	46.59	-21.61	68.20	100	222	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	By PoE

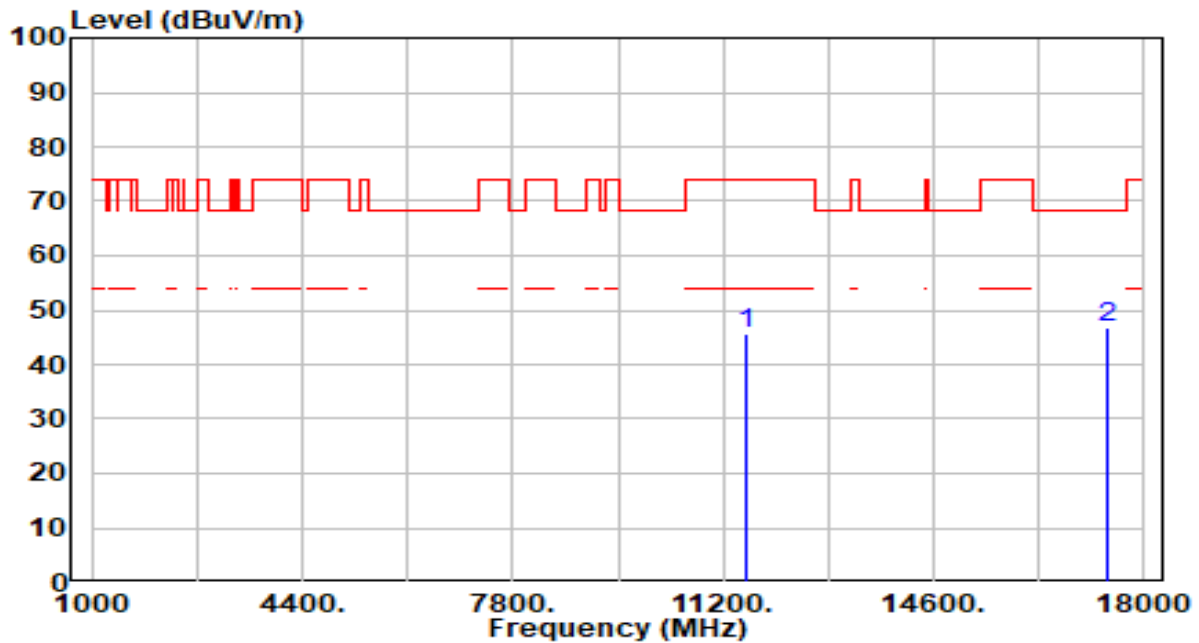


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	40.27	5.37	45.63	-28.37	74.00	100	141	Peak
2	*	17385.000	41.87	4.92	46.79	-21.41	68.20	100	177	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

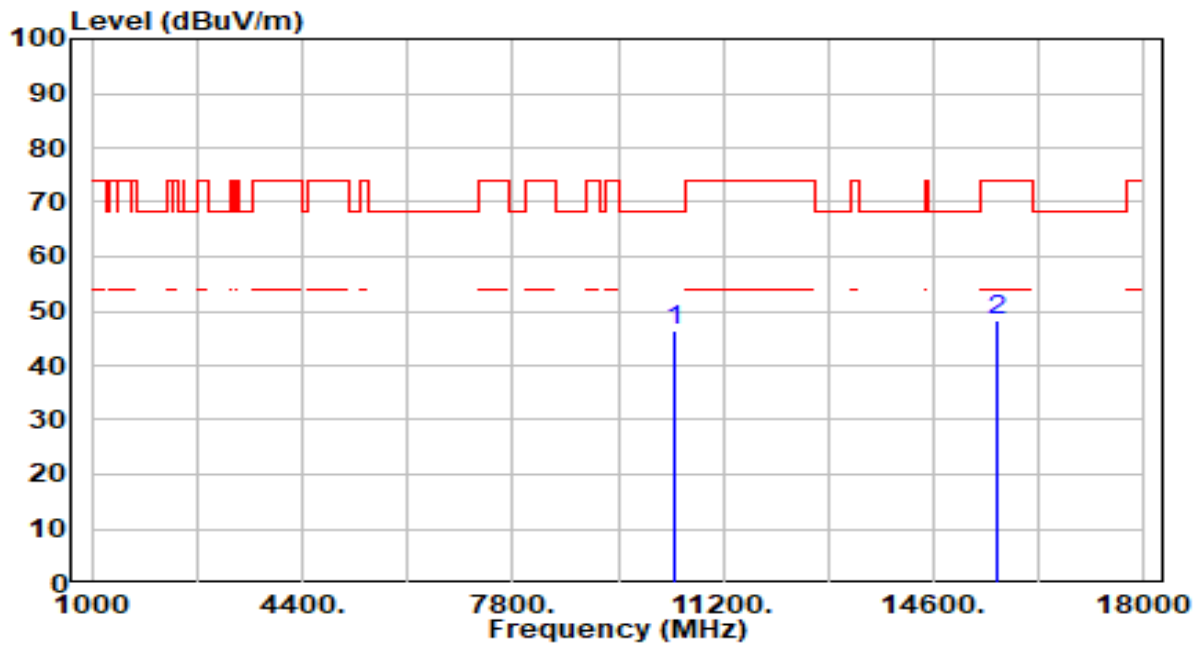


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	41.56	4.74	46.30	-21.90	68.20	100	312	Peak
2		15630.000	42.19	6.25	48.45	-25.55	74.00	100	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

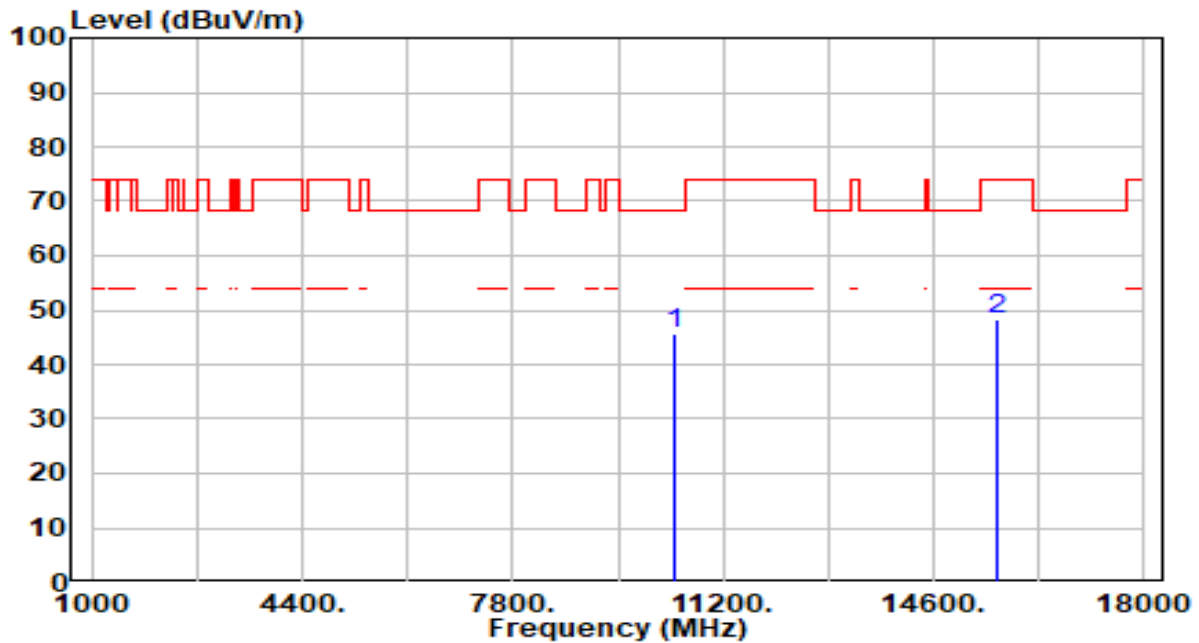


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	41.08	4.74	45.83	-22.37	68.20	100	78	Peak
2		15630.000	42.04	6.25	48.30	-25.70	74.00	100	102	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

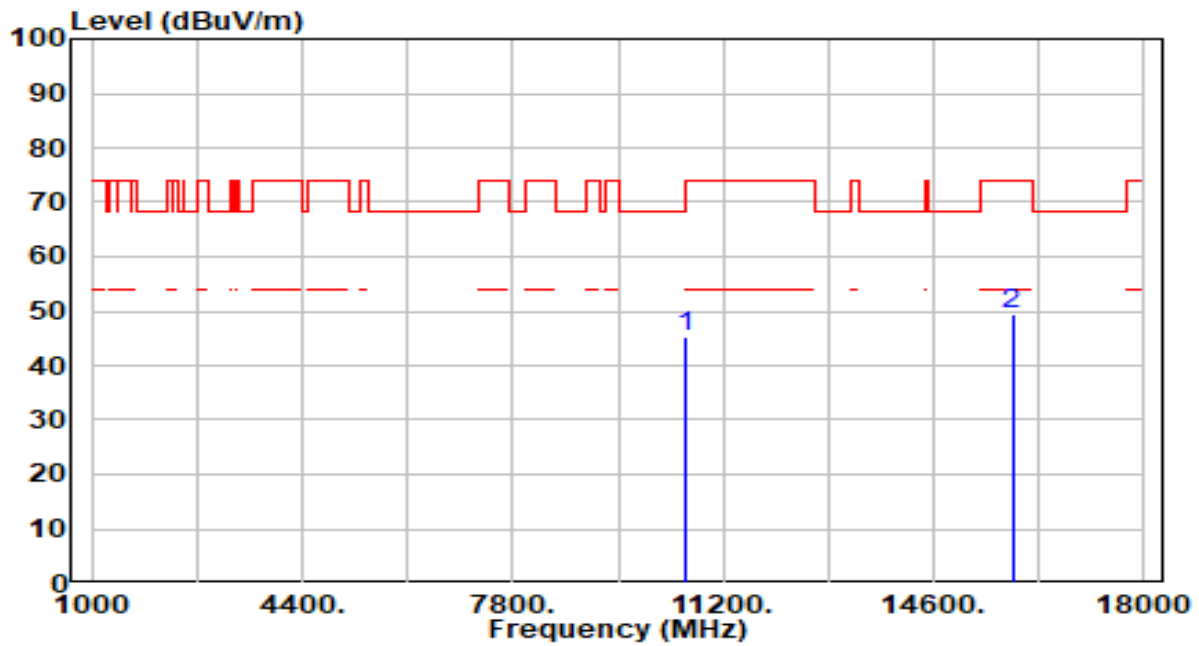


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	40.85	4.56	45.42	-22.78	68.20	100	96	Peak
2		15870.000	42.88	6.63	49.51	-24.49	74.00	100	19	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

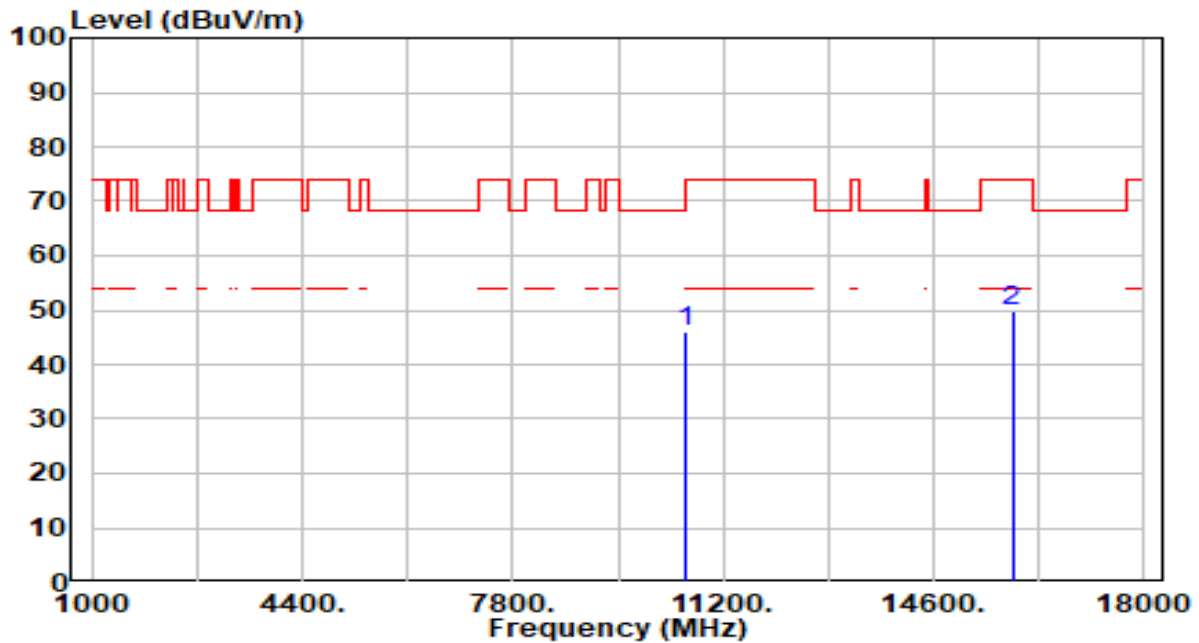


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	41.41	4.56	45.98	-22.22	68.20	100	186	Peak
2		15870.000	43.36	6.63	49.99	-24.01	74.00	100	177	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

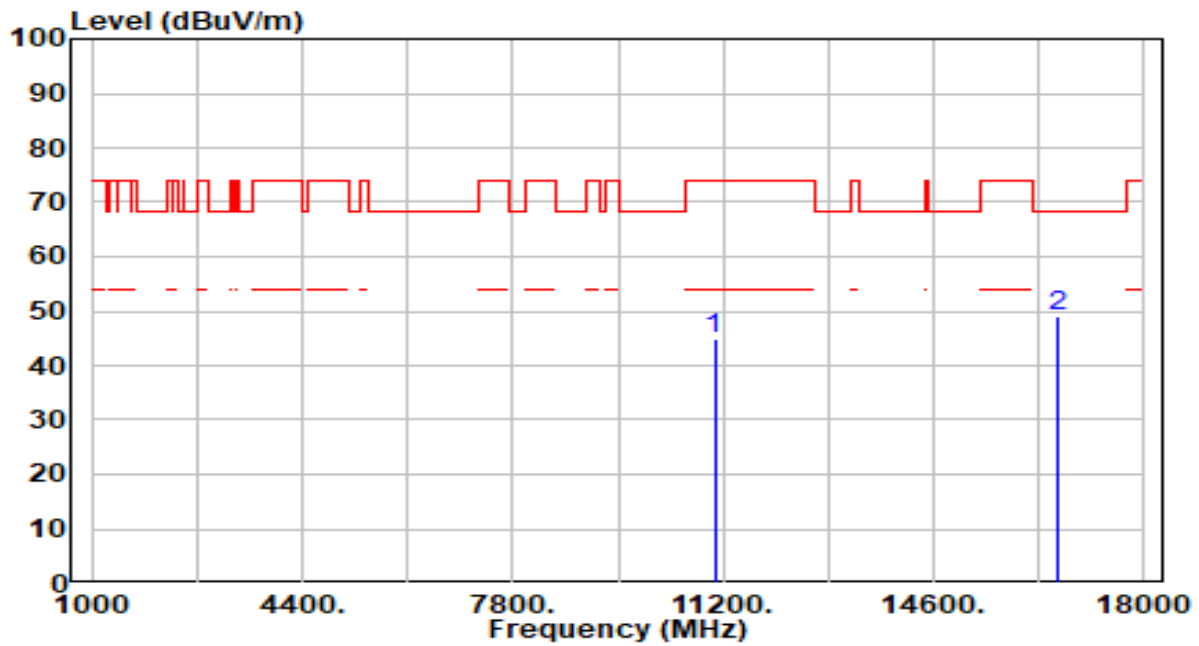


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	40.35	4.60	44.96	-29.04	74.00	100	126	Peak
2	* 16590.000	42.99	6.00	48.99	-19.21	68.20	100	44	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

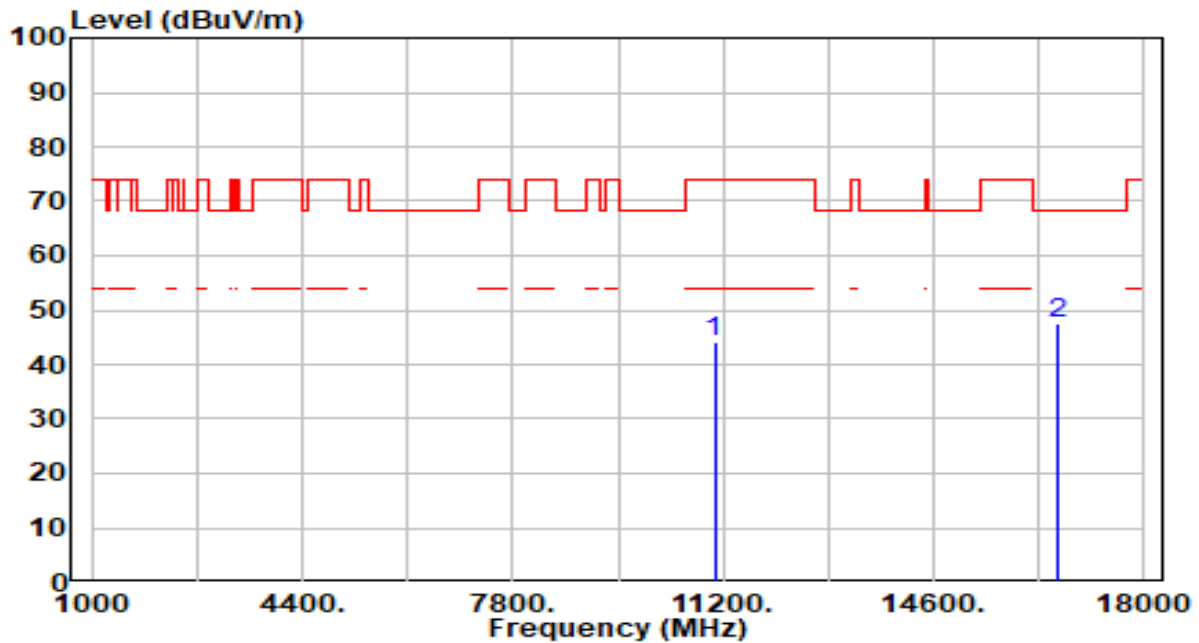


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11060.000	39.69	4.60	44.29	-29.71	74.00	100	198	Peak
2	*	16590.000	41.53	6.00	47.53	-20.67	68.20	100	204	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	By PoE

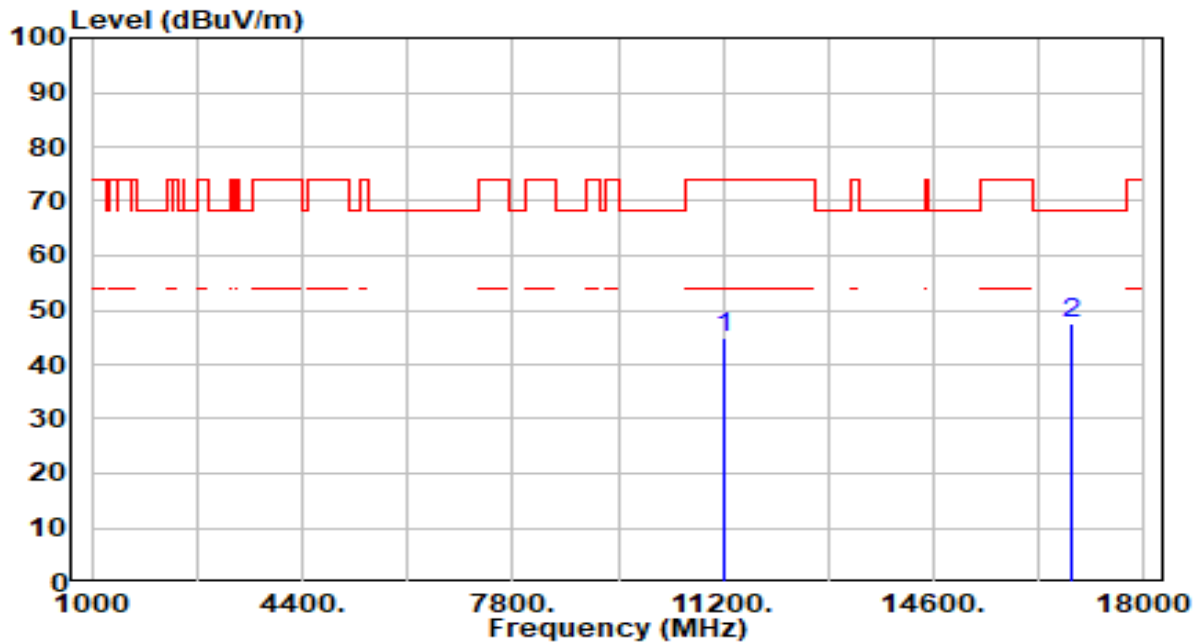


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	39.78	5.00	44.79	-29.21	74.00	100	190	Peak
2	*	16830.000	41.39	5.98	47.38	-20.82	68.20	100	198	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	By PoE

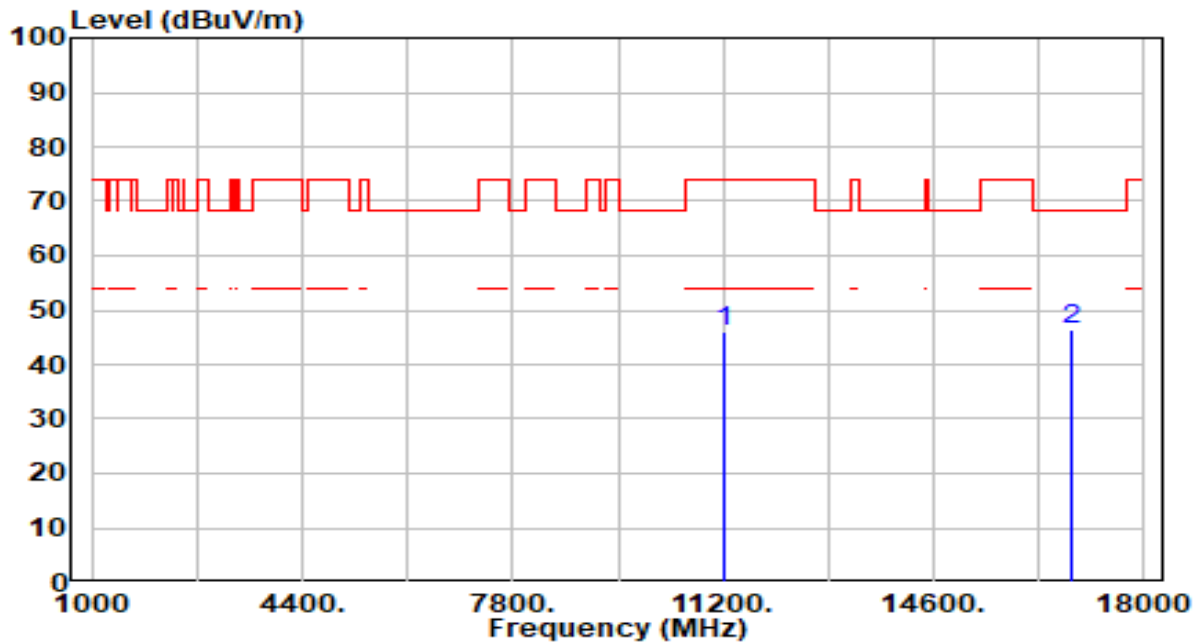


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	41.11	5.00	46.11	-27.89	74.00	100	146	Peak
2	*	16830.000	40.27	5.98	46.25	-21.95	68.20	100	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	By PoE

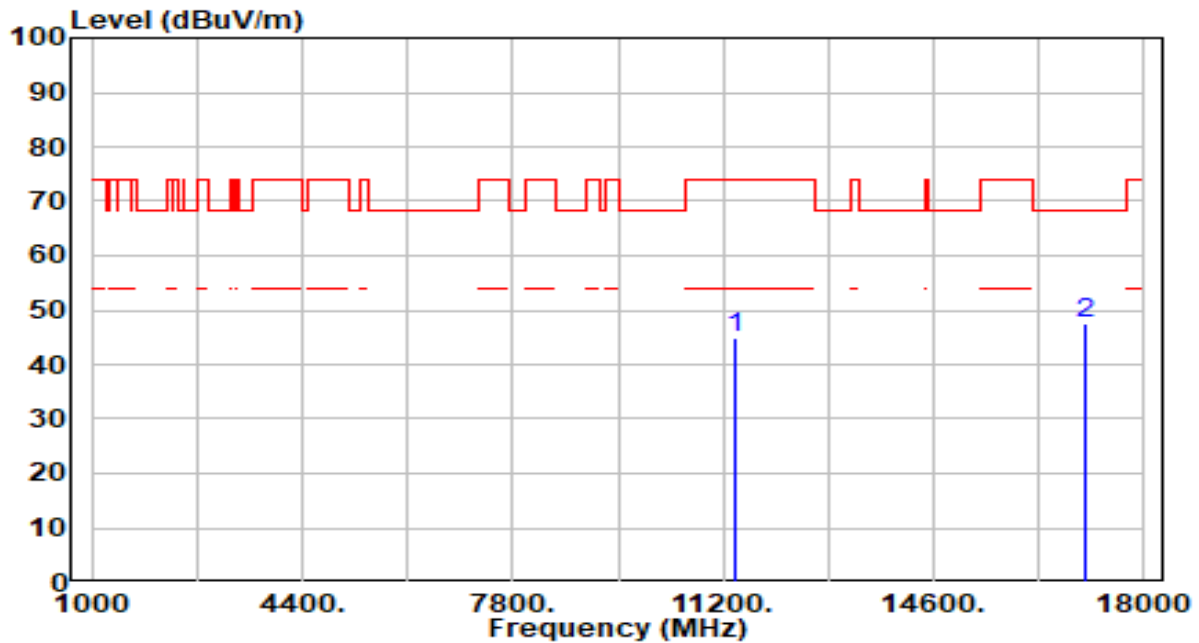


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	39.89	5.19	45.08	-28.92	74.00	100	228	Peak
2	*	17070.000	41.82	5.61	47.43	-20.77	68.20	100	244	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	By PoE

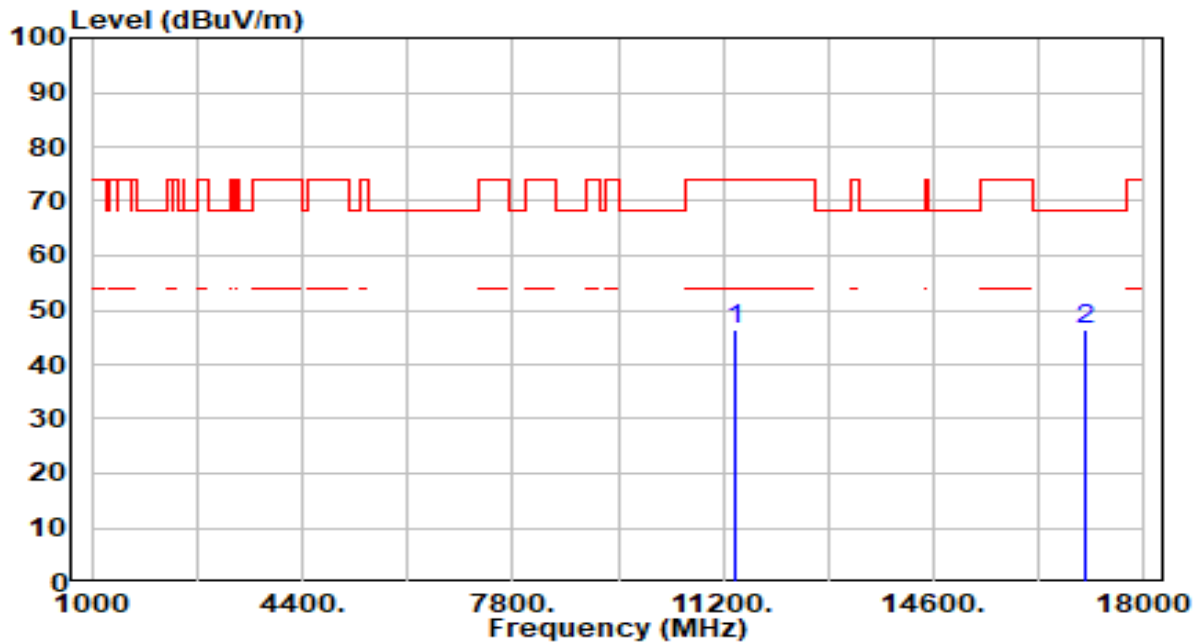


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	41.29	5.19	46.49	-27.51	74.00	100	0	Peak
2	*	17070.000	40.80	5.61	46.41	-21.79	68.20	100	269	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	By PoE

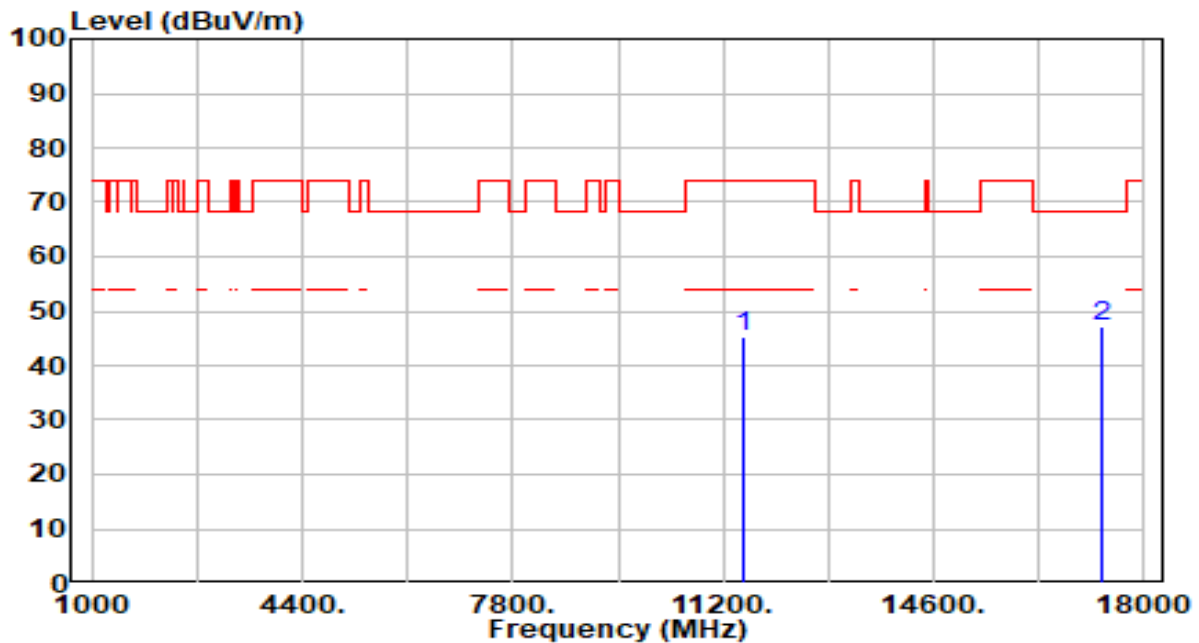


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11540.000	39.99	5.32	45.31	-28.69	74.00	100	151	Peak
2	*	17310.000	41.99	5.08	47.07	-21.13	68.20	100	330	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	By PoE

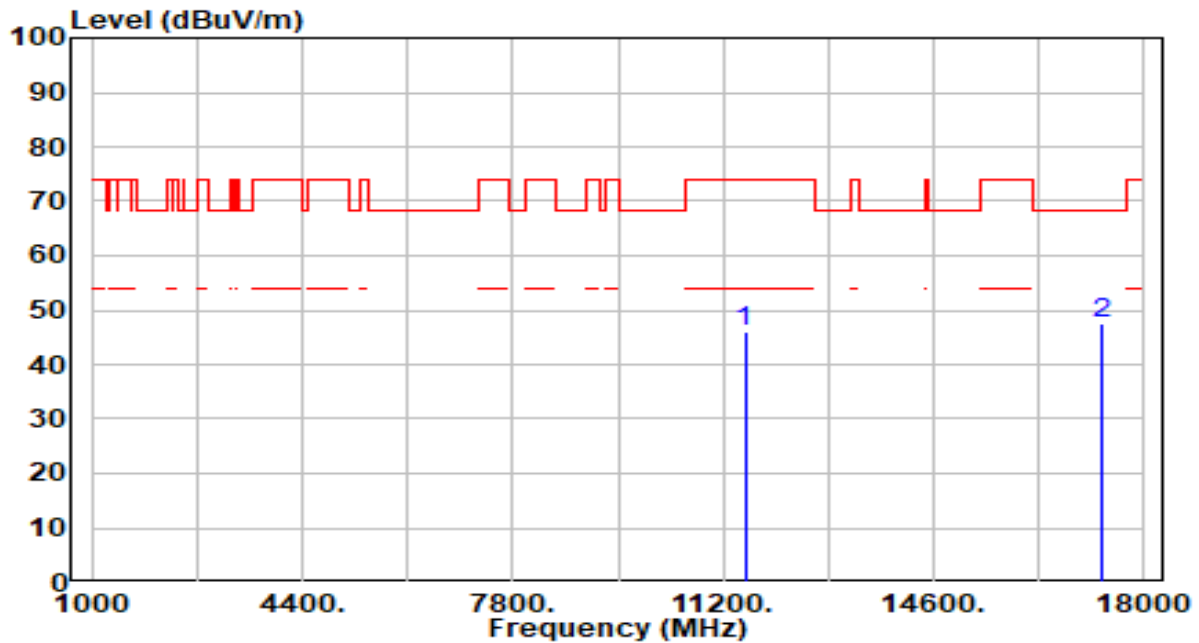


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	40.58	5.33	45.91	-28.09	74.00	100	181	Peak
2	*	17325.000	42.32	5.05	47.37	-20.83	68.20	100	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

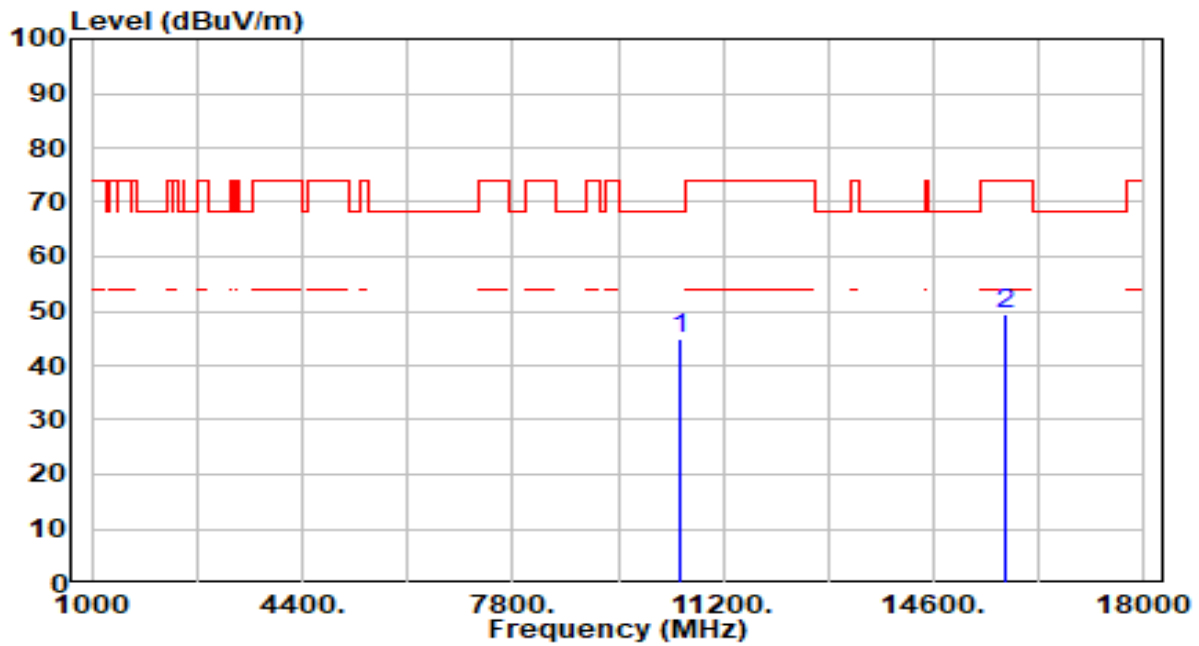


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	40.28	4.62	44.90	-23.30	68.20	100	185	Peak
2		15750.000	42.96	6.49	49.45	-24.55	74.00	100	141	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

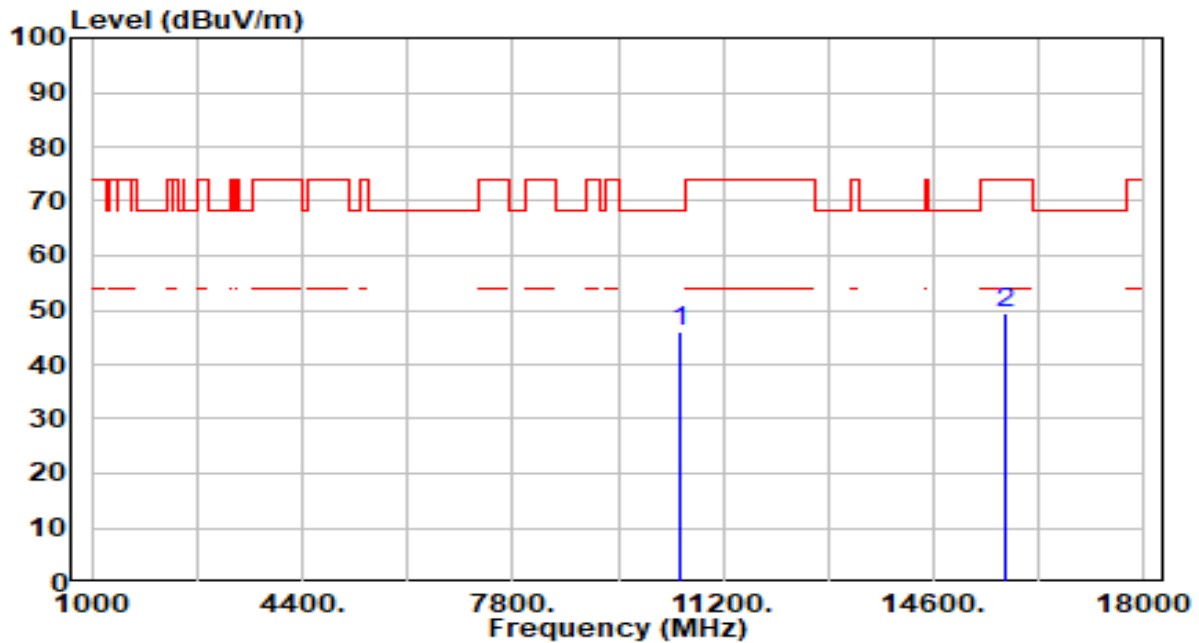


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	41.41	4.62	46.04	-22.16	68.20	100	94	Peak
2		15750.000	42.91	6.49	49.40	-24.60	74.00	100	169	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	By PoE

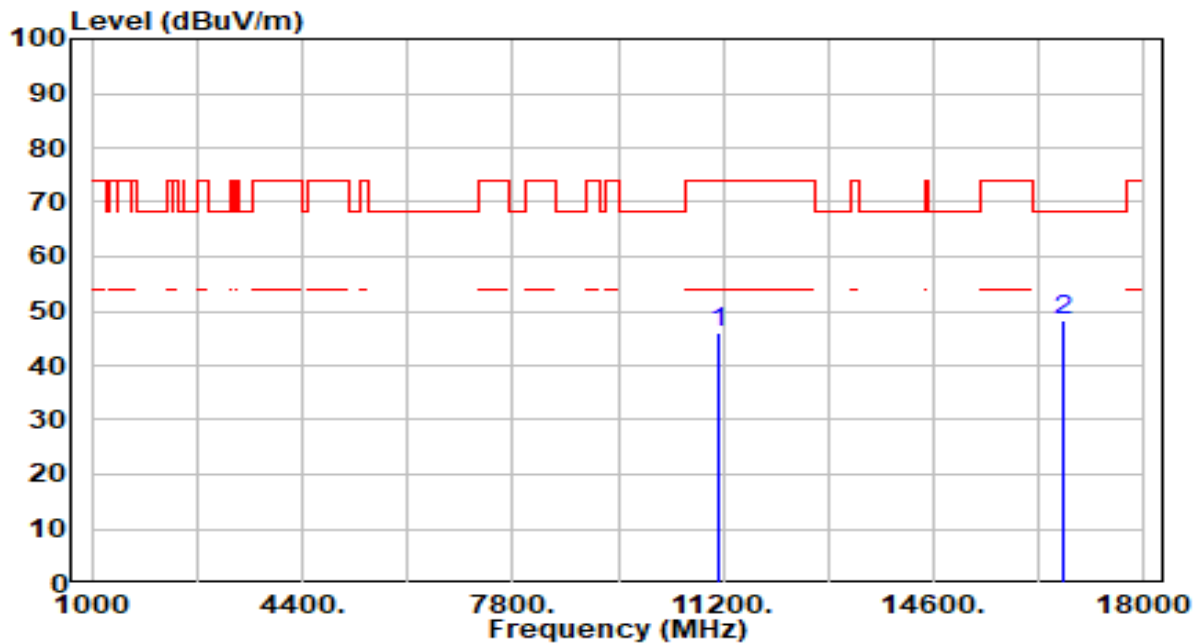


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	41.11	4.82	45.92	-28.08	74.00	100	123	Peak
2	*	16710.000	42.11	6.01	48.11	-20.09	68.20	100	2	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	By PoE

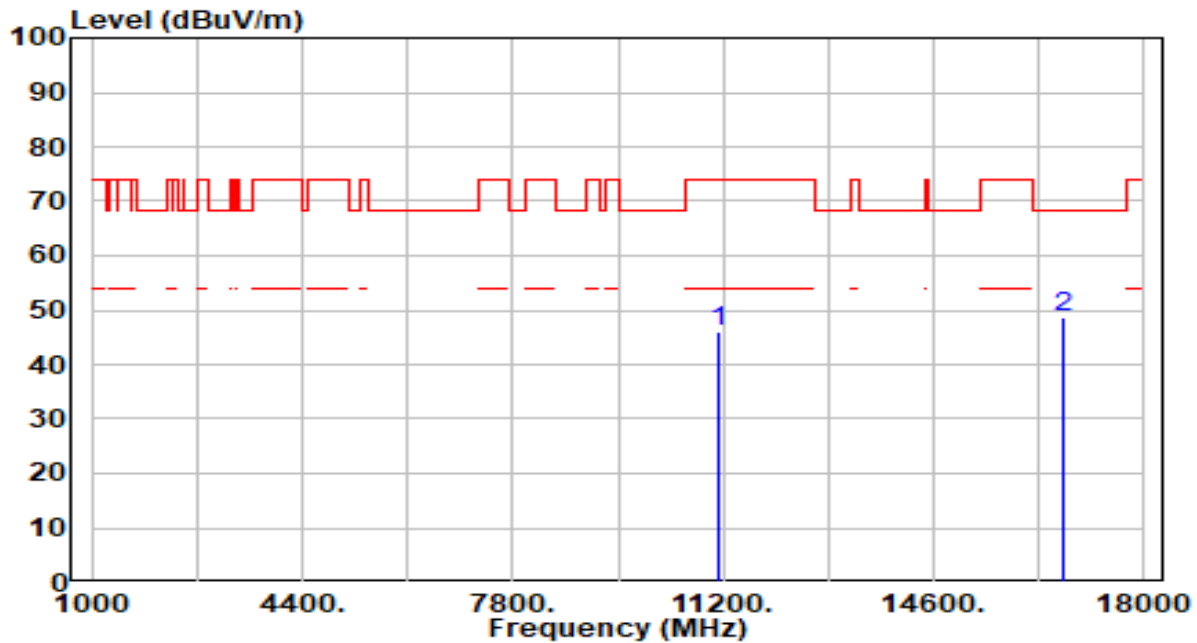


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	41.13	4.82	45.95	-28.05	74.00	100	327	Peak
2	*	16710.000	42.68	6.01	48.69	-19.51	68.20	100	18	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-240MHz_TX_Band3_CH 130_ANT 0+1	Test Voltage	By PoE

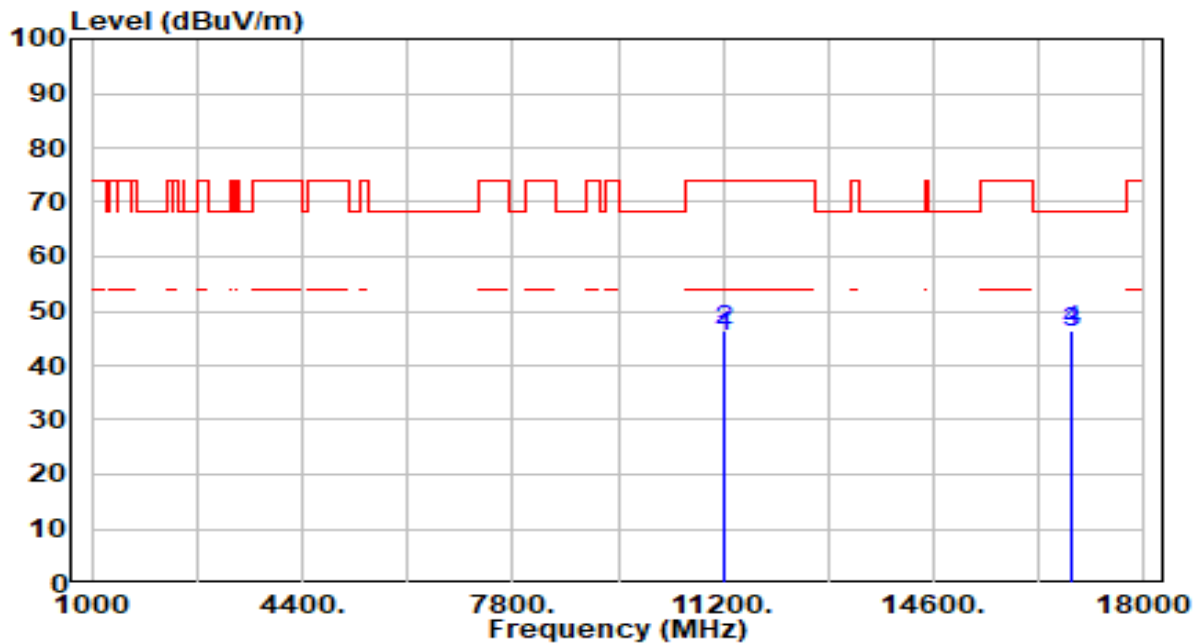


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11200.000	40.27	4.98	45.25	-28.75	74.00	100	153	Peak
4	*	16839.000	40.40	5.97	46.37	-21.83	68.20	100	171	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-240MHz_TX_Band3_CH 130_ANT 0+1	Test Voltage	By PoE

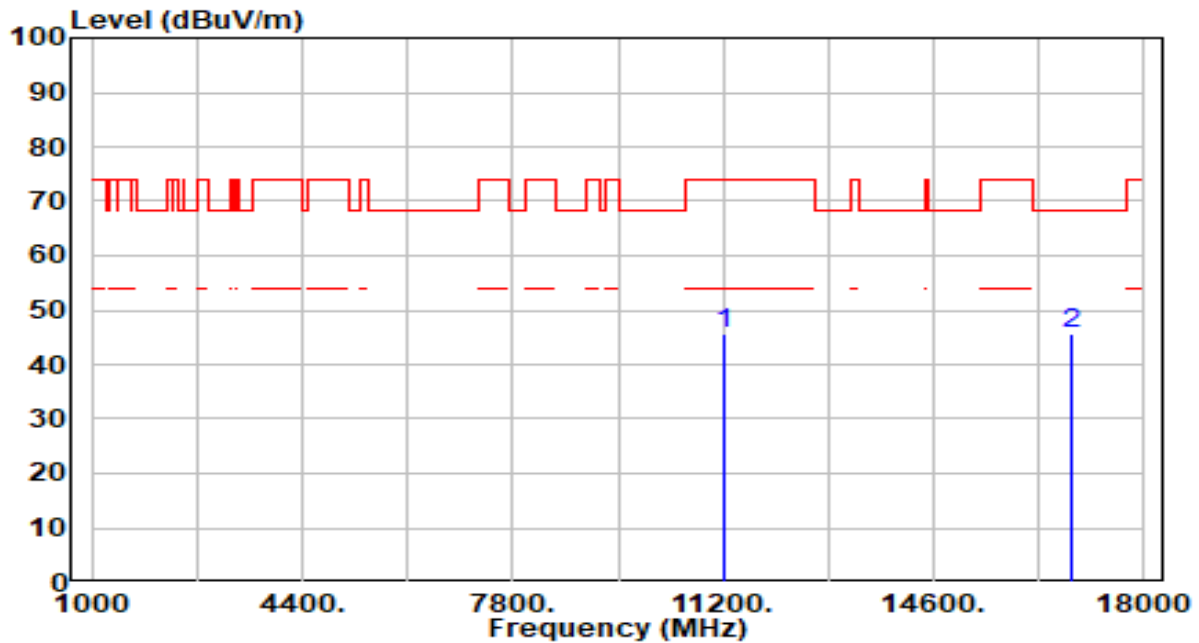


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	40.50	5.00	45.51	-28.49	74.00	100	182	Peak
2	*	16830.000	39.64	5.98	45.63	-22.57	68.20	100	149	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-11-18
Factor	BBHA 9170	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	By PoE

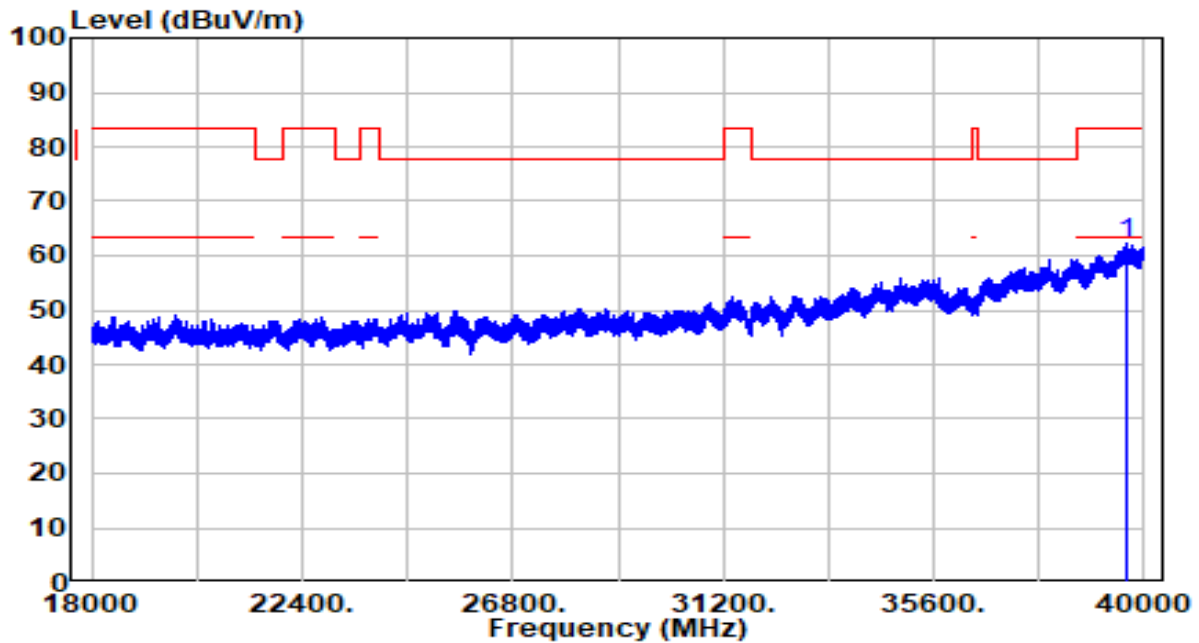


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	39609.500	36.12	26.23	62.35	-21.15	83.50	150	227	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-11-18
Factor	BBHA 9170	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	By PoE

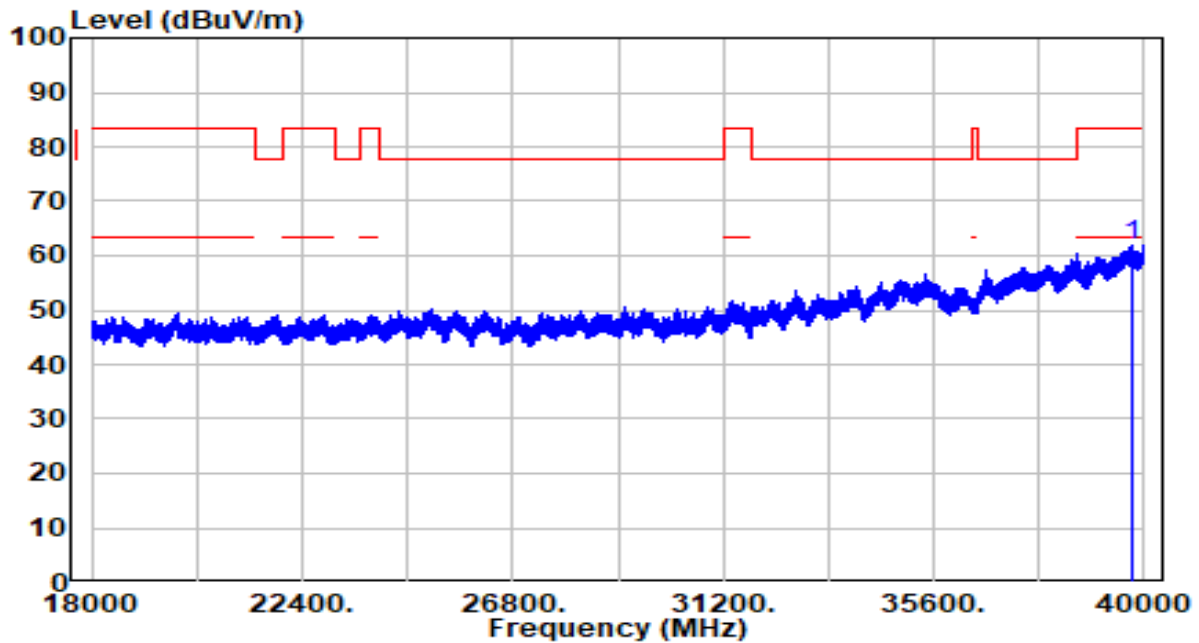

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	39748.380	35.30	26.45	61.75	-21.75	83.50	150	23	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. Radiated Restricted Band Edge Measurement

7.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42-16.423	399.9 - 410	4.5-5.15
¹ 0.495 - 0.505	16.69475-16.69525	608 - 614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960 - 1240	7.25-7.75
4.125-4.128	25.5 -25.67	1300 - 1427	8.025 - 8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660 - 1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291-8.294	149.9-150.05	2310 - 2390	15.35-16.2
8.362-8.366	156.52475-156.525	2483.5 - 2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690 - 2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260 - 3267	23.6-24.0
12.29-12.293	167.72-173.2	3332 - 3339	31.2-31.8
12.51975-12.52025	240 - 285	3345.8 - 3358	36.43-36.5
12.57675-12.57725	322-335.4	3600 - 4400	(²)
13.36-13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge

increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.9.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

7.9.3. Test Setting

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW If the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$.
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

7.9.4. Test Setup

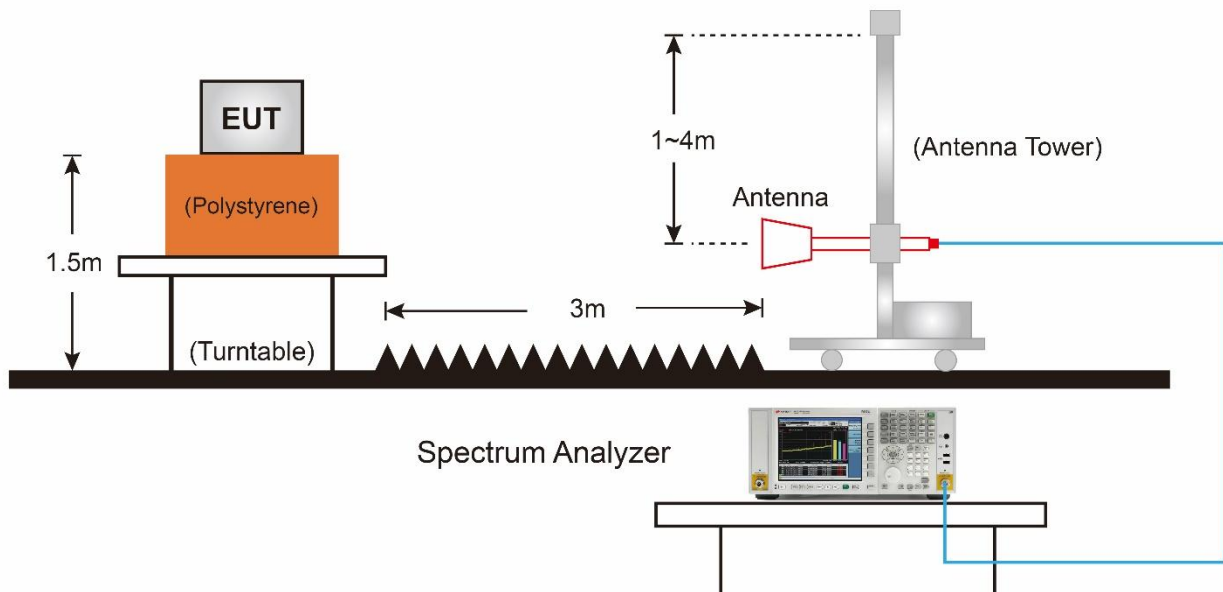

7.9.5. Test Result

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

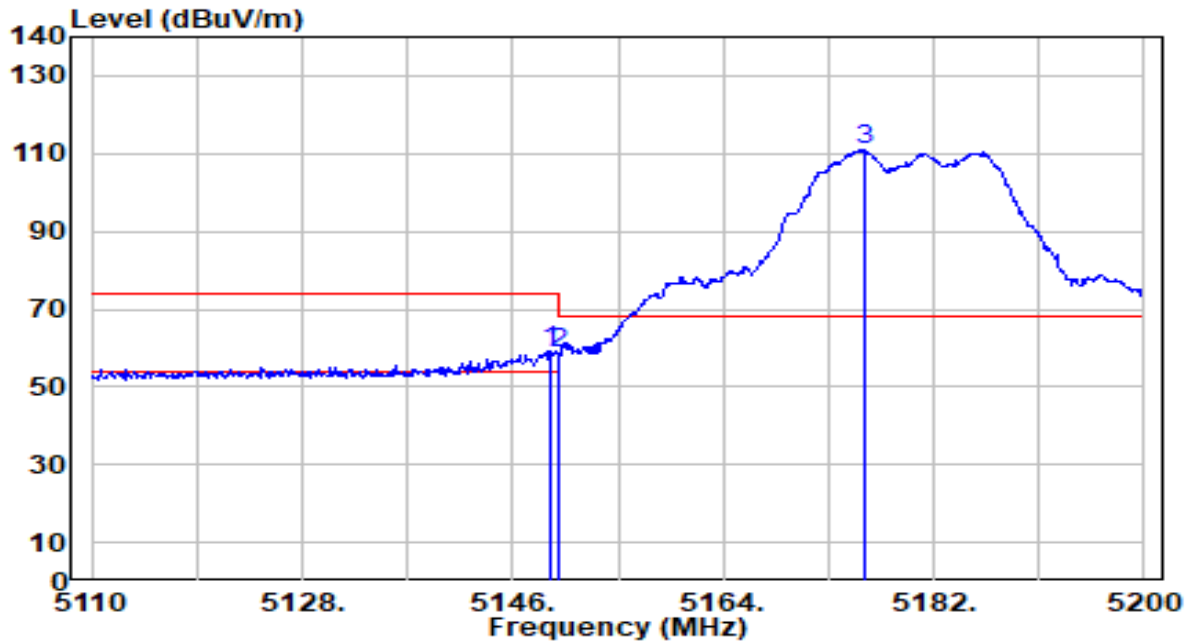


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.330	58.30	0.65	58.95	-15.05	74.00	292	150	Peak
2		5150.000	58.08	0.65	58.74	-15.26	74.00	292	150	Peak
3		5176.060	110.37	0.68	111.05	N/A	N/A	292	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

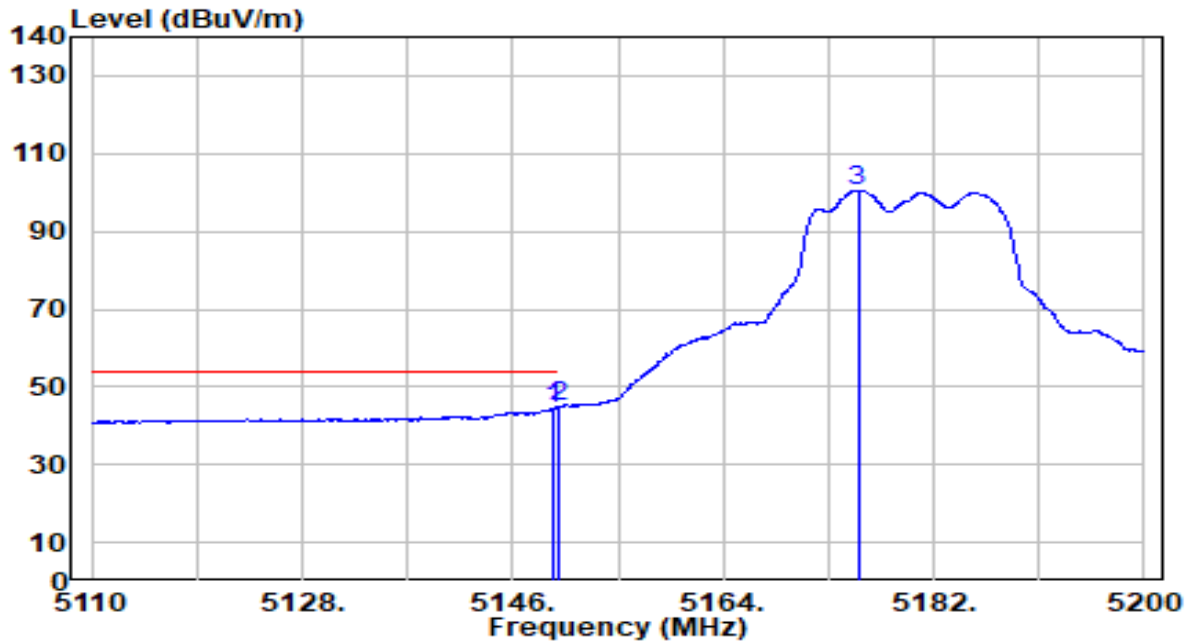


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.420	43.61	0.65	44.26	-9.74	54.00	292	150	Average
2	*	5150.000	44.15	0.65	44.80	-9.20	54.00	292	150	Average
3		5175.520	99.89	0.68	100.56	N/A	N/A	292	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

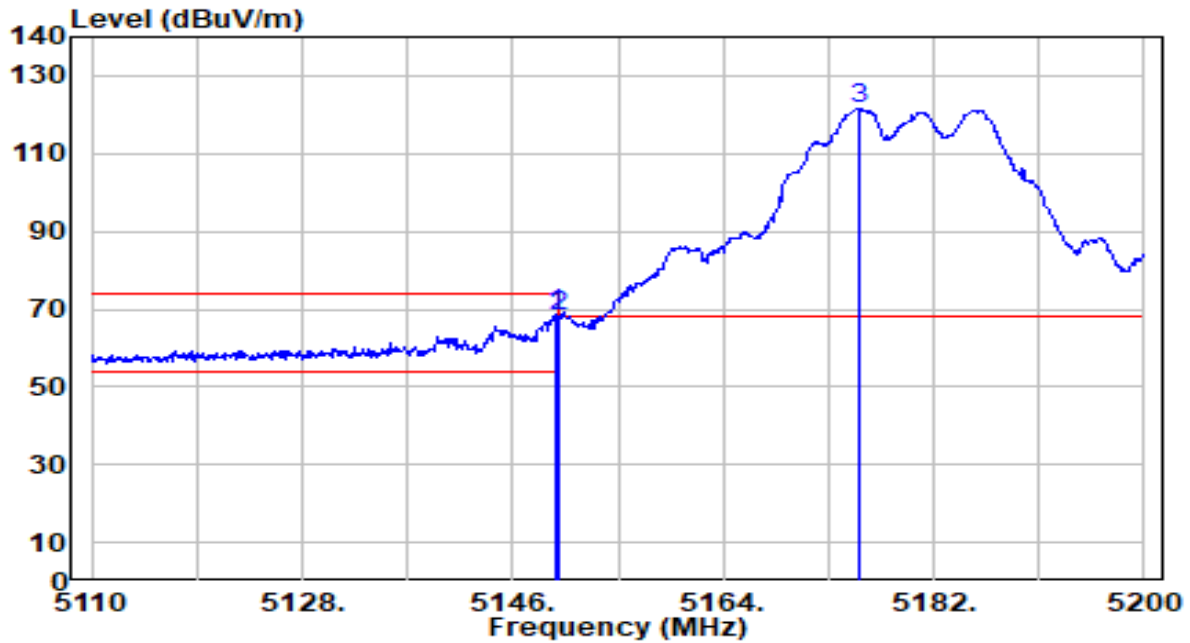


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.600	68.20	0.65	68.86	-5.14	74.00	151	10	Peak
2		5150.000	67.26	0.65	67.91	-6.09	74.00	151	10	Peak
3		5175.700	120.81	0.68	121.49	N/A	N/A	151	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

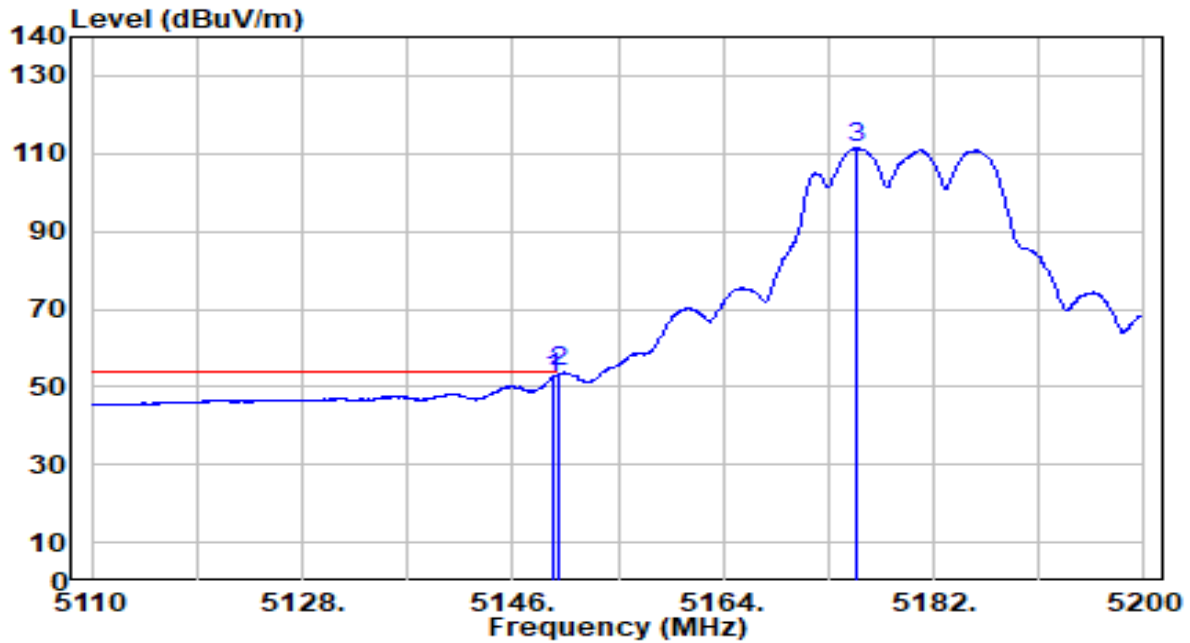


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.420	51.50	0.65	52.15	-1.85	54.00	151	10	Average
2	*	5150.000	53.08	0.65	53.73	-0.27	54.00	151	10	Average
3		5175.430	110.61	0.68	111.29	N/A	N/A	151	10	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

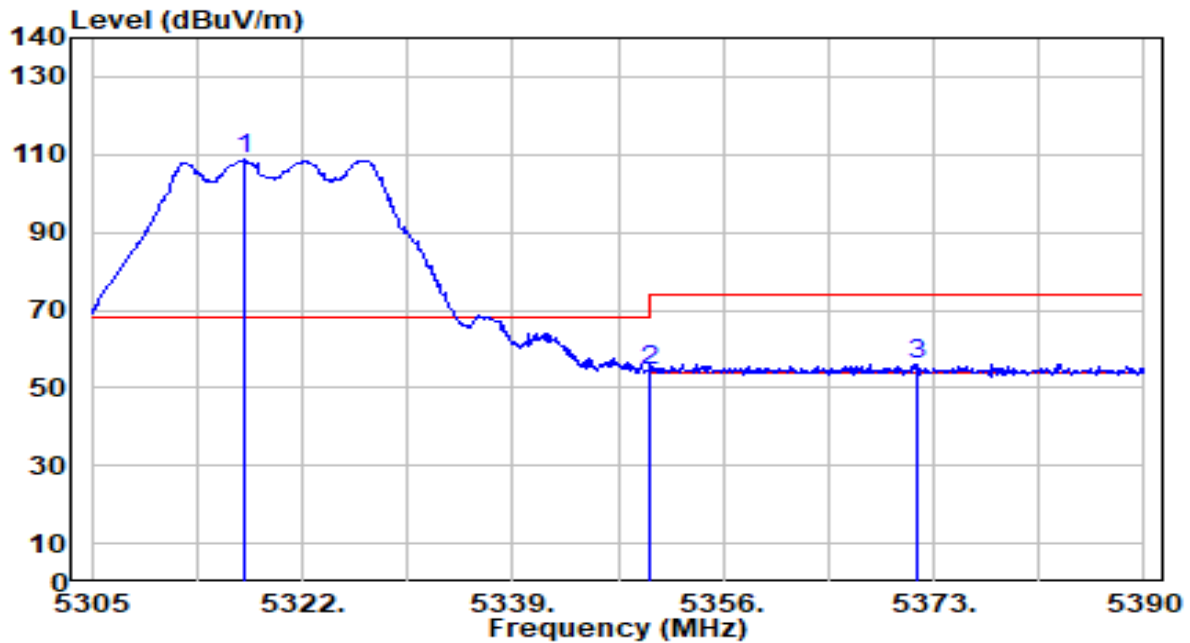


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.240	108.30	0.52	108.82	N/A	N/A	265	134	Peak
2	5350.000	53.92	0.47	54.39	-19.61	74.00	265	134	Peak
3	* 5371.725	55.81	0.44	56.25	-17.75	74.00	265	134	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

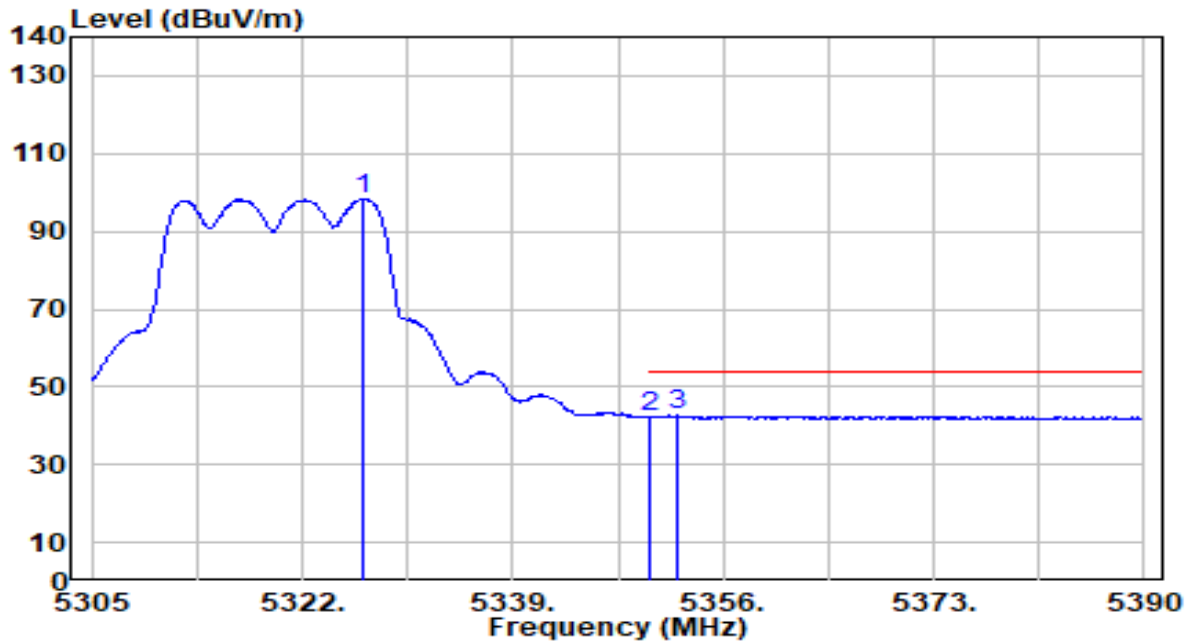


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.930	97.84	0.51	98.35	N/A	N/A	265	134	Average
2	5350.000	41.77	0.47	42.24	-11.76	54.00	265	134	Average
3	* 5352.260	42.15	0.47	42.62	-11.38	54.00	265	134	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

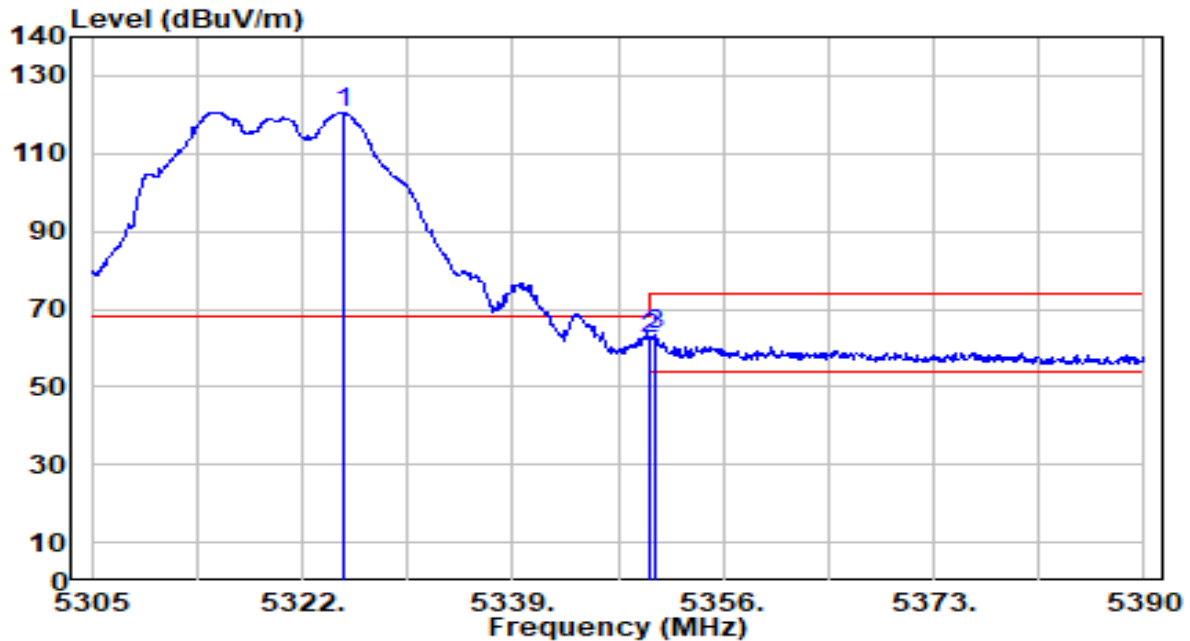


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5325.315	120.09	0.51	120.60	N/A	N/A	150	12	Peak
2	5350.000	62.00	0.47	62.47	-11.53	74.00	150	12	Peak
3	* 5350.560	62.91	0.47	63.38	-10.62	74.00	150	12	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

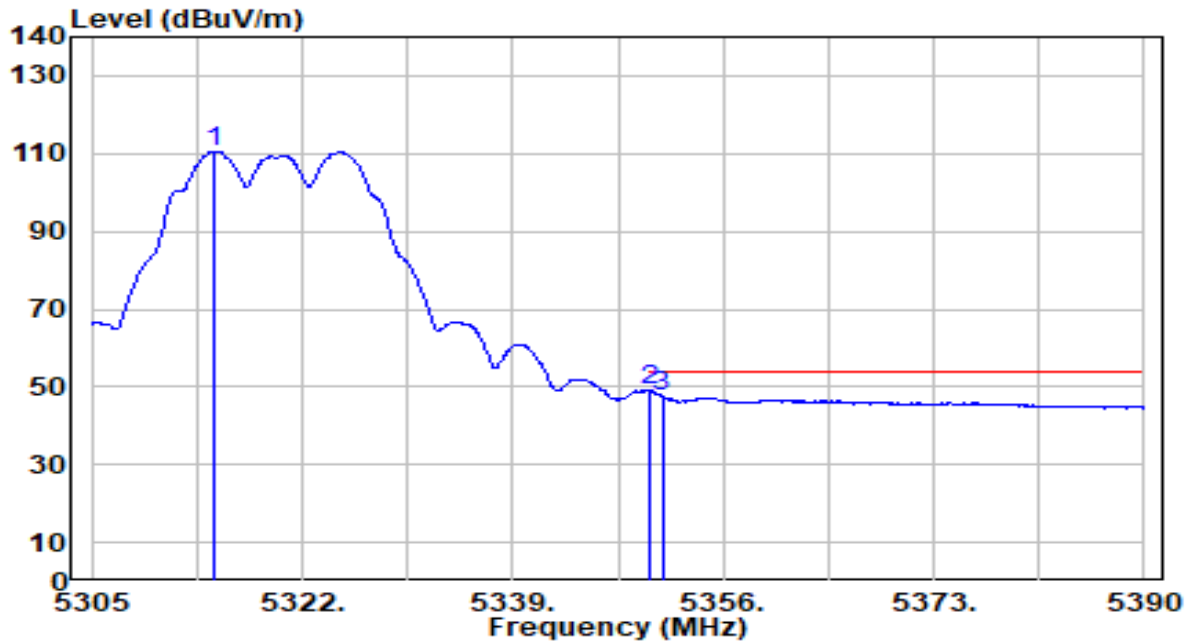


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5314.860	109.99	0.53	110.52	N/A	N/A	150	12	Average
2	*	5350.000	48.47	0.47	48.94	-5.06	54.00	150	12	Average
3		5351.070	47.17	0.47	47.64	-6.36	54.00	150	12	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

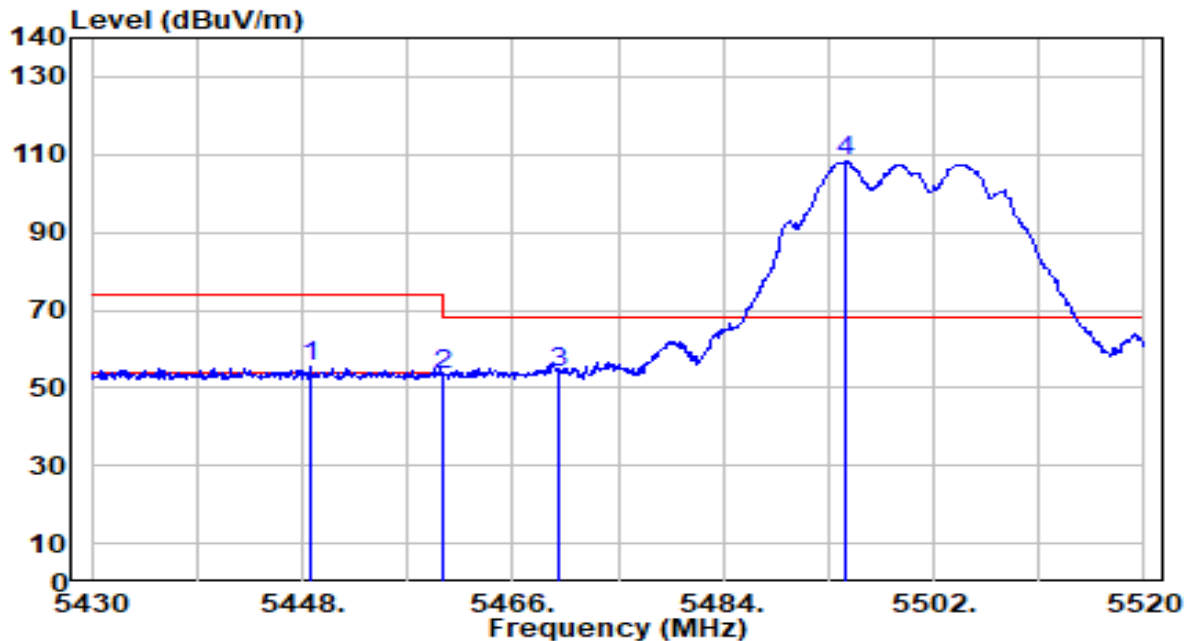


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5448.630	54.87	0.61	55.48	-18.52	74.00	134	164	Peak
2	5460.000	52.82	0.66	53.48	-20.52	74.00	134	164	Peak
3	* 5470.000	53.03	0.71	53.74	-14.46	68.20	134	164	Peak
4	5494.350	107.50	0.81	108.31	N/A	N/A	134	164	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

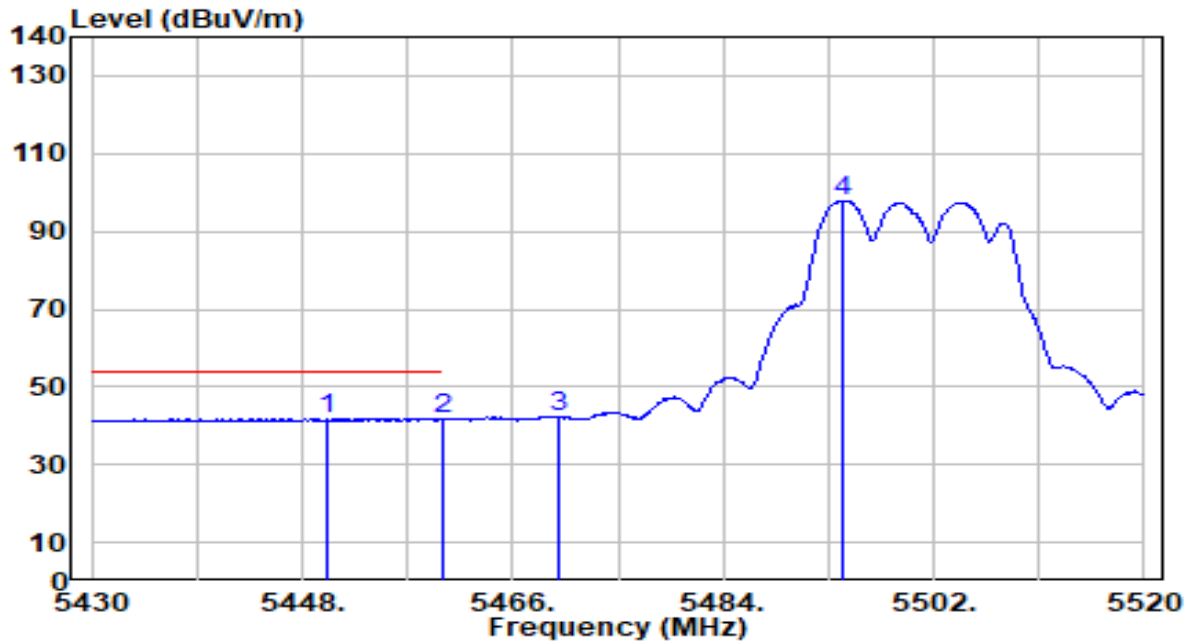


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5450.070	41.31	0.62	41.93	-12.07	54.00	134	164	Average
2		5460.000	41.07	0.66	41.73	-12.27	54.00	134	164	Average
3		5470.000	41.55	0.71	42.25	N/A	N/A	134	164	Average
4		5494.170	97.18	0.81	97.99	N/A	N/A	134	164	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

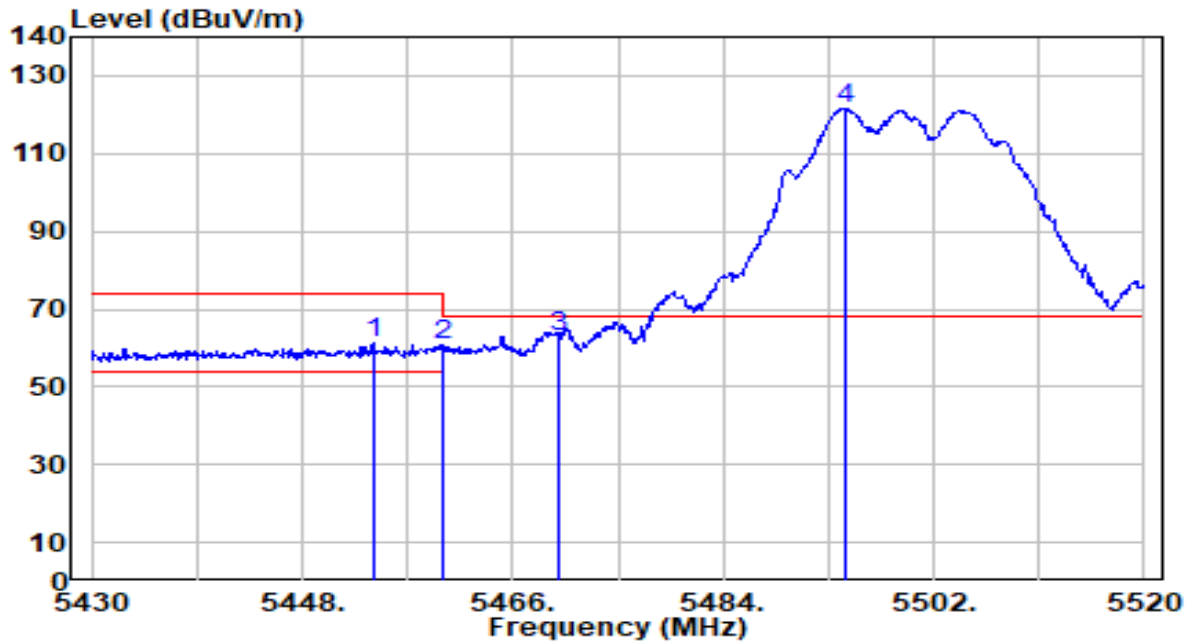


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.030	60.69	0.63	61.33	-12.67	74.00	156	186	Peak
2	5460.000	60.12	0.66	60.78	-13.22	74.00	156	186	Peak
3	* 5470.000	62.06	0.71	62.77	-5.43	68.20	156	186	Peak
4	5494.440	120.79	0.82	121.60	N/A	N/A	156	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

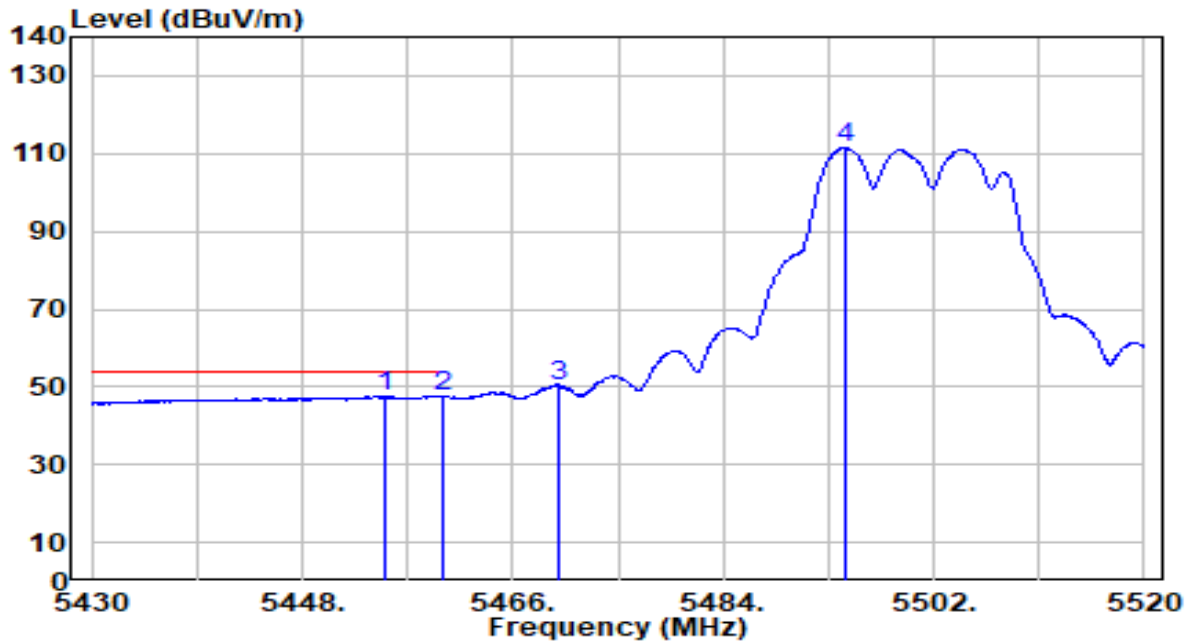


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.110	46.96	0.64	47.60	-6.40	54.00	156	186	Average
2		5460.000	46.83	0.66	47.49	-6.51	54.00	156	186	Average
3		5470.000	49.37	0.71	50.08	N/A	N/A	156	186	Average
4		5494.350	110.49	0.81	111.31	N/A	N/A	156	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	By PoE

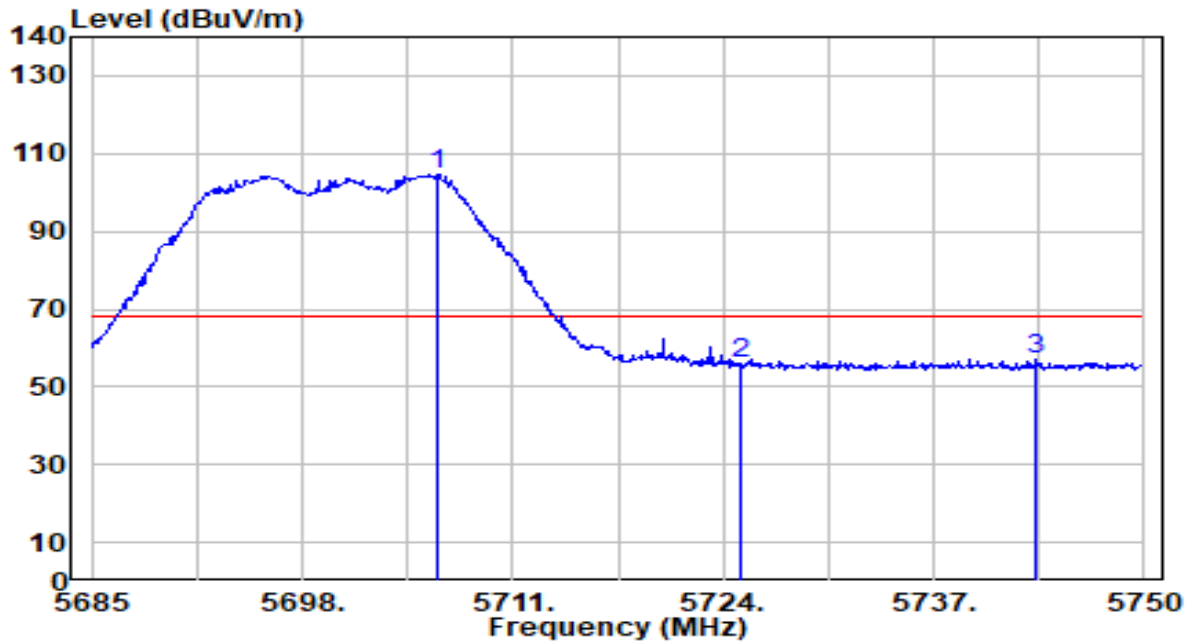


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5706.385	102.63	1.81	104.43	N/A	N/A	310	49	Peak
2	5725.000	54.18	1.89	56.07	-12.13	68.20	310	49	Peak
3	* 5743.370	54.98	1.98	56.96	-11.24	68.20	310	49	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	By PoE

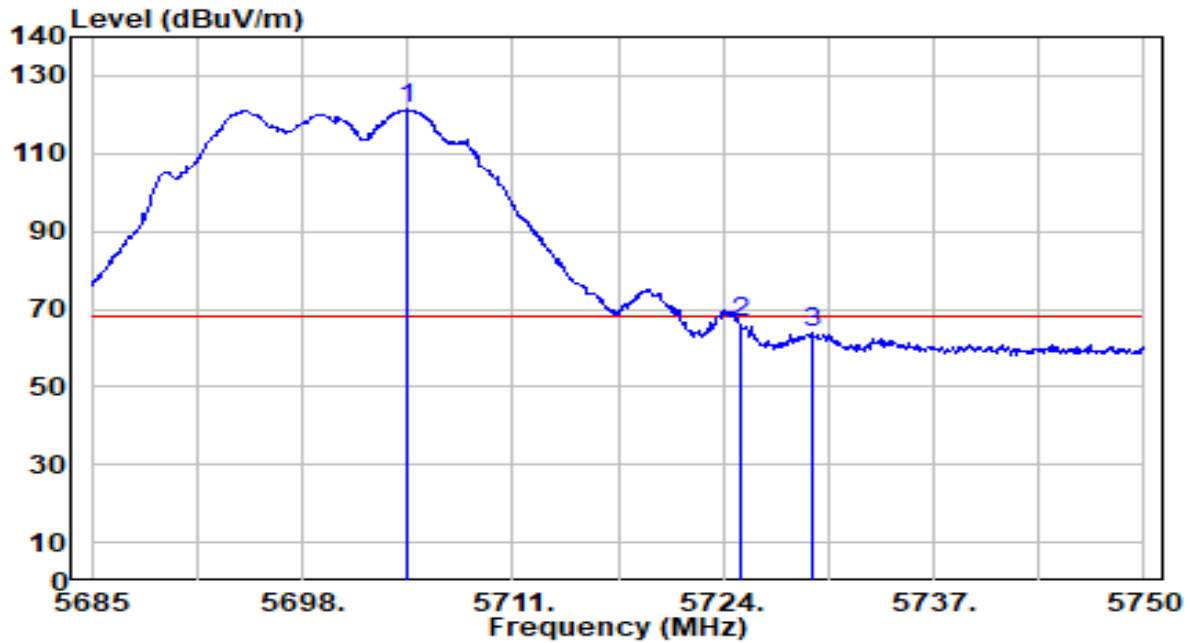


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5704.500	119.58	1.80	121.37	N/A	N/A	158	186	Peak
2	*	5725.000	64.91	1.89	66.80	-1.40	68.20	158	186	Peak
3		5729.460	62.03	1.91	63.94	-4.26	68.20	158	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	By PoE

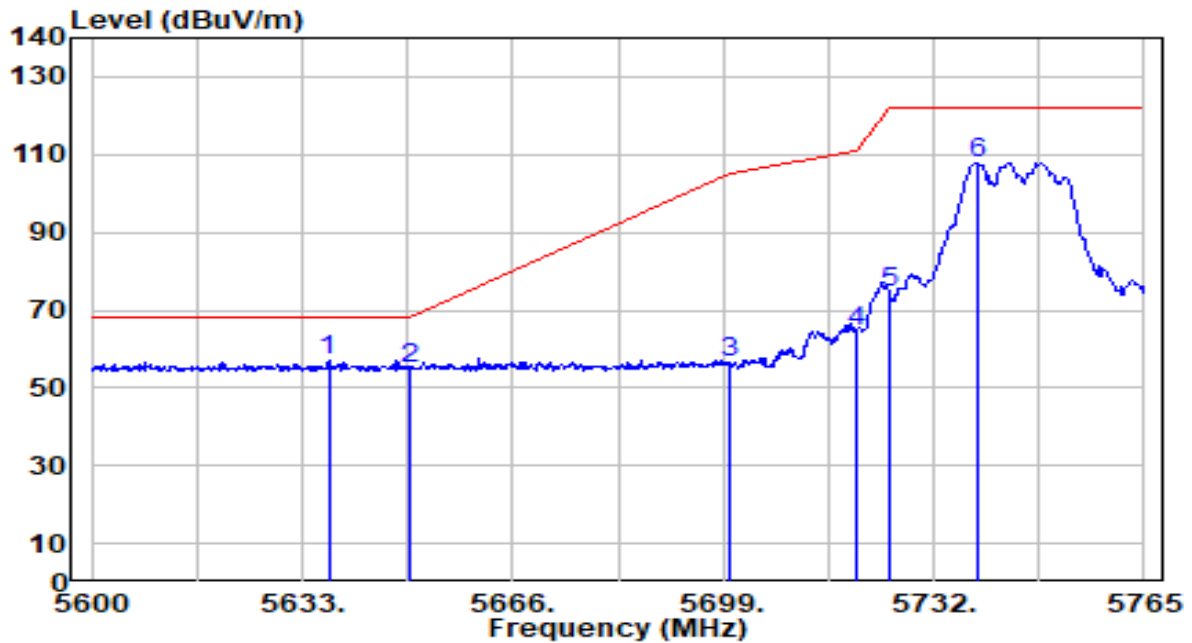


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5637.125	55.55	1.48	57.03	-11.17	68.20	100	175	Peak
2		5650.000	53.17	1.54	54.72	-13.48	68.20	100	175	Peak
3		5700.000	54.88	1.78	56.66	-48.54	105.20	100	175	Peak
4		5720.000	62.41	1.87	64.28	-46.52	110.80	100	175	Peak
5		5725.000	72.35	1.89	74.24	-47.96	122.20	100	175	Peak
6		5738.930	106.01	1.96	107.96	N/A	N/A	100	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	By PoE

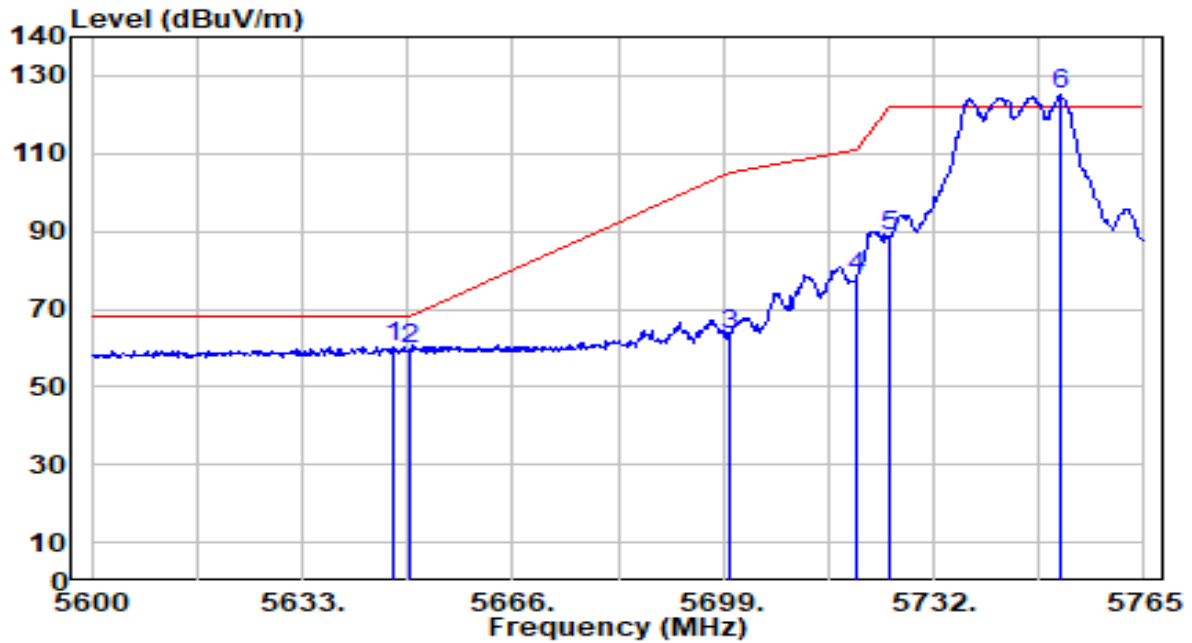


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.355	58.82	1.53	60.35	-7.85	68.20	150	180	Peak
2		5650.000	57.91	1.54	59.45	-8.75	68.20	150	180	Peak
3		5700.000	61.70	1.78	63.48	-41.72	105.20	150	180	Peak
4		5720.000	76.22	1.87	78.09	-32.71	110.80	150	180	Peak
5		5725.000	86.89	1.89	88.79	-33.41	122.20	150	180	Peak
6		5751.965	123.13	2.02	125.14	N/A	N/A	150	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	By PoE

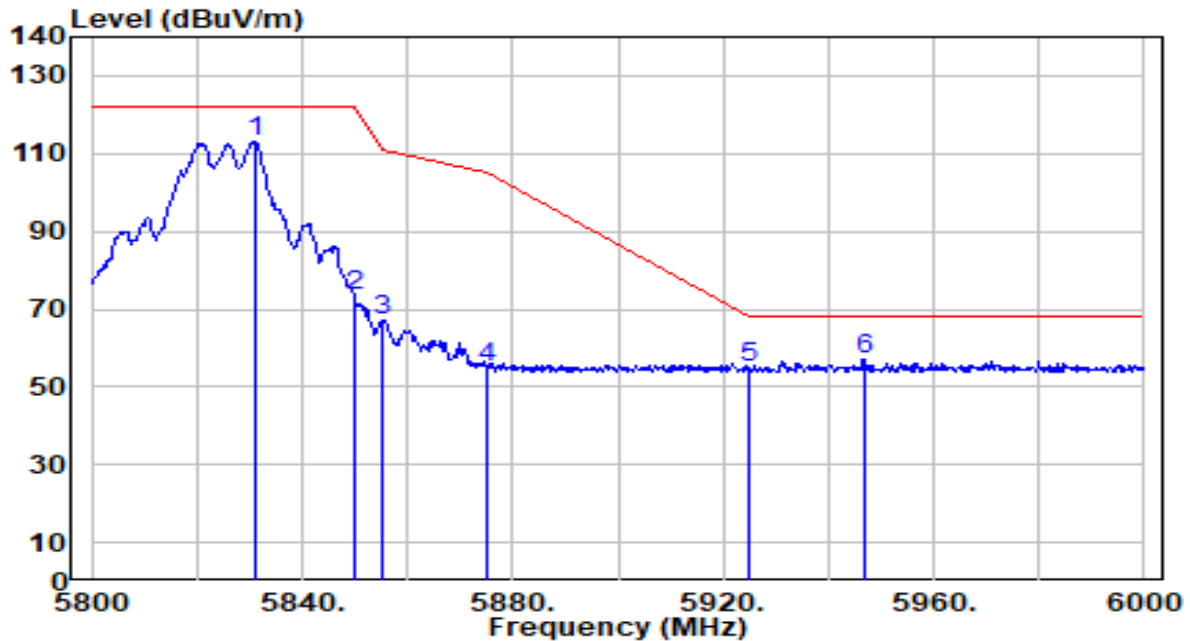


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5831.000	110.95	2.25	113.20	N/A	N/A	300	190	Peak
2	5850.000	71.26	2.25	73.52	-48.68	122.20	300	190	Peak
3	5855.000	64.68	2.25	66.93	-43.87	110.80	300	190	Peak
4	5875.000	52.67	2.26	54.93	-50.27	105.20	300	190	Peak
5	5925.000	52.60	2.27	54.86	-13.34	68.20	300	190	Peak
6	* 5946.800	54.62	2.27	56.89	-11.31	68.20	300	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	By PoE

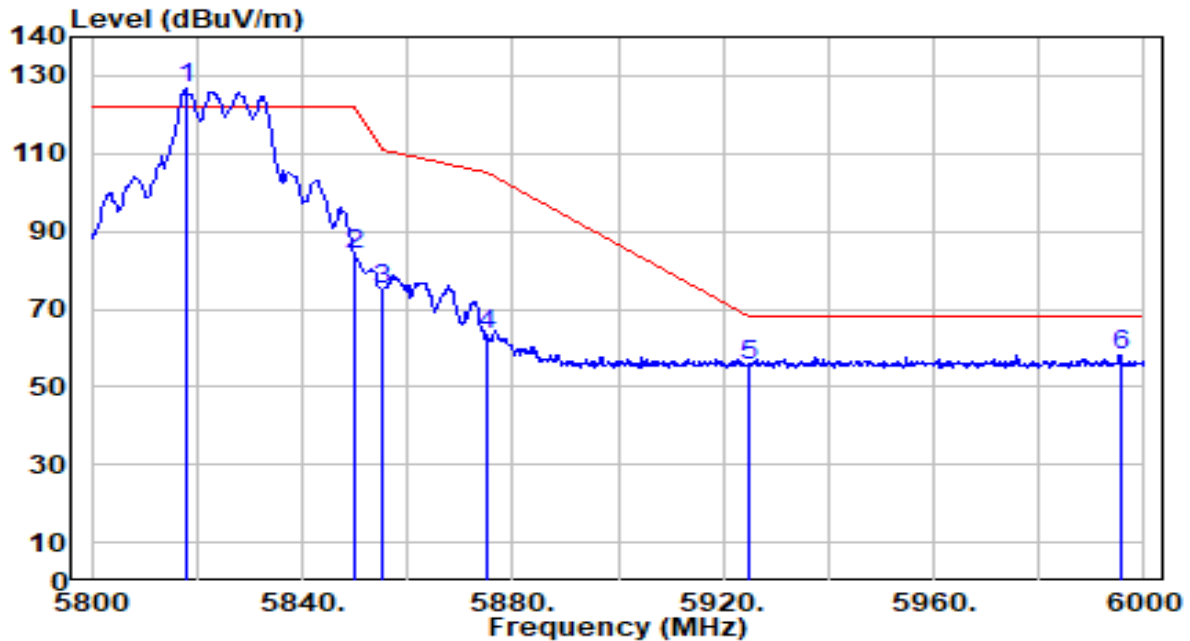


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5817.800	124.35	2.25	126.59	N/A	N/A	150	360	Peak
2	5850.000	81.82	2.25	84.07	-38.13	122.20	150	360	Peak
3	5855.000	72.84	2.25	75.10	-35.70	110.80	150	360	Peak
4	5875.000	61.06	2.26	63.32	-41.88	105.20	150	360	Peak
5	5925.000	53.10	2.27	55.37	-12.83	68.20	150	360	Peak
6	* 5995.400	55.93	2.28	58.21	-9.99	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

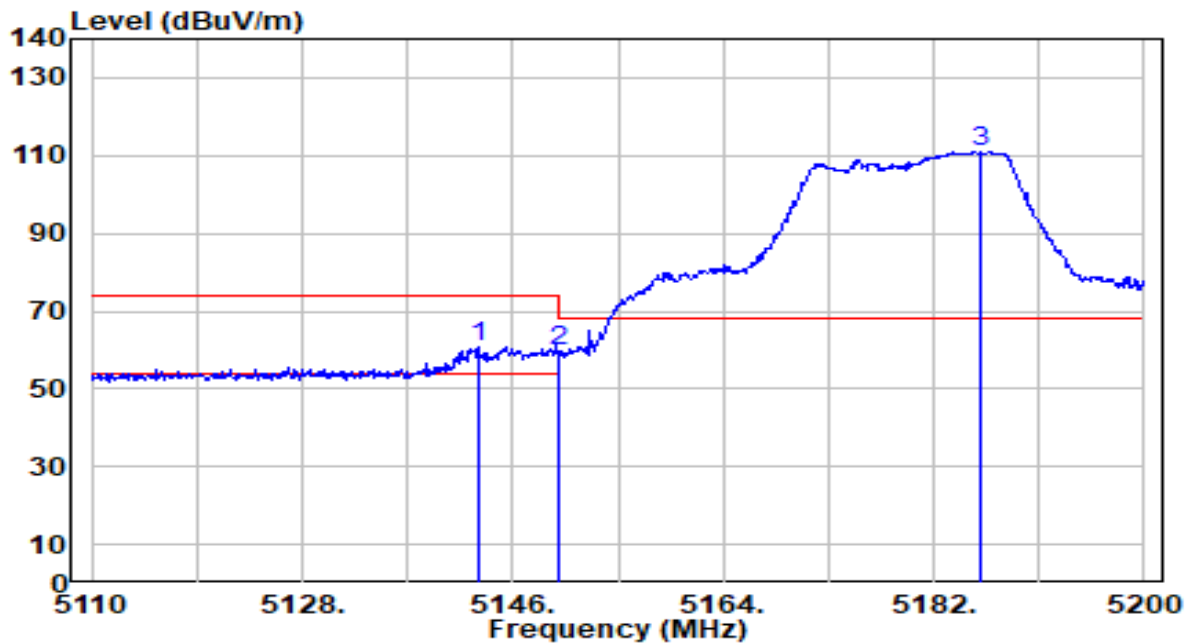


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.030	59.86	0.65	60.50	-13.50	74.00	305	154	Peak
2		5150.000	58.83	0.65	59.48	-14.52	74.00	305	154	Peak
3		5186.050	110.38	0.69	111.07	N/A	N/A	305	154	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

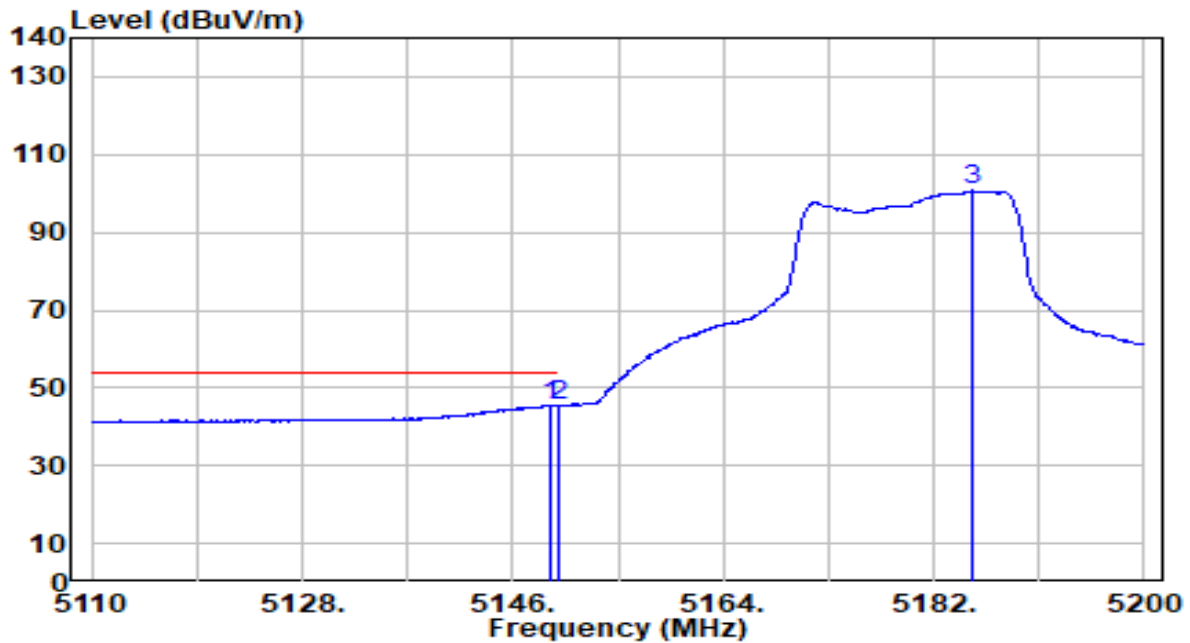


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.240	44.91	0.65	45.56	-8.44	54.00	305	154	Average
2		5150.000	44.78	0.65	45.44	-8.56	54.00	305	154	Average
3		5185.240	100.18	0.69	100.87	N/A	N/A	305	154	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

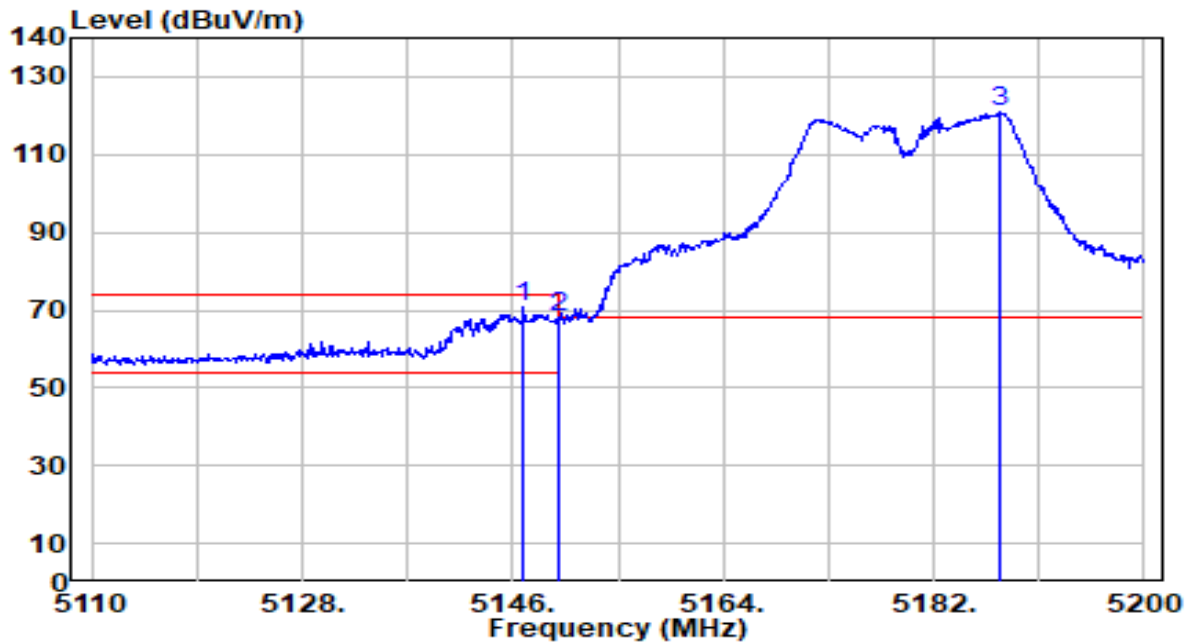


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.900	70.01	0.65	70.67	-3.33	74.00	150	348	Peak
2		5150.000	67.75	0.65	68.40	-5.60	74.00	150	348	Peak
3		5187.580	120.21	0.69	120.90	N/A	N/A	150	348	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

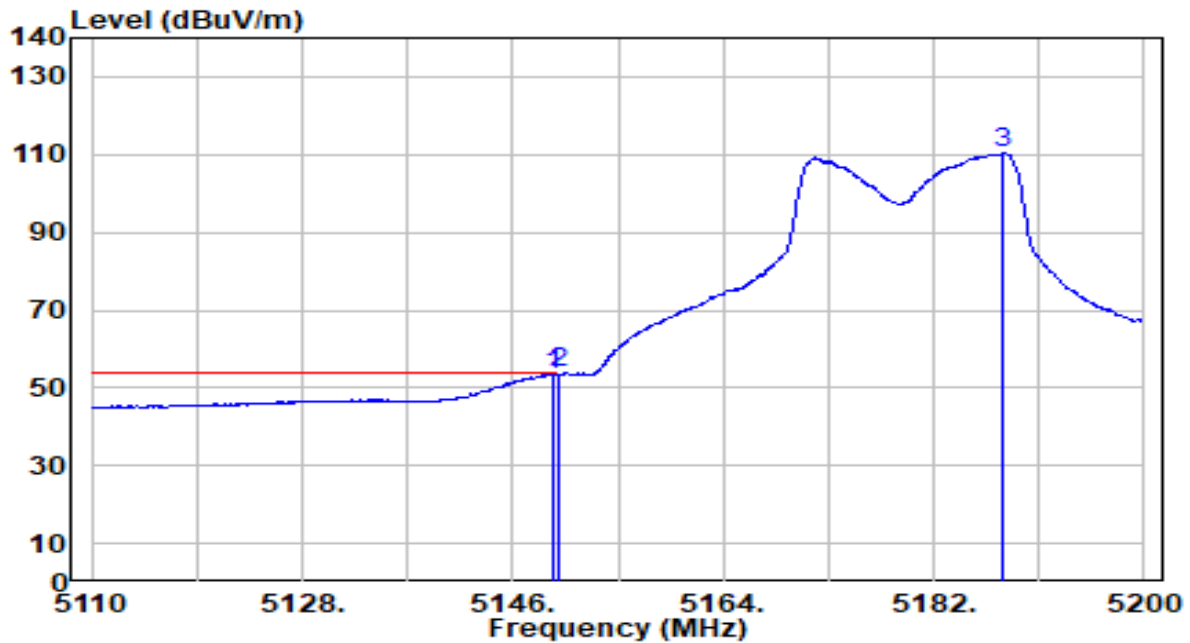


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.420	52.73	0.65	53.39	-0.61	54.00	150	348	Average
2	*	5150.000	53.05	0.65	53.70	-0.30	54.00	150	348	Average
3		5187.940	109.67	0.69	110.36	N/A	N/A	150	348	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

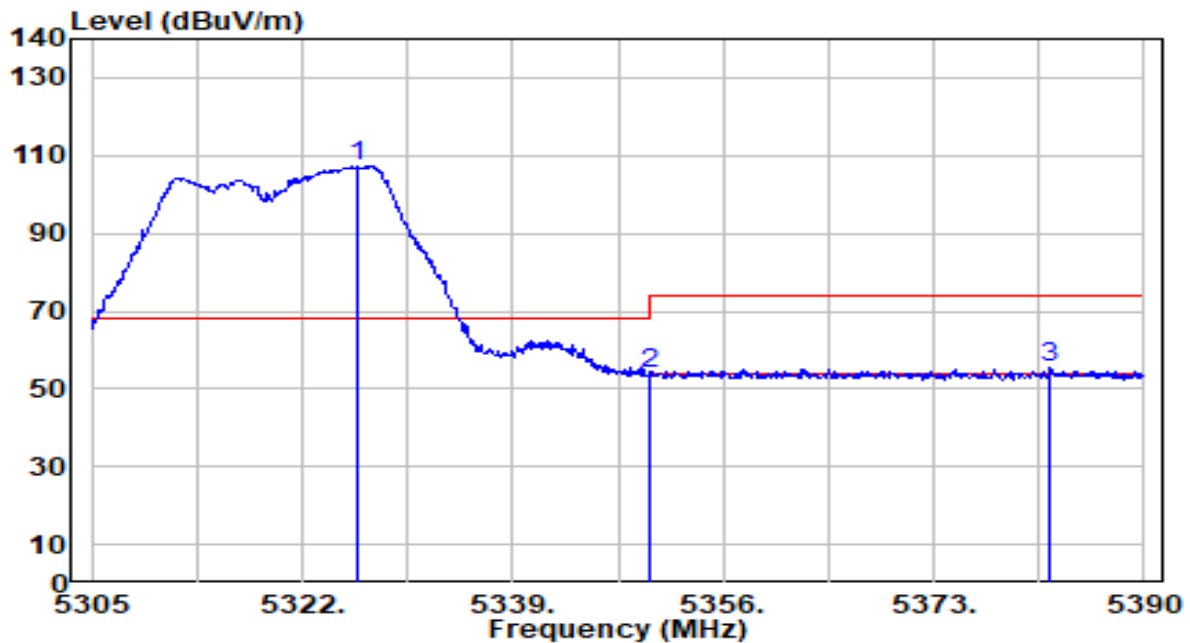


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.420	106.67	0.51	107.17	N/A	N/A	250	130	Peak
2	5350.000	53.65	0.47	54.12	-19.88	74.00	250	130	Peak
3	* 5382.435	54.98	0.42	55.40	-18.60	74.00	250	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

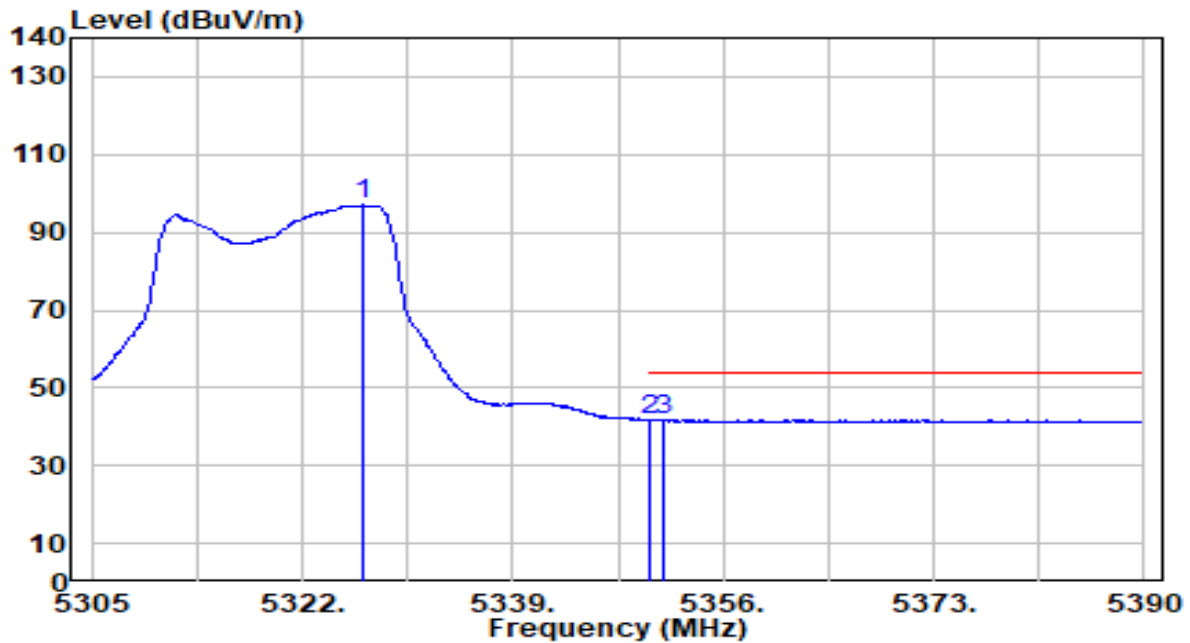


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.845	96.47	0.51	96.97	N/A	N/A	250	130	Average
2	5350.000	41.26	0.47	41.73	-12.27	54.00	250	130	Average
3	* 5351.155	41.26	0.47	41.73	-12.27	54.00	250	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

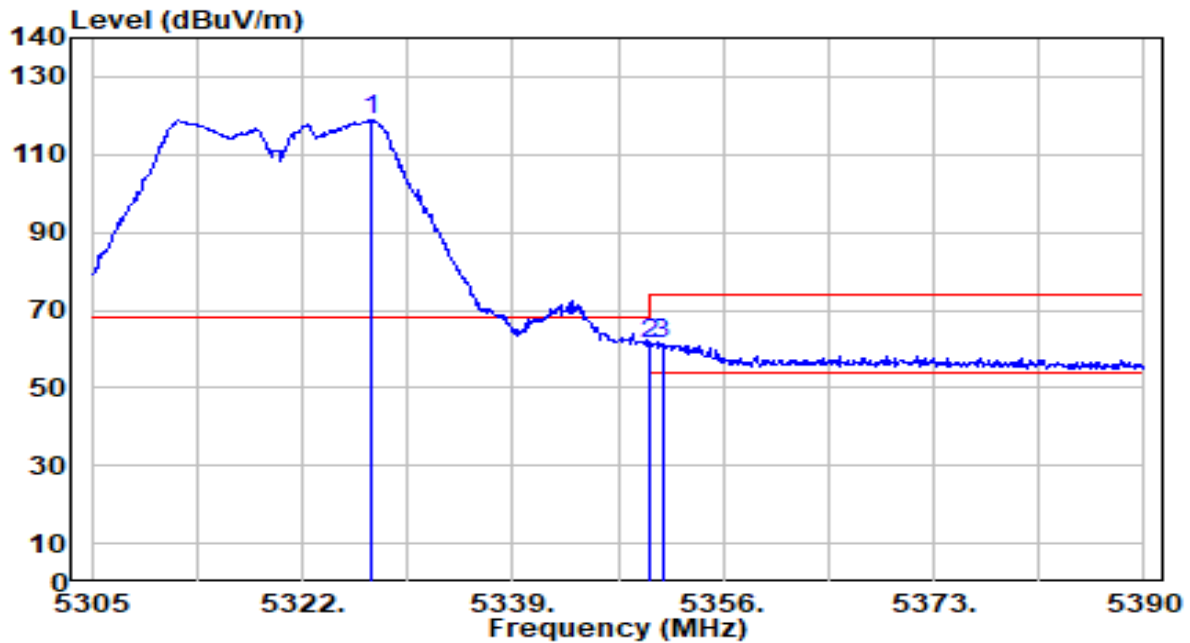


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5327.610	118.45	0.51	118.96	N/A	N/A	150	176	Peak
2	5350.000	60.88	0.47	61.35	-12.65	74.00	150	176	Peak
3	* 5351.070	60.89	0.47	61.36	-12.64	74.00	150	176	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

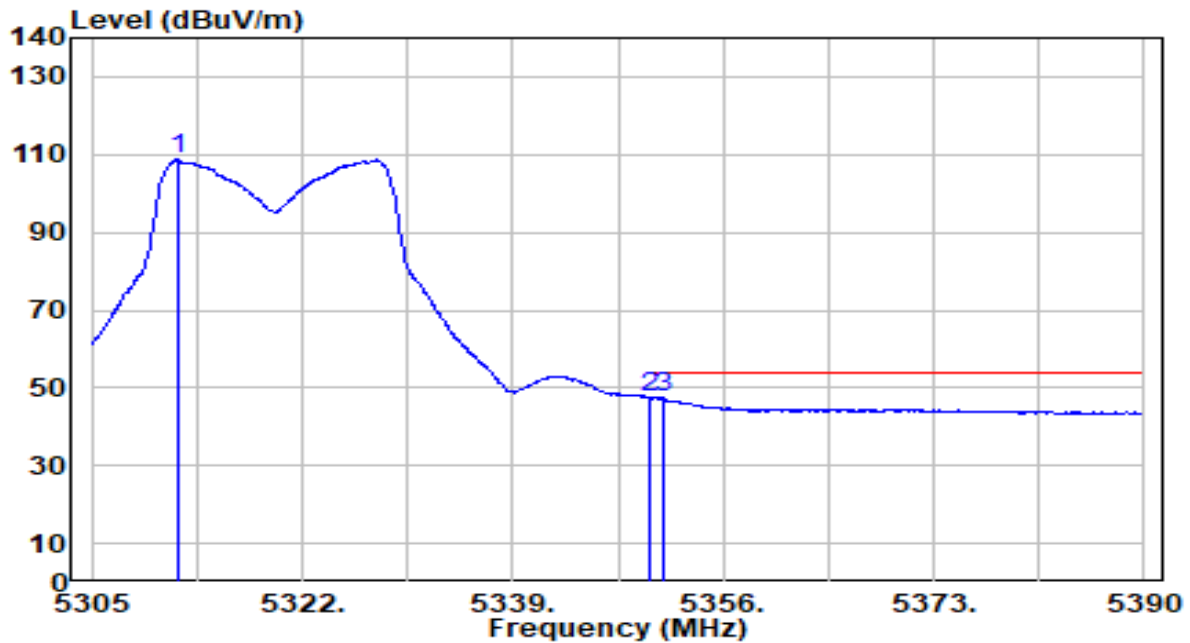


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5311.885	108.14	0.53	108.67	N/A	N/A	150	176	Average
2	*	5350.000	47.07	0.47	47.54	-6.46	54.00	150	176	Average
3		5351.155	46.87	0.47	47.34	-6.66	54.00	150	176	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

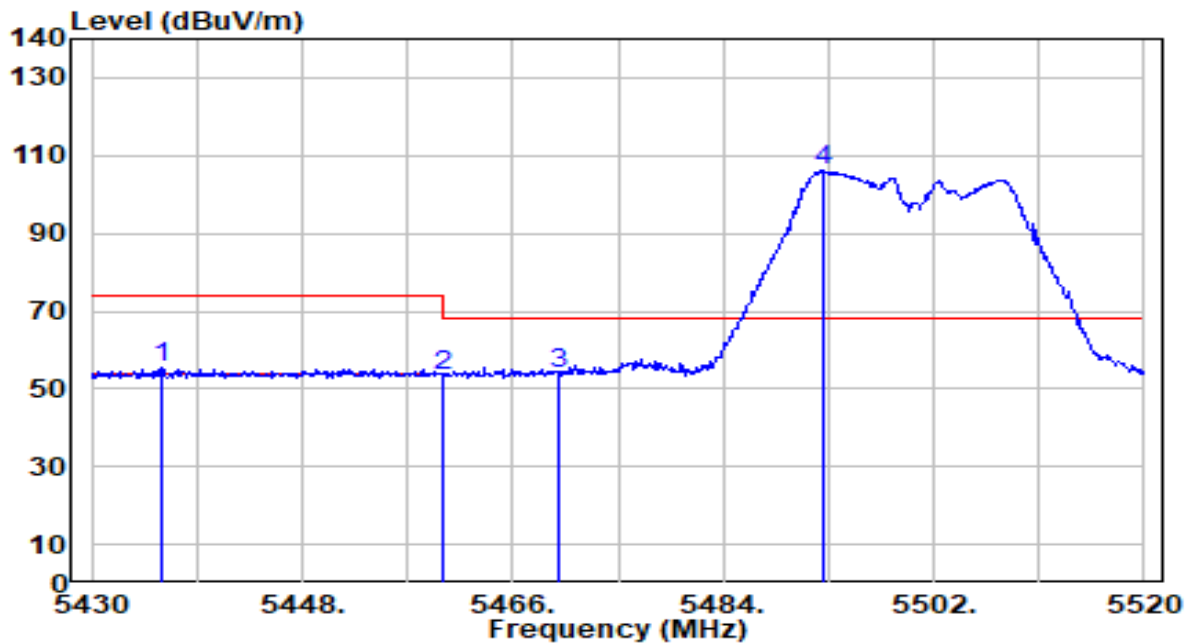


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5435.940	54.68	0.55	55.23	-18.77	74.00	110	155	Peak
2	5460.000	52.88	0.66	53.54	-20.46	74.00	110	155	Peak
3	* 5470.000	53.33	0.71	54.04	-14.16	68.20	110	155	Peak
4	5492.460	105.17	0.81	105.98	N/A	N/A	110	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

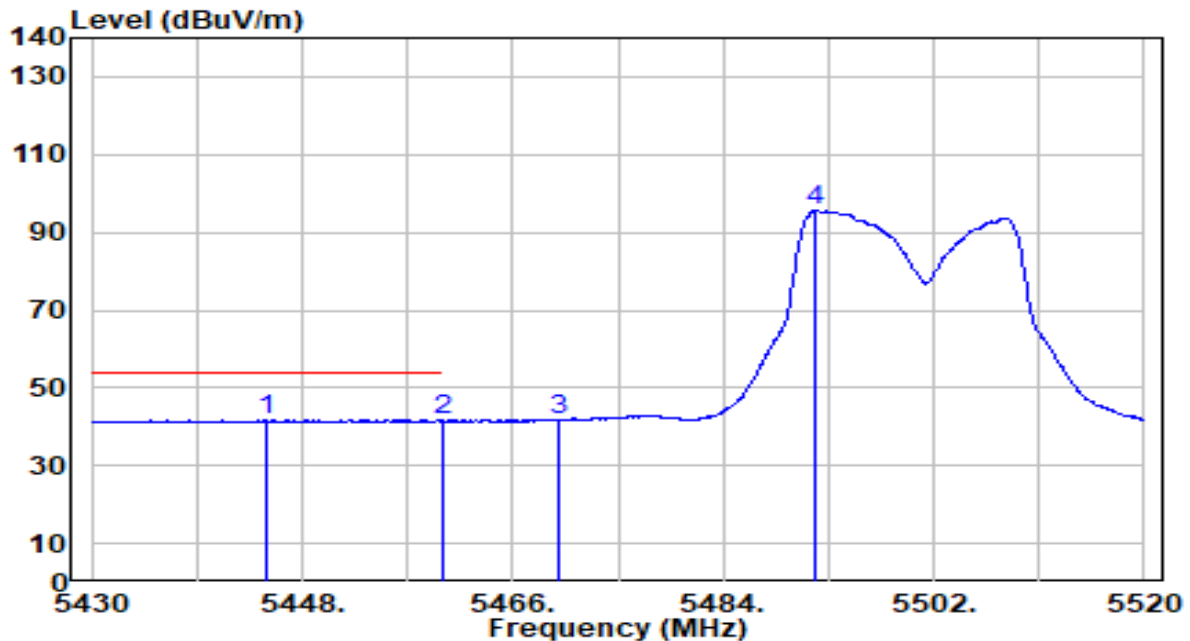


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5444.940	41.13	0.59	41.72	-12.28	54.00	110	155	Average
2		5460.000	40.87	0.66	41.53	-12.47	54.00	110	155	Average
3		5470.000	41.12	0.71	41.82	N/A	N/A	110	155	Average
4		5491.920	94.80	0.80	95.61	N/A	N/A	110	155	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

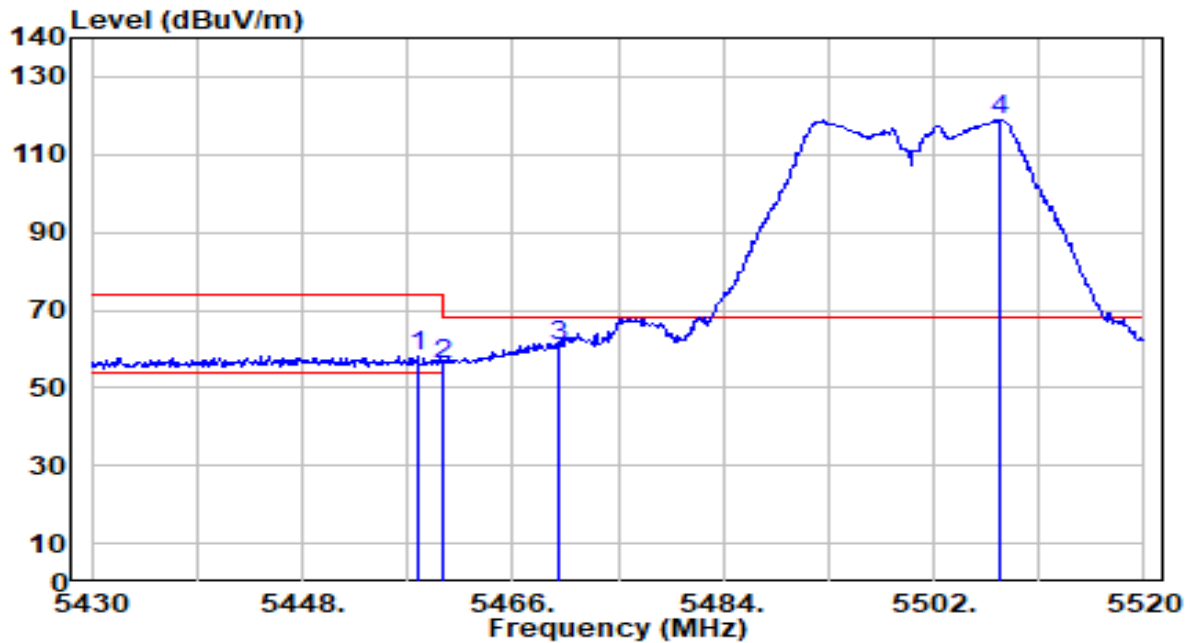


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.810	57.44	0.65	58.09	-15.91	74.00	150	176	Peak
2	5460.000	55.57	0.66	56.23	-17.77	74.00	150	176	Peak
3	* 5470.000	60.08	0.71	60.79	-7.41	68.20	150	176	Peak
4	5507.670	117.96	0.88	118.84	N/A	N/A	150	176	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

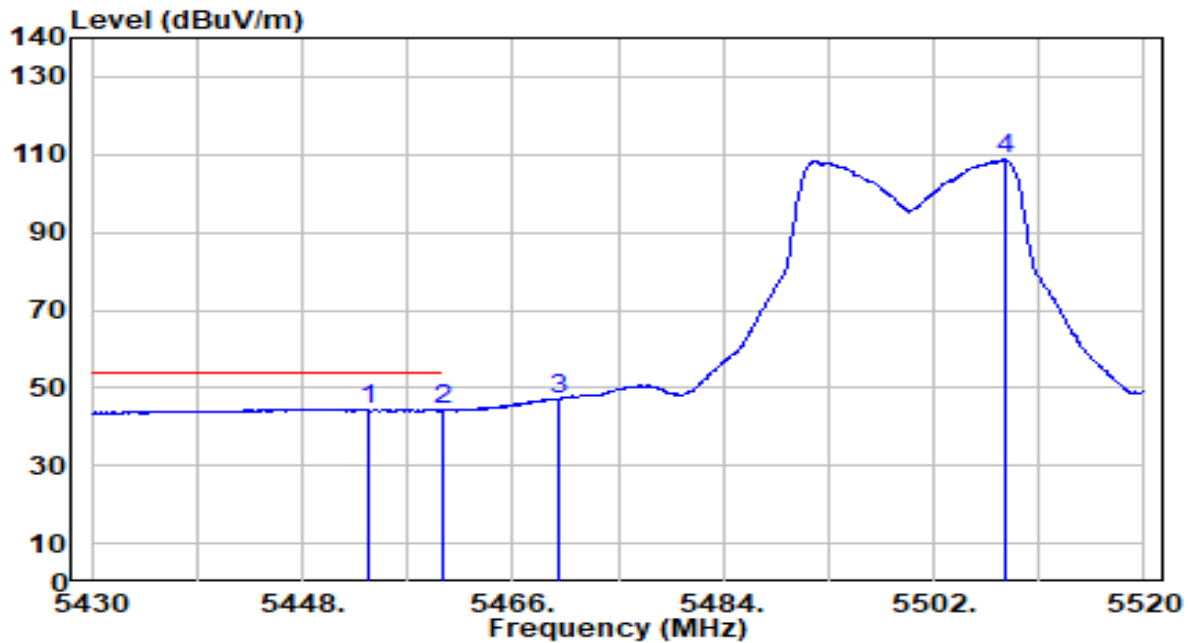


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5453.580	43.98	0.63	44.61	-9.39	54.00	150	176	Average
2		5460.000	43.64	0.66	44.30	-9.70	54.00	150	176	Average
3		5470.000	46.52	0.71	47.23	N/A	N/A	150	176	Average
4		5508.030	107.81	0.88	108.69	N/A	N/A	150	176	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	By PoE

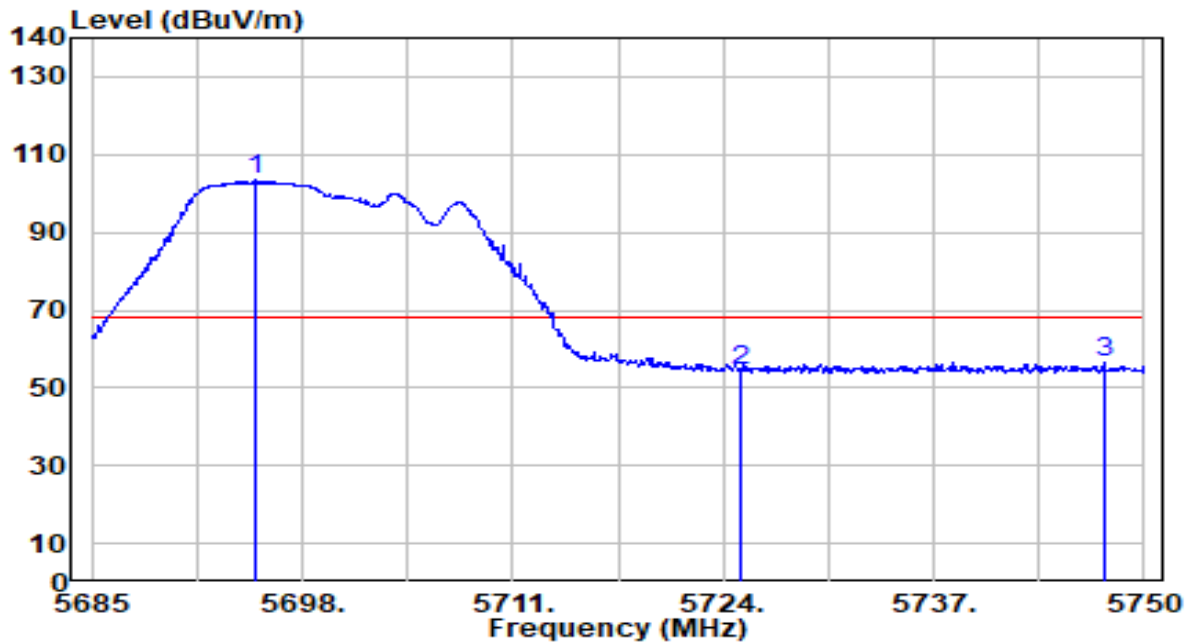


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5695.140	101.87	1.75	103.62	N/A	N/A	115	175	Peak
2	5725.000	52.43	1.89	54.33	-13.87	68.20	115	175	Peak
3	* 5747.530	54.65	2.00	56.64	-11.56	68.20	115	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	By PoE

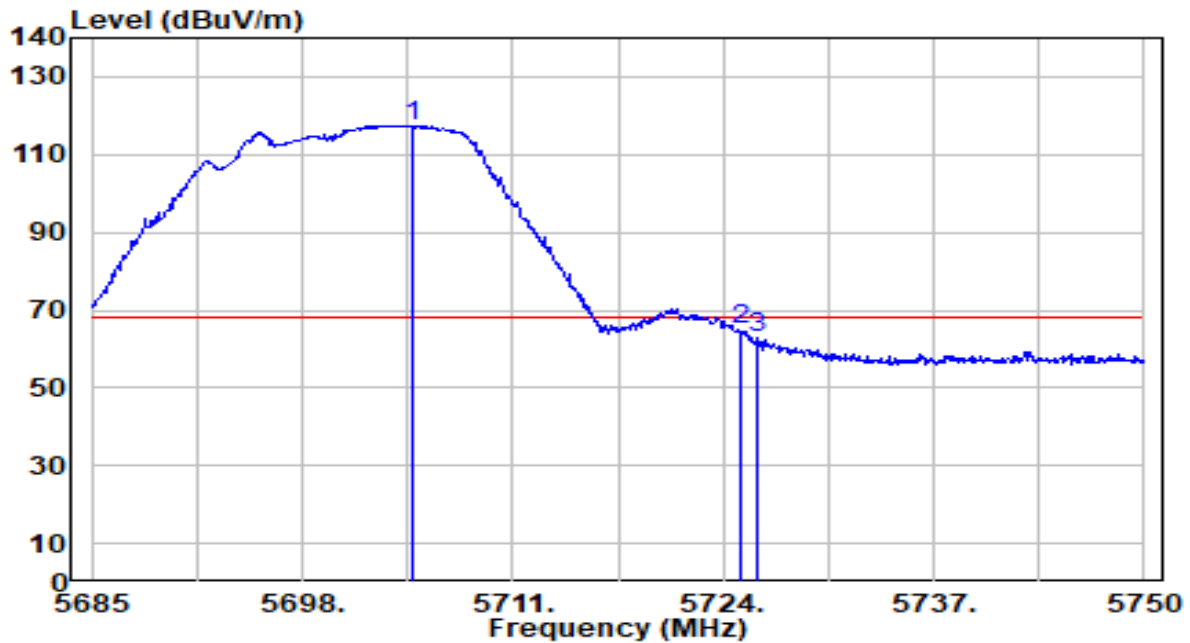


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5704.890	115.72	1.80	117.52	N/A	N/A	150	188	Peak
2	*	5725.000	62.88	1.89	64.77	-3.43	68.20	150	188	Peak
3		5726.080	60.73	1.90	62.63	-5.57	68.20	150	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	By PoE

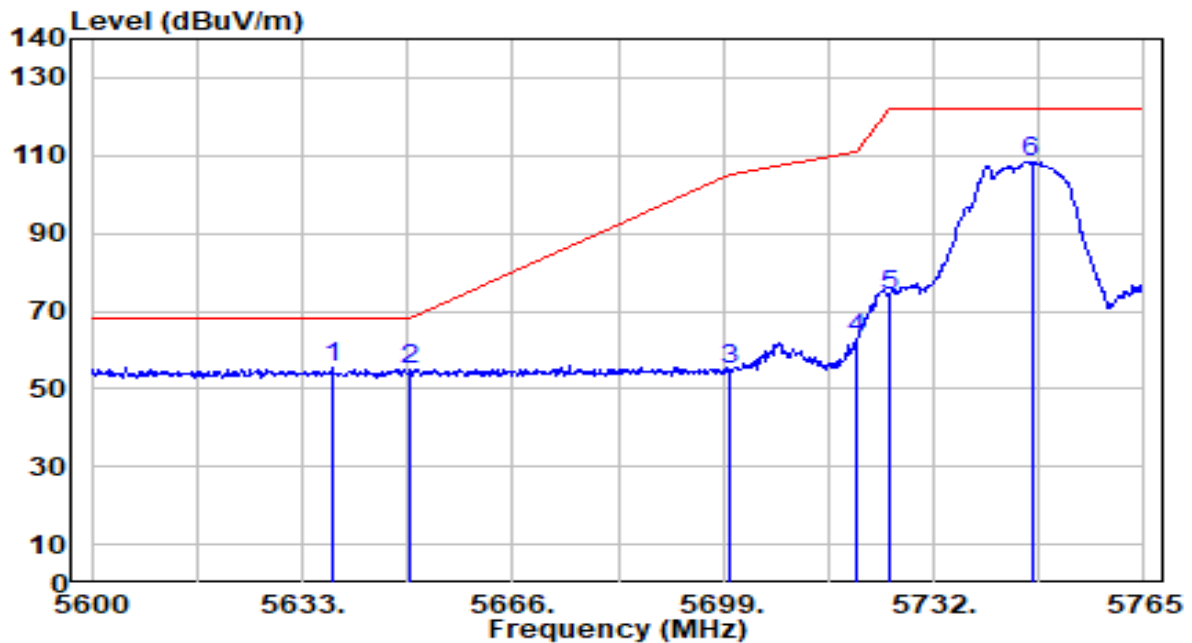


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5637.785	54.24	1.48	55.73	-12.47	68.20	280	360	Peak
2		5650.000	53.53	1.54	55.07	-13.13	68.20	280	360	Peak
3		5700.000	52.92	1.78	54.69	-50.51	105.20	280	360	Peak
4		5720.000	60.83	1.87	62.70	-48.10	110.80	280	360	Peak
5		5725.000	72.25	1.89	74.14	-48.06	122.20	280	360	Peak
6		5747.345	106.43	2.00	108.43	N/A	N/A	280	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	By PoE

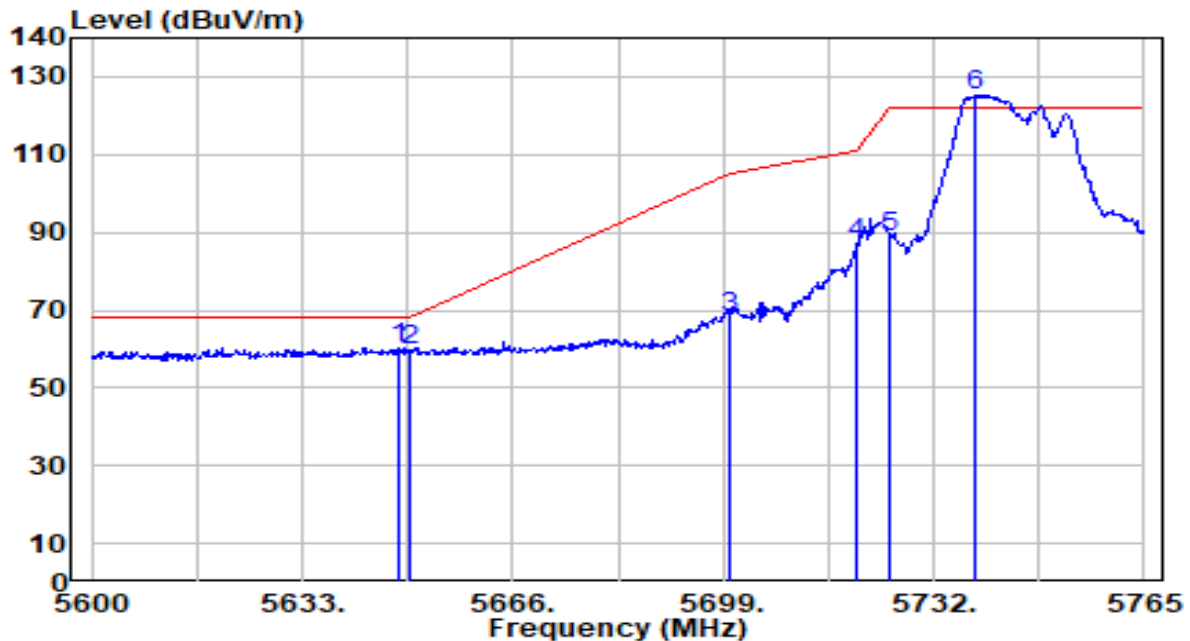


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.015	58.75	1.53	60.29	-7.91	68.20	150	182	Peak
2		5650.000	57.93	1.54	59.47	-8.73	68.20	150	182	Peak
3		5700.000	66.62	1.78	68.40	-36.80	105.20	150	182	Peak
4		5720.000	85.52	1.87	87.39	-23.41	110.80	150	182	Peak
5		5725.000	86.95	1.89	88.84	-33.36	122.20	150	182	Peak
6		5738.600	123.30	1.96	125.26	N/A	N/A	150	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	By PoE

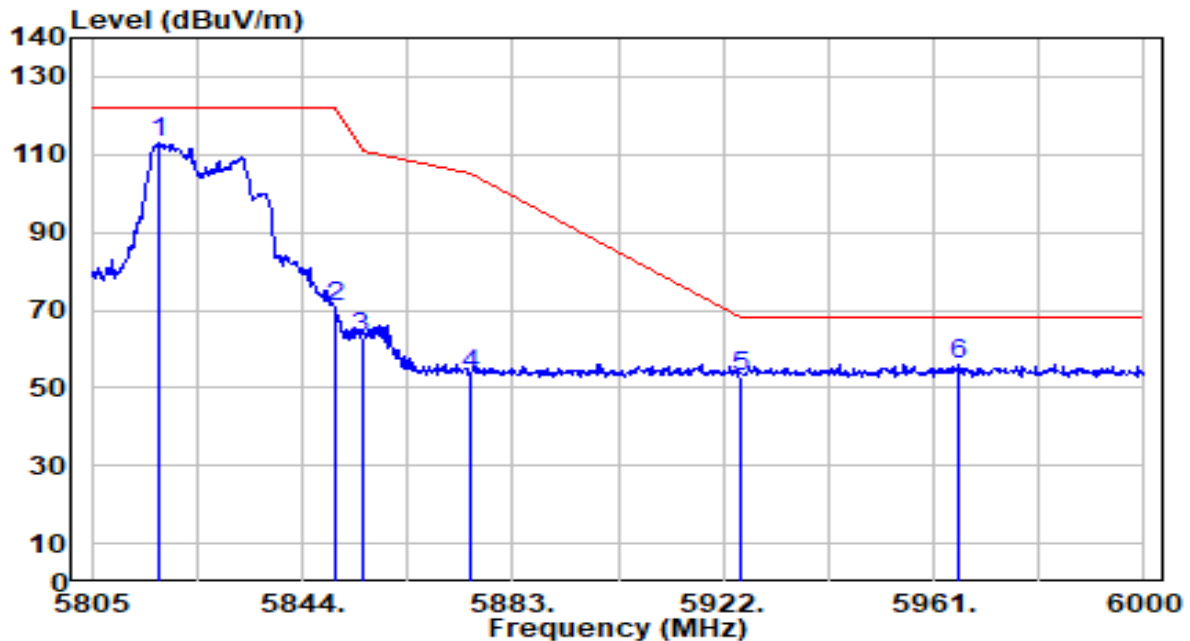


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5817.675	110.89	2.25	113.14	N/A	N/A	100	0	Peak
2	5850.000	68.51	2.25	70.76	-51.44	122.20	100	0	Peak
3	5855.000	60.79	2.25	63.05	-47.75	110.80	100	0	Peak
4	5875.000	51.21	2.26	53.47	-51.73	105.20	100	0	Peak
5	5925.000	50.71	2.27	52.98	-15.22	68.20	100	0	Peak
6	* 5965.485	53.90	2.27	56.17	-12.03	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	By PoE

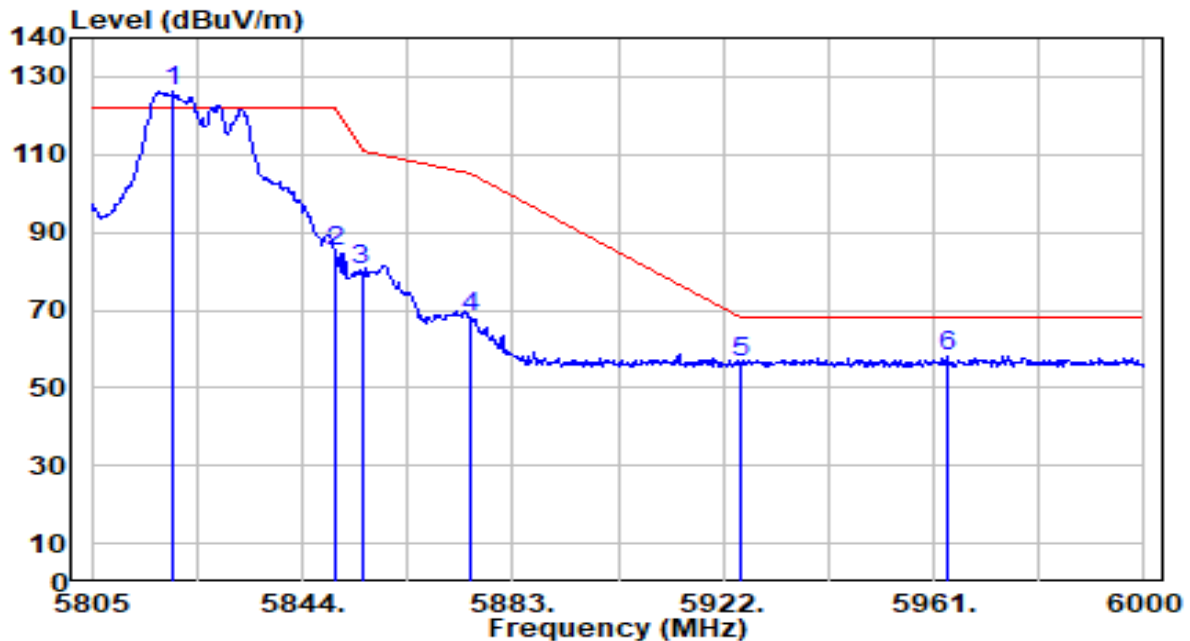


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5820.015	123.81	2.25	126.06	N/A	N/A	150	360	Peak
2	5850.000	82.90	2.25	85.15	-37.05	122.20	150	360	Peak
3	5855.000	78.27	2.25	80.53	-30.27	110.80	150	360	Peak
4	5875.000	65.77	2.26	68.03	-37.17	105.20	150	360	Peak
5	5925.000	54.38	2.27	56.64	-11.56	68.20	150	360	Peak
6	* 5963.340	55.91	2.27	58.18	-10.02	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By PoE

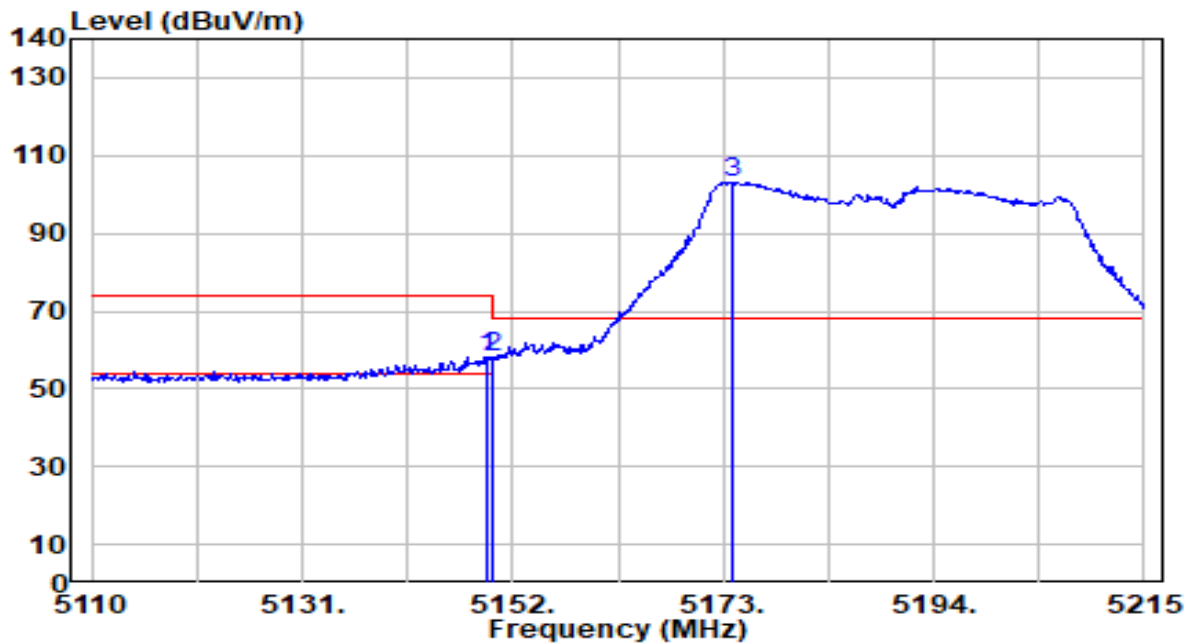


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.375	57.45	0.65	58.10	-15.90	74.00	293	150	Peak
2	*	5150.000	57.53	0.65	58.19	-15.81	74.00	293	150	Peak
3		5173.840	102.37	0.68	103.04	N/A	N/A	293	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By PoE

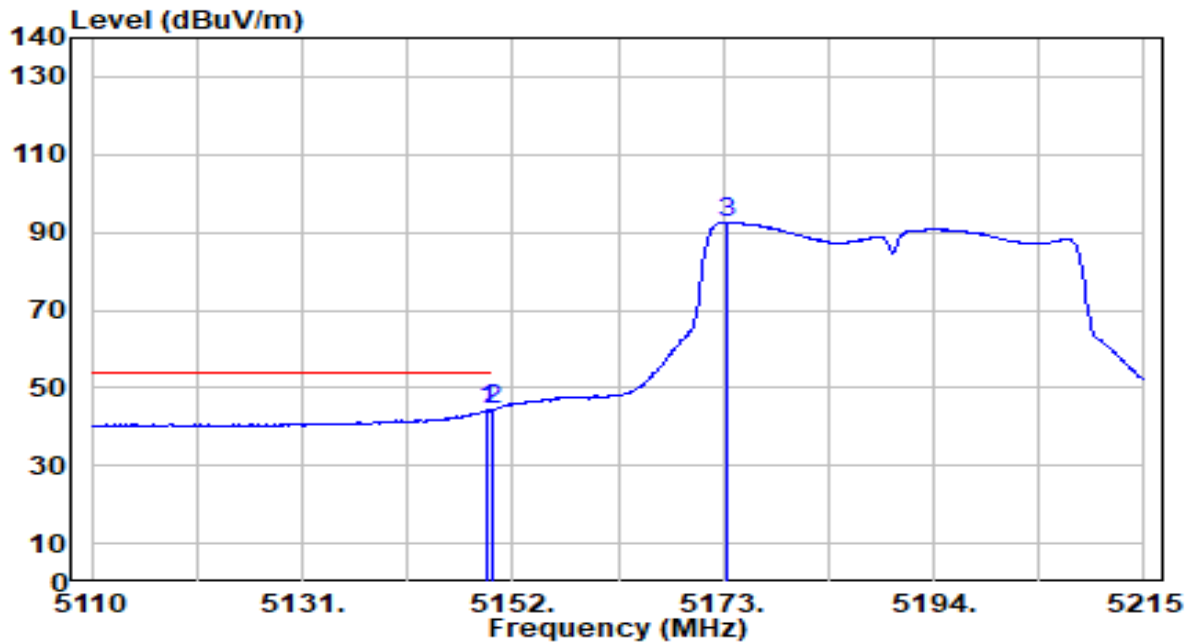


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.480	43.49	0.65	44.14	-9.86	54.00	293	150	Average
2	*	5150.000	43.58	0.65	44.24	-9.76	54.00	293	150	Average
3		5173.420	91.95	0.68	92.62	N/A	N/A	293	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By PoE

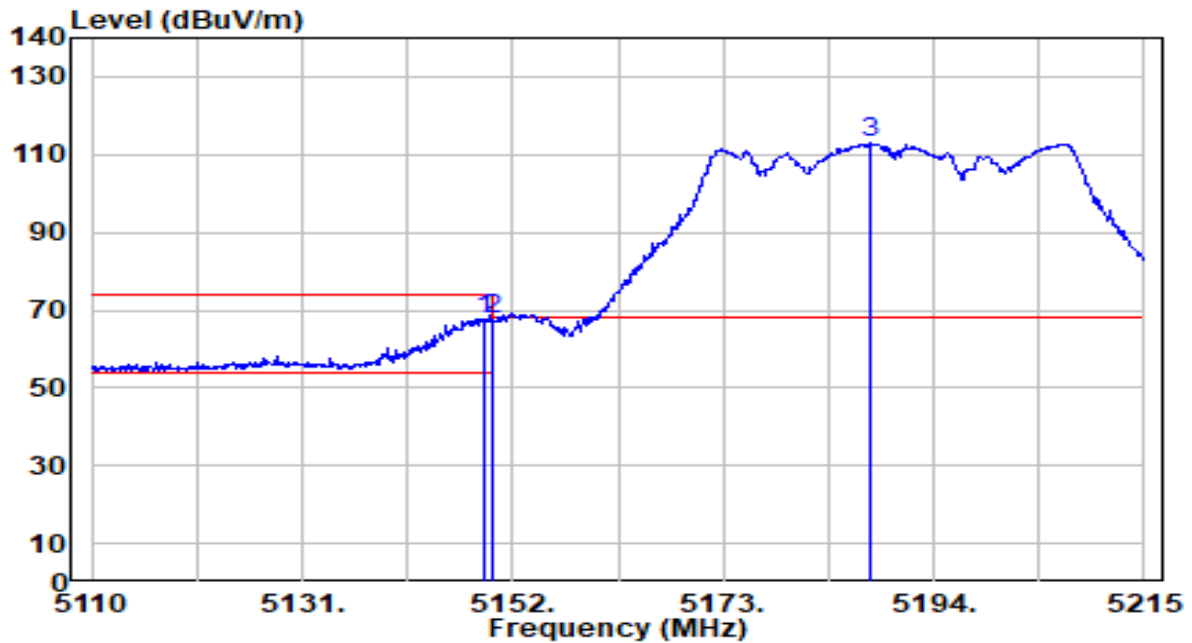


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.270	67.05	0.65	67.71	-6.29	74.00	150	353	Peak
2		5150.000	66.79	0.65	67.44	-6.56	74.00	150	353	Peak
3		5187.595	112.13	0.69	112.82	N/A	N/A	150	353	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By PoE

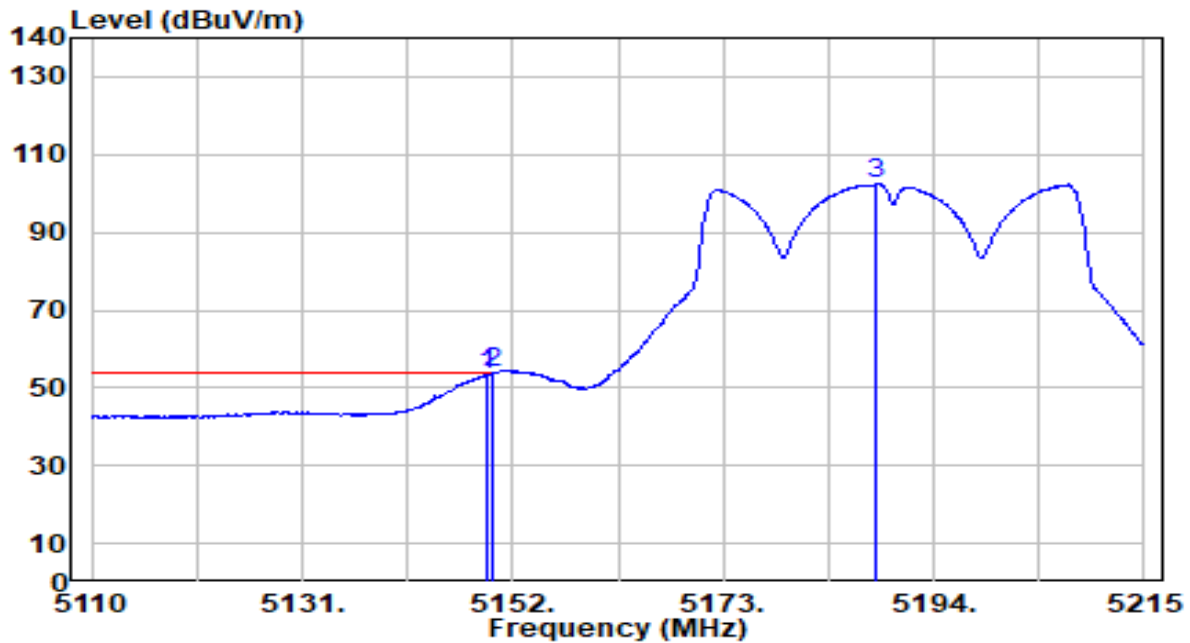


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.480	52.62	0.65	53.27	-0.73	54.00	150	353	Average
2	*	5150.000	53.22	0.65	53.88	-0.12	54.00	150	353	Average
3		5188.330	101.68	0.69	102.37	N/A	N/A	150	353	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

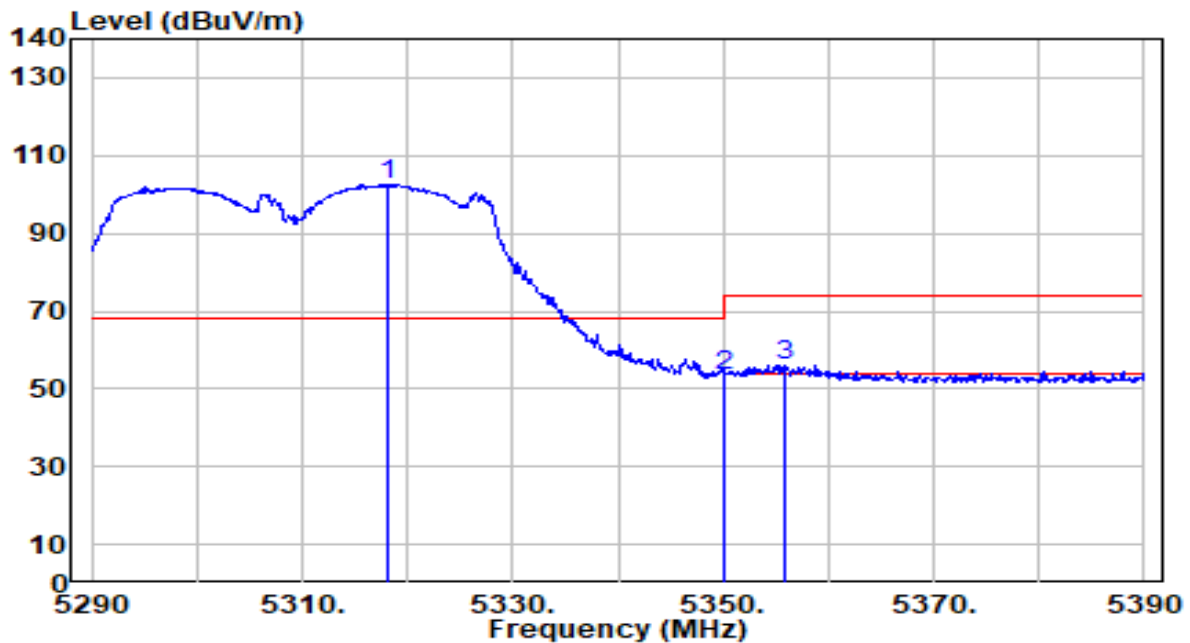


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.100	102.07	0.52	102.59	N/A	N/A	262	131	Peak
2	5350.000	52.92	0.47	53.39	-20.61	74.00	262	131	Peak
3	* 5355.900	55.61	0.46	56.07	-17.93	74.00	262	131	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

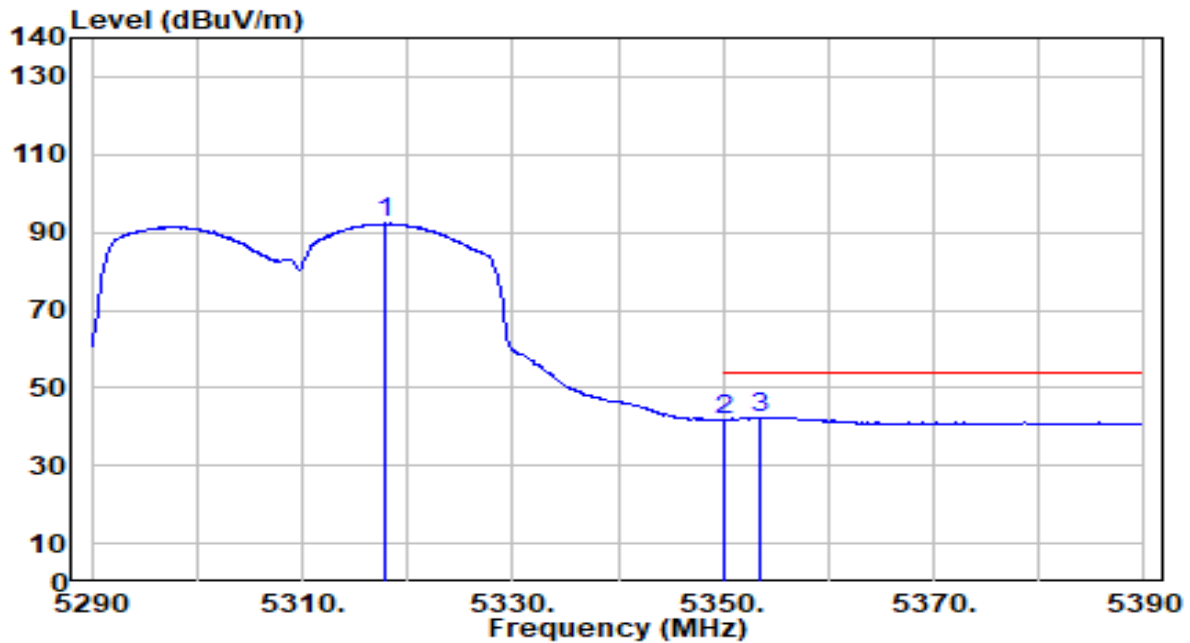


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.900	91.68	0.52	92.20	N/A	N/A	262	131	Average
2	5350.000	41.24	0.47	41.71	-12.29	54.00	262	131	Average
3	* 5353.500	41.92	0.47	42.39	-11.61	54.00	262	131	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

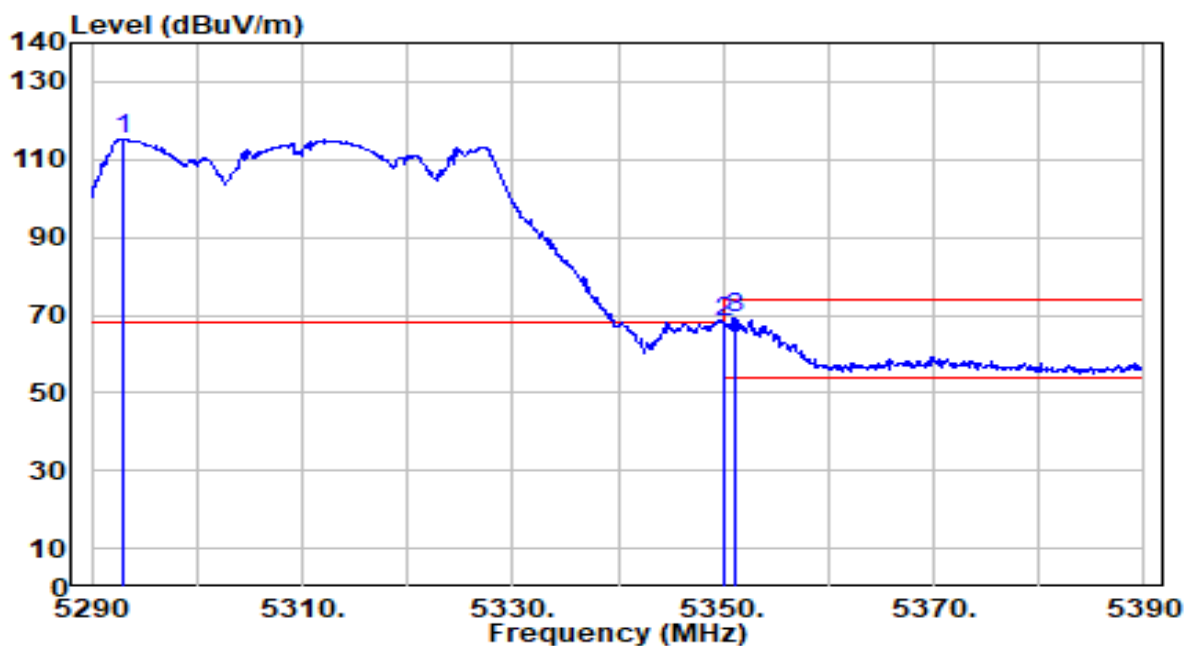


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5292.900	114.68	0.56	115.23	N/A	N/A	150	8	Peak
2	5350.000	67.70	0.47	68.17	-5.83	74.00	150	8	Peak
3	* 5351.100	68.62	0.47	69.09	-4.91	74.00	150	8	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

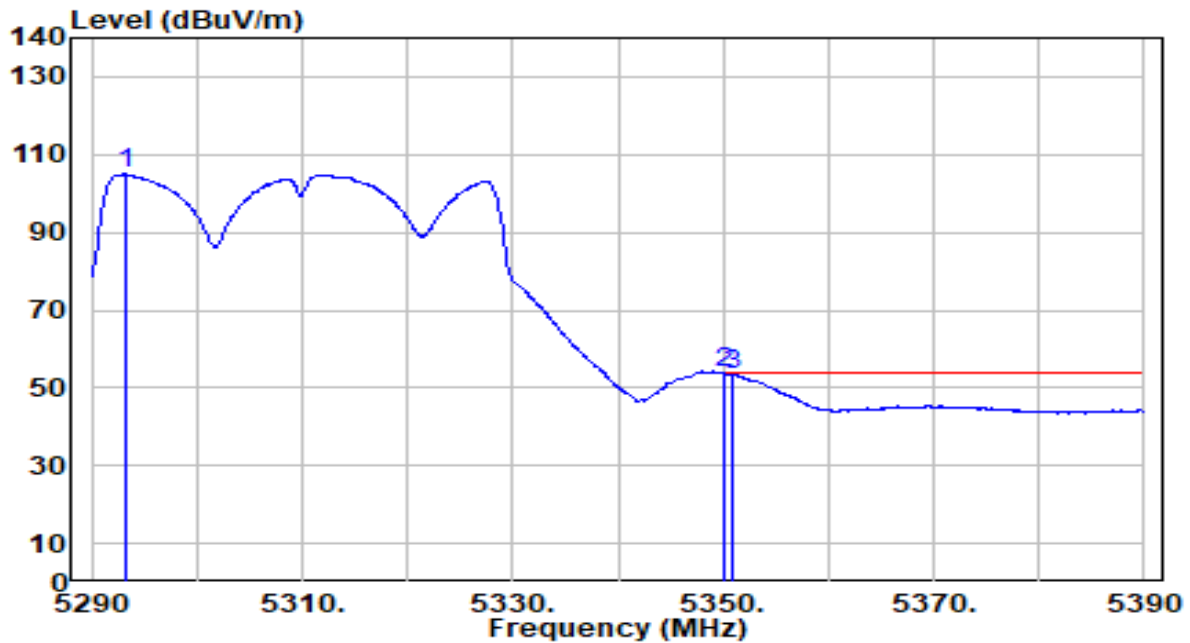


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5293.200	104.42	0.56	104.98	N/A	N/A	150	8	Average
2	*	5350.000	53.34	0.47	53.81	-0.19	54.00	150	8	Average
3		5351.000	52.92	0.47	53.38	-0.62	54.00	150	8	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

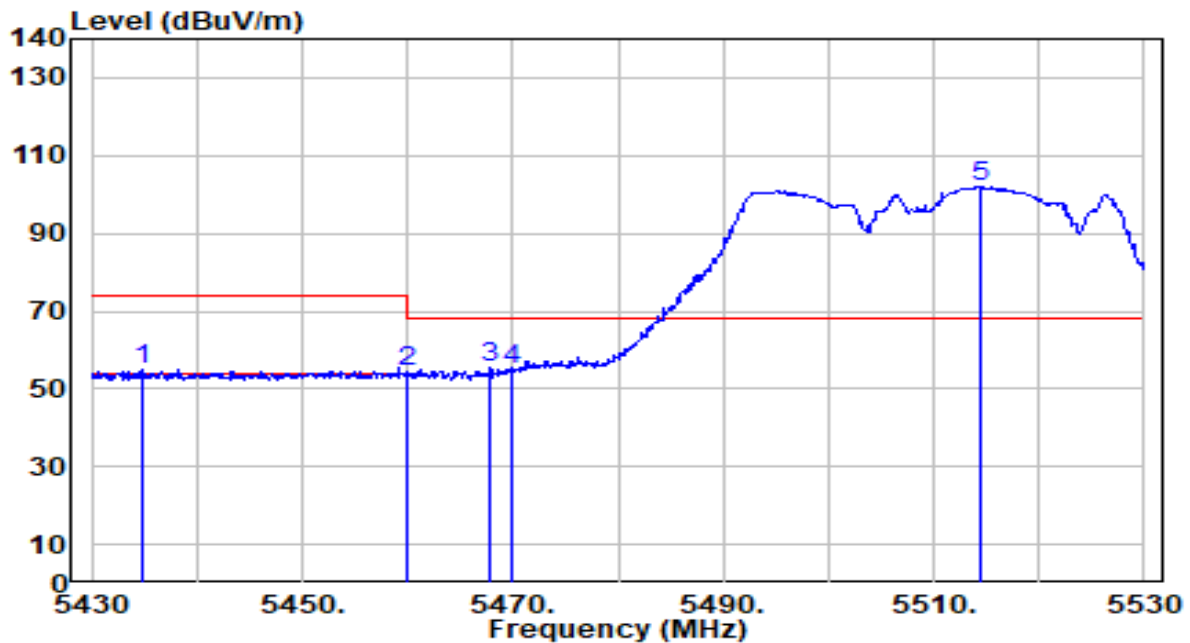


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5434.700	54.18	0.55	54.72	-19.28	74.00	124	167	Peak
2	5460.000	53.51	0.66	54.17	-19.83	74.00	124	167	Peak
3	* 5467.900	54.64	0.70	55.34	-12.86	68.20	124	167	Peak
4	5470.000	54.11	0.71	54.82	-13.38	68.20	124	167	Peak
5	5514.500	101.04	0.91	101.95	N/A	N/A	124	167	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

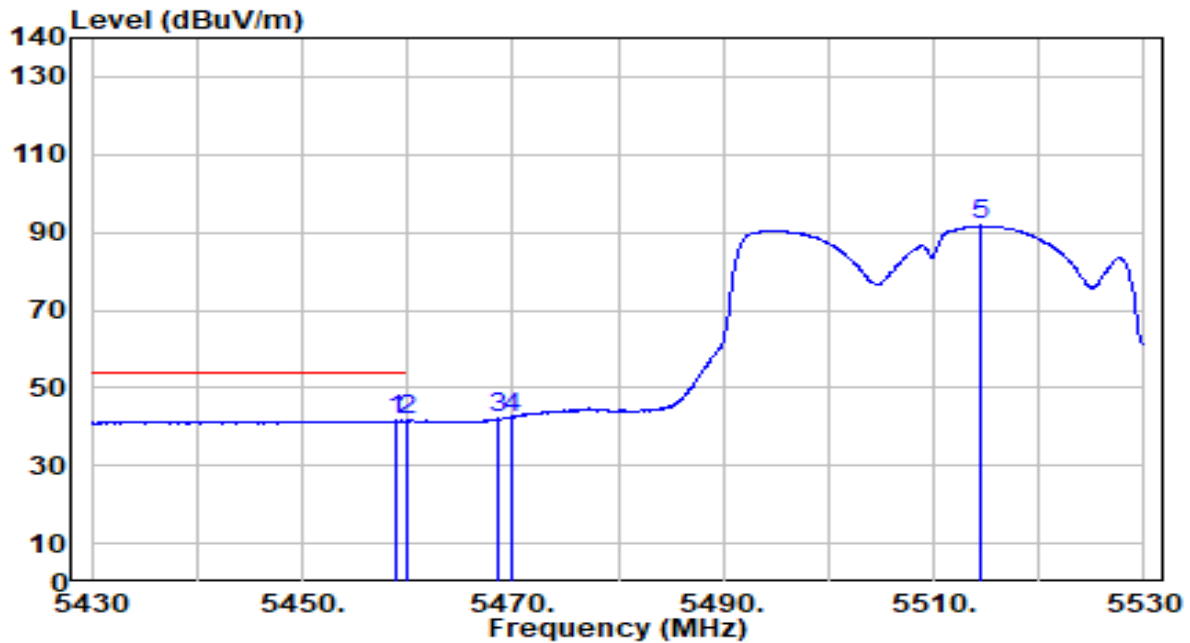


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5458.900	40.83	0.66	41.49	-12.51	54.00	124	167	Average
2	*	5460.000	40.89	0.66	41.56	-12.44	54.00	124	167	Average
3		5468.700	41.46	0.70	42.16	N/A	N/A	124	167	Average
4		5470.000	41.70	0.71	42.41	N/A	N/A	124	167	Average
5		5514.500	90.80	0.91	91.70	N/A	N/A	124	167	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

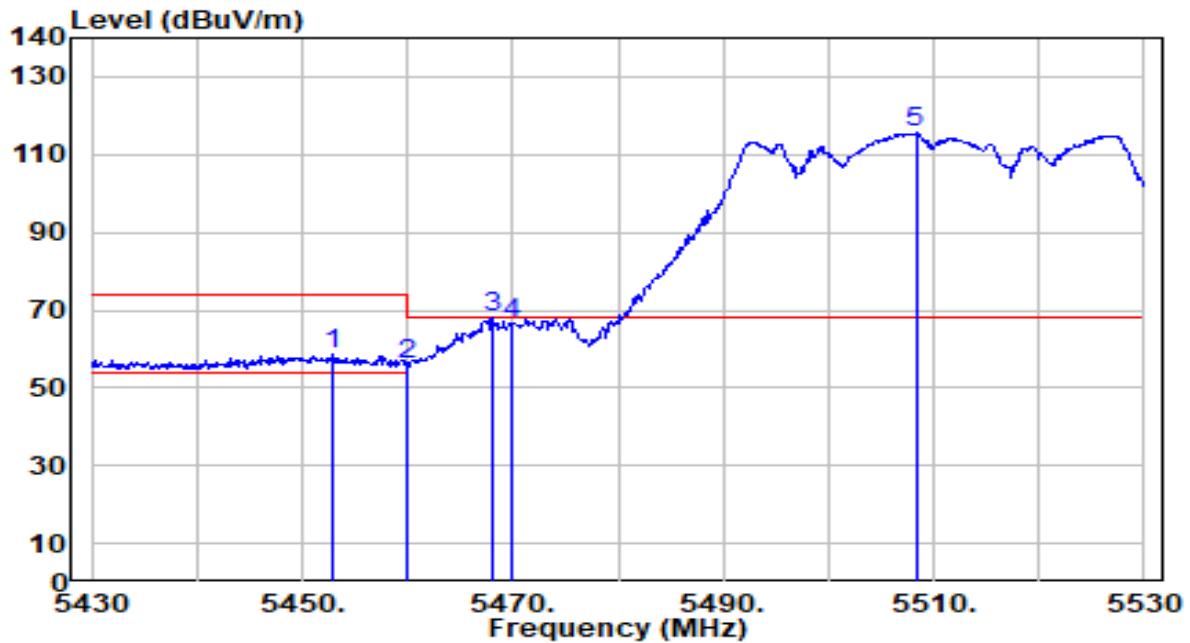


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.900	57.75	0.63	58.38	-15.62	74.00	167	184	Peak
2	5460.000	55.21	0.66	55.87	-18.13	74.00	167	184	Peak
3	* 5468.000	67.32	0.70	68.02	-0.18	68.20	167	184	Peak
4	5470.000	65.67	0.71	66.37	-1.83	68.20	167	184	Peak
5	5508.300	114.58	0.88	115.46	N/A	N/A	167	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

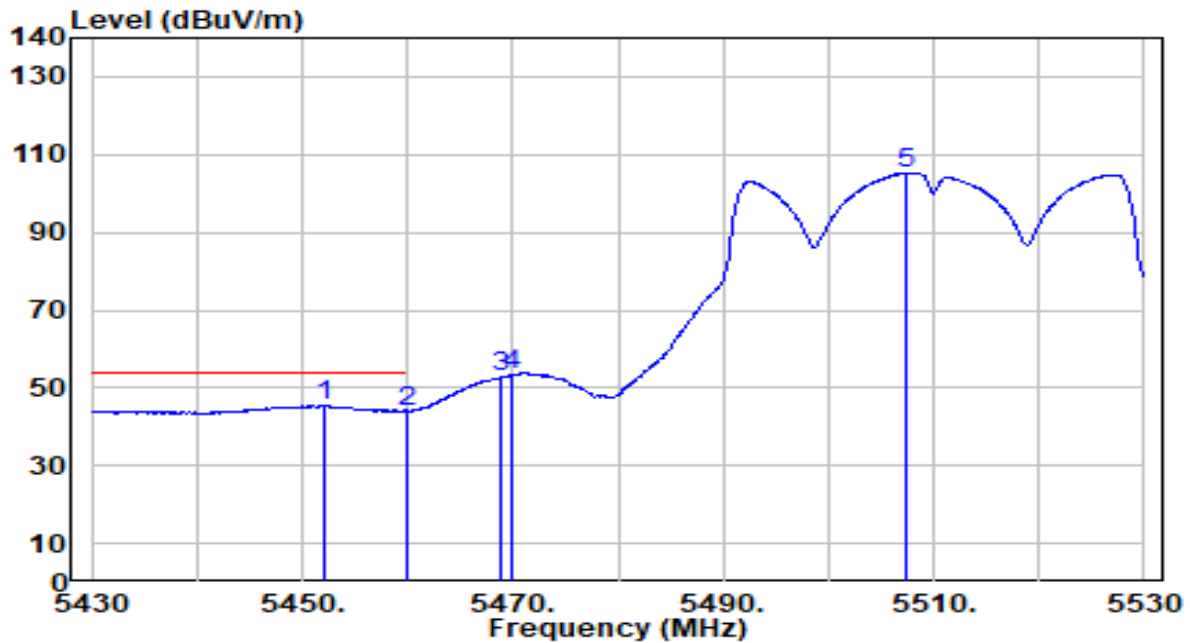


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5452.100	44.82	0.63	45.45	-8.55	54.00	167	184	Average
2		5460.000	43.36	0.66	44.02	-9.98	54.00	167	184	Average
3		5468.800	52.04	0.70	52.74	N/A	N/A	167	184	Average
4		5470.000	52.49	0.71	53.19	N/A	N/A	167	184	Average
5		5507.500	104.37	0.88	105.25	N/A	N/A	167	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	By PoE

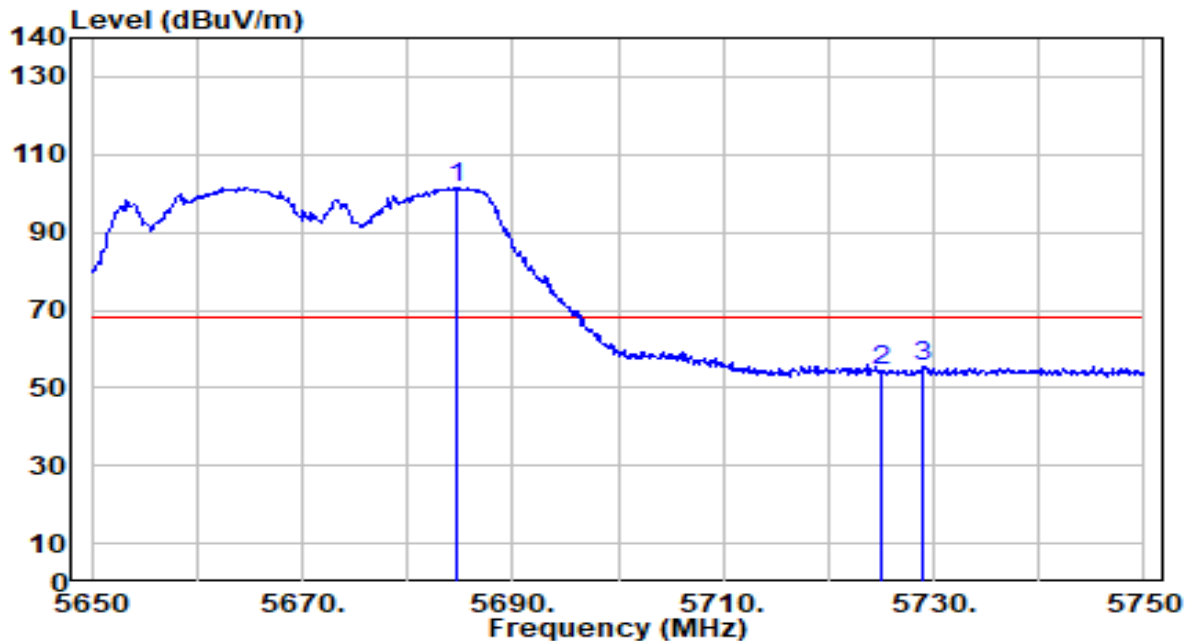


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5684.800	99.83	1.70	101.54	N/A	N/A	119	174	Peak
2	5725.000	52.28	1.89	54.18	-14.02	68.20	119	174	Peak
3	* 5729.000	53.66	1.91	55.57	-12.63	68.20	119	174	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	By PoE

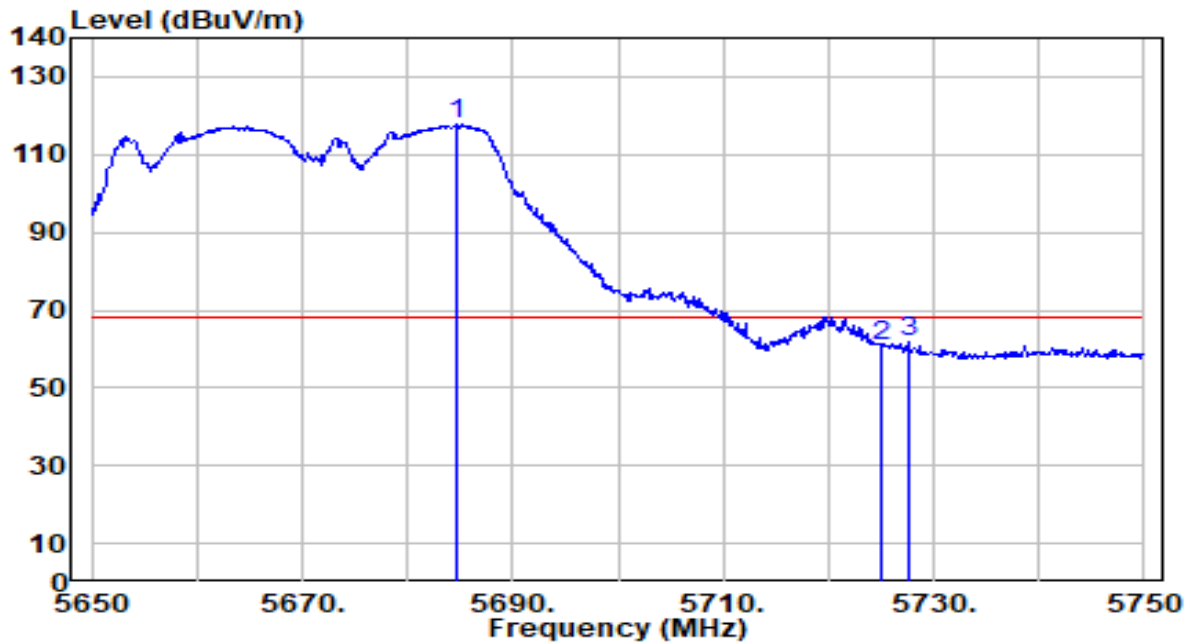


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5684.700	116.00	1.70	117.71	N/A	N/A	150	180	Peak
2	5725.000	58.92	1.89	60.81	-7.39	68.20	150	180	Peak
3	* 5727.600	59.81	1.91	61.71	-6.49	68.20	150	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	By PoE

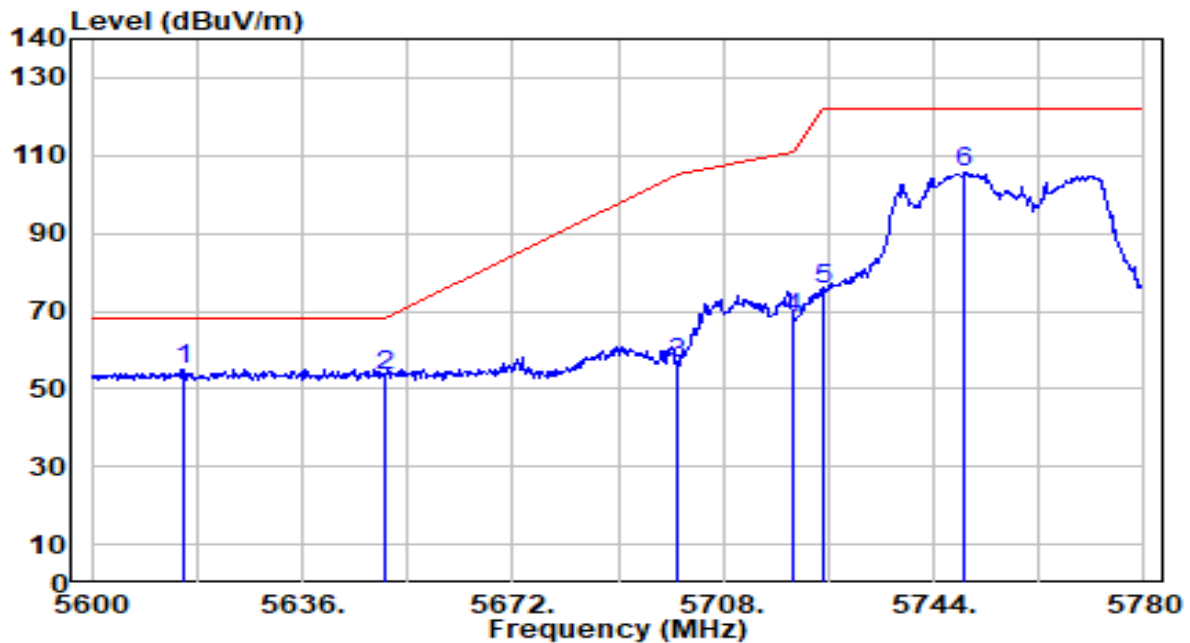


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5615.840	53.62	1.38	55.00	-13.20	68.20	100	0	Peak
2		5650.000	51.98	1.54	53.52	-14.68	68.20	100	0	Peak
3		5700.000	54.73	1.78	56.51	-48.69	105.20	100	0	Peak
4		5720.000	66.49	1.87	68.36	-42.44	110.80	100	0	Peak
5		5725.000	73.70	1.89	75.59	-46.61	122.20	100	0	Peak
6		5749.400	103.47	2.01	105.47	N/A	N/A	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	By PoE

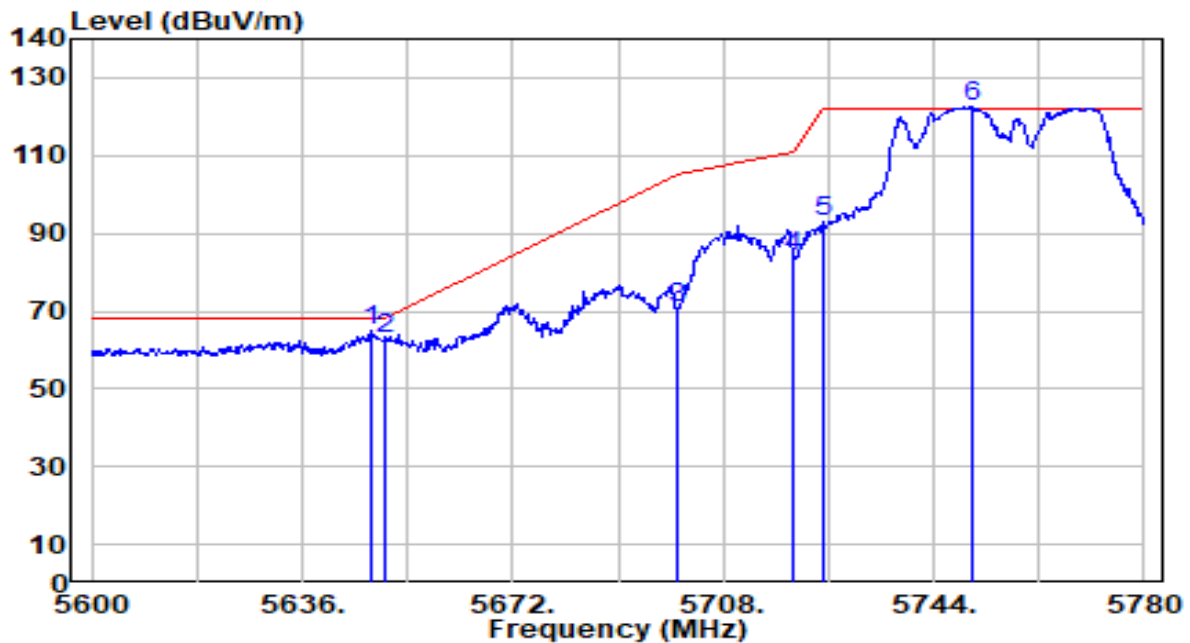


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.700	63.44	1.53	64.97	-3.23	68.20	150	180	Peak
2		5650.000	61.15	1.54	62.70	-5.50	68.20	150	180	Peak
3		5700.000	69.07	1.78	70.84	-34.36	105.20	150	180	Peak
4		5720.000	82.03	1.87	83.90	-26.90	110.80	150	180	Peak
5		5725.000	91.18	1.89	93.07	-29.13	122.20	150	180	Peak
6		5750.480	120.57	2.01	122.58	N/A	N/A	150	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	By PoE

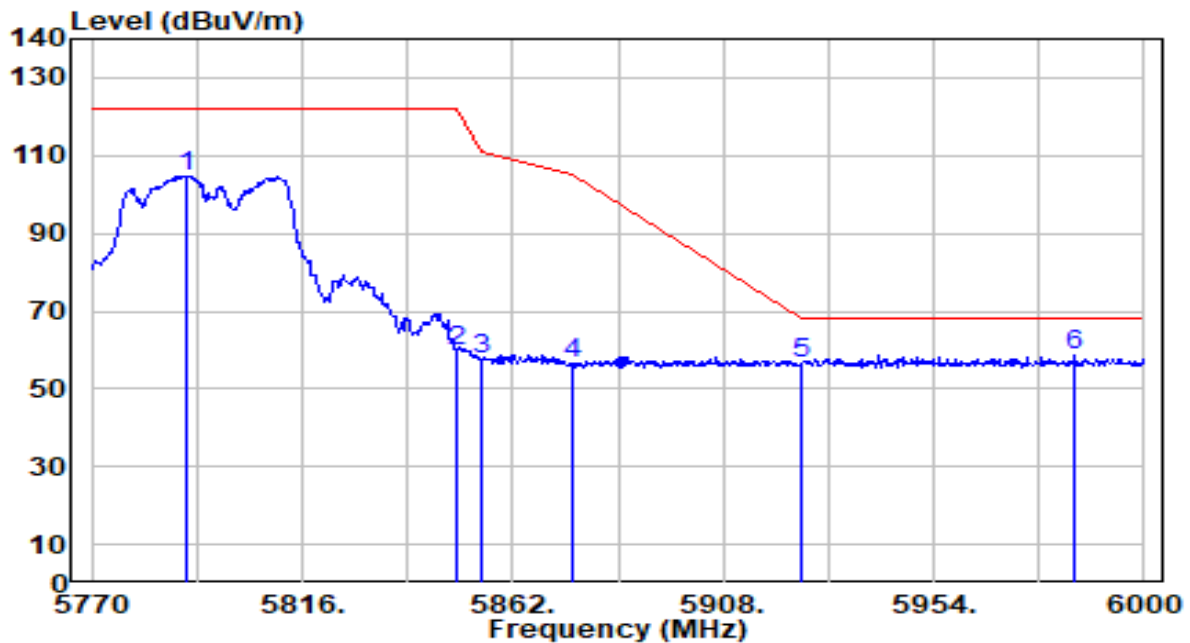


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5790.700	102.43	2.20	104.63	N/A	N/A	100	177	Peak
2	5850.000	57.28	2.25	59.54	-62.66	122.20	100	177	Peak
3	5855.000	55.27	2.25	57.53	-53.27	110.80	100	177	Peak
4	5875.000	54.30	2.26	56.56	-48.64	105.20	100	177	Peak
5	5925.000	54.25	2.27	56.52	-11.68	68.20	100	177	Peak
6	* 5984.820	56.38	2.28	58.66	-9.54	68.20	100	177	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	By PoE

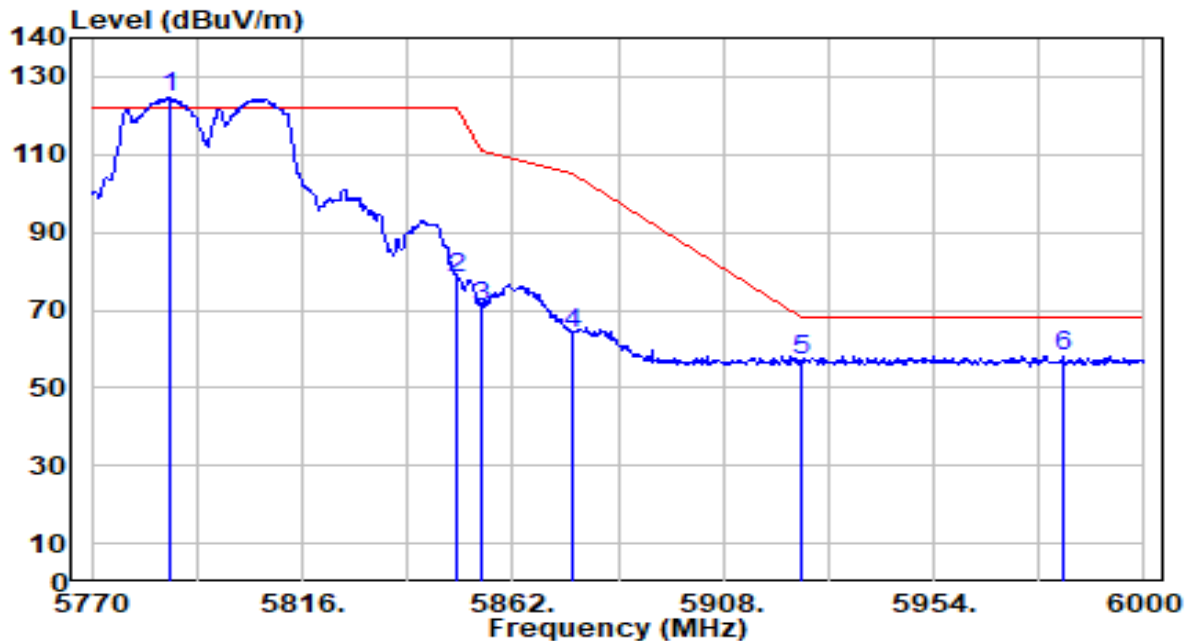


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5787.250	122.59	2.18	124.78	N/A	N/A	150	182	Peak
2	5850.000	75.96	2.25	78.22	-43.98	122.20	150	182	Peak
3	5855.000	68.60	2.25	70.86	-39.94	110.80	150	182	Peak
4	5875.000	61.90	2.26	64.16	-41.04	105.20	150	182	Peak
5	5925.000	54.54	2.27	56.80	-11.40	68.20	150	182	Peak
6	* 5982.290	56.05	2.28	58.33	-9.87	68.20	150	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

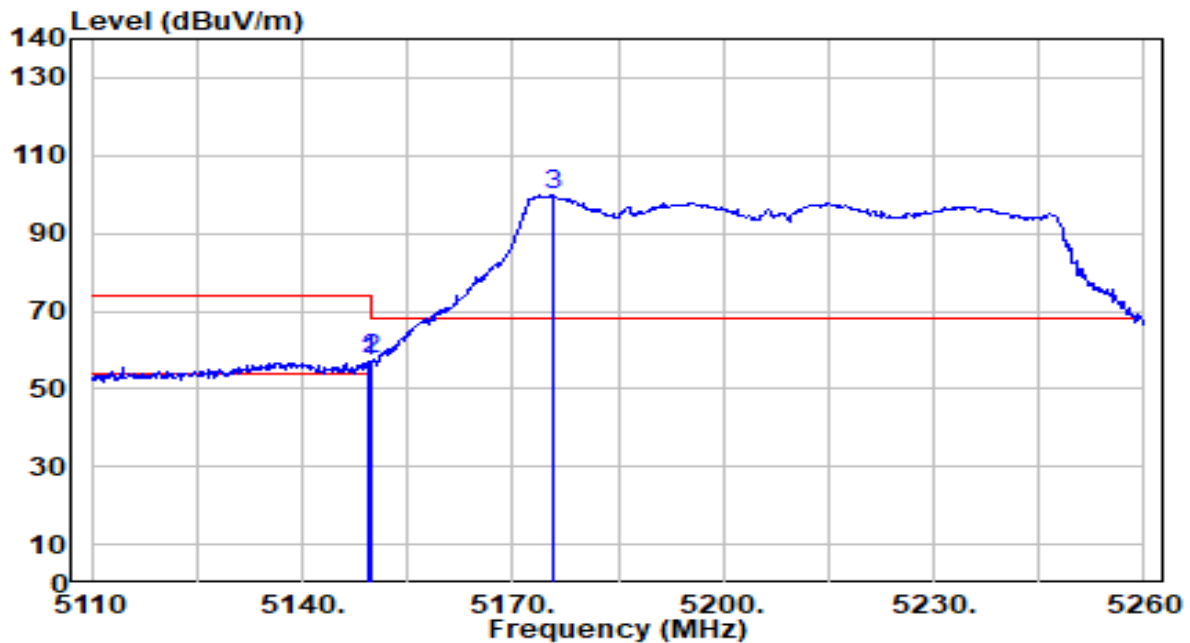


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.450	56.53	0.65	57.18	-16.82	74.00	294	152	Peak
2	*	5150.000	57.11	0.65	57.77	-16.23	74.00	294	152	Peak
3		5175.850	99.22	0.68	99.90	N/A	N/A	294	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

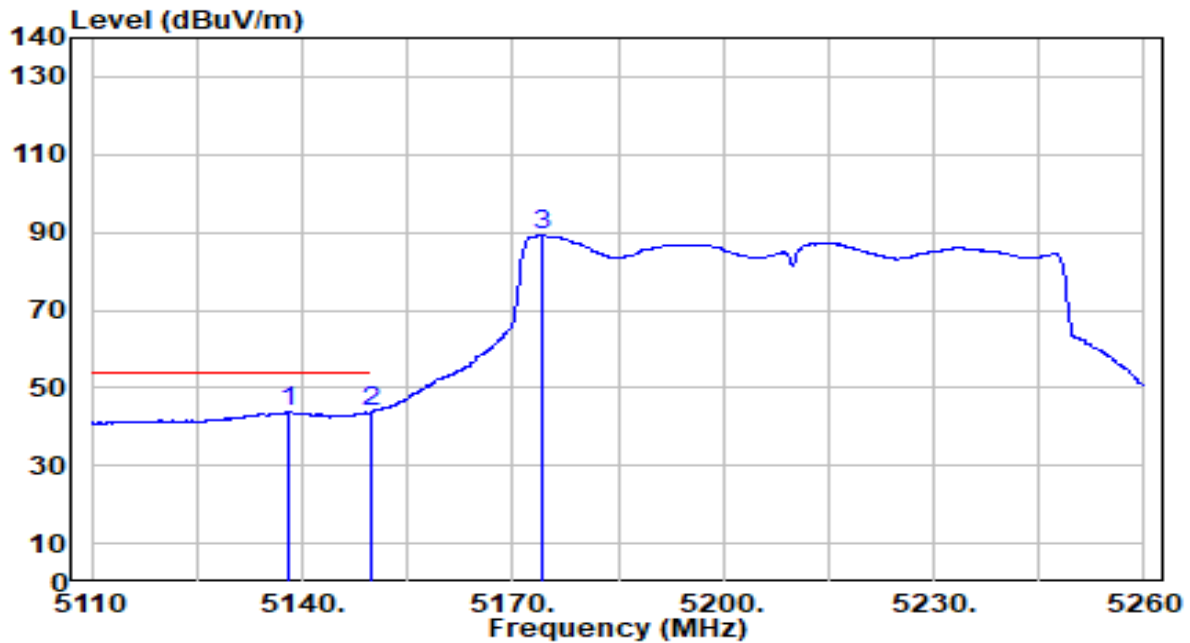


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5138.050	43.32	0.64	43.96	-10.04	54.00	294	152	Average
2		5150.000	43.13	0.65	43.79	-10.21	54.00	294	152	Average
3		5174.050	88.61	0.68	89.29	N/A	N/A	294	152	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

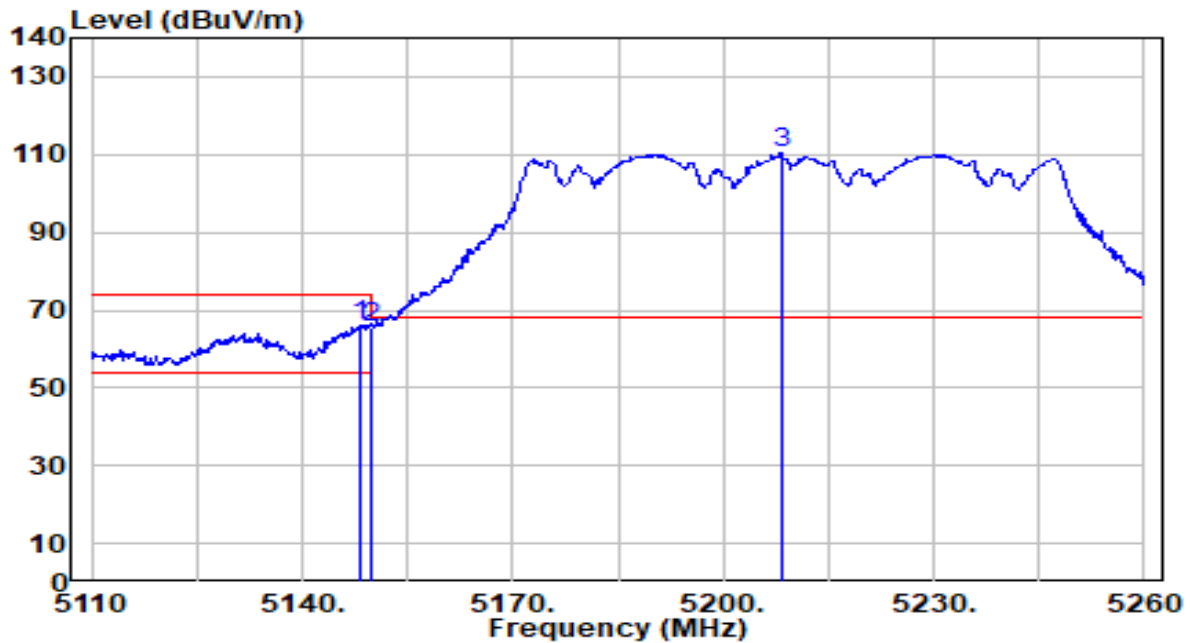


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.100	65.29	0.65	65.94	-8.06	74.00	150	353	Peak
2		5150.000	64.65	0.65	65.30	-8.70	74.00	150	353	Peak
3		5208.250	109.82	0.69	110.51	N/A	N/A	150	353	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

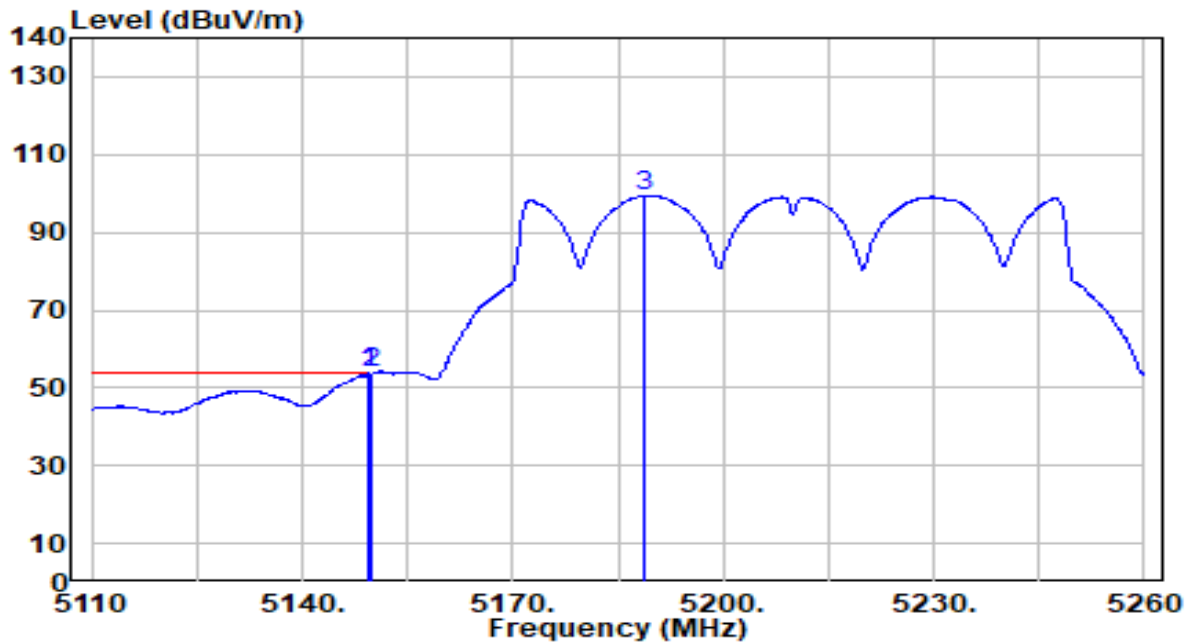


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.450	53.06	0.65	53.71	-0.29	54.00	150	353	Average
2	*	5150.000	53.21	0.65	53.87	-0.13	54.00	150	353	Average
3		5188.750	98.85	0.69	99.54	N/A	N/A	150	353	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

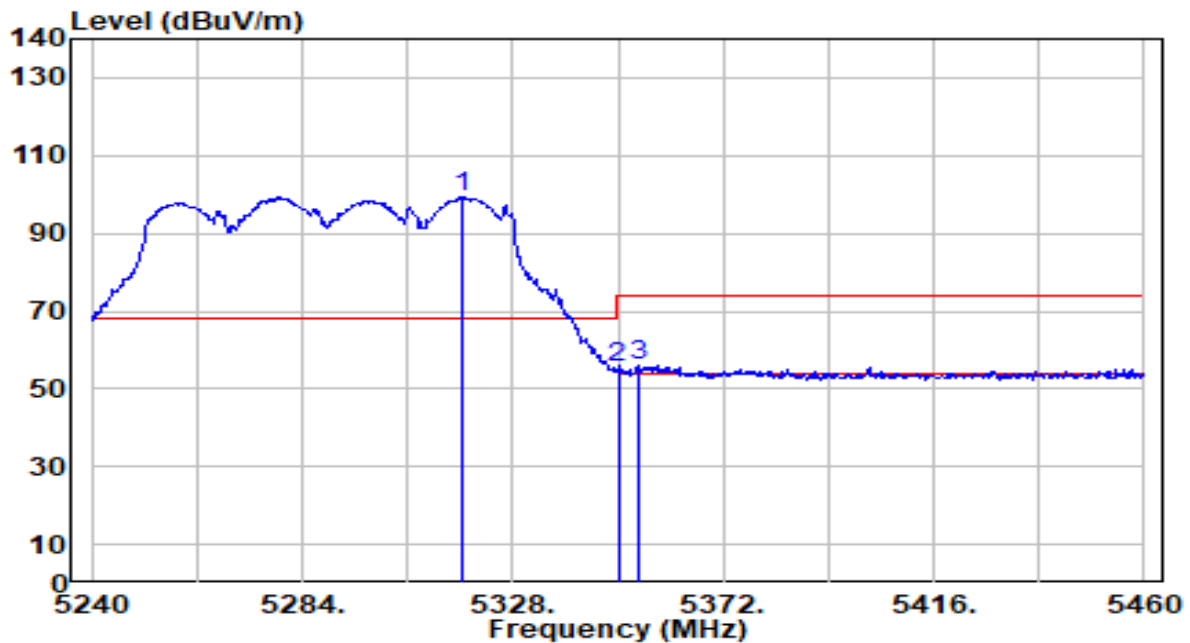


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.440	99.02	0.52	99.54	N/A	N/A	263	132	Peak
2	5350.000	55.02	0.47	55.49	-18.51	74.00	263	132	Peak
3	* 5354.180	55.66	0.46	56.12	-17.88	74.00	263	132	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

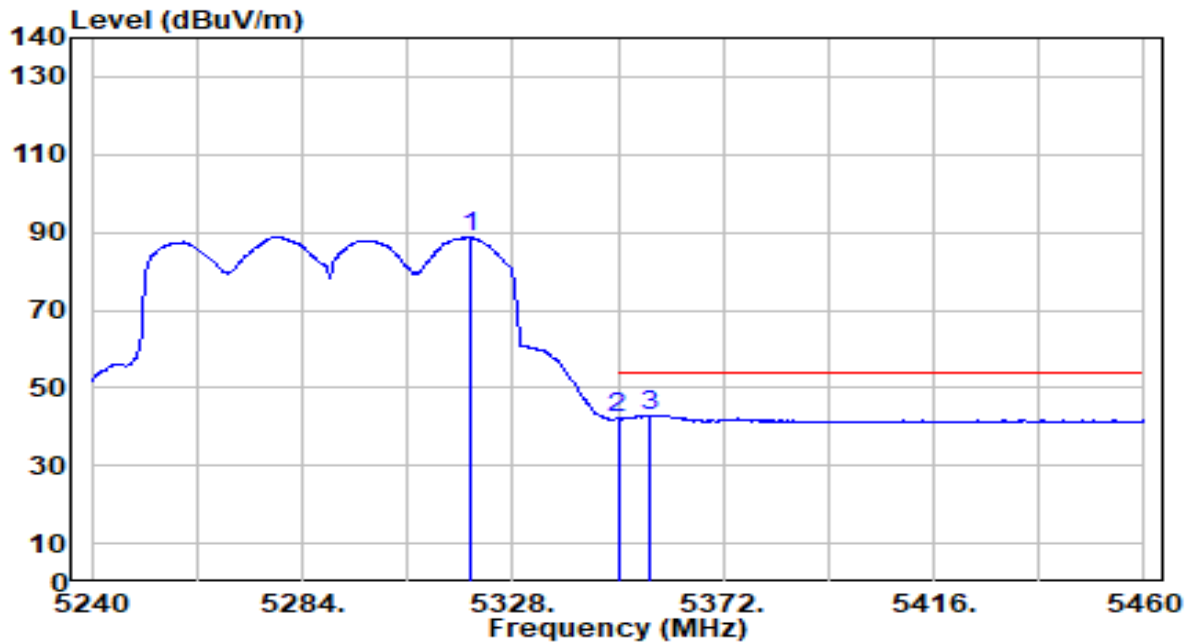


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.980	88.18	0.52	88.70	N/A	N/A	263	132	Average
2	5350.000	41.59	0.47	42.06	-11.94	54.00	263	132	Average
3	* 5356.820	42.50	0.46	42.96	-11.04	54.00	263	132	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

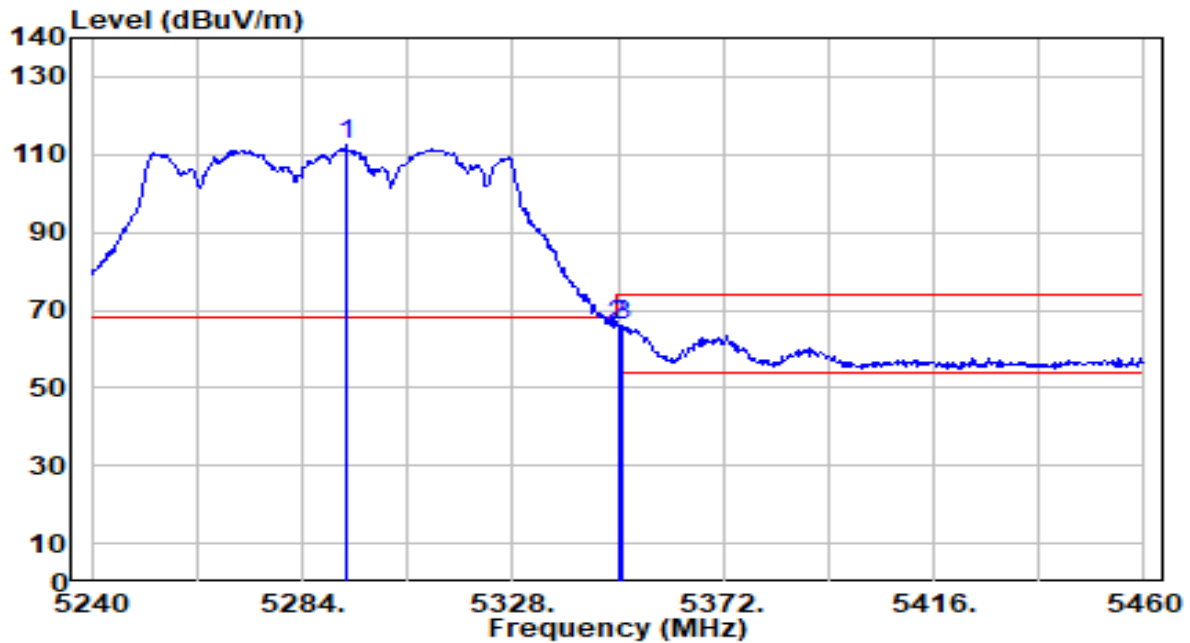


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5293.020	111.94	0.56	112.50	N/A	N/A	150	8	Peak
2	*	5350.000	65.35	0.47	65.83	-8.17	74.00	150	8	Peak
3		5350.880	65.32	0.47	65.79	-8.21	74.00	150	8	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

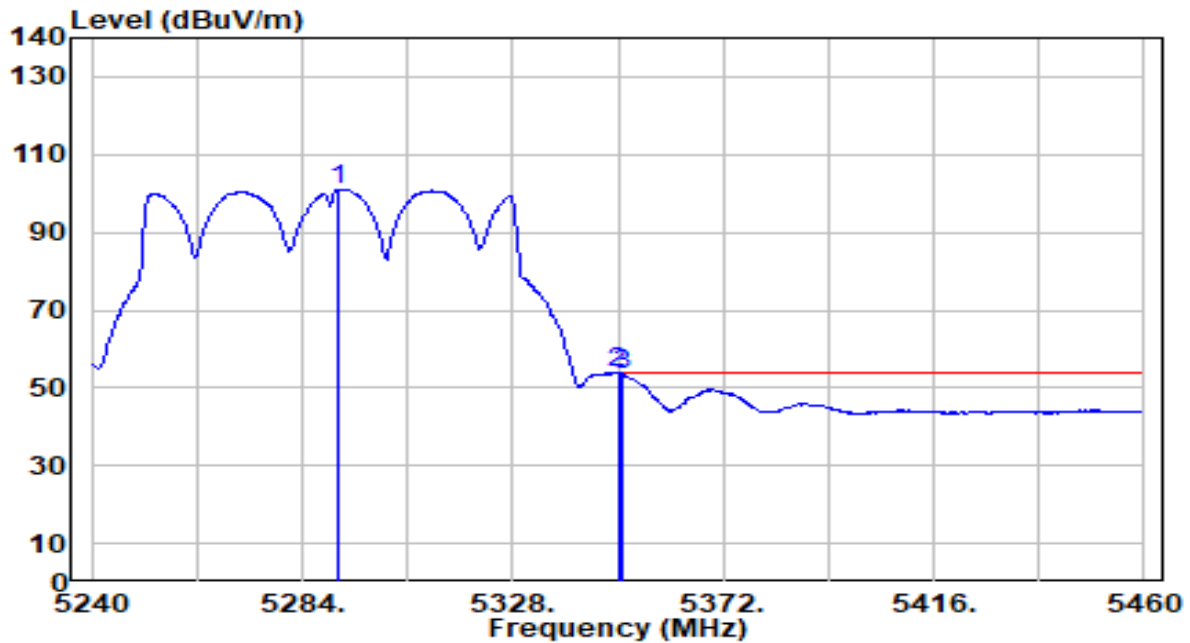


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5291.700	100.56	0.56	101.12	N/A	N/A	150	8	Average
2	*	5350.000	53.40	0.47	53.87	-0.13	54.00	150	8	Average
3		5350.880	53.00	0.47	53.47	-0.53	54.00	150	8	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

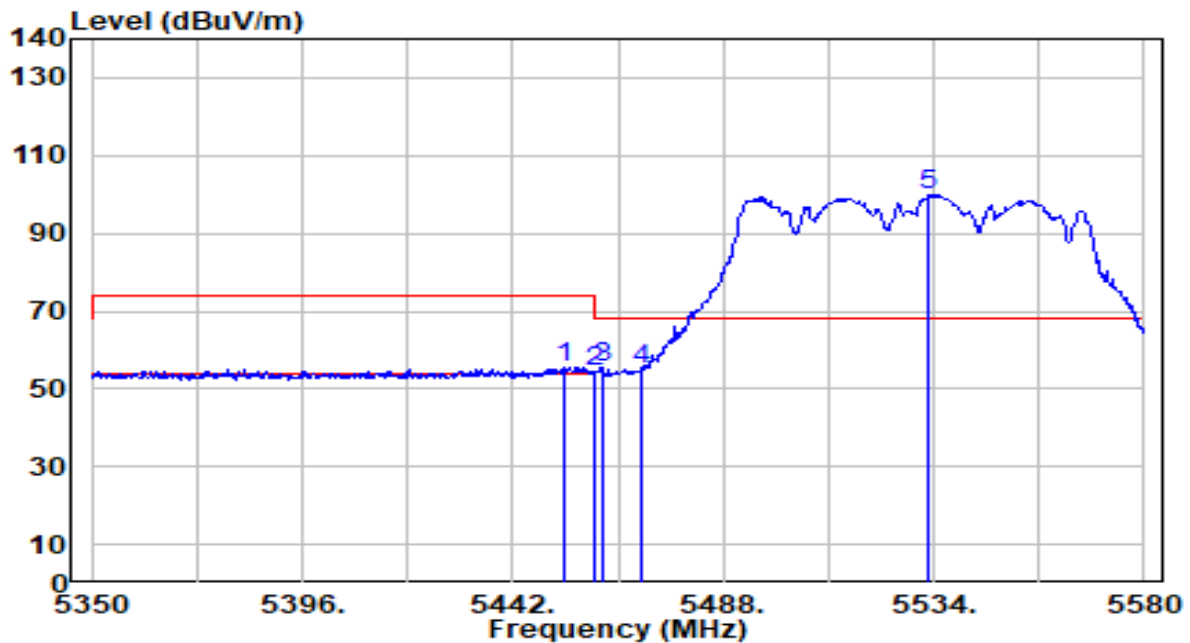


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5453.270	55.00	0.63	55.63	-18.37	74.00	100	147	Peak
2	5460.000	53.95	0.66	54.62	-19.38	74.00	100	147	Peak
3	* 5461.550	54.73	0.67	55.40	-12.80	68.20	100	147	Peak
4	5470.000	54.18	0.71	54.89	-13.31	68.20	100	147	Peak
5	5532.850	98.86	0.99	99.85	N/A	N/A	100	147	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

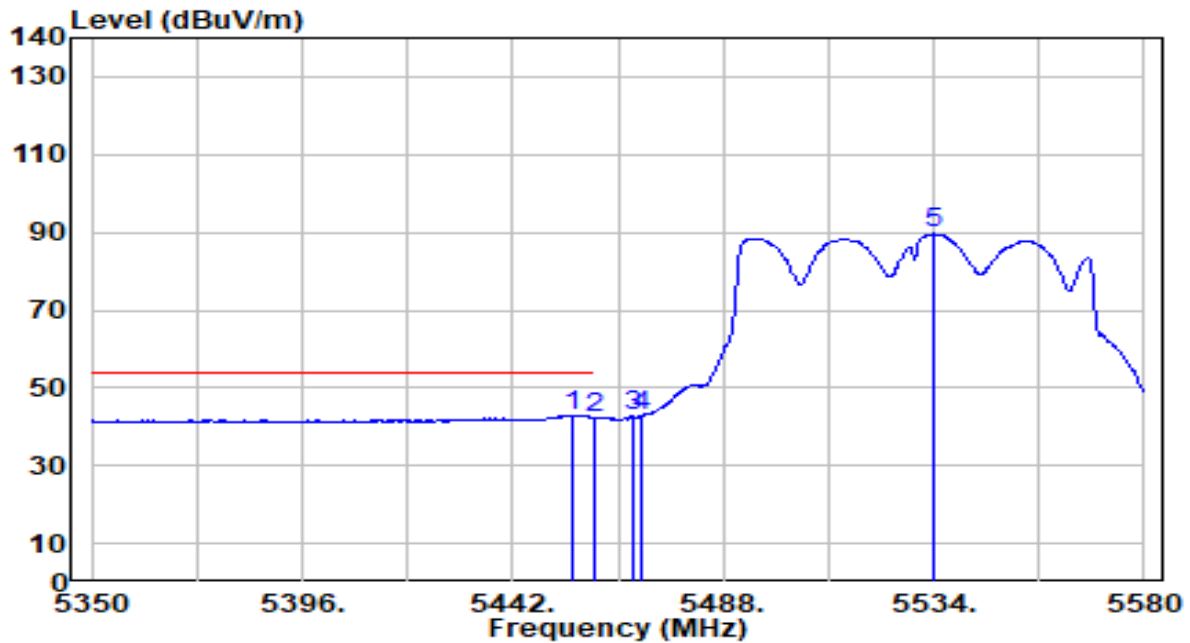


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.110	42.30	0.64	42.94	-11.06	54.00	100	147	Average
2		5460.000	41.72	0.66	42.38	-11.62	54.00	100	147	Average
3		5468.220	41.91	0.70	42.61	N/A	N/A	100	147	Average
4		5470.000	42.02	0.71	42.73	N/A	N/A	100	147	Average
5		5533.770	88.61	1.00	89.61	N/A	N/A	100	147	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

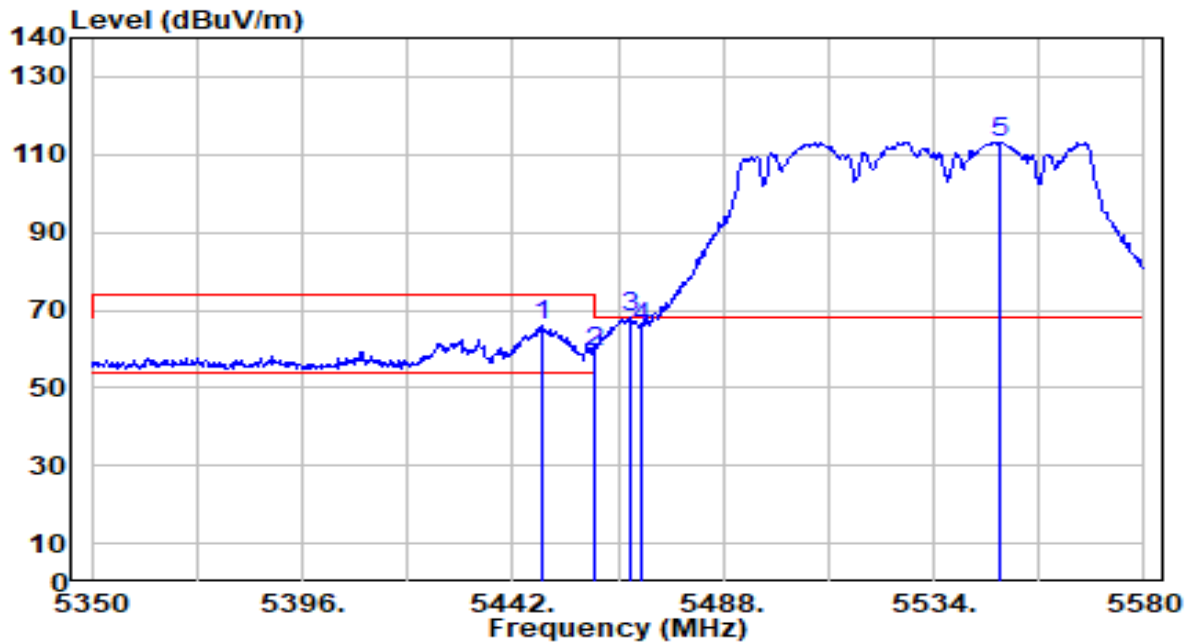


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5448.210	65.26	0.61	65.87	-8.13	74.00	150	183	Peak
2	5460.000	58.61	0.66	59.28	-14.72	74.00	150	183	Peak
3	* 5467.530	67.39	0.70	68.08	-0.12	68.20	150	183	Peak
4	5470.000	64.68	0.71	65.39	-2.81	68.20	150	183	Peak
5	5548.490	112.03	1.07	113.09	N/A	N/A	150	183	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

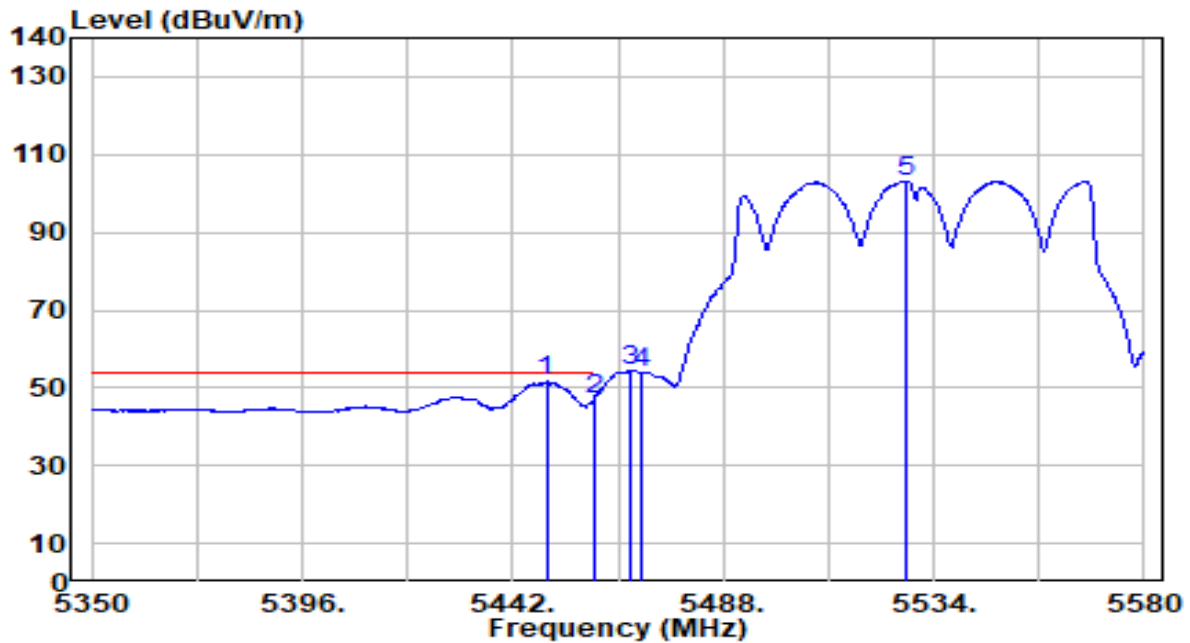


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5449.360	50.95	0.61	51.56	-2.44	54.00	150	183	Average
2		5460.000	46.61	0.66	47.27	-6.73	54.00	150	183	Average
3		5467.990	53.73	0.70	54.42	N/A	N/A	150	183	Average
4		5470.000	53.35	0.71	54.05	N/A	N/A	150	183	Average
5		5528.020	102.18	0.97	103.15	N/A	N/A	150	183	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	By PoE

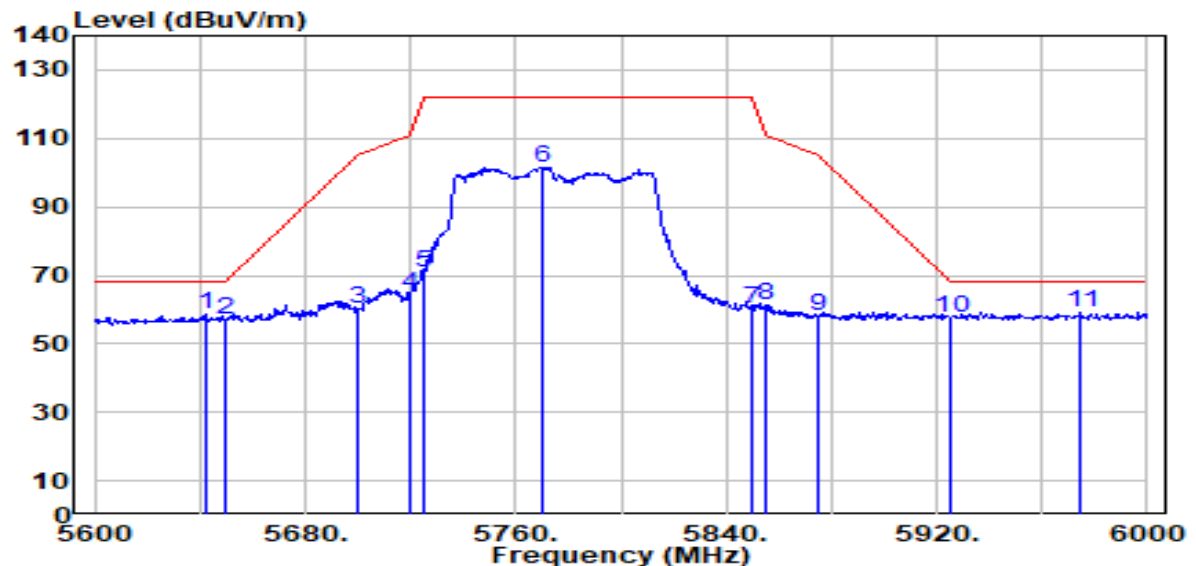


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5642.400	57.11	1.51	58.62	-9.58	68.20	100	179	Peak
2	5650.000	55.59	1.54	57.13	-11.07	68.20	100	179	Peak
3	5700.000	58.19	1.78	59.96	-45.24	105.20	100	179	Peak
4	5720.000	62.60	1.87	64.47	-46.33	110.80	100	179	Peak
5	5725.000	69.08	1.89	70.98	-51.22	122.20	100	179	Peak
6	5770.000	99.38	2.10	101.49	N/A	N/A	100	179	Peak
7	5850.000	57.79	2.25	60.05	-62.15	122.20	100	179	Peak
8	5855.000	59.04	2.25	61.29	-49.51	110.80	100	179	Peak
9	5875.000	55.76	2.26	58.02	-47.18	105.20	100	179	Peak
10	5925.000	55.44	2.27	57.70	-10.50	68.20	100	179	Peak
11 *	5974.800	57.05	2.28	59.33	-8.87	68.20	100	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	By PoE

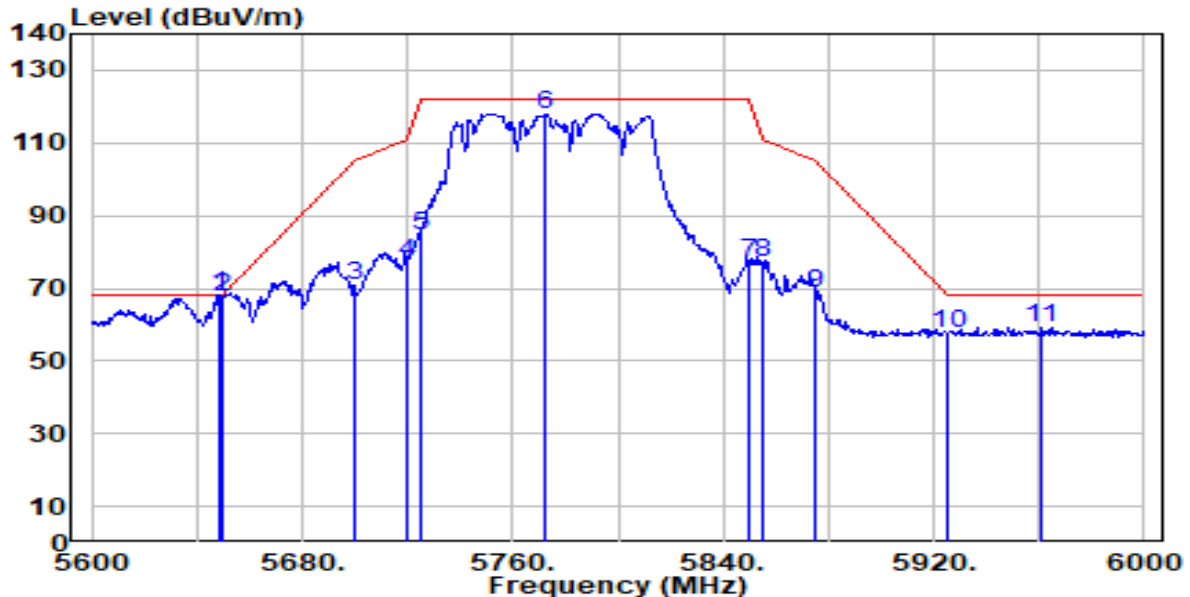


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.400	66.45	1.53	67.98	-0.22	68.20	150	186	Peak
2		5650.000	66.08	1.54	67.62	-0.58	68.20	150	186	Peak
3		5700.000	68.85	1.78	70.63	-34.57	105.20	150	186	Peak
4		5720.000	75.36	1.87	77.23	-33.57	110.80	150	186	Peak
5		5725.000	82.52	1.89	84.42	-37.78	122.20	150	186	Peak
6		5772.400	115.88	2.11	117.99	N/A	N/A	150	186	Peak
7		5850.000	74.71	2.25	76.97	-45.23	122.20	150	186	Peak
8		5855.000	74.75	2.25	77.00	-33.80	110.80	150	186	Peak
9		5875.000	66.61	2.26	68.87	-36.33	105.20	150	186	Peak
10		5925.000	55.46	2.27	57.73	-10.47	68.20	150	186	Peak
11		5960.800	56.94	2.27	59.22	-8.98	68.20	150	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

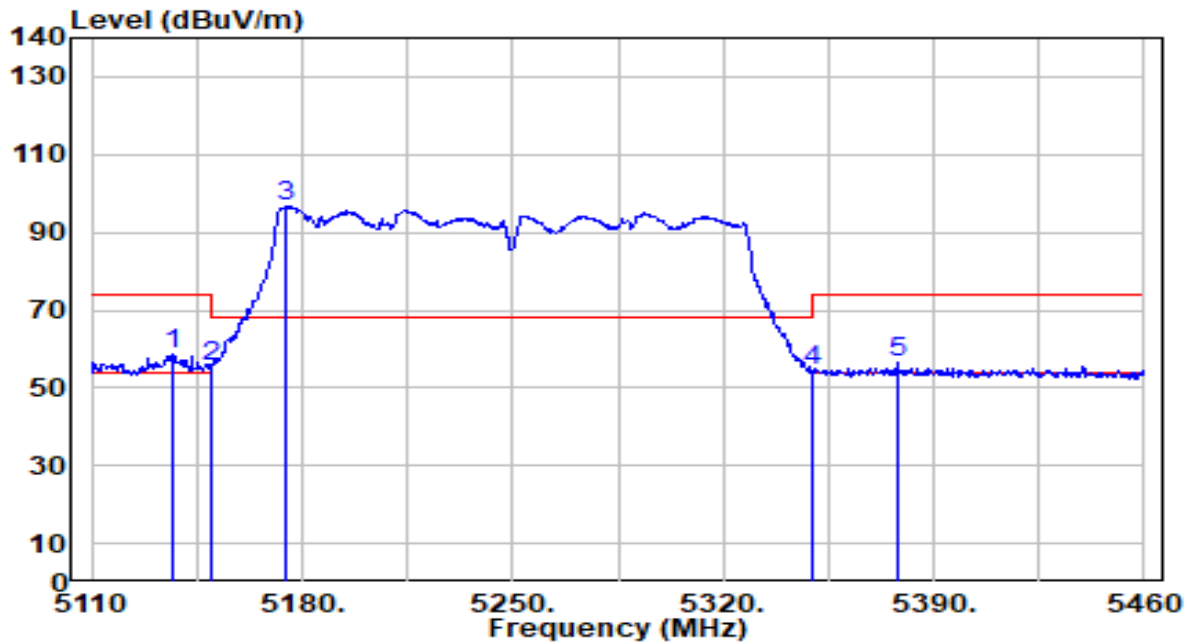


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5137.300	58.10	0.64	58.74	-15.26	74.00	292	152	Peak
2		5150.000	54.70	0.65	55.36	-18.64	74.00	292	152	Peak
3		5174.400	96.01	0.68	96.68	N/A	N/A	292	152	Peak
4		5350.000	54.05	0.47	54.52	-19.48	74.00	292	152	Peak
5		5377.750	56.10	0.43	56.52	-17.48	74.00	292	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

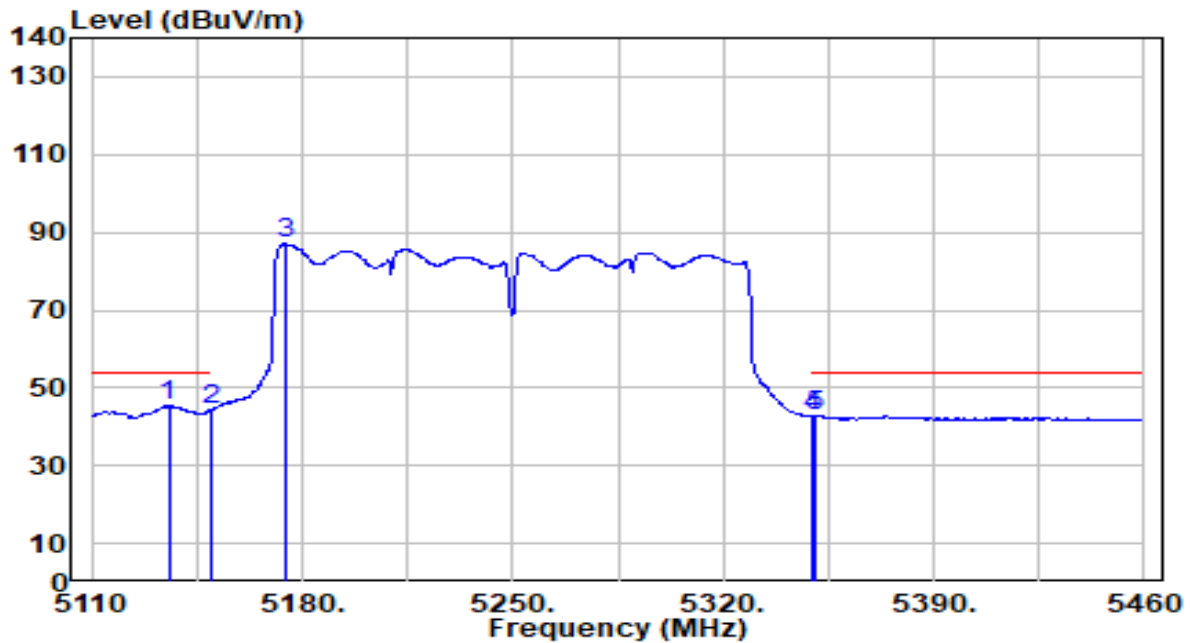


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5135.550	44.88	0.64	45.52	-8.48	54.00	292	152	Average
2		5150.000	43.52	0.65	44.18	-9.82	54.00	292	152	Average
3		5174.750	86.31	0.68	86.99	N/A	N/A	292	152	Average
4		5350.000	42.24	0.47	42.71	-11.29	54.00	292	152	Average
5		5350.800	42.33	0.47	42.80	-11.20	54.00	292	152	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

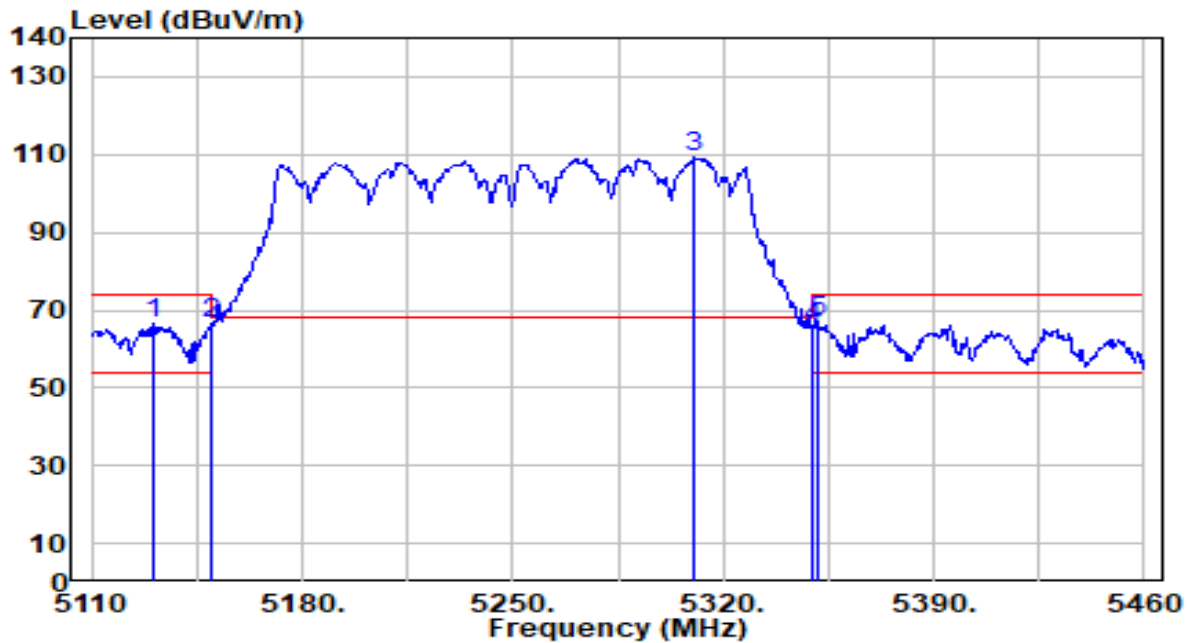


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5130.300	65.88	0.64	66.52	-7.48	74.00	140	8	Peak
2	5150.000	65.69	0.65	66.35	-7.65	74.00	140	8	Peak
3	5310.200	108.74	0.53	109.27	N/A	N/A	140	8	Peak
4	5350.000	65.02	0.47	65.49	-8.51	74.00	140	8	Peak
5	* 5351.500	66.38	0.47	66.85	-7.15	74.00	140	8	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

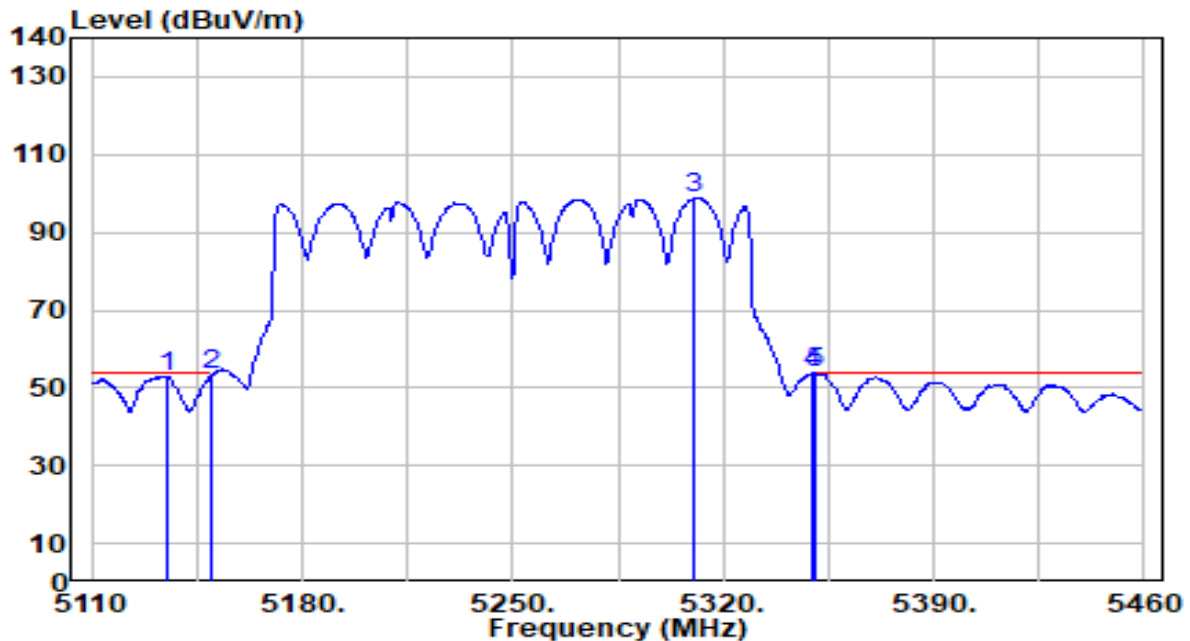


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5134.850	52.41	0.64	53.05	-0.95	54.00	140	8	Average
2	5150.000	52.70	0.65	53.35	-0.65	54.00	140	8	Average
3	5310.200	98.34	0.53	98.87	N/A	N/A	140	8	Average
4	5350.000	53.24	0.47	53.72	-0.28	54.00	140	8	Average
5	* 5350.800	53.33	0.47	53.80	-0.20	54.00	140	8	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	By PoE

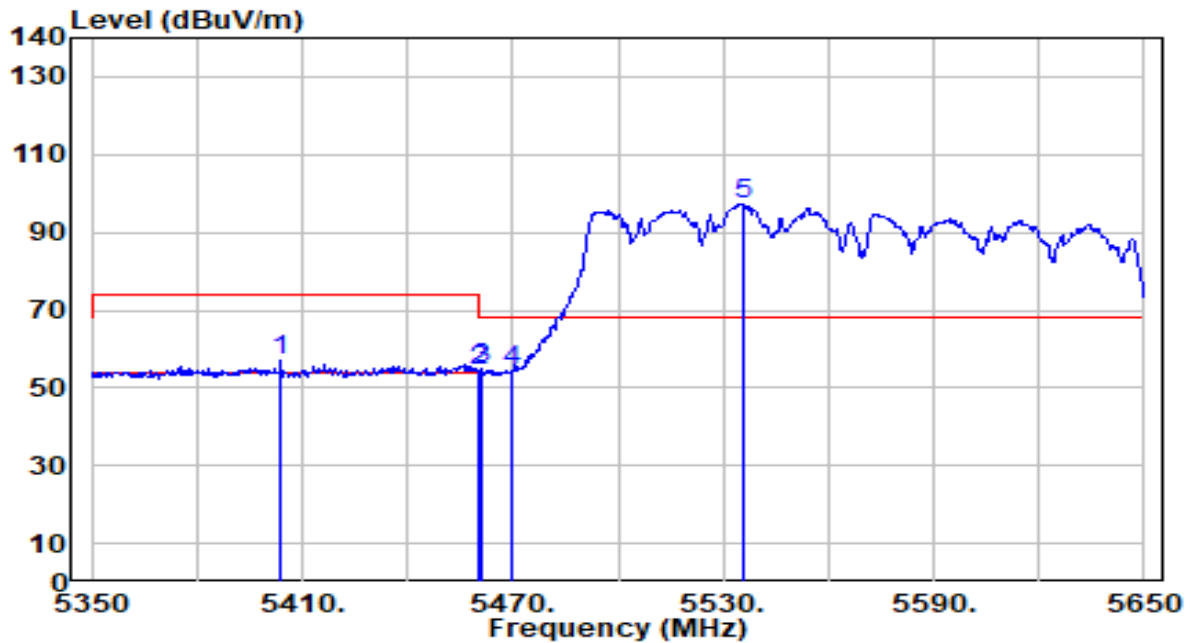


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5404.000	56.46	0.41	56.87	-17.13	74.00	100	148	Peak
2	5460.000	53.65	0.66	54.31	-19.69	74.00	100	148	Peak
3	* 5461.300	54.47	0.67	55.14	-13.06	68.20	100	148	Peak
4	5470.000	53.49	0.71	54.20	-14.00	68.20	100	148	Peak
5	5535.400	96.07	1.01	97.08	N/A	N/A	100	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	By PoE

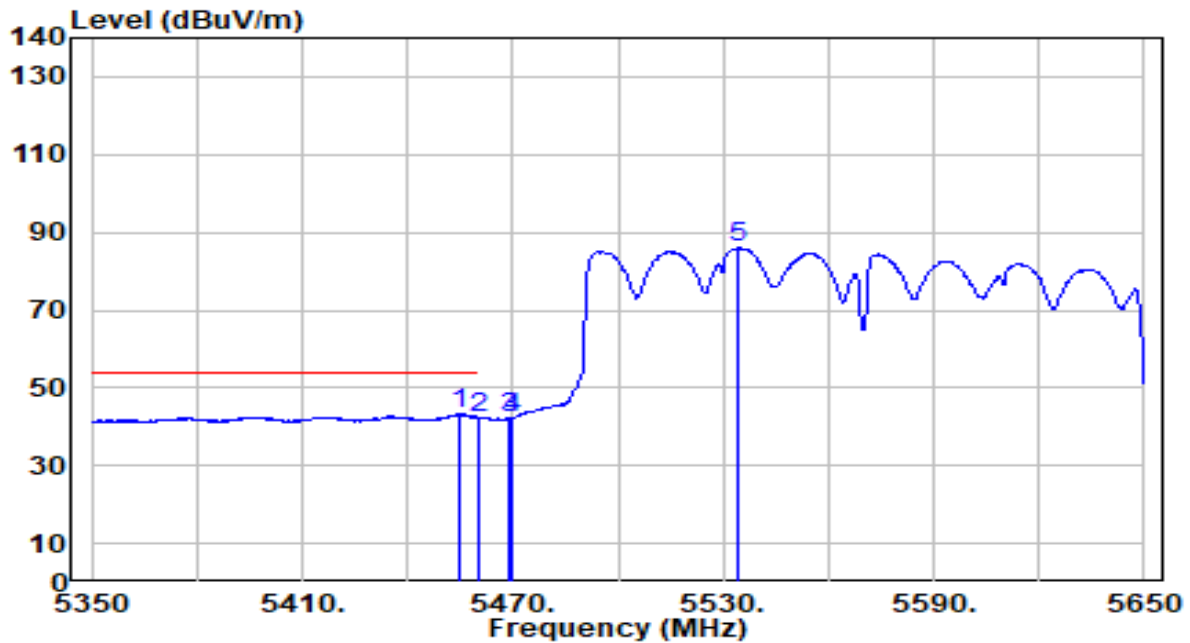


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5454.700	42.55	0.64	43.18	-10.82	54.00	100	148	Average
2		5460.000	41.52	0.66	42.18	-11.82	54.00	100	148	Average
3		5469.100	41.64	0.70	42.34	N/A	N/A	100	148	Average
4		5470.000	41.64	0.71	42.35	N/A	N/A	100	148	Average
5		5534.500	84.97	1.00	85.97	N/A	N/A	100	148	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	By PoE

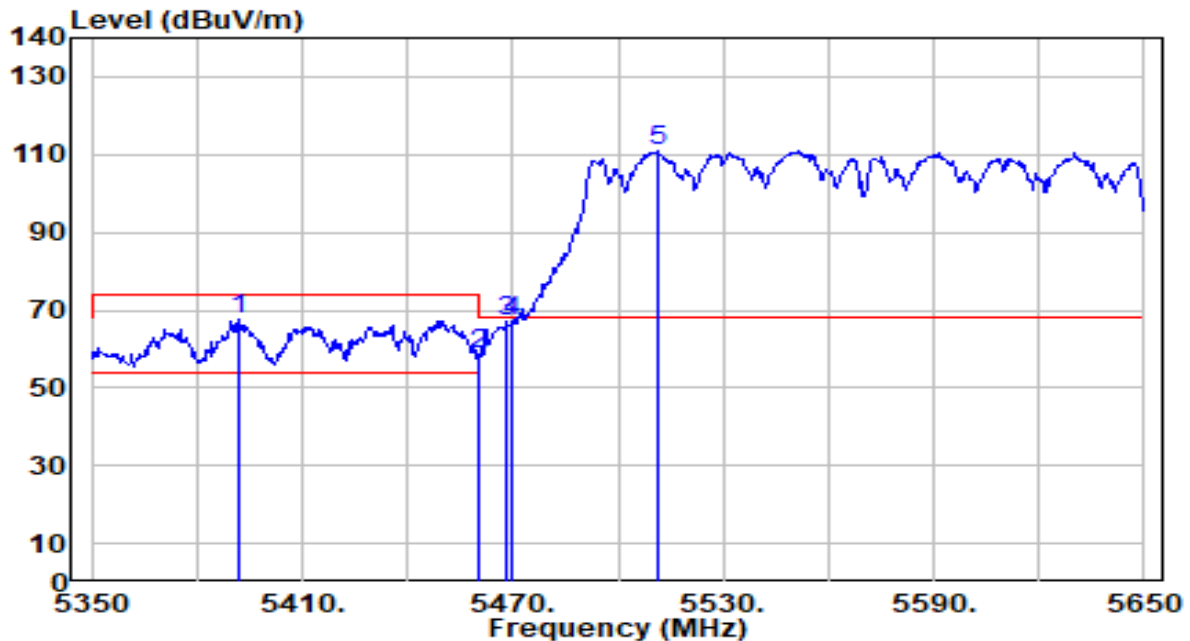


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5392.000	67.25	0.41	67.66	-6.34	74.00	156	186	Peak
2	5460.000	58.00	0.66	58.66	-15.34	74.00	156	186	Peak
3	* 5468.500	66.61	0.70	67.31	-0.89	68.20	156	186	Peak
4	5470.000	66.17	0.71	66.87	-1.33	68.20	156	186	Peak
5	5511.100	110.02	0.89	110.91	N/A	N/A	156	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	By PoE

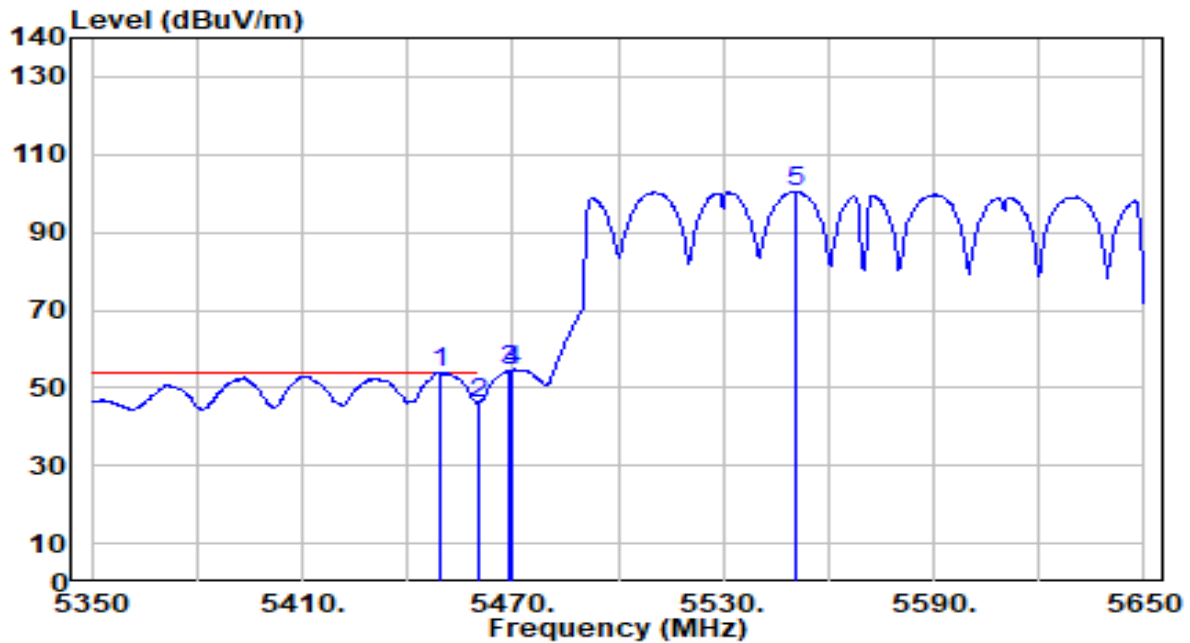


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5449.300	53.19	0.61	53.81	-0.19	54.00	156	186	Average
2		5460.000	45.30	0.66	45.96	-8.04	54.00	156	186	Average
3		5468.800	53.81	0.70	54.51	N/A	N/A	156	186	Average
4		5470.000	53.97	0.71	54.68	N/A	N/A	156	186	Average
5		5550.700	99.55	1.08	100.63	N/A	N/A	156	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

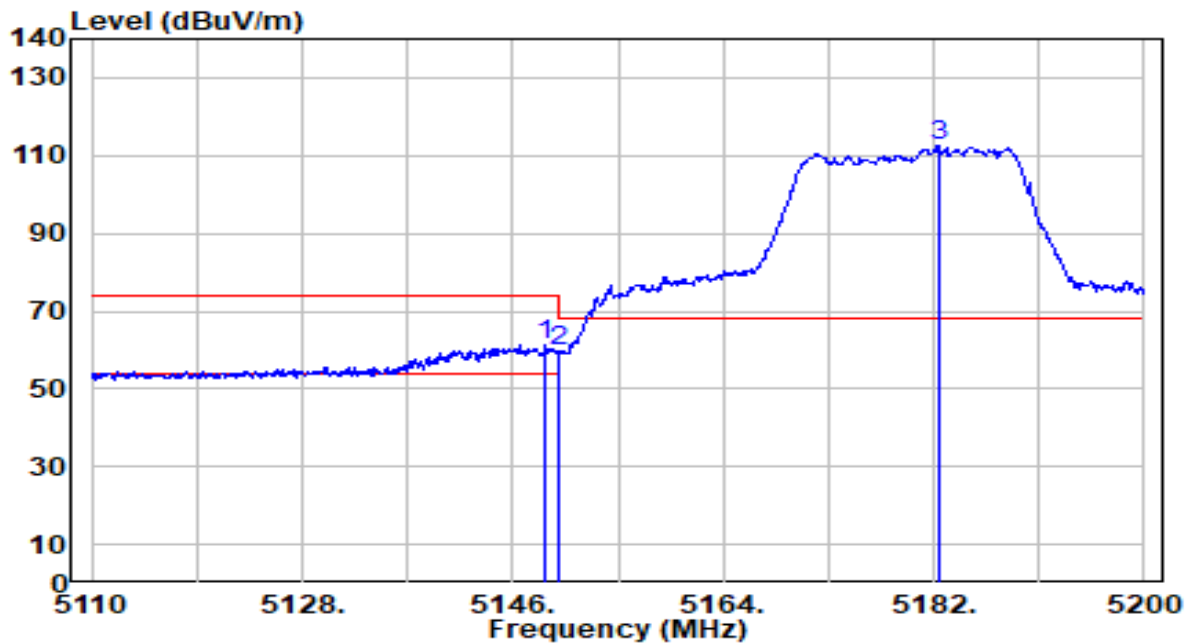


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.790	60.88	0.65	61.53	-12.47	74.00	300	152	Peak
2		5150.000	58.85	0.65	59.50	-14.50	74.00	300	152	Peak
3		5182.360	111.81	0.69	112.50	N/A	N/A	300	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

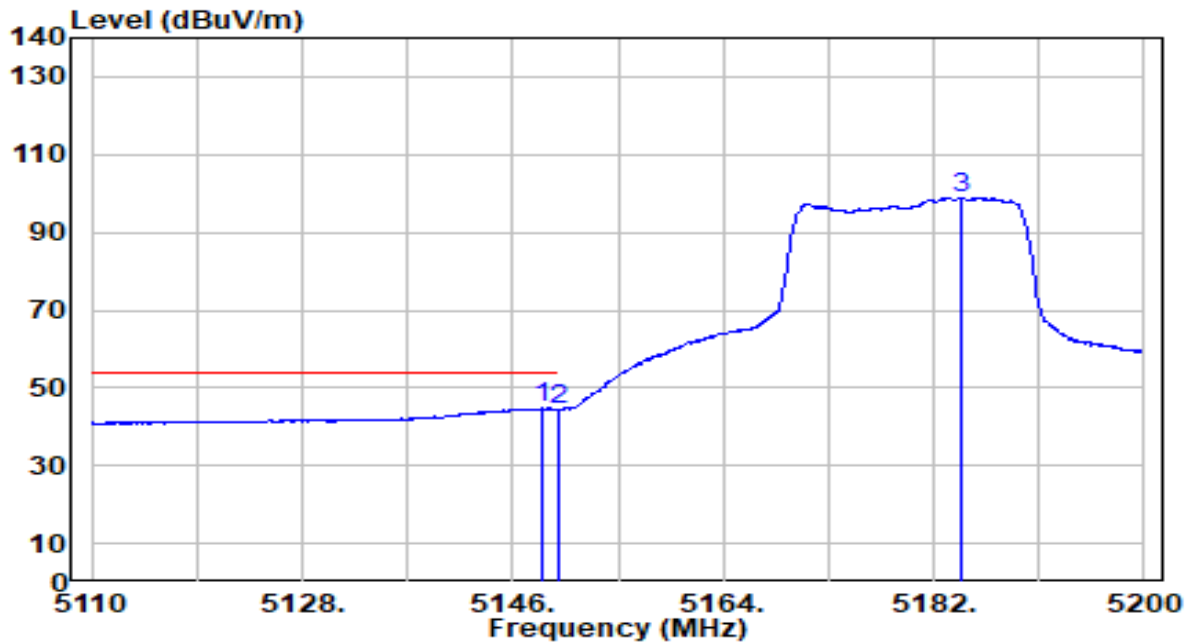


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.430	44.18	0.65	44.83	-9.17	54.00	300	152	Average
2		5150.000	43.86	0.65	44.52	-9.48	54.00	300	152	Average
3		5184.250	98.23	0.69	98.91	N/A	N/A	300	152	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

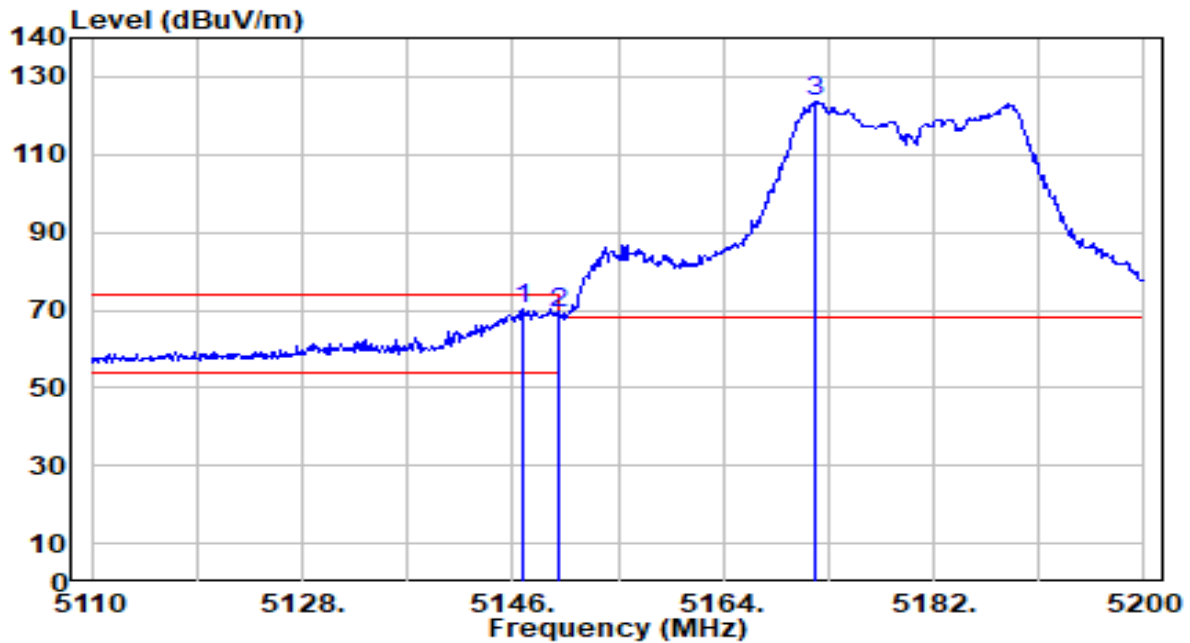


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.810	69.48	0.65	70.13	-3.87	74.00	150	360	Peak
2		5150.000	68.59	0.65	69.24	-4.76	74.00	150	360	Peak
3		5171.920	122.91	0.68	123.58	N/A	N/A	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

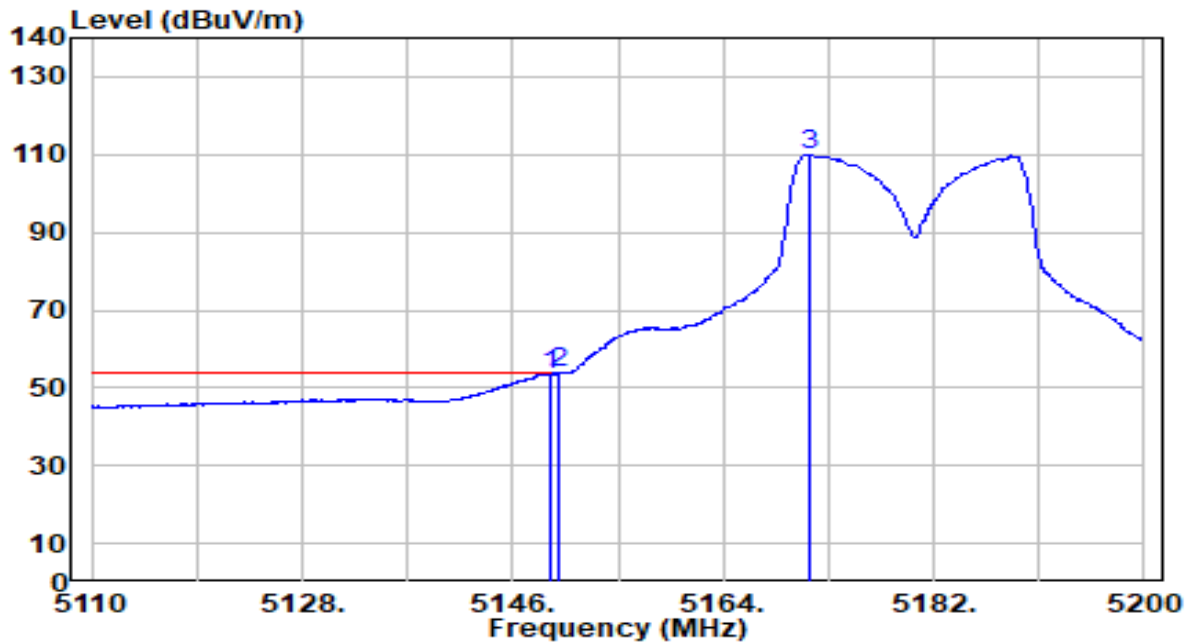


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.330	52.88	0.65	53.53	-0.47	54.00	150	360	Average
2	*	5150.000	53.20	0.65	53.85	-0.15	54.00	150	360	Average
3		5171.470	109.36	0.67	110.03	N/A	N/A	150	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

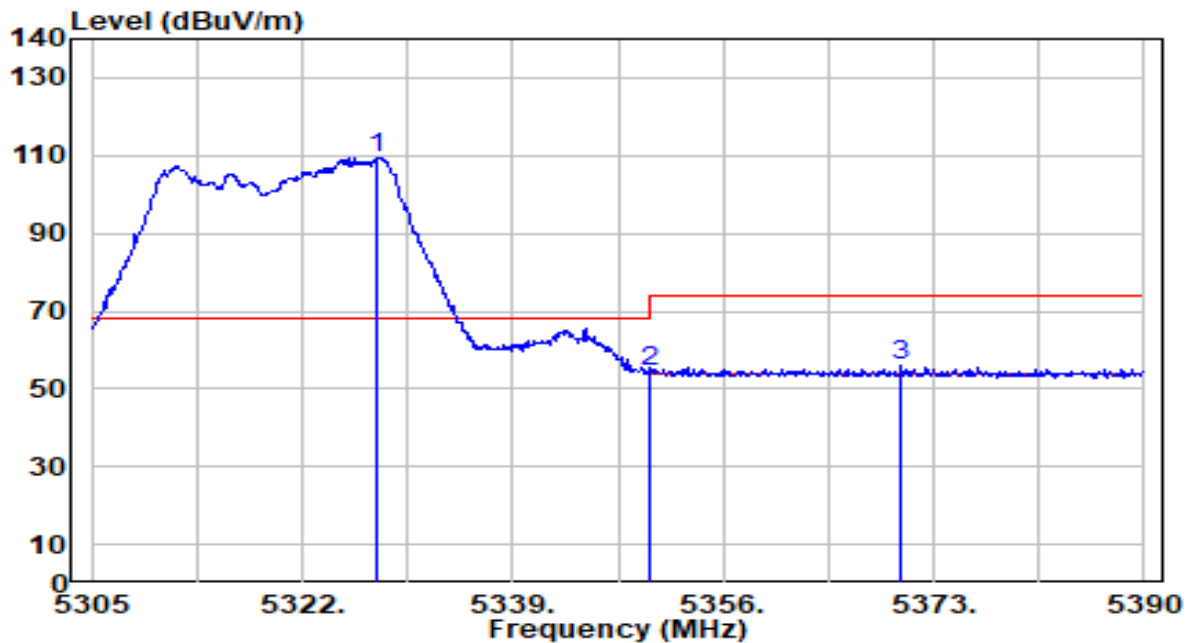


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.120	108.99	0.50	109.50	N/A	N/A	250	131	Peak
2	5350.000	53.85	0.47	54.32	-19.68	74.00	250	131	Peak
3	* 5370.365	55.44	0.44	55.88	-18.12	74.00	250	131	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

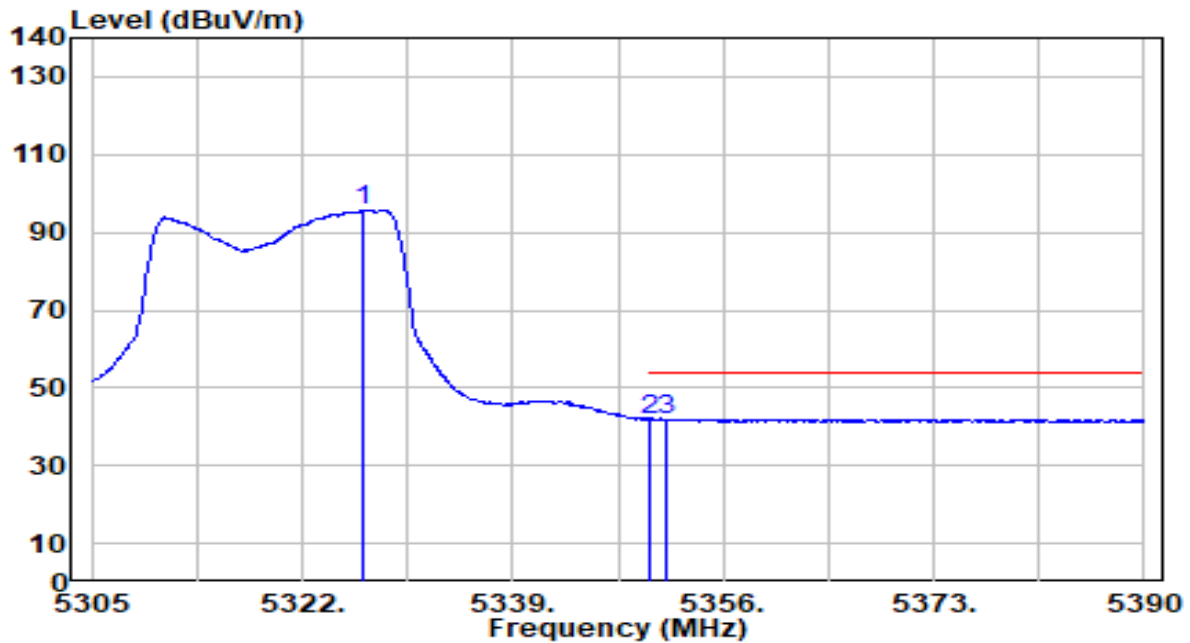


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5326.845	95.20	0.51	95.71	N/A	N/A	250	131	Average
2	*	5350.000	41.52	0.47	41.99	-12.01	54.00	250	131	Average
3		5351.495	41.43	0.47	41.90	-12.10	54.00	250	131	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

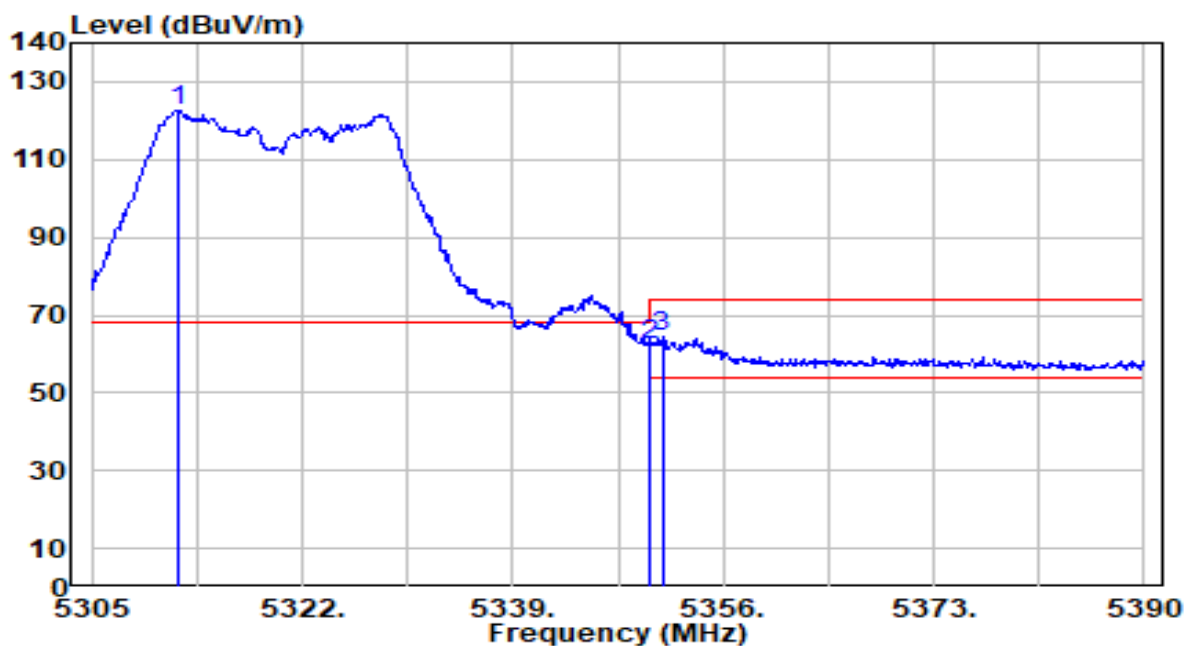


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.970	122.17	0.53	122.70	N/A	N/A	150	177	Peak
2	5350.000	62.00	0.47	62.47	-11.53	74.00	150	177	Peak
3	* 5351.070	63.78	0.47	64.25	-9.75	74.00	150	177	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

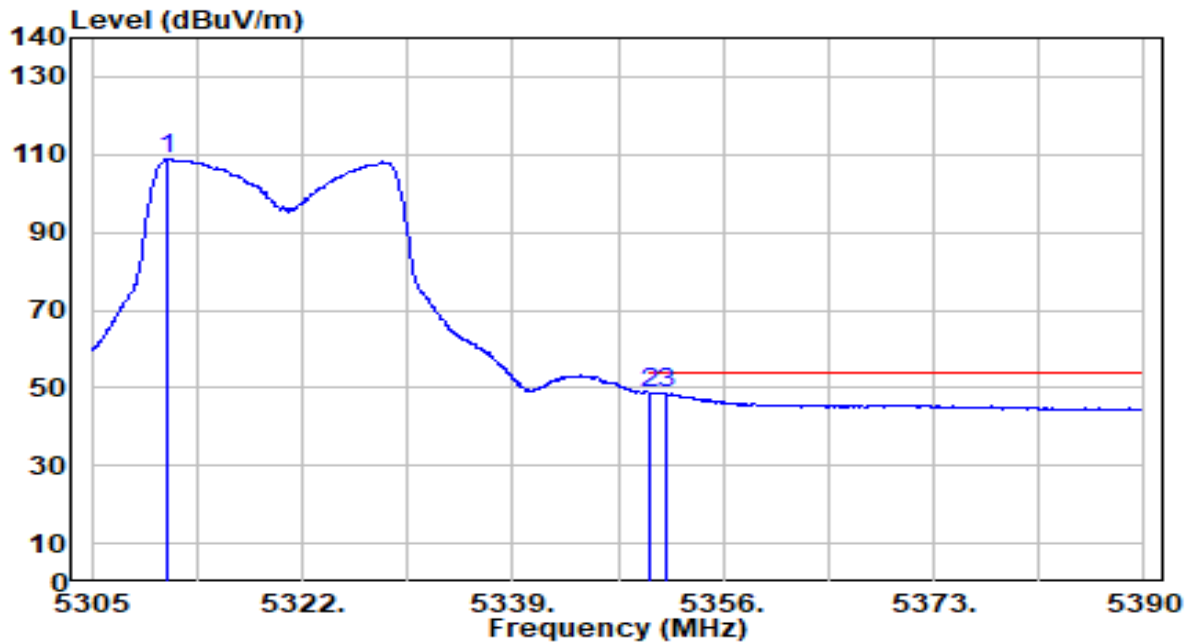


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5311.120	108.33	0.53	108.86	N/A	N/A	150	177	Average
2	*	5350.000	48.26	0.47	48.73	-5.27	54.00	150	177	Average
3		5351.325	48.04	0.47	48.51	-5.49	54.00	150	177	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

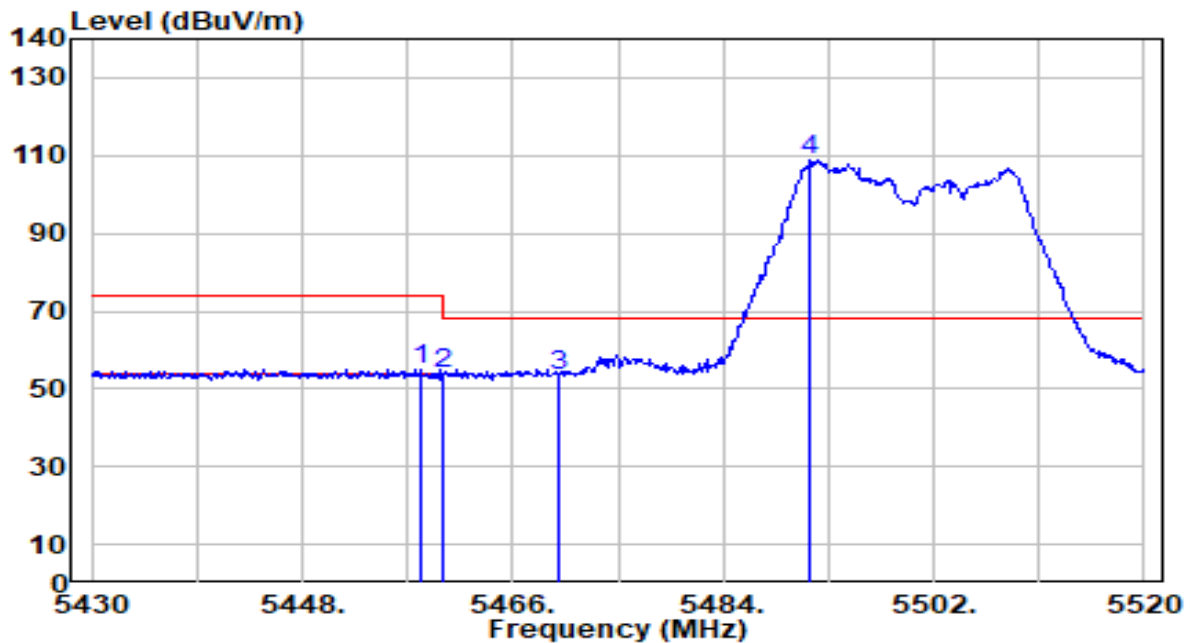


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.170	54.31	0.65	54.97	-19.03	74.00	110	155	Peak
2	5460.000	52.97	0.66	53.63	-20.37	74.00	110	155	Peak
3	* 5470.000	52.50	0.71	53.20	-15.00	68.20	110	155	Peak
4	5491.470	107.87	0.80	108.68	N/A	N/A	110	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

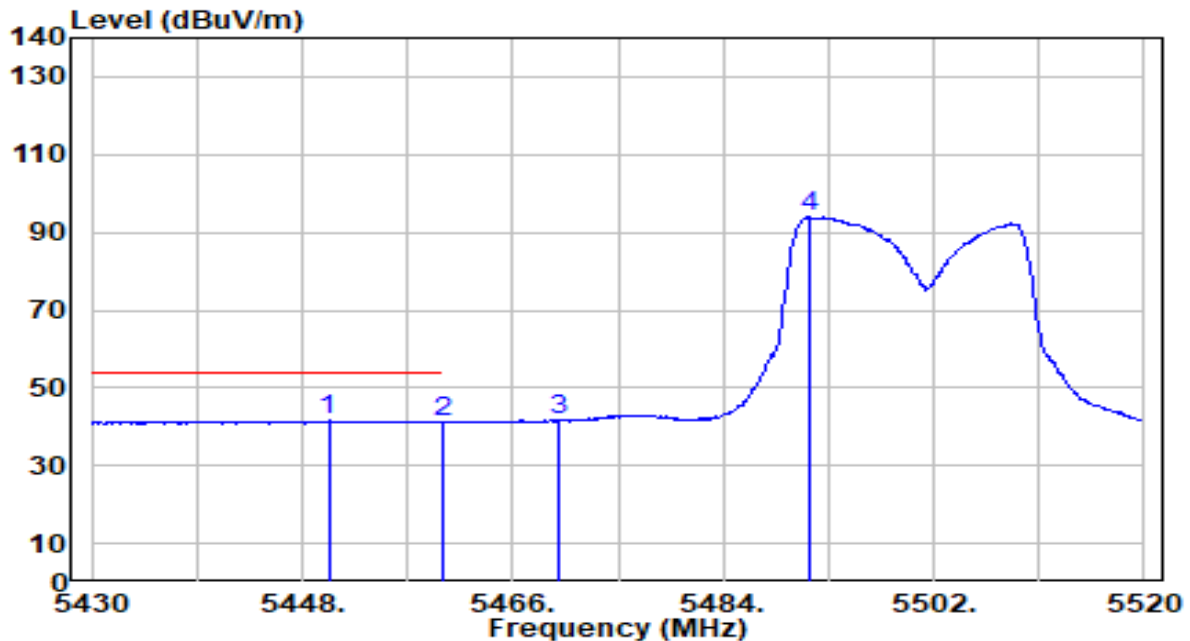


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5450.250	40.87	0.62	41.49	-12.51	54.00	110	155	Average
2		5460.000	40.40	0.66	41.06	-12.94	54.00	110	155	Average
3		5470.000	40.96	0.71	41.67	N/A	N/A	110	155	Average
4		5491.290	93.11	0.80	93.91	N/A	N/A	110	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

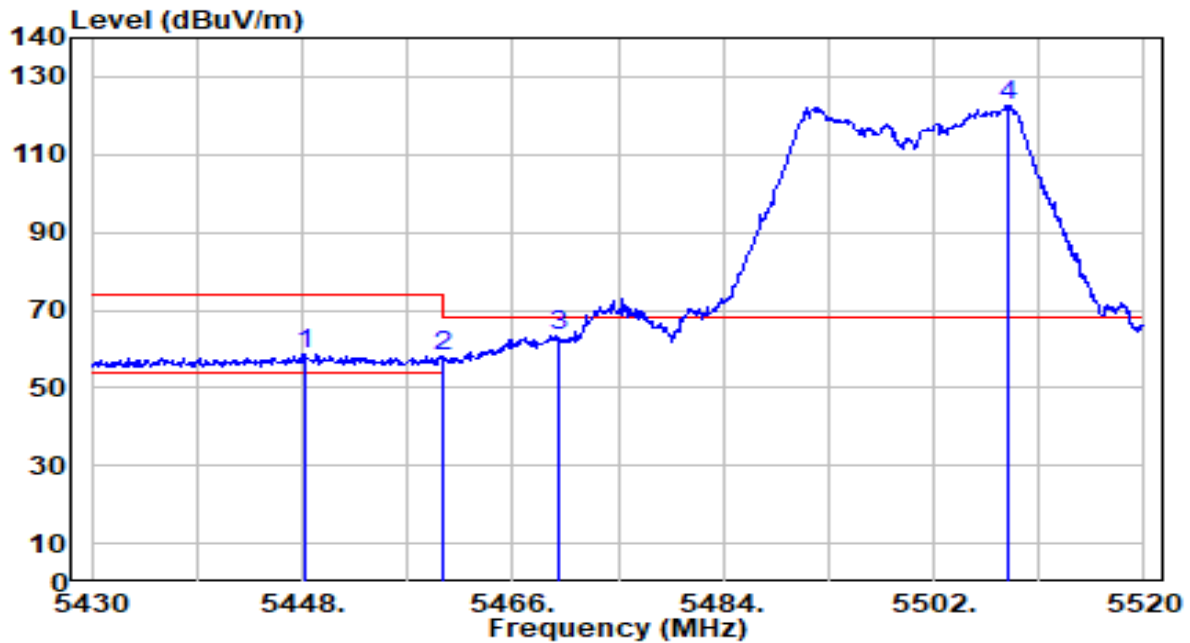


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5448.180	58.12	0.61	58.73	-15.27	74.00	150	176	Peak
2	5460.000	57.45	0.66	58.11	-15.89	74.00	150	176	Peak
3	* 5470.000	62.59	0.71	63.29	-4.91	68.20	150	176	Peak
4	5508.300	121.89	0.88	122.77	N/A	N/A	150	176	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

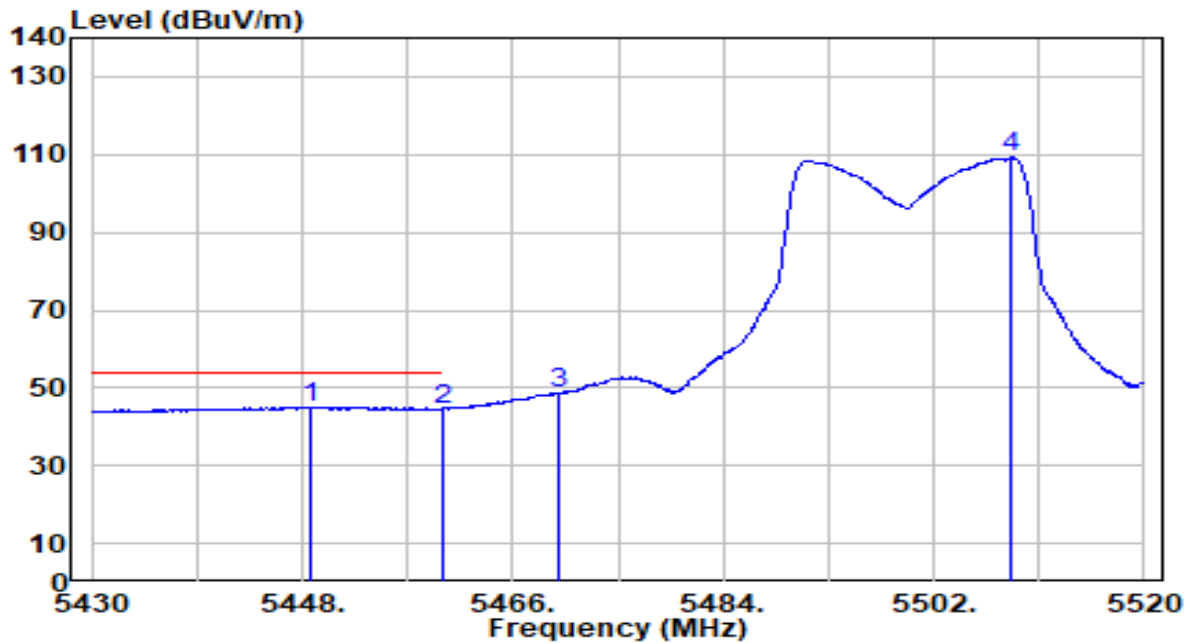


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5448.630	44.55	0.61	45.17	-8.83	54.00	150	176	Average
2		5460.000	43.94	0.66	44.60	-9.40	54.00	150	176	Average
3		5470.000	48.03	0.71	48.74	N/A	N/A	150	176	Average
4		5508.570	108.26	0.88	109.14	N/A	N/A	150	176	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	By PoE

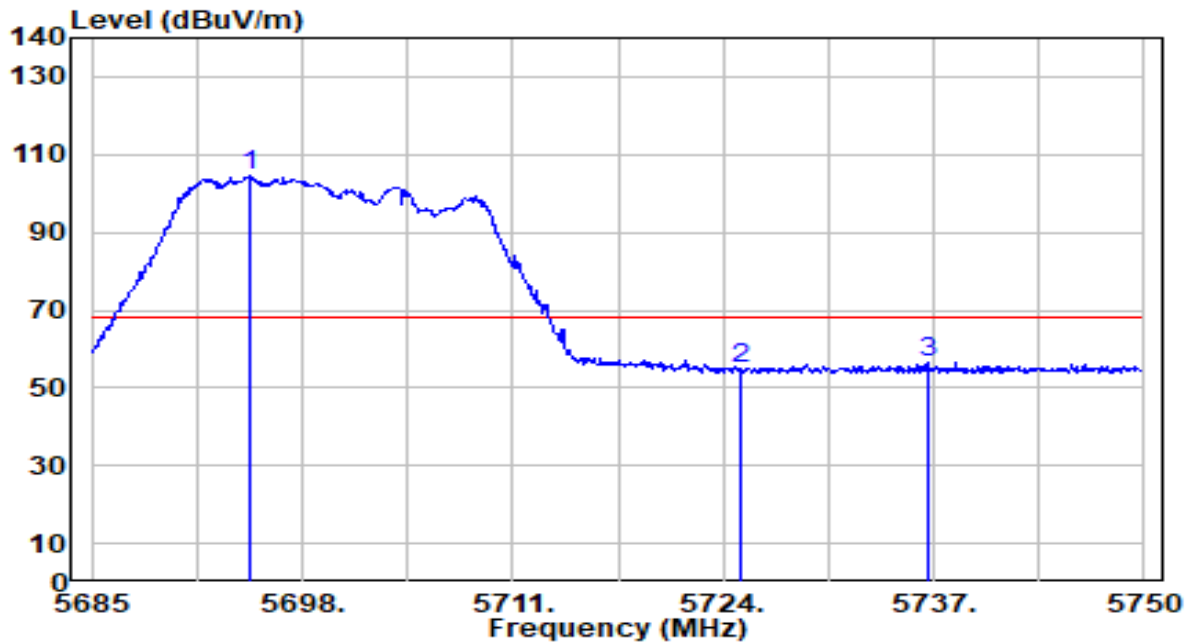


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5694.750	102.79	1.75	104.54	N/A	N/A	115	175	Peak
2	5725.000	52.84	1.89	54.73	-13.47	68.20	115	175	Peak
3	* 5736.610	54.64	1.95	56.58	-11.62	68.20	115	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	By PoE

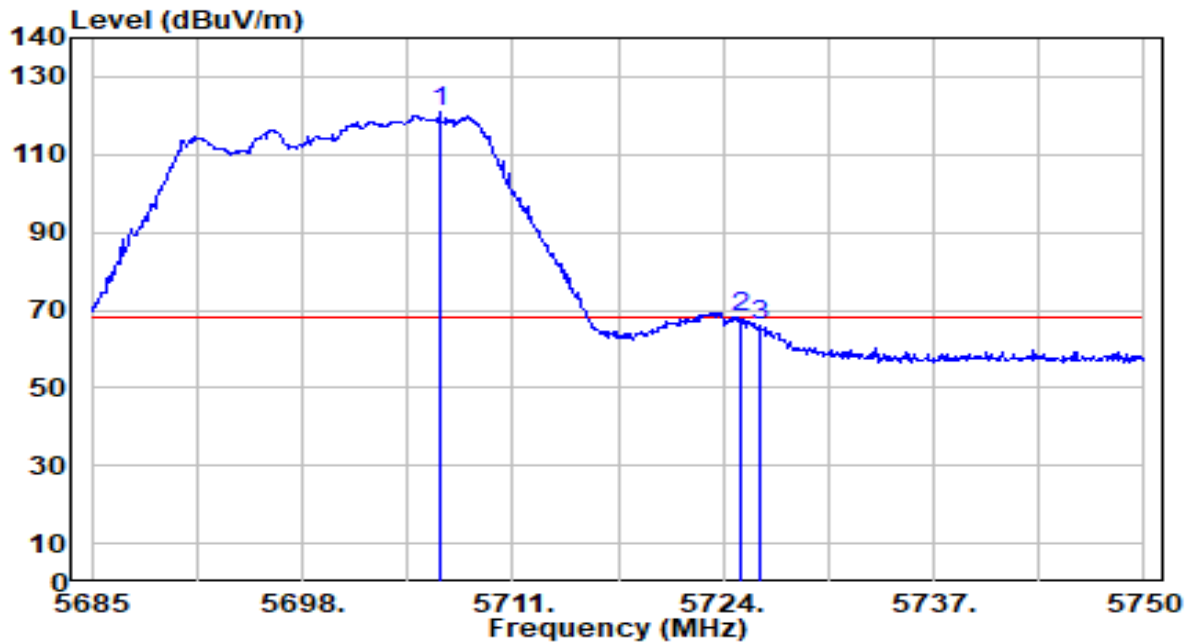


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5706.450	119.14	1.81	120.95	N/A	N/A	150	189	Peak
2	*	5725.000	66.20	1.89	68.09	-0.11	68.20	150	189	Peak
3		5726.210	64.14	1.90	66.04	-2.16	68.20	150	189	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	By PoE

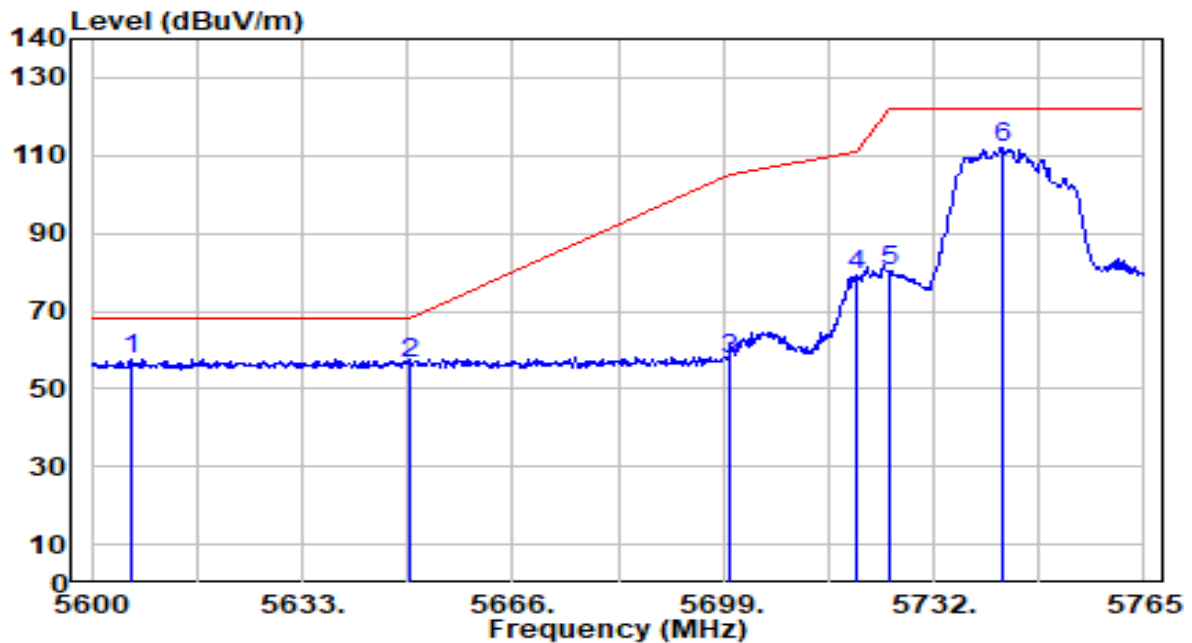


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5606.105	56.39	1.34	57.73	-10.47	68.20	110	180	Peak
2		5650.000	54.77	1.54	56.31	-11.89	68.20	110	180	Peak
3		5700.000	55.87	1.78	57.64	-47.56	105.20	110	180	Peak
4		5720.000	77.13	1.87	79.00	-31.80	110.80	110	180	Peak
5		5725.000	78.19	1.89	80.08	-42.12	122.20	110	180	Peak
6		5742.725	109.85	1.98	111.82	N/A	N/A	110	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	By PoE

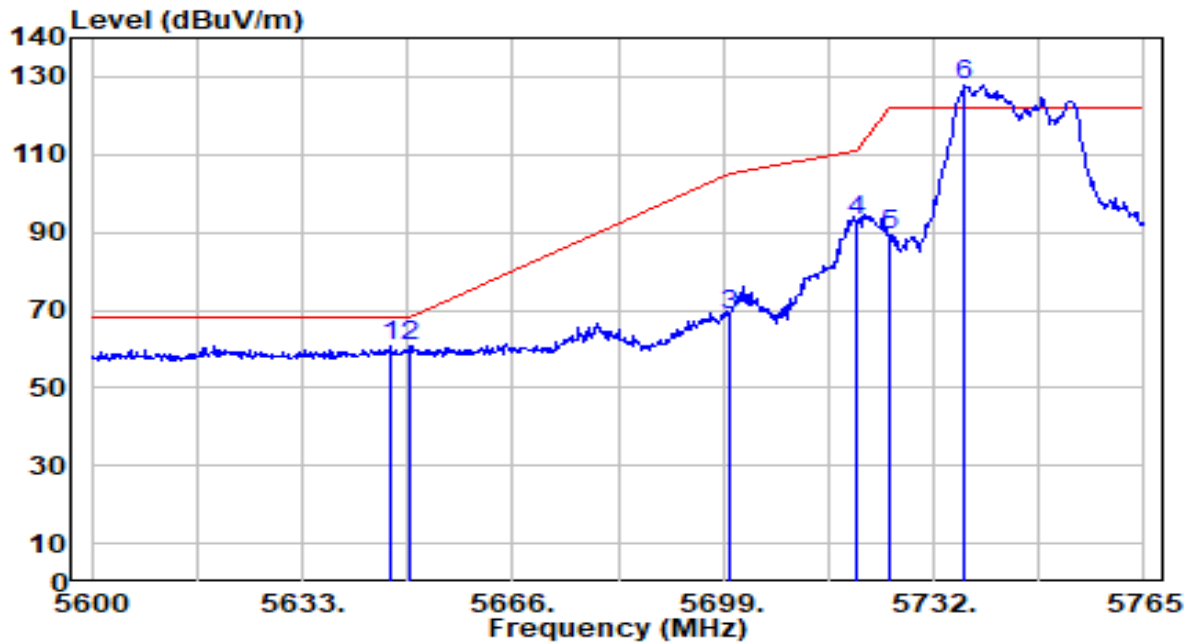


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5646.695	59.04	1.53	60.57	-7.63	68.20	150	1	Peak
2	* 5650.000	59.32	1.54	60.86	-7.34	68.20	150	1	Peak
3	5700.000	67.15	1.78	68.93	-36.27	105.20	150	1	Peak
4	5720.000	91.06	1.87	92.93	-17.87	110.80	150	1	Peak
5	5725.000	87.49	1.89	89.38	-32.82	122.20	150	1	Peak
6	5736.950	125.90	1.95	127.85	N/A	N/A	150	1	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	By PoE

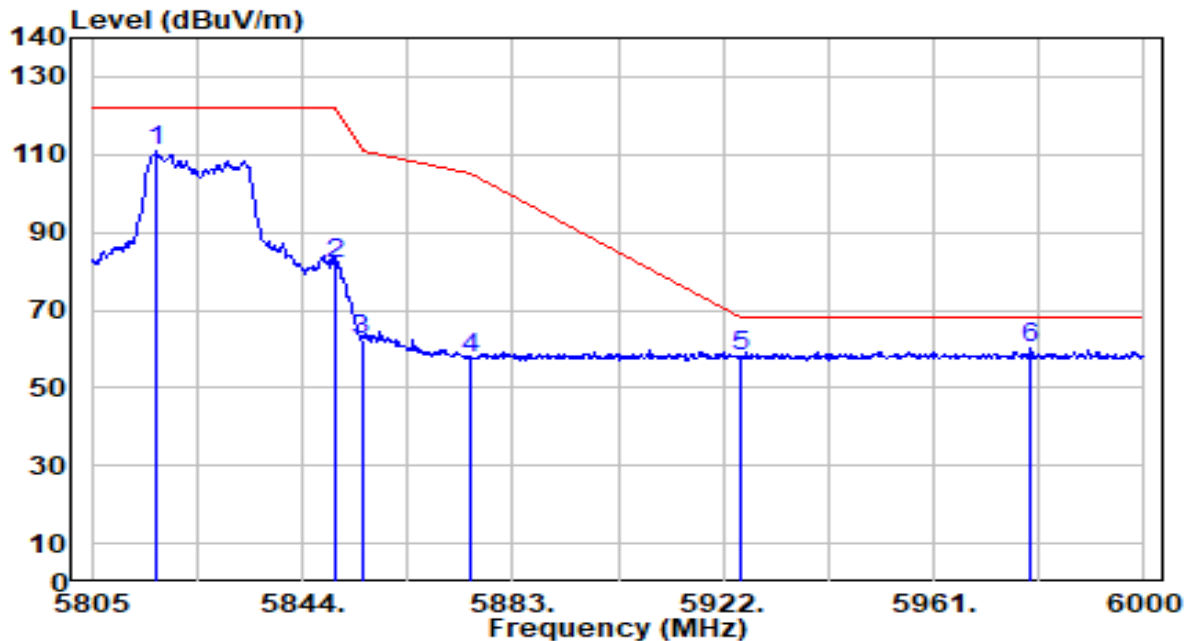


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5816.895	108.62	2.25	110.87	N/A	N/A	109	174	Peak
2	5850.000	79.75	2.25	82.00	-40.20	122.20	109	174	Peak
3	5855.000	60.24	2.25	62.50	-48.30	110.80	109	174	Peak
4	5875.000	55.29	2.26	57.55	-47.65	105.20	109	174	Peak
5	5925.000	55.84	2.27	58.11	-10.09	68.20	109	174	Peak
6	* 5978.940	57.89	2.28	60.17	-8.03	68.20	109	174	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	By PoE

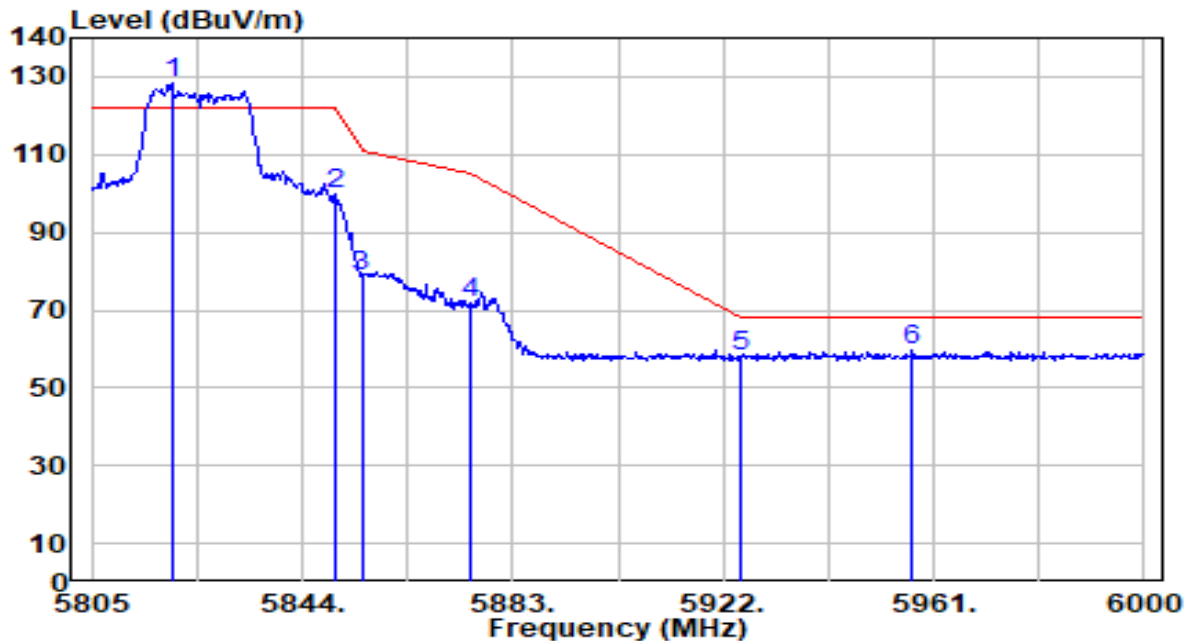


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5819.820	125.99	2.25	128.24	N/A	N/A	150	360	Peak
2	5850.000	97.63	2.25	99.89	-22.31	122.20	150	360	Peak
3	5855.000	76.69	2.25	78.94	-31.86	110.80	150	360	Peak
4	5875.000	69.68	2.26	71.94	-33.26	105.20	150	360	Peak
5	5925.000	55.89	2.27	58.16	-10.04	68.20	150	360	Peak
6	* 5957.100	57.19	2.27	59.46	-8.74	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By PoE

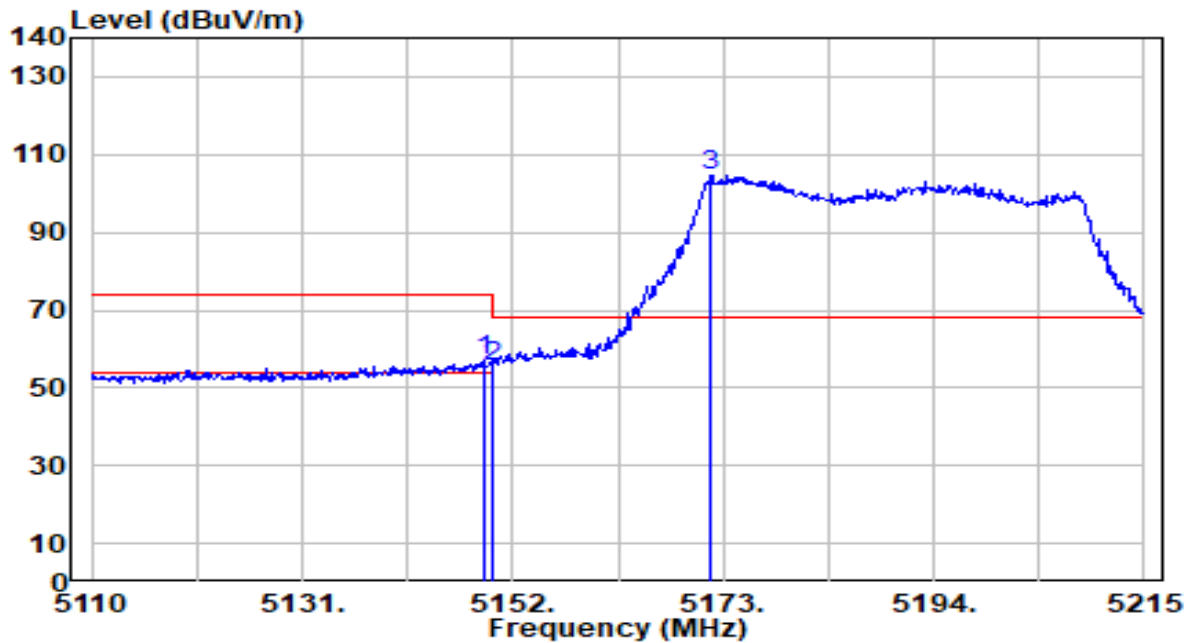


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.060	56.50	0.65	57.16	-16.84	74.00	295	151	Peak
2		5150.000	54.86	0.65	55.52	-18.48	74.00	295	151	Peak
3		5171.845	104.05	0.67	104.73	N/A	N/A	295	151	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By PoE

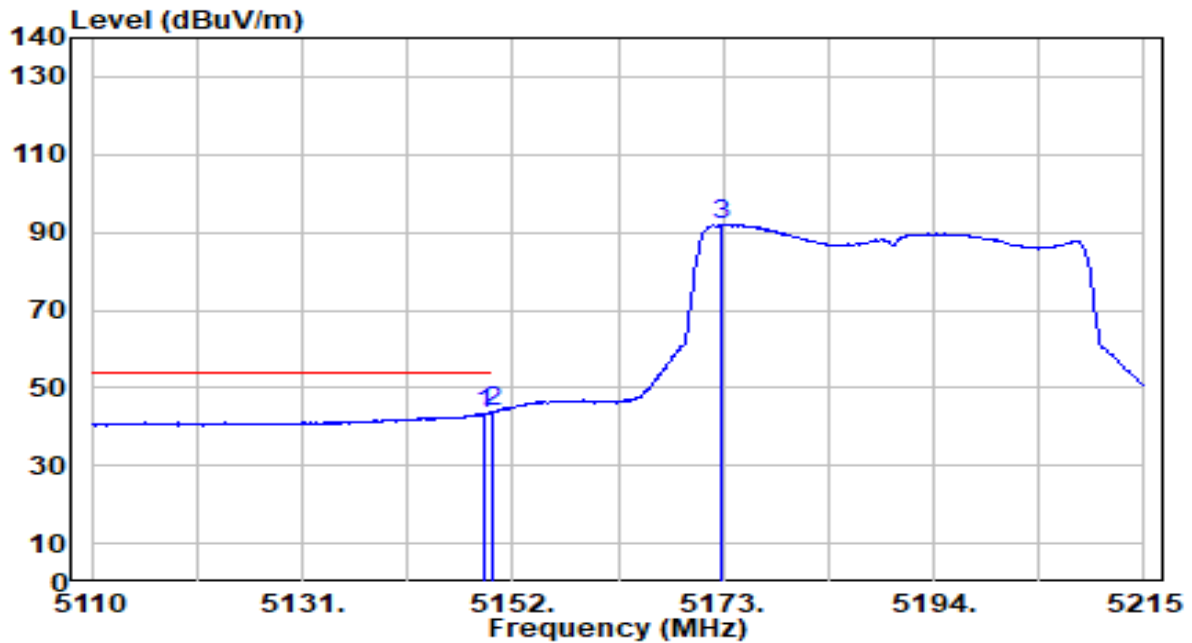


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.270	42.81	0.65	43.46	-10.54	54.00	295	151	Average
2	*	5150.000	43.16	0.65	43.81	-10.19	54.00	295	151	Average
3		5172.895	91.37	0.68	92.04	N/A	N/A	295	151	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By PoE

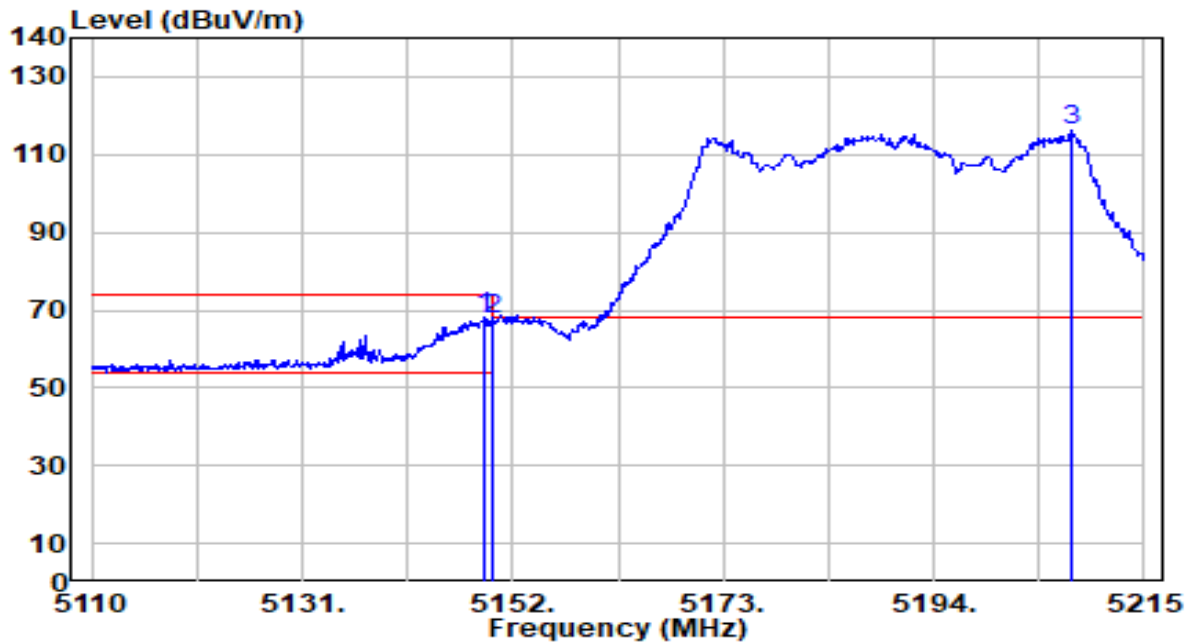


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.165	67.63	0.65	68.28	-5.72	74.00	150	353	Peak
2		5150.000	66.89	0.65	67.54	-6.46	74.00	150	353	Peak
3		5207.650	115.43	0.69	116.12	N/A	N/A	150	353	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By PoE

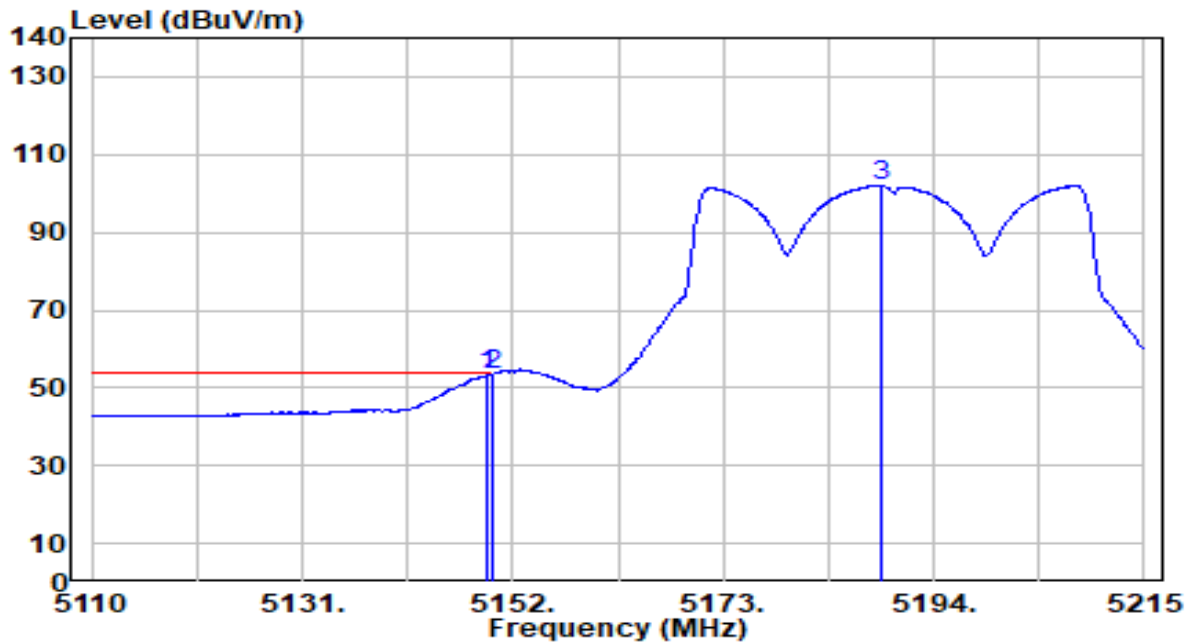


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.375	52.54	0.65	53.19	-0.81	54.00	150	353	Average
2	*	5150.000	52.78	0.65	53.44	-0.26	54.00	150	353	Average
3		5188.645	101.36	0.69	102.05	N/A	N/A	150	353	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

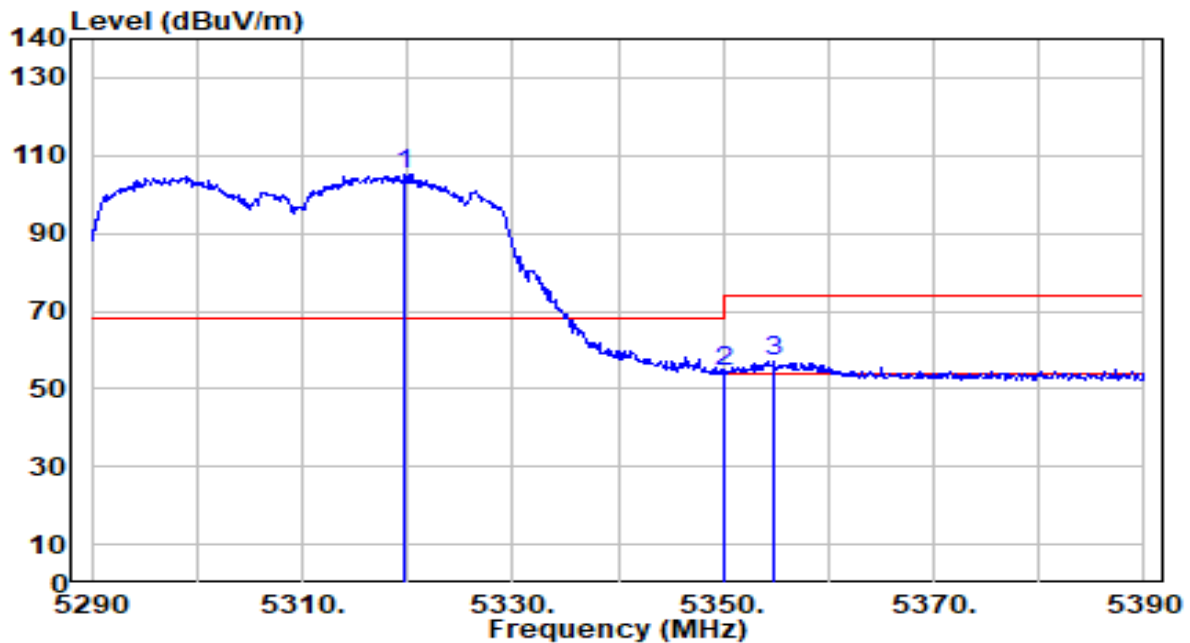


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.800	104.60	0.52	105.12	N/A	N/A	262	130	Peak
2	5350.000	53.80	0.47	54.27	-19.73	74.00	262	130	Peak
3	* 5354.800	56.63	0.46	57.10	-16.90	74.00	262	130	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

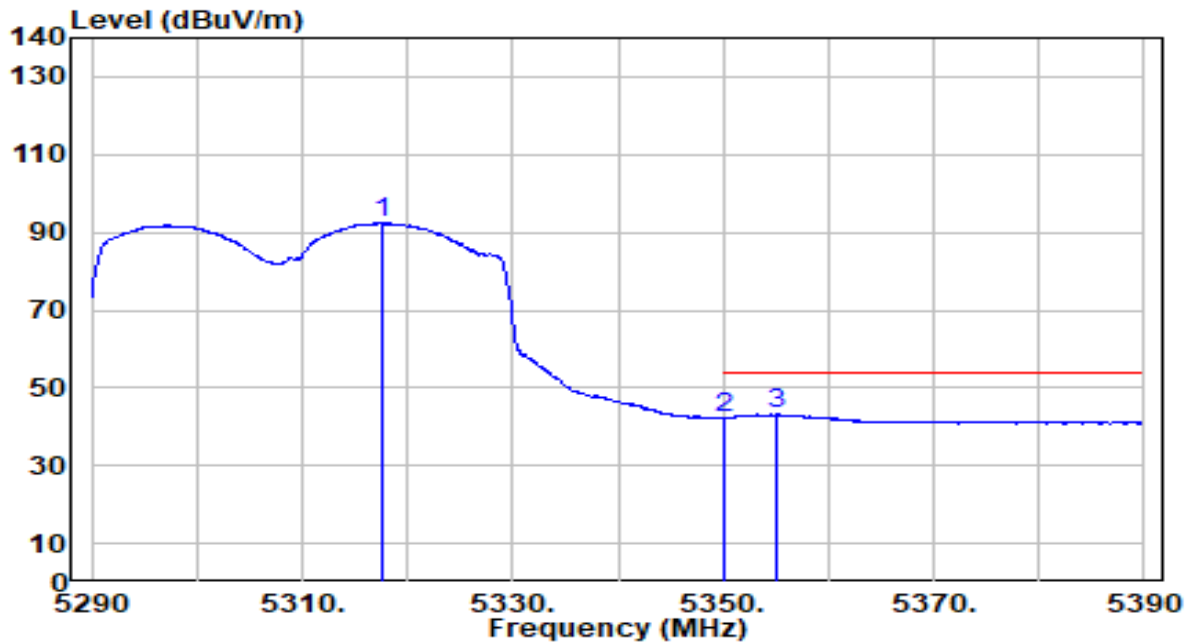


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.500	91.85	0.52	92.38	N/A	N/A	262	130	Average
2	5350.000	41.84	0.47	42.31	-11.69	54.00	262	130	Average
3	* 5355.100	42.79	0.46	43.26	-10.74	54.00	262	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

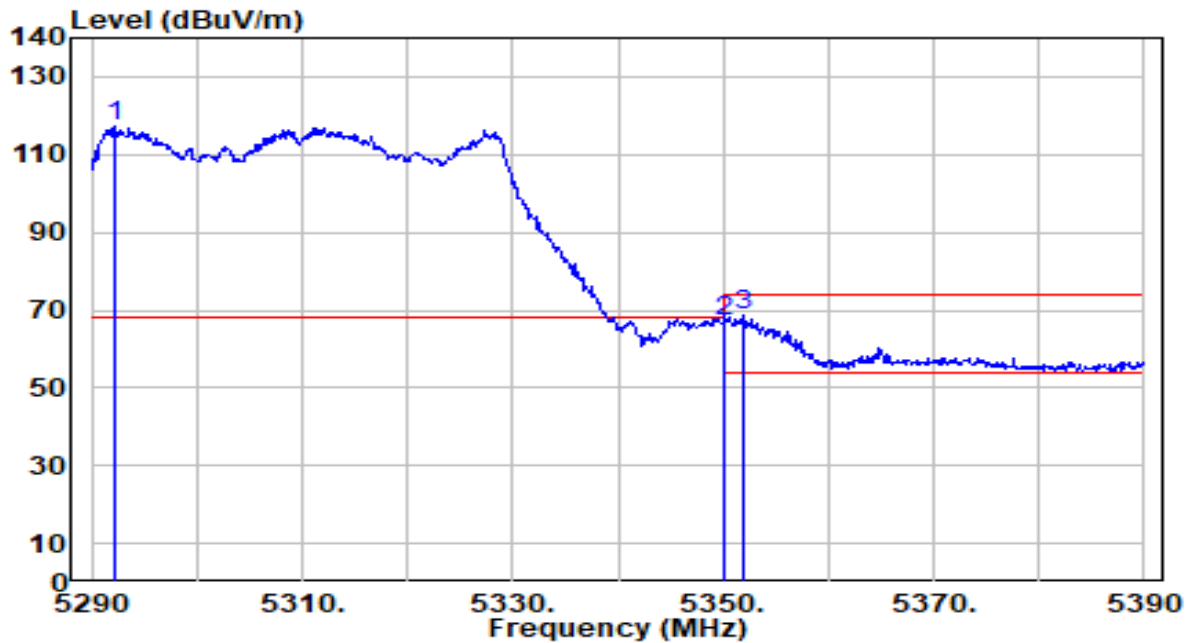


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5292.200	116.66	0.56	117.22	N/A	N/A	150	8	Peak
2	5350.000	66.76	0.47	67.23	-6.77	74.00	150	8	Peak
3	* 5352.000	68.20	0.47	68.67	-5.33	74.00	150	8	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

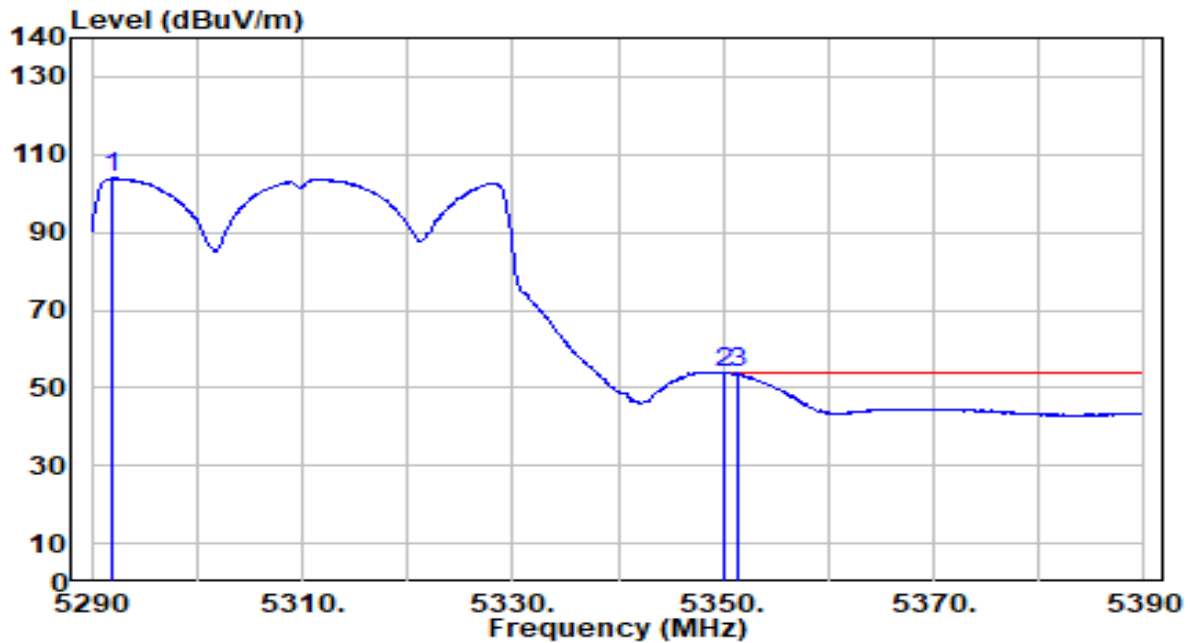


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5292.000	103.44	0.56	104.00	N/A	N/A	150	8	Average
2	5350.000	53.22	0.47	53.69	-0.31	54.00	150	8	Average
3	* 5351.300	53.38	0.47	53.85	-0.15	54.00	150	8	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

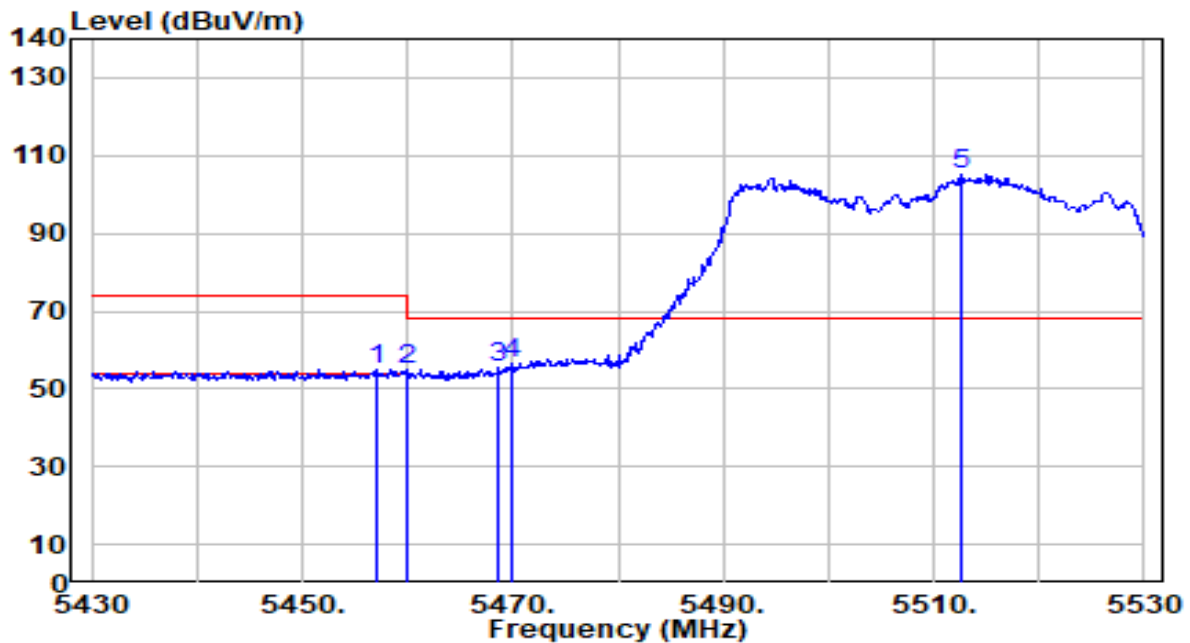


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.000	54.24	0.65	54.89	-19.11	74.00	124	167	Peak
2	5460.000	54.10	0.66	54.76	-19.24	74.00	124	167	Peak
3	5468.600	54.92	0.70	55.62	-12.58	68.20	124	167	Peak
4	* 5470.000	55.75	0.71	56.46	-11.74	68.20	124	167	Peak
5	5512.700	104.36	0.90	105.26	N/A	N/A	124	167	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

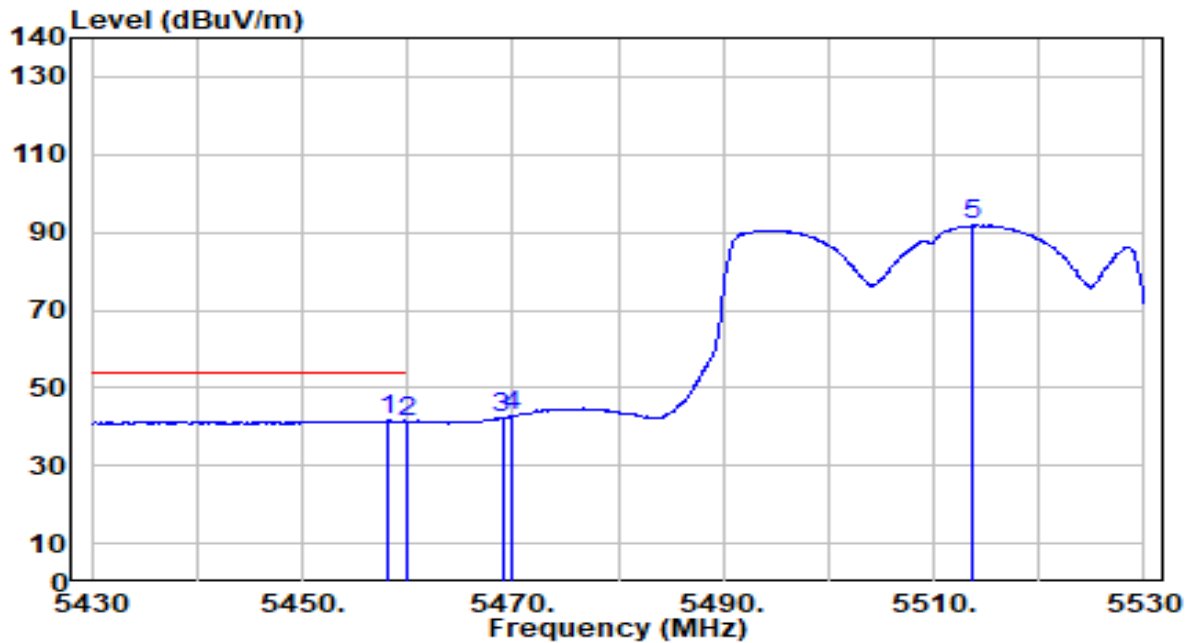


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.100	41.03	0.65	41.68	-12.32	54.00	124	167	Average
2		5460.000	40.69	0.66	41.35	-12.65	54.00	124	167	Average
3		5469.000	41.67	0.70	42.38	N/A	N/A	124	167	Average
4		5470.000	42.11	0.71	42.82	N/A	N/A	124	167	Average
5		5513.700	90.94	0.90	91.84	N/A	N/A	124	167	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

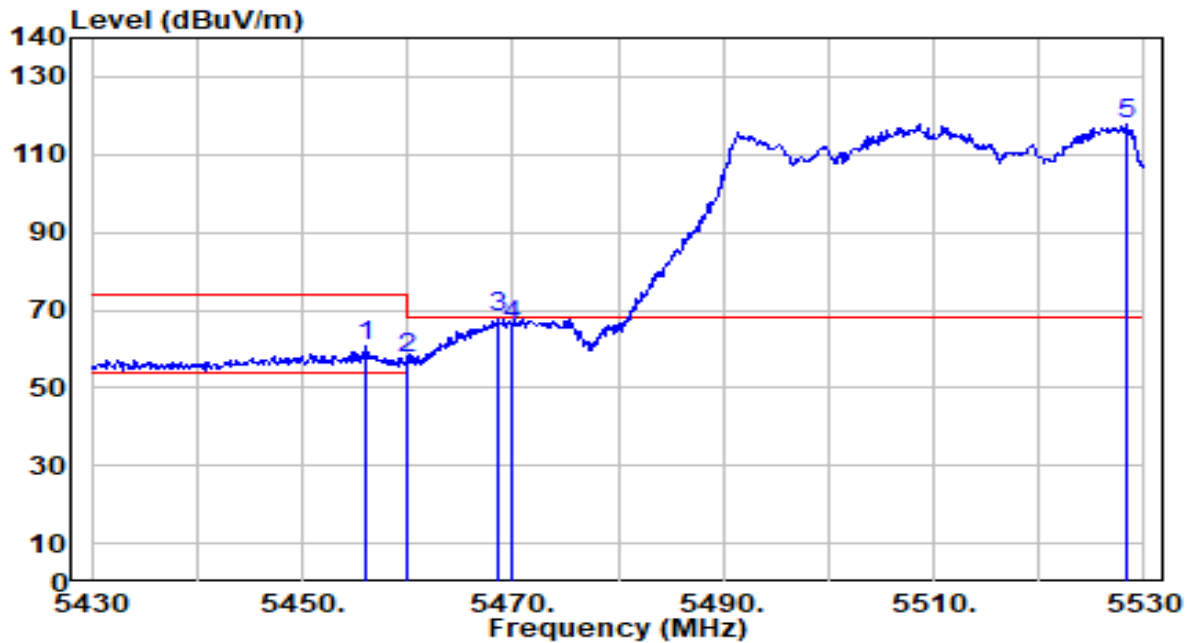


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.000	59.92	0.64	60.56	-13.44	74.00	160	184	Peak
2	5460.000	56.87	0.66	57.54	-16.46	74.00	160	184	Peak
3	* 5468.700	67.24	0.70	67.94	-0.26	68.20	160	184	Peak
4	5470.000	65.20	0.71	65.91	-2.29	68.20	160	184	Peak
5	5528.300	116.82	0.97	117.79	N/A	N/A	160	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

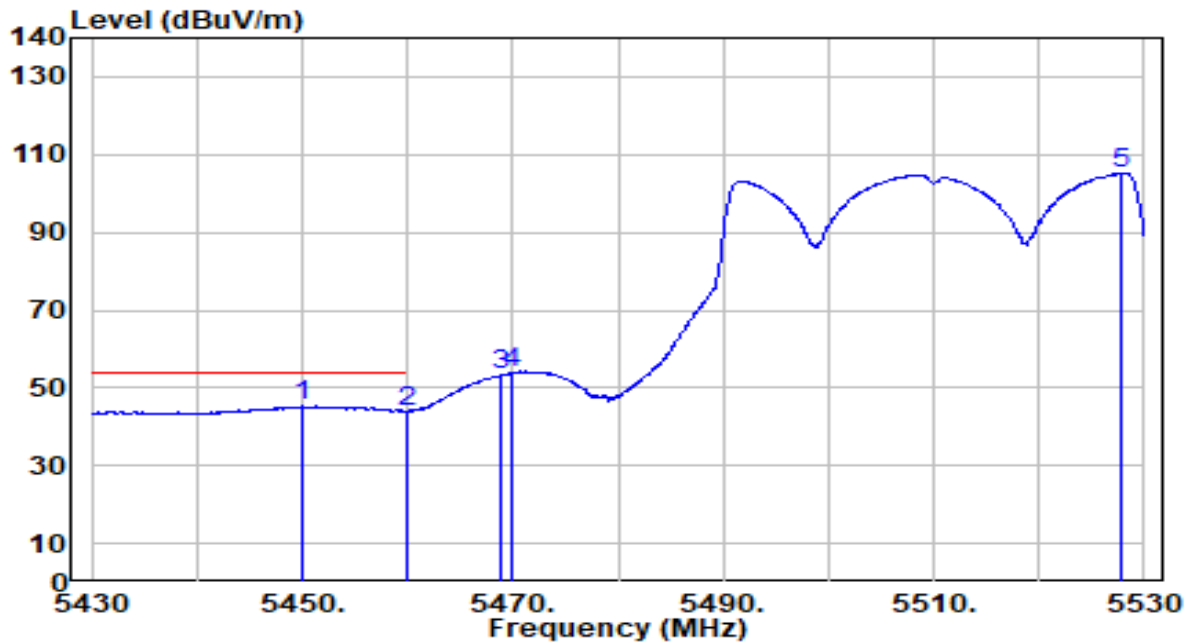


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5450.100	44.59	0.62	45.21	-8.79	54.00	160	184	Average
2		5460.000	43.40	0.66	44.06	-9.94	54.00	160	184	Average
3		5468.900	52.52	0.70	53.22	N/A	N/A	160	184	Average
4		5470.000	52.96	0.71	53.67	N/A	N/A	160	184	Average
5		5527.900	104.10	0.97	105.07	N/A	N/A	160	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	By PoE

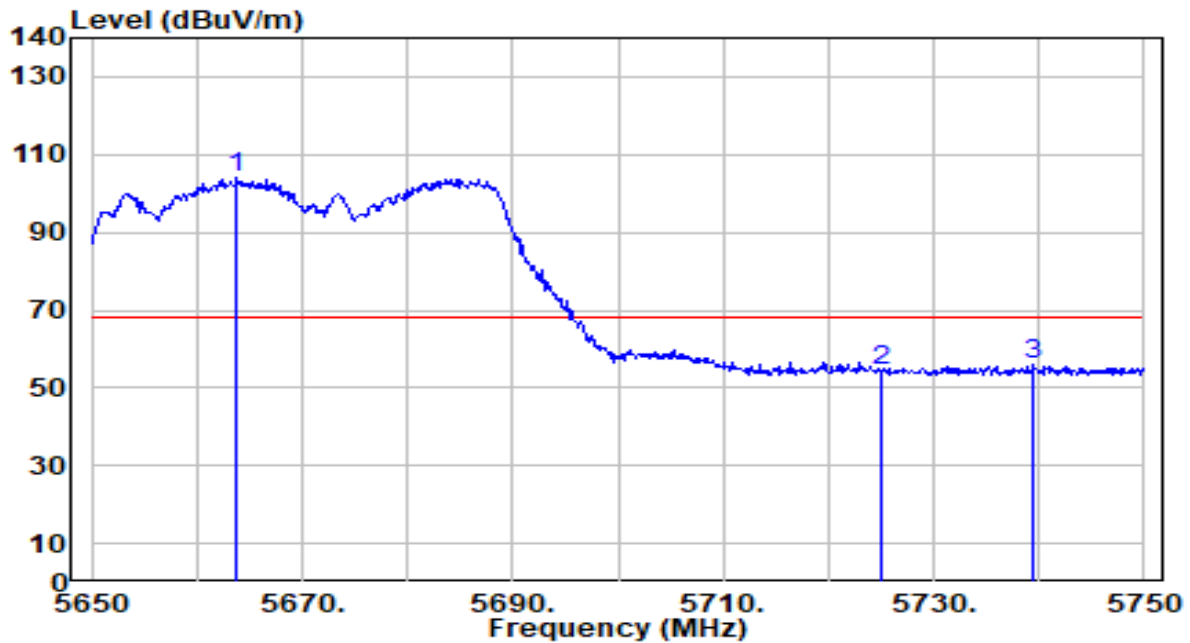


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5663.800	102.21	1.61	103.81	N/A	N/A	119	174	Peak
2	5725.000	52.49	1.89	54.38	-13.82	68.20	119	174	Peak
3	* 5739.500	54.18	1.96	56.14	-12.06	68.20	119	174	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	By PoE

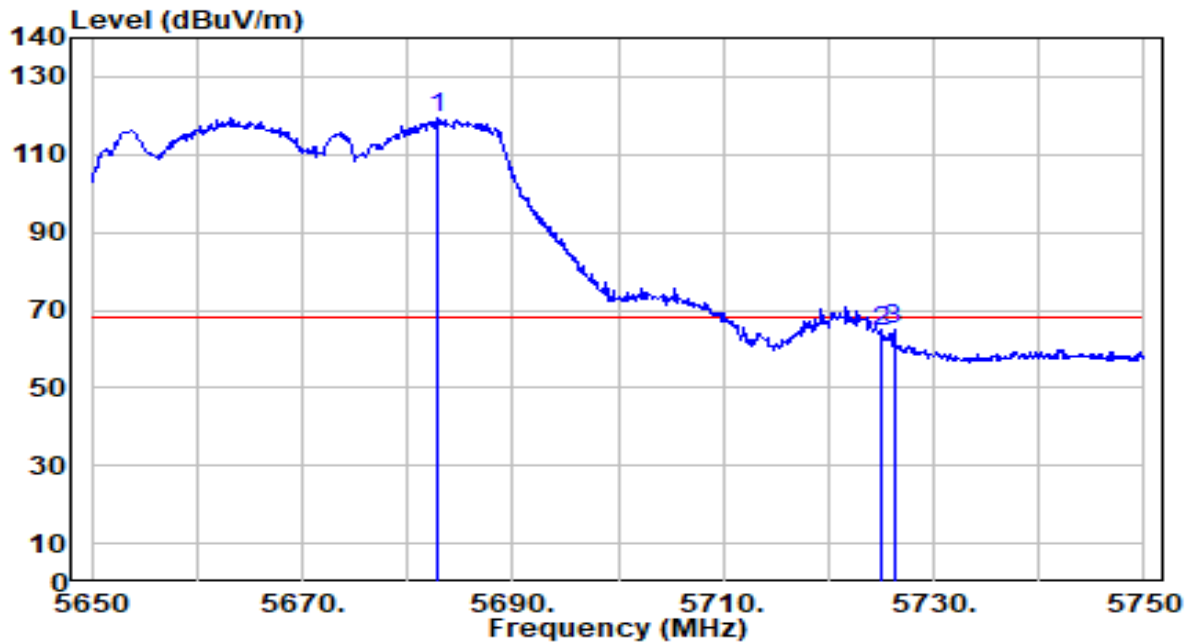


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5682.800	117.49	1.70	119.19	N/A	N/A	150	180	Peak
2	5725.000	62.34	1.89	64.23	-3.97	68.20	150	180	Peak
3	* 5726.200	63.05	1.90	64.95	-3.25	68.20	150	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	By PoE

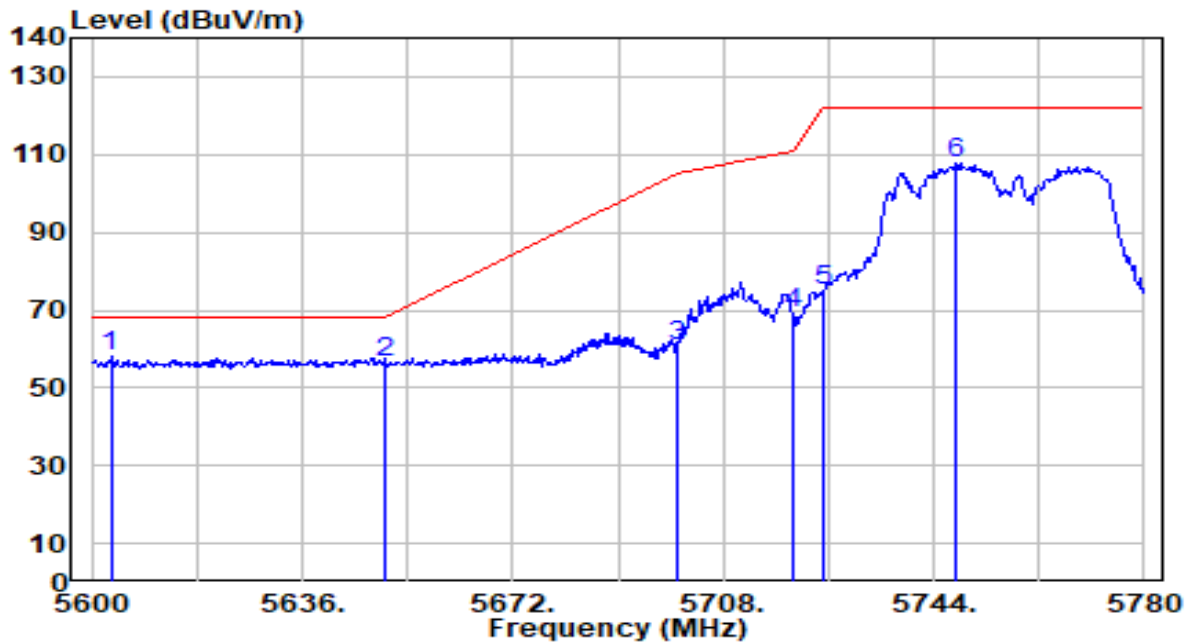


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5603.240	56.94	1.32	58.27	-9.93	68.20	123	176	Peak
2		5650.000	55.01	1.54	56.55	-11.65	68.20	123	176	Peak
3		5700.000	59.09	1.78	60.86	-44.34	105.20	123	176	Peak
4		5720.000	67.37	1.87	69.24	-41.56	110.80	123	176	Peak
5		5725.000	72.98	1.89	74.87	-47.33	122.20	123	176	Peak
6		5747.960	105.78	2.00	107.78	N/A	N/A	123	176	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	By PoE

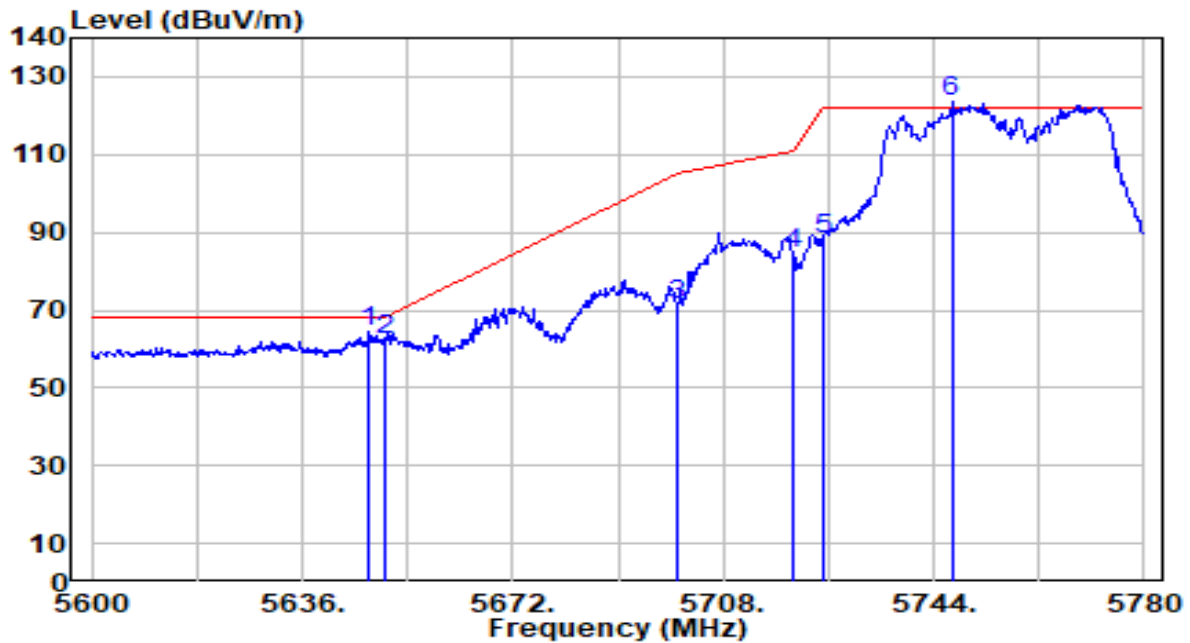


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.520	62.70	1.53	64.23	-3.97	68.20	150	184	Peak
2		5650.000	60.94	1.54	62.48	-5.72	68.20	150	184	Peak
3		5700.000	69.34	1.78	71.11	-34.09	105.20	150	184	Peak
4		5720.000	82.61	1.87	84.48	-26.32	110.80	150	184	Peak
5		5725.000	86.55	1.89	88.44	-33.76	122.20	150	184	Peak
6		5747.060	121.81	2.00	123.80	N/A	N/A	150	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	By PoE

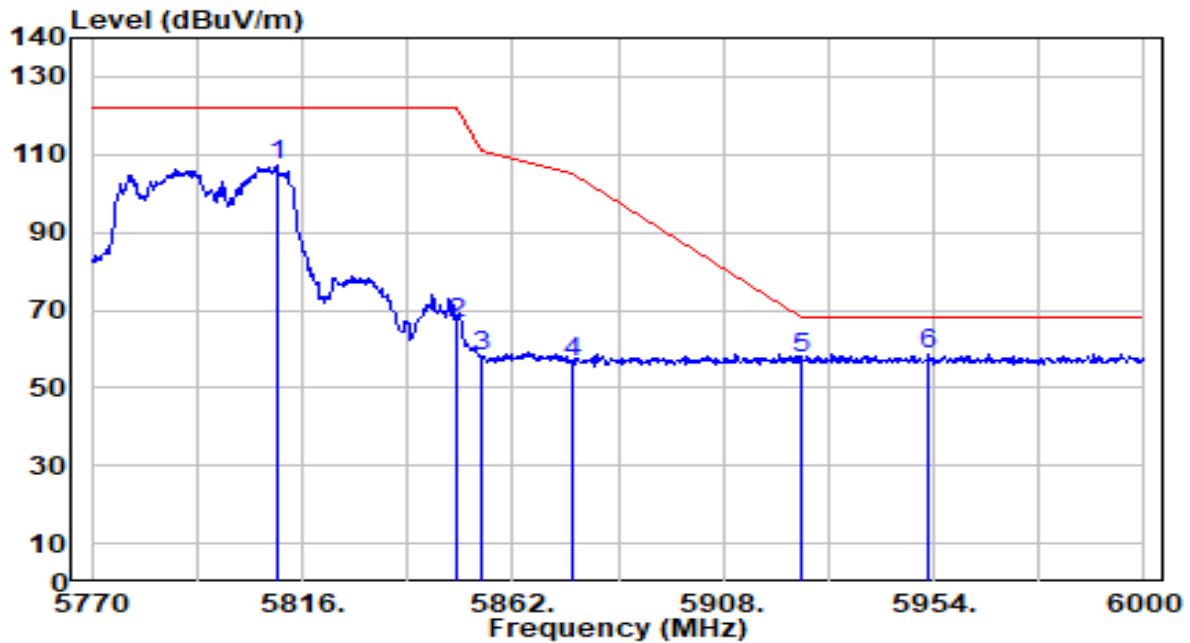


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5810.480	104.85	2.25	107.09	N/A	N/A	100	177	Peak
2	5850.000	64.45	2.25	66.70	-55.50	122.20	100	177	Peak
3	5855.000	55.95	2.25	58.20	-52.60	110.80	100	177	Peak
4	5875.000	54.29	2.26	56.55	-48.65	105.20	100	177	Peak
5	5925.000	55.18	2.27	57.45	-10.75	68.20	100	177	Peak
6	* 5953.080	56.61	2.27	58.88	-9.32	68.20	100	177	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	By PoE

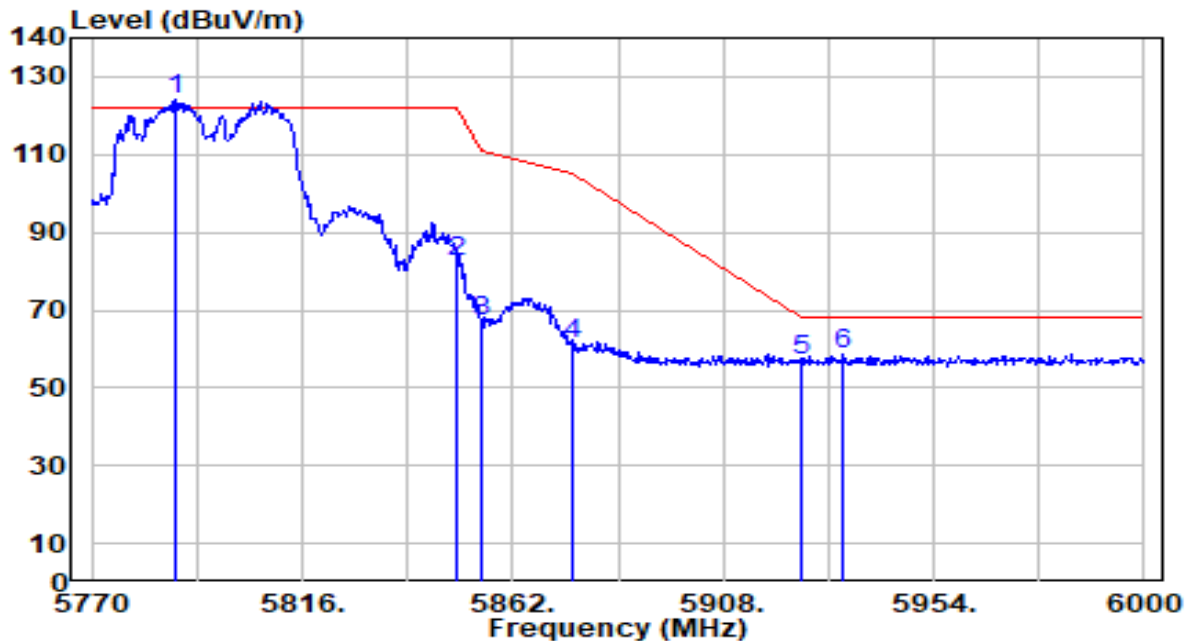


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5788.400	121.72	2.19	123.91	N/A	N/A	150	182	Peak
2	5850.000	79.95	2.25	82.20	-40.00	122.20	150	182	Peak
3	5855.000	64.88	2.25	67.13	-43.67	110.80	150	182	Peak
4	5875.000	58.90	2.26	61.16	-44.04	105.20	150	182	Peak
5	5925.000	54.79	2.27	57.06	-11.14	68.20	150	182	Peak
6	* 5934.220	56.32	2.27	58.59	-9.61	68.20	150	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

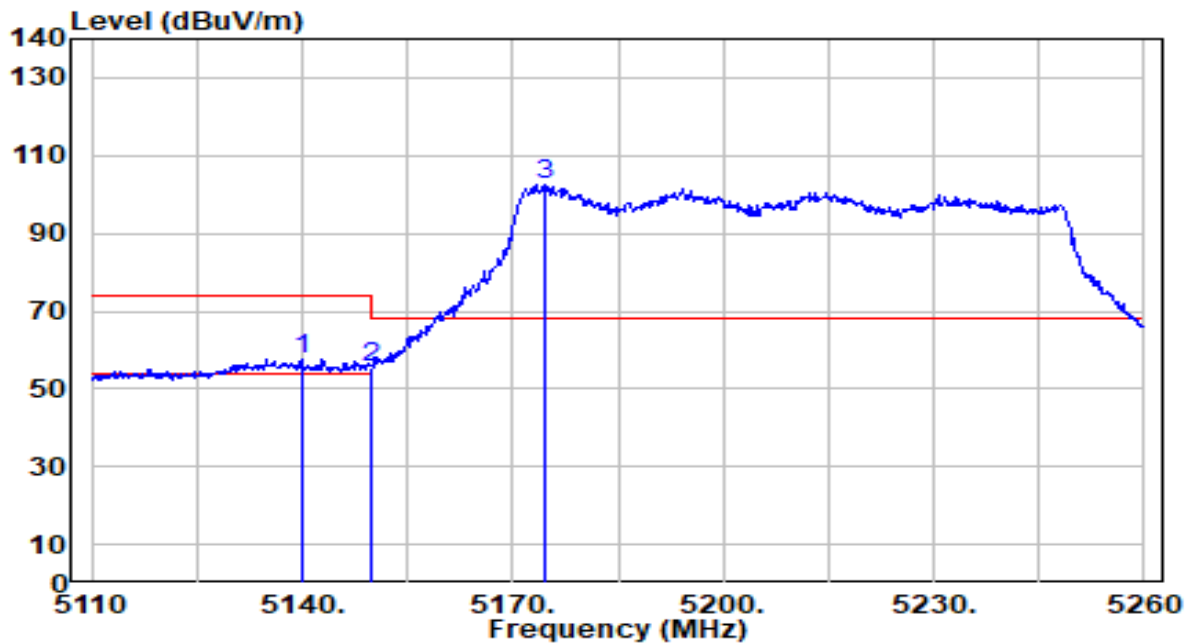


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5139.850	56.77	0.64	57.41	-16.59	74.00	294	151	Peak
2		5150.000	54.85	0.65	55.51	-18.49	74.00	294	151	Peak
3		5174.650	101.99	0.68	102.67	N/A	N/A	294	151	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

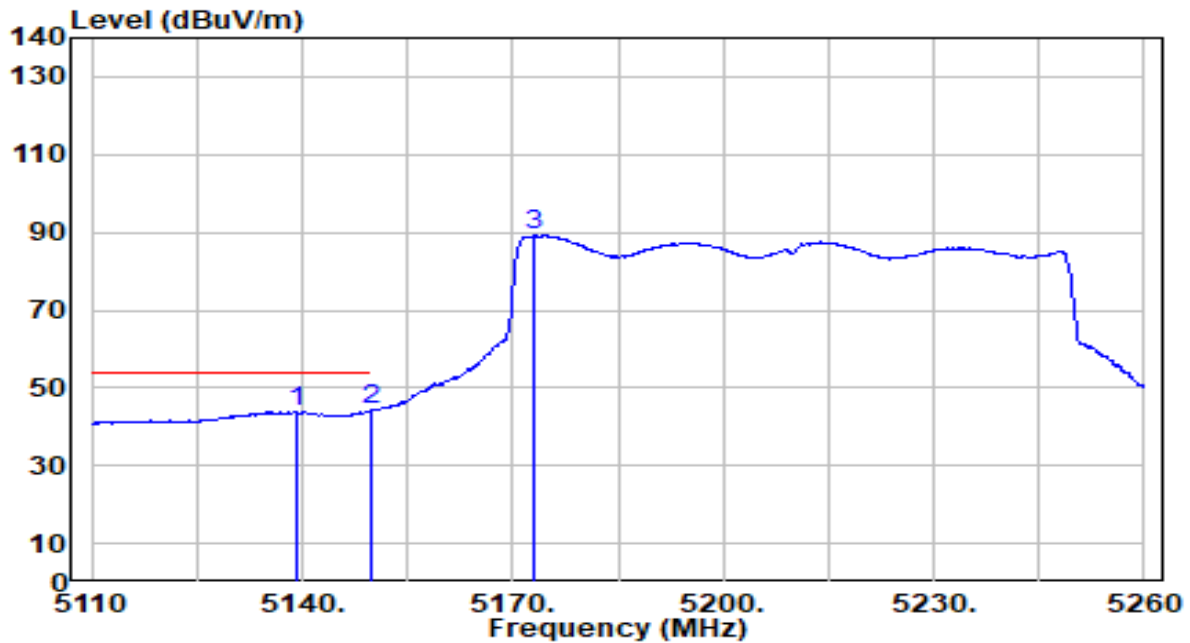


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5139.400	43.21	0.64	43.86	-10.14	54.00	294	151	Average
2	*	5150.000	43.81	0.65	44.46	-9.54	54.00	294	151	Average
3		5173.150	88.41	0.68	89.08	N/A	N/A	294	151	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

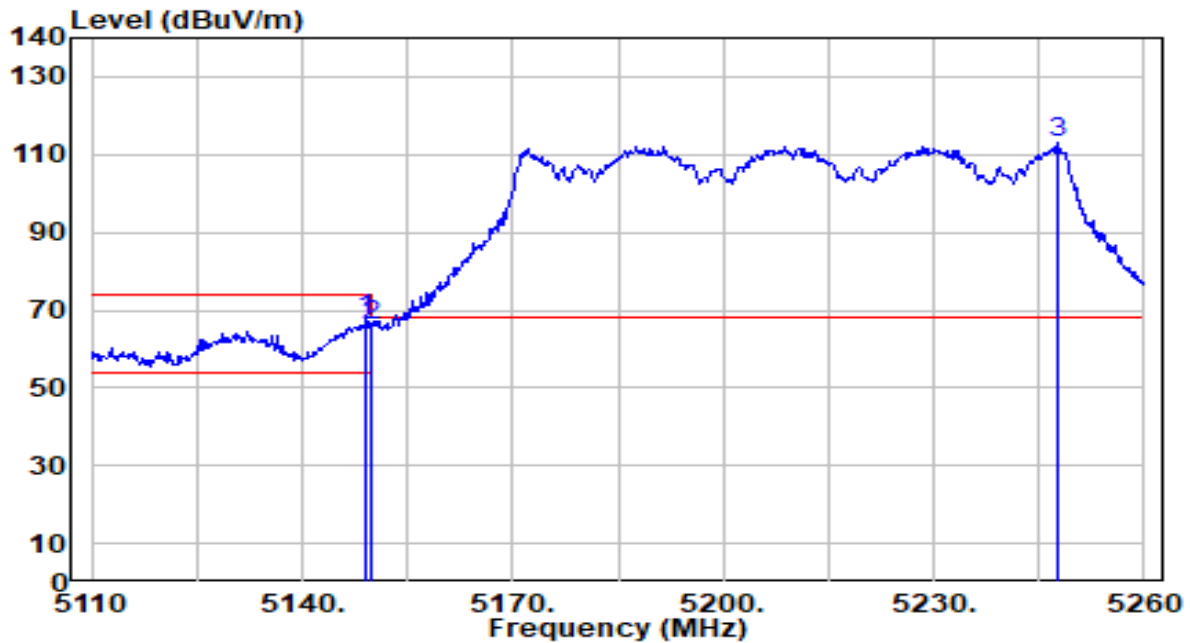


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.150	66.96	0.65	67.62	-6.38	74.00	150	353	Peak
2		5150.000	65.47	0.65	66.13	-7.87	74.00	150	353	Peak
3		5247.550	112.17	0.63	112.80	N/A	N/A	150	353	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

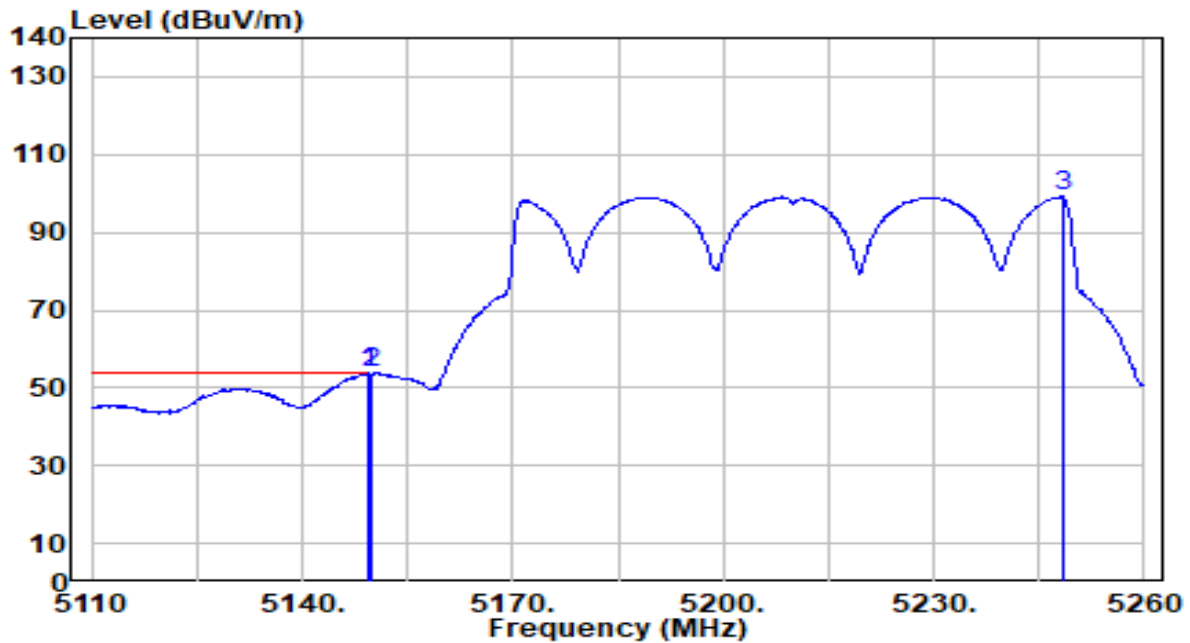


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.450	53.15	0.65	53.81	-0.19	54.00	150	353	Average
2		5150.000	52.97	0.65	53.63	-0.37	54.00	150	353	Average
3		5248.300	98.53	0.63	99.16	N/A	N/A	150	353	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

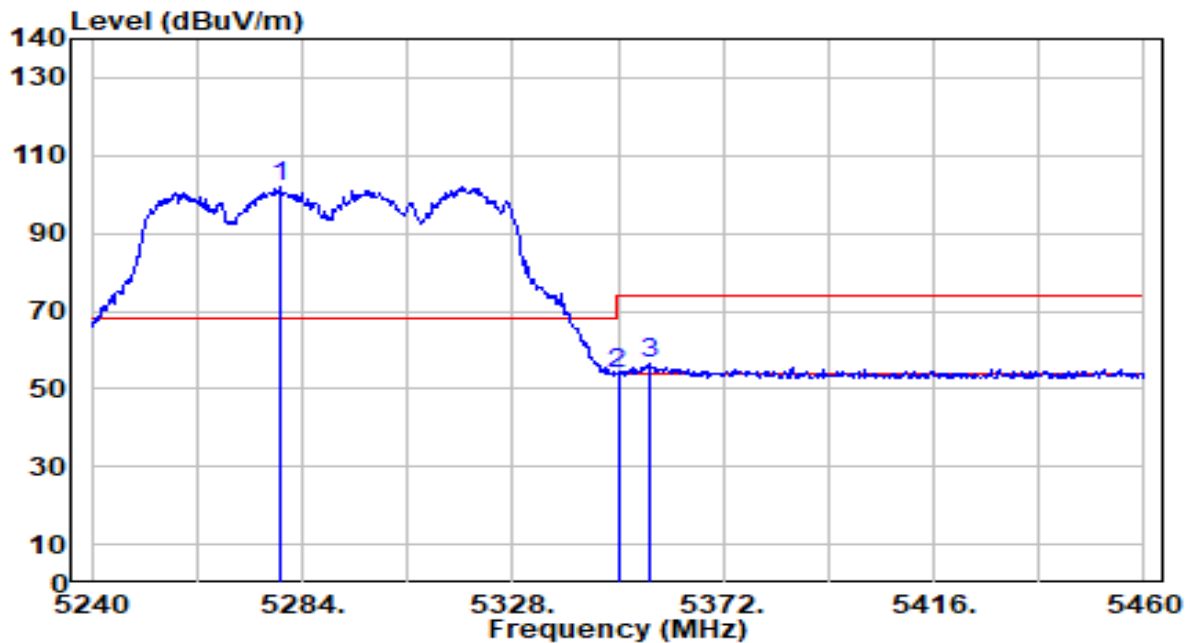


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5279.380	101.20	0.58	101.78	N/A	N/A	262	132	Peak
2	5350.000	53.59	0.47	54.07	-19.93	74.00	262	132	Peak
3	* 5356.380	55.90	0.46	56.36	-17.64	74.00	262	132	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

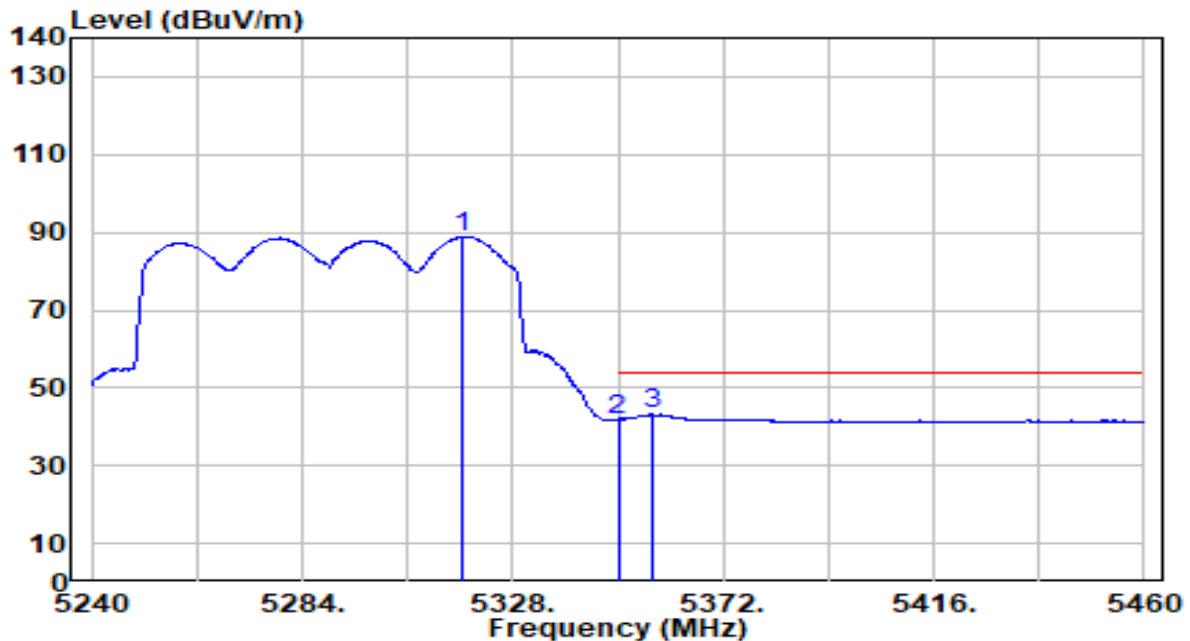


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.660	88.32	0.52	88.84	N/A	N/A	262	132	Average
2	5350.000	41.28	0.47	41.75	-12.25	54.00	262	132	Average
3	* 5357.260	42.75	0.46	43.21	-10.79	54.00	262	132	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

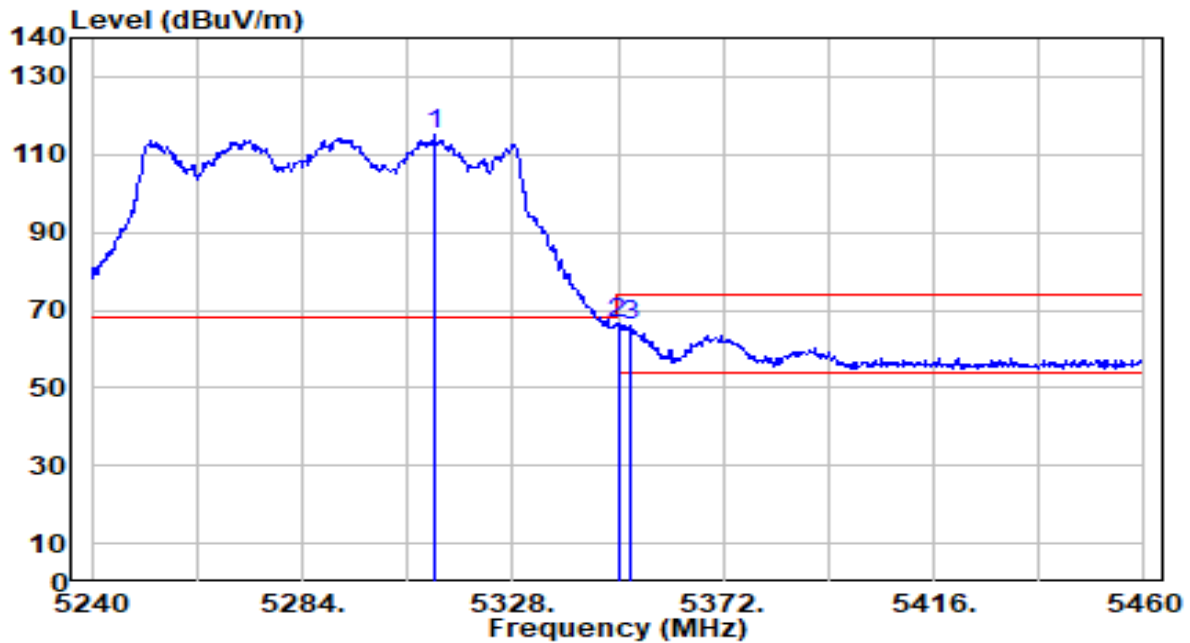


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5311.500	114.38	0.53	114.91	N/A	N/A	150	8	Peak
2	*	5350.000	66.29	0.47	66.76	-7.24	74.00	150	8	Peak
3		5352.420	65.66	0.47	66.12	-7.88	74.00	150	8	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

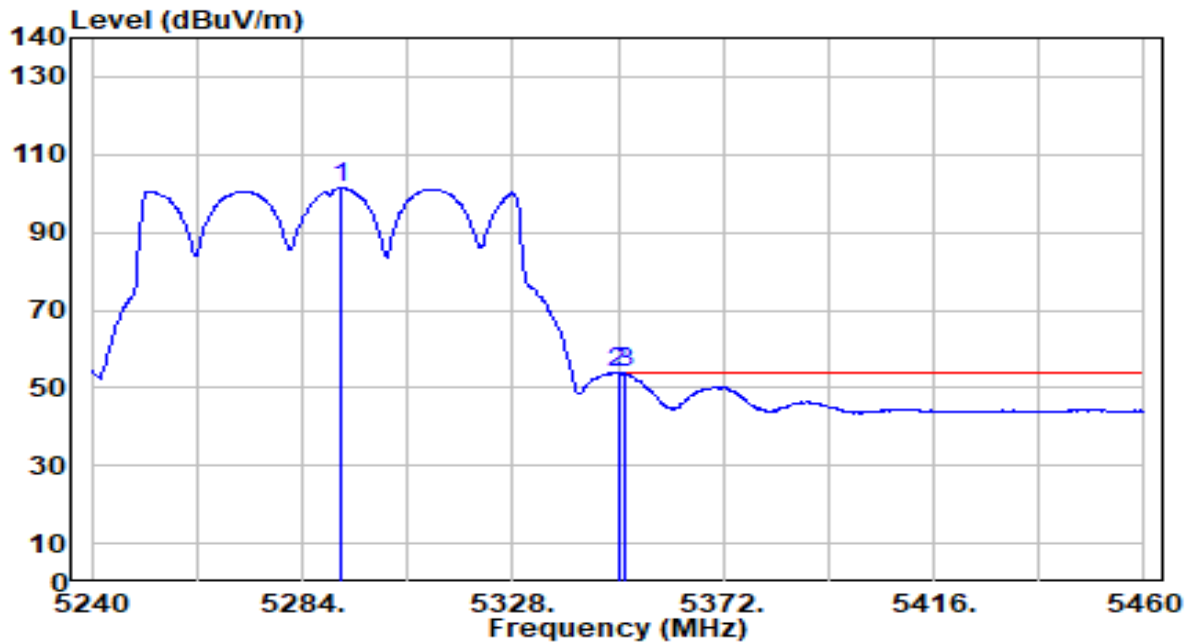


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5292.140	100.82	0.56	101.38	N/A	N/A	150	8	Average
2	*	5350.000	53.42	0.47	53.89	-0.11	54.00	150	8	Average
3		5351.320	53.19	0.47	53.66	-0.34	54.00	150	8	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

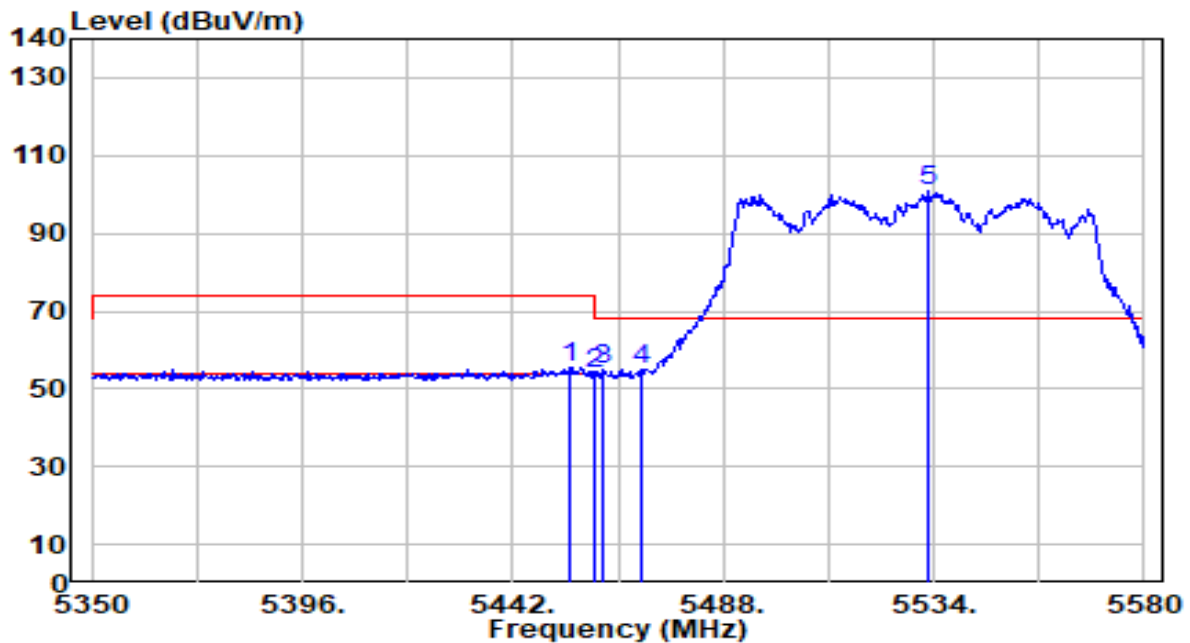


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.420	54.99	0.64	55.63	-18.37	74.00	100	147	Peak
2	5460.000	53.36	0.66	54.02	-19.98	74.00	100	147	Peak
3	5461.550	54.19	0.67	54.86	-13.34	68.20	100	147	Peak
4	* 5470.000	54.15	0.71	54.86	-13.34	68.20	100	147	Peak
5	5532.850	99.66	0.99	100.65	N/A	N/A	100	147	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

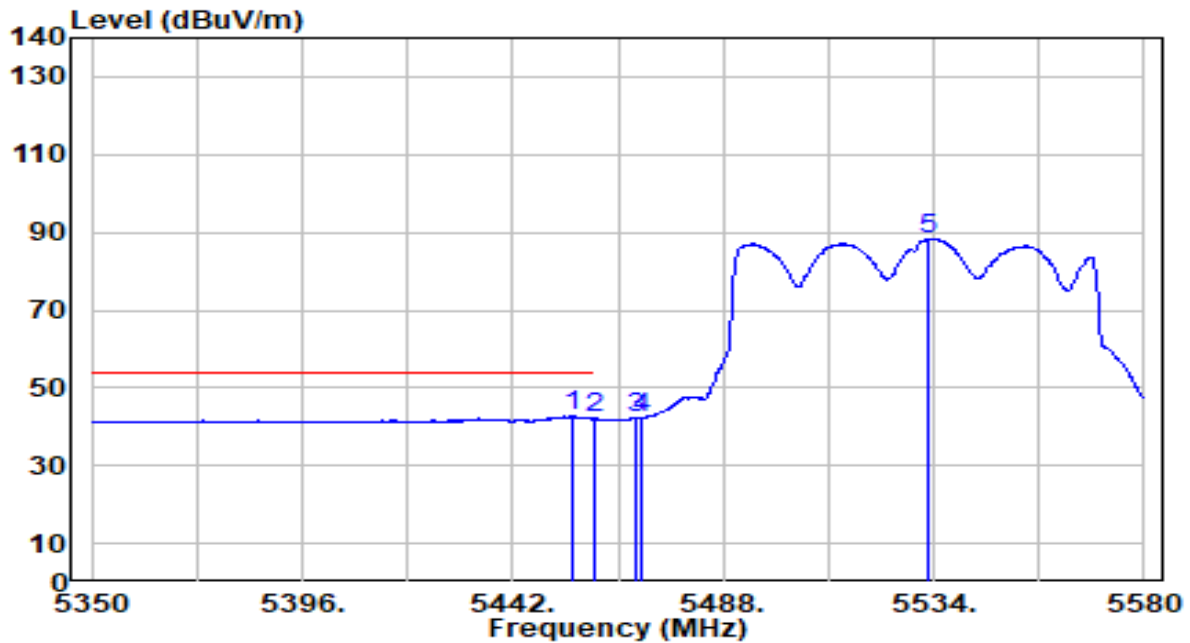


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.340	42.08	0.64	42.72	-11.28	54.00	100	147	Average
2		5460.000	41.54	0.66	42.20	-11.80	54.00	100	147	Average
3		5468.910	41.52	0.70	42.22	N/A	N/A	100	147	Average
4		5470.000	41.67	0.71	42.38	N/A	N/A	100	147	Average
5		5532.850	87.23	0.99	88.23	N/A	N/A	100	147	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

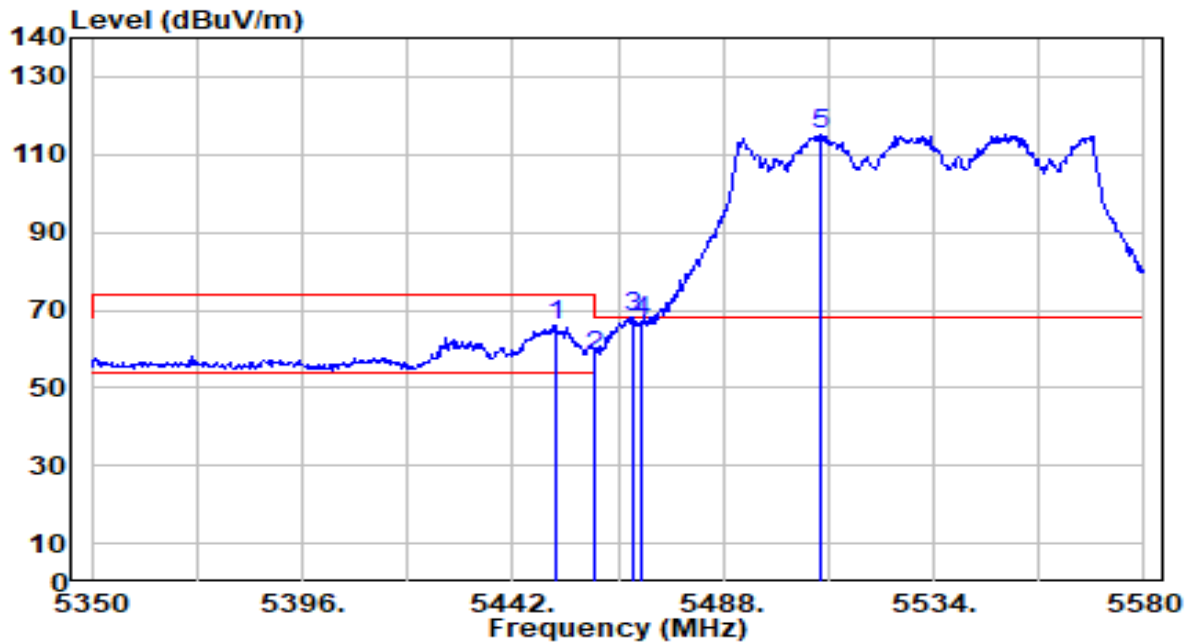


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5451.200	65.51	0.62	66.13	-7.87	74.00	153	184	Peak
2	5460.000	57.57	0.66	58.24	-15.76	74.00	153	184	Peak
3	* 5468.220	67.36	0.70	68.06	-0.14	68.20	153	184	Peak
4	5470.000	66.45	0.71	67.15	-1.05	68.20	153	184	Peak
5	5509.390	114.21	0.88	115.10	N/A	N/A	153	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

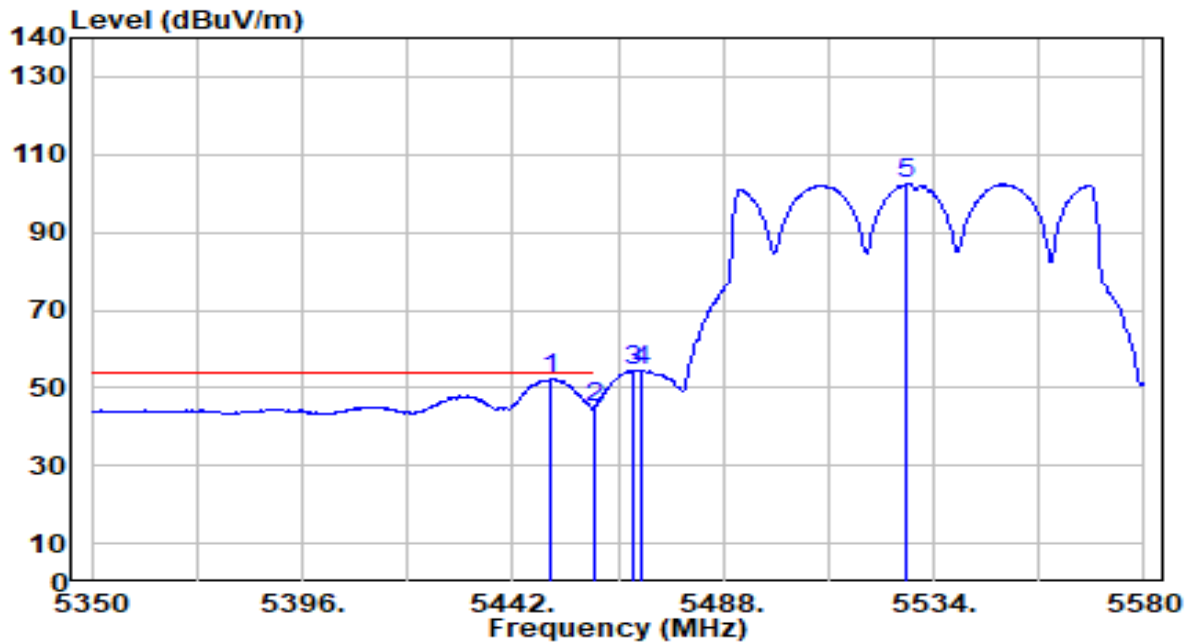


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5450.280	51.53	0.62	52.14	-1.86	54.00	153	184	Average
2		5460.000	44.49	0.66	45.15	-8.85	54.00	153	184	Average
3		5468.450	53.82	0.70	54.52	N/A	N/A	153	184	Average
4		5470.000	53.73	0.71	54.44	N/A	N/A	153	184	Average
5		5527.790	101.42	0.97	102.39	N/A	N/A	153	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	By PoE

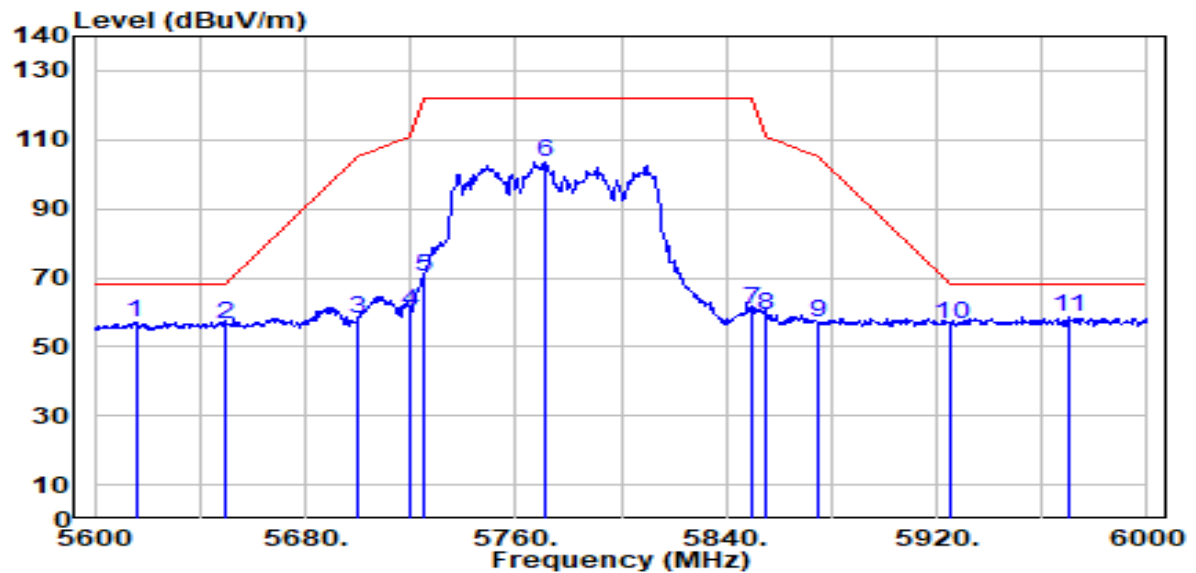


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5615.600	55.92	1.38	57.30	-10.90	68.20	100	176	Peak
2	5650.000	55.00	1.54	56.54	-11.66	68.20	100	176	Peak
3	5700.000	56.37	1.78	58.15	-47.05	105.20	100	176	Peak
4	5720.000	58.25	1.87	60.12	-50.68	110.80	100	176	Peak
5	5725.000	68.49	1.89	70.38	-51.82	122.20	100	176	Peak
6	5770.800	101.64	2.11	103.74	N/A	N/A	100	176	Peak
7	5850.000	58.28	2.25	60.54	-61.66	122.20	100	176	Peak
8	5855.000	57.18	2.25	59.43	-51.37	110.80	100	176	Peak
9	5875.000	54.56	2.26	56.81	-48.39	105.20	100	176	Peak
10	5925.000	54.45	2.27	56.72	-11.48	68.20	100	176	Peak
11	* 5970.400	56.36	2.27	58.63	-9.57	68.20	100	176	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	By PoE

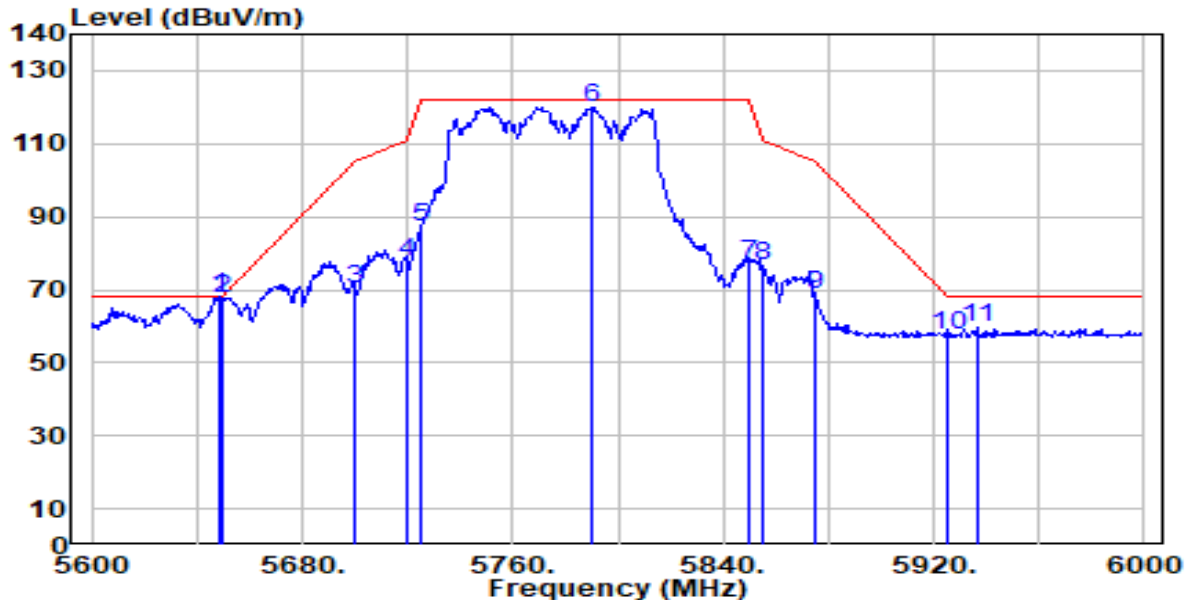


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.800	66.42	1.54	67.95	-0.25	68.20	150	184	Peak
2		5650.000	66.16	1.54	67.70	-0.50	68.20	150	184	Peak
3		5700.000	68.72	1.78	70.49	-34.71	105.20	150	184	Peak
4		5720.000	75.80	1.87	77.67	-33.13	110.80	150	184	Peak
5		5725.000	85.35	1.89	87.24	-34.96	122.20	150	184	Peak
6		5790.400	117.96	2.20	120.16	N/A	N/A	150	184	Peak
7		5850.000	75.08	2.25	77.33	-44.87	122.20	150	184	Peak
8		5855.000	74.21	2.25	76.46	-34.34	110.80	150	184	Peak
9		5875.000	66.39	2.26	68.65	-36.55	105.20	150	184	Peak
10		5925.000	55.52	2.27	57.79	-10.41	68.20	150	184	Peak
11		5936.400	57.57	2.27	59.84	-8.36	68.20	150	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

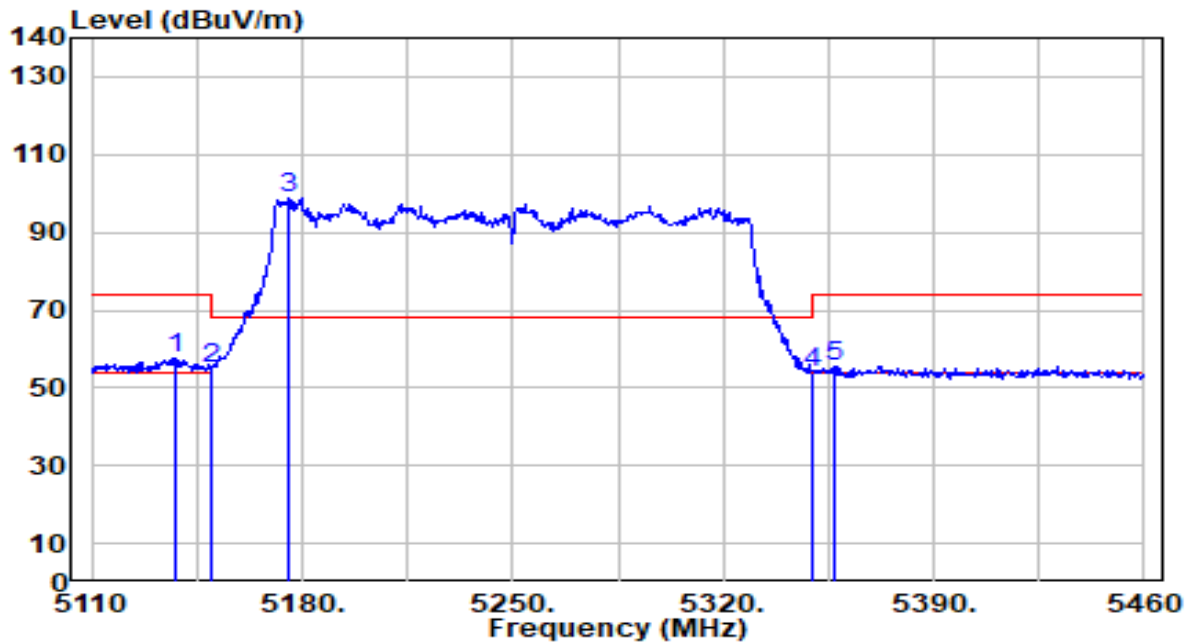


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5137.650	57.03	0.64	57.67	-16.33	74.00	292	152	Peak
2		5150.000	54.18	0.65	54.83	-19.17	74.00	292	152	Peak
3		5175.450	98.17	0.68	98.85	N/A	N/A	292	152	Peak
4		5350.000	53.34	0.47	53.81	-20.19	74.00	292	152	Peak
5		5356.750	55.26	0.46	55.72	-18.28	74.00	292	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

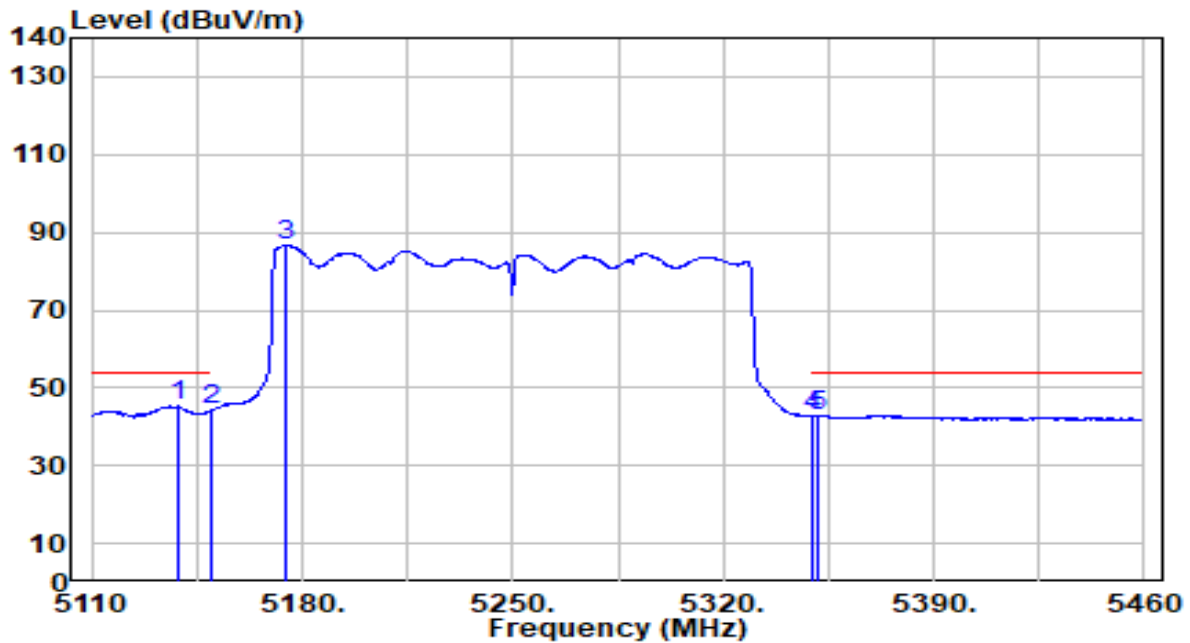


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5138.700	44.79	0.64	45.44	-8.56	54.00	292	152	Average
2		5150.000	43.53	0.65	44.18	-9.82	54.00	292	152	Average
3		5174.750	86.02	0.68	86.70	N/A	N/A	292	152	Average
4		5350.000	42.38	0.47	42.85	-11.15	54.00	292	152	Average
5		5351.150	42.54	0.47	43.01	-10.99	54.00	292	152	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

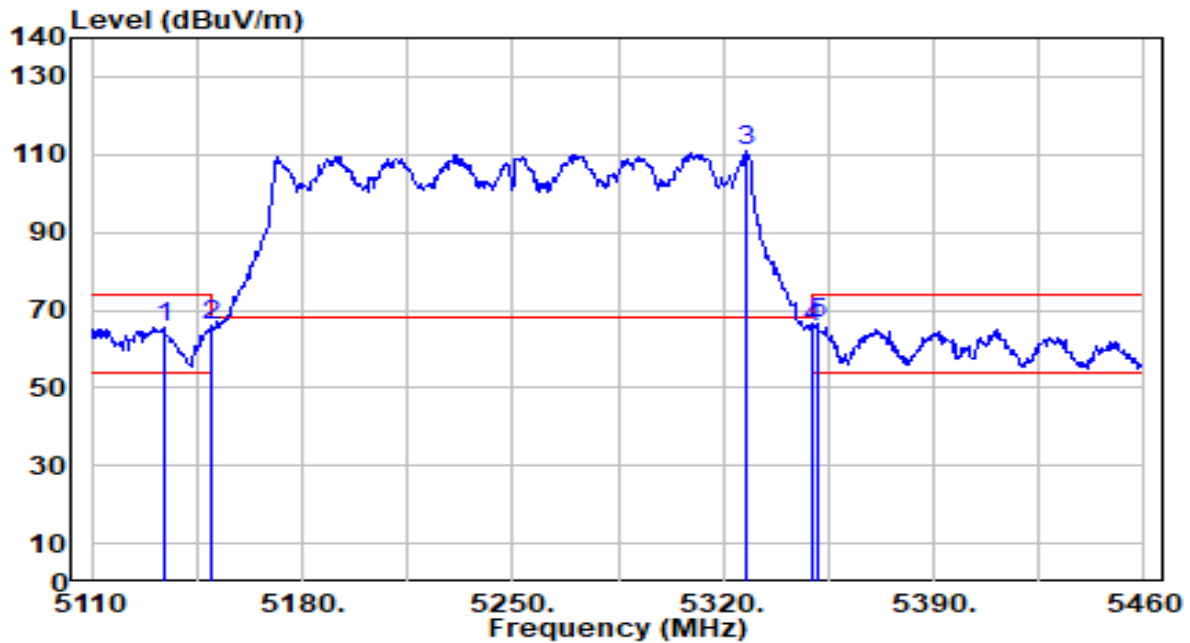


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5133.800	64.89	0.64	65.53	-8.47	74.00	142	9	Peak
2	5150.000	65.31	0.65	65.96	-8.04	74.00	142	9	Peak
3	5328.050	110.35	0.50	110.85	N/A	N/A	142	9	Peak
4	5350.000	64.85	0.47	65.32	-8.68	74.00	142	9	Peak
5	* 5351.500	65.85	0.47	66.32	-7.68	74.00	142	9	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

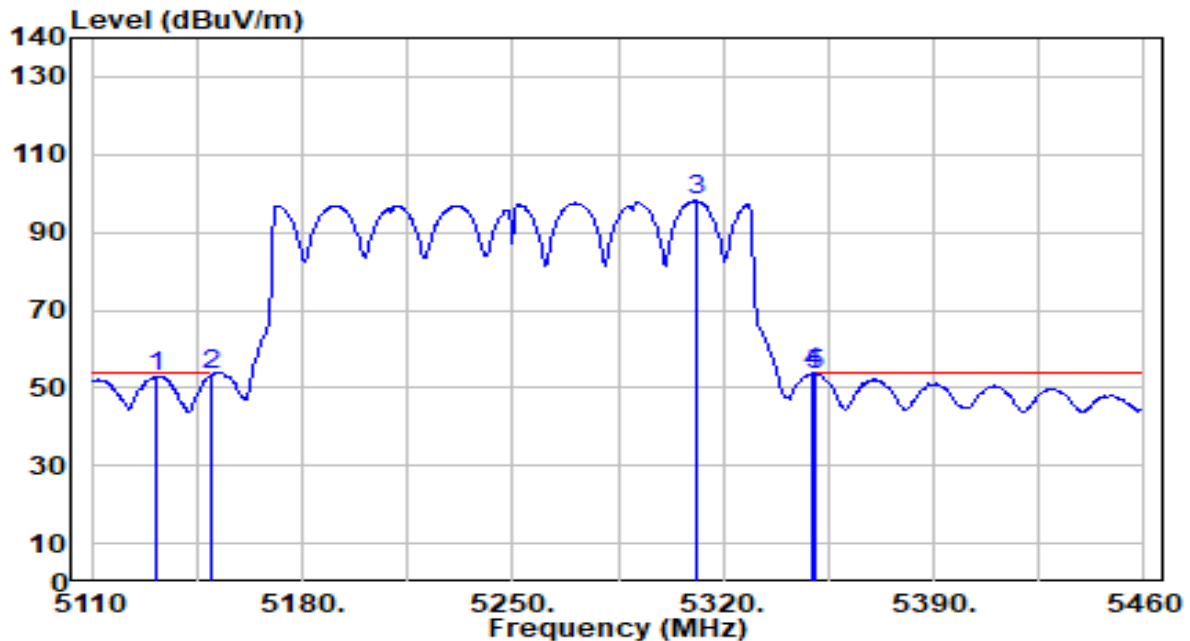


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5131.350	52.41	0.64	53.05	-0.95	54.00	142	9	Average
2	5150.000	52.82	0.65	53.47	-0.53	54.00	142	9	Average
3	5311.250	97.56	0.53	98.09	N/A	N/A	142	9	Average
4	* 5350.000	53.36	0.47	53.83	-0.17	54.00	142	9	Average
5	5350.800	53.10	0.47	53.57	-0.43	54.00	142	9	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	By PoE

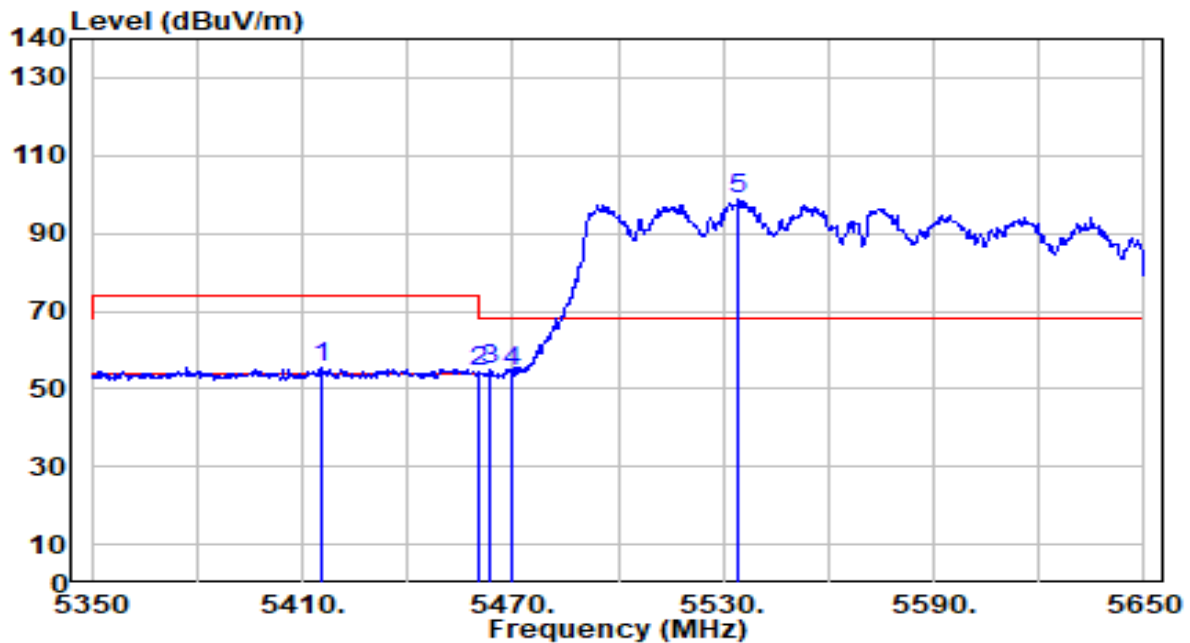


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5415.400	55.07	0.46	55.54	-18.46	74.00	100	148	Peak
2	5460.000	53.60	0.66	54.26	-19.74	74.00	100	148	Peak
3	* 5463.100	54.26	0.68	54.94	-13.26	68.20	100	148	Peak
4	5470.000	53.48	0.71	54.19	-14.01	68.20	100	148	Peak
5	5534.200	97.90	1.00	98.90	N/A	N/A	100	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	By PoE

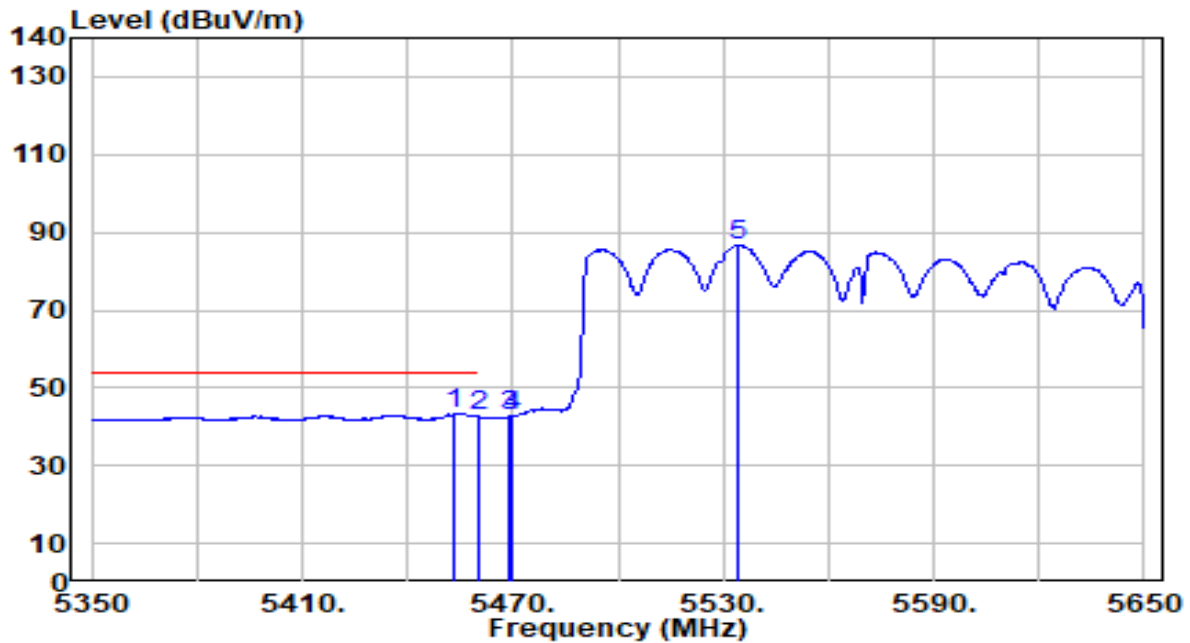


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5453.200	42.71	0.63	43.34	-10.66	54.00	100	148	Average
2		5460.000	41.93	0.66	42.59	-11.41	54.00	100	148	Average
3		5469.100	41.89	0.70	42.59	N/A	N/A	100	148	Average
4		5470.000	42.05	0.71	42.76	N/A	N/A	100	148	Average
5		5534.200	85.50	1.00	86.50	N/A	N/A	100	148	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	By PoE

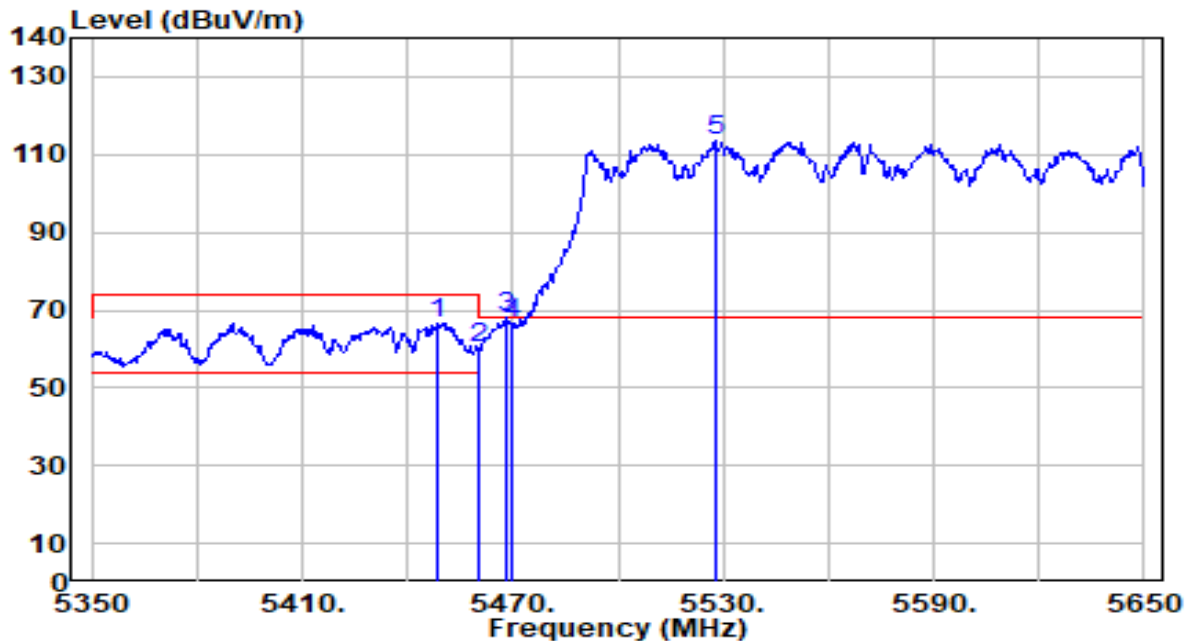


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5448.700	66.12	0.61	66.73	-7.27	74.00	150	184	Peak
2	5460.000	59.71	0.66	60.37	-13.63	74.00	150	184	Peak
3	* 5468.500	67.22	0.70	67.92	-0.28	68.20	150	184	Peak
4	5470.000	66.07	0.71	66.78	-1.42	68.20	150	184	Peak
5	5527.600	112.39	0.97	113.36	N/A	N/A	150	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	By PoE

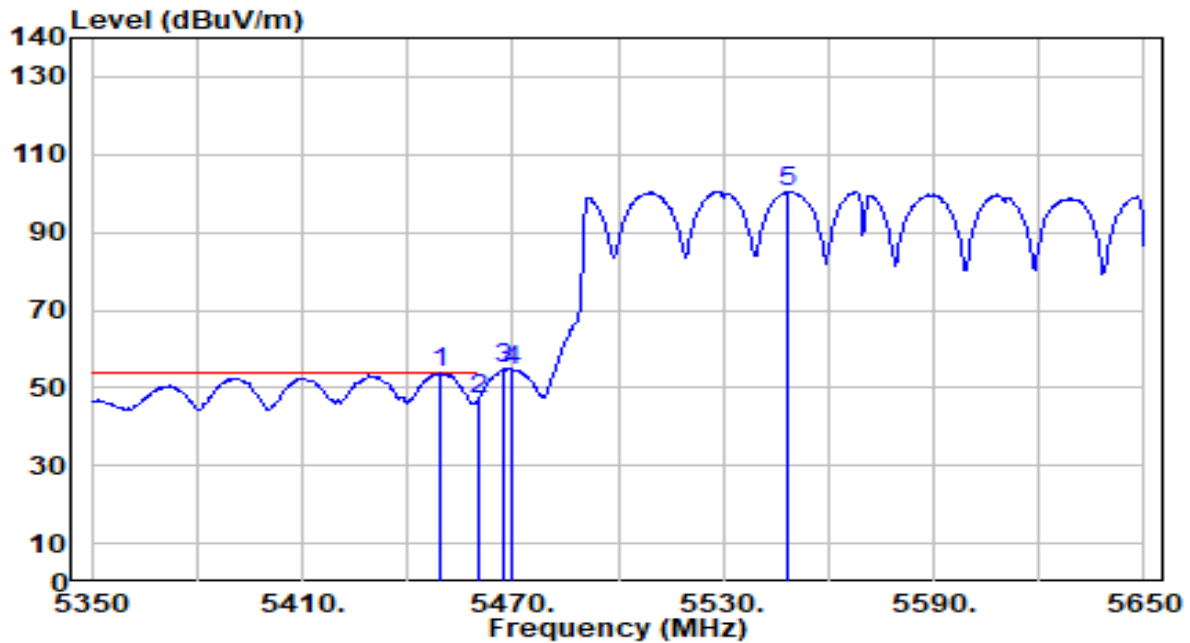


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5449.300	53.27	0.61	53.88	-0.12	54.00	150	184	Average
2		5460.000	46.45	0.66	47.11	-6.89	54.00	150	184	Average
3		5467.300	54.30	0.69	55.00	N/A	N/A	150	184	Average
4		5470.000	53.87	0.71	54.57	N/A	N/A	150	184	Average
5		5548.300	99.48	1.07	100.54	N/A	N/A	150	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

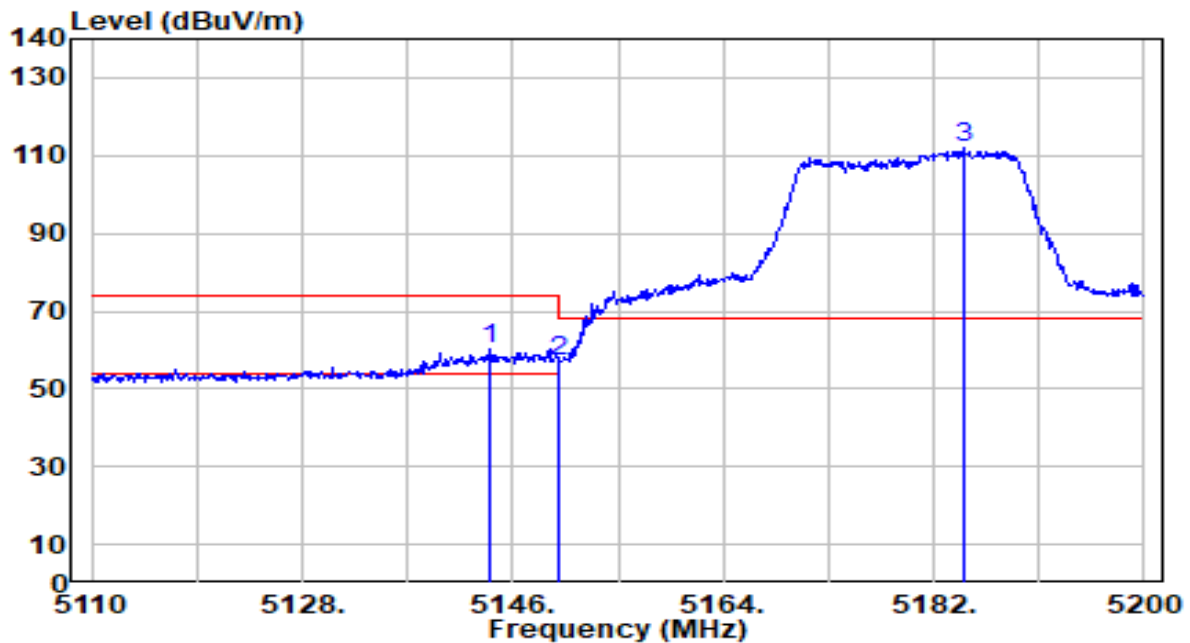


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.110	59.73	0.65	60.38	-13.62	74.00	300	152	Peak
2		5150.000	56.28	0.65	56.93	-17.07	74.00	300	152	Peak
3		5184.520	111.31	0.69	112.00	N/A	N/A	300	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

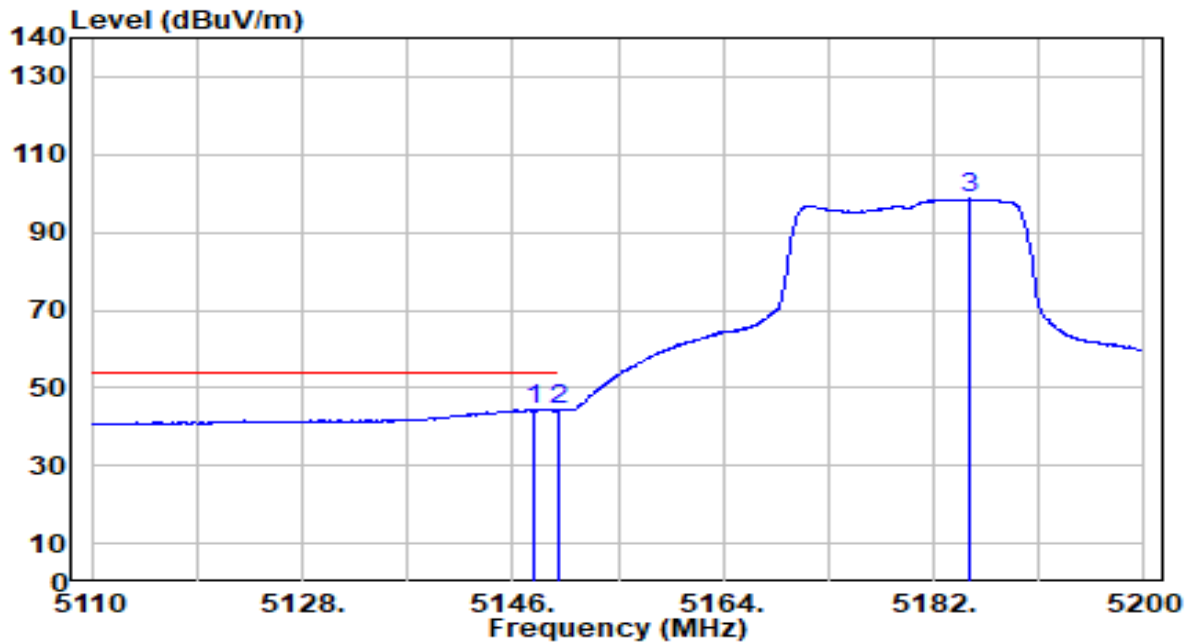


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.800	43.83	0.65	44.48	-9.52	54.00	300	152	Average
2		5150.000	43.55	0.65	44.21	-9.79	54.00	300	152	Average
3		5185.060	97.93	0.69	98.62	N/A	N/A	300	152	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

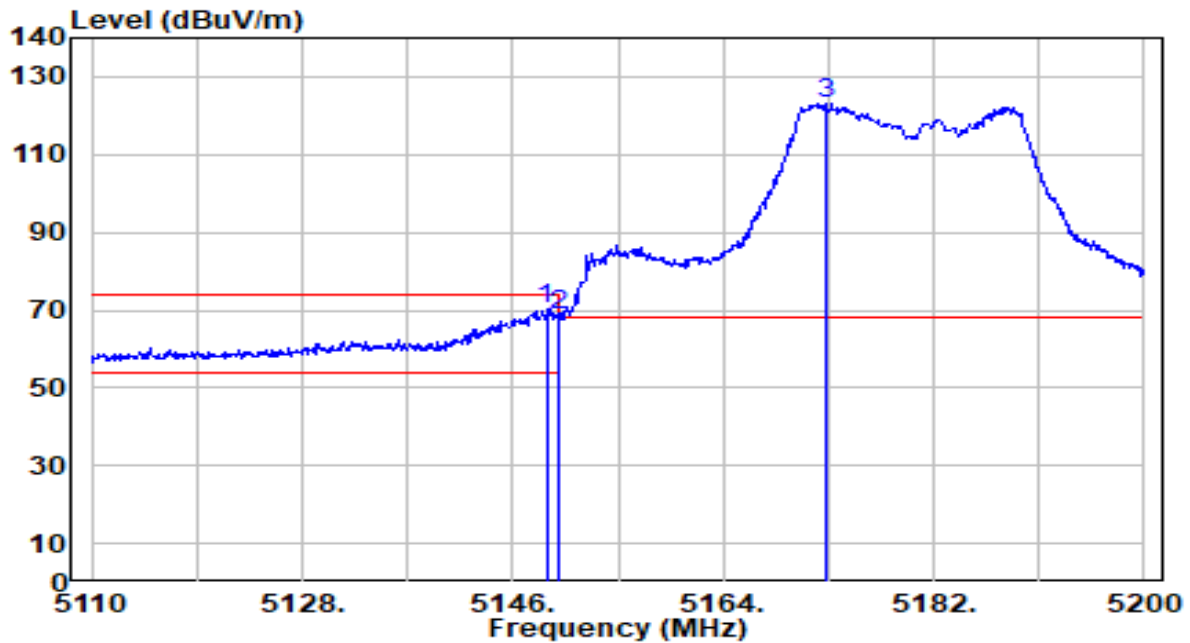


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.880	69.42	0.65	70.08	-3.92	74.00	150	359	Peak
2		5150.000	68.17	0.65	68.83	-5.17	74.00	150	359	Peak
3		5172.730	122.33	0.68	123.01	N/A	N/A	150	359	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By PoE

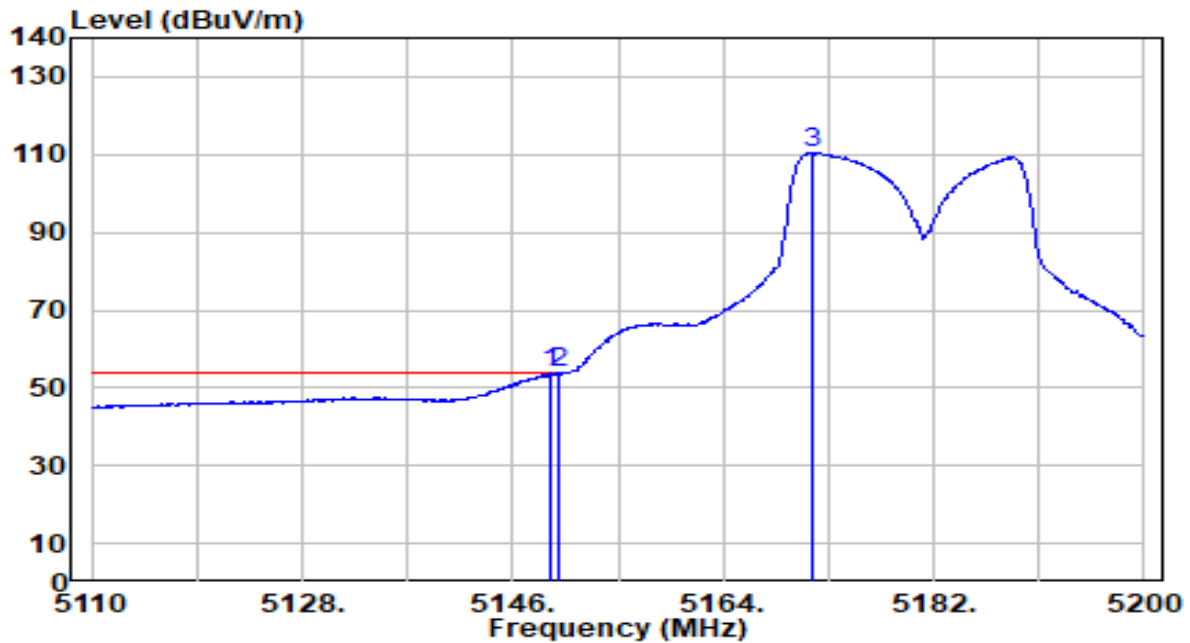


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.150	52.98	0.65	53.64	-0.36	54.00	150	359	Average
2	*	5150.000	53.15	0.65	53.81	-0.19	54.00	150	359	Average
3		5171.560	109.65	0.67	110.32	N/A	N/A	150	359	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

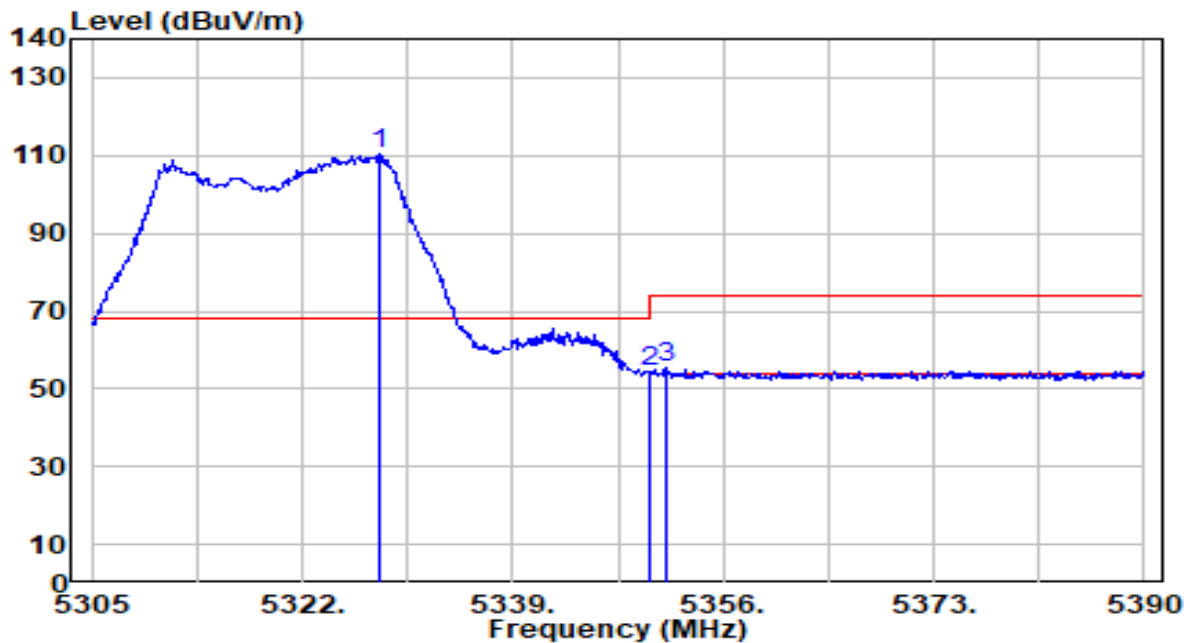


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.205	109.68	0.50	110.19	N/A	N/A	250	131	Peak
2	5350.000	54.08	0.47	54.56	-19.44	74.00	250	131	Peak
3	* 5351.495	54.81	0.47	55.28	-18.72	74.00	250	131	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

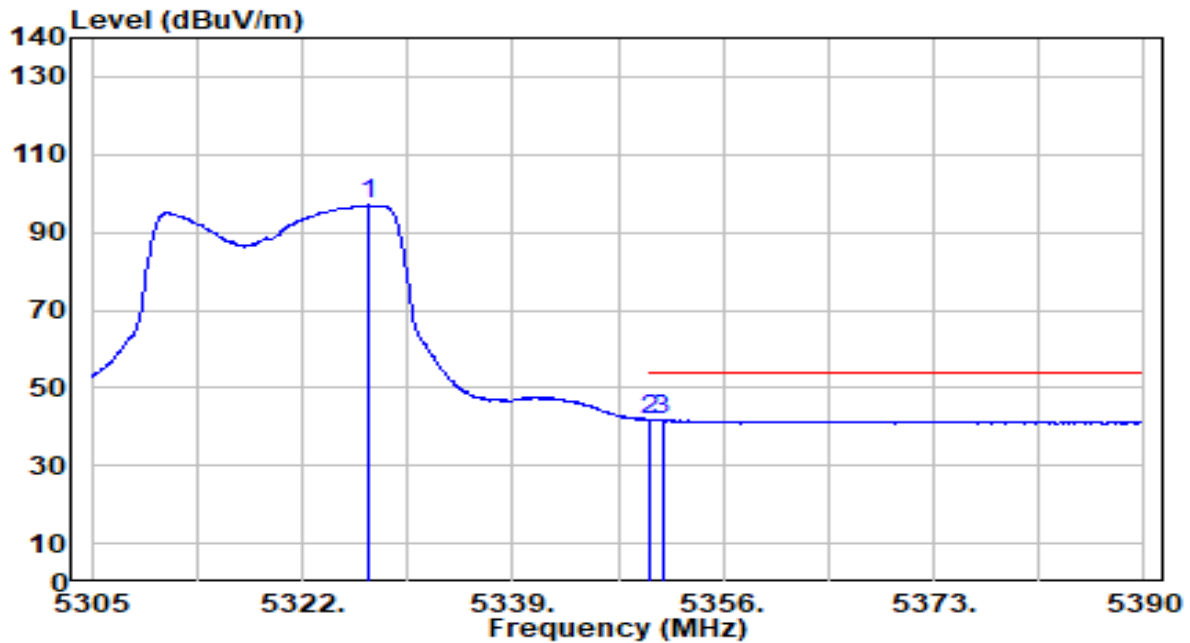


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5327.440	96.48	0.51	96.99	N/A	N/A	250	131	Average
2	5350.000	41.31	0.47	41.78	-12.22	54.00	250	131	Average
3	* 5351.070	41.35	0.47	41.82	-12.18	54.00	250	131	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

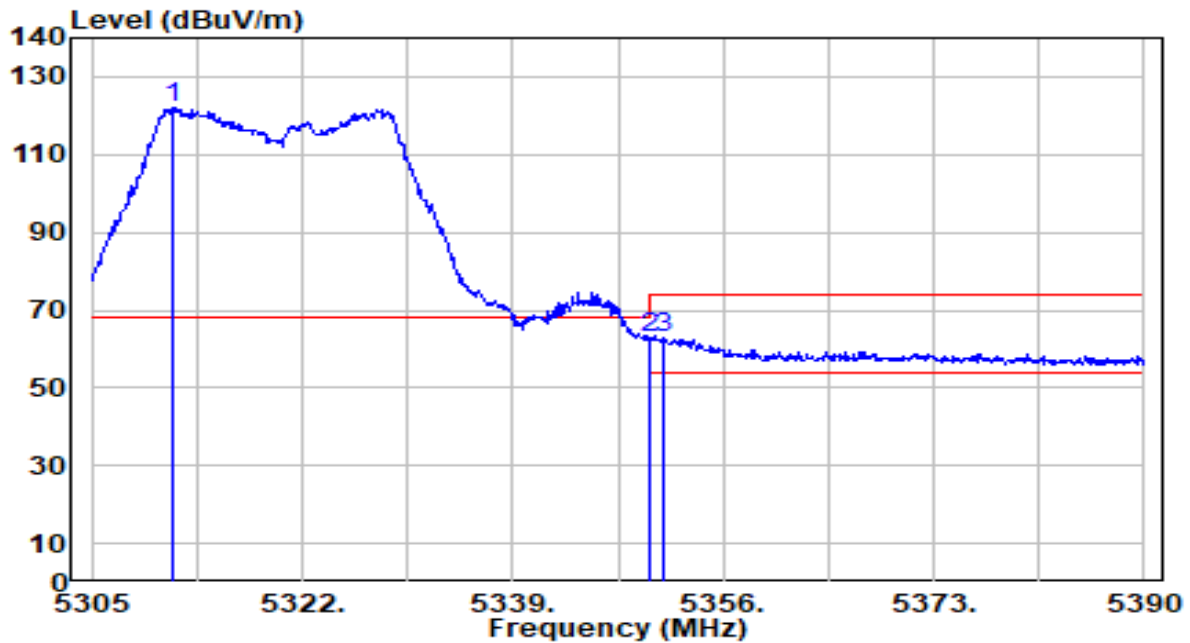


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.630	121.45	0.53	121.98	N/A	N/A	150	177	Peak
2	5350.000	62.46	0.47	62.94	-11.06	74.00	150	177	Peak
3	* 5351.240	62.59	0.47	63.06	-10.94	74.00	150	177	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By PoE

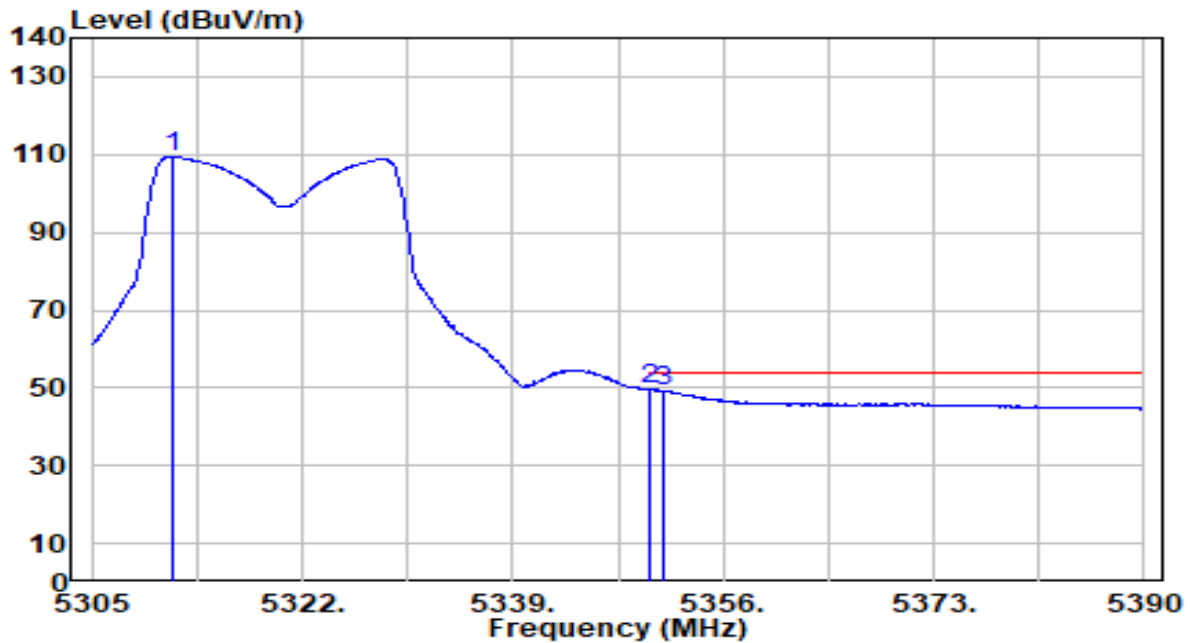


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5311.630	108.95	0.53	109.48	N/A	N/A	150	177	Average
2	*	5350.000	49.20	0.47	49.67	-4.33	54.00	150	177	Average
3		5351.155	48.81	0.47	49.27	-4.73	54.00	150	177	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

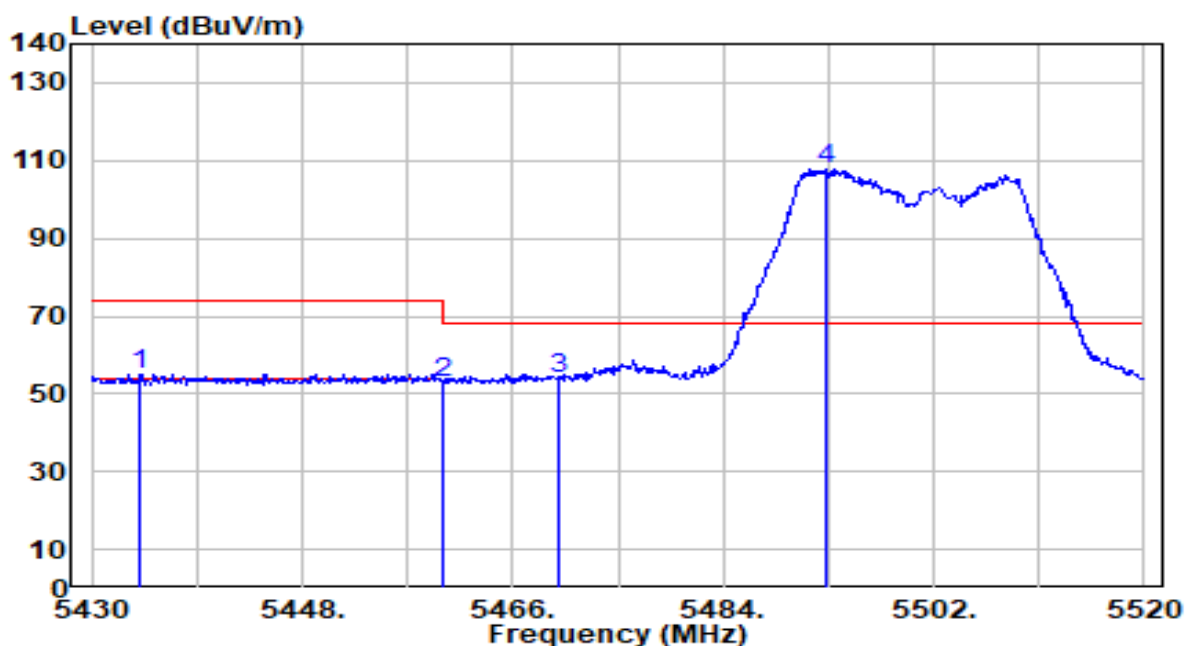


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5434.140	54.58	0.55	55.13	-18.87	74.00	110	155	Peak
2	5460.000	51.92	0.66	52.58	-21.42	74.00	110	155	Peak
3	* 5470.000	53.26	0.71	53.97	-14.23	68.20	110	155	Peak
4	5492.820	106.92	0.81	107.73	N/A	N/A	110	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

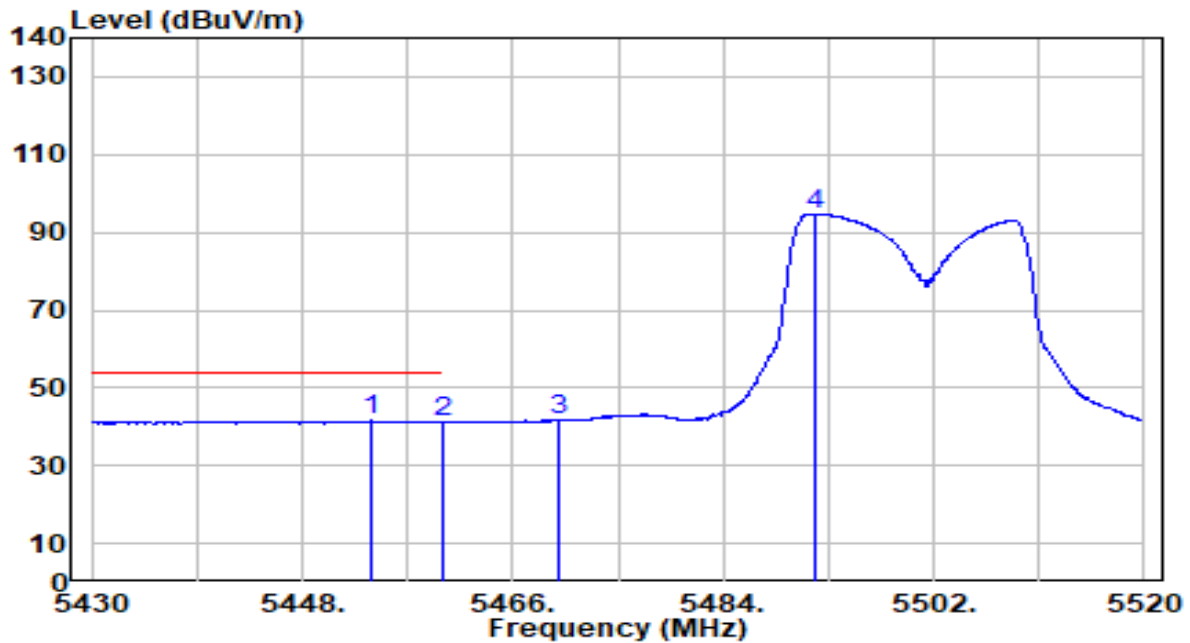


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5453.940	40.91	0.63	41.55	-12.45	54.00	110	155	Average
2		5460.000	40.54	0.66	41.20	-12.80	54.00	110	155	Average
3		5470.000	41.06	0.71	41.77	N/A	N/A	110	155	Average
4		5491.830	93.97	0.80	94.77	N/A	N/A	110	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

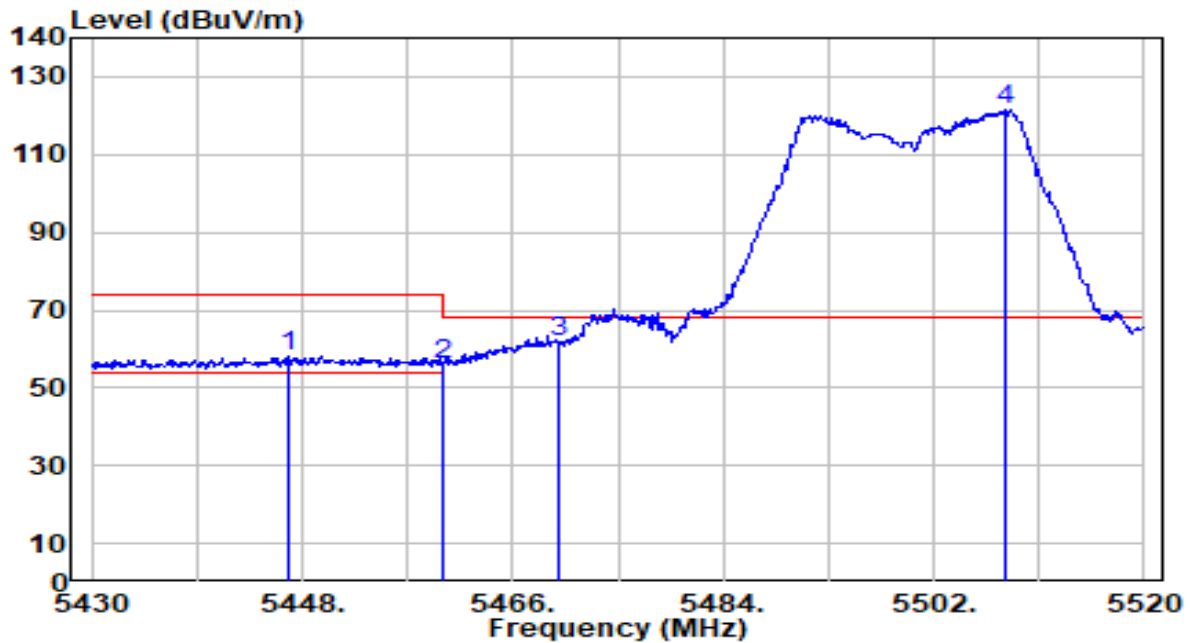


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5446.740	57.43	0.60	58.04	-15.96	74.00	150	176	Peak
2	5460.000	55.46	0.66	56.12	-17.88	74.00	150	176	Peak
3	* 5470.000	61.09	0.71	61.80	-6.40	68.20	150	176	Peak
4	5508.030	120.65	0.88	121.53	N/A	N/A	150	176	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	By PoE

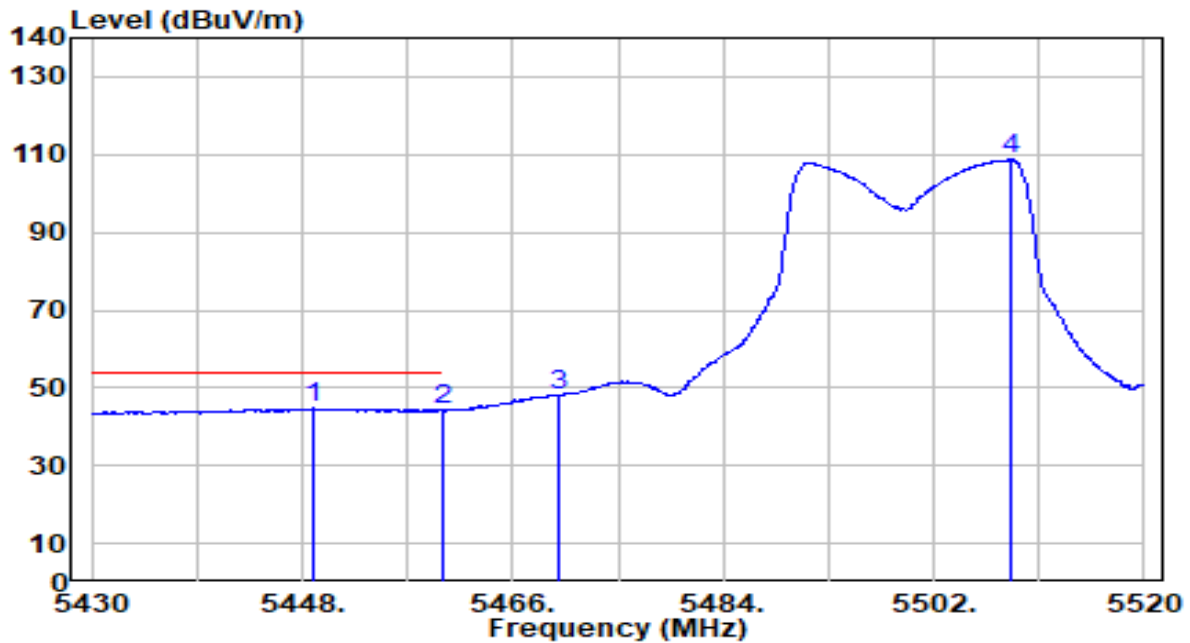


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5448.990	44.12	0.61	44.73	-9.27	54.00	150	176	Average
2		5460.000	43.50	0.66	44.17	-9.83	54.00	150	176	Average
3		5470.000	47.38	0.71	48.09	N/A	N/A	150	176	Average
4		5508.570	107.75	0.88	108.63	N/A	N/A	150	176	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	By PoE

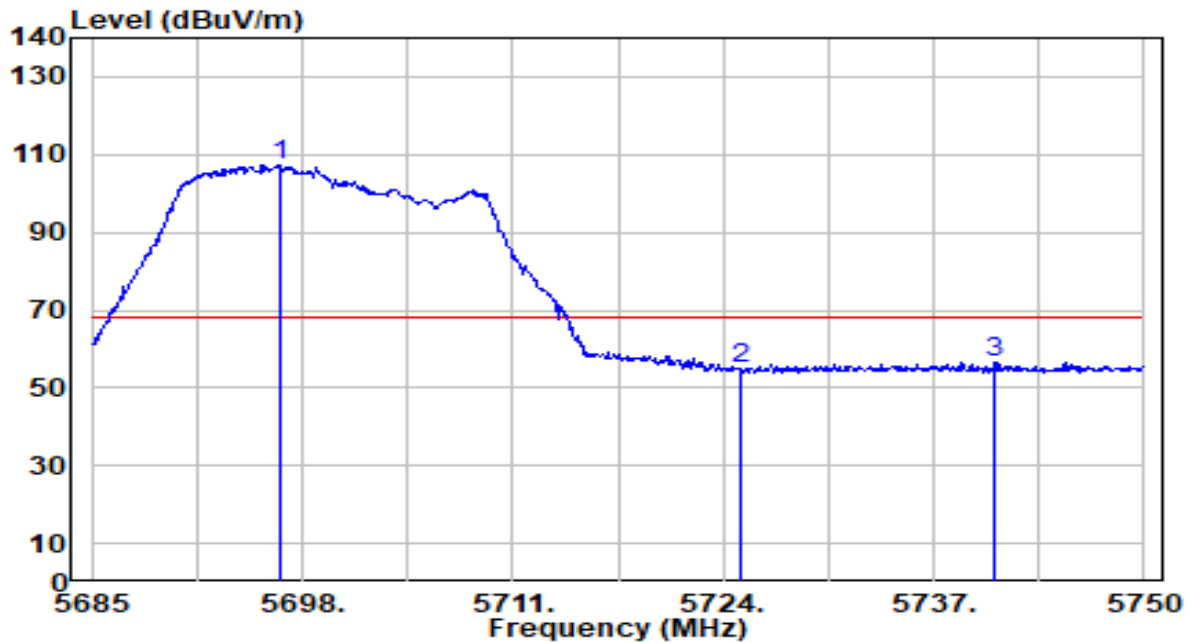


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5696.635	105.27	1.76	107.03	N/A	N/A	114	175	Peak
2	5725.000	52.98	1.89	54.87	-13.33	68.20	114	175	Peak
3	* 5740.770	54.67	1.97	56.64	-11.56	68.20	114	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	By PoE

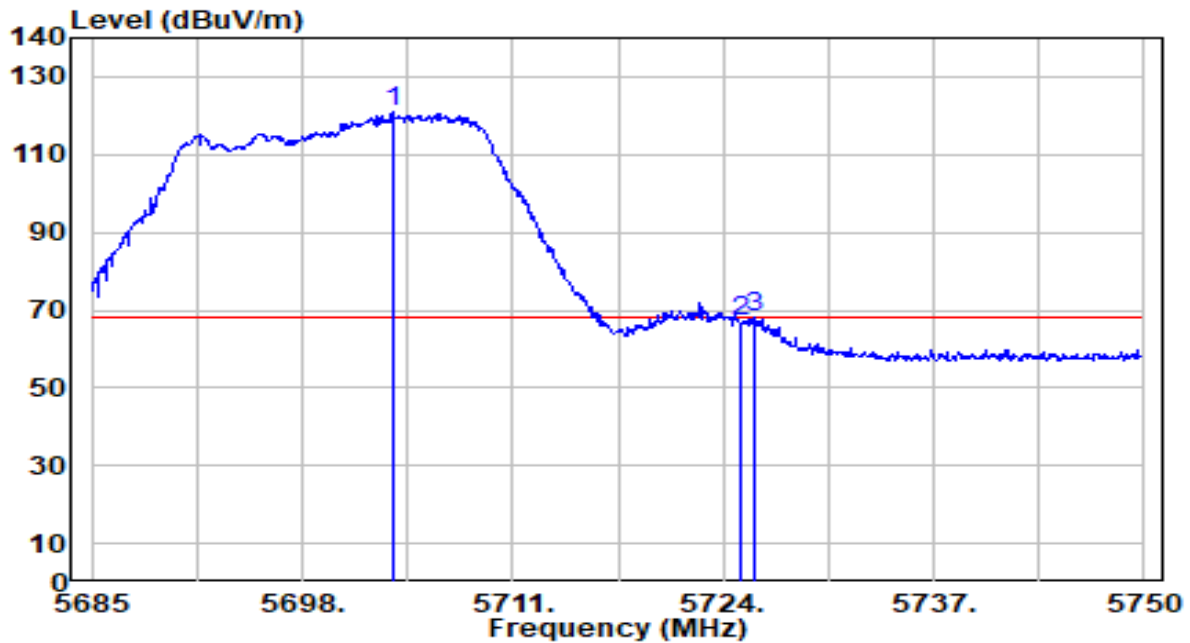


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5703.590	118.97	1.79	120.76	N/A	N/A	150	189	Peak
2	5725.000	65.11	1.89	67.00	-1.20	68.20	150	189	Peak
3	* 5725.885	66.16	1.90	68.06	-0.14	68.20	150	189	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	By PoE

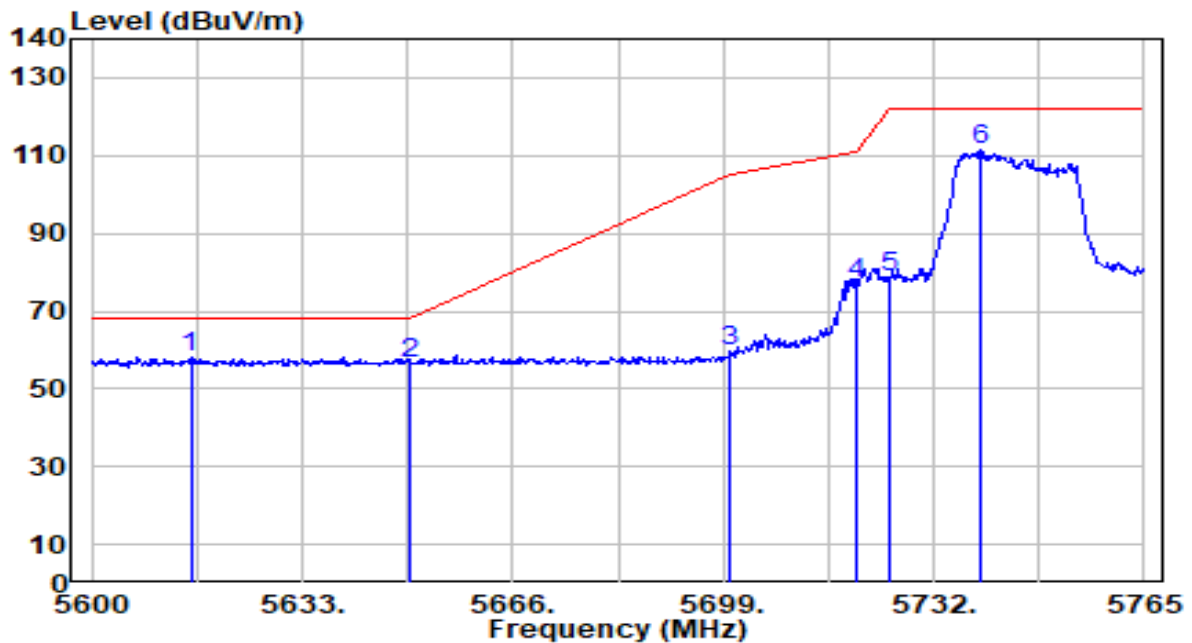


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5615.510	56.61	1.38	57.99	-10.21	68.20	100	176	Peak
2		5650.000	54.80	1.54	56.35	-11.85	68.20	100	176	Peak
3		5700.000	57.74	1.78	59.52	-45.68	105.20	100	176	Peak
4		5720.000	75.28	1.87	77.15	-33.65	110.80	100	176	Peak
5		5725.000	76.61	1.89	78.50	-43.70	122.20	100	176	Peak
6		5739.260	109.30	1.96	111.26	N/A	N/A	100	176	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	By PoE

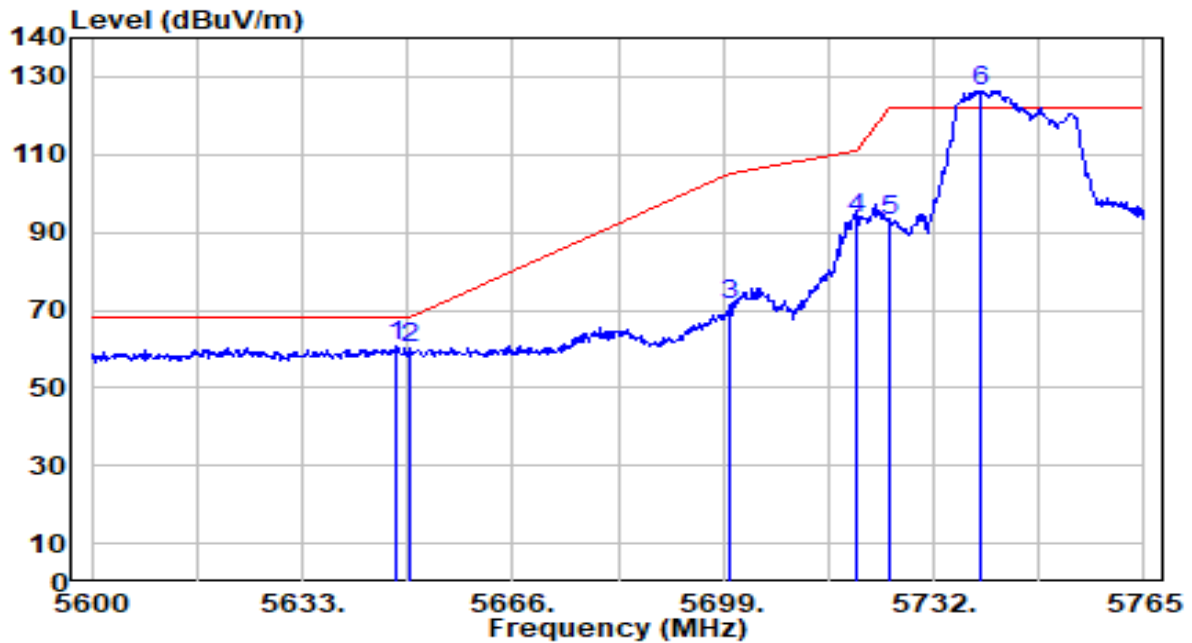


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.520	59.17	1.53	60.70	-7.50	68.20	150	184	Peak
2		5650.000	58.54	1.54	60.08	-8.12	68.20	150	184	Peak
3		5700.000	69.59	1.78	71.36	-33.84	105.20	150	184	Peak
4		5720.000	91.57	1.87	93.44	-17.36	110.80	150	184	Peak
5		5725.000	91.11	1.89	93.00	-29.20	122.20	150	184	Peak
6		5739.425	124.55	1.96	126.51	N/A	N/A	150	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	By PoE

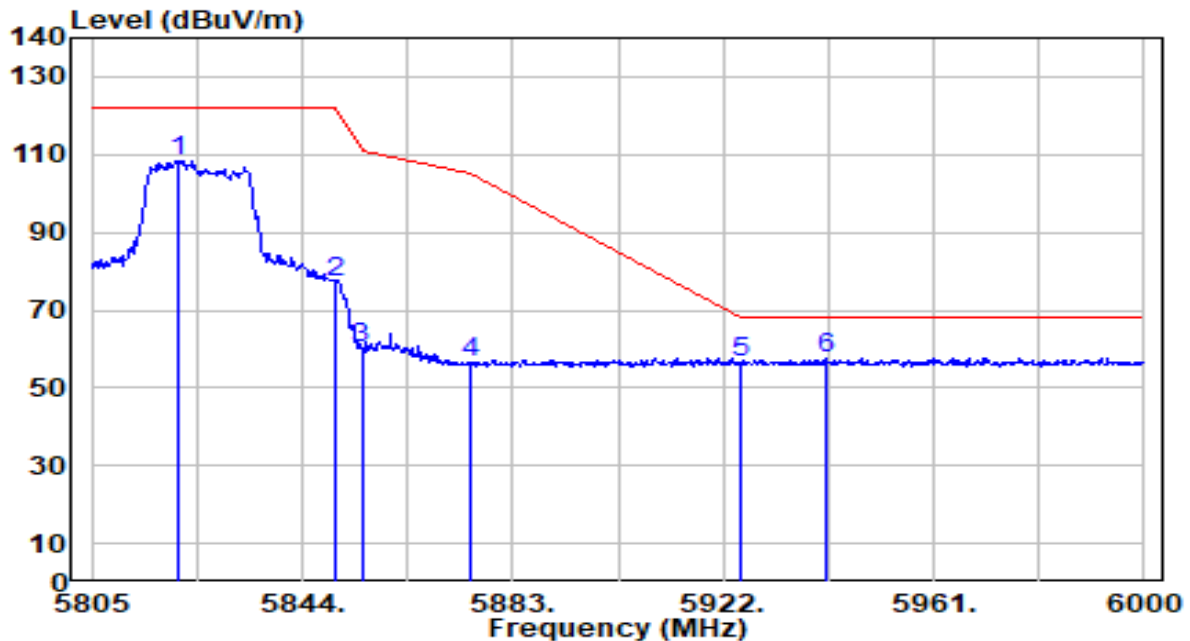


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5821.185	106.05	2.25	108.30	N/A	N/A	100	197	Peak
2	5850.000	74.68	2.25	76.93	-45.27	122.20	100	197	Peak
3	5855.000	58.06	2.25	60.32	-50.48	110.80	100	197	Peak
4	5875.000	54.27	2.26	56.53	-48.67	105.20	100	197	Peak
5	5925.000	54.17	2.27	56.44	-11.76	68.20	100	197	Peak
6	* 5940.915	55.42	2.27	57.69	-10.51	68.20	100	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	By PoE

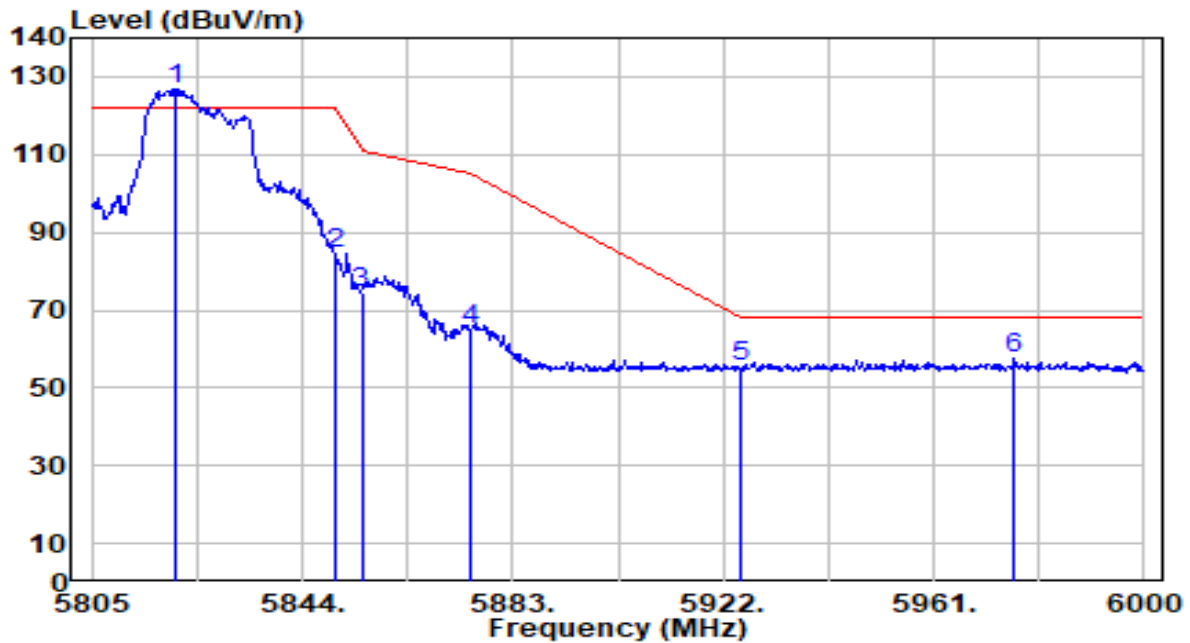


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5820.405	124.76	2.25	127.01	N/A	N/A	156	185	Peak
2	5850.000	82.52	2.25	84.78	-37.42	122.20	156	185	Peak
3	5855.000	72.40	2.25	74.65	-36.15	110.80	156	185	Peak
4	5875.000	62.96	2.26	65.22	-39.98	105.20	156	185	Peak
5	5925.000	53.21	2.27	55.48	-12.72	68.20	156	185	Peak
6	* 5976.015	55.14	2.28	57.42	-10.78	68.20	156	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By PoE

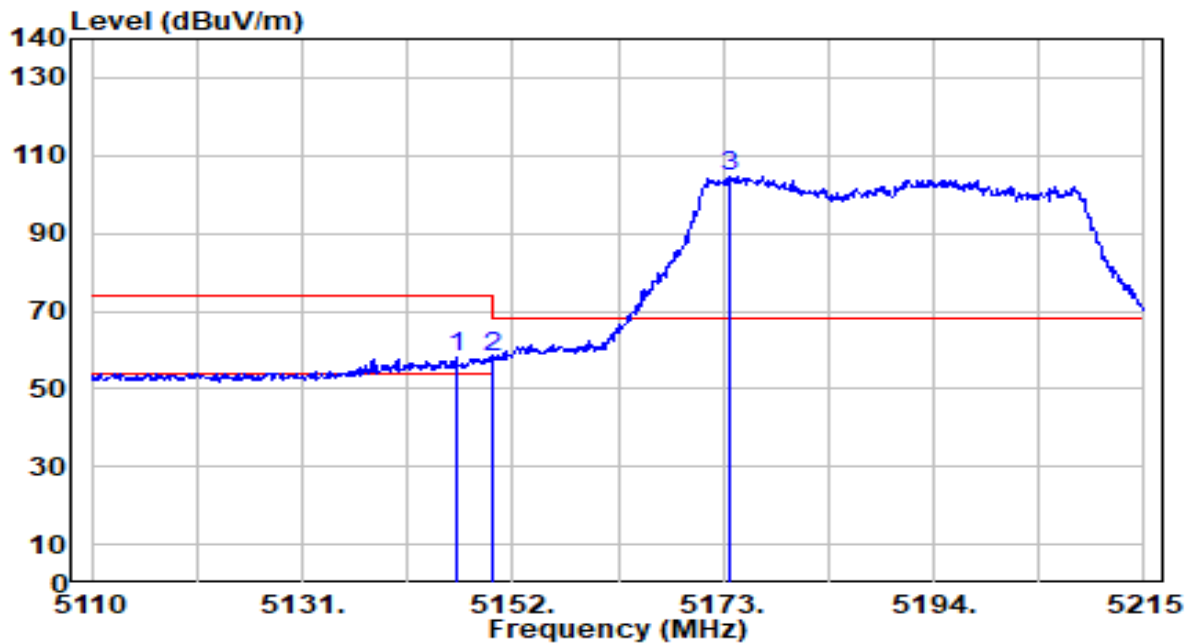


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5146.330	57.23	0.65	57.88	-16.12	74.00	300	152	Peak
2	*	5150.000	57.25	0.65	57.90	-16.10	74.00	300	152	Peak
3		5173.735	103.99	0.68	104.67	N/A	N/A	300	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By PoE

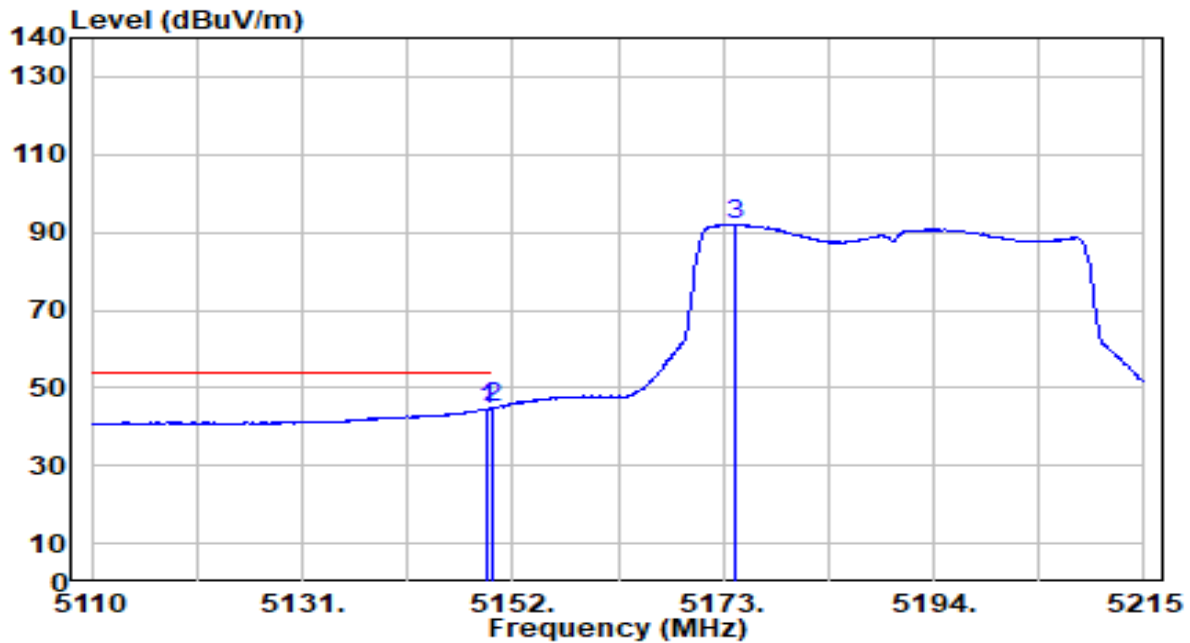


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.480	43.96	0.65	44.62	-9.38	54.00	300	152	Average
2	*	5150.000	44.18	0.65	44.83	-9.17	54.00	300	152	Average
3		5174.155	91.26	0.68	91.93	N/A	N/A	300	152	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By PoE

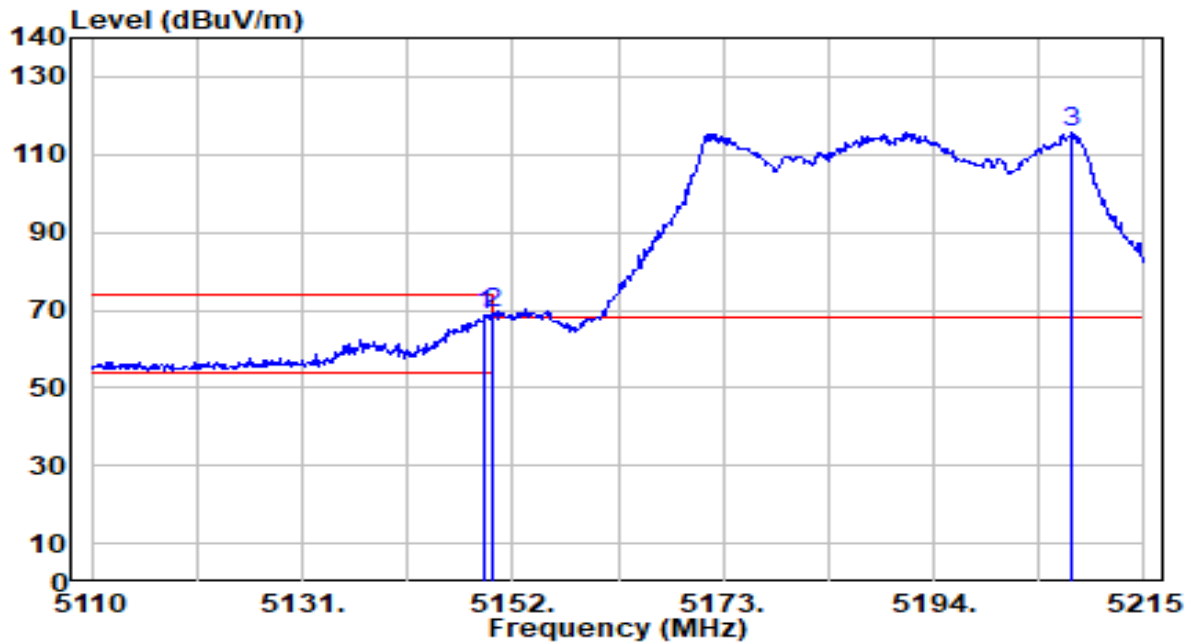


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.270	68.00	0.65	68.65	-5.35	74.00	150	352	Peak
2	*	5150.000	68.38	0.65	69.03	-4.97	74.00	150	352	Peak
3		5207.755	114.89	0.69	115.58	N/A	N/A	150	352	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By PoE

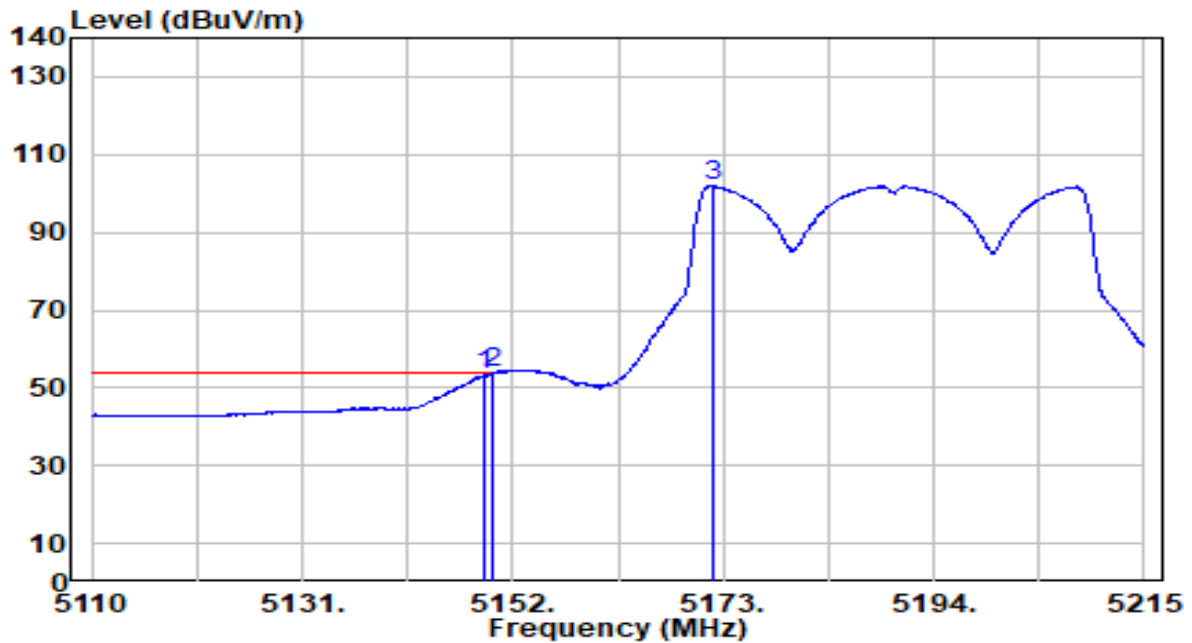


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.270	52.75	0.65	53.40	-0.60	54.00	150	352	Average
2	*	5150.000	53.16	0.65	53.81	-0.19	54.00	150	352	Average
3		5171.950	101.29	0.68	101.97	N/A	N/A	150	352	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

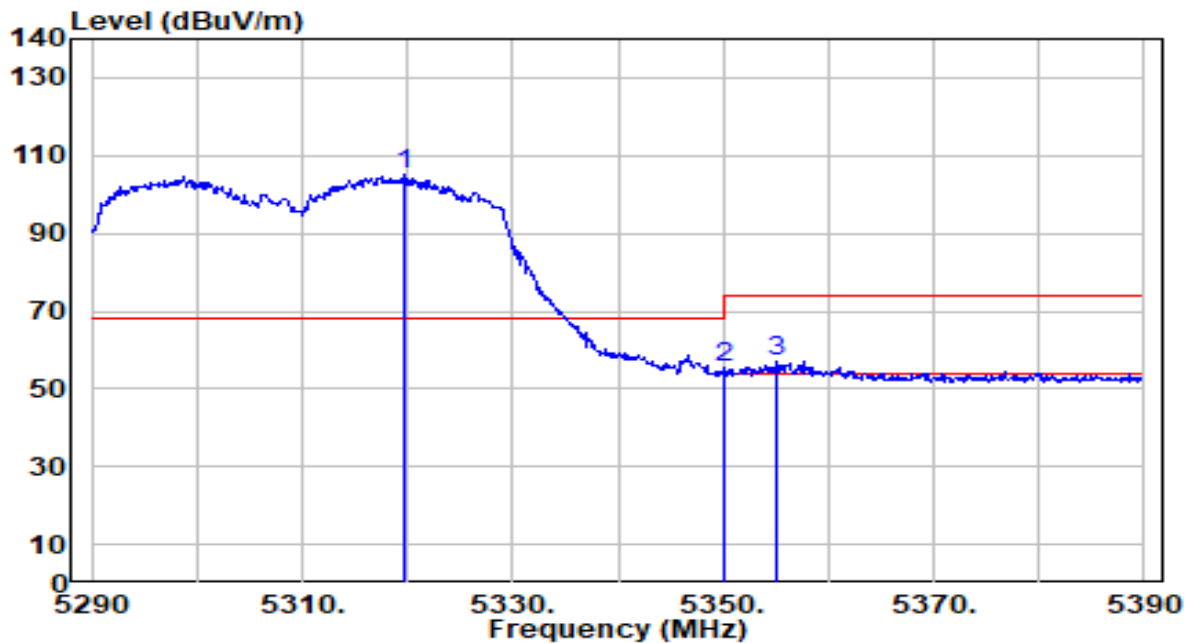


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.600	104.56	0.52	105.08	N/A	N/A	264	132	Peak
2	5350.000	54.96	0.47	55.44	-18.56	74.00	264	132	Peak
3	* 5355.100	56.52	0.46	56.98	-17.02	74.00	264	132	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

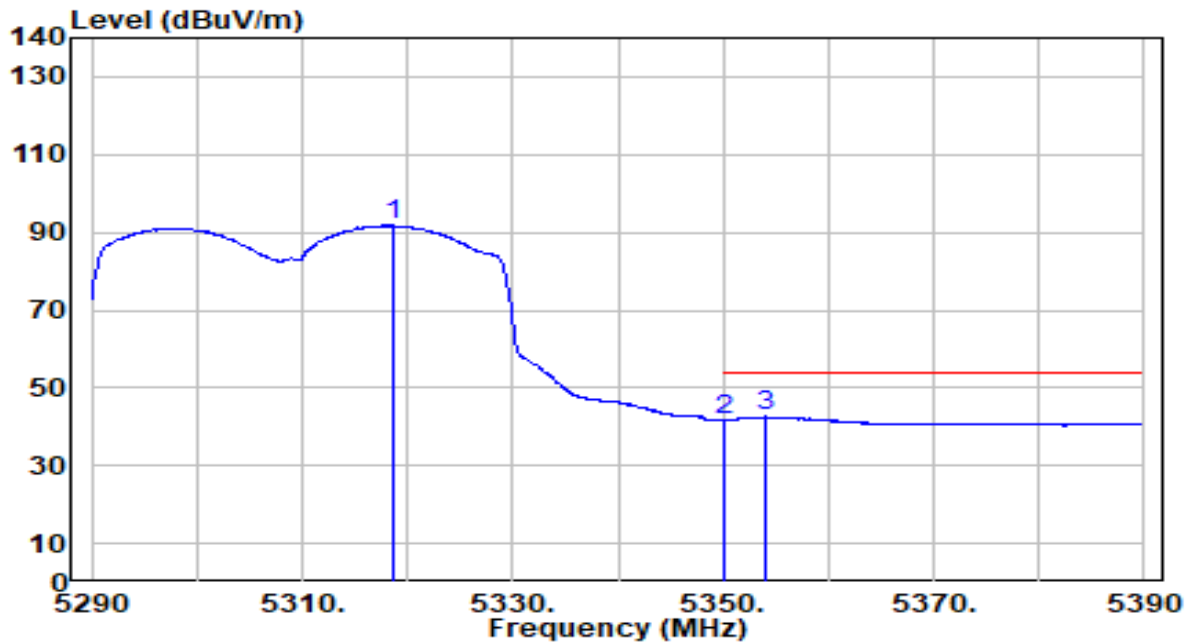


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.600	91.22	0.52	91.74	N/A	N/A	264	132	Average
2	5350.000	41.30	0.47	41.77	-12.23	54.00	264	132	Average
3	* 5354.100	42.09	0.46	42.56	-11.44	54.00	264	132	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

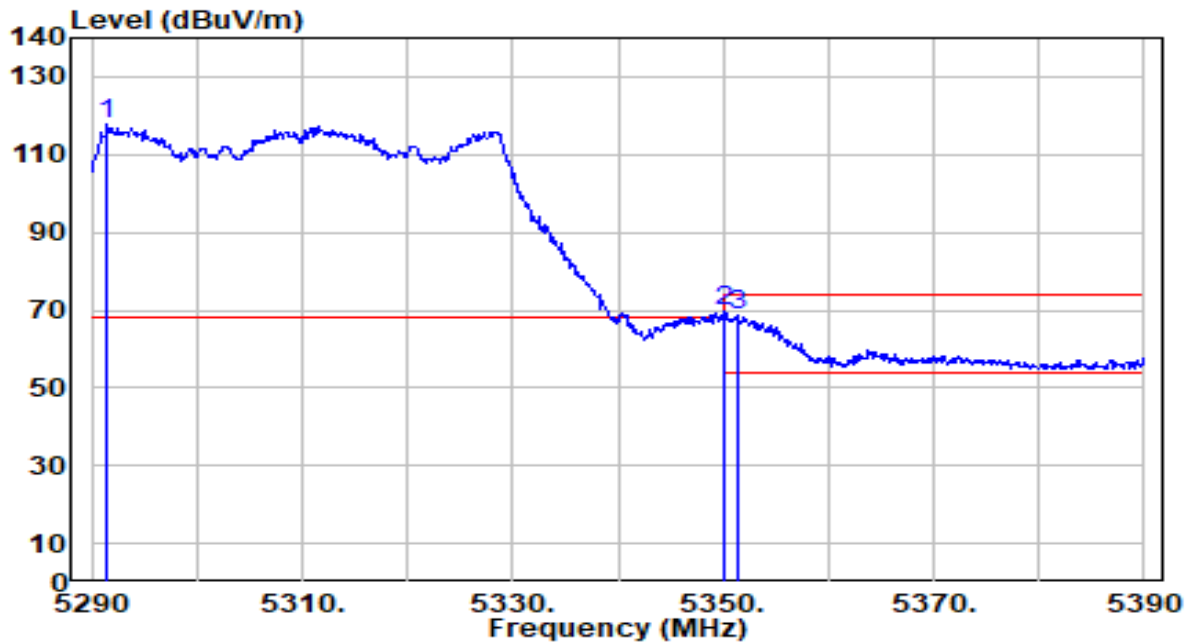


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5291.500	117.00	0.56	117.56	N/A	N/A	150	8	Peak
2	*	5350.000	69.25	0.47	69.72	-4.28	74.00	150	8	Peak
3		5351.500	68.19	0.47	68.66	-5.34	74.00	150	8	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By PoE

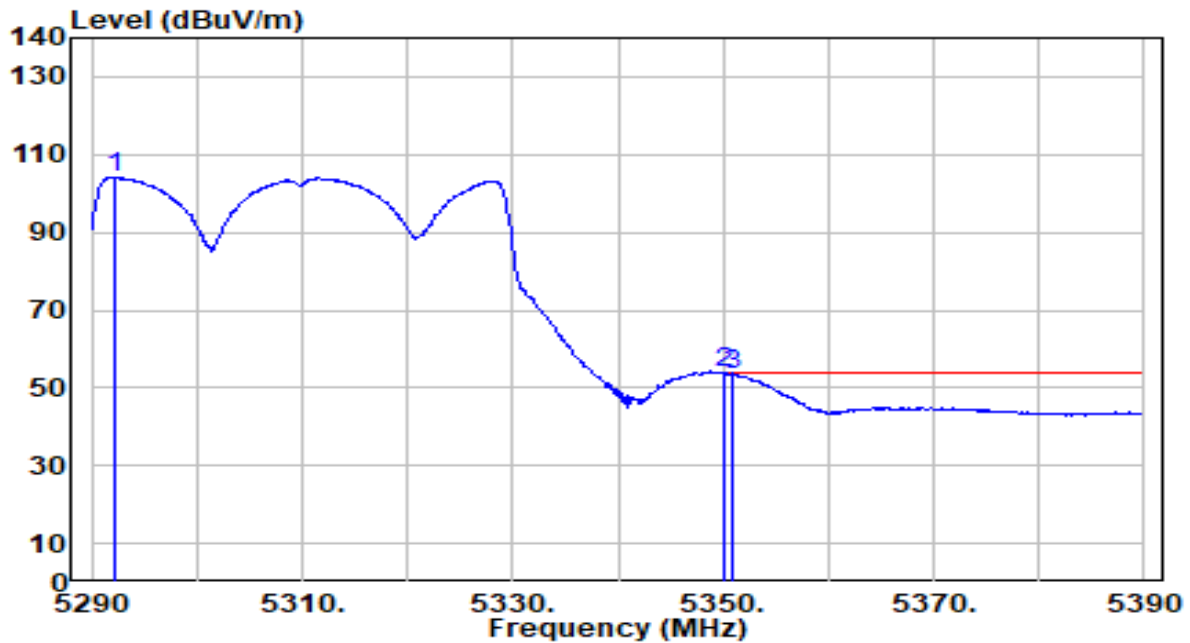


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5292.100	103.58	0.56	104.14	N/A	N/A	150	8	Average
2	*	5350.000	53.35	0.47	53.82	-0.18	54.00	150	8	Average
3		5351.000	52.93	0.47	53.40	-0.60	54.00	150	8	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

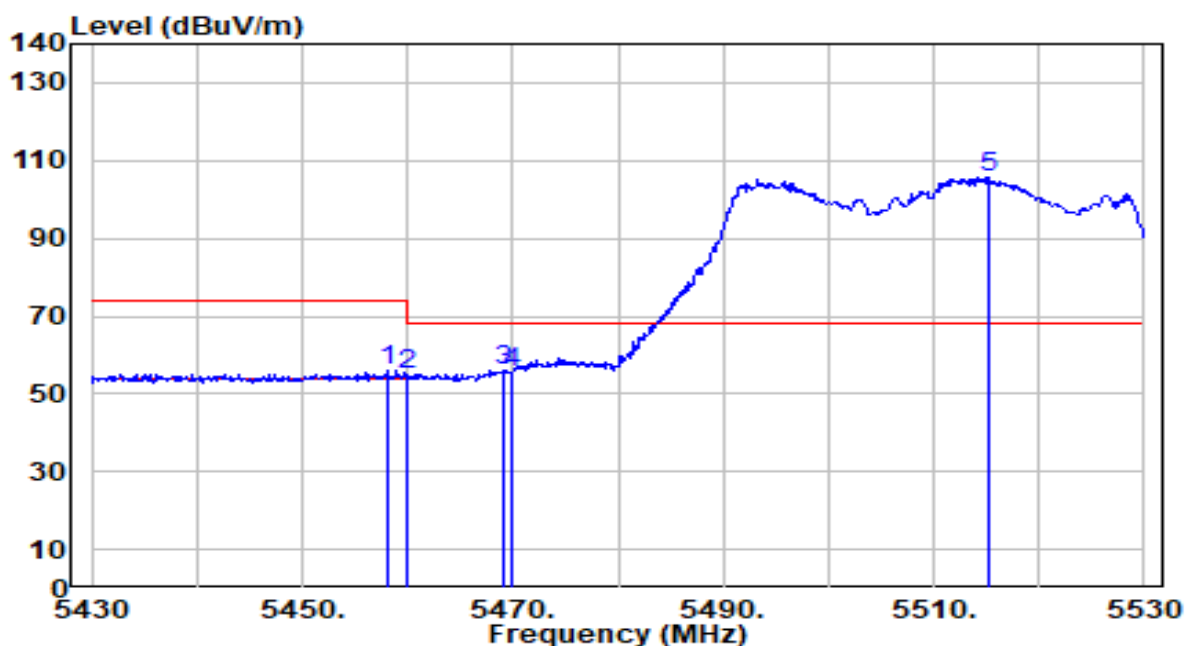


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.100	55.57	0.65	56.23	-17.77	74.00	122	166	Peak
2	5460.000	54.09	0.66	54.75	-19.25	74.00	122	166	Peak
3	* 5469.100	55.40	0.70	56.10	-12.10	68.20	122	166	Peak
4	5470.000	55.01	0.71	55.71	-12.49	68.20	122	166	Peak
5	5515.300	104.96	0.91	105.87	N/A	N/A	122	166	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

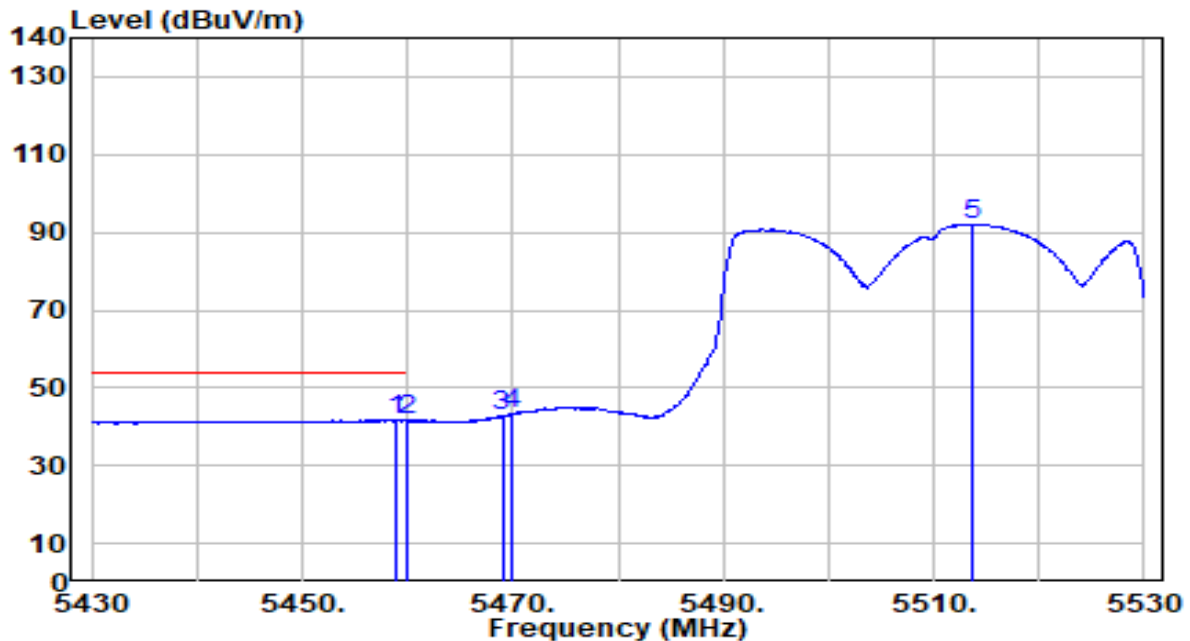


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.900	41.08	0.66	41.73	-12.27	54.00	122	166	Average
2		5460.000	40.91	0.66	41.57	-12.43	54.00	122	166	Average
3		5469.000	41.99	0.70	42.69	N/A	N/A	122	166	Average
4		5470.000	42.49	0.71	43.19	N/A	N/A	122	166	Average
5		5513.600	91.26	0.90	92.17	N/A	N/A	122	166	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

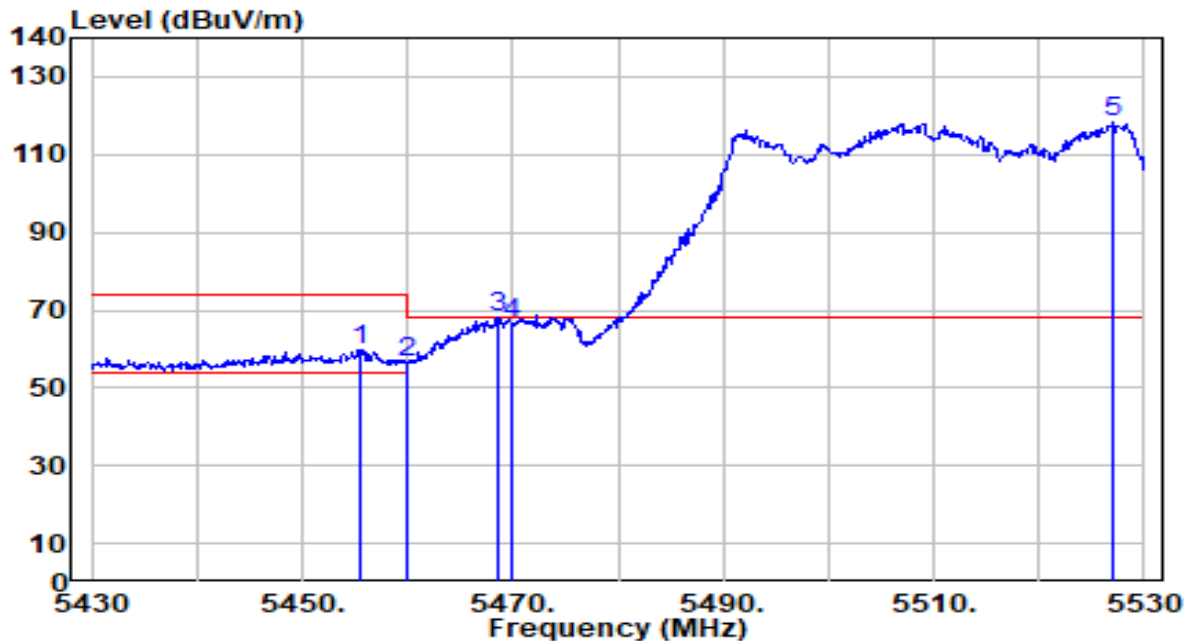


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.400	59.17	0.64	59.81	-14.19	74.00	150	184	Peak
2	5460.000	56.01	0.66	56.67	-17.33	74.00	150	184	Peak
3	* 5468.500	67.31	0.70	68.01	-0.19	68.20	150	184	Peak
4	5470.000	65.94	0.71	66.65	-1.55	68.20	150	184	Peak
5	5527.000	117.42	0.97	118.38	N/A	N/A	150	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	By PoE

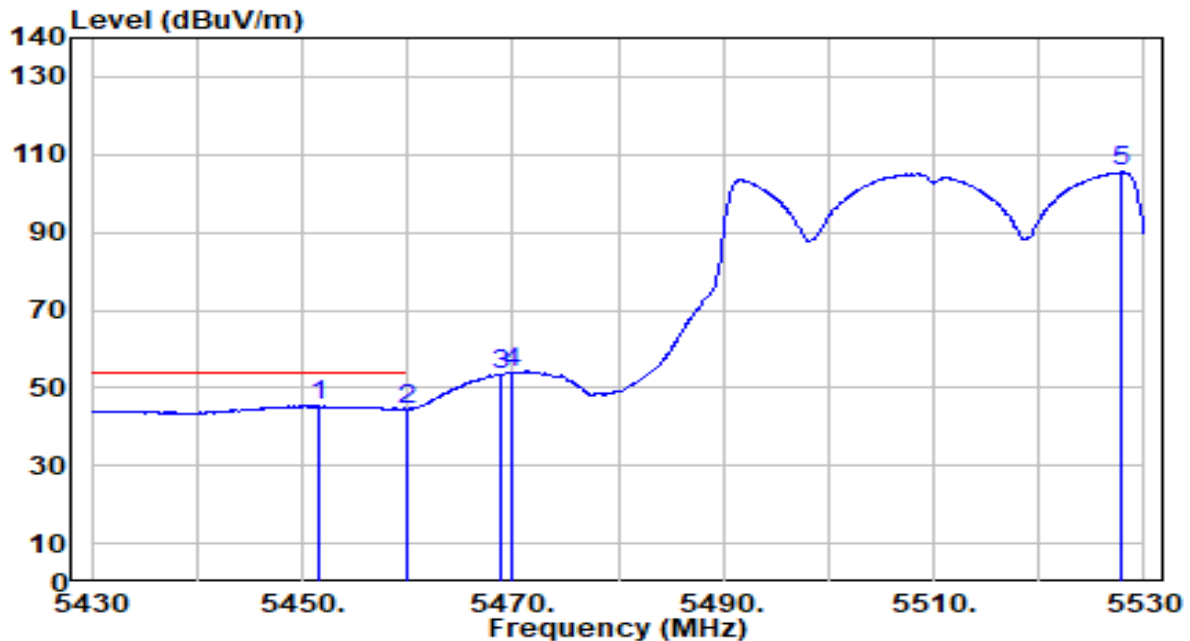


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5451.700	44.70	0.62	45.33	-8.67	54.00	150	184	Average
2		5460.000	43.96	0.66	44.62	-9.38	54.00	150	184	Average
3		5468.800	52.91	0.70	53.62	N/A	N/A	150	184	Average
4		5470.000	53.02	0.71	53.73	N/A	N/A	150	184	Average
5		5527.900	104.48	0.97	105.45	N/A	N/A	150	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	By PoE

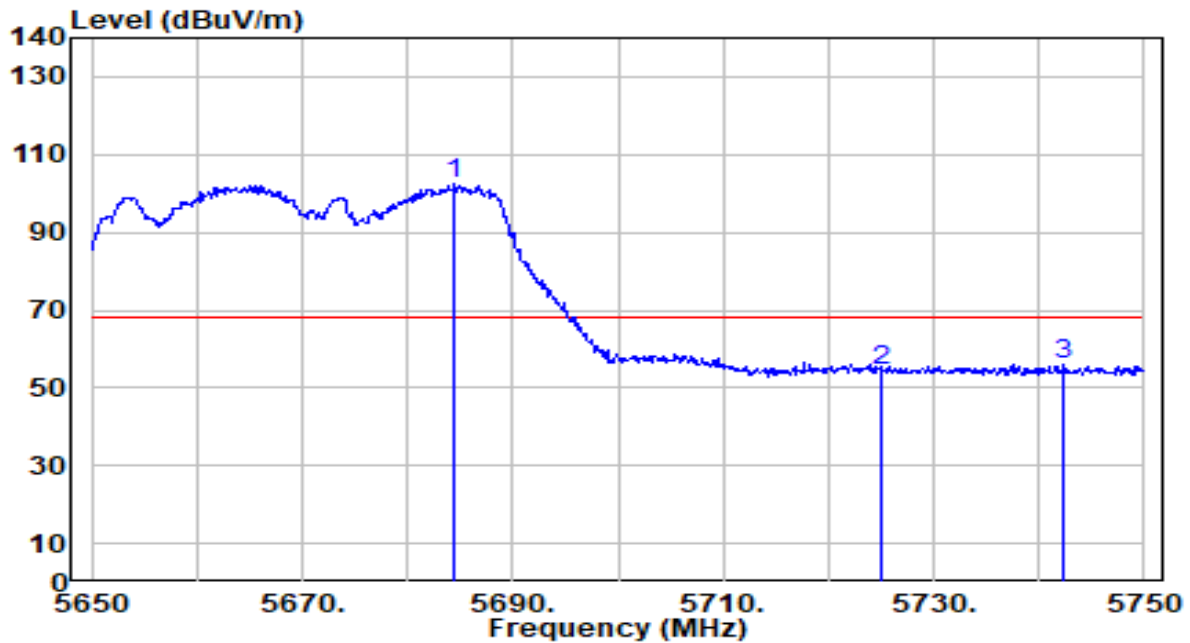


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5684.400	100.88	1.70	102.58	N/A	N/A	118	174	Peak
2	5725.000	52.76	1.89	54.65	-13.55	68.20	118	174	Peak
3	* 5742.400	54.24	1.97	56.21	-11.99	68.20	118	174	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	By PoE

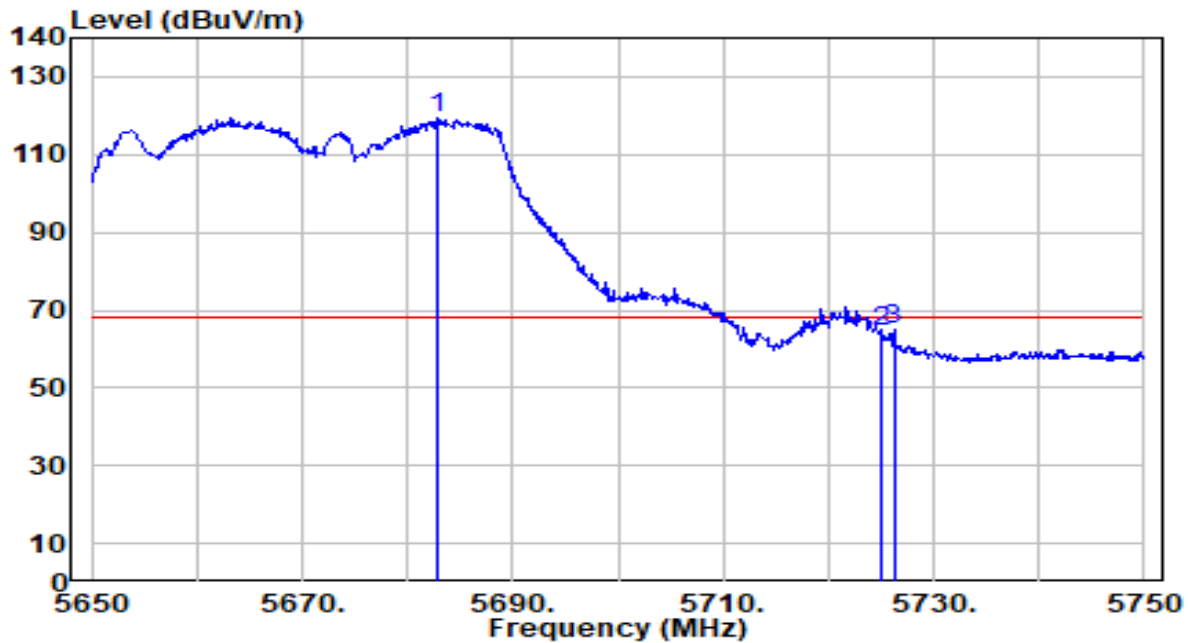


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5682.800	117.49	1.70	119.19	N/A	N/A	150	180	Peak
2	5725.000	62.34	1.89	64.23	-3.97	68.20	150	180	Peak
3	* 5726.200	63.05	1.90	64.95	-3.25	68.20	150	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	By PoE

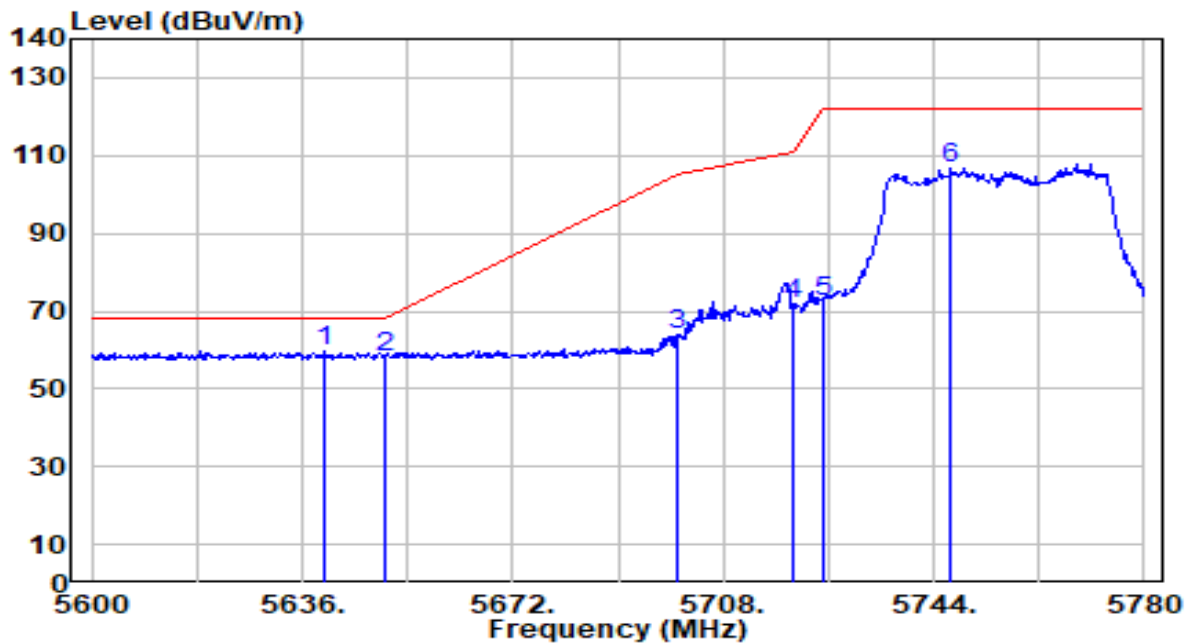


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5639.780	58.34	1.49	59.84	-8.36	68.20	100	174	Peak
2		5650.000	56.76	1.54	58.31	-9.89	68.20	100	174	Peak
3		5700.000	62.24	1.78	64.02	-41.18	105.20	100	174	Peak
4		5720.000	70.05	1.87	71.92	-38.88	110.80	100	174	Peak
5		5725.000	70.34	1.89	72.23	-49.97	122.20	100	174	Peak
6		5746.880	104.86	2.00	106.86	N/A	N/A	100	174	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	By PoE

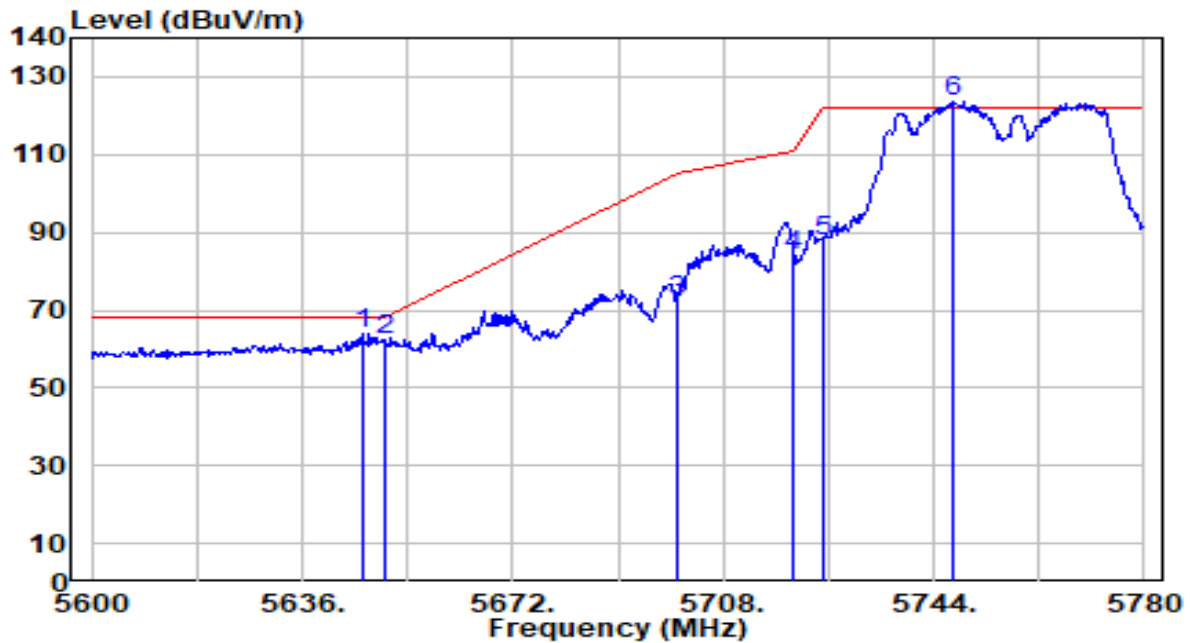


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.260	62.49	1.52	64.02	-4.18	68.20	159	182	Peak
2		5650.000	60.56	1.54	62.11	-6.09	68.20	159	182	Peak
3		5700.000	70.82	1.78	72.59	-32.61	105.20	159	182	Peak
4		5720.000	81.97	1.87	83.84	-26.96	110.80	159	182	Peak
5		5725.000	85.98	1.89	87.87	-34.33	122.20	159	182	Peak
6		5747.240	121.66	2.00	123.65	N/A	N/A	159	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	By PoE

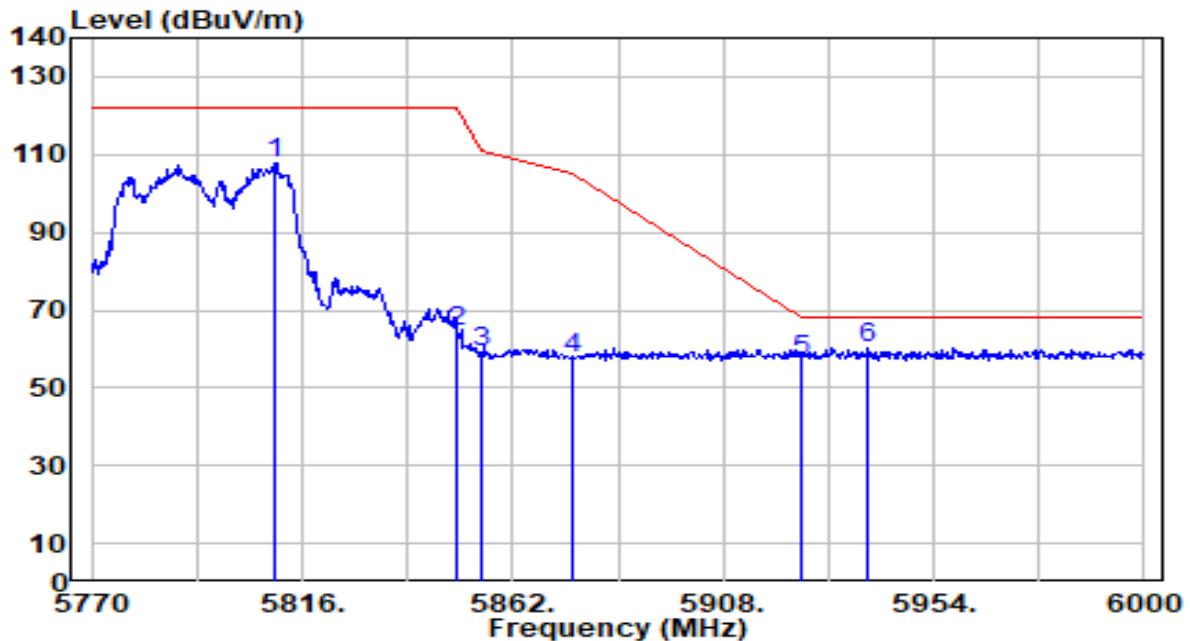


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5810.250	105.47	2.25	107.72	N/A	N/A	100	176	Peak
2	5850.000	62.29	2.25	64.54	-57.66	122.20	100	176	Peak
3	5855.000	56.77	2.25	59.02	-51.78	110.80	100	176	Peak
4	5875.000	55.10	2.26	57.36	-47.84	105.20	100	176	Peak
5	5925.000	54.90	2.27	57.16	-11.04	68.20	100	176	Peak
6	* 5939.740	58.21	2.27	60.48	-7.72	68.20	100	176	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	By PoE

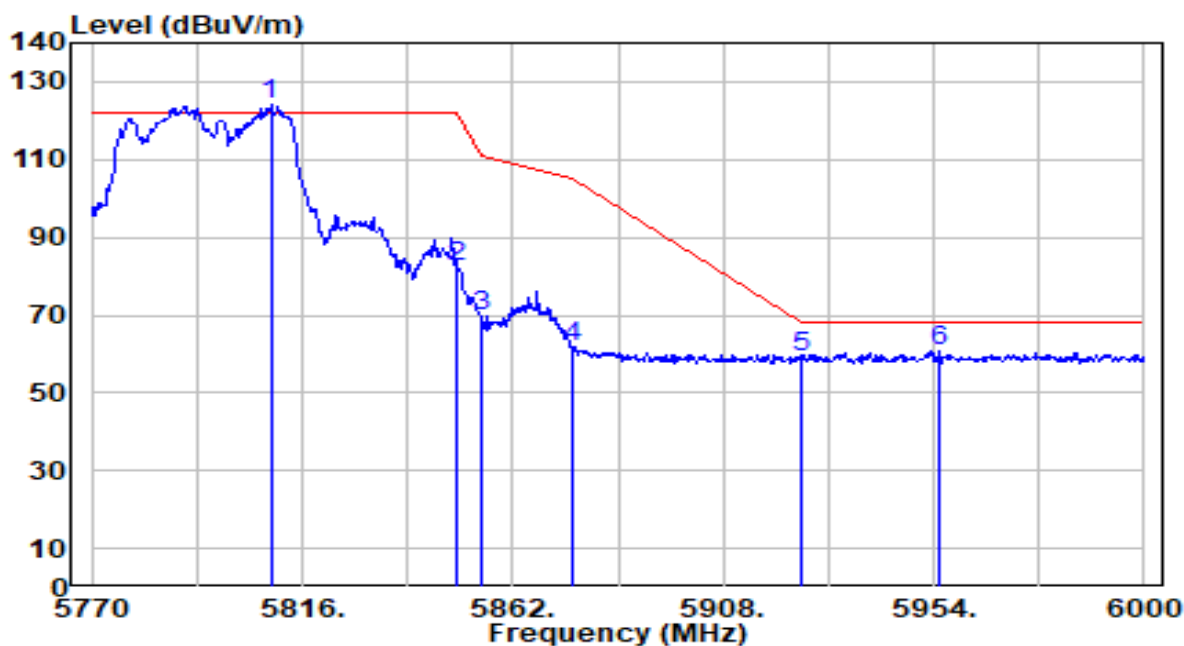


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5809.100	121.85	2.25	124.10	N/A	N/A	163	184	Peak
2	5850.000	80.42	2.25	82.67	-39.53	122.20	163	184	Peak
3	5855.000	67.52	2.25	69.78	-41.02	110.80	163	184	Peak
4	5875.000	59.76	2.26	62.02	-43.18	105.20	163	184	Peak
5	5925.000	56.77	2.27	59.04	-9.16	68.20	163	184	Peak
6	* 5955.150	58.71	2.27	60.98	-7.22	68.20	163	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

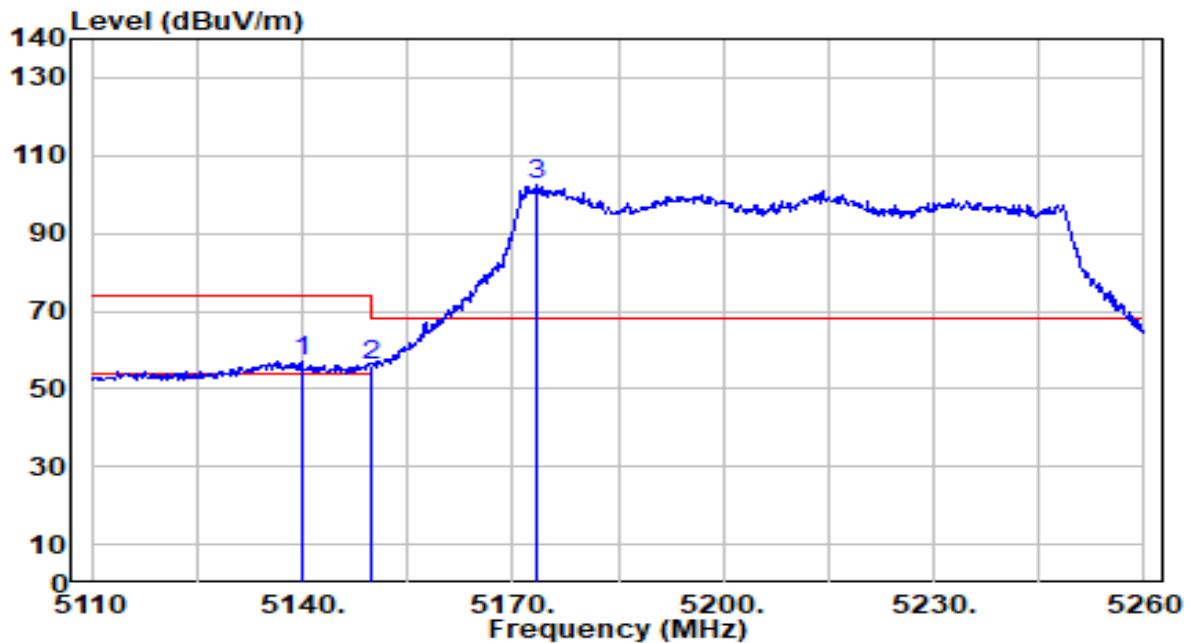


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5139.850	56.27	0.64	56.92	-17.08	74.00	293	152	Peak
2		5150.000	55.14	0.65	55.79	-18.21	74.00	293	152	Peak
3		5173.300	101.88	0.68	102.55	N/A	N/A	293	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

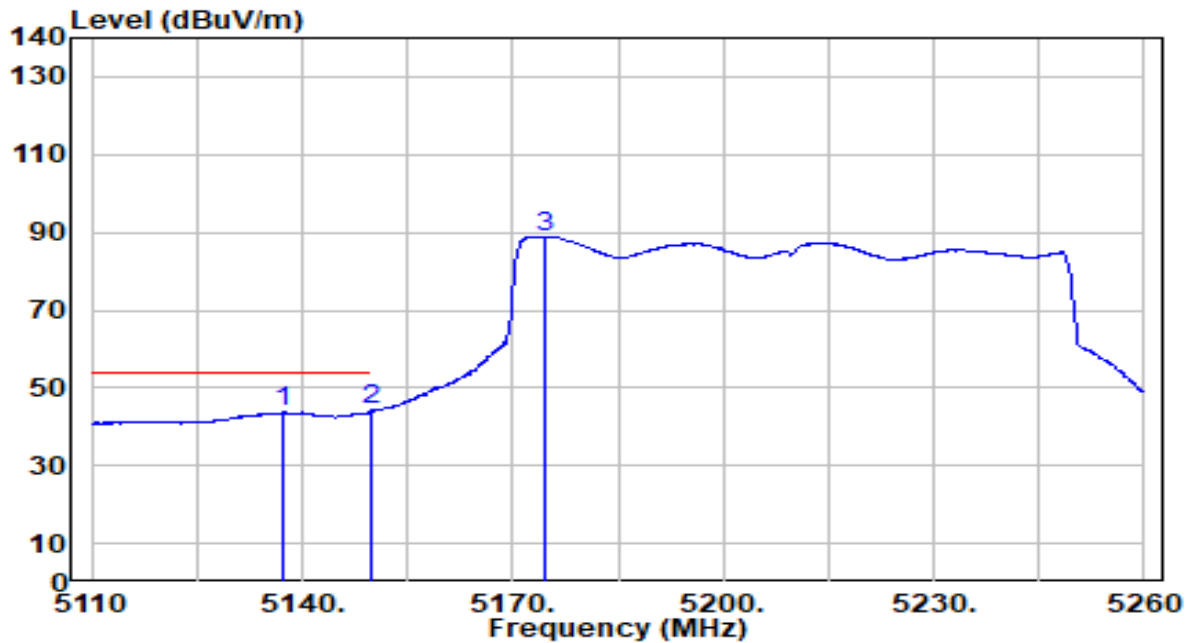


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5137.450	43.25	0.64	43.89	-10.11	54.00	293	152	Average
2	*	5150.000	43.51	0.65	44.17	-9.83	54.00	293	152	Average
3		5174.650	88.26	0.68	88.94	N/A	N/A	293	152	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

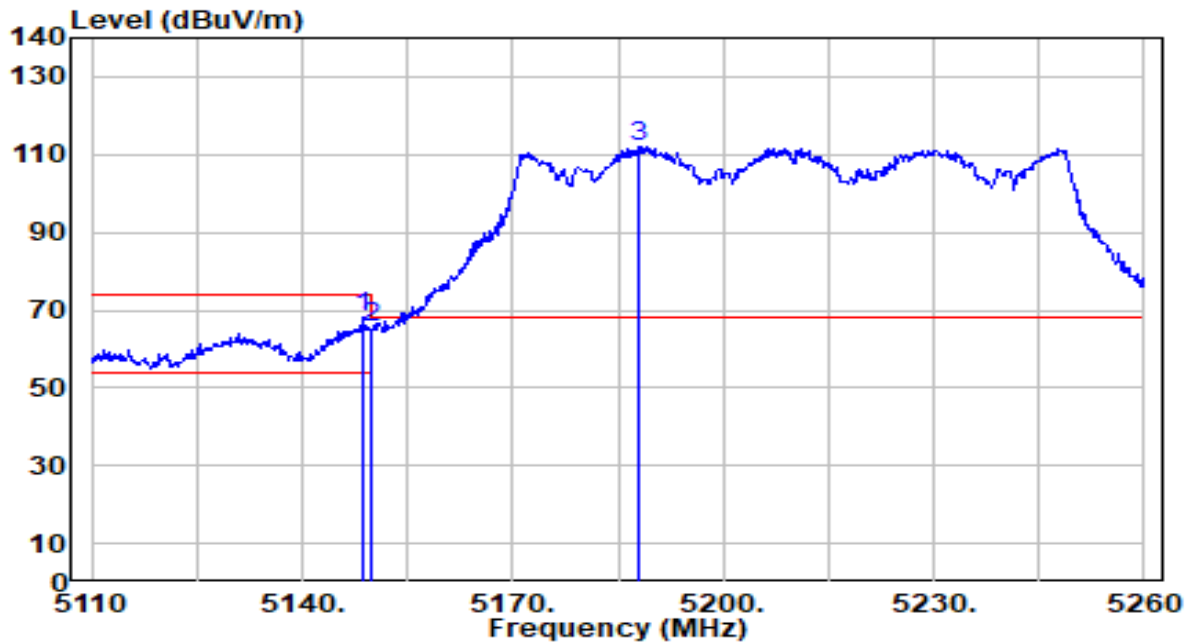


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.700	67.28	0.65	67.93	-6.07	74.00	150	353	Peak
2		5150.000	64.83	0.65	65.49	-8.51	74.00	150	353	Peak
3		5187.850	111.34	0.69	112.03	N/A	N/A	150	353	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By PoE

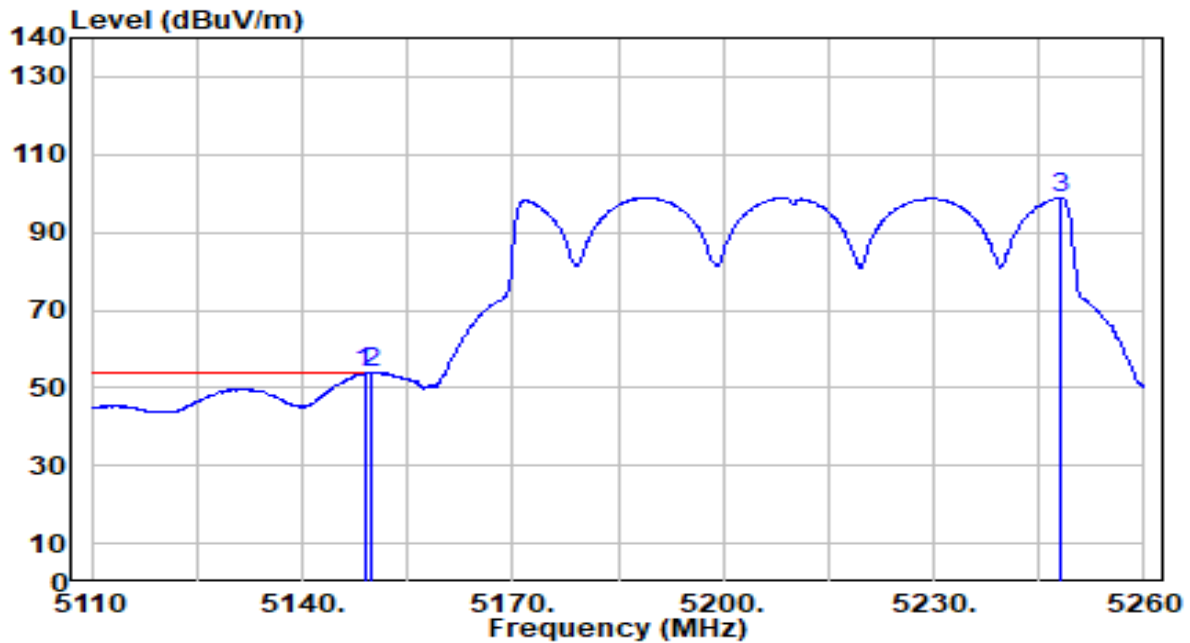


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.850	53.17	0.65	53.82	-0.18	54.00	150	353	Average
2		5150.000	53.14	0.65	53.79	-0.21	54.00	150	353	Average
3		5248.000	98.38	0.63	99.00	N/A	N/A	150	353	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

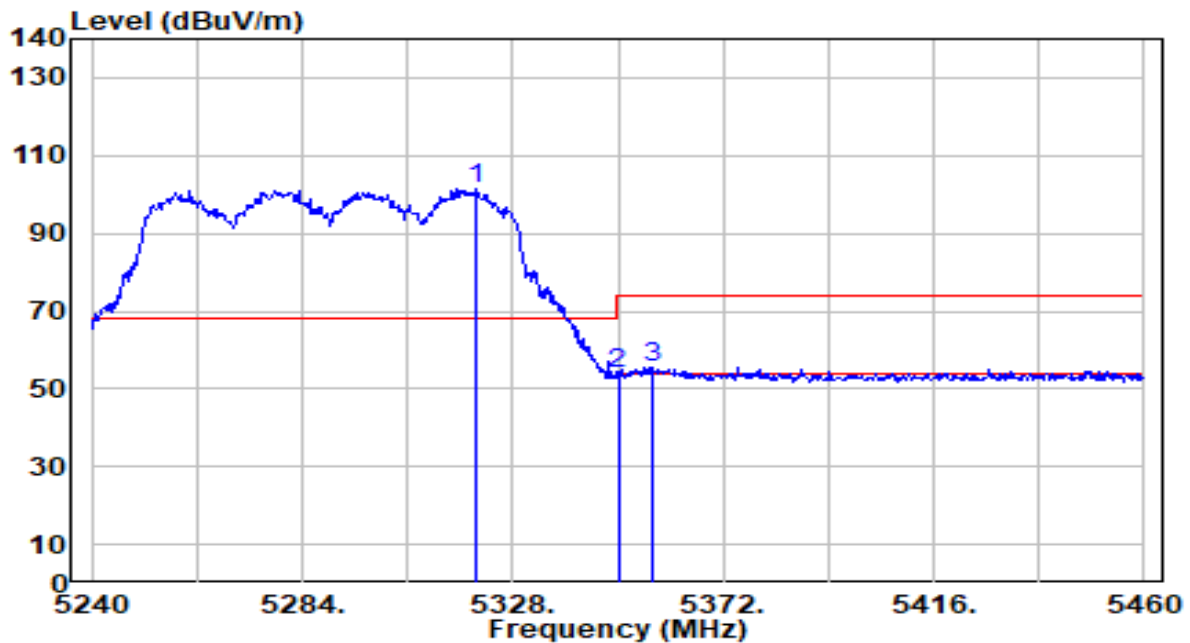


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.300	100.90	0.52	101.41	N/A	N/A	263	132	Peak
2	5350.000	53.50	0.47	53.98	-20.02	74.00	263	132	Peak
3	* 5357.260	54.93	0.46	55.39	-18.61	74.00	263	132	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

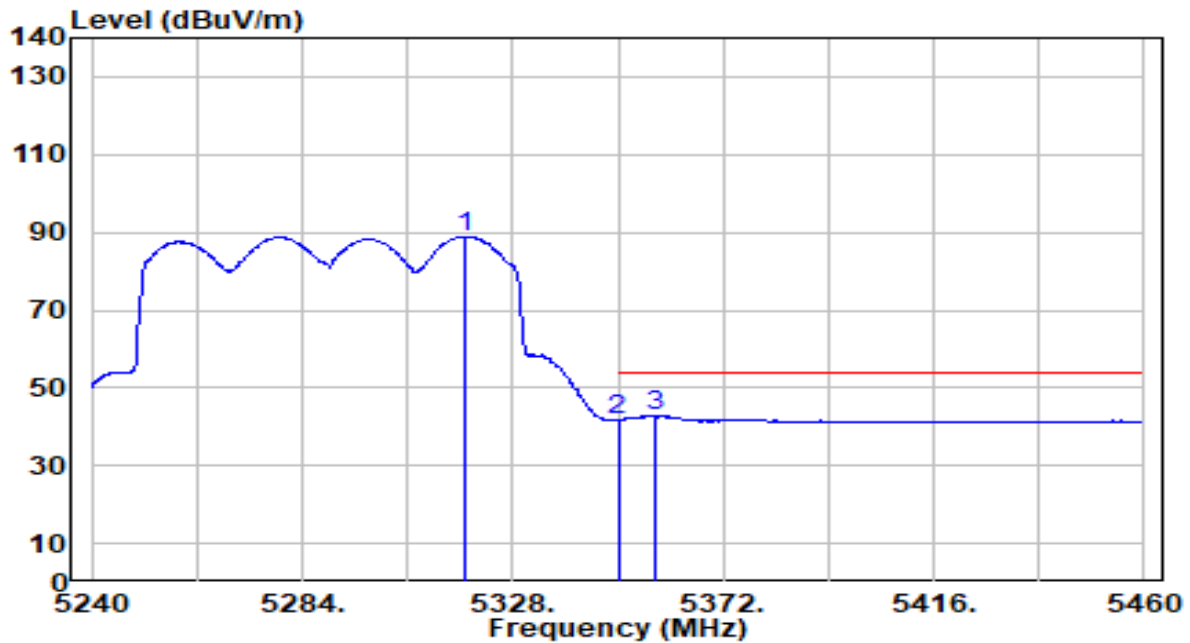


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.100	88.48	0.52	89.00	N/A	N/A	263	132	Average
2	5350.000	41.14	0.47	41.61	-12.39	54.00	263	132	Average
3	* 5357.700	42.37	0.46	42.83	-11.17	54.00	263	132	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

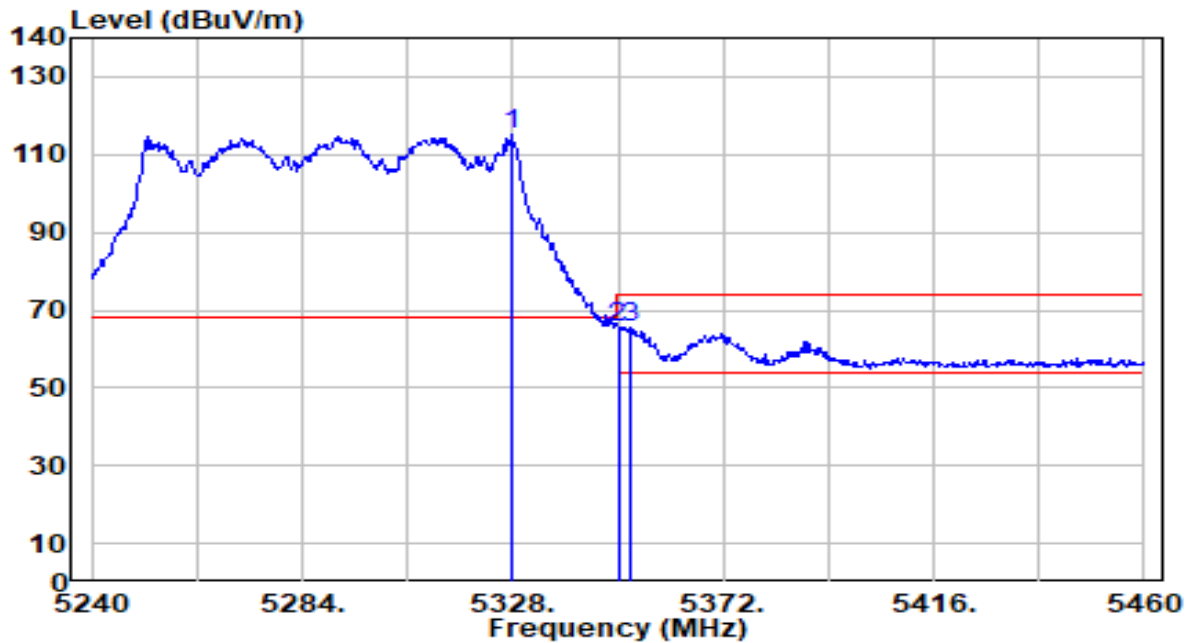


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5327.560	114.49	0.51	114.99	N/A	N/A	150	8	Peak
2	5350.000	65.14	0.47	65.61	-8.39	74.00	150	8	Peak
3	* 5352.420	65.17	0.47	65.63	-8.37	74.00	150	8	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By PoE

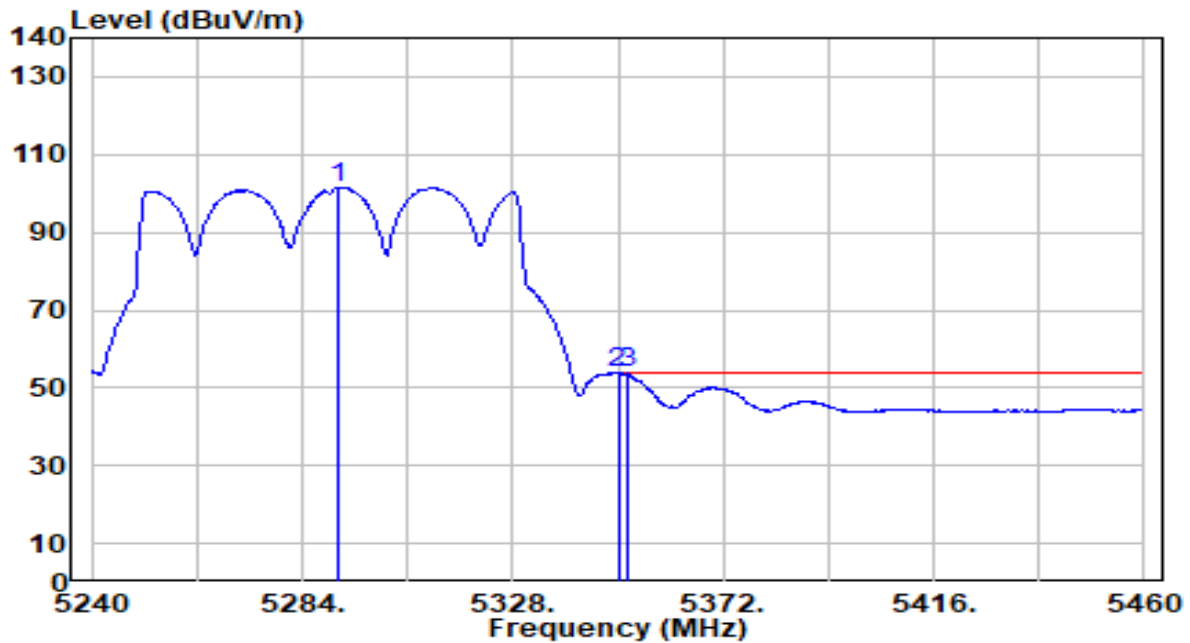


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5291.260	101.11	0.56	101.67	N/A	N/A	150	8	Average
2	*	5350.000	53.37	0.47	53.84	-0.16	54.00	150	8	Average
3		5351.760	53.25	0.47	53.72	-0.28	54.00	150	8	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

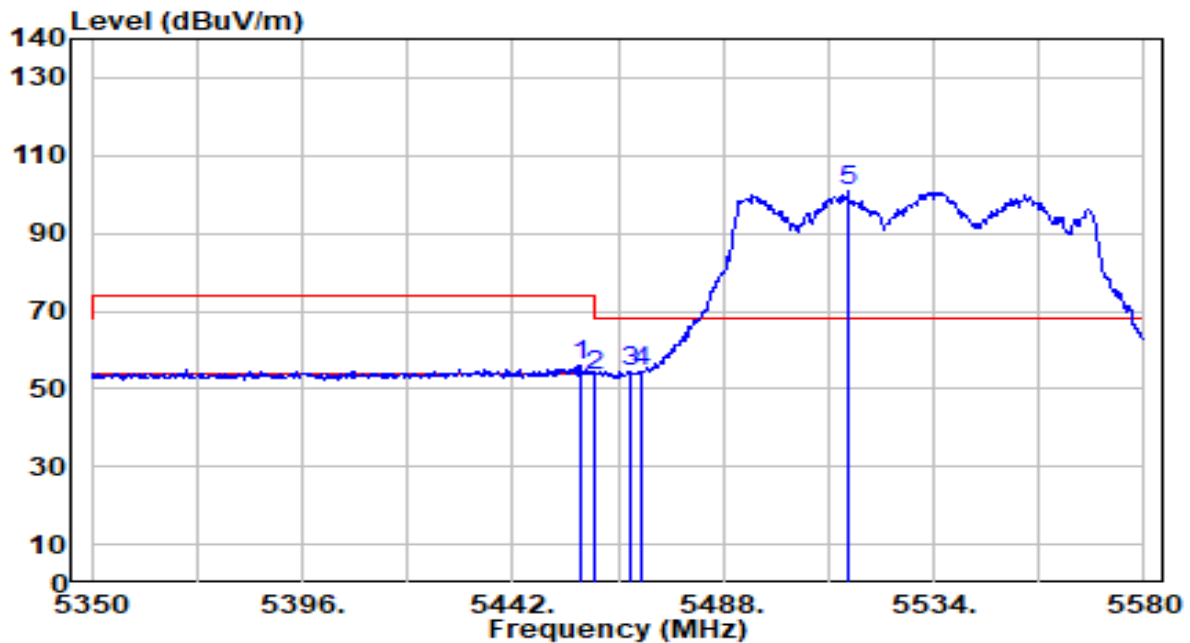


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.720	55.36	0.65	56.01	-17.99	74.00	100	147	Peak
2	5460.000	52.84	0.66	53.50	-20.50	74.00	100	147	Peak
3	5467.990	53.61	0.70	54.31	-13.89	68.20	100	147	Peak
4	* 5470.000	53.64	0.71	54.34	-13.86	68.20	100	147	Peak
5	5515.370	99.78	0.91	100.70	N/A	N/A	100	147	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

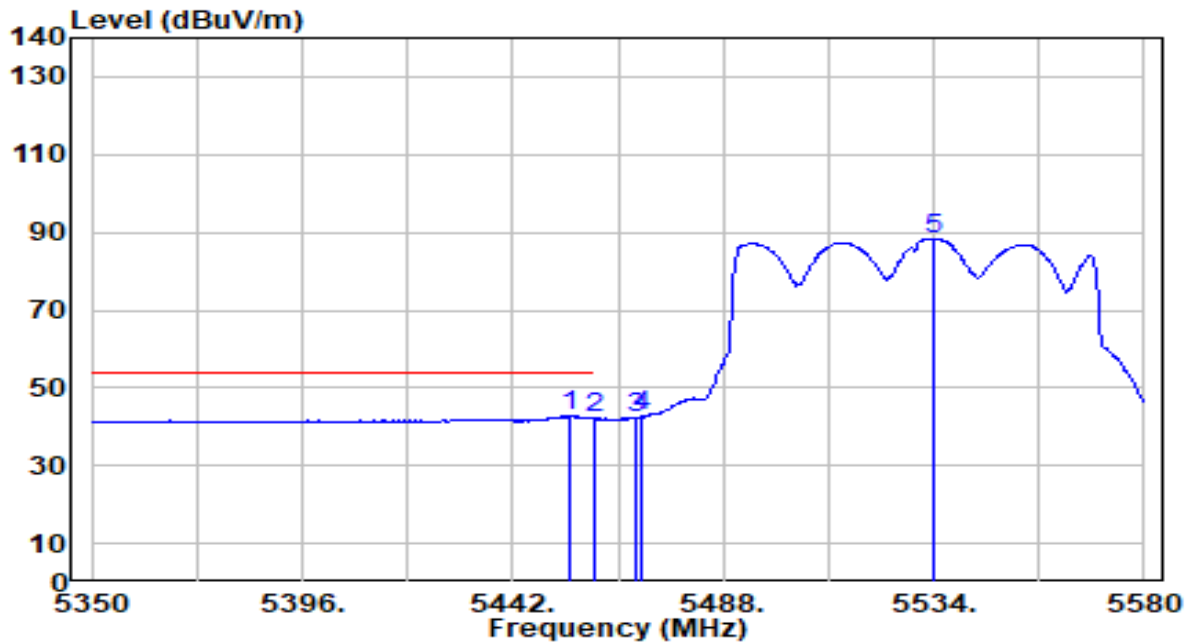


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5454.650	42.12	0.64	42.76	-11.24	54.00	100	147	Average
2		5460.000	41.36	0.66	42.03	-11.97	54.00	100	147	Average
3		5468.910	41.78	0.70	42.48	N/A	N/A	100	147	Average
4		5470.000	41.88	0.71	42.58	N/A	N/A	100	147	Average
5		5533.770	87.47	1.00	88.47	N/A	N/A	100	147	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

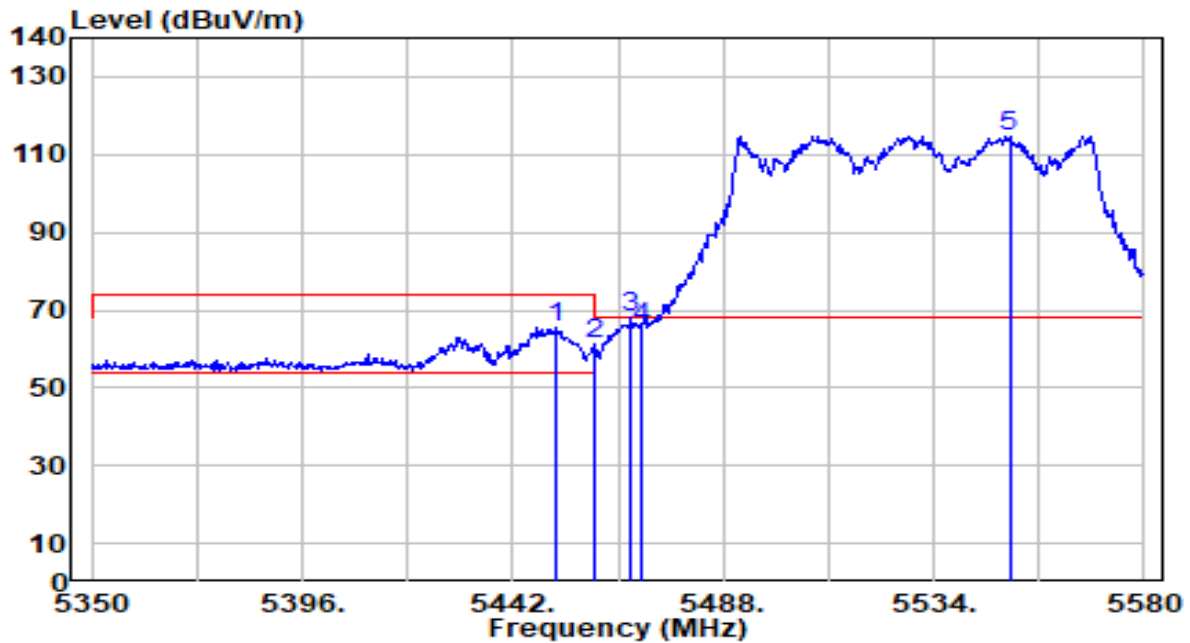


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5451.660	64.78	0.62	65.41	-8.59	74.00	157	184	Peak
2	5460.000	60.59	0.66	61.25	-12.75	74.00	157	184	Peak
3	* 5467.990	67.25	0.70	67.95	-0.25	68.20	157	184	Peak
4	5470.000	64.99	0.71	65.69	-2.51	68.20	157	184	Peak
5	5550.560	113.73	1.08	114.80	N/A	N/A	157	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	By PoE

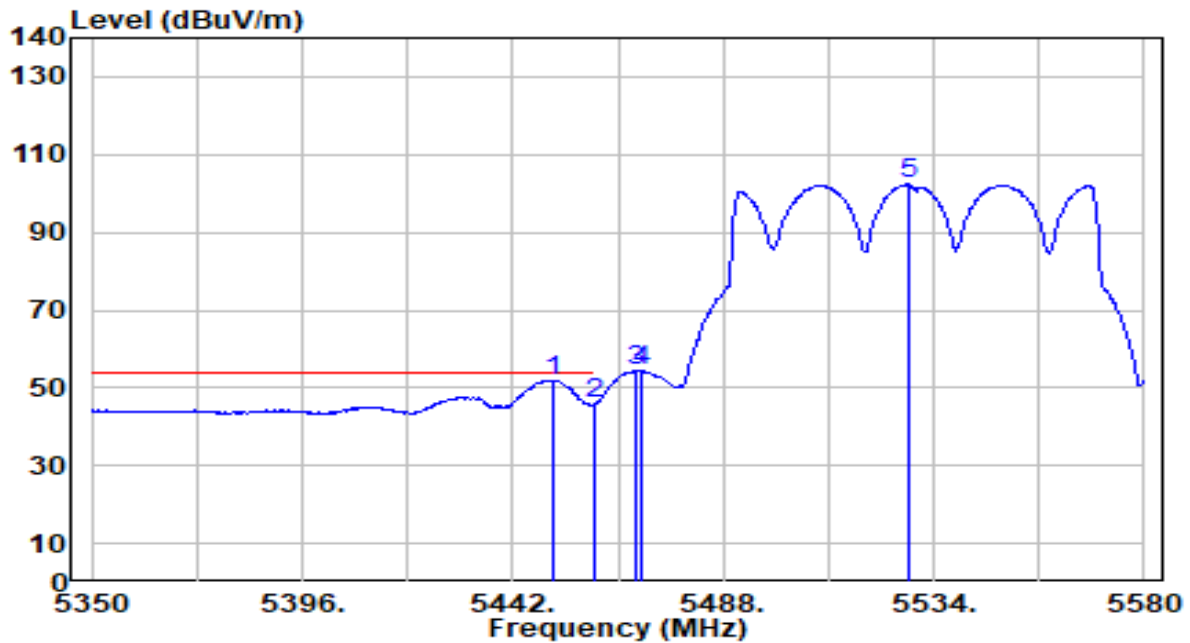


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5450.740	51.34	0.62	51.96	-2.04	54.00	157	184	Average
2		5460.000	45.18	0.66	45.84	-8.16	54.00	157	184	Average
3		5468.910	53.75	0.70	54.45	N/A	N/A	157	184	Average
4		5470.000	53.82	0.71	54.53	N/A	N/A	157	184	Average
5		5528.480	101.40	0.97	102.38	N/A	N/A	157	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-30
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	By PoE

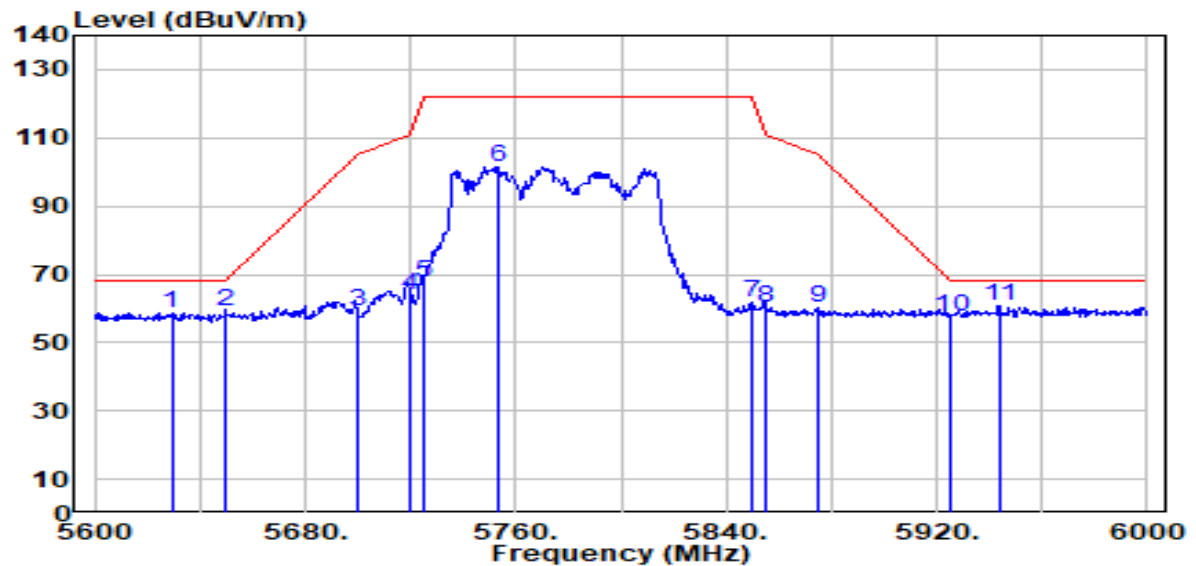


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5629.200	57.34	1.44	58.78	-9.42	68.20	100	179	Peak
2	5650.000	57.75	1.54	59.29	-8.91	68.20	100	179	Peak
3	5700.000	57.38	1.78	59.15	-46.05	105.20	100	179	Peak
4	5720.000	62.16	1.87	64.03	-46.77	110.80	100	179	Peak
5	5725.000	65.68	1.89	67.57	-54.63	122.20	100	179	Peak
6	5753.200	99.56	2.02	101.58	N/A	N/A	100	179	Peak
7	5850.000	59.30	2.25	61.55	-60.65	122.20	100	179	Peak
8	5855.000	57.83	2.25	60.09	-50.71	110.80	100	179	Peak
9	5875.000	57.76	2.26	60.01	-45.19	105.20	100	179	Peak
10	5925.000	55.47	2.27	57.74	-10.46	68.20	100	179	Peak
11 *	5943.600	58.62	2.27	60.89	-7.31	68.20	100	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	By PoE

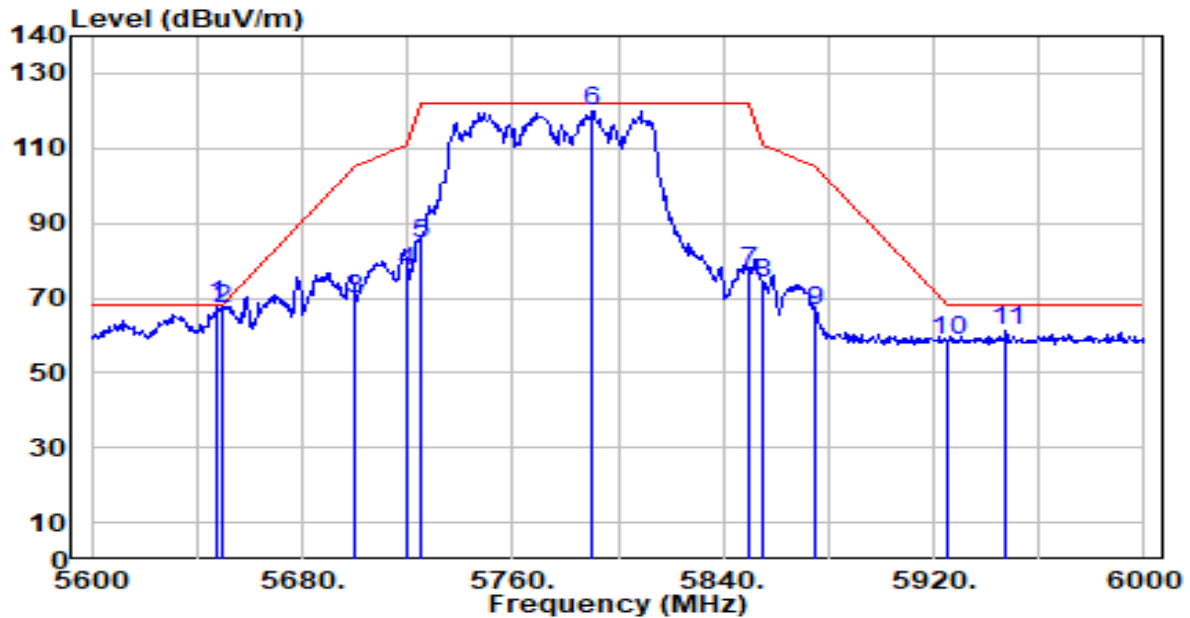


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.000	66.40	1.53	67.94	-0.26	68.20	150	184	Peak
2		5650.000	65.54	1.54	67.08	-1.12	68.20	150	184	Peak
3		5700.000	67.78	1.78	69.56	-35.64	105.20	150	184	Peak
4		5720.000	75.49	1.87	77.36	-33.44	110.80	150	184	Peak
5		5725.000	82.63	1.89	84.53	-37.67	122.20	150	184	Peak
6		5790.400	117.98	2.20	120.18	N/A	N/A	150	184	Peak
7		5850.000	75.12	2.25	77.37	-44.83	122.20	150	184	Peak
8		5855.000	71.97	2.25	74.22	-36.58	110.80	150	184	Peak
9		5875.000	64.51	2.26	66.77	-38.43	105.20	150	184	Peak
10		5925.000	56.30	2.27	58.57	-9.63	68.20	150	184	Peak
11		5947.600	58.82	2.27	61.09	-7.11	68.20	150	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

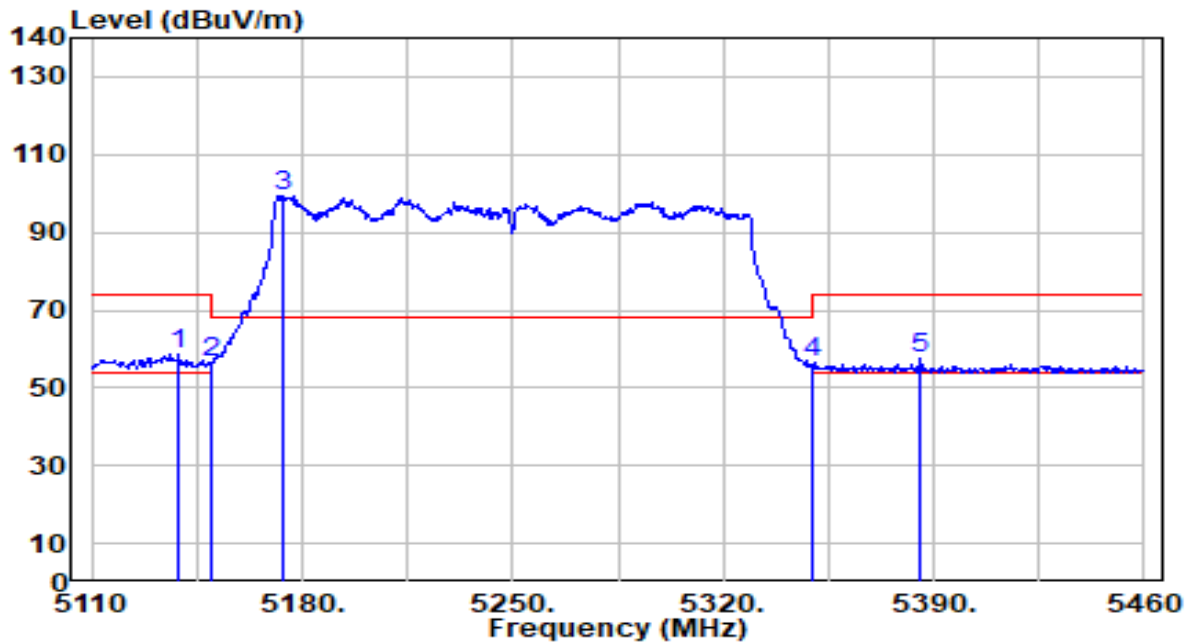


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5138.700	58.15	0.64	58.79	-15.21	74.00	292	150	Peak
2		5150.000	56.05	0.65	56.70	-17.30	74.00	292	150	Peak
3		5174.050	98.82	0.68	99.50	N/A	N/A	292	150	Peak
4		5350.000	55.95	0.47	56.42	-17.58	74.00	292	150	Peak
5		5385.800	56.92	0.42	57.33	-16.67	74.00	292	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

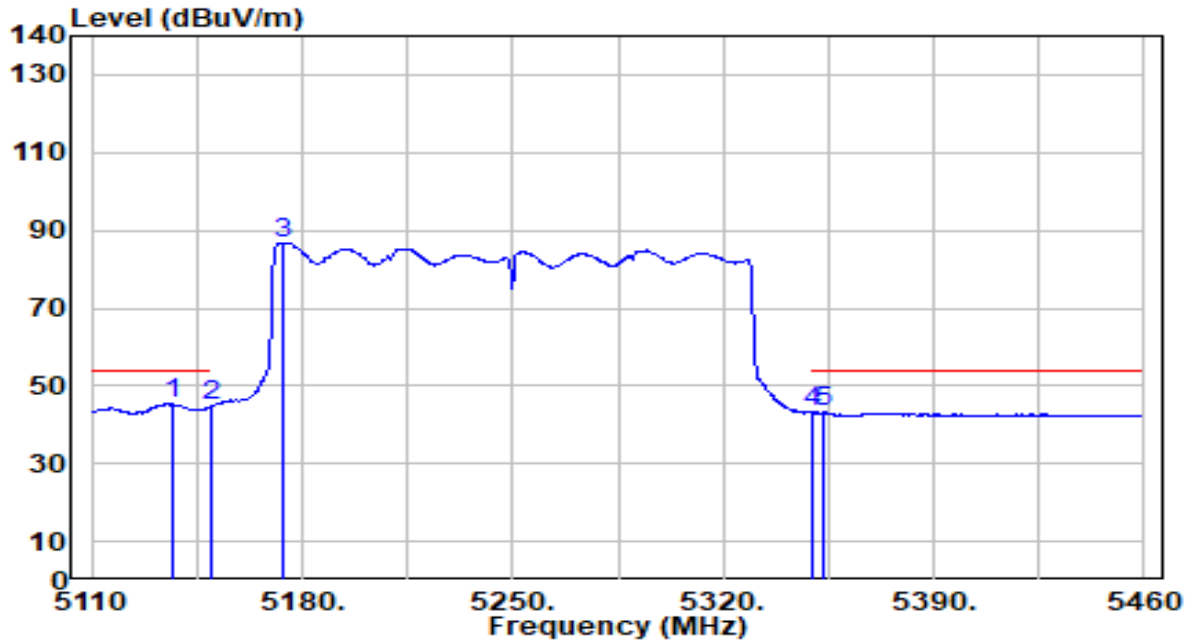


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5137.300	44.74	0.64	45.38	-8.62	54.00	292	150	Average
2		5150.000	44.40	0.65	45.06	-8.94	54.00	292	150	Average
3		5174.050	86.22	0.68	86.90	N/A	N/A	292	150	Average
4		5350.000	42.59	0.47	43.06	-10.94	54.00	292	150	Average
5		5353.250	42.72	0.47	43.18	-10.82	54.00	292	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

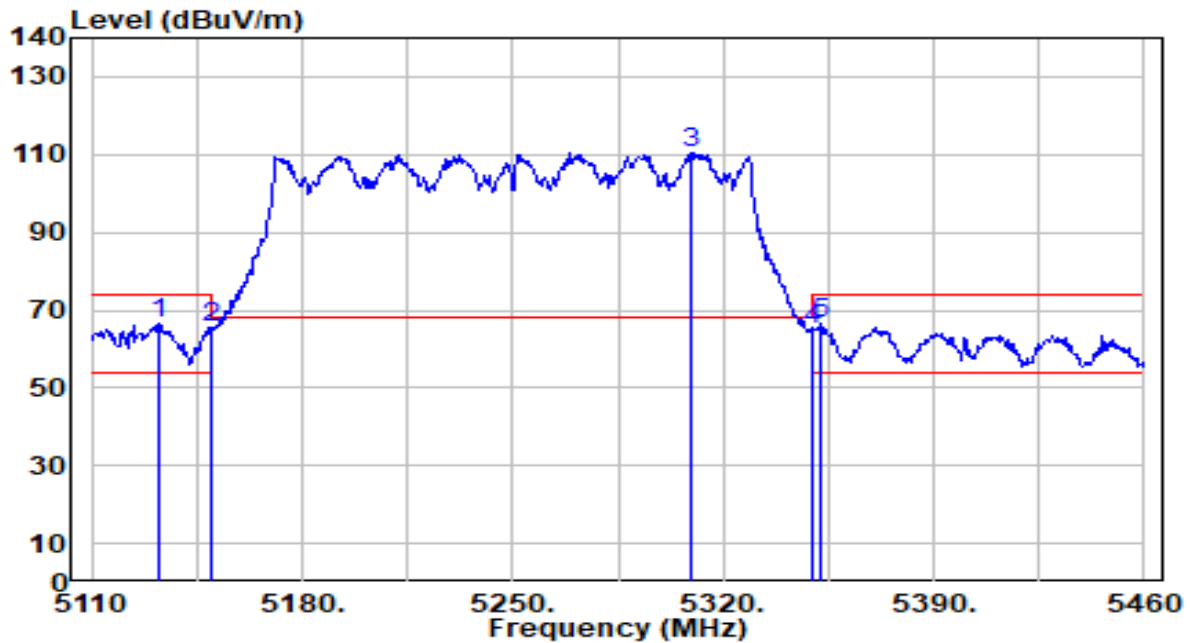


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5132.050	65.69	0.64	66.33	-7.67	74.00	140	8	Peak
2	5150.000	64.84	0.65	65.50	-8.50	74.00	140	8	Peak
3	5309.150	109.87	0.53	110.40	N/A	N/A	140	8	Peak
4	5350.000	64.71	0.47	65.18	-8.82	74.00	140	8	Peak
5	* 5352.550	66.22	0.47	66.69	-7.31	74.00	140	8	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By PoE

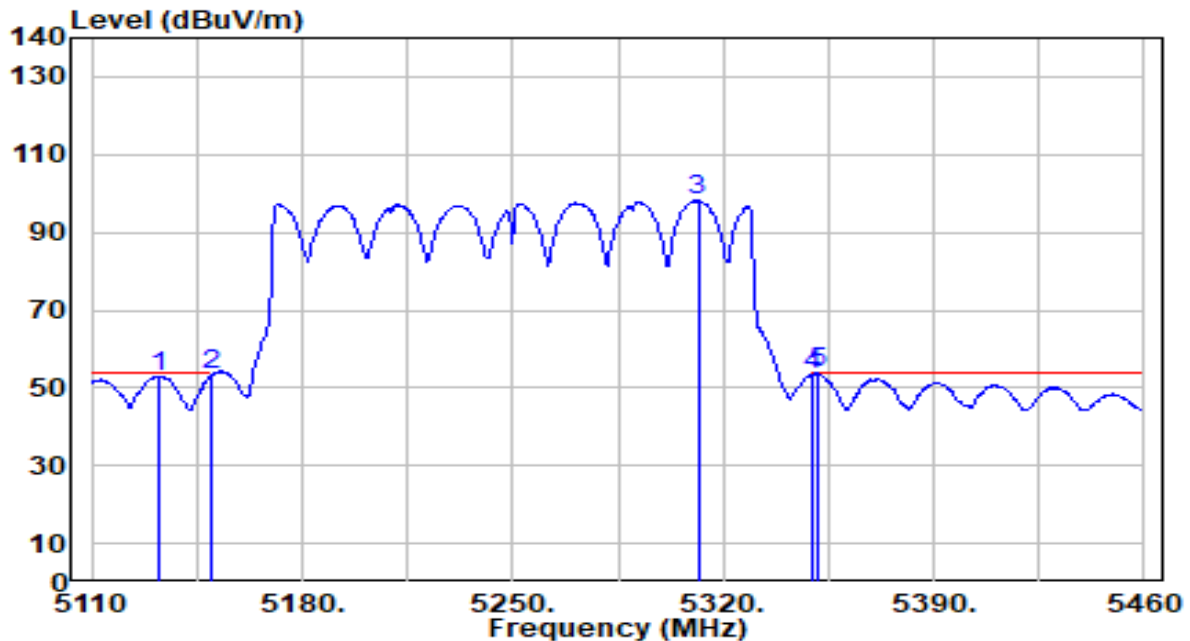


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5132.750	52.41	0.64	53.04	-0.96	54.00	140	8	Average
2	5150.000	52.62	0.65	53.27	-0.73	54.00	140	8	Average
3	5311.600	97.55	0.53	98.08	N/A	N/A	140	8	Average
4	5350.000	52.97	0.47	53.44	-0.56	54.00	140	8	Average
5	* 5351.500	53.35	0.47	53.82	-0.18	54.00	140	8	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	By PoE

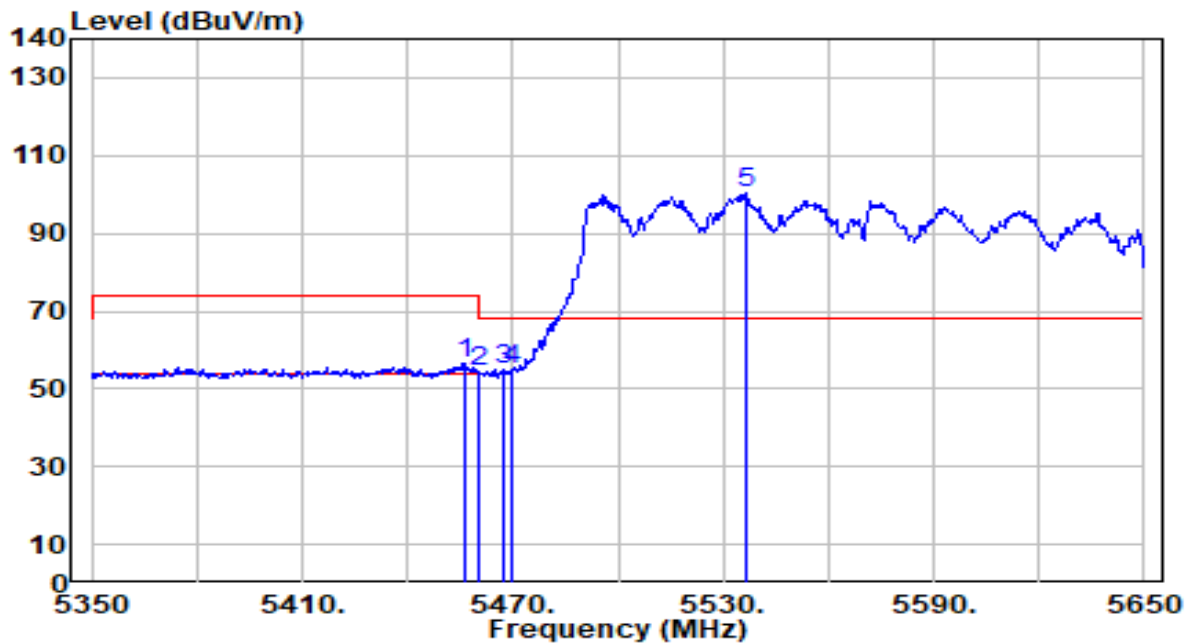


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.500	55.94	0.65	56.58	-17.42	74.00	100	148	Peak
2	5460.000	53.58	0.66	54.25	-19.75	74.00	100	148	Peak
3	* 5467.300	54.25	0.69	54.94	-13.26	68.20	100	148	Peak
4	5470.000	54.00	0.71	54.71	-13.49	68.20	100	148	Peak
5	5536.300	99.13	1.01	100.14	N/A	N/A	100	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	By PoE

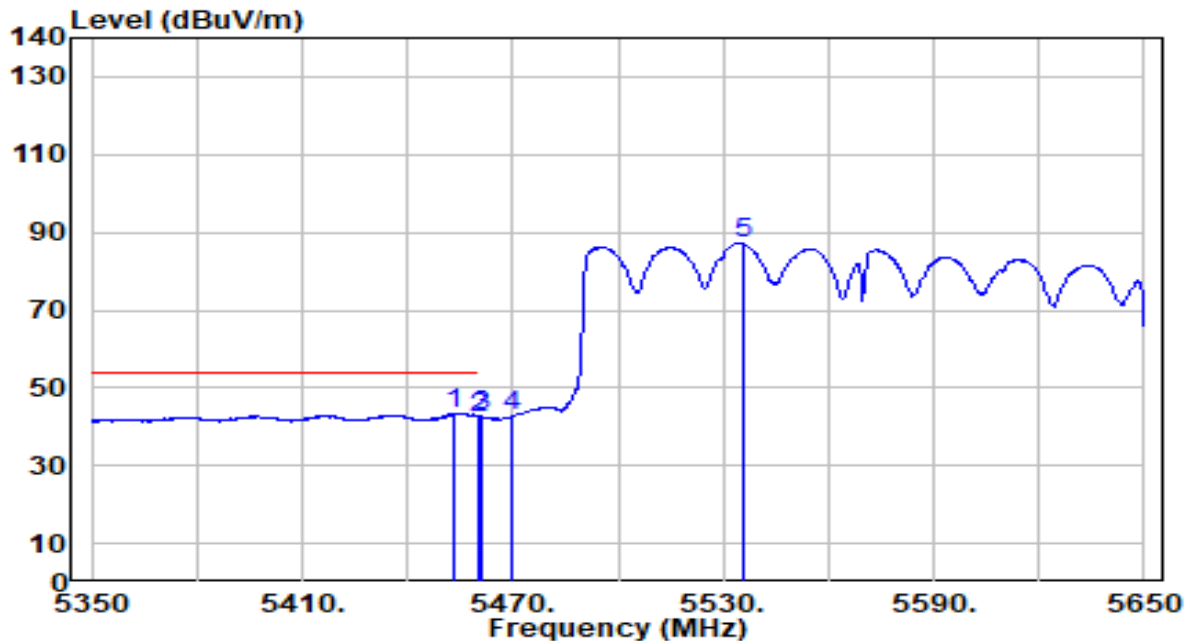


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5452.900	42.92	0.63	43.55	-10.45	54.00	100	148	Average
2		5460.000	41.77	0.66	42.43	-11.57	54.00	100	148	Average
3		5461.300	41.92	0.67	42.59	N/A	N/A	100	148	Average
4		5470.000	41.91	0.71	42.62	N/A	N/A	100	148	Average
5		5535.400	86.31	1.01	87.31	N/A	N/A	100	148	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	By PoE

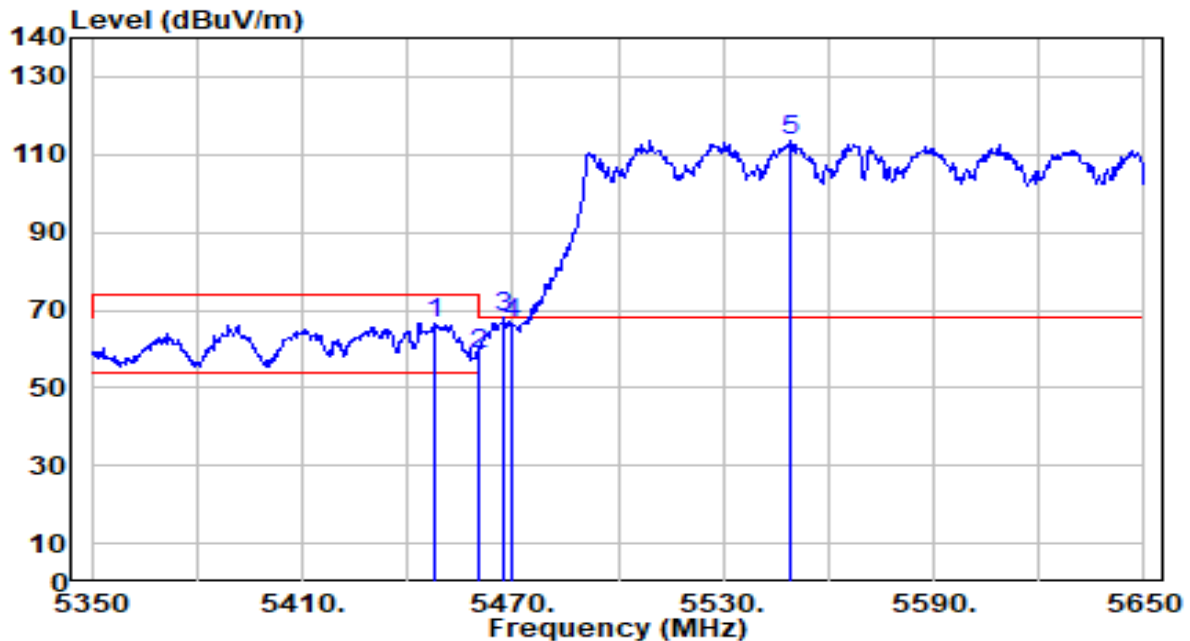


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5448.100	65.91	0.61	66.52	-7.48	74.00	153	184	Peak
2	5460.000	58.17	0.66	58.84	-15.16	74.00	153	184	Peak
3	* 5467.300	67.25	0.69	67.94	-0.26	68.20	153	184	Peak
4	5470.000	65.90	0.71	66.61	-1.59	68.20	153	184	Peak
5	5549.200	112.40	1.07	113.47	N/A	N/A	153	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	By PoE

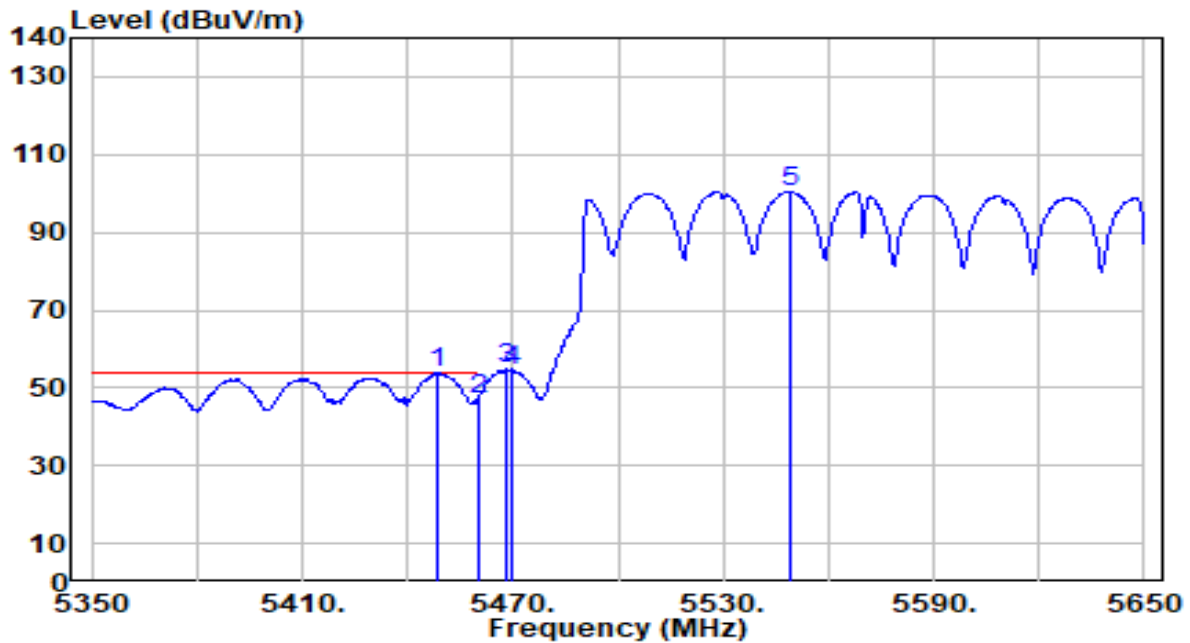


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5448.400	53.29	0.61	53.90	-0.10	54.00	153	184	Average
2		5460.000	46.56	0.66	47.22	-6.78	54.00	153	184	Average
3		5468.200	54.01	0.70	54.71	N/A	N/A	153	184	Average
4		5470.000	53.47	0.71	54.17	N/A	N/A	153	184	Average
5		5549.500	99.37	1.07	100.44	N/A	N/A	153	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-240MHz_TX_Band3_CH 130_ANT 0+1	Test Voltage	By PoE

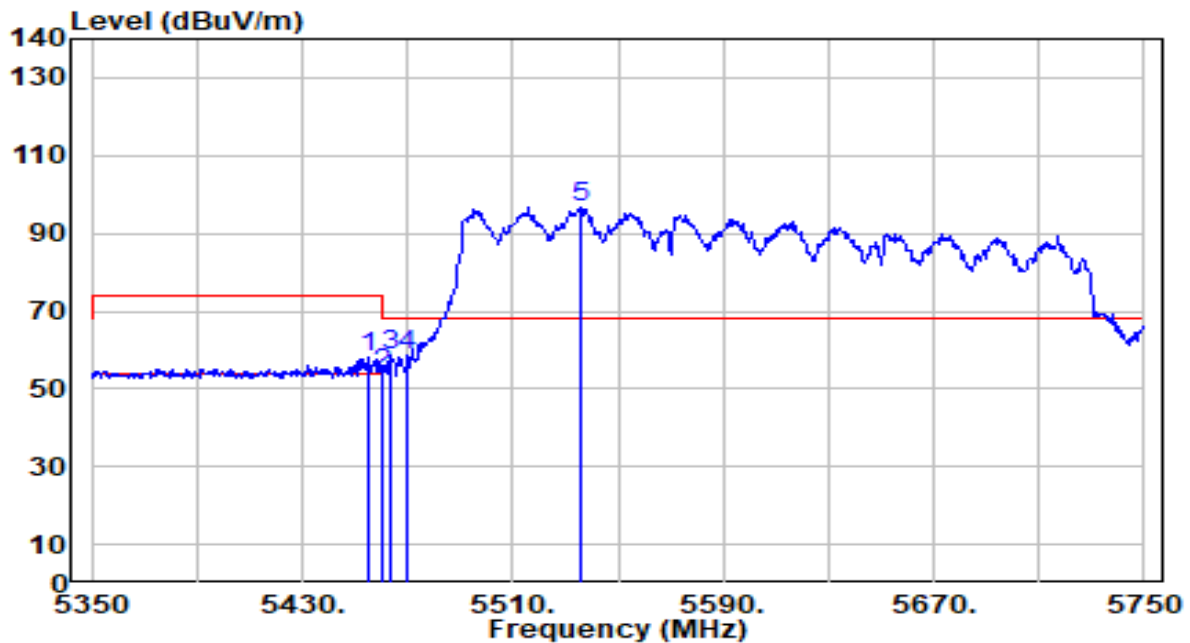


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.200	57.46	0.64	58.10	-15.90	74.00	100	148	Peak
2	5460.000	53.18	0.66	53.84	-20.16	74.00	100	148	Peak
3	* 5463.600	57.99	0.68	58.67	-9.53	68.20	100	148	Peak
4	5470.000	57.84	0.71	58.54	-9.66	68.20	100	148	Peak
5	5536.000	95.57	1.01	96.58	N/A	N/A	100	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-240MHz_TX_Band3_CH 130_ANT 0+1	Test Voltage	By PoE

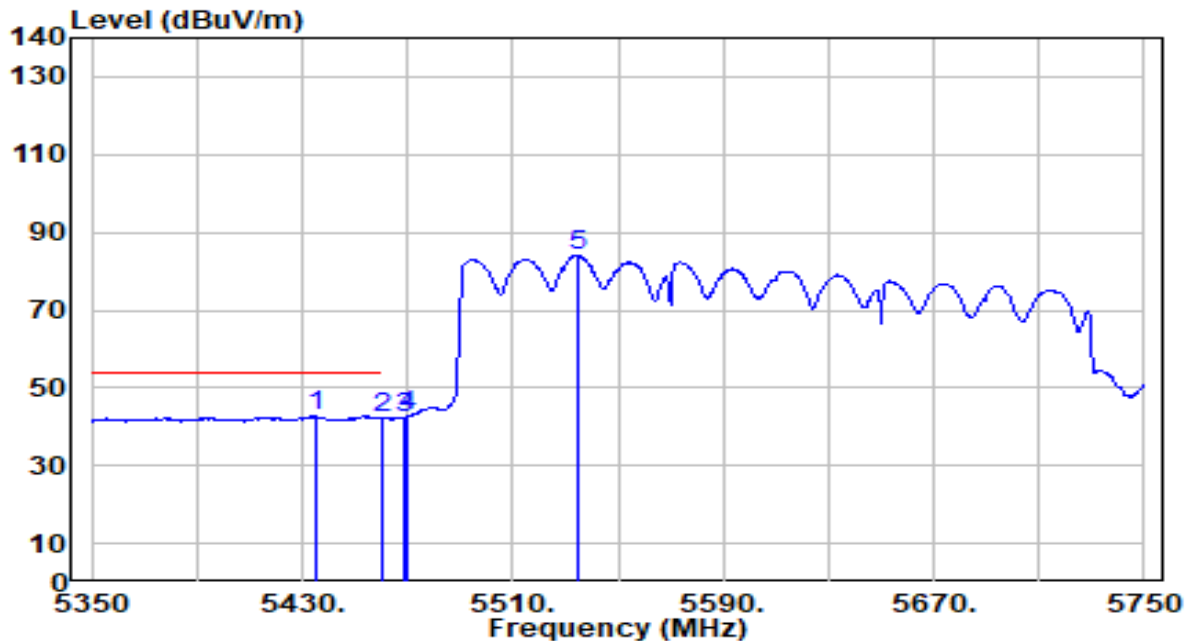


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5434.800	42.10	0.55	42.65	-11.35	54.00	100	148	Average
2		5460.000	41.60	0.66	42.26	-11.74	54.00	100	148	Average
3		5469.200	41.69	0.70	42.39	N/A	N/A	100	148	Average
4		5470.000	41.94	0.71	42.65	N/A	N/A	100	148	Average
5		5534.400	83.15	1.00	84.15	N/A	N/A	100	148	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-240MHz_TX_Band3_CH 130_ANT 0+1	Test Voltage	By PoE

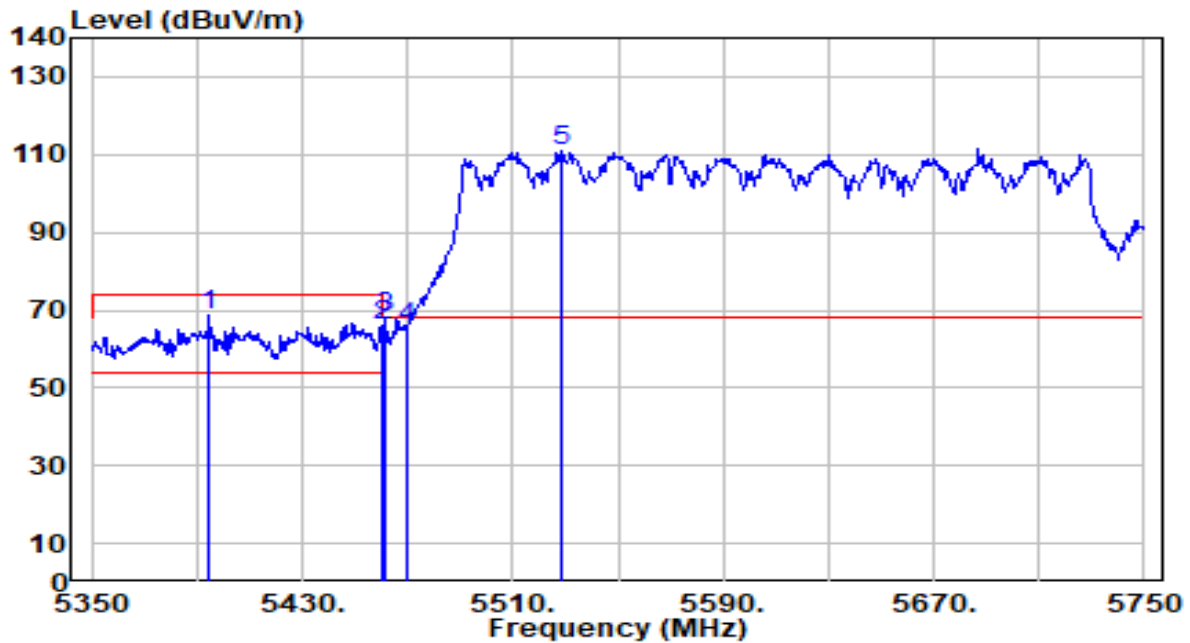


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5394.800	68.24	0.40	68.64	-5.36	74.00	150	184	Peak
2	5460.000	65.18	0.66	65.84	-8.16	74.00	150	184	Peak
3	* 5461.600	67.38	0.67	68.05	-0.15	68.20	150	184	Peak
4	5470.000	64.76	0.71	65.47	-2.73	68.20	150	184	Peak
5	5528.400	109.72	0.97	110.70	N/A	N/A	150	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-10-28
Factor	DRH18-E	Temp. / Humidity	19°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-240MHz_TX_Band3_CH 130_ANT 0+1	Test Voltage	By PoE

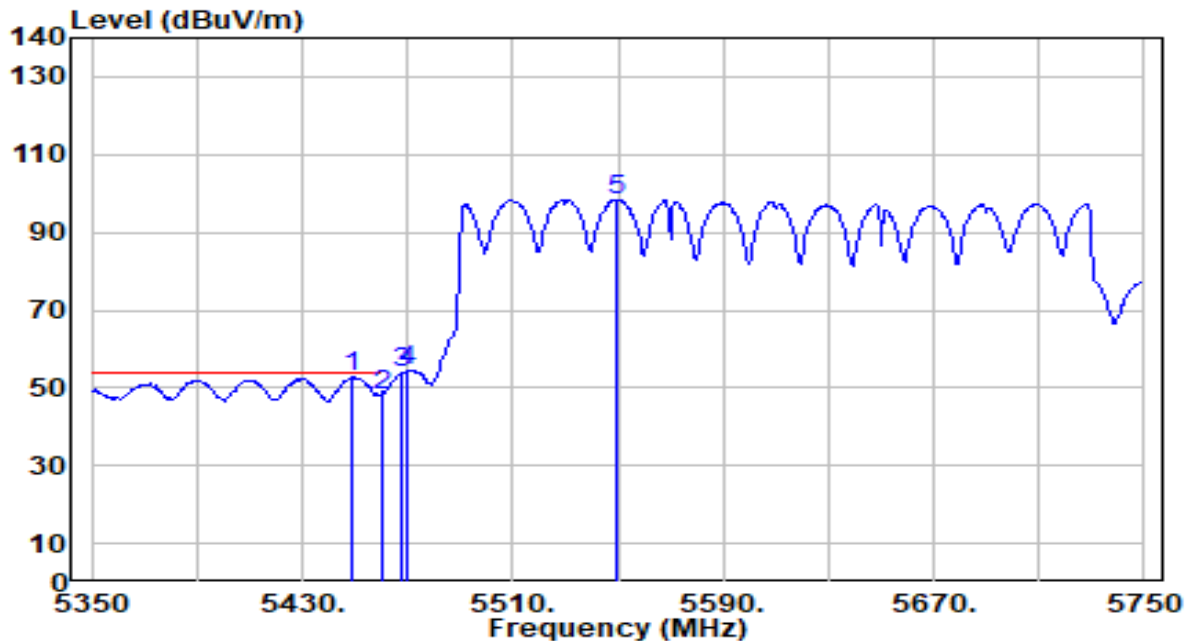

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5449.200	52.04	0.61	52.65	-1.35	54.00	150	184	Average
2		5460.000	47.41	0.66	48.07	-5.93	54.00	150	184	Average
3		5468.000	53.31	0.70	54.01	N/A	N/A	150	184	Average
4		5470.000	53.82	0.71	54.53	N/A	N/A	150	184	Average
5		5549.200	97.37	1.07	98.44	N/A	N/A	150	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.10.AC Conducted Emissions Measurement

7.10.1.Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.10.2.Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

7.10.3. Test Setup

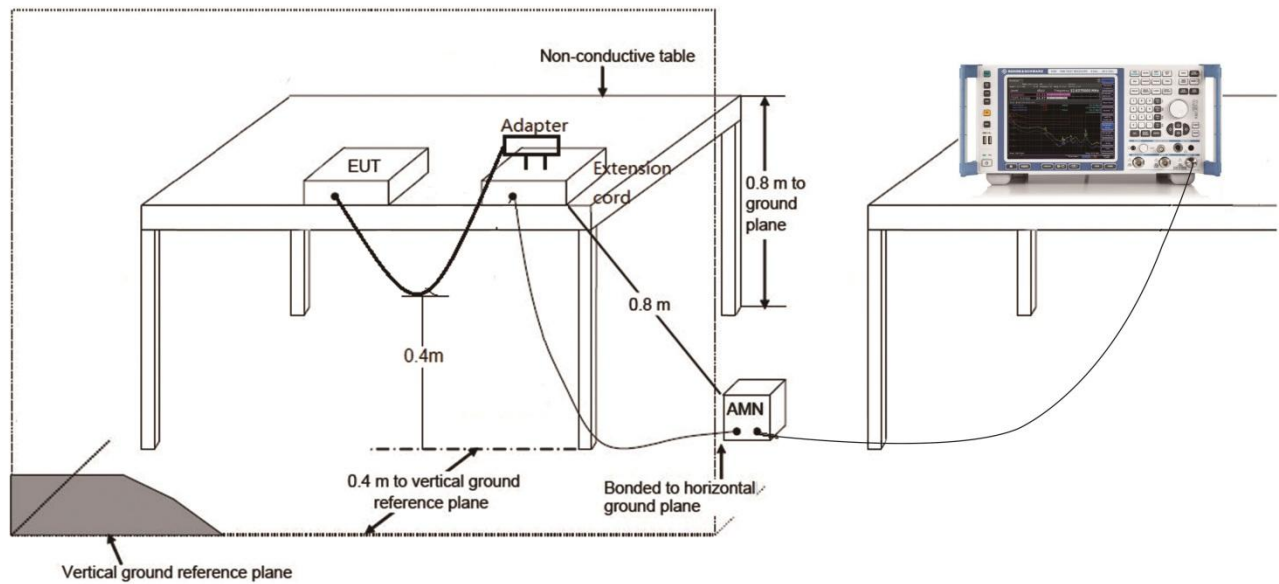

7.10.4.Test Result

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-11-07
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	25.5°C /57%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

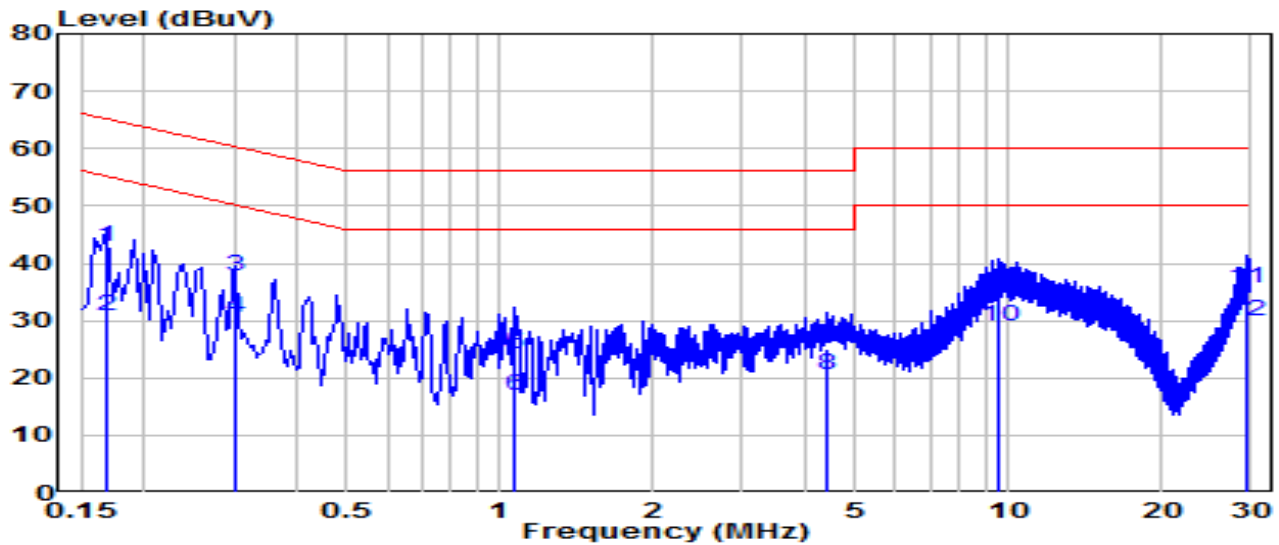


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.168	33.09	9.63	42.72	-22.34	65.06	QP
2	0.168	21.28	9.63	30.91	-24.15	55.06	Average
3	* 0.303	28.20	9.64	37.84	-22.32	60.16	QP
4	* 0.303	20.88	9.64	30.52	-19.64	50.16	Average
5	1.063	14.50	9.68	24.18	-31.82	56.00	QP
6	1.063	7.30	9.68	16.98	-29.02	46.00	Average
7	4.425	15.25	9.74	24.99	-31.01	56.00	QP
8	4.425	10.67	9.74	20.41	-25.59	46.00	Average
9	9.599	24.72	9.86	34.58	-25.42	60.00	QP
10	9.599	19.06	9.86	28.92	-21.08	50.00	Average
11	29.258	25.59	9.93	35.52	-24.48	60.00	QP
12	29.258	19.87	9.93	29.80	-20.20	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-11-07
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	25.5°C /57%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

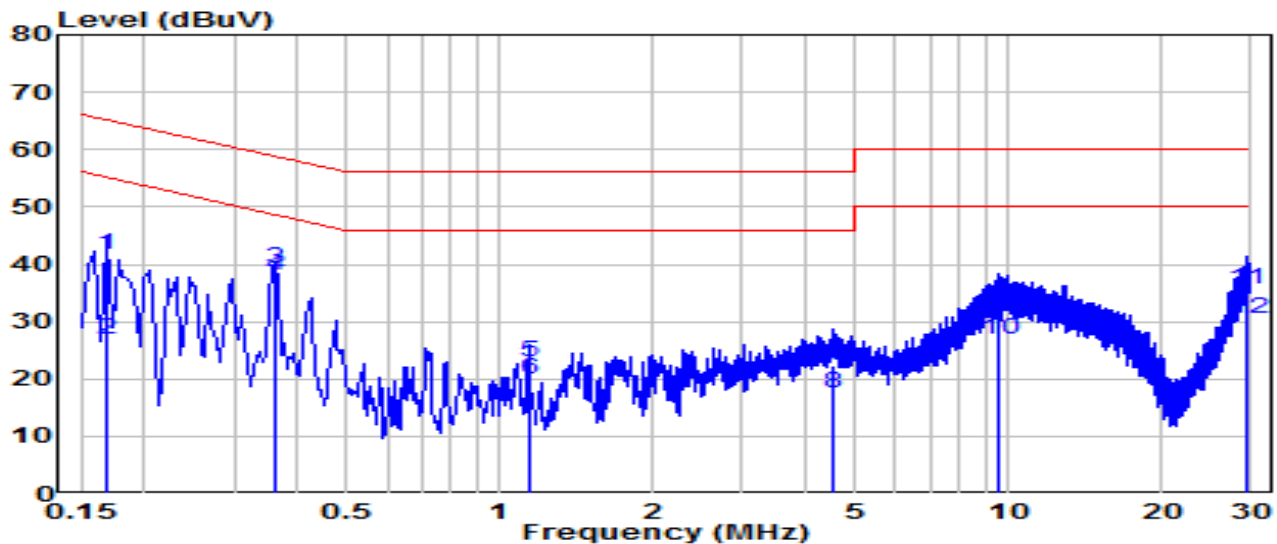


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.168	31.96	9.63	41.59	-23.47	65.06	QP
2	0.168	17.16	9.63	26.79	-28.27	55.06	Average
3	* 0.361	29.48	9.64	39.12	-19.57	58.69	QP
4	* 0.361	28.34	9.64	37.98	-10.72	48.69	Average
5	1.144	13.23	9.68	22.91	-33.09	56.00	QP
6	1.144	10.13	9.68	19.81	-26.19	46.00	Average
7	4.537	12.66	9.75	22.41	-33.59	56.00	QP
8	4.537	7.87	9.75	17.62	-28.38	46.00	Average
9	9.595	22.64	9.88	32.52	-27.48	60.00	QP
10	9.595	16.87	9.88	26.75	-23.25	50.00	Average
11	29.456	25.60	10.06	35.66	-24.34	60.00	QP
12	29.456	20.42	10.06	30.48	-19.52	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-11-07
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	25.5°C /57%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 240V/60Hz

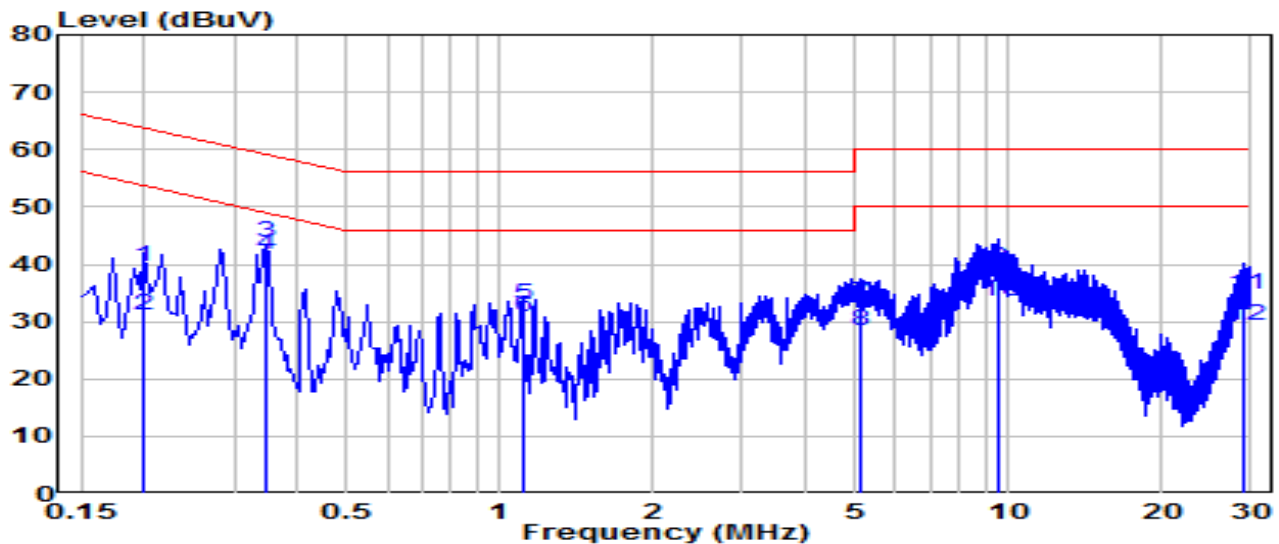


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.199	29.80	9.63	39.43	-24.20	63.63	QP
2	0.199	21.53	9.63	31.17	-22.46	53.63	Average
3	* 0.348	33.99	9.64	43.63	-15.38	59.01	QP
4	* 0.348	32.03	9.64	41.67	-7.34	49.01	Average
5	1.108	23.33	9.68	33.02	-22.98	56.00	QP
6	1.108	21.00	9.68	30.69	-15.31	46.00	Average
7	5.095	23.56	9.75	33.31	-26.69	60.00	QP
8	5.095	18.63	9.75	28.38	-21.62	50.00	Average
9	9.568	29.47	9.86	39.33	-20.67	60.00	QP
10	9.568	23.67	9.86	33.53	-16.47	50.00	Average
11	29.213	24.85	9.93	34.78	-25.22	60.00	QP
12	29.213	19.41	9.93	29.34	-20.66	50.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE11000 Indoor/Outdoor Wi-Fi 7 Access Point	Date of Test	2024-11-07
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	25.5°C /57%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 240V/60Hz

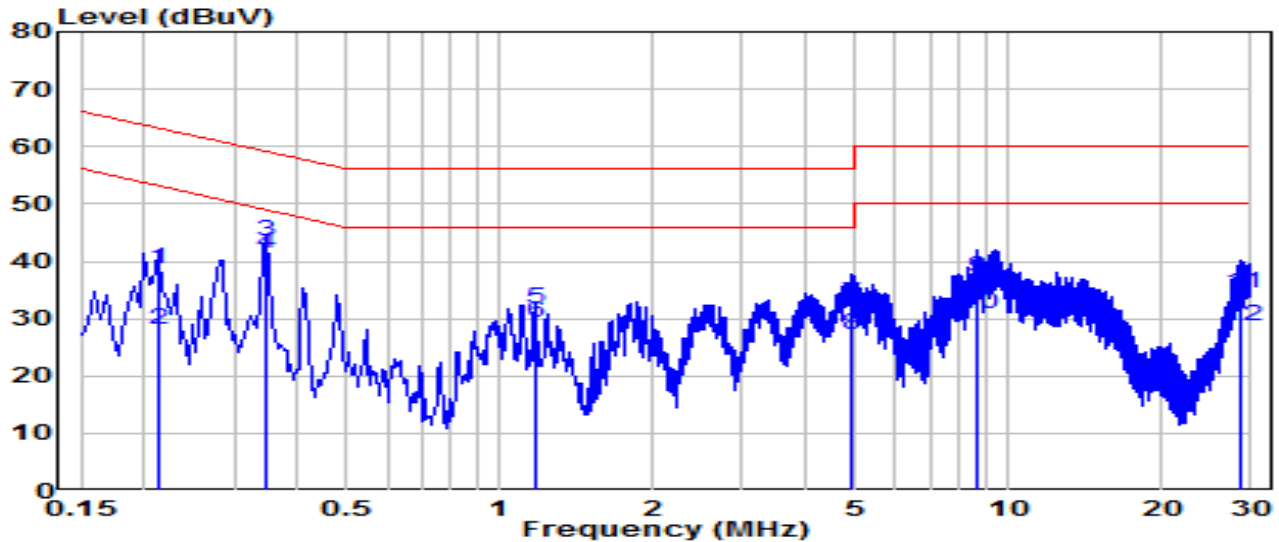

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.213	29.14	9.63	38.78	-24.31	63.09	QP
2	0.213	18.33	9.63	27.97	-25.12	53.09	Average
3	* 0.348	33.79	9.64	43.43	-15.58	59.01	QP
4	* 0.348	31.67	9.64	41.31	-7.70	49.01	Average
5	1.176	21.90	9.69	31.58	-24.42	56.00	QP
6	1.176	19.66	9.69	29.35	-16.65	46.00	Average
7	4.911	22.72	9.76	32.48	-23.52	56.00	QP
8	4.911	17.31	9.76	27.07	-18.93	46.00	Average
9	8.668	27.13	9.85	36.99	-23.01	60.00	QP
10	8.668	21.05	9.85	30.90	-19.10	50.00	Average
11	28.817	24.48	10.05	34.53	-25.47	60.00	QP
12	28.817	18.74	10.05	28.79	-21.21	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2410TW0108-UT” file.

Appendix B : EUT Photograph

Refer to “2410TW0108-UE” file.

Appendix C : Internal Photograph

Refer to “2410TW0108-UI” file.

_____ The End _____