

RADIO REPORT FCC 47 CFR Part 15C ISED Canada RSS-247 Digital transmission systems operating within the 2400 – 2483.5 MHz band	
Report Reference No	G0M-1702-6283-TFC247BL-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	 A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Filed Test Laboratory, Reg.-No.: 96970 IC Testing Laboratory site: 3470A-2
Applicant	Panasonic Industrial Devices Europe GmbH
Address	Zeppelinstr. 19 21337 Lüneburg GERMANY
Test Specification	According to FCC/ISED rules
Standard	47 CFR Part 15C RSS-247, Issue 1, 2015-05
Non-Standard Test Method	None
Test Scope	Full compliance test
Equipment under Test (EUT):	
Product Description	Bluetooth Module
Model(s)	ENW89848A1KF
Additional Model(s)	None
Brand Name(s)	PAN1761
Hardware Version(s)	02
Software Version(s)	01
FCC-ID	T7V1761
IC	216Q-1761
Test Result	PASSED

Possible test case verdicts:		
required by standard but not tested	N/T	
not required by standard	N/R	
test object does meet the requirement	P(PASS)	
test object does not meet the requirement	F(FAIL)	
Testing:		
Test Lab Temperature	20 - 23 °C	
Test Lab Humidity	32 – 38 %	
Date of receipt of test item	2017-03-24	
Report:		
Compiled by	Toralf Jahn	
Tested by (+ signature) (Responsible for Test)	Toralf Jahn	
Approved by (+ signature) (Head of Lab)	Christian Weber	
Date of Issue	2017-05-17	
Total number of pages	90	
General Remarks:		
The test results presented in this report relate only to the object tested. The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.		
Additional Comments:		

VERSION HISTORY

Version History			
Version	Issue Date	Remarks	Revised By
01	2017-05-17	Initial Release	

ABBREVIATIONS AND ACRONYMS

Acronyms	
Acronym	Description
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
RBW	Resolution bandwidth
RMS	Root mean square
VBW	Video bandwidth
V _{NOM}	Nominal supply voltage



REPORT INDEX

1	Equipment (Test Item) Under Test.....	6
1.1	Photos – Equipment External	7
1.2	Photos – Test Setup.....	8
1.3	Support Equipment.....	9
1.4	Test Modes	10
1.5	Test Frequencies.....	11
1.6	Sample emission level calculation.....	12
2	Result Summary.....	13
3	Test Conditions and Results.....	14
3.1	Test Conditions and Results - Occupied bandwidth.....	14
3.2	Test Conditions and Results - 6 dB bandwidth.....	19
3.3	Test Conditions and Results - Maximum peak conducted output power	23
3.4	Test Conditions and Results - Power spectral density	25
3.5	Test Conditions and Results - AC powerline conducted emissions.....	30
3.6	Test Conditions and Results - Band-edge compliance.....	33
3.7	Test Conditions and Results - Conducted spurious emissions.....	36
3.8	Test Conditions and Results - Transmitter radiated emissions	40
3.9	Test Conditions and Results - Receiver radiated emissions	43
ANNEX A	Transmitter sprurious emissions	45
ANNEX B	Receiver sprurious emissions	81



1 Equipment (Test Item) Under Test

Description	Bluetooth Module	
Model	ENW89848A1KF	
Additional Model(s)	None	
Brand Name(s)	PAN1761	
Serial Number(s)	None	
Hardware Version(s)	02	
Software Version(s)	01	
PMN	PAN1761	
HVIN	ENW89848A1KF	
FVIN	N/A	
HMN	N/A	
FCC-ID	T7V1761	
IC	216Q-1761	
Equipment type	Radio Module	
Radio type	Transceiver	
Assigned frequency bands	2400 - 2483.5 MHz	
Radio technology	Bluetooth LE	
Modulation	GFSK	
Number of antenna ports	1	
Antenna	Type	Integrated
	Model	ANT2012L
	Manufacturer	Yageo
	Gain	2.7 dBi
Supply Voltage	V _{NOM}	3.3 VDC via 5V USB
Operating Temperature	T _{NOM}	25°C
AC/DC-Adaptor	Model	N/A
	Vendor	N/A
	Input	N/A
	Output	N/A
Manufacturer	Panasonic Industrial Devices Europe GmbH Zeppelinstr. 19 21337 Lüneburg GERMANY	

1.1 Photos – Equipment External

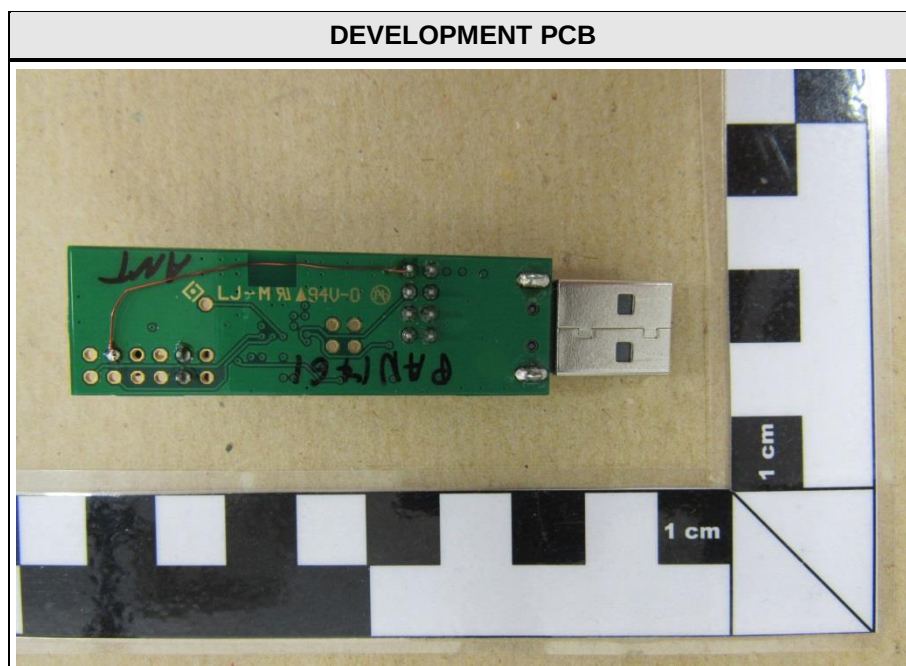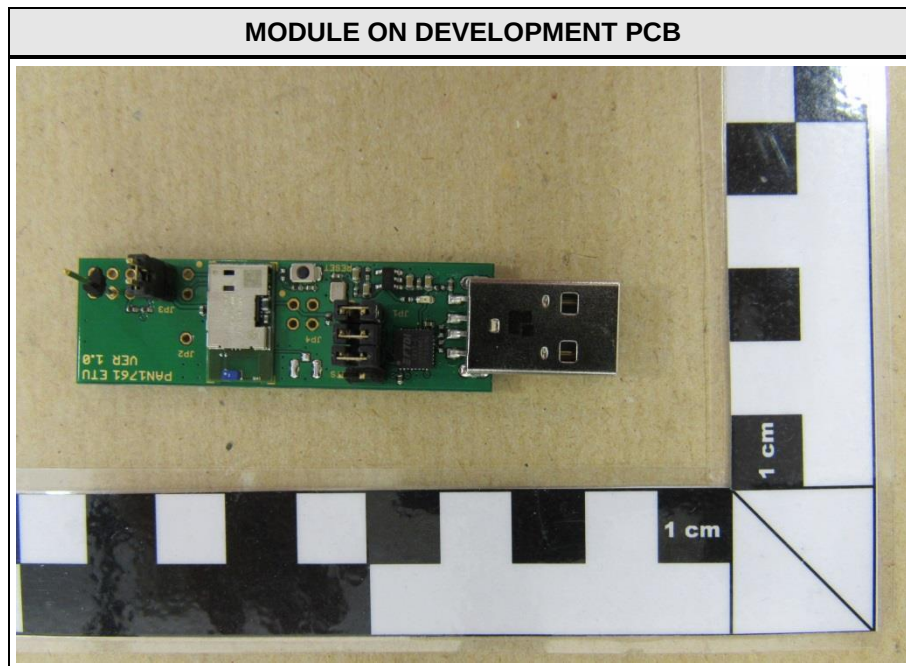

1.2 Photos – Test Setup

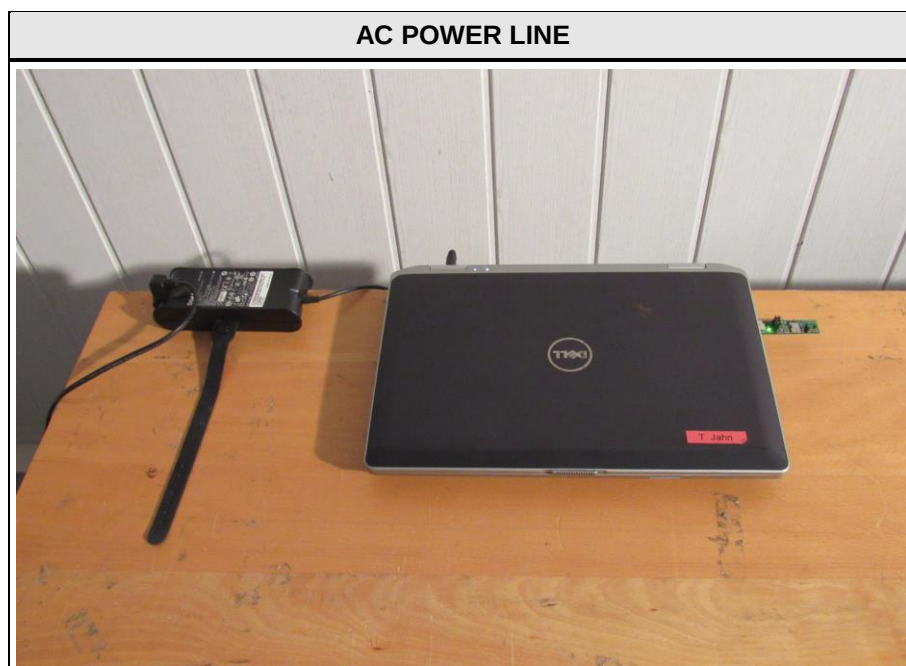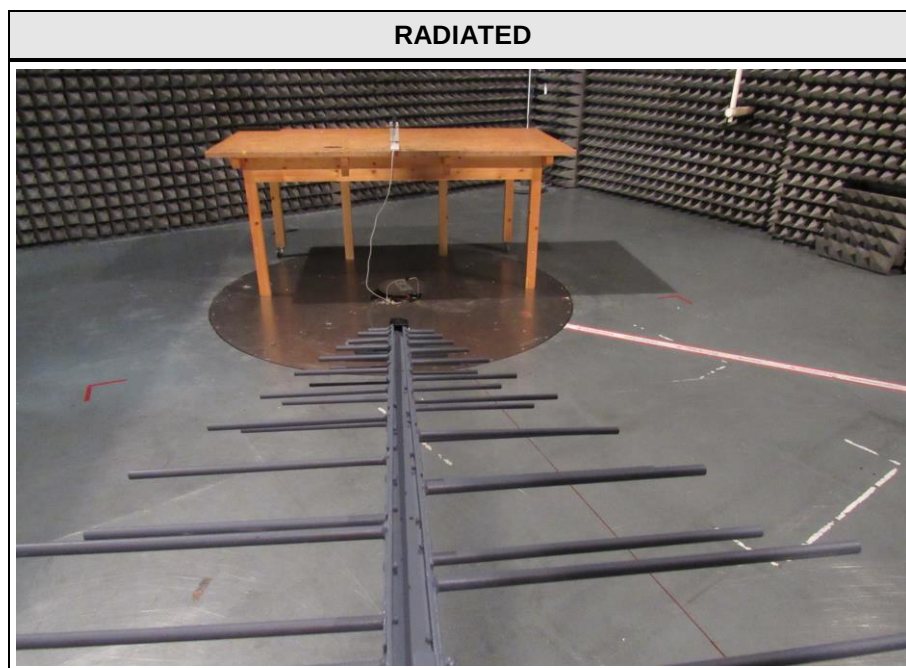

1.3 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
AE	Laptop	Dell	E6430	Testsoftware PAN1026_1760_D emo_V2.7.exe
Description:				
AE	Auxillary Equipment			
SIM	Simulator			
CBL	Connecting Cable			
Comment:				

1.4 Test Modes

Mode	Description
GFSK	Mode = Transmit Modulation = GFSK Spreading = None Duty cycle = 28%
Receive	Mode = Receive
Comment:	

1.5 Test Frequencies

Designator	Mode	Channel	Frequency [MHz]
F1	Tx / Rx	0	2402
F2	Tx / Rx	19	2440
F3	Tx / Rx	39	2480

1.6 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBμV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBμV/m). The FCC limits are given in units of μV/m. The following formula is used to convert the units of μV/m to dBμV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF	= Net Reading	:	Net reading	- FCC limit	= Margin
+21.5 dBμV	+ 26 dB = 47.5 dBμV/m	:	47.5 dBμV/m	- 57.0 dBμV/m	= -9.5 dB

2 Result Summary

FCC 47 CFR Part 15C, ISED RSS-247				
Product Standard Reference	Requirement	Reference Method	Result	Remarks
RSS-Gen 6.6	Occupied Bandwidth	ANSI C63.10	N/R	Informational only
FCC § 15.247(a)(2) ISED RSS-247 § 5.2	6 dB Bandwidth	ANSI C63.10	PASS	
FCC § 15.247(b)(3) ISED RSS-247 § 5.4	Maximum peak conducted power	ANSI C63.10	PASS	
FCC § 15.247(e) ISED RSS-247 § 5.2	Power spectral density	ANSI C63.10	PASS	
FCC § 15.207 ISED RSS-247 § 3.1	AC power line conducted emissions	ANSI C63.10	PASS	
FCC § 15.247(d) ISED RSS-247 § 5.5	Band edge compliance	ANSI C63.10	PASS	
FCC § 15.247(d) ISED RSS-247 § 5.5	Conducted spurious emissions	ANSI C63.10	PASS	
FCC § 15.247(d) FCC § 15.209 ISED RSS-GEN § 8.9	Transmitter radiated spurious emissions	ANSI C63.10	PASS	
ISED RSS-247 § 3.1	Receiver radiated spurious emissions	ANSI C63.10	PASS	
Comment:				

Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object

3 Test Conditions and Results

3.1 Test Conditions and Results - Occupied bandwidth


3.1.1 Information

Test Information	
Reference	ISED RSS-Gen 6.6
Measurement Method	ANSI C63.10 6.9.3
Operator	Toralf Jahn
Date	2017-04-25

3.1.2 Limits

Limits
None (Informational only)

3.1.3 Setup

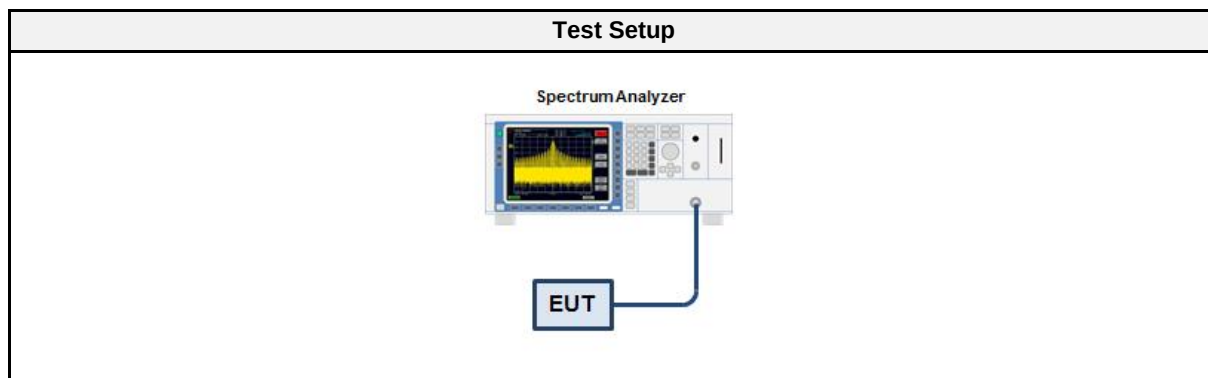

3.1.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-04	2018-04

3.1.5 Procedure

Test Procedure
1. EUT transmitter is activated in test mode under normal conditions 2. The spectrum analyzer is set to peak detection and maximum hold with a span twice the emission spectrum 3. The resolution bandwidth is set to 1 % of the bandwidth 4. The occupied bandwidth is measured with the build-in analyzer function


3.1.6 Results

Test Results		
Mode	Frequency [MHz]	Bandwidth [MHz]
GFSK	2402	1.015
GFSK	2440	1.005
GFSK	2480	1.015

Occupied bandwidth – GFSK - 2402 MHz

Occupied Bandwidth

Project Number: G0M-1702-6283
 Applicant: Panasonic Industrial Devices Europe GmbH
 Model Description: Bluetooth Module
 Model: ENW89848A1KF
 Test Sample ID: 12564
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: T. Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-04-25
 Occupied Bandwidth [MHz]: 1.015

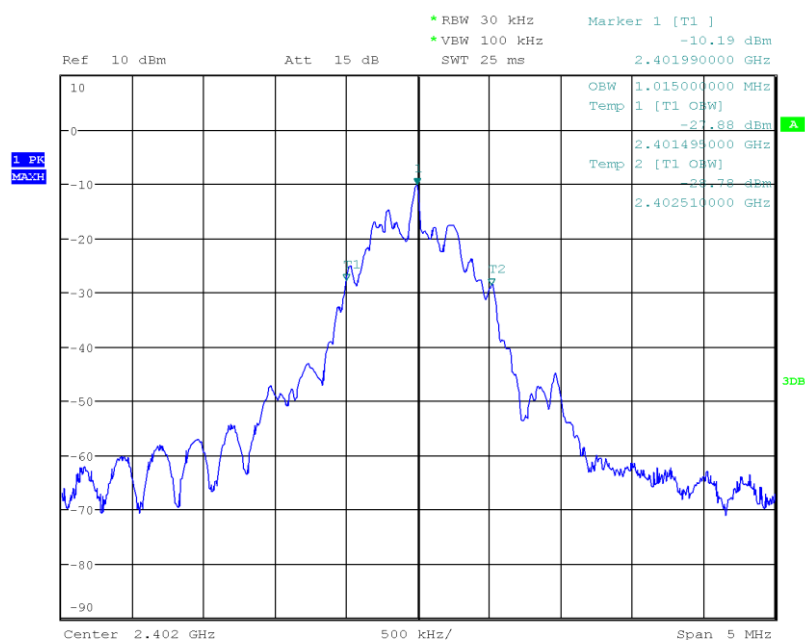


Date: 25.APR.2017 14:41:41

Occupied bandwidth – GFSK - 2440 MHz

Occupied Bandwidth

Project Number: G0M-1702-6283
 Applicant: Panasonic Industrial Devices Europe GmbH
 Model Description: Bluetooth Module
 Model: ENW89848A1KF
 Test Sample ID: 12564
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: T. Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-04-25
 Occupied Bandwidth [MHz]: 1.005

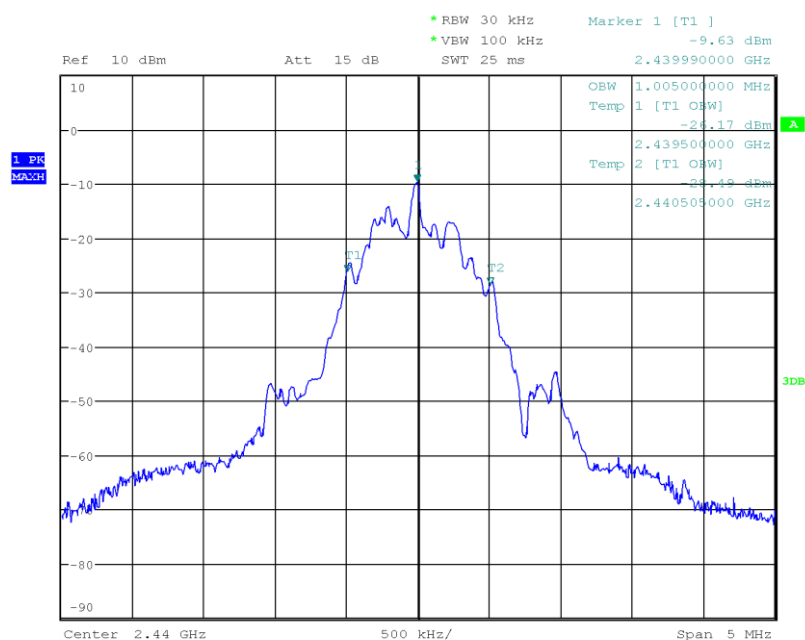


Date: 25.APR.2017 14:40:49

Occupied bandwidth – GFSK - 2480 MHz

Occupied Bandwidth

Project Number: G0M-1702-6283
 Applicant: Panasonic Industrial Devices Europe GmbH
 Model Description: Bluetooth Module
 Model: ENW89848A1KF
 Test Sample ID: 12564
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: T. Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-04-25
 Occupied Bandwidth [MHz]: 1.015

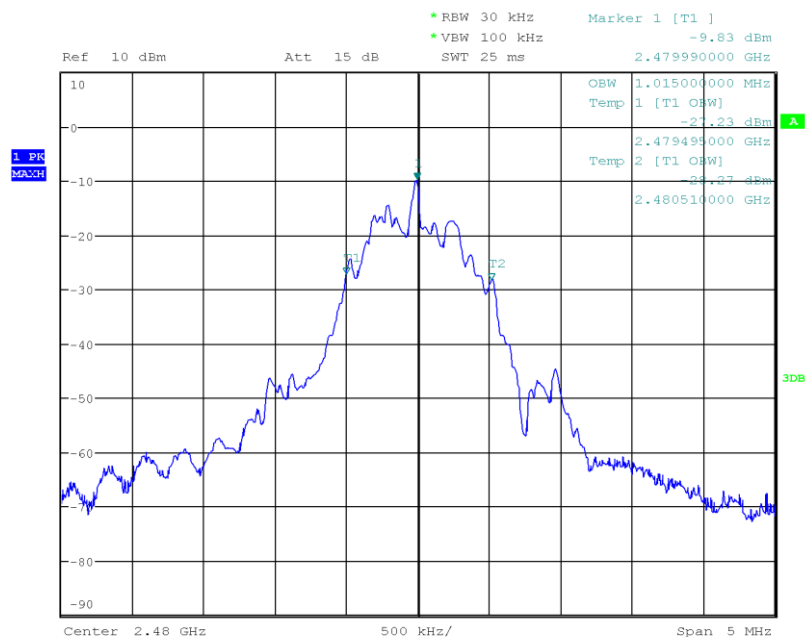

Date: 25.APR.2017 14:39:26

3.2 Test Conditions and Results - 6 dB bandwidth


3.2.1 Information

Test Information	
Reference	FCC 15.247(a)(2) / ISSED RSS-247 5.2
Measurement Method	ANSI C63.10 11.8
Operator	Toralf Jahn
Date	2017-04-25

3.2.2 Limits

Limits
≥ 500kHz

3.2.3 Setup

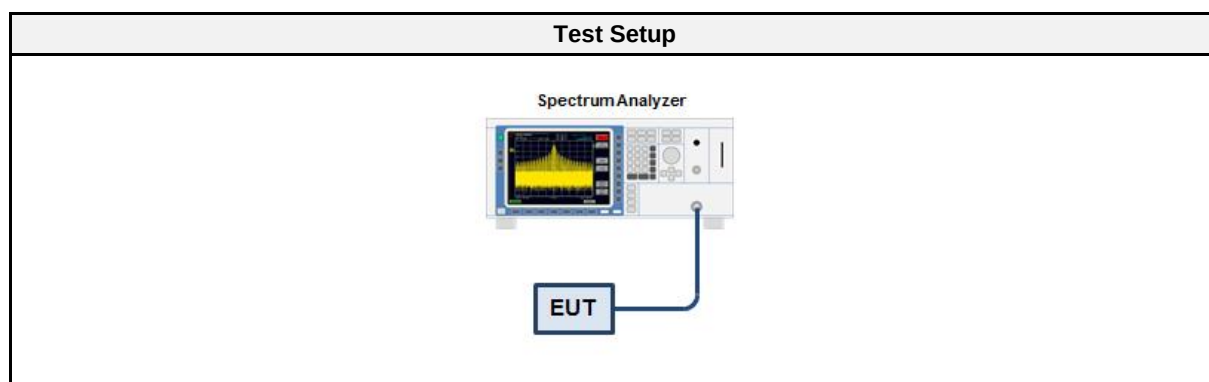

3.2.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-04	2018-04

3.2.5 Procedure

Test Procedure
1. EUT set to test mode 2. Span set to at least twice the emission spectrum 3. Detector set to peak and max hold and RBW is set to 100 kHz 4. Envelope peak value of emission spectrum is selected 5. Marker on envelope of spectrum is set to level of -6 dB to the left of the peak 6. Marker on envelope of spectrum is set to level of -6 dB to the right of the peak 7. 6 dB Bandwidth is determined by marker frequency separation

3.2.6 Results

Test Results				
Mode	Frequency [MHz]	Bandwidth [kHz]	Limit [kHz]	Verdict
GFSK	2402	690	500	PASS
GFSK	2440	670	500	PASS
GFSK	2480	685	500	PASS


Test Report No.: G0M-1702-6283-TFC247BL-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

6 dB bandwidth – GFSK - 2402 MHz

DTS (6 dB) Bandwidth

Project Number: G0M-1702-6283
 Applicant: Panasonic Industrial Devices Europe GmbH
 Model Description: Bluetooth Module
 Model: ENW89848A1KF
 Test Sample ID: 12564
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: T. Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-04-25
 Lower Frequency [MHz]: 2401.630
 Upper Frequency [MHz]: 2402.320
 6 dB Bandwidth [kHz]: 690

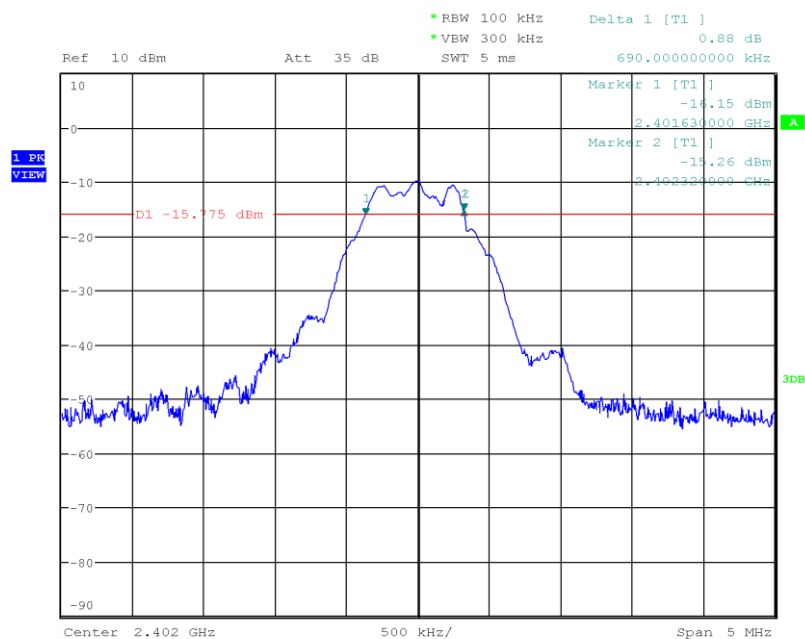


Date: 25.APR.2017 14:11:23

6 dB bandwidth – GFSK - 2440 MHz

DTS (6 dB) Bandwidth

Project Number: G0M-1702-6283
 Applicant: Panasonic Industrial Devices Europe GmbH
 Model Description: Bluetooth Module
 Model: ENW89848A1KF
 Test Sample ID: 12564
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: T. Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-04-25
 Lower Frequency [MHz]: 2439.655
 Upper Frequency [MHz]: 2440.325
 6 dB Bandwidth [kHz]: 670

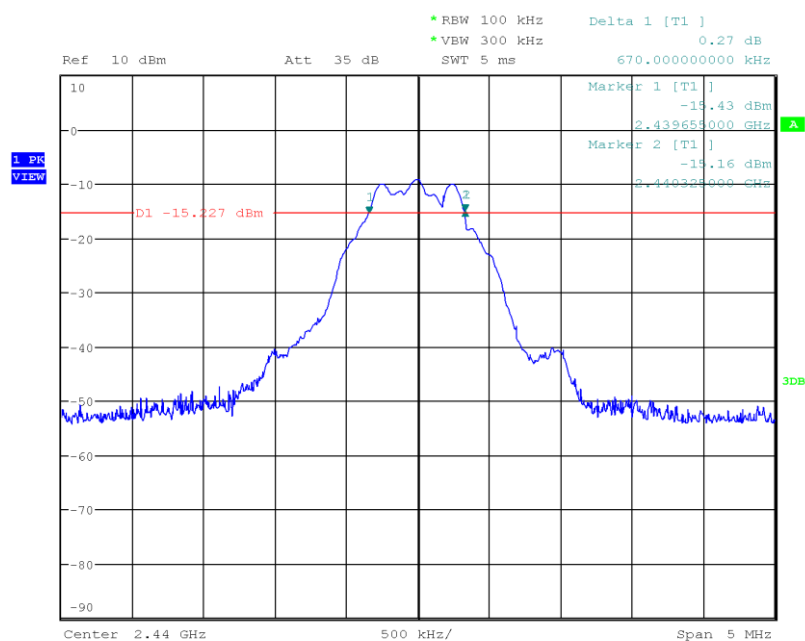


Date: 25.APR.2017 14:12:55

6 dB bandwidth – GFSK - 2480 MHz

DTS (6 dB) Bandwidth

Project Number: G0M-1702-6283
 Applicant: Panasonic Industrial Devices Europe GmbH
 Model Description: Bluetooth Module
 Model: ENW89848A1KF
 Test Sample ID: 12564
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: T. Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-04-25
 Lower Frequency [MHz]: 2479.645
 Upper Frequency [MHz]: 2480.330
 6 dB Bandwidth [kHz]: 685

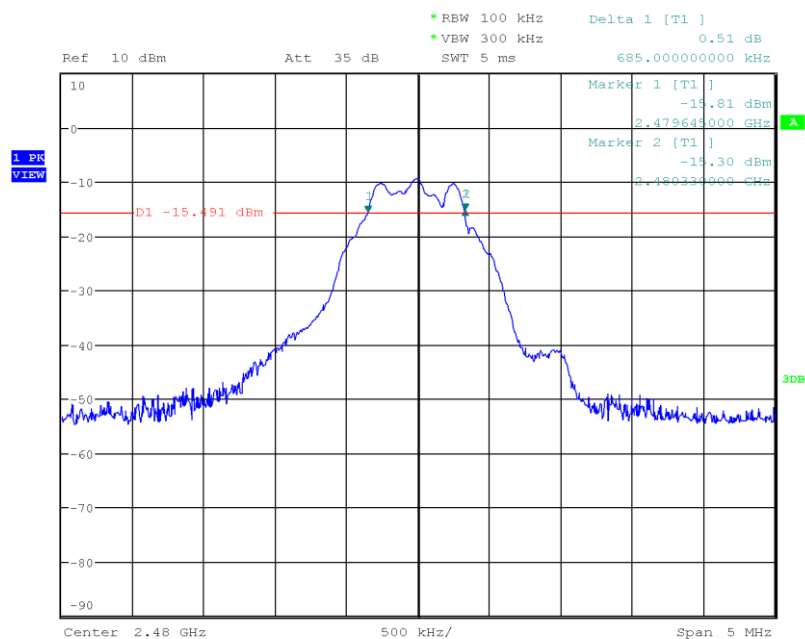

Date: 25.APR.2017 14:35:36

3.3 Test Conditions and Results - Maximum peak conducted output power


3.3.1 Information

Test Information	
Reference	FCC 15.247(b)(1) / ISSED RSS-247 5.4
Measurement Method	ANSI C63.10 11.9.1
Operator	Toralf Jahn
Date	2017-04-25

3.3.2 Limits

Limits
1 W (30 dBm)
The conducted output power limit specified above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in the table, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.3 Setup

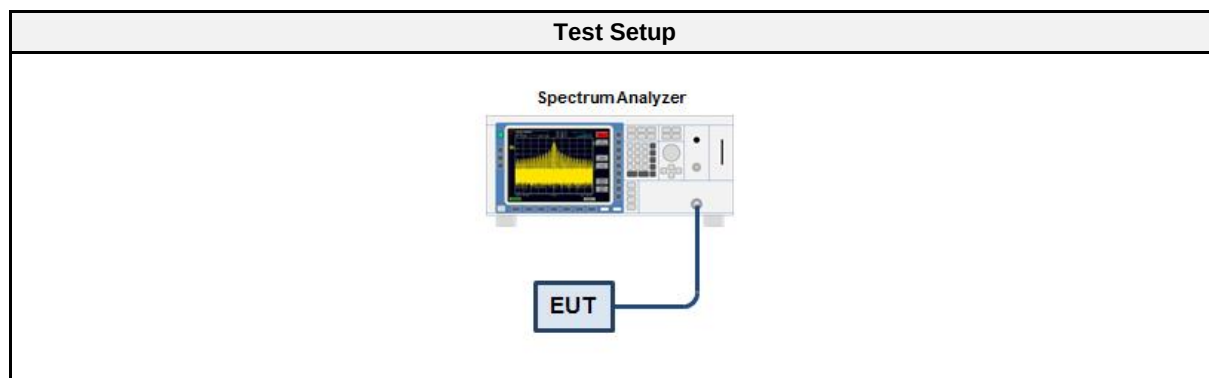

3.3.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-04	2018-04

3.3.5 Procedure

Test Procedure
1. EUT set to test hopping mode (Communication tester is used if needed) 2. Analyzer resolution bandwidth is set $\geq$ DTS bandwidth 3. Detector set to peak and max hold 4. Sweep time is set to auto 5. After the trace has stabilized a marker is set to peak of envelope

3.3.6 Results

Test Results				
Channel [MHz]	Power [dBm]	Power [W]	Limit [W]	Verdict
2402	-1.765	0.000666	1.0	PASS
2440	-1.234	0.000753	1.0	PASS
2480	-1.519	0.000705	1.0	PASS

3.4 Test Conditions and Results - Power spectral density


3.4.1 Information

Test Information	
Reference	FCC 15.247(e) / ISED RSS-247 5.2
Measurement Method	ANSI C63.10 11.10.2, 14.3.2
Operator	Toralf Jahn
Date	2017-04-25

3.4.2 Limits

Limits
8 dBm / 3 kHz

3.4.3 Setup

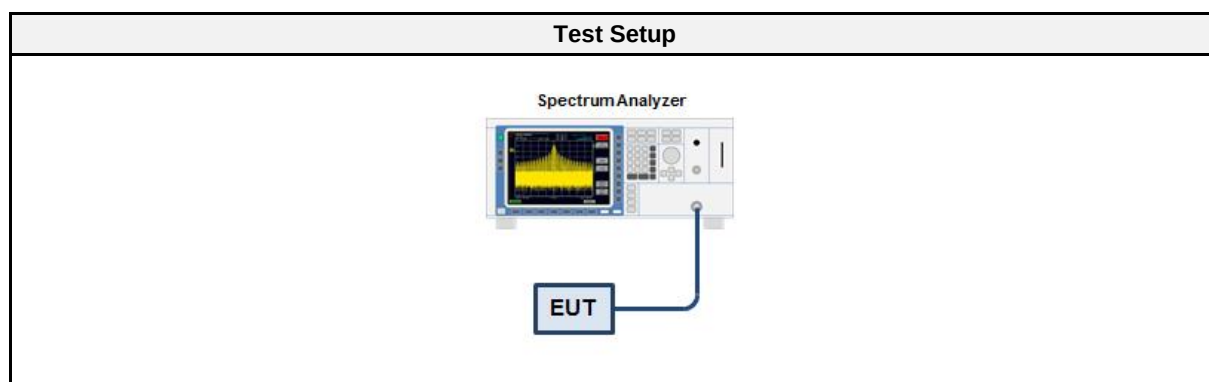

3.4.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-04	2018-04

3.4.5 Procedure

Test Procedure
1. EUT set to test mode 2. The analyzer is set to DTS channel center frequency with a span of 1.5 times the DTS bandwidth 3. The RBW is set to 100 kHz with VBW $\geq$ RBW and the detector is set to peak with max hold 4. After the trace has stabilized a marker is set to the envelope maximum 5. If the power spectral density is above the limit the RBW is reduced (not lower than 3 kHz) and the measurement is repeated 6. If the EUT has more than one transmit chain the procedure is repeated for each transmit chain


3.4.6 Results

Test Results			
Channel [MHz]	PSD [dBm/RBW]	Limit [dBm/3kHz]	Verdict
2402	-2.073	8.0	PASS
2440	-1.556	8.0	PASS
2480	-1.842	8.0	PASS
RBW = 100 kHz			

PSD conducted – 2402 MHz

Peak Power Spectral Density

Project Number: G0M-1702-6283
 Applicant: Panasonic Industrial Devices Europe GmbH
 Model Description: Bluetooth Module
 Model: ENW89848A1KF
 Test Sample ID: 12564
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: T. Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-04-25
 Peak Frequency [MHz]: 2401.997
 Spectral Density [dBm/RBW]: -2.073
 Resolution Bandwidth [kHz]: 100 kHz

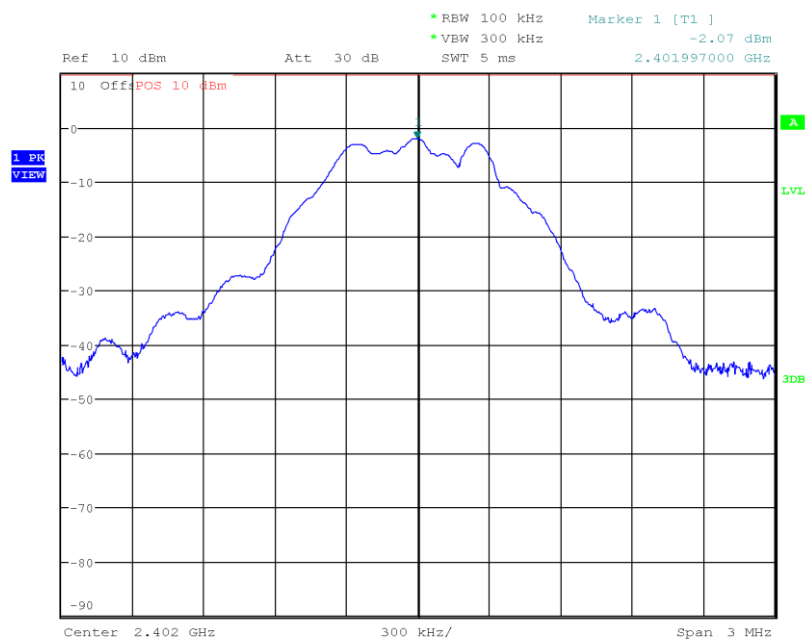


Date: 25.APR.2017 15:04:38

PSD conducted – 2440 MHz

Peak Power Spectral Density

Project Number: G0M-1702-6283
 Applicant: Panasonic Industrial Devices Europe GmbH
 Model Description: Bluetooth Module
 Model: ENW89848A1KF
 Test Sample ID: 12564
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: T. Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-04-25
 Peak Frequency [MHz]: 2439.991
 Spectral Density [dBm/RBW]: -1.556
 Resolution Bandwidth [kHz]: 100 kHz

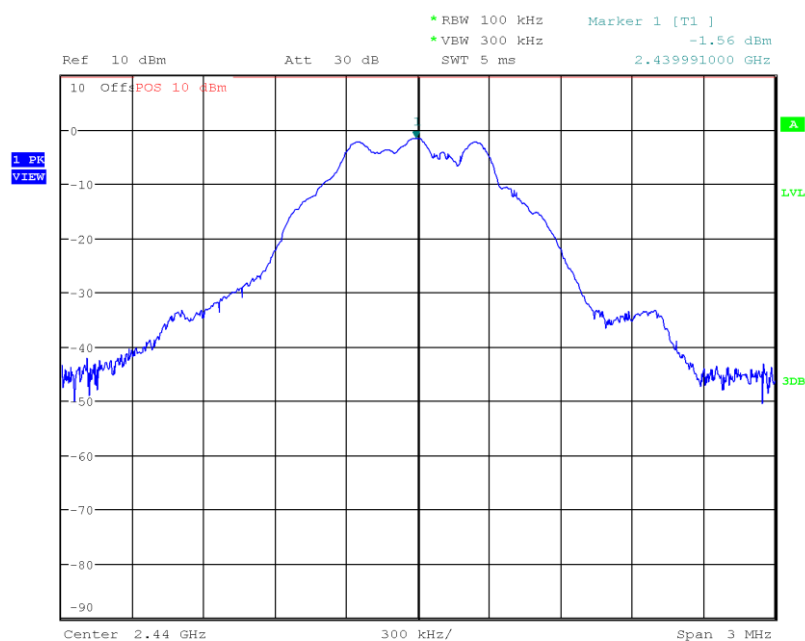


Date: 25.APR.2017 15:05:45

PSD conducted – 2480 MHz

Peak Power Spectral Density

Project Number: G0M-1702-6283
 Applicant: Panasonic Industrial Devices Europe GmbH
 Model Description: Bluetooth Module
 Model: ENW89848A1KF
 Test Sample ID: 12564
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: T. Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-04-25
 Peak Frequency [MHz]: 2480.000
 Spectral Density [dBm/RBW]: -1.842
 Resolution Bandwidth [kHz]: 100 kHz

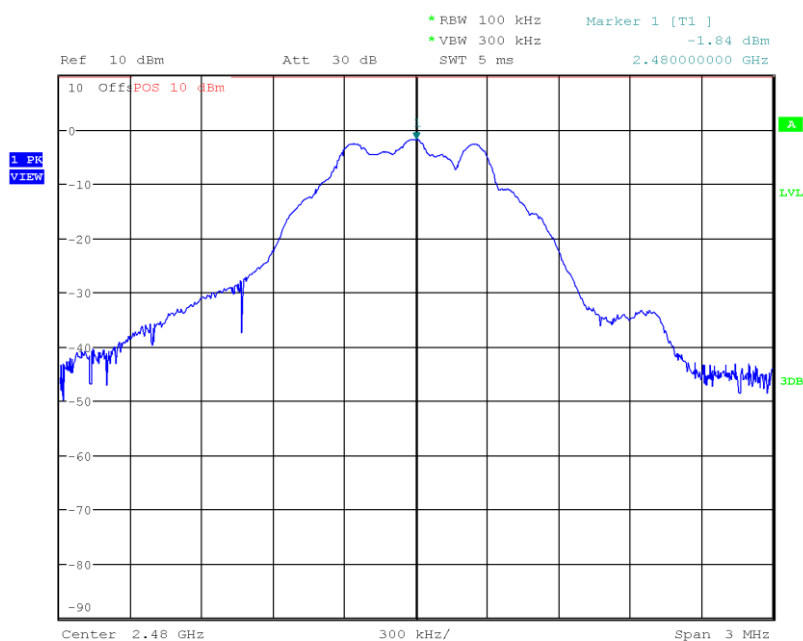

Date: 25.APR.2017 15:06:52

3.5 Test Conditions and Results - AC powerline conducted emissions

3.5.1 Information


Test Information	
Reference	FCC 15.207
Measurement Method	ANSI C63.10 6.2
Operator	Toralf Jahn
Date	2017-05-13

3.5.2 Limits

Limits		
Frequency [MHz]	Quasi-Peak [dBμV]	Average [dBμV]
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5	56	46
5 - 30	60	50

* Limit decreases linearly with the logarithm of the frequency

3.5.3 Setup

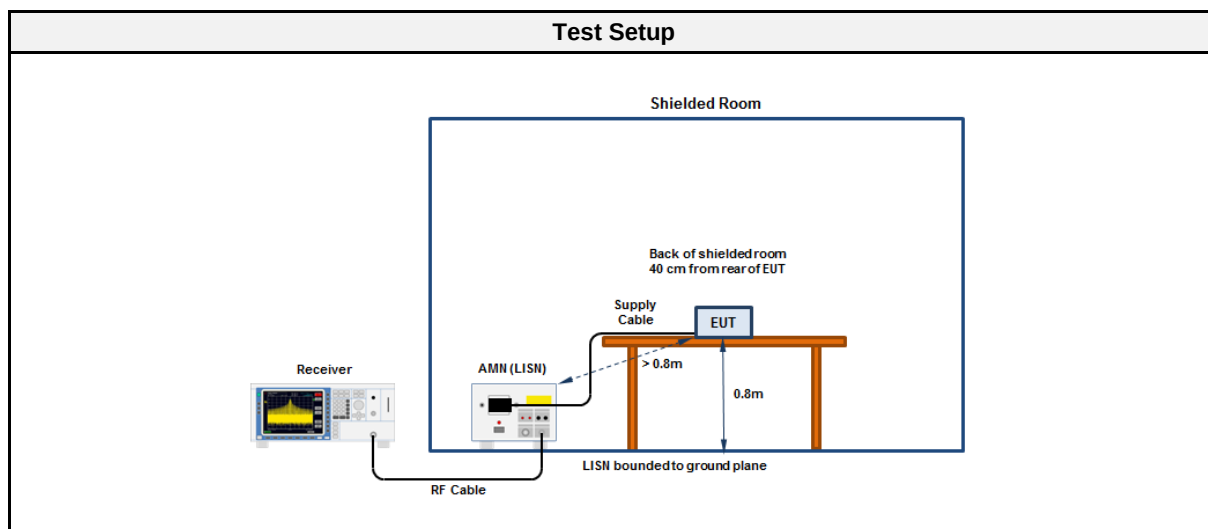

3.5.4 Equipment


Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
EMI Receiver	R&S	ESU 26	EF00241	2016-04	2018-04
LISN	R&S	ESH3-Z5	EF00036	2017-01	2019-01

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Unom: 120 VAC
LISN: ESH2-Z5 N
Mode: Tx; 2440 MHz
Test Date: 2017-05-13
Note:

Index 2

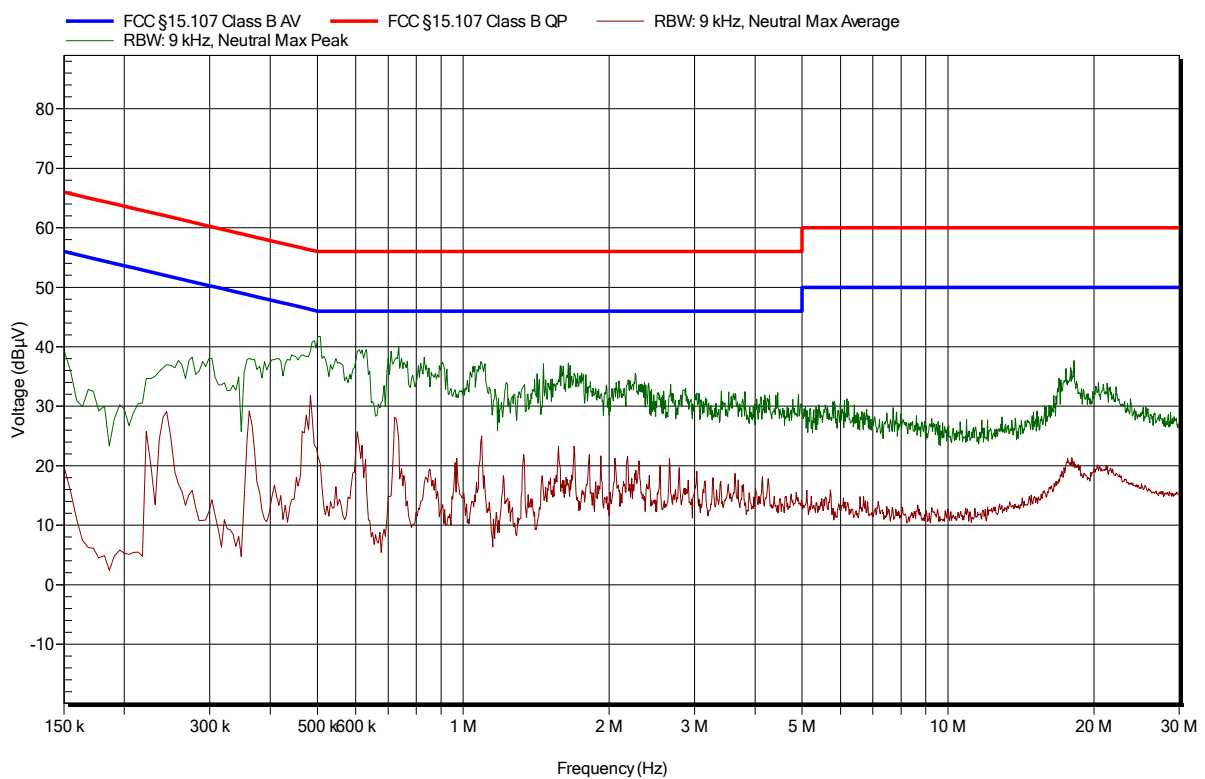


EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Unom: 120 VAC
LISN: ESH2-Z5 L
Mode: Tx; 2440 MHz
Test Date: 2017-05-13
Note:

Index 1

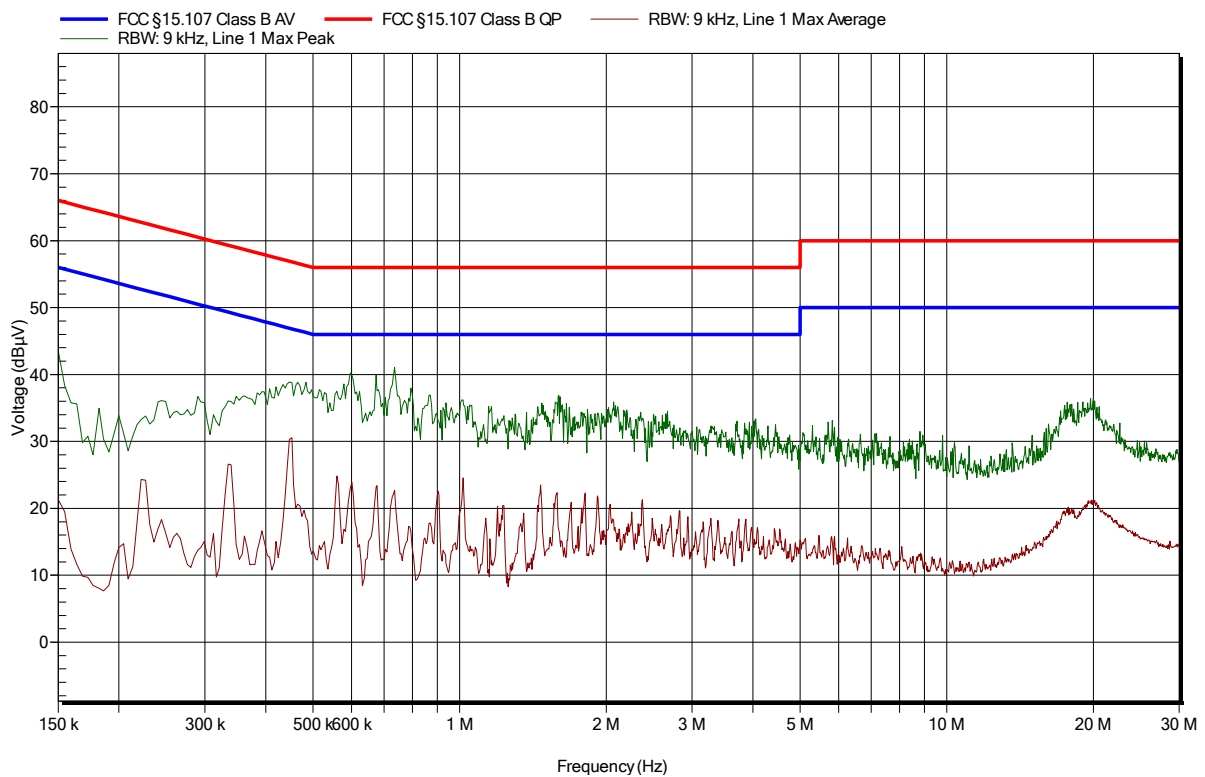

3.6 Test Conditions and Results - Band-edge compliance


3.6.1 Information

Test Information	
Reference	FCC 15.247(d) / ISED RSS-247 5.5
Measurement Method	ANSI C63.10 11.13
Operator	Toralf Jahn
Date	2017-04-25

3.6.2 Limits

Limits	
Power Measurement	Out-of-band attenuation [dB]
Peak	20
RMS	30

3.6.3 Setup

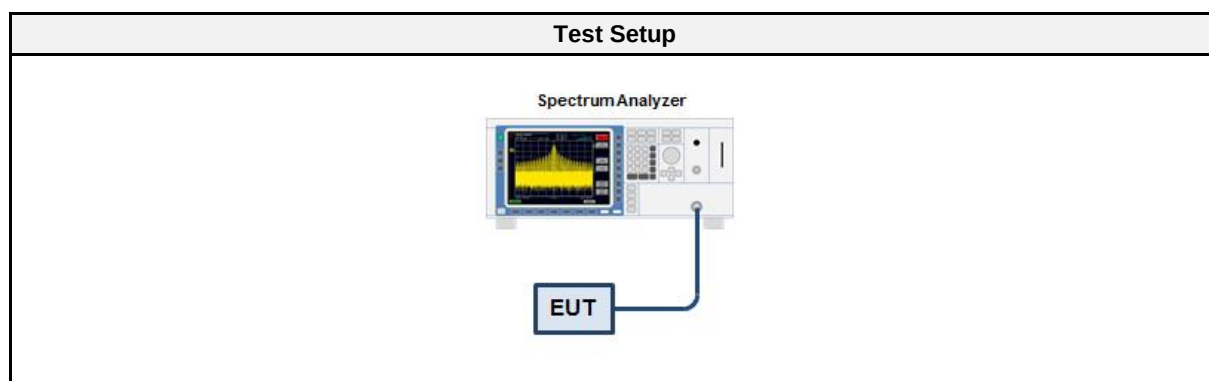

3.6.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-04	2018-04

3.6.5 Procedure

Test Procedure
1. EUT set to test mode (Communication tester is used if needed) 2. Span set around lower band edge and detector is set to peak and max hold 3. Resolution bandwidth is set to 100 kHz 4. Markers are set to peak emission levels within frequency band and outside frequency band 5. Band edge attenuation is determined from level difference


3.6.6 Results

Test Results				
Mode	Channel [MHz]	Out-of-band Attenuation [dB]	Limit [dB]	Verdict
GFSK	2402	-40.27	-20	PASS
GFSK	2480	-45.55	-20	PASS

Band-edge compliance - GFSK - 2402 MHz

Band-edge Compliance

Project Number: G0M-1702-6283
 Applicant: Panasonic Industrial Devices Europe GmbH
 Model Description: Bluetooth Module
 Model: ENW89848A1KF
 Test Sample ID: 12564
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: T. Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-04-25
 Band-edge: Lower
 In-band Frequency [MHz]: 2401.984
 Max. in-band Level [dBm/100 kHz]: -2.128
 Out-of-band Frequency [MHz]: 2399.904
 Max. out-of-band Level [dBm/100 kHz]: -42.395
 Attenuation [dB]: -40.27

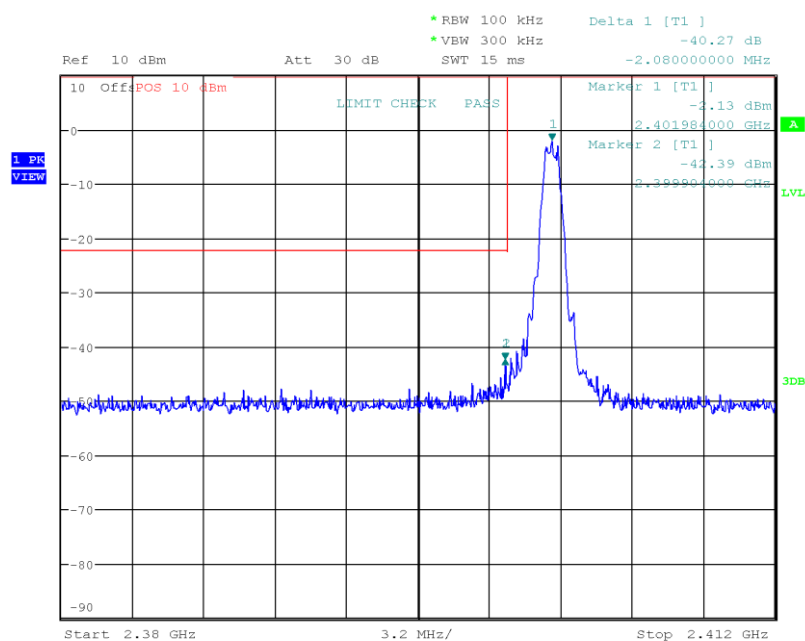


Date: 25.APR.2017 15:09:56

Band-edge compliance - GFSK - 2480 MHz

Band-edge Compliance

Project Number: G0M-1702-6283
 Applicant: Panasonic Industrial Devices Europe GmbH
 Model Description: Bluetooth Module
 Model: ENW89848A1KF
 Test Sample ID: 12564
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: T. Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-04-26
 Band-edge: Upper
 In-band Frequency [MHz]: 2479.975
 Max. in-band Level [dBm/100 kHz]: -1.885
 Out-of-band Frequency [MHz]: 2492.645
 Max. out-of-band Level [dBm/100 kHz]: -47.431
 Attenuation [dB]: -45.55

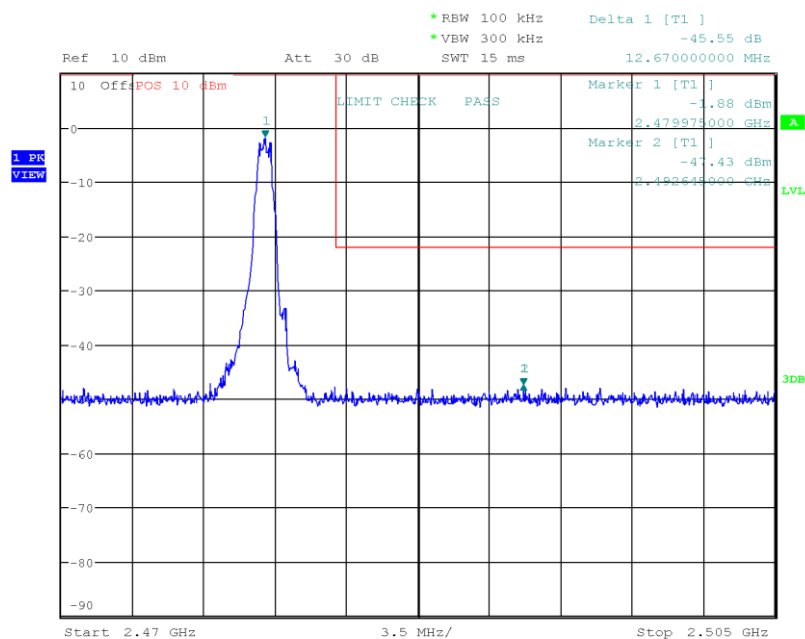

Date: 26.APR.2017 10:57:01

3.7 Test Conditions and Results - Conducted spurious emissions


3.7.1 Information

Test Information	
Reference	FCC 15.247(d) / ISSED RSS-247 5.5
Measurement Method	ANSI C63.10 11.11
Operator	Toralf Jahn
Date	2017-04-26

3.7.2 Limits

Limits	
Power Measurement	Out-of-band attenuation [dB]
Peak	20
RMS	30

3.7.3 Setup

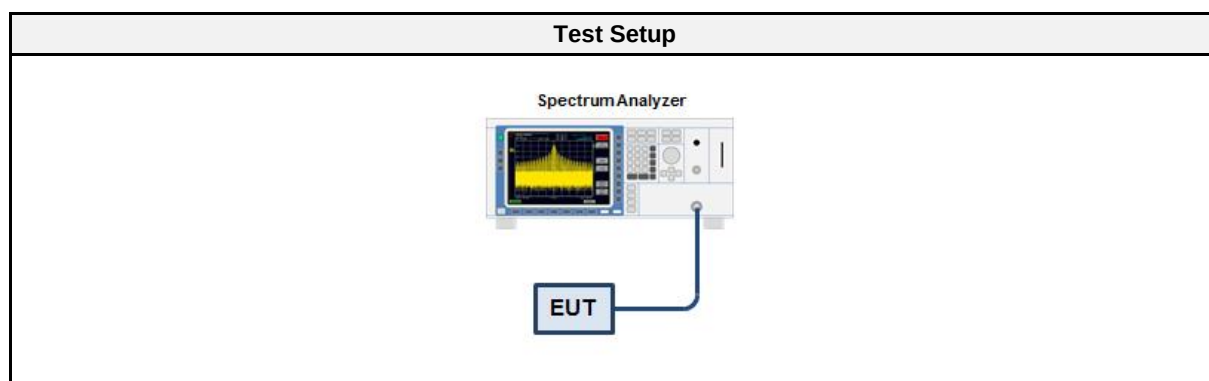

3.7.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-04	2018-04

3.7.5 Procedure

Test Procedure
1. EUT set to test mode (Communication tester is used if needed) 2. Span set around lower band edge and detector is set to peak and max hold 3. Resolution bandwidth is set to 100 kHz 4. Markers are set to peak emission levels within frequency band and outside frequency band 5. Band edge attenuation is determined from level difference

3.7.6 Results

Test Results		
Mode	Channel [MHz]	Verdict
GFSK	2402	PASS
GFSK	2440	PASS
GFSK	2480	PASS


Test Report No.: G0M-1702-6283-TFC247BL-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

CSE - GFSK - 2402 MHz

Conducted Spurious Emissions

Project Number: G0M-1702-6283
 Applicant: Panasonic Industrial Devices Europe GmbH
 Model Description: Bluetooth Module
 Model: ENW89848A1KF
 Test Sample ID: 12564
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 0, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: T. Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-04-26
 Max. in-band Frequency [MHz]: 2402.0
 Max. in-band Level [dBm/100 kHz]: -1.5
 Out-of-band Limit [dBm/100 kHz]: -21.5

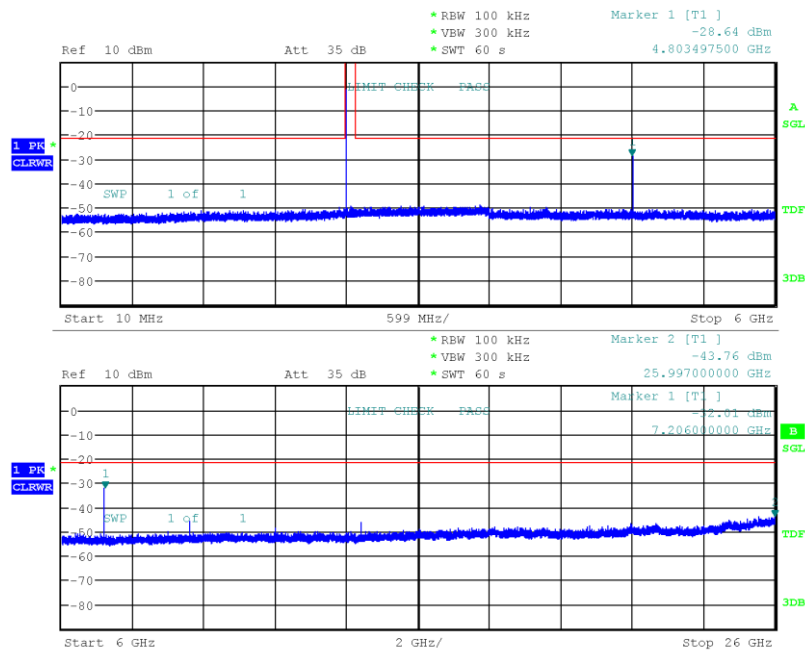


Date: 26.APR.2017 11:11:27

CSE - GFSK - 2440 MHz

Conducted Spurious Emissions

Project Number: G0M-1702-6283
 Applicant: Panasonic Industrial Devices Europe GmbH
 Model Description: Bluetooth Module
 Model: ENW89848A1KF
 Test Sample ID: 12564
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 19, 2440 MHz
 Operating Conditions: Tnom/Vnom
 Operator: T. Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-04-26
 Max. in-band Frequency [MHz]: 2440.0
 Max. in-band Level [dBm/100 kHz]: -1.2
 Out-of-band Limit [dBm/100 kHz]: -21.2

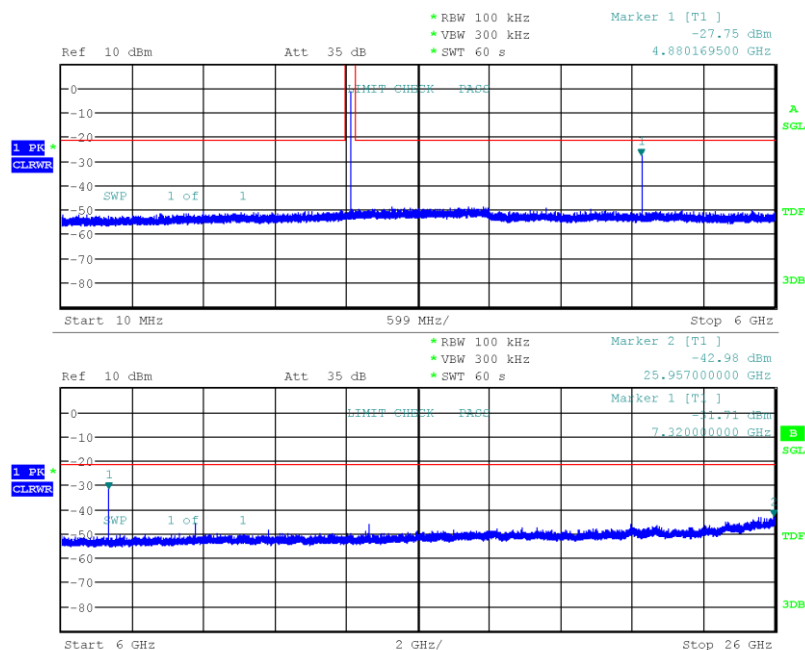


Date: 26.APR.2017 11:07:18

CSE - GFSK - 2480 MHz

Conducted Spurious Emissions

Project Number: G0M-1702-6283
 Applicant: Panasonic Industrial Devices Europe GmbH
 Model Description: Bluetooth Module
 Model: ENW89848A1KF
 Test Sample ID: 12564
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: T. Jahn
 Test Site: Eurofins Product Service GmbH
 Test Date: 2017-04-26
 Max. in-band Frequency [MHz]: 2480.0
 Max. in-band Level [dBm/100 kHz]: -1.4
 Out-of-band Limit [dBm/100 kHz]: -21.4

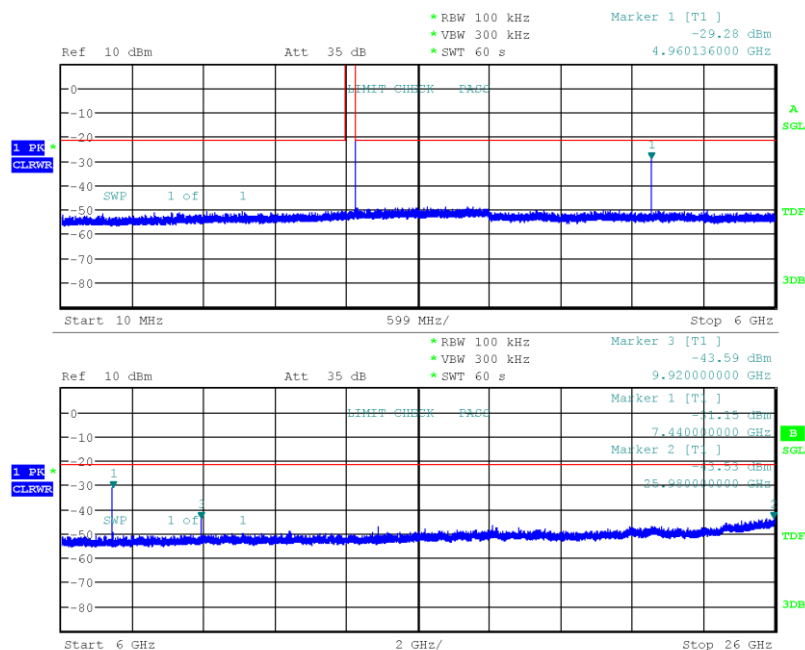

Date: 26.APR.2017 11:03:30

3.8 Test Conditions and Results - Transmitter radiated emissions


3.8.1 Information


Test Information	
Reference	FCC 15.247(d) / ISSED RSS-GEN 8.9
Measurement Method	ANSI C63.10 6.4, 6.5, 6.6, 11.12
Operator	Toralf Jahn
Date	2017-05-13

3.8.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [dB μ V/m]	Measurement distance [m]
0.009 - 0.09	Average	2400/F[kHz]	300
0.09 - 0.110	Quasi-Peak	2400/F[kHz]	300
0.110 - 0.490	Average	2400/F[kHz]	300
0.490 - 1.705	Quasi-Peak	24000/F[kHz]	30
1.705 - 30.0	Quasi-Peak	30	30
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.8.3 Setup

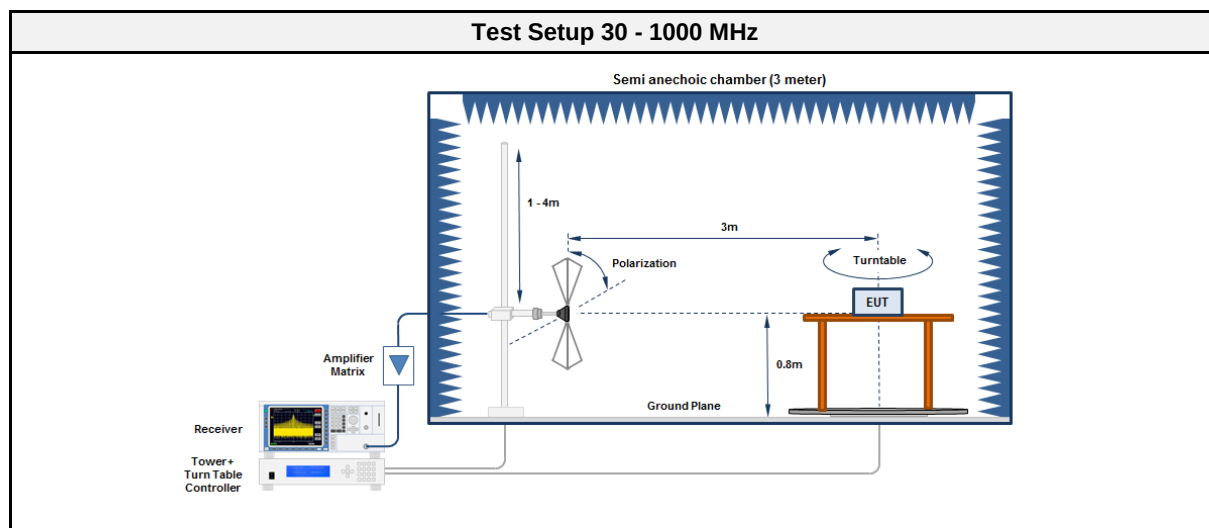

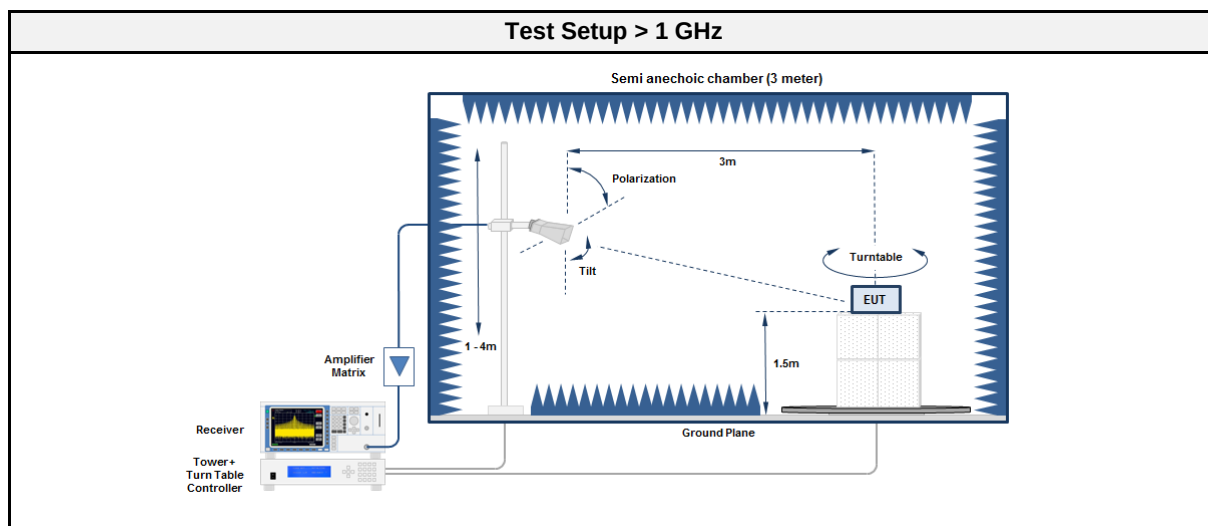

3.8.4 Equipment

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2017-02	2020-02
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2016-08	2017-08

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2017-02	2020-02
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2016-08	2017-08

3.8.5 Procedure

Test Procedure 30 - 1000 MHz	
1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector	

Test Procedure > 1 GHz	
1. EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector	

3.8.6 Results

Test Results						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
2402	4803	30.27	avg	hor	54.00	-23.73
2440	7319	41.13	avg	hor	54.00	-12.87
2440	12200	38.51	avg	hor	54.00	-15.49
2480	7439	42.82	avg	hor	54.00	-11.18
2480	7440	39.57	avg	ver	54.00	-14.43

3.9 Test Conditions and Results - Receiver radiated emissions



3.9.1 Information

Test Information	
Reference	ISED RSS-247 3.1
Measurement Method	ANSI C63.10 6.5, 6.6, 11.12
Operator	Toralf Jahn
Date	2017-05-13

3.9.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [dB μ V/m]	Measurement distance [m]
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.9.3 Setup

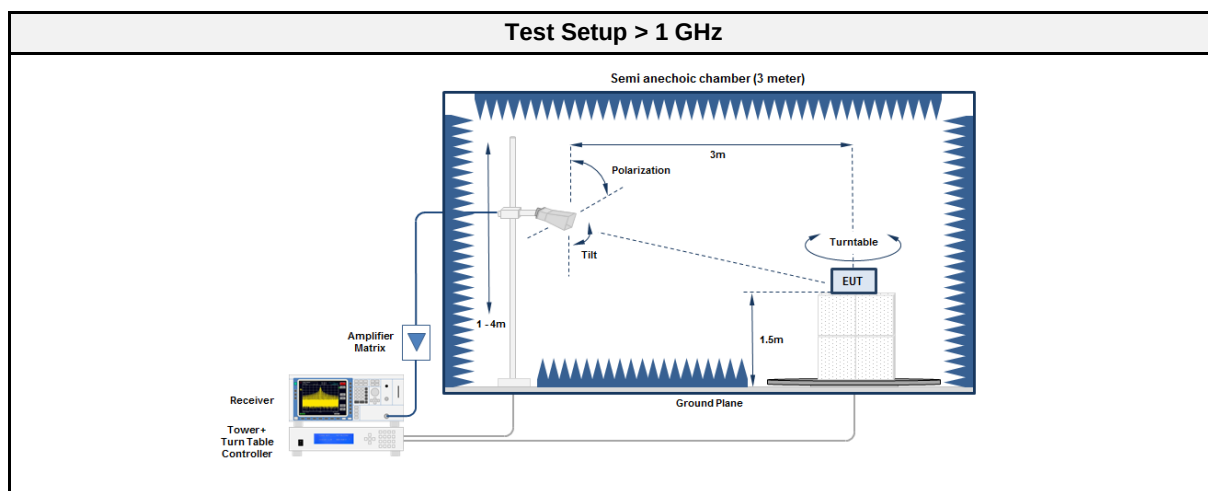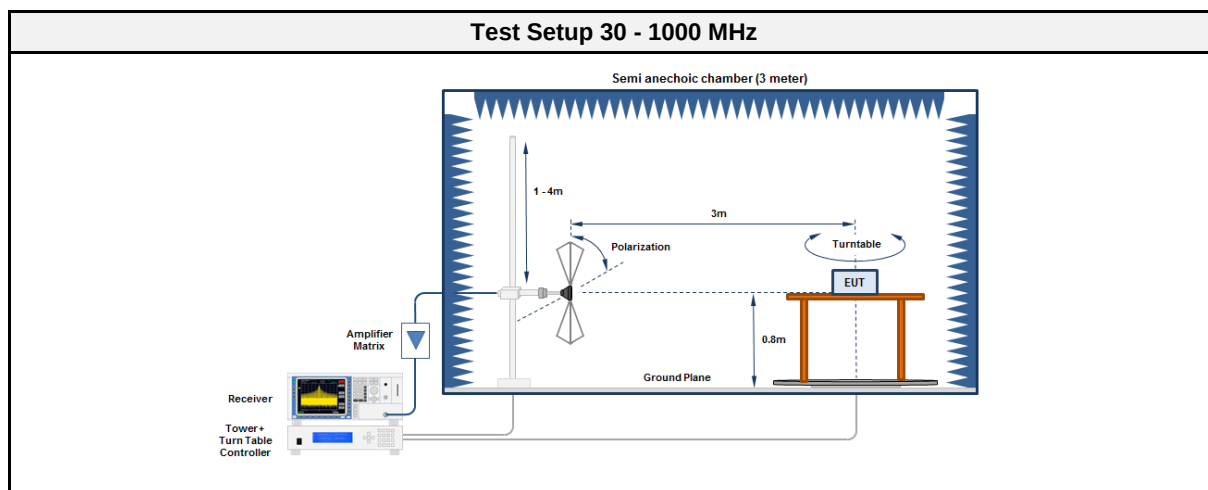

3.9.4 Equipment

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2017-02	2020-02
Measurement Receiver	R&S	N9038A-526/WXP	EF01070	2016-08	2017-08

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2017-02	2020-02
Measurement Receiver	R&S	N9038A-526/WXP	EF01070	2016-08	2017-08

3.9.5 Procedure

Test Procedure 30 - 1000 MHz	
1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector	

Test Procedure > 1 GHz	
1. EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector	

3.9.6 Results

Test Results						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
2440	44.9809	32.10	qpk	ver	40.00	-07.88
2440	99.5665	37.50	qpk	ver	43.50	-06.05
2440	232.7949	33.50	qpk	ver	46.00	-12.48


ANNEX A Transmitter sprurious emissions

Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Vnom: 5 VDC
Antenna: Rohde & Schwarz HK 116, Horizontal
Measurement distance: 3 m
Mode: TX; TX; EUT ver; 2402 MHz
Test Date: 2017-05-13
Note:

Index 29

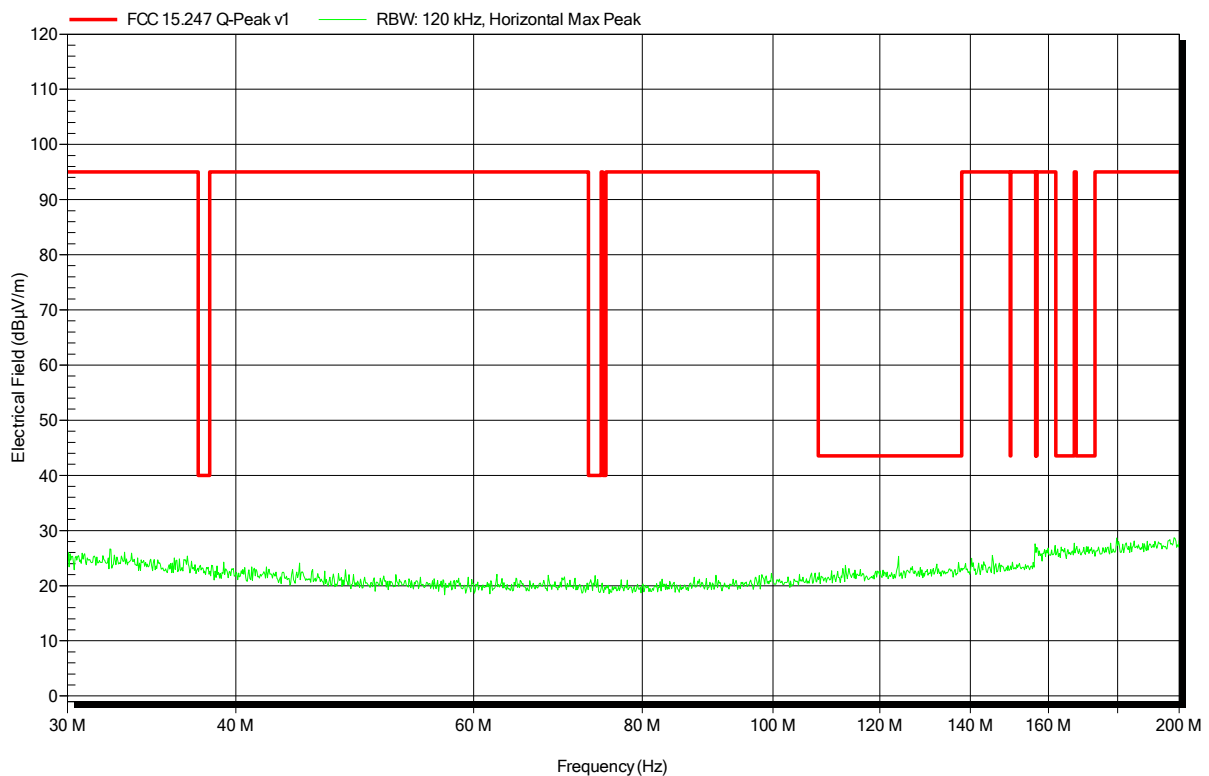


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Vnom: 5 VDC
Antenna: Rohde & Schwarz HK 116, Horizontal
Measurement distance: 3 m
Mode: TX; TX; EUT ver; 2440 MHz
Test Date: 2017-05-13
Note:

Index 30

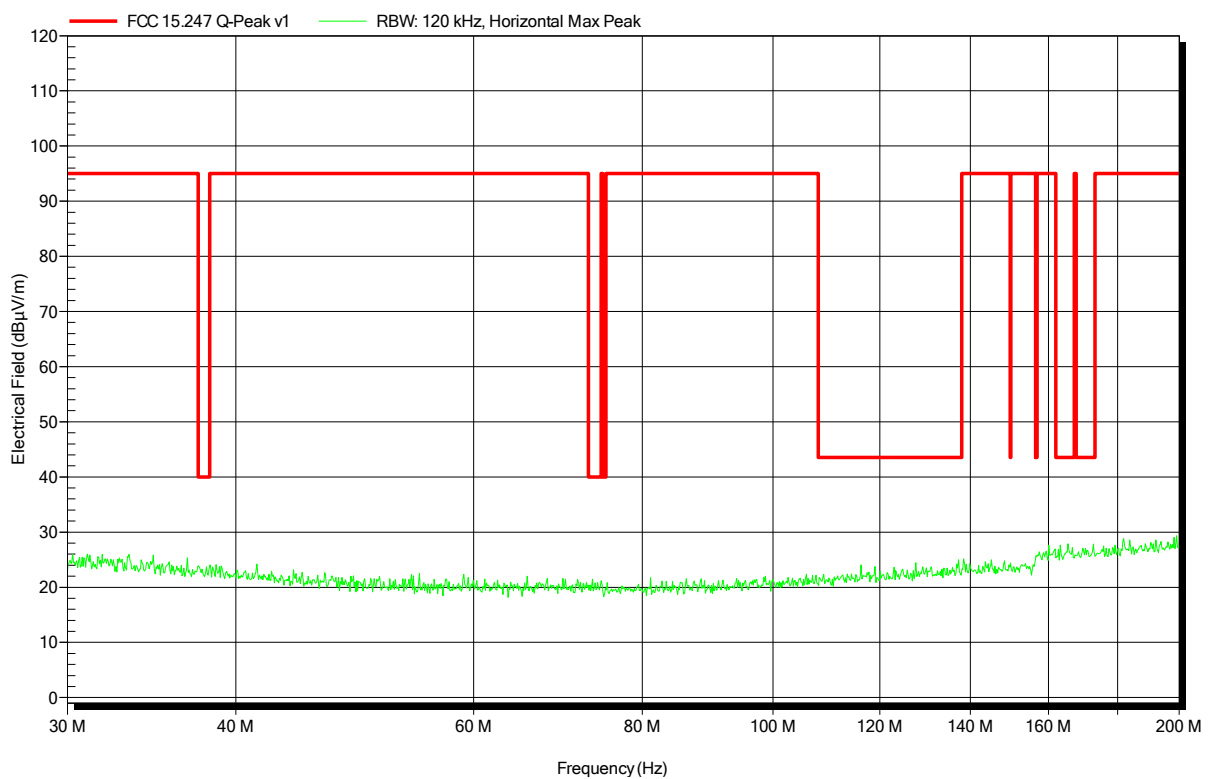


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Vnom: 5 VDC
Antenna: Rohde & Schwarz HK 116, Horizontal
Measurement distance: 3 m
Mode: TX; TX; EUT ver; 2480 MHz
Test Date: 2017-05-13
Note:

Index 31

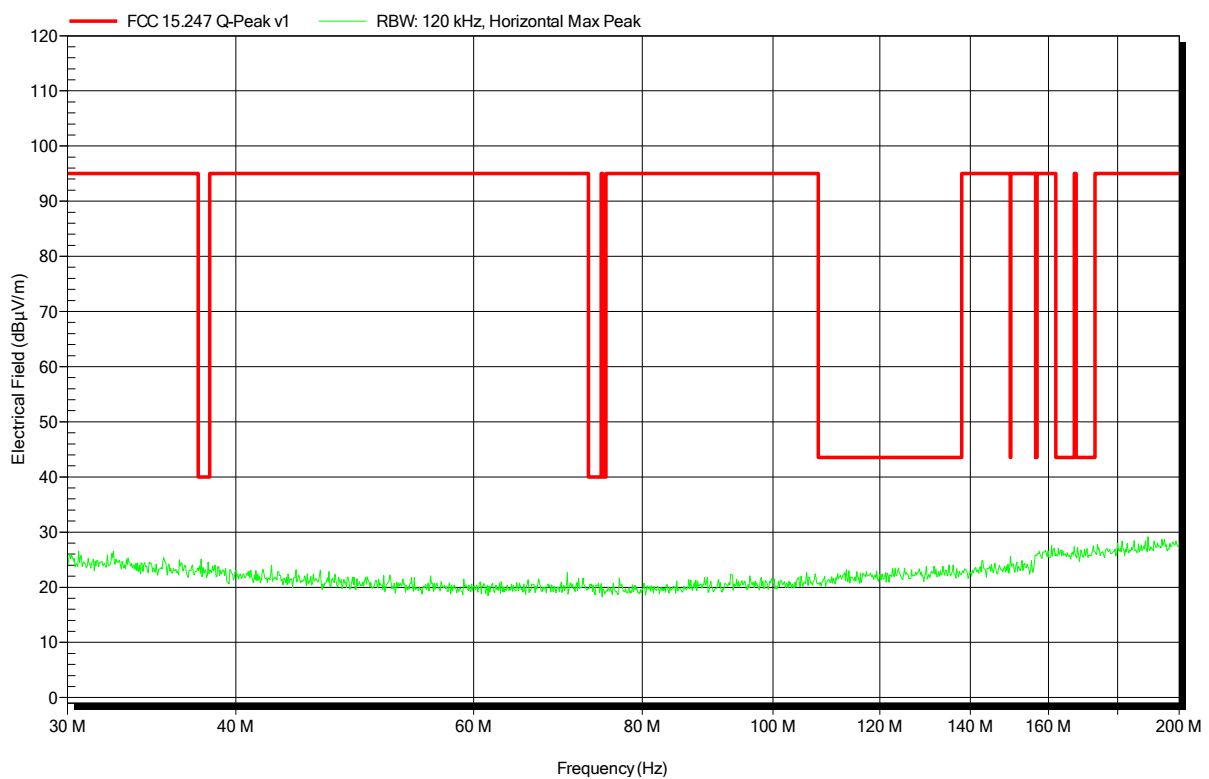


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Vnom: 5 VDC
Antenna: Rohde & Schwarz HK 116, Vertical
Measurement distance: 3 m
Mode: TX; TX; EUT ver; 2480 MHz
Test Date: 2017-05-13
Note:

Index 32

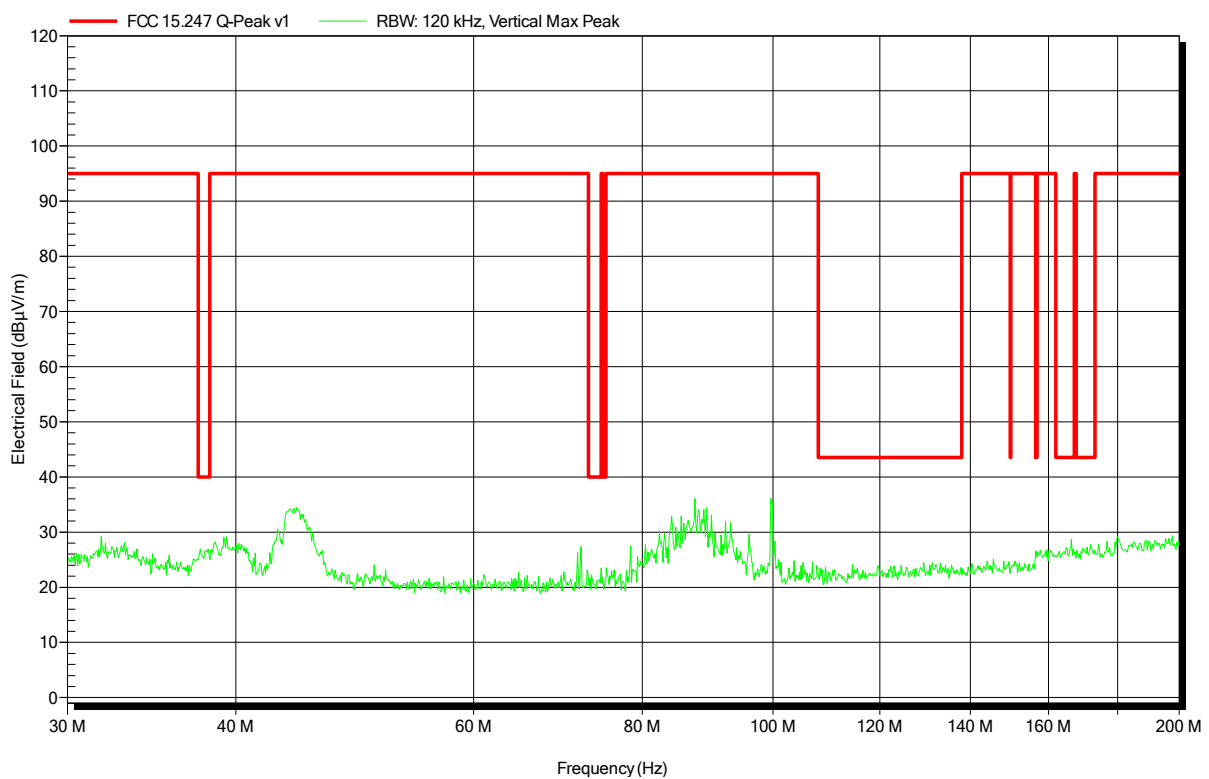


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Vnom: 5 VDC
Antenna: Rohde & Schwarz HK 116, Vertical
Measurement distance: 3 m
Mode: TX; TX; EUT ver; 2440 MHz
Test Date: 2017-05-13
Note:

Index 33

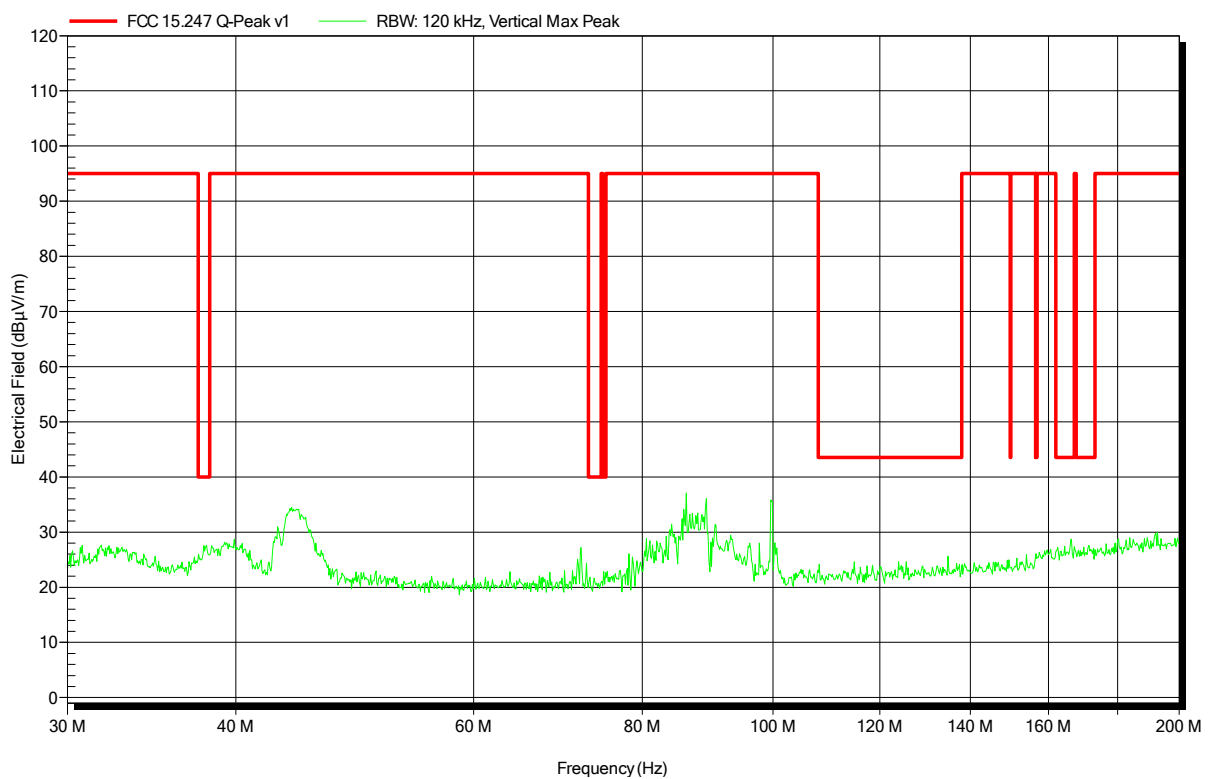


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Vnom: 5 VDC
Antenna: Rohde & Schwarz HK 116, Vertical
Measurement distance: 3 m
Mode: TX; TX; EUT ver; 2402 MHz
Test Date: 2017-05-13
Note:

Index 34

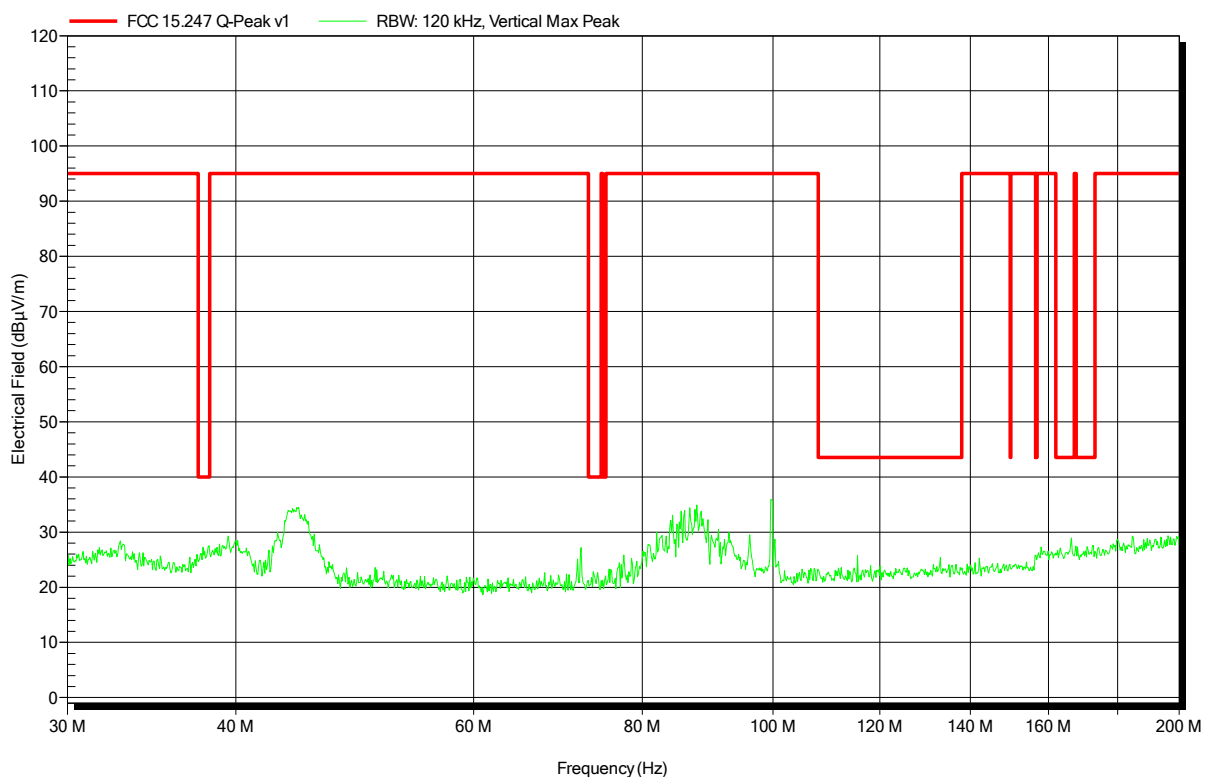


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Vnom: 5 VDC
Antenna: Rohde & Schwarz HL 223, Horizontal
Measurement distance: 3 m
Mode: TX; TX; EUT ver; 2440 MHz
Test Date: 2017-05-13
Note:

Index 37

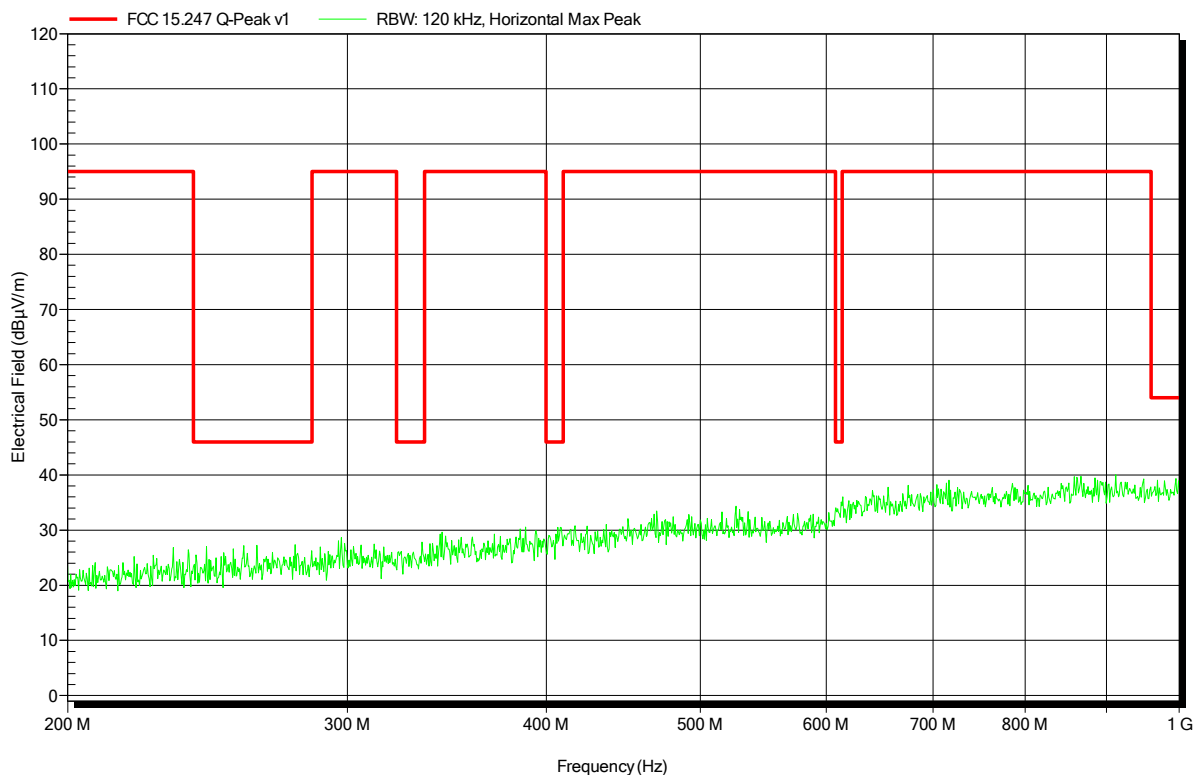


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Module
Model:	ENW89848A1KF
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Jahn
Test Conditions:	Tnom: 25°C, Vnom: 5 VDC
Antenna:	Rohde & Schwarz HL 223, Horizontal
Measurement distance:	3 m
Mode:	TX; TX; EUT ver; 2402 MHz
Test Date:	2017-05-13
Note:	

Index 38

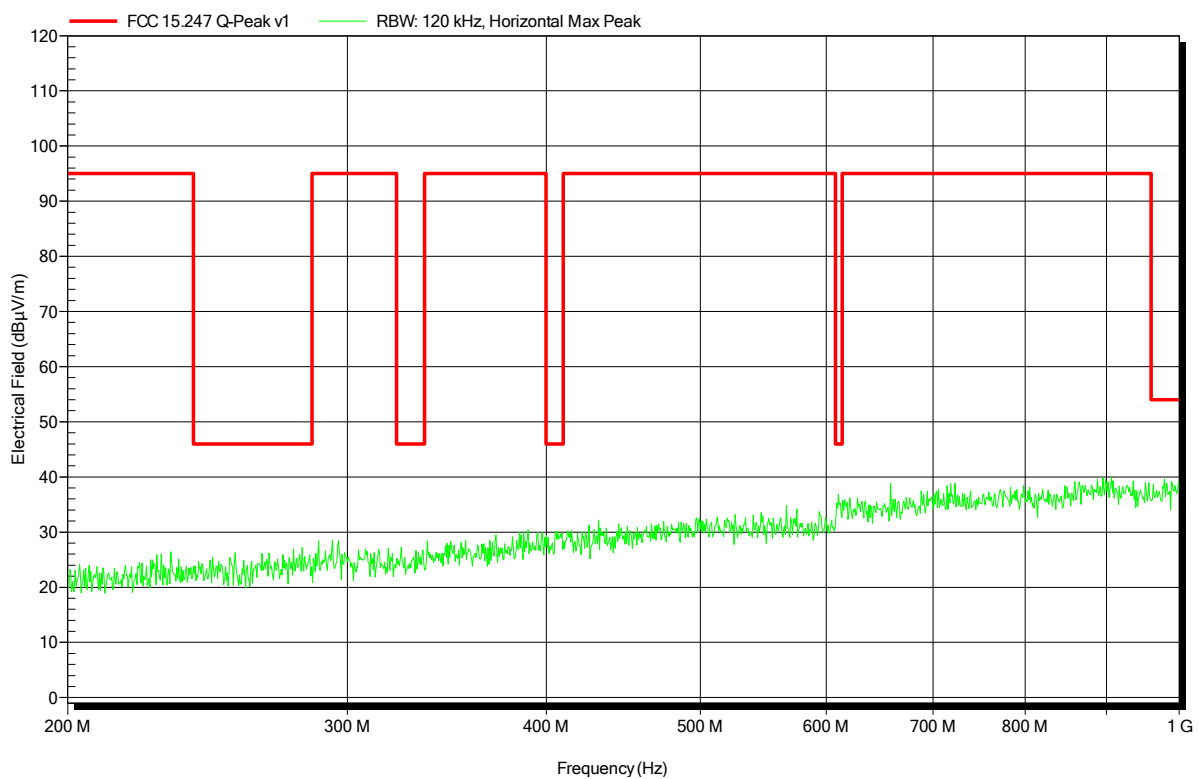


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Vnom: 5 VDC
Antenna: Rohde & Schwarz HL 223, Horizontal
Measurement distance: 3 m
Mode: TX; TX; EUT ver; 2480 MHz
Test Date: 2017-05-13
Note:

Index 39

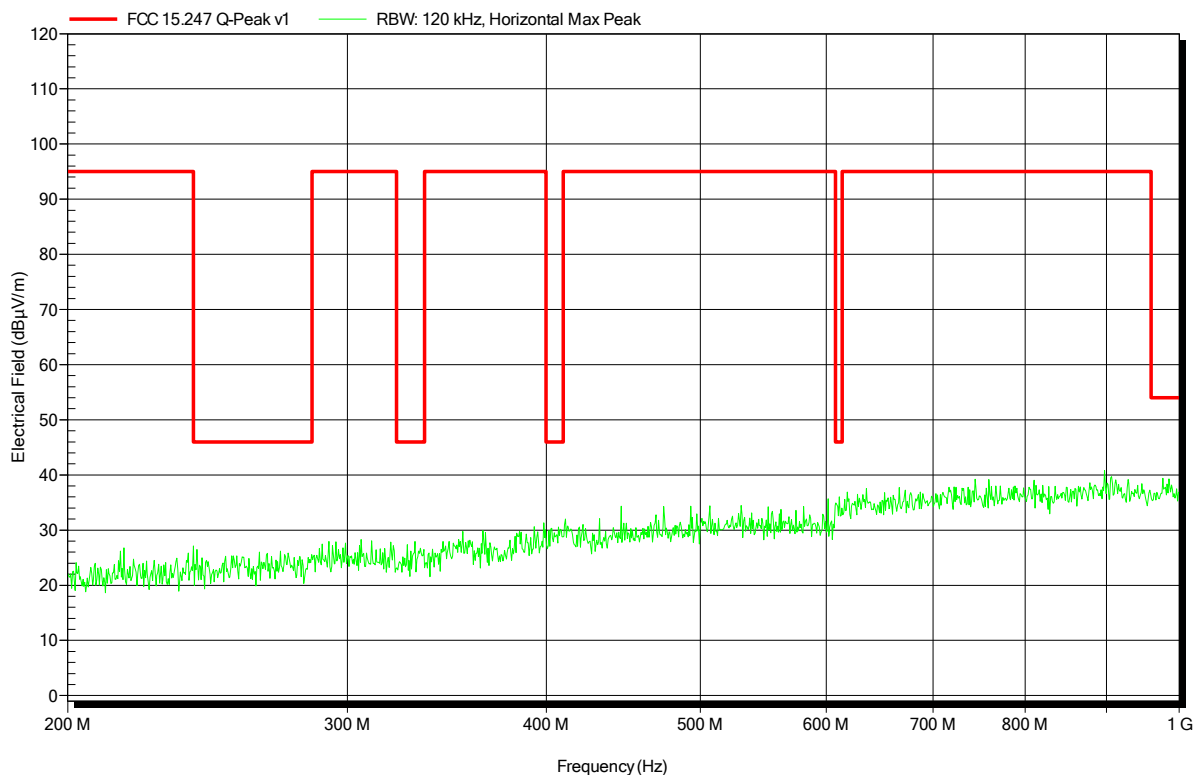


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Module
Model:	ENW89848A1KF
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Jahn
Test Conditions:	Tnom: 25°C, Vnom: 5 VDC
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3 m
Mode:	TX; TX; EUT ver; 2402 MHz
Test Date:	2017-05-13
Note:	

Index 35

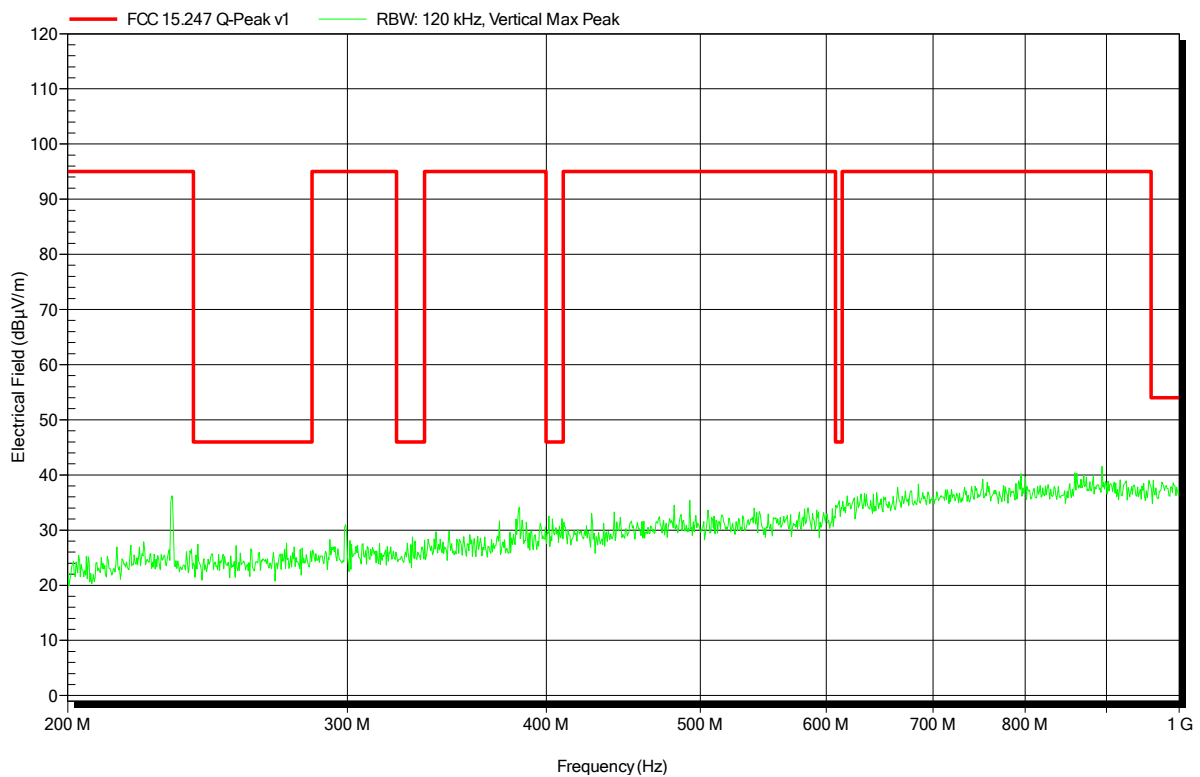


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Vnom: 5 VDC
Antenna: Rohde & Schwarz HL 223, Vertical
Measurement distance: 3 m
Mode: TX; TX; EUT ver; 2440 MHz
Test Date: 2017-05-13
Note:

Index 36

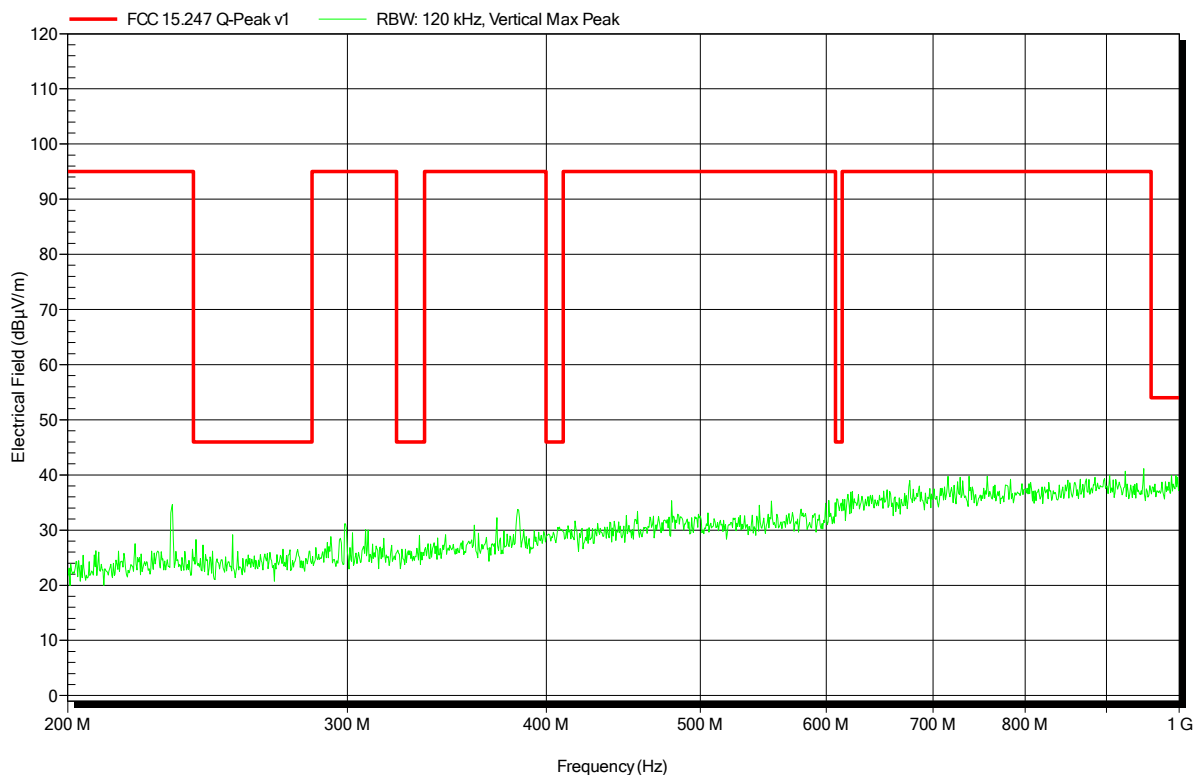


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Module
Model:	ENW89848A1KF
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Jahn
Test Conditions:	Tnom: 25°C, Vnom: 5 VDC
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3 m
Mode:	TX; TX; EUT ver; 2480 MHz
Test Date:	2017-05-13
Note:	

Index 40

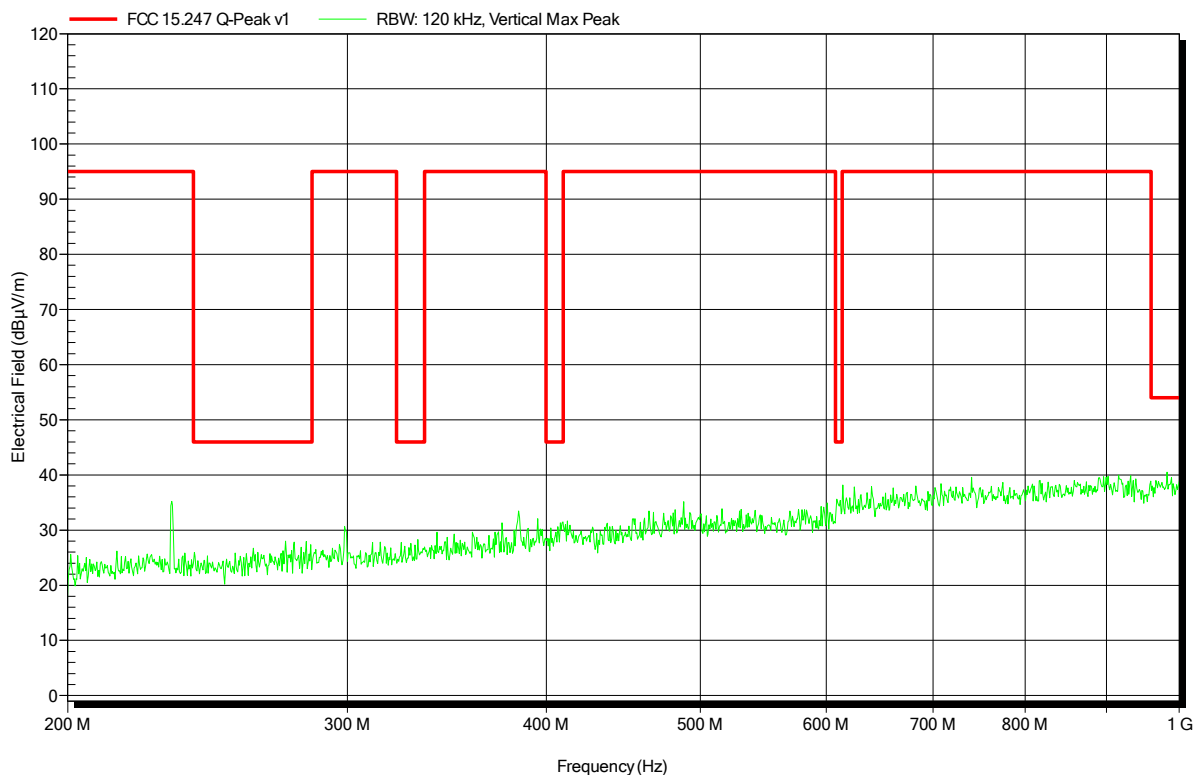


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Vnom: 5 VDC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; TX; EUT ver; 2480 MHz
Test Date: 2017-05-10
Note:

Index 10

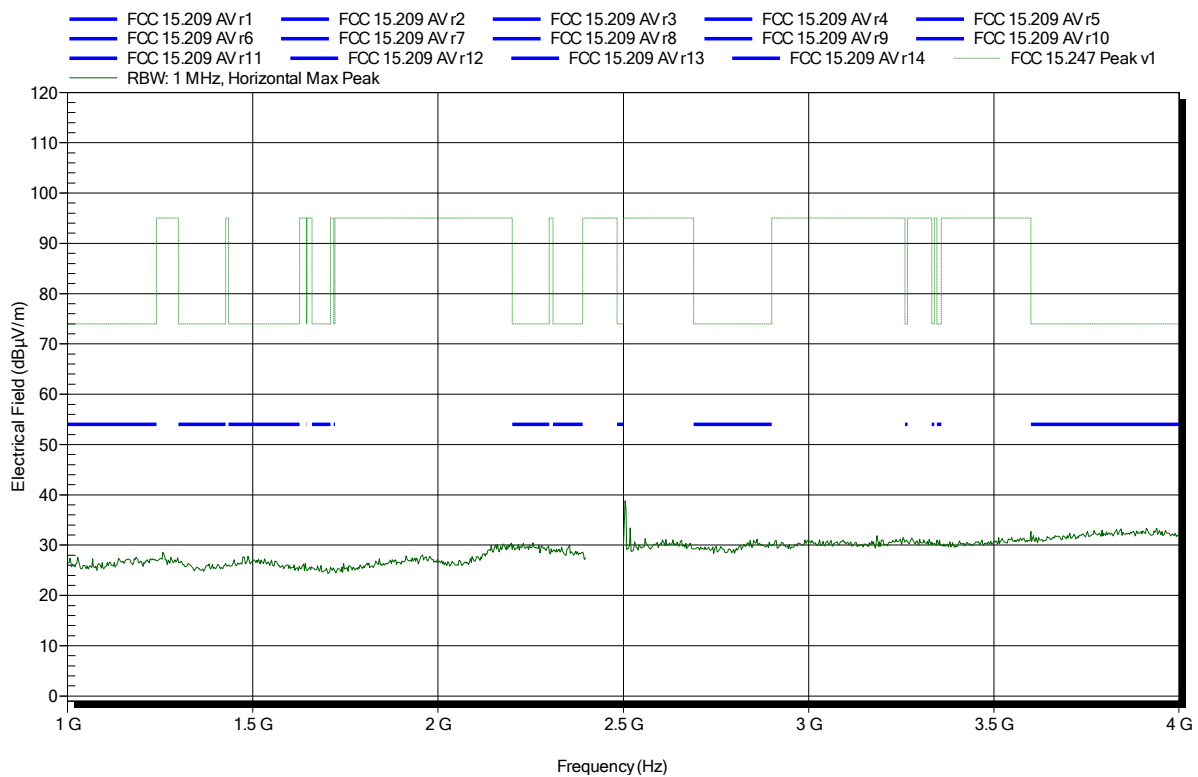


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Vnom: 5 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; TX; EUT ver; 2480 MHz
Test Date: 2017-05-10
Note:

Index 22

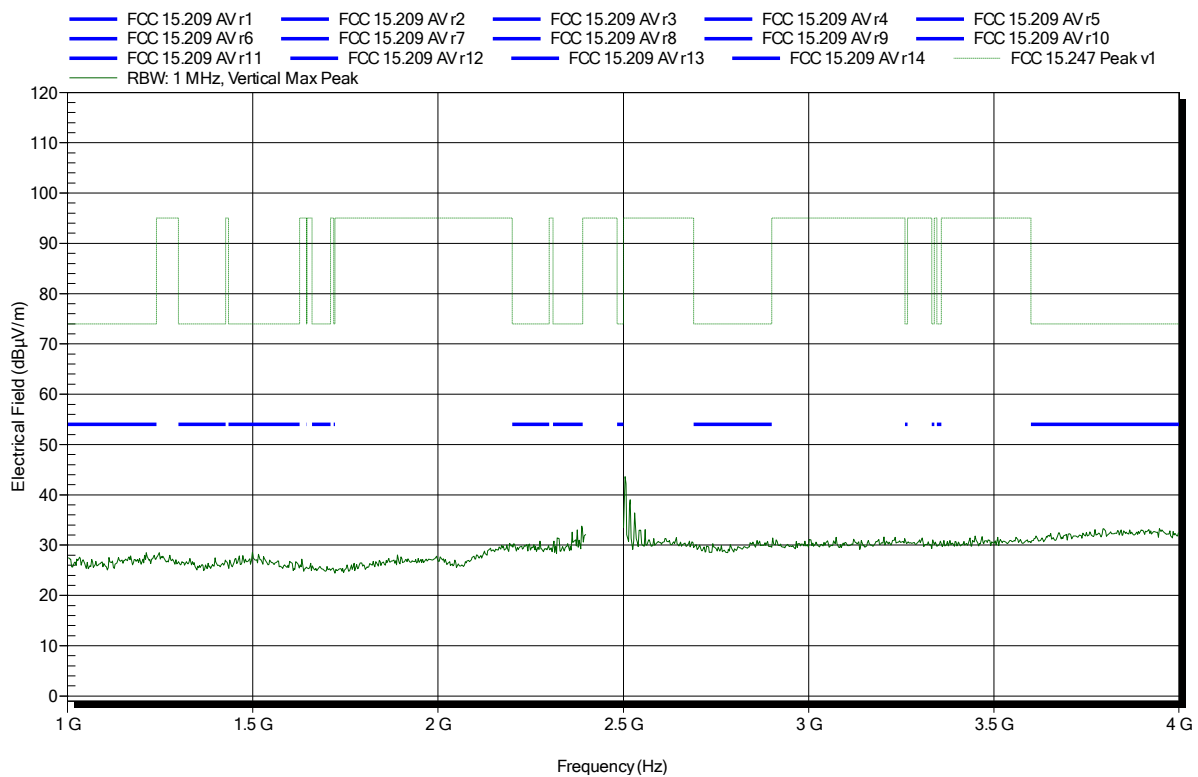


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Vnom: 5 VDC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; TX; EUT ver; 2402 MHz
Test Date: 2017-05-10
Note:

Index 1

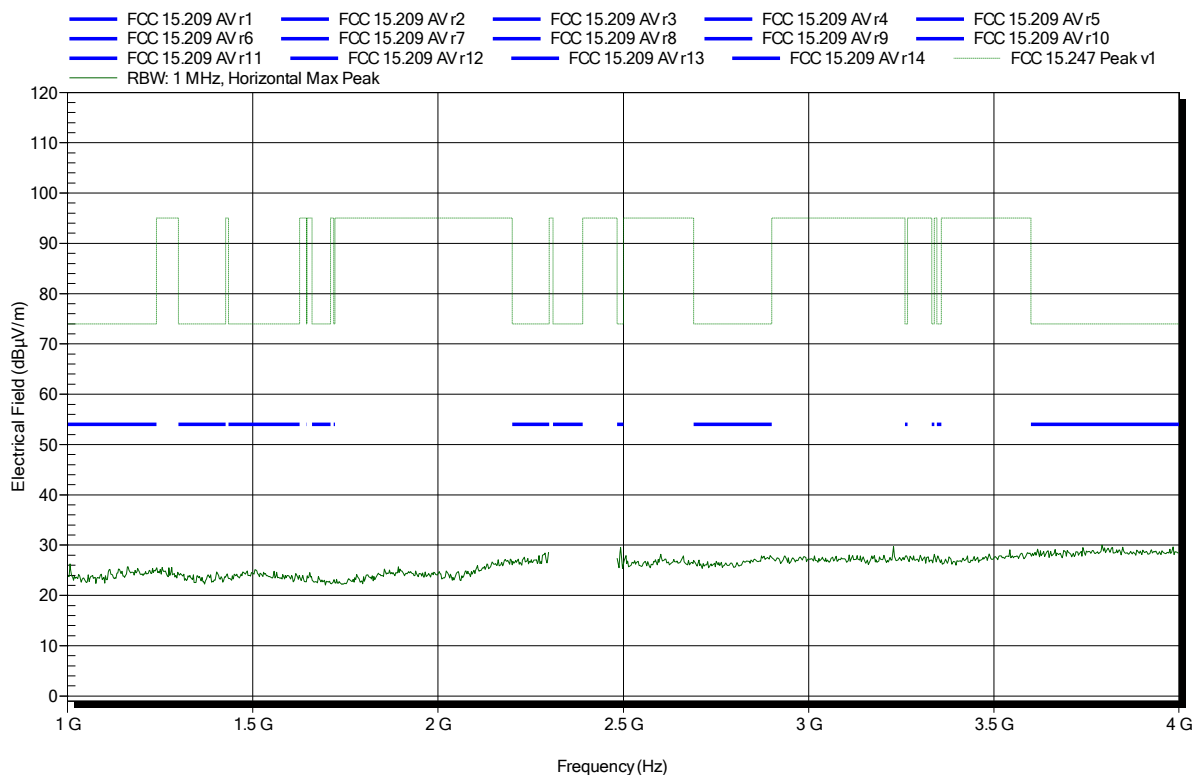


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89848A1KF
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Jahn
 Test Conditions: Tnom: 25°C, Vnom: 5 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; TX; EUT ver; 2402 MHz
 Test Date: 2017-05-10
 Note:

Index 14

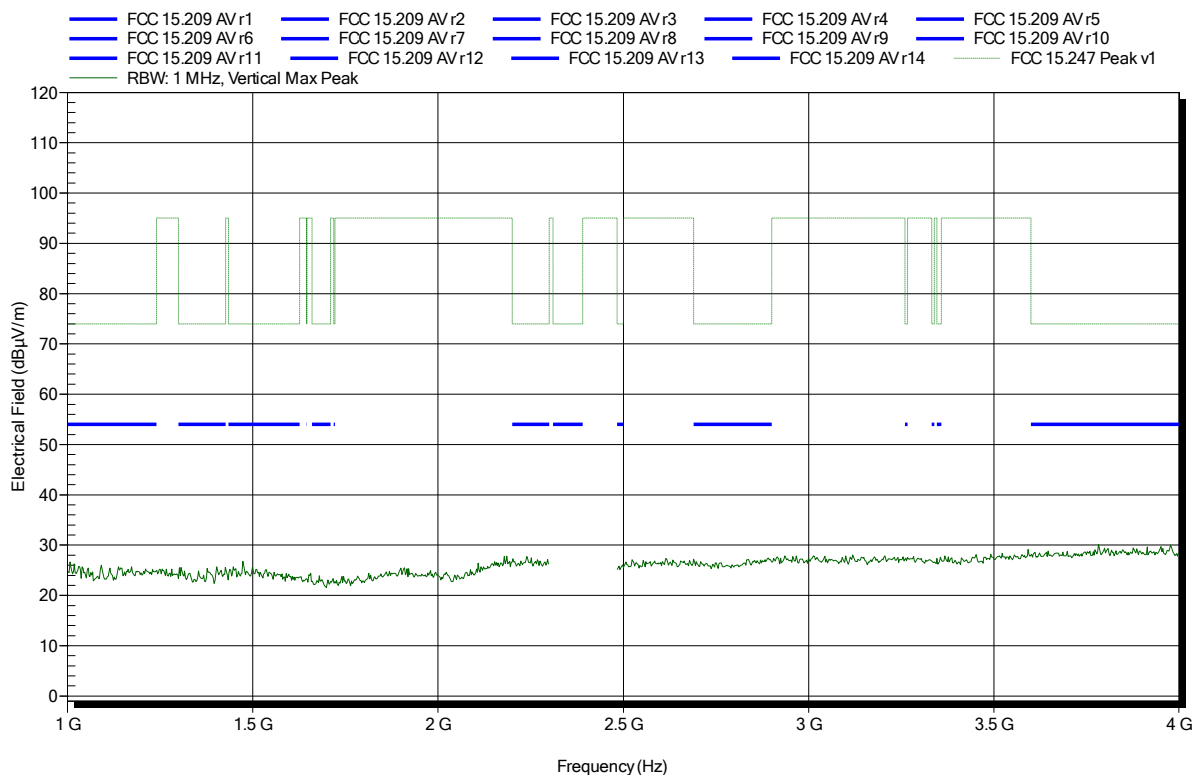


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Vnom: 5 VDC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; TX; EUT ver; 2440 MHz
Test Date: 2017-05-10
Note:

Index 5

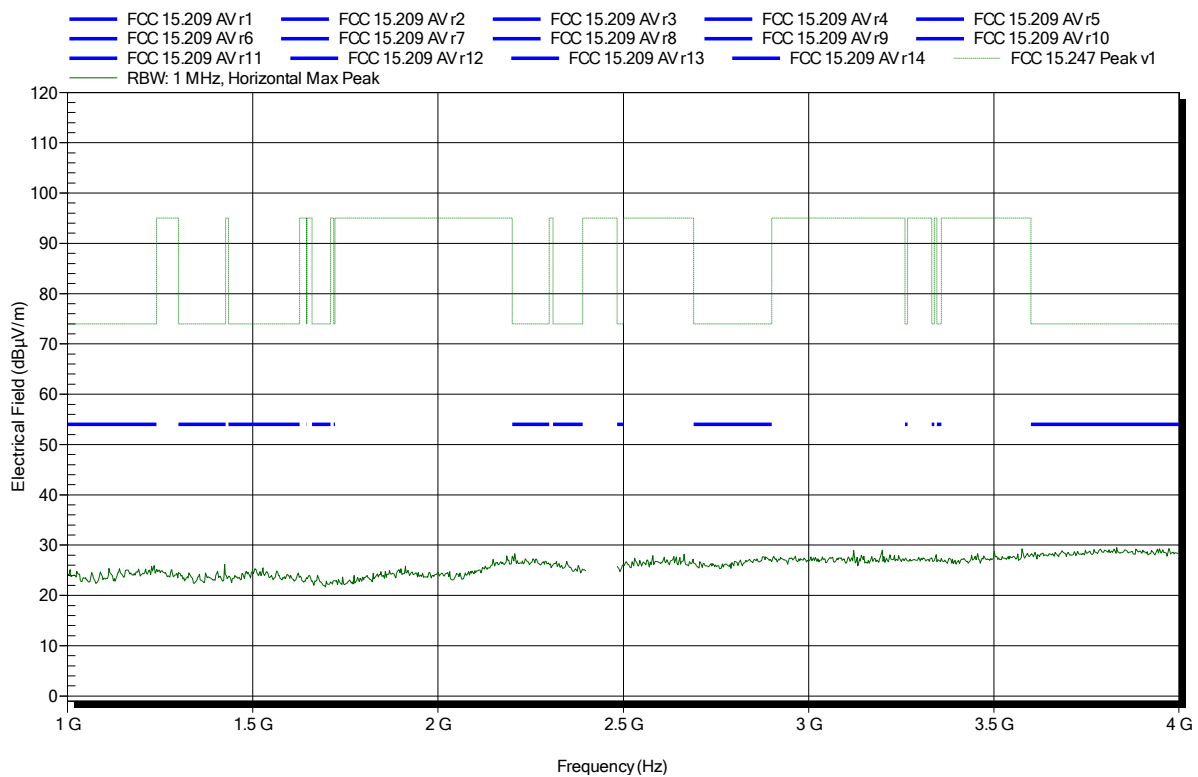


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89848A1KF
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Jahn
 Test Conditions: Tnom: 25°C, Vnom: 5 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; TX; EUT ver; 2440 MHz
 Test Date: 2017-05-10
 Note:

Index 18

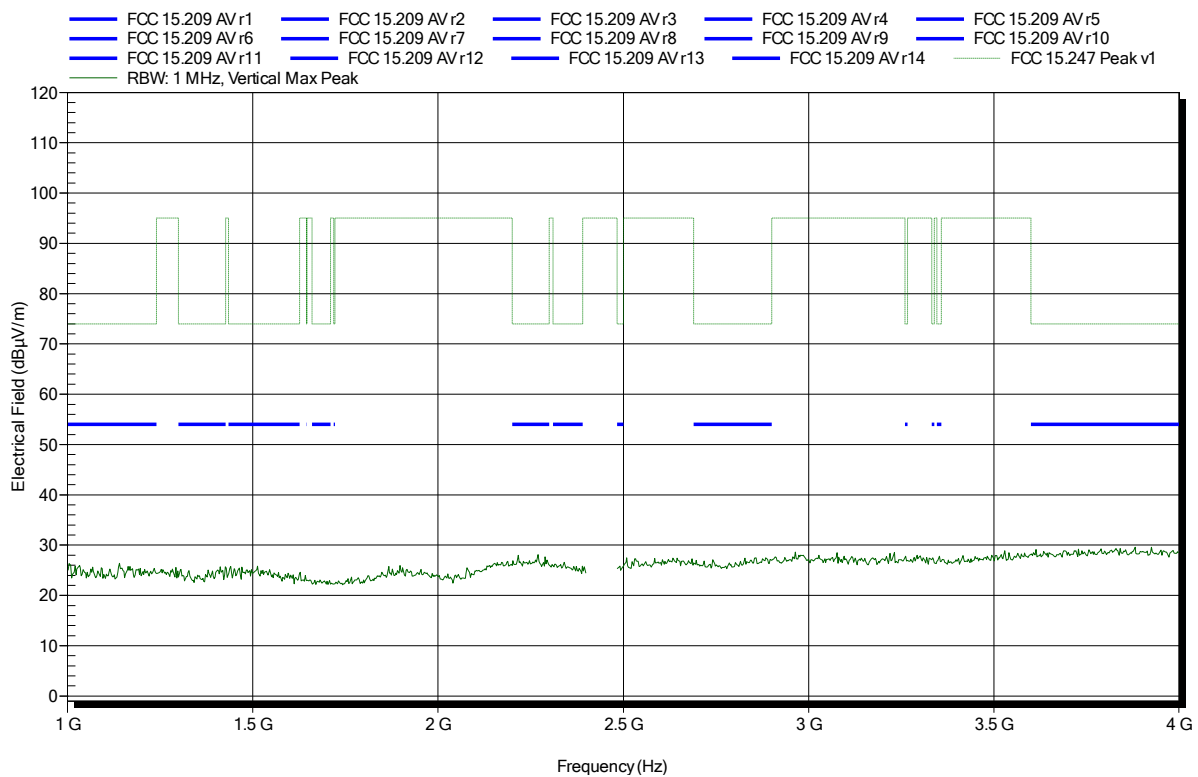


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89848A1KF
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Jahn
 Test Conditions: Tnom: 25°C, Vnom: 5 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; TX; EUT ver; 2402 MHz
 Test Date: 2017-05-10
 Note:

Index 2

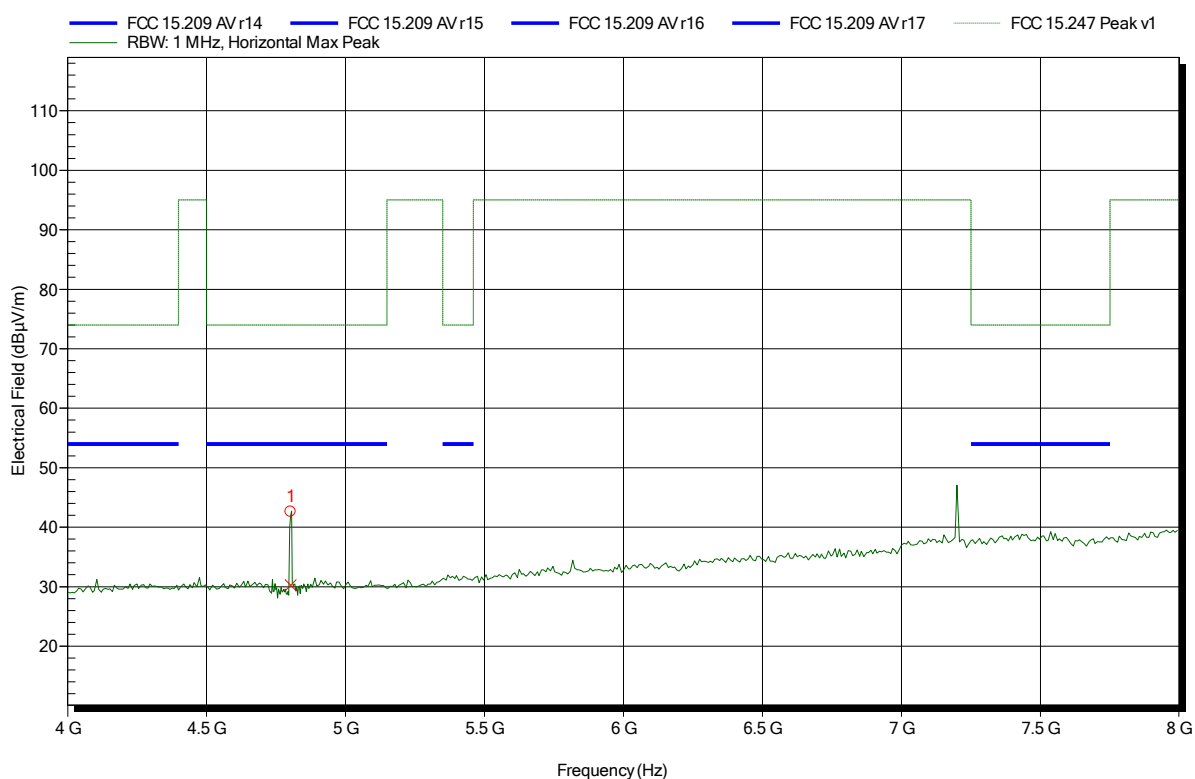


Frequency	Average	Average Limit	Average Difference	Average Status
4.803 GHz	30.27 dBµV/m	54 dBµV/m	-23.73 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89848A1KF
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Jahn
 Test Conditions: Tnom: 25°C, Vnom: 5 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; TX; EUT ver; 2440 MHz
 Test Date: 2017-05-10
 Note:

Index 7

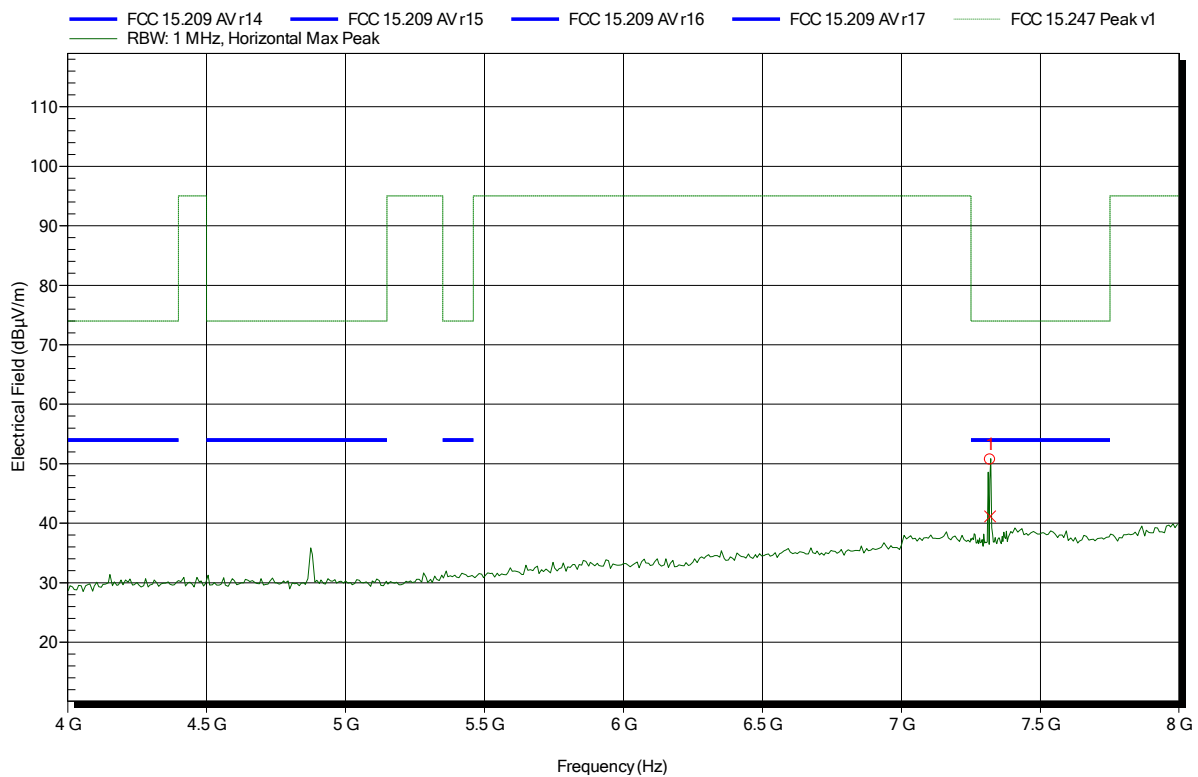


Frequency	Average	Average Limit	Average Difference	Average Status
7.319 GHz	41.13 dBµV/m	54 dBµV/m	-12.87 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Vnom: 5 VDC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; TX; EUT ver; 2480 MHz
Test Date: 2017-05-10
Note:

Index 11

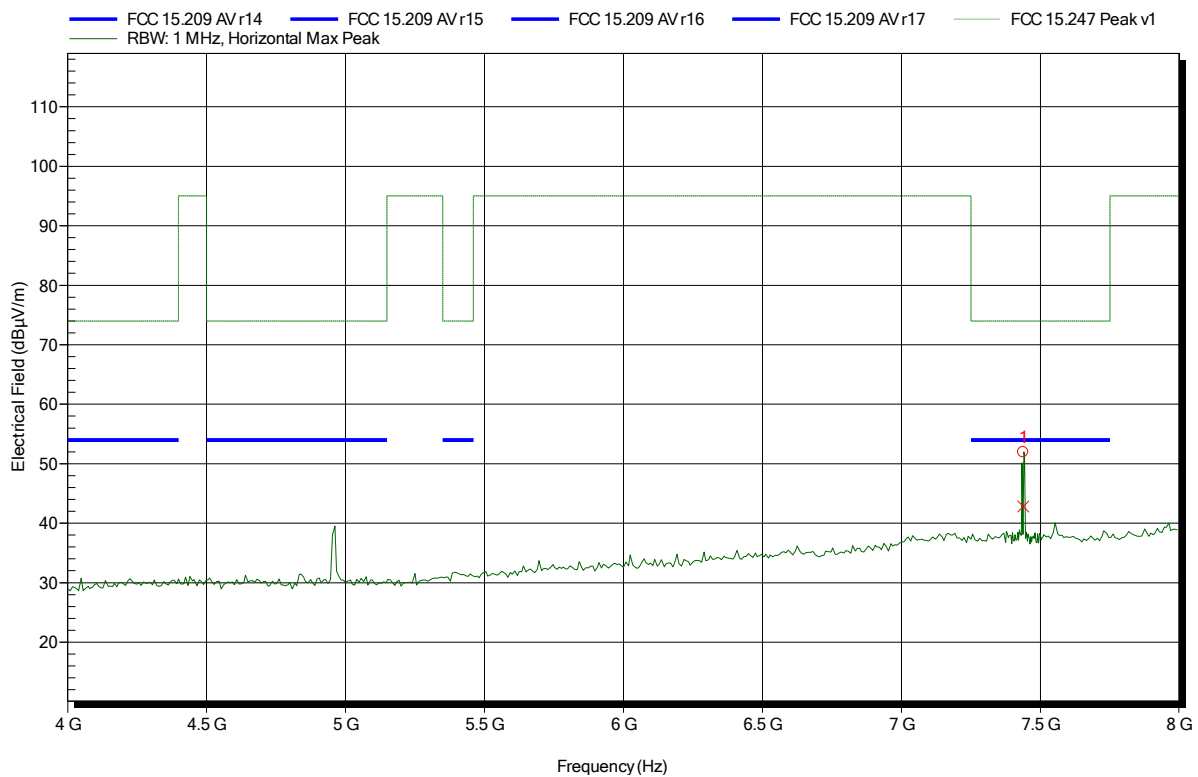


Frequency	Average	Average Limit	Average Difference	Average Status
7.439 GHz	42.82 dBμV/m	54 dBμV/m	-11.18 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89848A1KF
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Jahn
 Test Conditions: Tnom: 25°C, Vnom: 5 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; TX; EUT ver; 2402 MHz
 Test Date: 2017-05-10
 Note:

Index 15

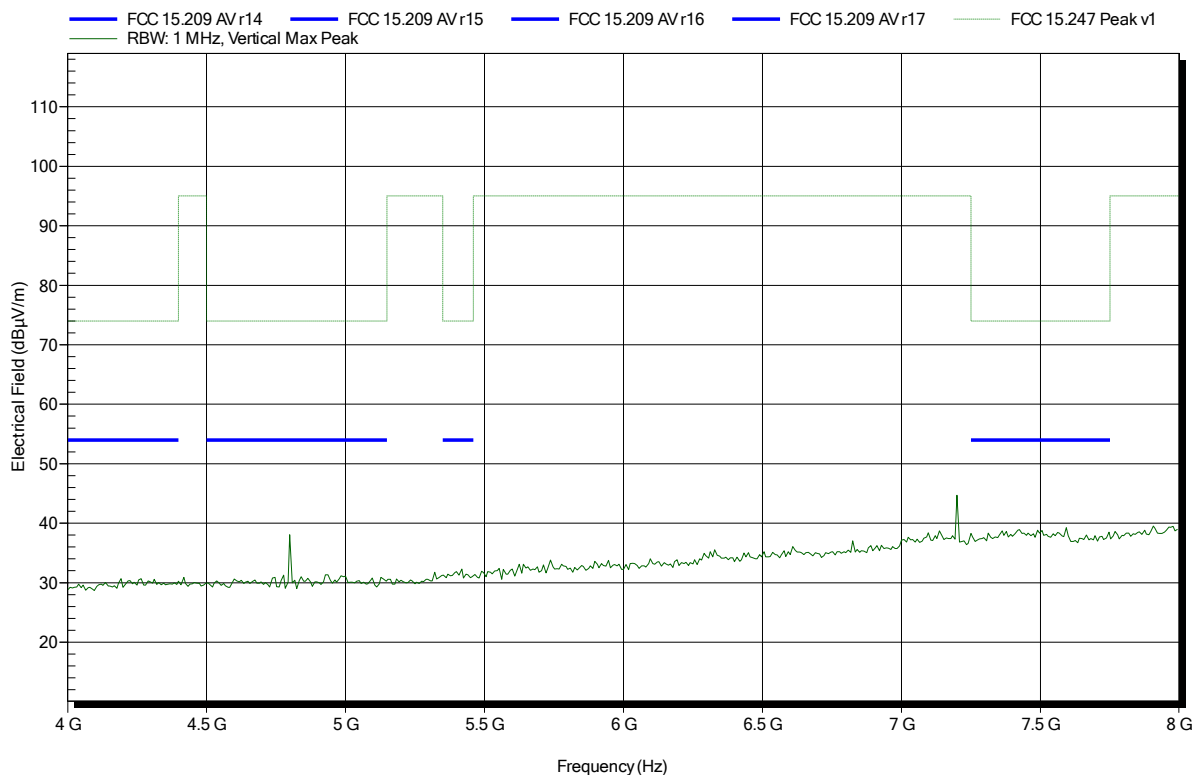


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89848A1KF
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Jahn
 Test Conditions: Tnom: 25°C, Vnom: 5 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; TX; EUT ver; 2440 MHz
 Test Date: 2017-05-10
 Note:

Index 19

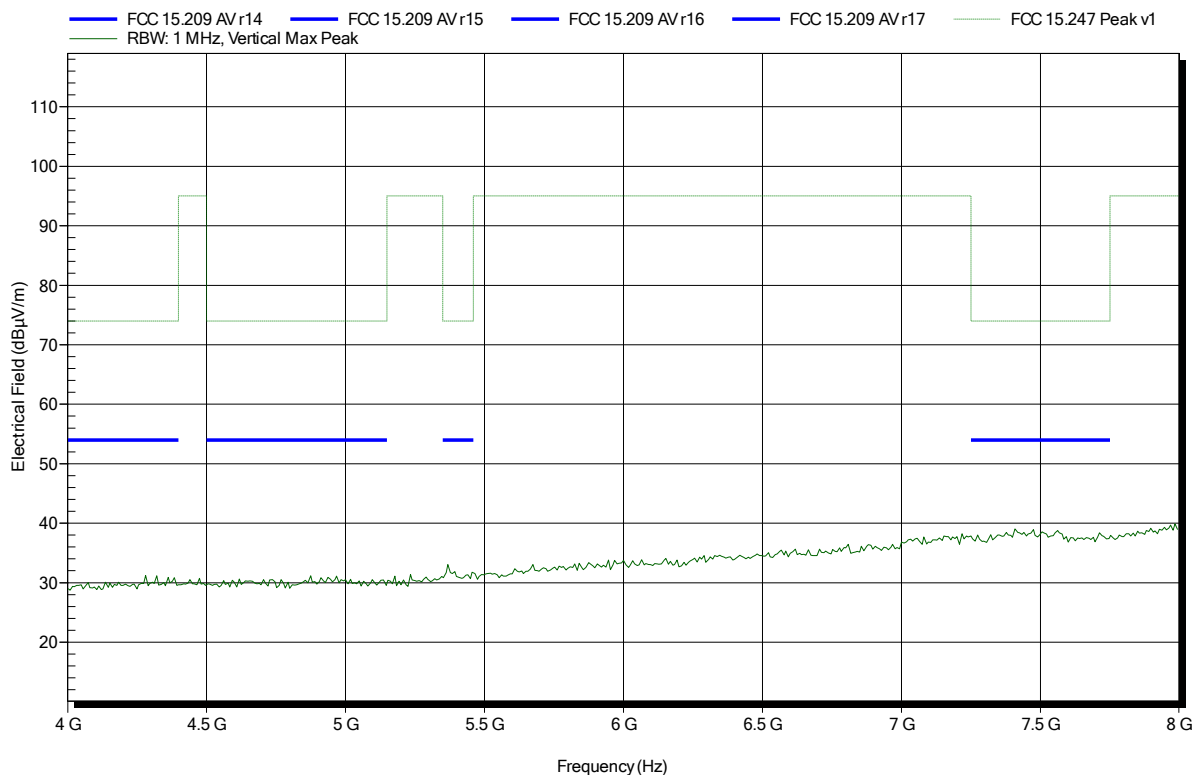


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89848A1KF
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Jahn
 Test Conditions: Tnom: 25°C, Vnom: 5 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; TX; EUT ver; 2480 MHz
 Test Date: 2017-05-10
 Note:

Index 23

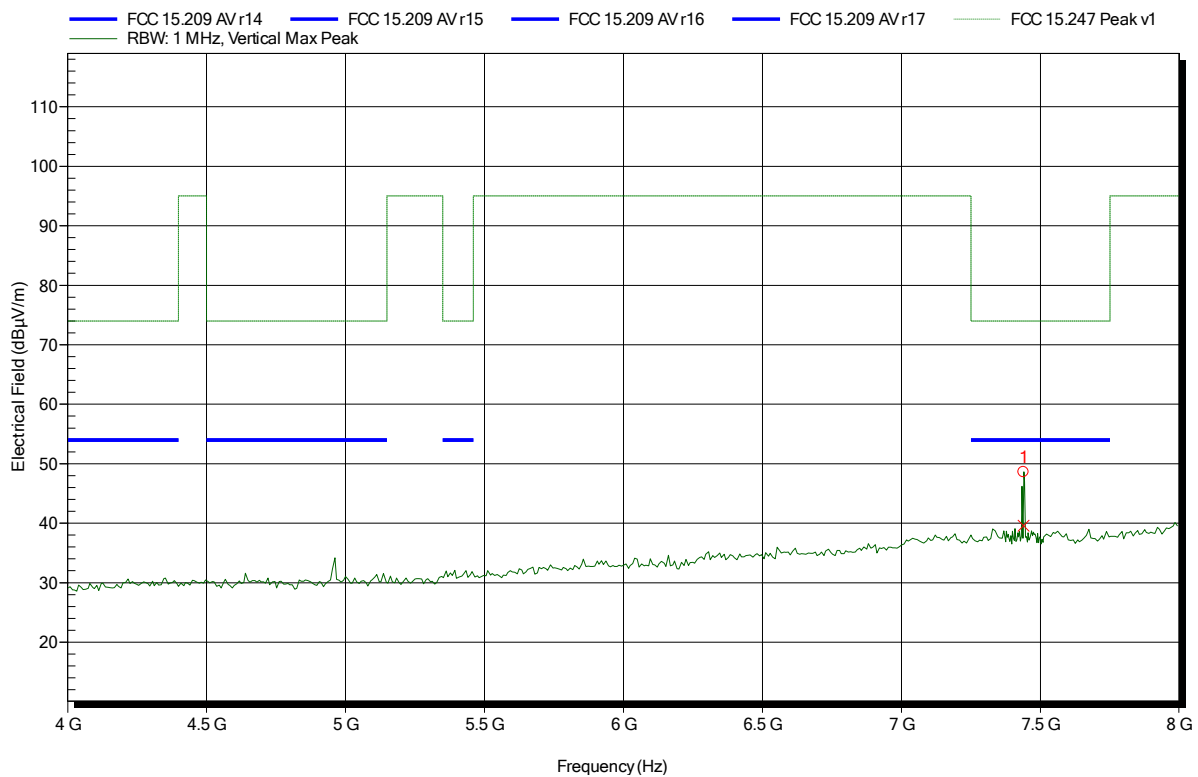


Frequency	Average	Average Limit	Average Difference	Average Status
7.44 GHz	39.57 dBµV/m	54 dBµV/m	-14.43 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Vnom: 5 VDC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; TX; EUT ver; 2402 MHz
Test Date: 2017-05-10
Note:

Index 3

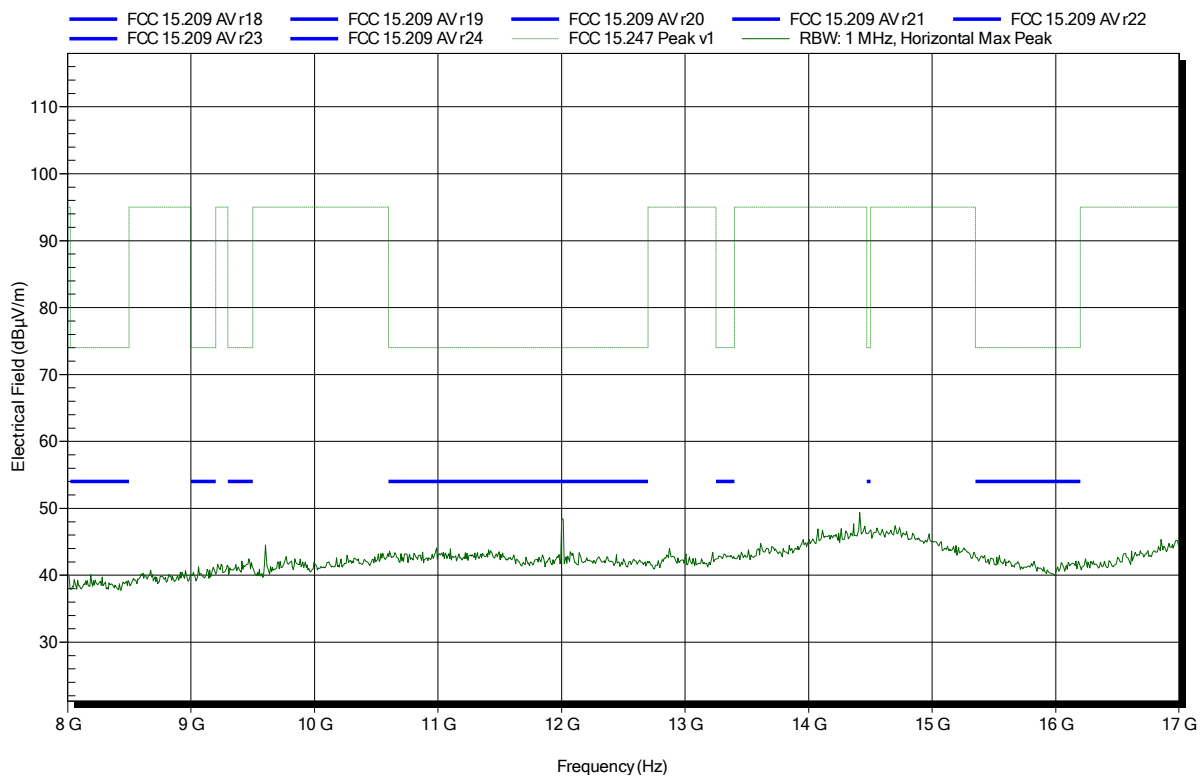


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Vnom: 5 VDC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; TX; EUT ver; 2440 MHz
Test Date: 2017-05-10
Note:

Index 8

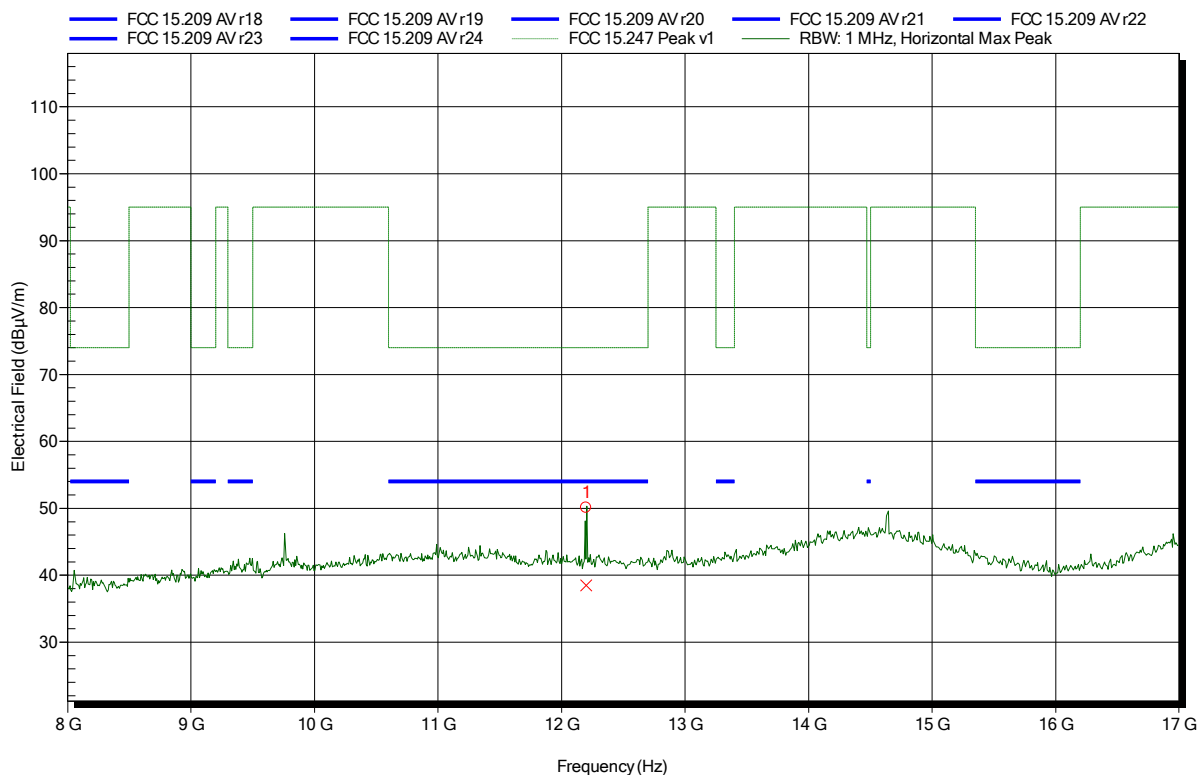


Frequency	Average	Average Limit	Average Difference	Average Status
12.2 GHz	38.51 dBμV/m	54 dBμV/m	-15.49 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Vnom: 5 VDC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; TX; EUT ver; 2480 MHz
Test Date: 2017-05-10
Note:

Index 12

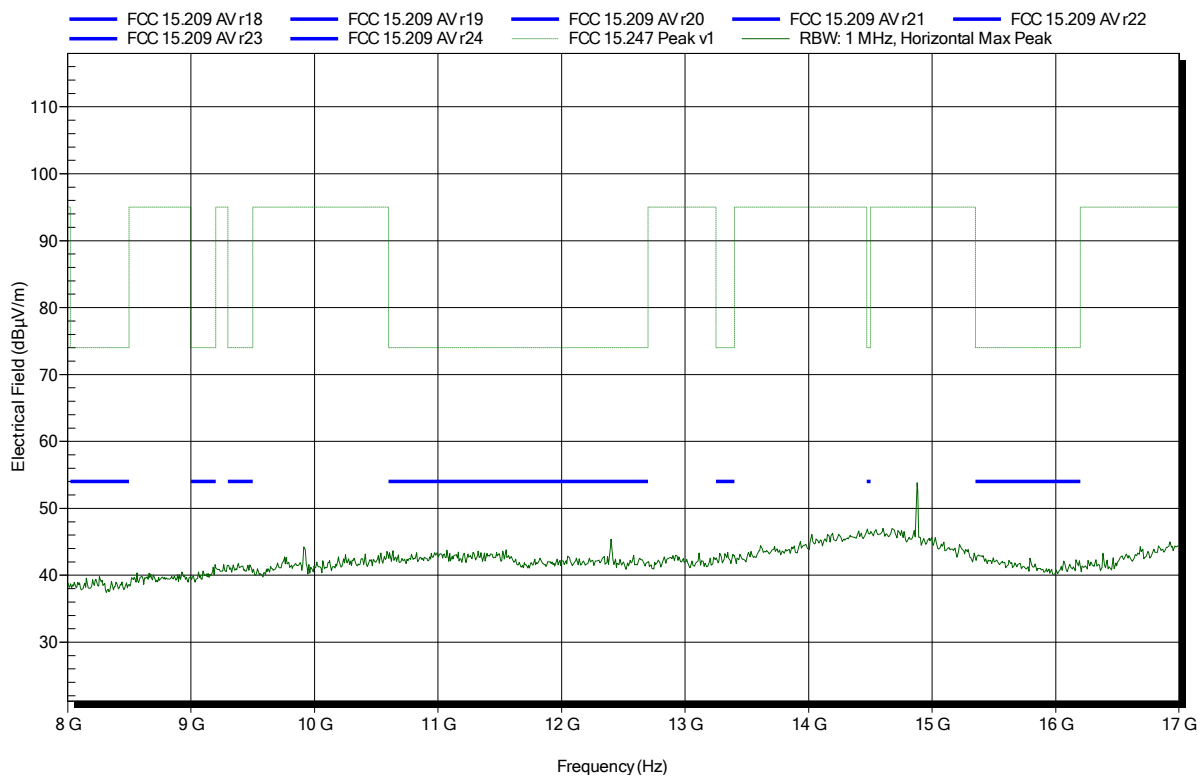


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89848A1KF
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Jahn
 Test Conditions: Tnom: 25°C, Vnom: 5 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; TX; EUT ver; 2402 MHz
 Test Date: 2017-05-10
 Note:

Index 16

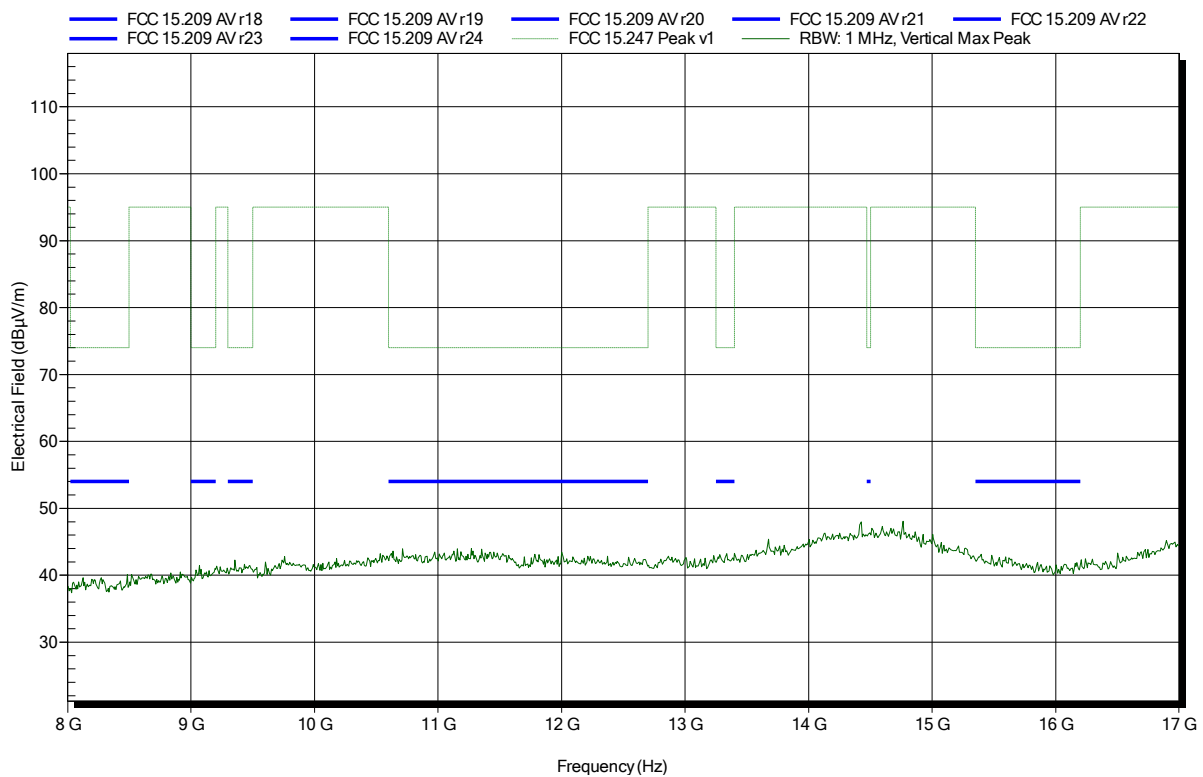


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Vnom: 5 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; TX; EUT ver; 2440 MHz
Test Date: 2017-05-10
Note:

Index 20

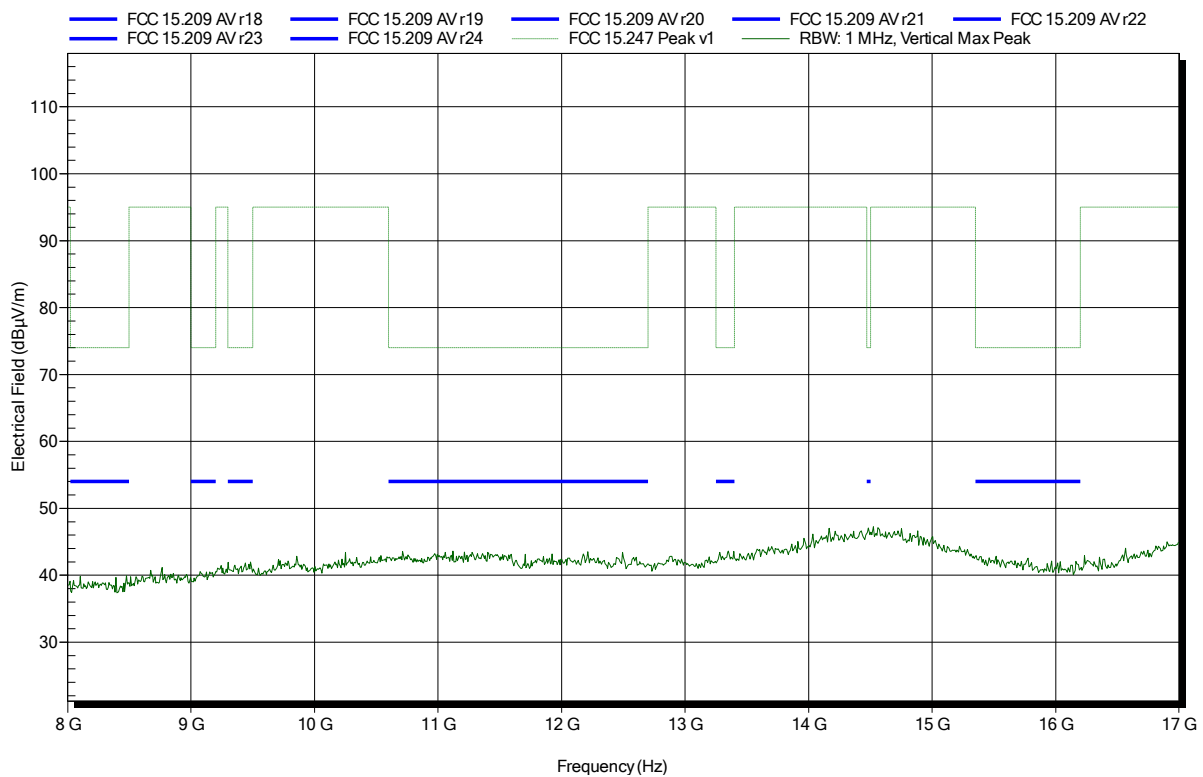


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Vnom: 5 VDC
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; TX; EUT ver; 2480 MHz
Test Date: 2017-05-10
Note:

Index 24

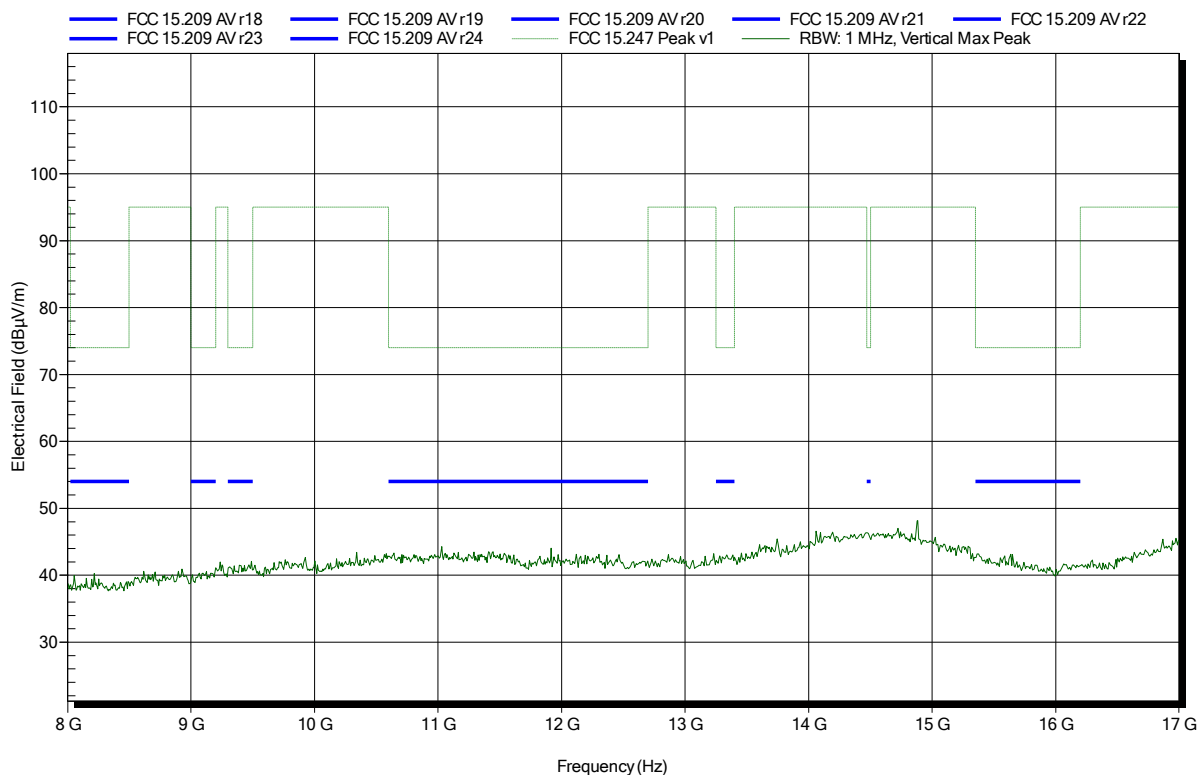


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89848A1KF
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Jahn
 Test Conditions: Tnom: 25°C, Vnom: 5 VDC
 Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),
 Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; TX; EUT ver; 2402 MHz
 Test Date: 2017-05-10
 Note:

Index 4

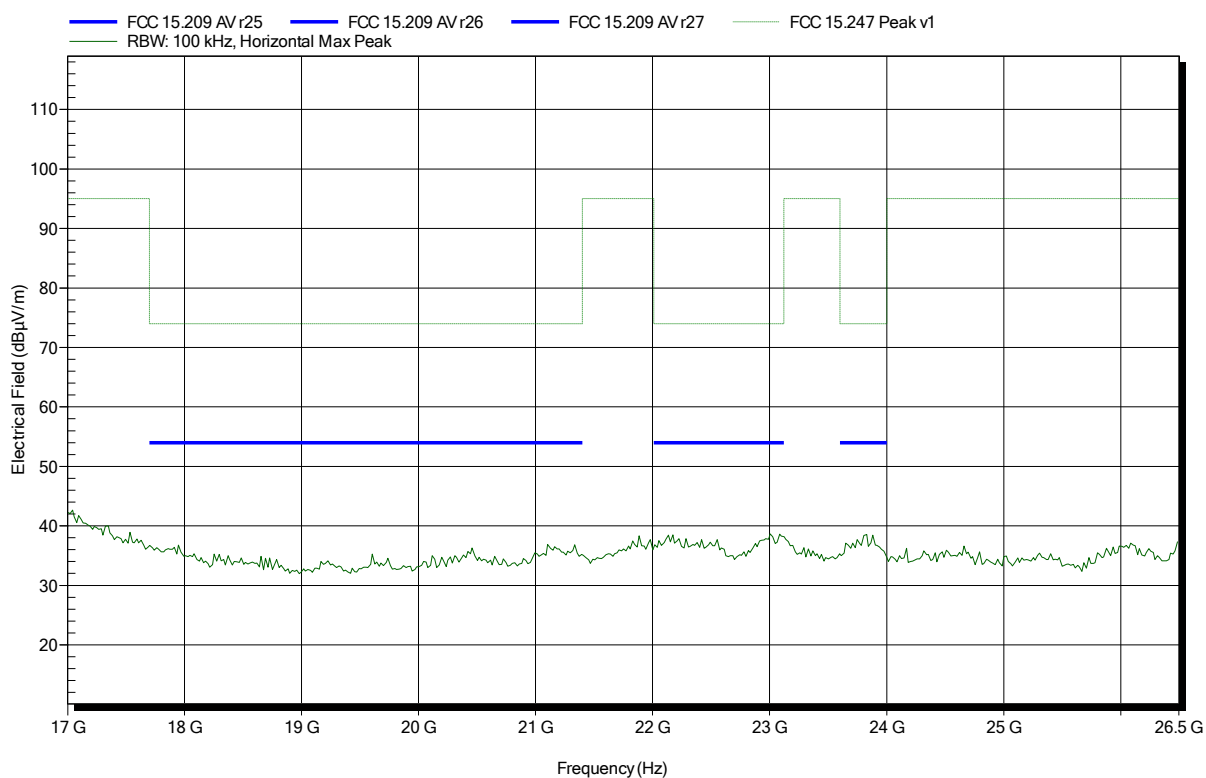


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Vnom: 5 VDC
Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),
Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; TX; EUT ver; 2440 MHz
Test Date: 2017-05-10
Note:

Index 9

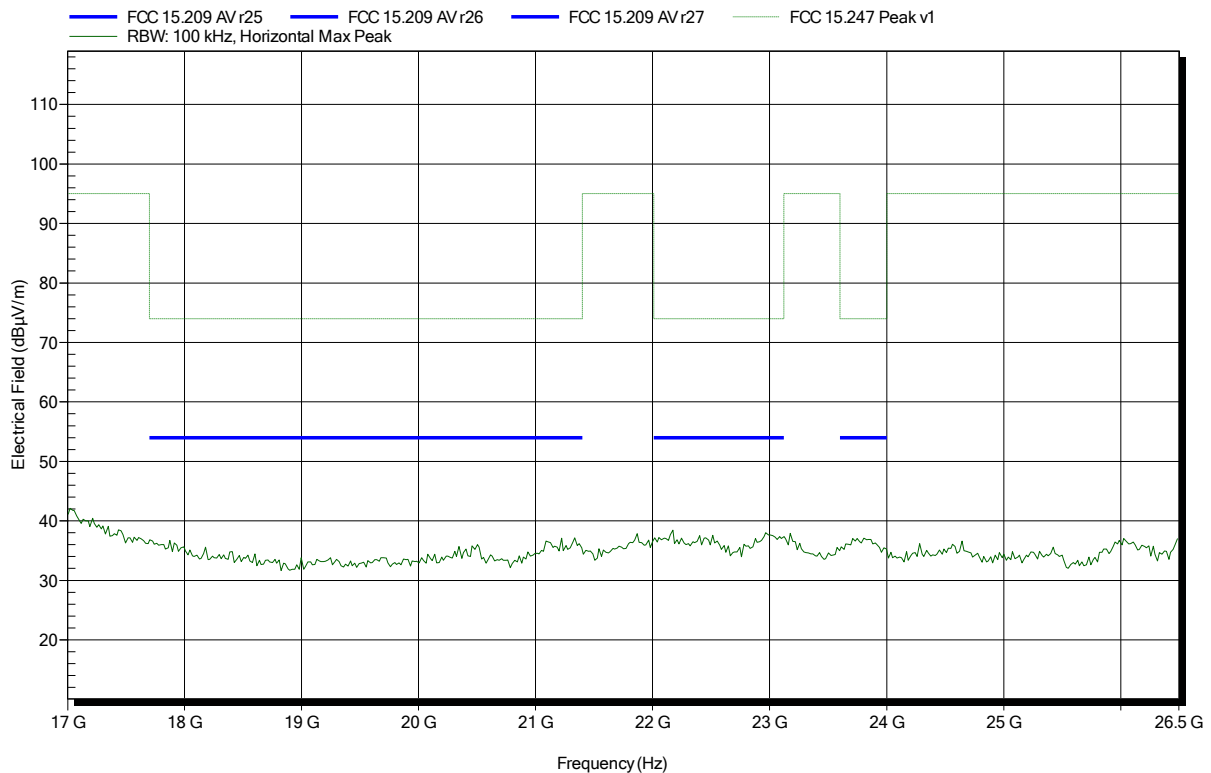


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89848A1KF
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Jahn
 Test Conditions: Tnom: 25°C, Vnom: 5 VDC
 Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),
 Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; TX; EUT ver; 2480 MHz
 Test Date: 2017-05-10
 Note:

Index 13

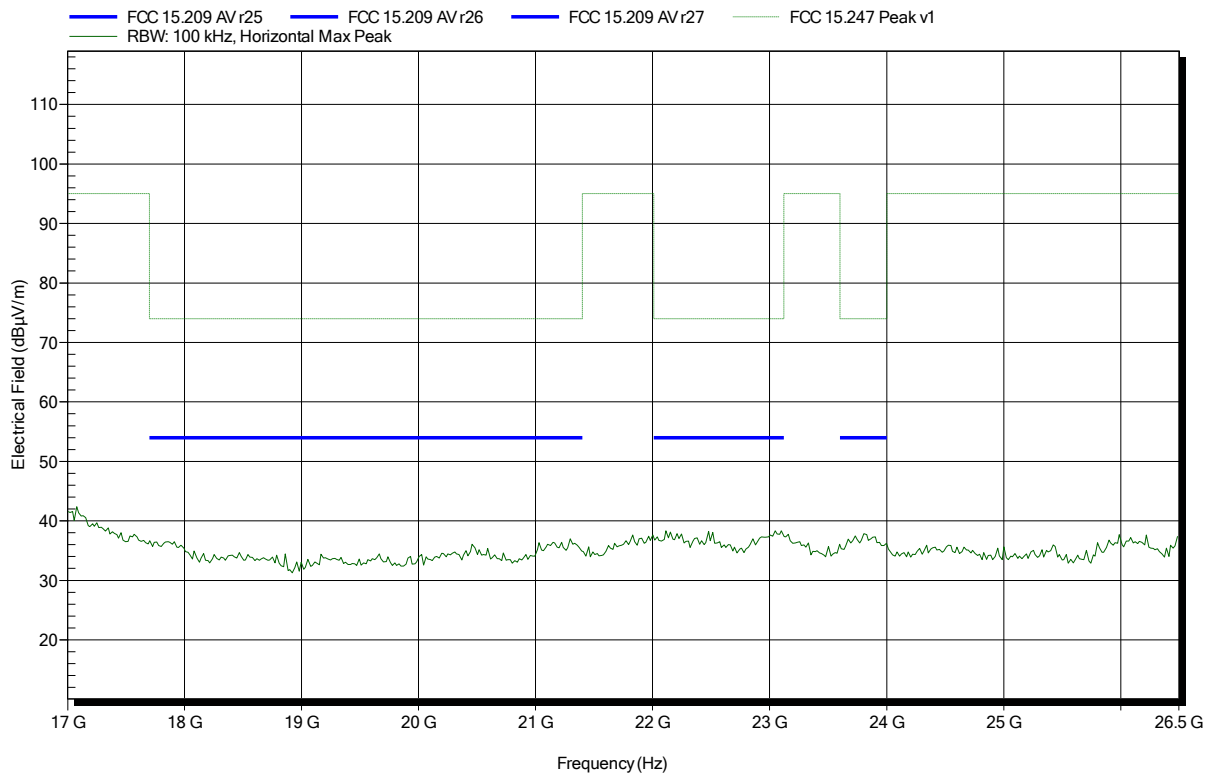


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Vnom: 5 VDC
Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),
Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; TX; EUT ver; 2402 MHz
Test Date: 2017-05-10
Note:

Index 17

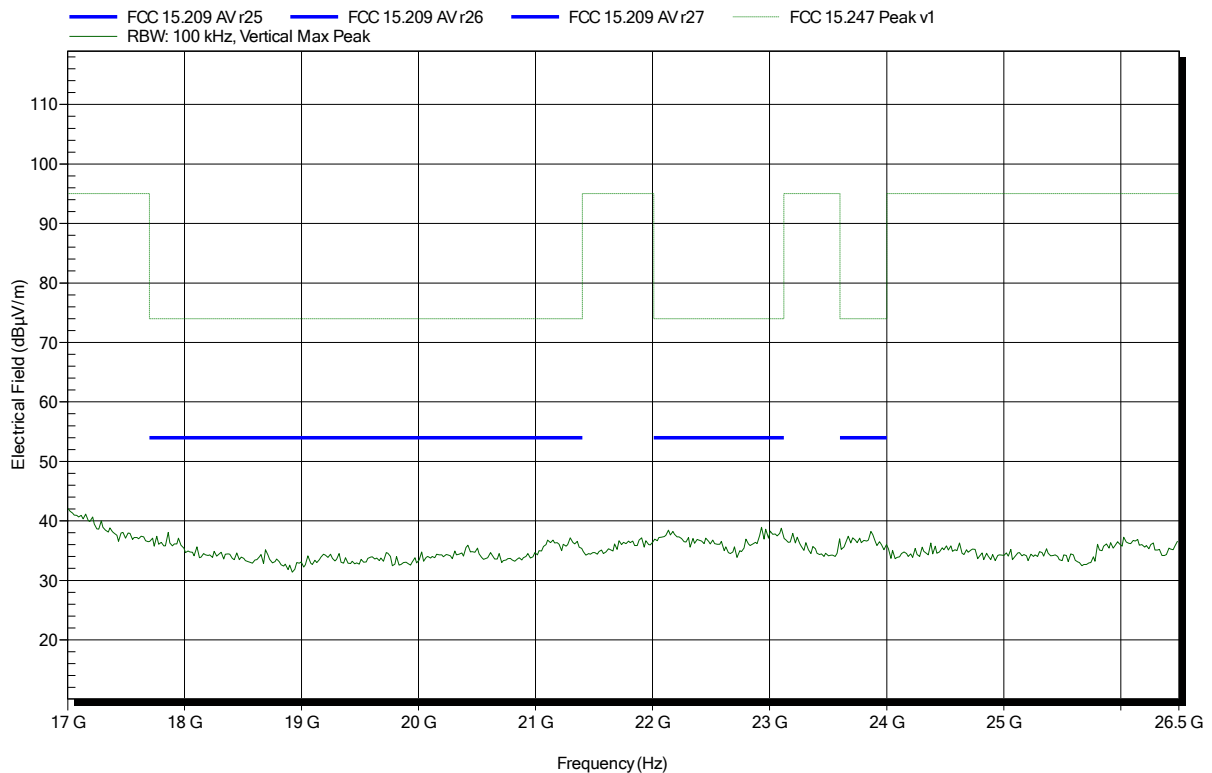


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89848A1KF
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Jahn
 Test Conditions: Tnom: 25°C, Vnom: 5 VDC
 Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),
 Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; TX; EUT ver; 2440 MHz
 Test Date: 2017-05-10
 Note:

Index 21

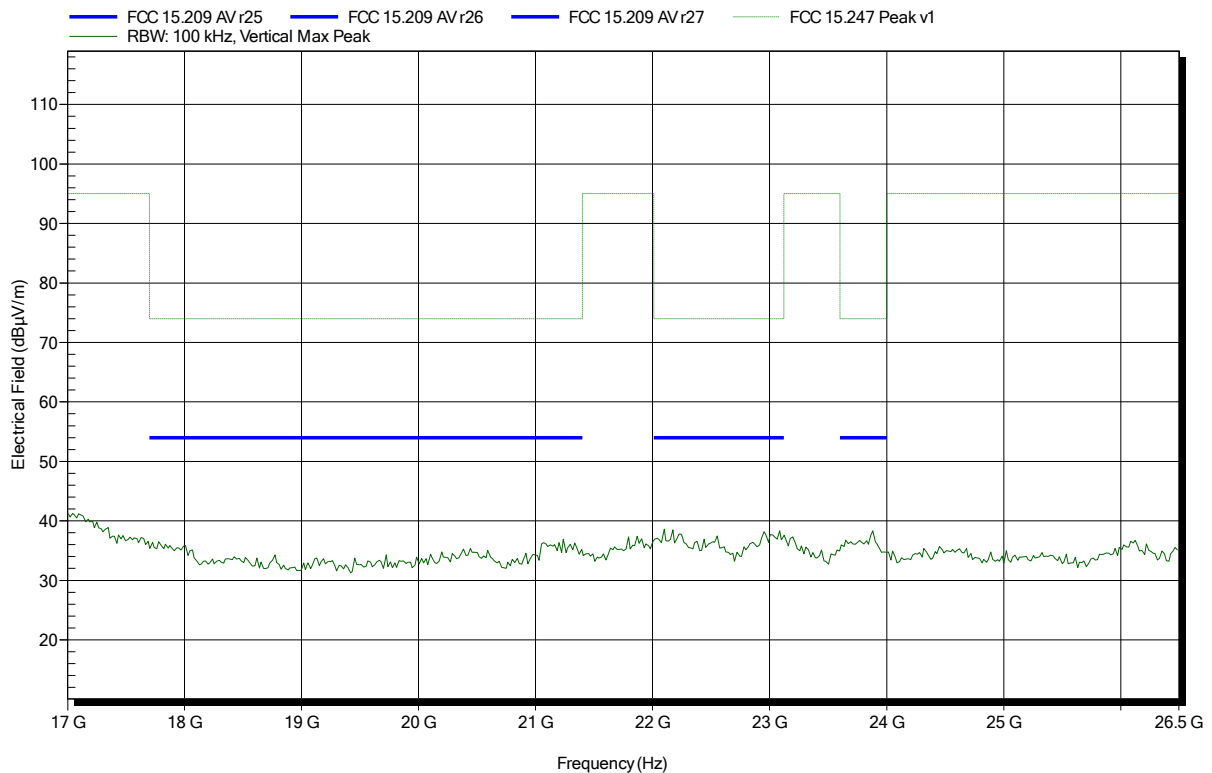


Spurious emissions according to FCC 15.247

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Vnom: 5 VDC
Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),
Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; TX; EUT ver; 2480 MHz
Test Date: 2017-05-10
Note:

Index 25

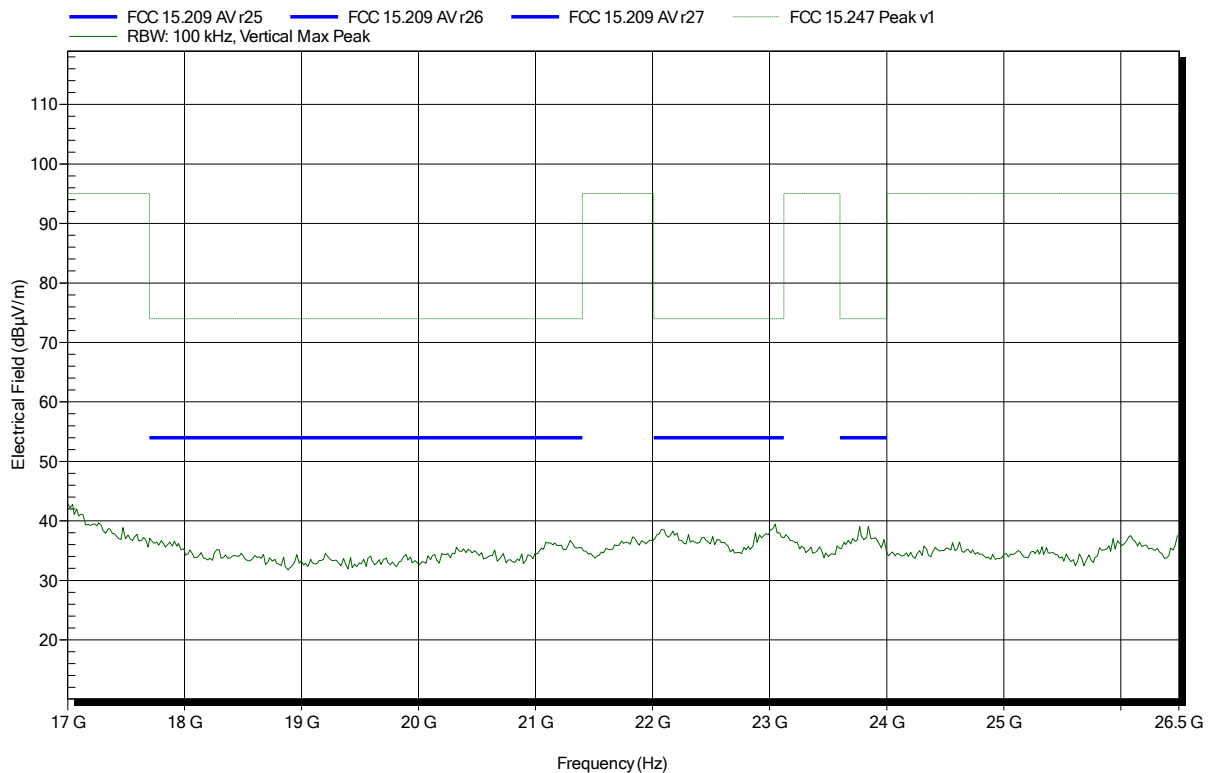


ANNEX B Receiver sprurious emissions

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Vnom: 5.0 VDC
Antenna: Rohde & Schwarz HK 116, Horizontal
Measurement distance: 3 m
Mode: RX; Rx; 2440 MHz
Test Date: 2017-05-13
Note:

Index 12

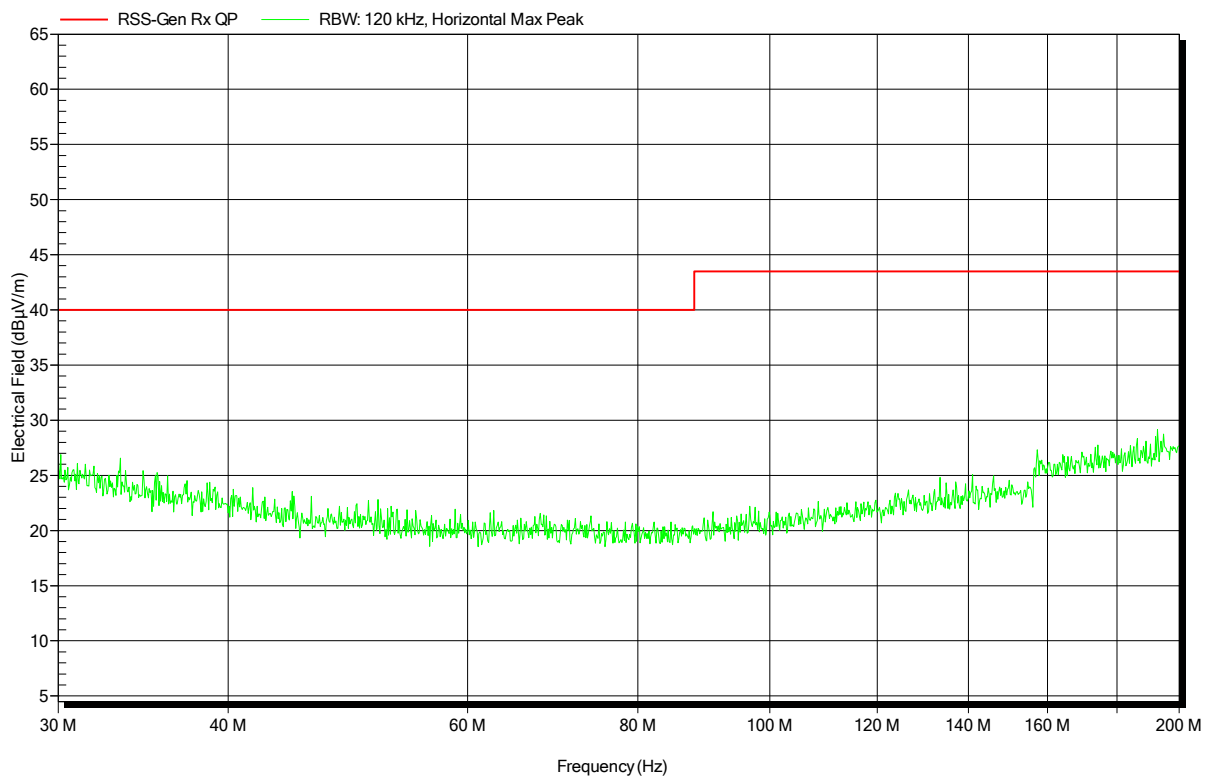


Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89848A1KF
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Jahn
 Test Conditions: Tnom: 25°C, Vnom: 5.0 VDC
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: RX; Rx; 2440 MHz
 Test Date: 2017-05-13
 Note:

Index 8

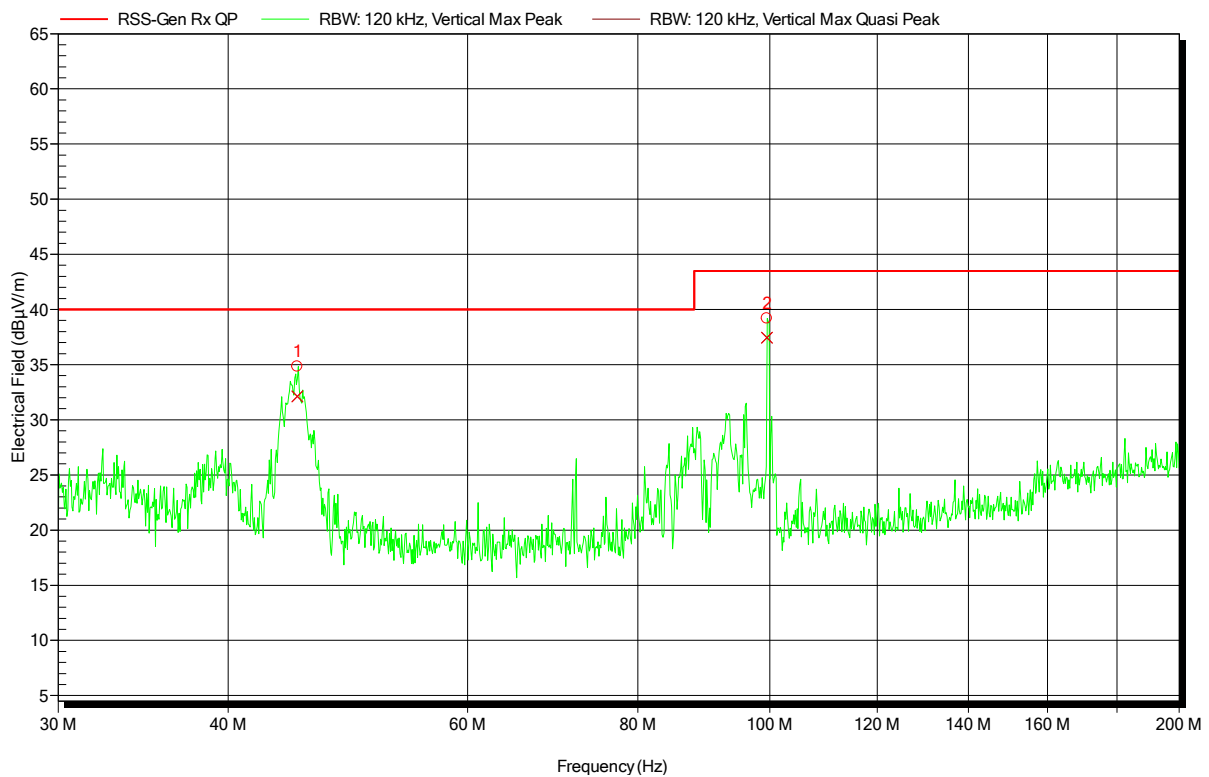


Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
44.9809 MHz	32.1 dBµV/m	40 dBµV/m	-7.88 dB	Pass
99.5665 MHz	37.5 dBµV/m	43.5 dBµV/m	-6.05 dB	Pass

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89848A1KF
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Jahn
 Test Conditions: Tnom: 25°C, Vnom: 5.0 VDC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: RX; Rx; 2440 MHz
 Test Date: 2017-05-13
 Note:

Index 11

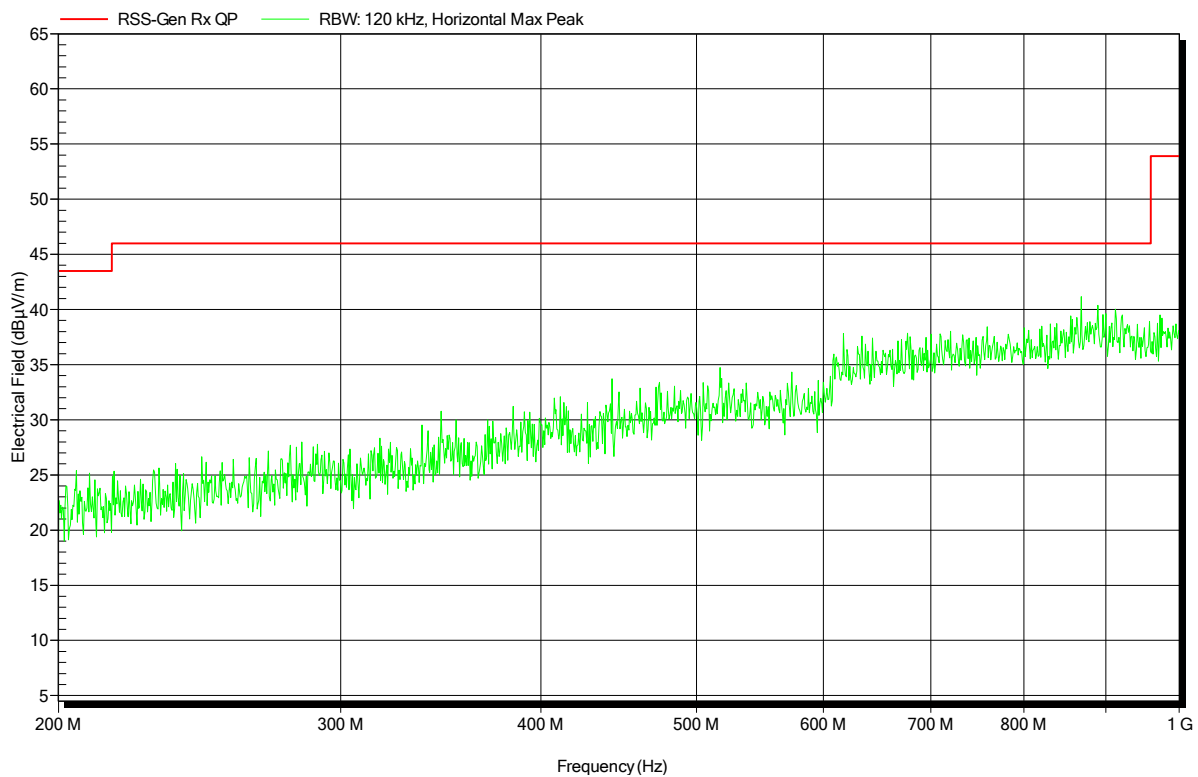


Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89848A1KF
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Jahn
 Test Conditions: Tnom: 25°C, Vnom: 5.0 VDC
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: RX; Rx; 2440 MHz
 Test Date: 2017-05-13
 Note:

Index 10

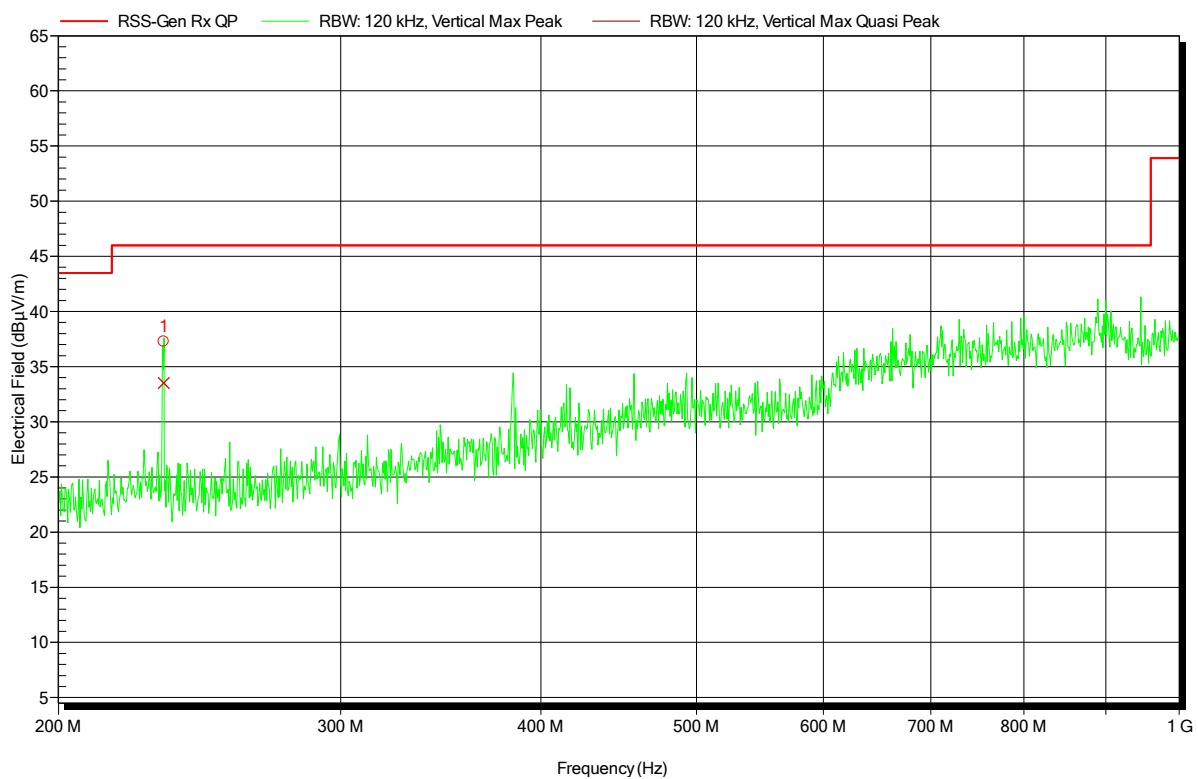


Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
232.7949 MHz	33.5 dBµV/m	46 dBµV/m	-12.48 dB	Pass

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89848A1KF
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Jahn
 Test Conditions: Tnom: 25°C, Vnom: 5.0 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: RX; Rx; 2440 MHz
 Test Date: 2017-05-10
 Note:

Index 4

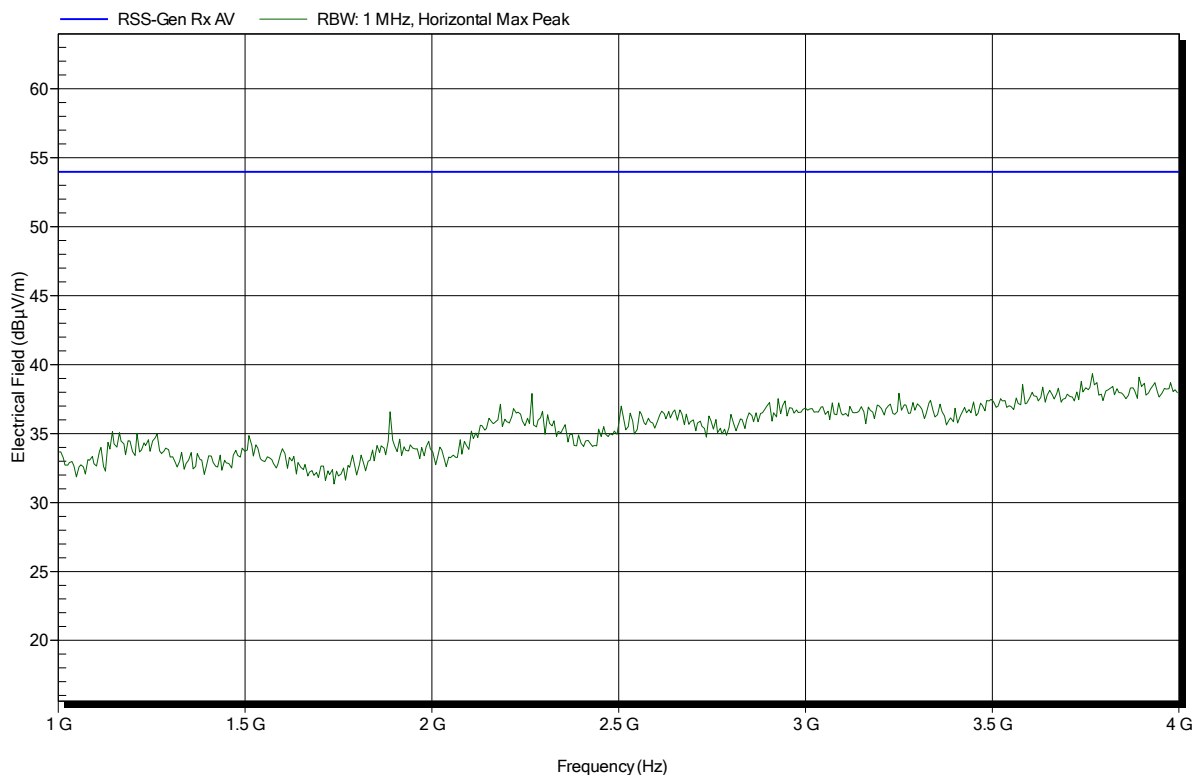


Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89848A1KF
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Jahn
 Test Conditions: Tnom: 25°C, Vnom: 5.0 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: RX; Rx; 2440 MHz
 Test Date: 2017-05-10
 Note:

Index 1

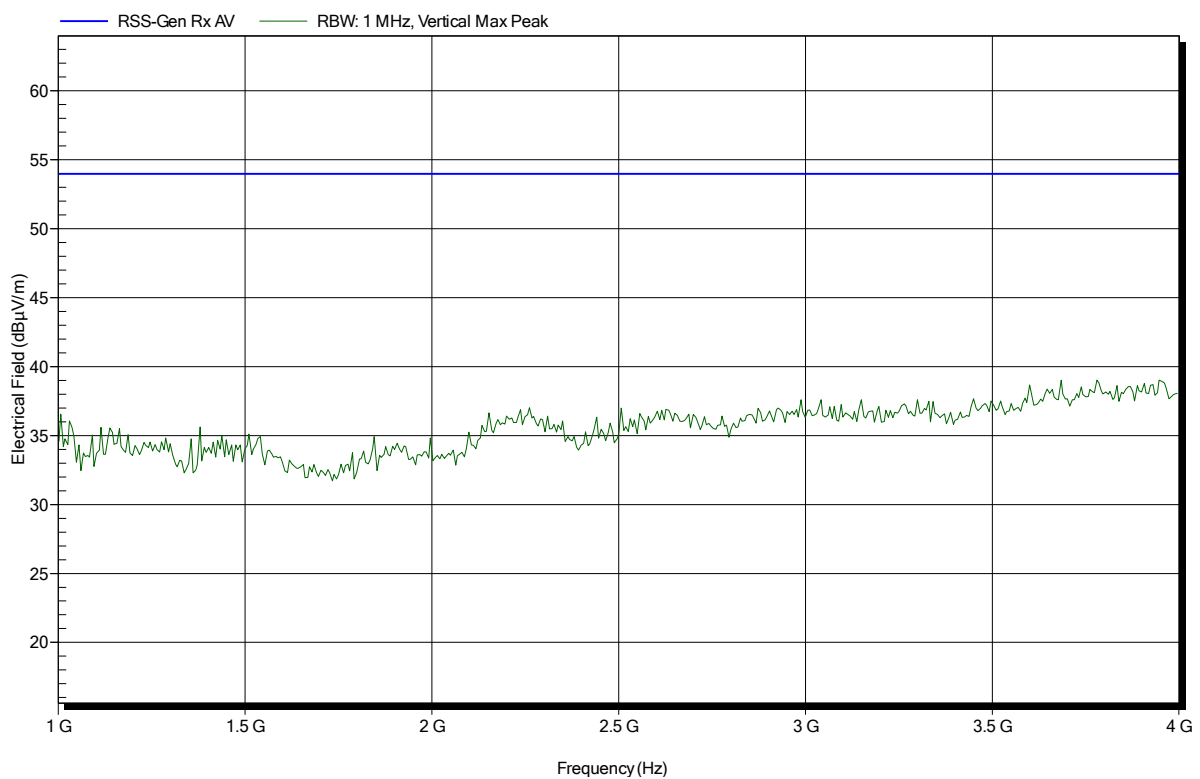


Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
EUT Name: Bluetooth Module
Model: ENW89848A1KF
Test Site: Eurofins Product Service GmbH
Operator: Mr. Jahn
Test Conditions: Tnom: 25°C, Vnom: 5.0 VDC
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 3 m
Mode: RX; Rx; 2440 MHz
Test Date: 2017-05-10
Note:

Index 5

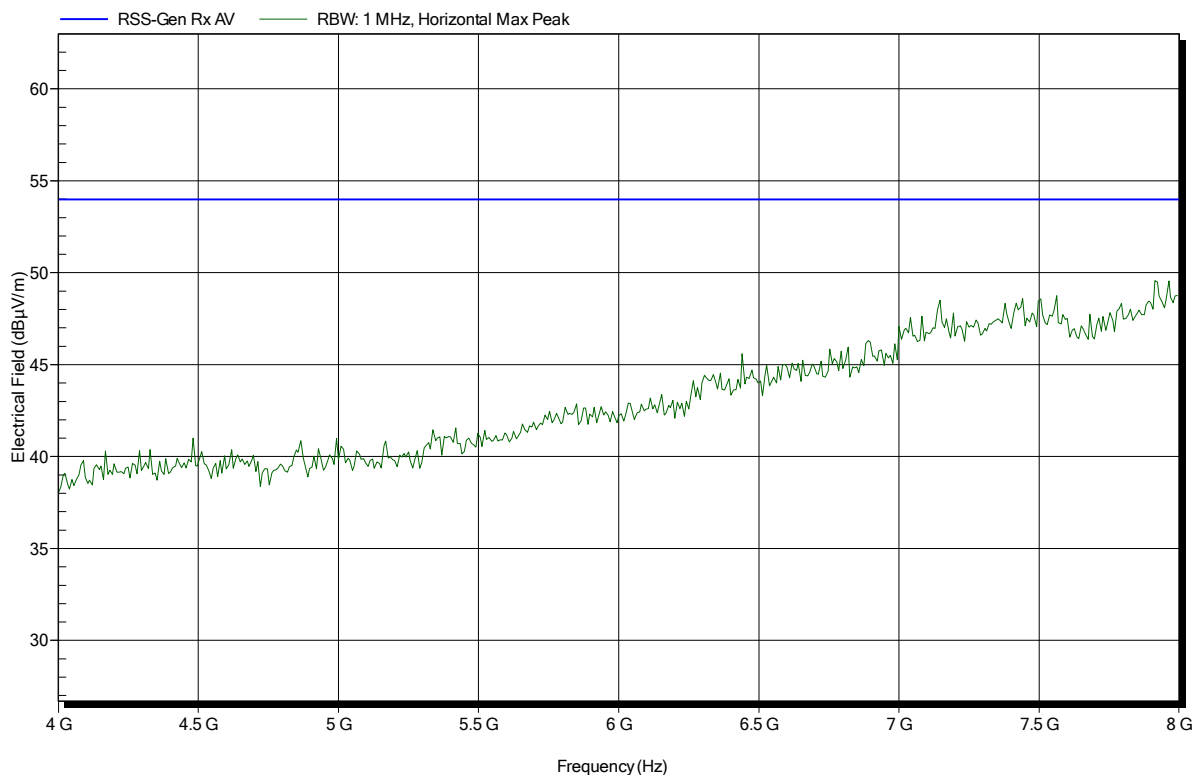


Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1702-6283

Applicant: Panasonic Industrial Devices Europe GmbH
 EUT Name: Bluetooth Module
 Model: ENW89848A1KF
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Jahn
 Test Conditions: Tnom: 25°C, Vnom: 5.0 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: RX; Rx; 2440 MHz
 Test Date: 2017-05-10
 Note:

Index 2

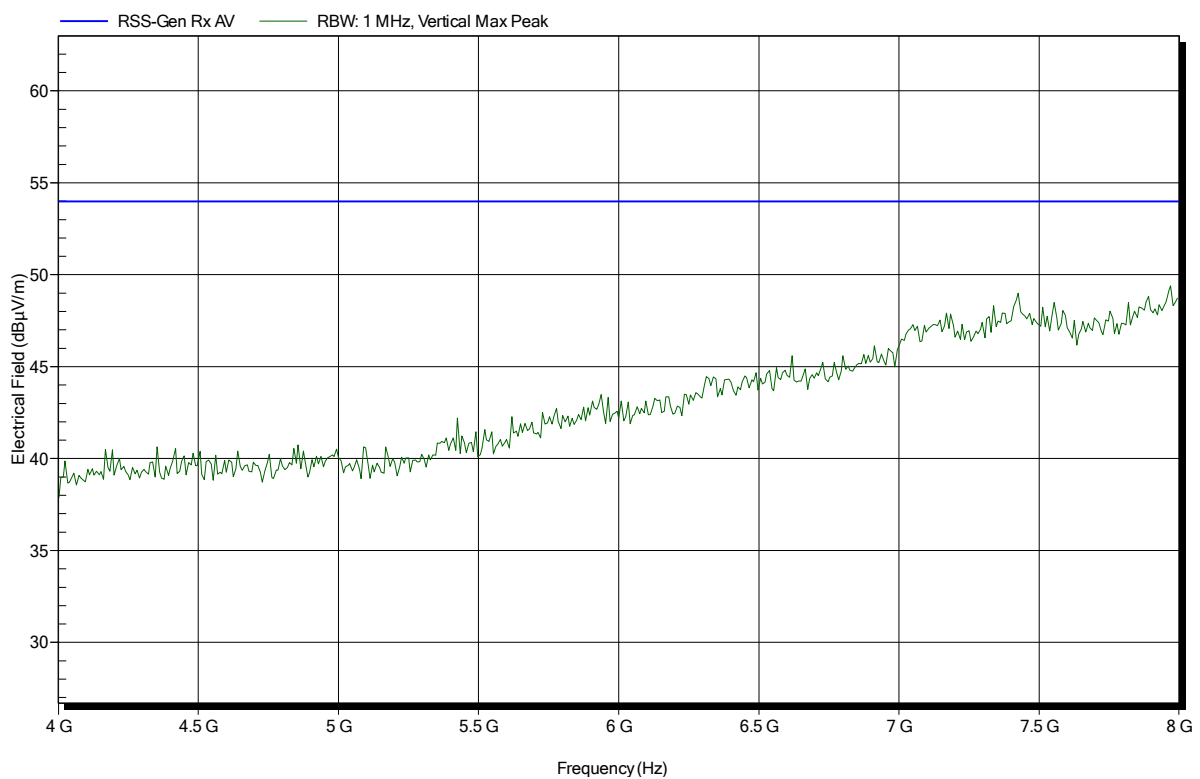


Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1702-6283

Applicant:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Module
Model:	ENW89848A1KF
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Jahn
Test Conditions:	Tnom: 25°C, Vnom: 5.0 VDC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	RX; Rx; 2440 MHz
Test Date:	2017-05-10
Note:	

Index 6

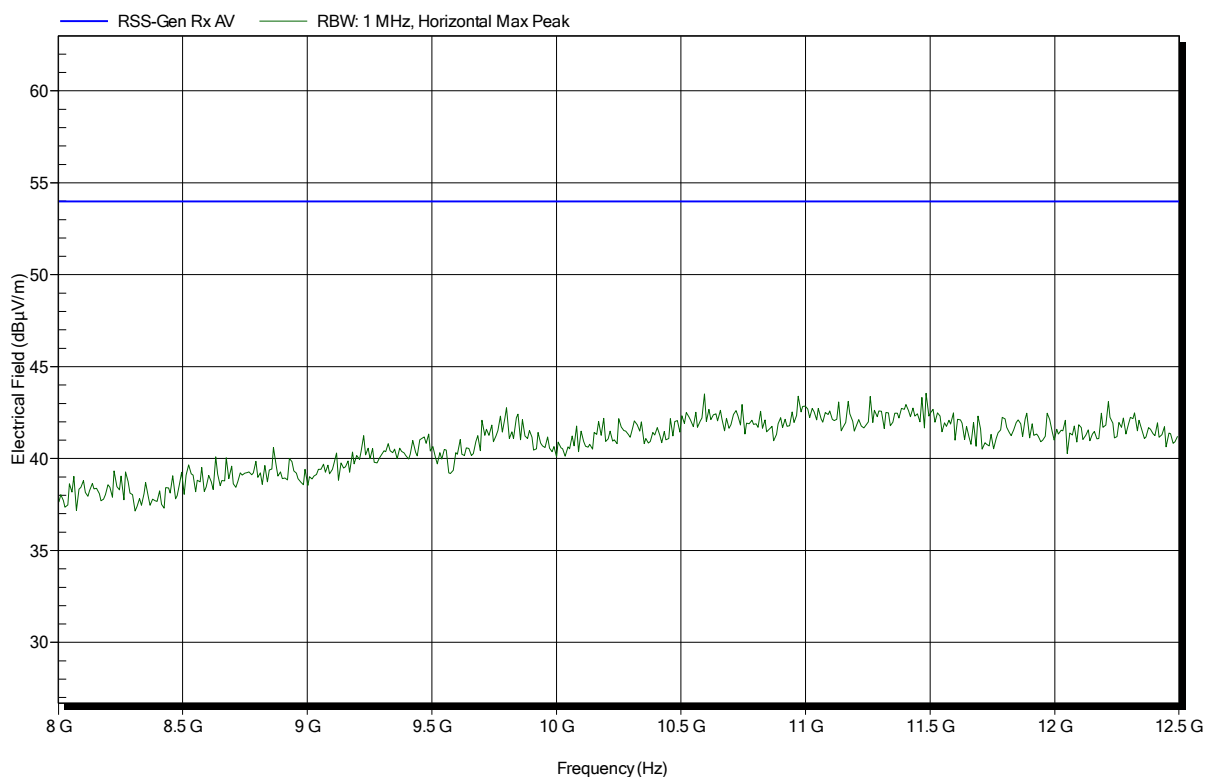

Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1702-6283

Applicant:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Module
Model:	ENW89848A1KF
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Jahn
Test Conditions:	Tnom: 25°C, Vnom: 5.0 VDC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	1 m converted to 3m
Mode:	RX; Rx; 2440 MHz
Test Date:	2017-05-10
Note:	

Index 3

