

EMC TEST REPORT

FCC 47 CFR Part 15B
Industry Canada RSS-Gen

Electromagnetic compatibility - Unintentional radiators

Report Reference No. : G0M-1406-3920-EF0115B-V01

Testing Laboratory : Eurofins Product Service GmbH

Address : Storkower Str. 38c
15526 Reichenwalde
Germany

Accreditation :



A2LA Accredited Testing Laboratory, Certificate No.: 1983.01
FCC Filed Test Laboratory, Reg.-No.: 96970
IC OATS Filing assigned code: 3470A

Applicant's name : GN Netcom A/S

Address : Lautrupbjerg 7
2750 Ballerup
DENMARK

Test specification:

Standard..... : 47 CFR Part 15 Subpart B
RSS-Gen, Issue 3, 2010-12
ANSI C63.4:2009

Equipment under test (EUT):

Product description	Bluetooth headset	
Model No.	OTE20	
Additional Models	None	
Hardware version	28-03918	
Firmware / Software version	2-10	
Contains	FCC-ID: BCE-OTE20	IC: 2386C-OTE20
Test result	Passed	

Test Report No.: G0M-1406-3920-EF0115B-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Possible test case verdicts:

- not applicable to test object : N/A
- test object does meet the requirement..... : P (Pass)
- test object does not meet the requirement..... : F (Fail)

Testing:

Date of receipt of test item : 2014-06-20

Date (s) of performance of tests : 2014-06-25 - 2014-06-26

Compiled by : Matthias Handrik

Tested by (+ signature)..... : Matthias Handrik

Approved by (+ signature) : Marcus Klein

Date of issue : 2014-07-02

Total number of pages : 31



General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Version History



Version	Issue Date	Remarks	Revised by
V01	2014-07-02	Initial Release	

1	EQUIPMENT (TEST ITEM) DESCRIPTION	5
1.1	Photos – Equipment external	6
1.2	Photos – Equipment internal	9
1.3	Photos – Test setup	10
1.4	Supporting Equipment Used During Testing	11
1.5	Operating Modes	12
1.6	Test Equipment Used During Testing	13
1.7	Sample emission level calculation	14
2	RESULT SUMMARY	15
3	TEST CONDITIONS AND RESULTS	16
3.1	Test Conditions and Results – Radiated emissions	16
3.2	Test Conditions and Results – AC power line conducted emissions	29


1 Equipment (Test item) Description

Description	Bluetooth headset	
Model	OTE20	
Additional Models	None	
Serial number	None	
Hardware version	28-03918	
Software / Firmware version	2-10	
Contains FCC-ID	BCE-OTE20	
Contains IC	2386C-OTE20	
Power supply	3.7 VDC	
AC/DC-Adaptor	Model : SSA-5W-05 EU 050060F Manufacturer : SIL Switching Adapterd Input : 100-240VAC / 50-60Hz Output : 5VDC / 800mA	
Radio module	Type	Bluetooth radio module
	Model	CSR8670
	Manufacturer	CSR
	HW Version	None
	SW Version	None
Manufacturer	GN Netcom A/S Lautrupbjerg 7 2750 Ballerup DENMARK	
Highest emission frequency	> 1000 MHz (up to 5th Harm)	
Device classification	Class B	
Equipment type	Tabletop	
Number of tested samples	1	

1.1 Photos – Equipment external

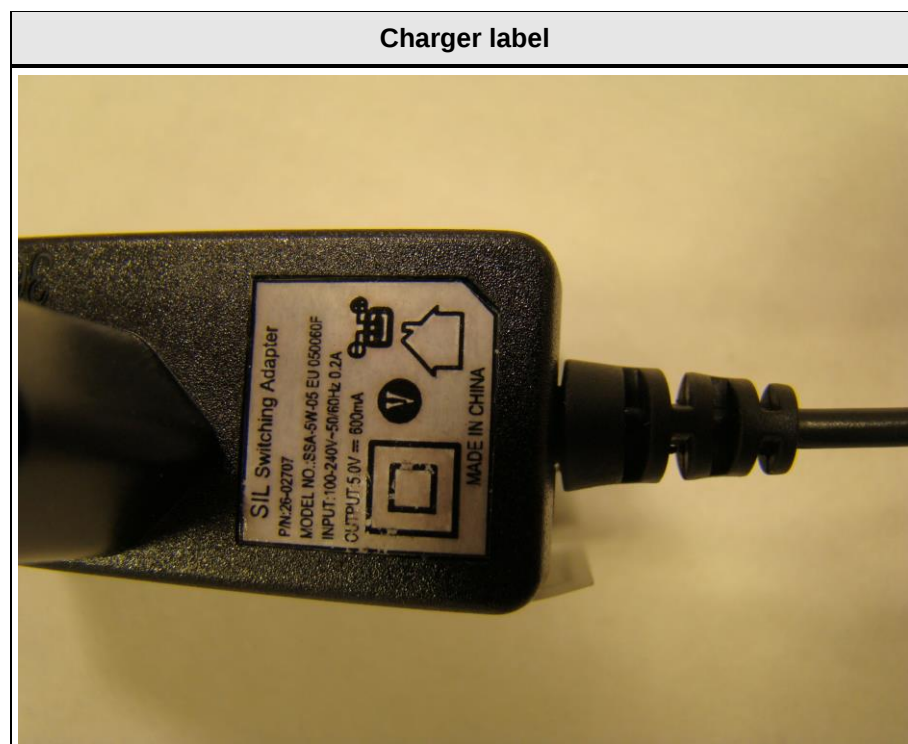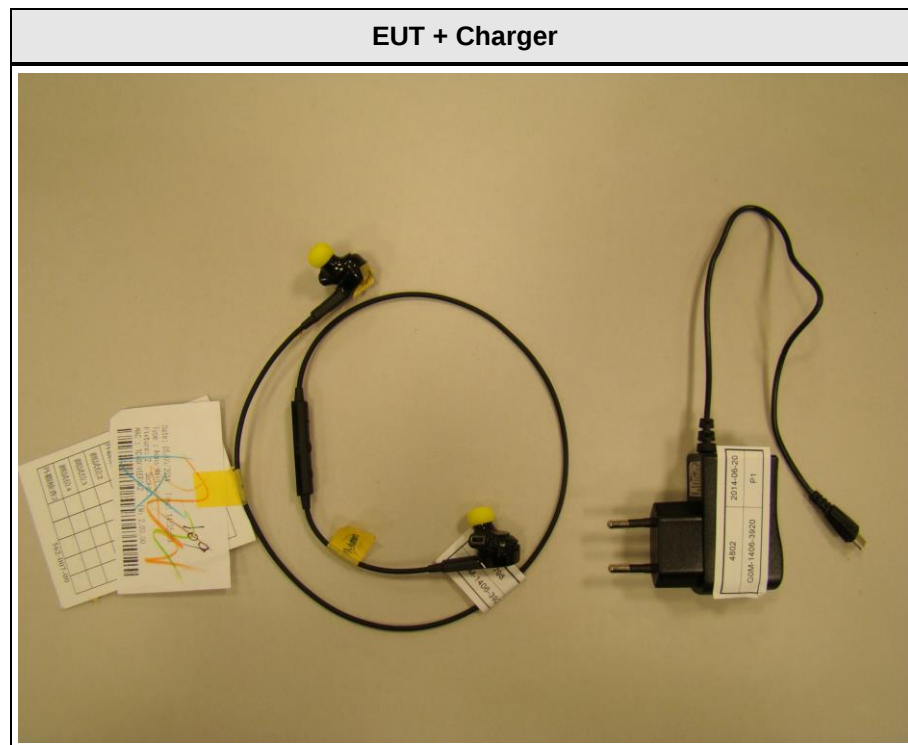

EUT

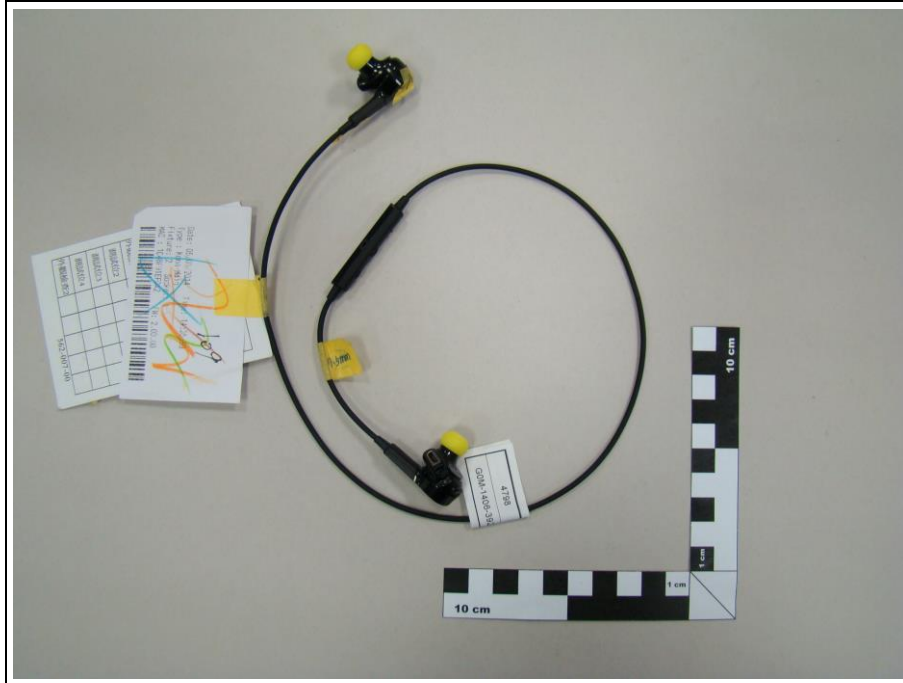

EUT Headset





Test Report No.: G0M-1406-3920-EF0115B-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany



EUT Multi-function button



1.2 Photos – Equipment internal

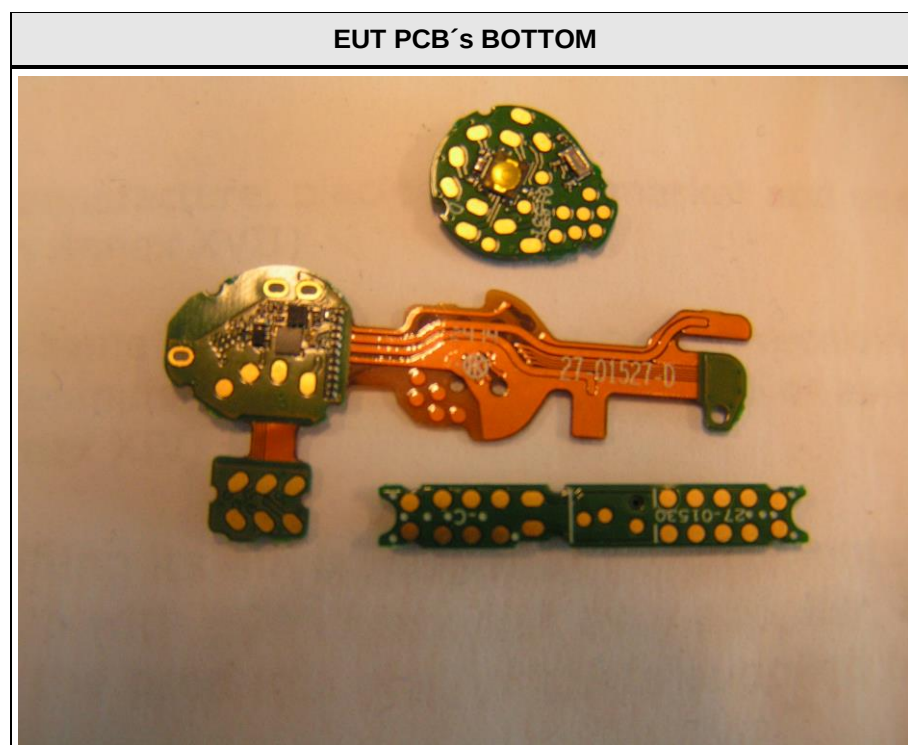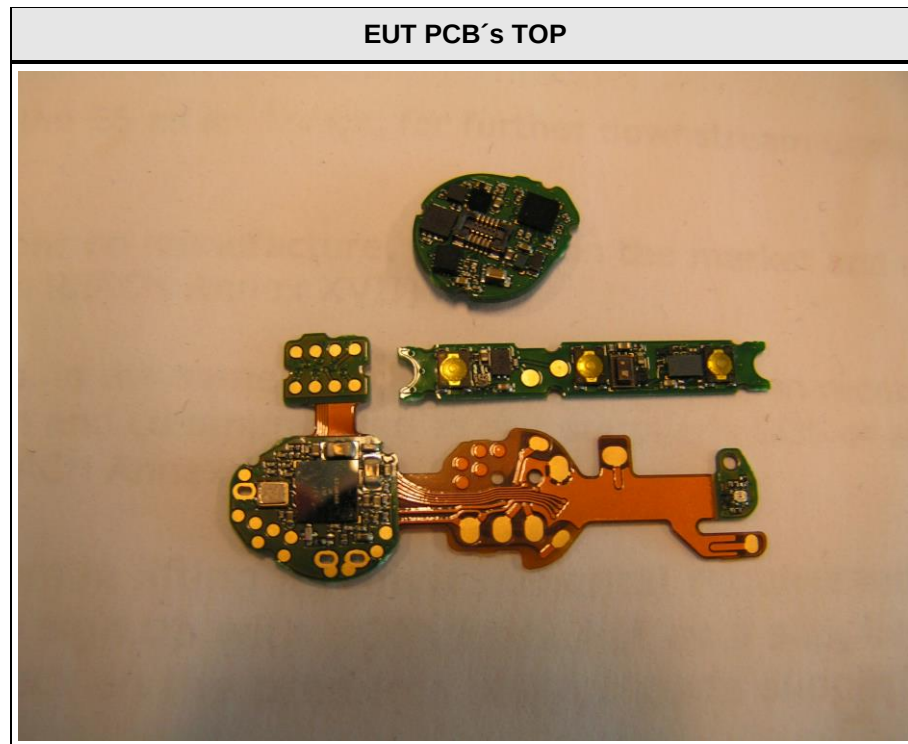

1.3 Photos – Test setup

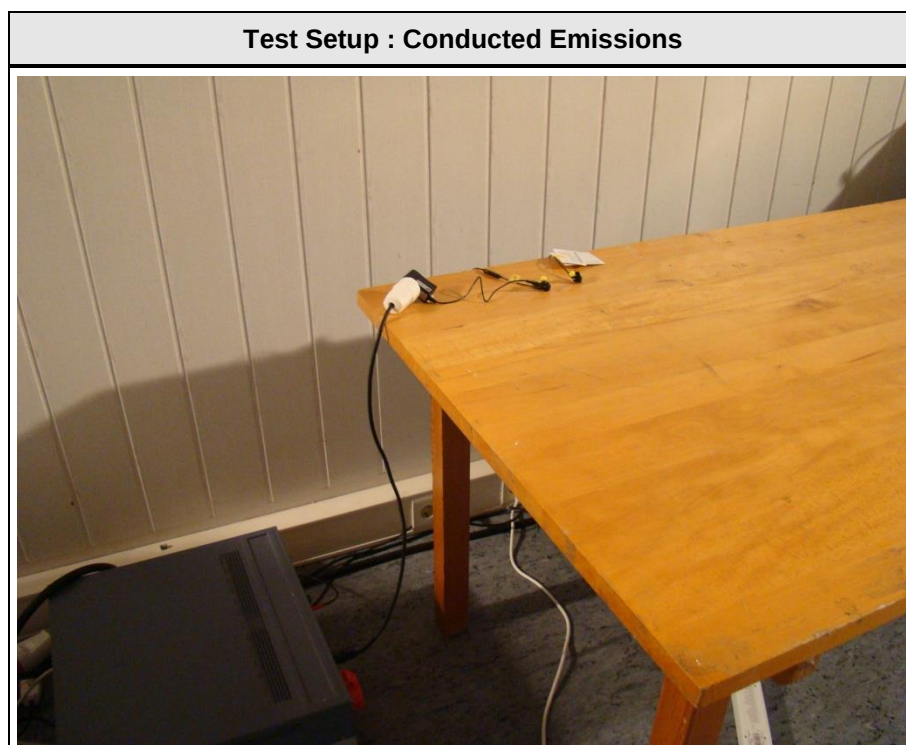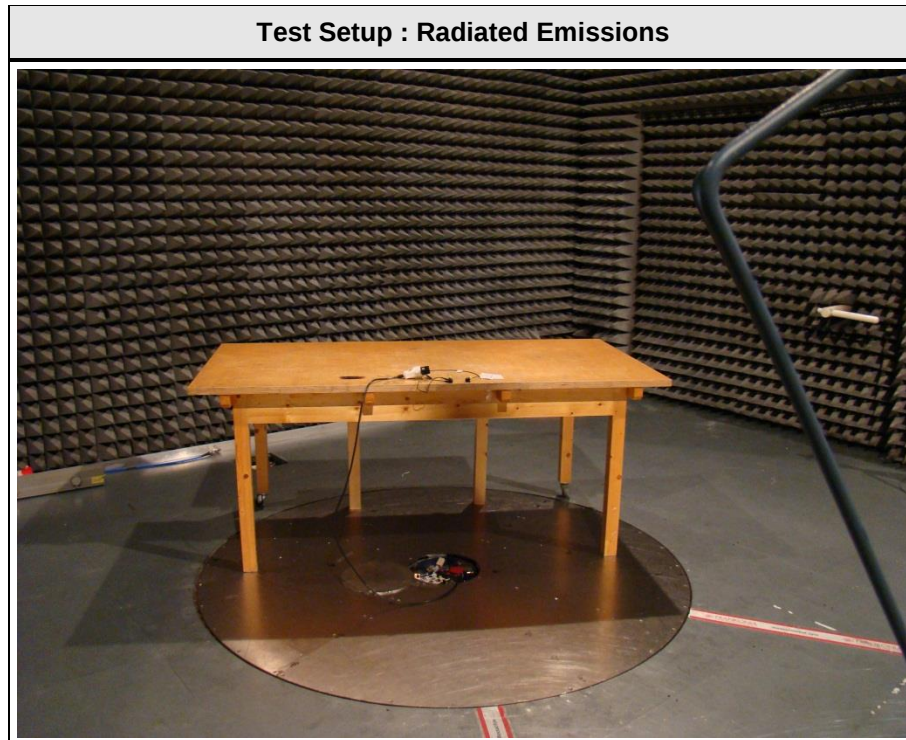

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
AE	Mobilephone	Pantech	C820	
AE : Auxiliary/Associated Equipment, or				

1.5 Operating Modes

Mode #	Description
1	Charging via AC/DC adaptor
2	Active Bluetooth link to Mobilephone

1.6 Test Equipment Used During Testing

Radiated emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD-Antenne	R&S	HL 223	EF00187	2014-03	2017-03
LPD-Antenna	R&S	HL 025	EF00327	2013-02	2016-02
EMI Test Receiver	R&S	ESU26	EF00887	2014-01	2015-01

Conducted emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2012-10	2014-10
EMI Test Receiver	R&S	ESCS 30	EF00295	2013-10	2014-10

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBμV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBμV/m). The FCC limits are given in units of μV/m. The following formula is used to convert the units of μV/m to dBμV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading	+	AF	=	Net Reading	:	Net reading - FCC limit	=	Margin
21.5 dBμV	+	26 dB	=	47.5 dBμV/m	:	47.5 dBμV/m - 57.0 dBμV/m	=	-9.5 dB

2 Result Summary

FCC 47 CFR Part 15B, Industry Canada RSS-Gen				
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks
47 CFR 15.109 RSS-Gen 4.9 & 4.10	Radiated emissions	ANSI C 63.4	PASS	
47 CFR 15.107 RSS-Gen 7.2.4	AC power line conducted emissions	ANSI C63.4	PASS	
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Radiated emissions


Radiated emissions acc. FCC 47 CFR 15.109 / IC RSS-Gen					Verdict: PASS		
Laboratory Parameters:		Required prior to the test			During the test		
Ambient Temperature		15 to 35 °C			24°C		
Relative Humidity		30 to 60 %			37%		
Test according referenced standards		Reference Method					
		ANSI C63.4					
Sample is tested with respect to the requirements of the equipment class		Equipment class					
		Class B					
Test frequency range determined from highest emission frequency		Highest emission frequency					
		> 1000 MHz (up to 5th Harm)					
Fully configured sample scanned over the following frequency range		Frequency range					
		30 MHz to 6 GHz					
Operating mode		1/2					
Limits and results Class B							
Frequency [MHz]	Quasi-Peak [dBµV/m]	Result	Average [dBµV/m]	Result	Peak [dBµV/m]	Result	
30 – 88	40	PASS	-		-	-	
88 – 216	43.5	PASS	-		-	-	
216 – 960	46	PASS	-		-	-	
960 – 1000	54	PASS	-		-	-	
> 1000	-	-	54	PASS	74	PASS	
Comments:							

Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1406-3920

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth headset
 Model: Jabra / OTE20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 22°C, Unom: 120 V AC (AC/DC adaptor)
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3m
 Mode: charging
 Test Date: 2014-06-26
 Note:

Index 64

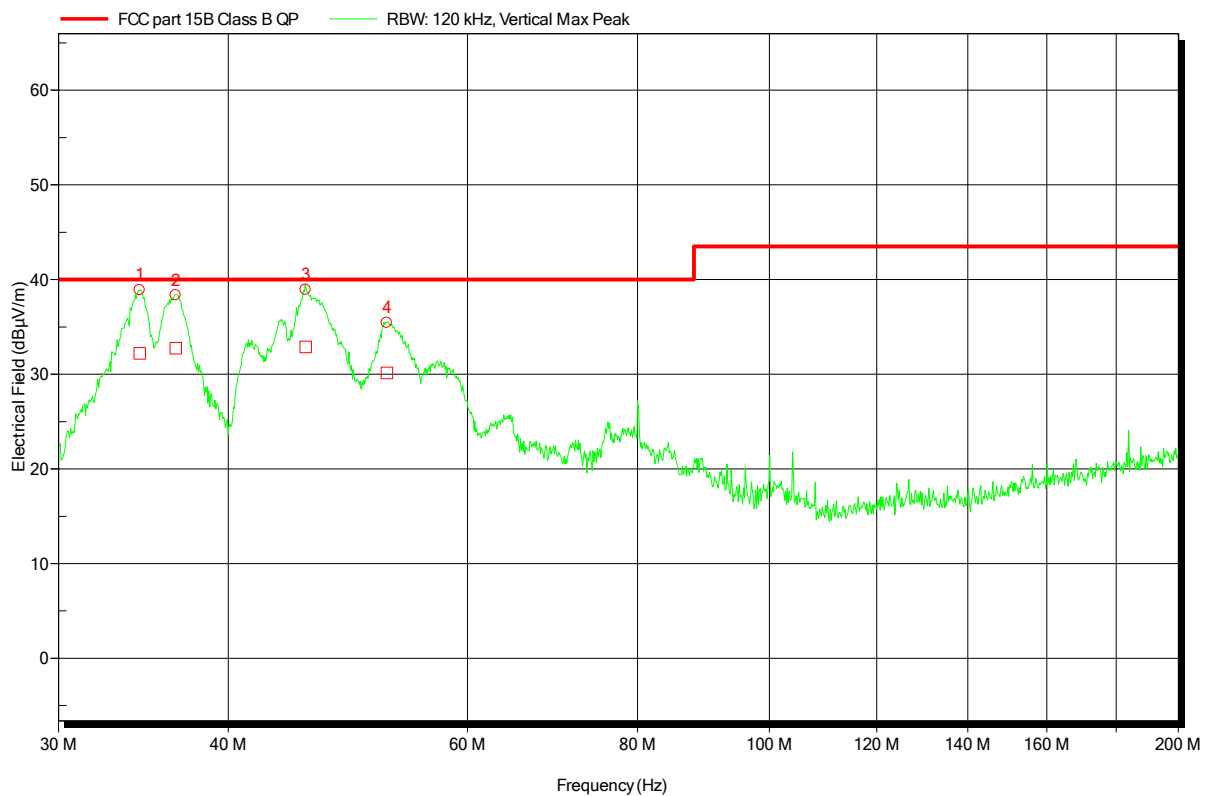

Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
34.44 MHz	32.21 dBµV/m	40 dBµV/m	-7.79 dB	Pass
36.6 MHz	32.77 dBµV/m	40 dBµV/m	-7.23 dB	Pass
45.6 MHz	32.89 dBµV/m	40 dBµV/m	-7.11 dB	Pass
52.32 MHz	30.15 dBµV/m	40 dBµV/m	-9.85 dB	Pass

Test Report No.: G0M-1406-3920-EF0115B-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1406-3920

Manufacturer:	GN Netcom A/S
EUT Name:	Bluetooth headset
Model:	Jabra / OTE20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 22°C, Unom: 120 V AC (AC/DC adaptor)
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3m
Mode:	charging
Test Date:	2014-06-26
Note:	

Index 65

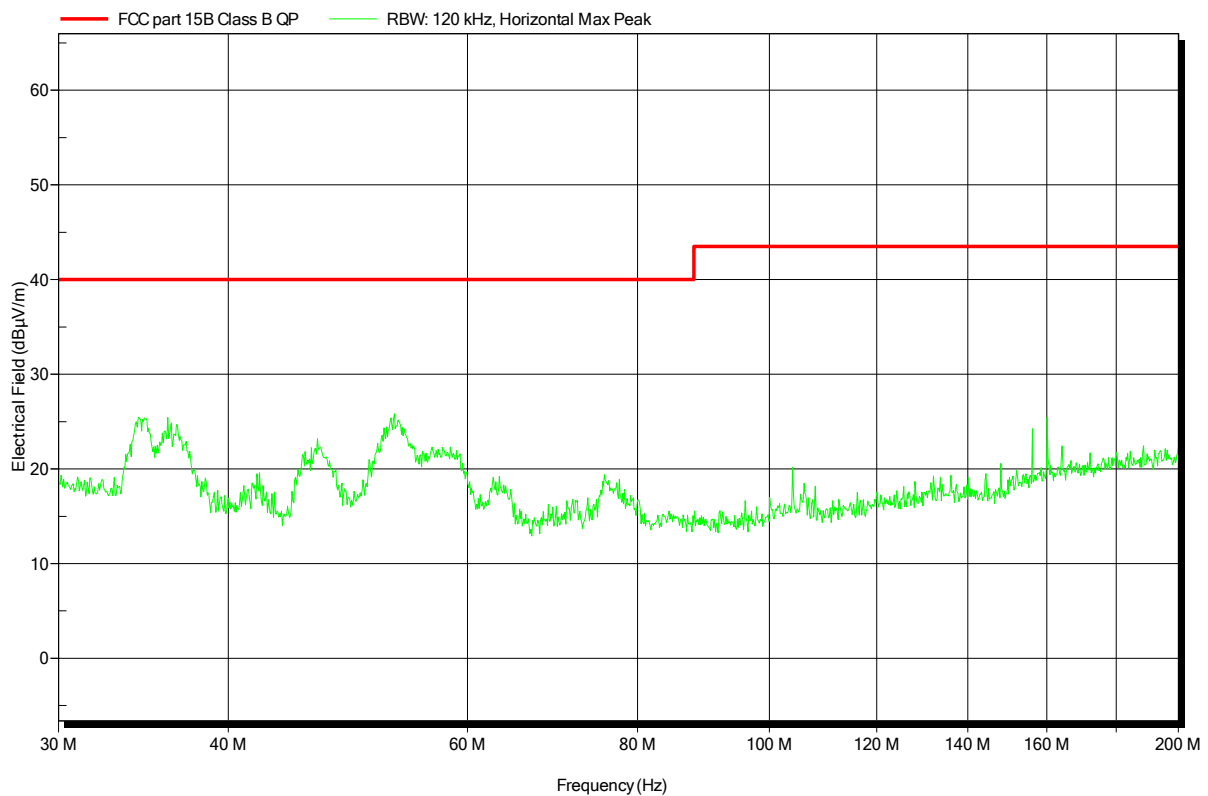


Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1406-3920

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth headset
 Model: Jabra / OTE20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 22°C, Unom: 120 V AC (AC/DC adaptor)
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3m
 Mode: charging
 Test Date: 2014-06-26
 Note:

Index 66

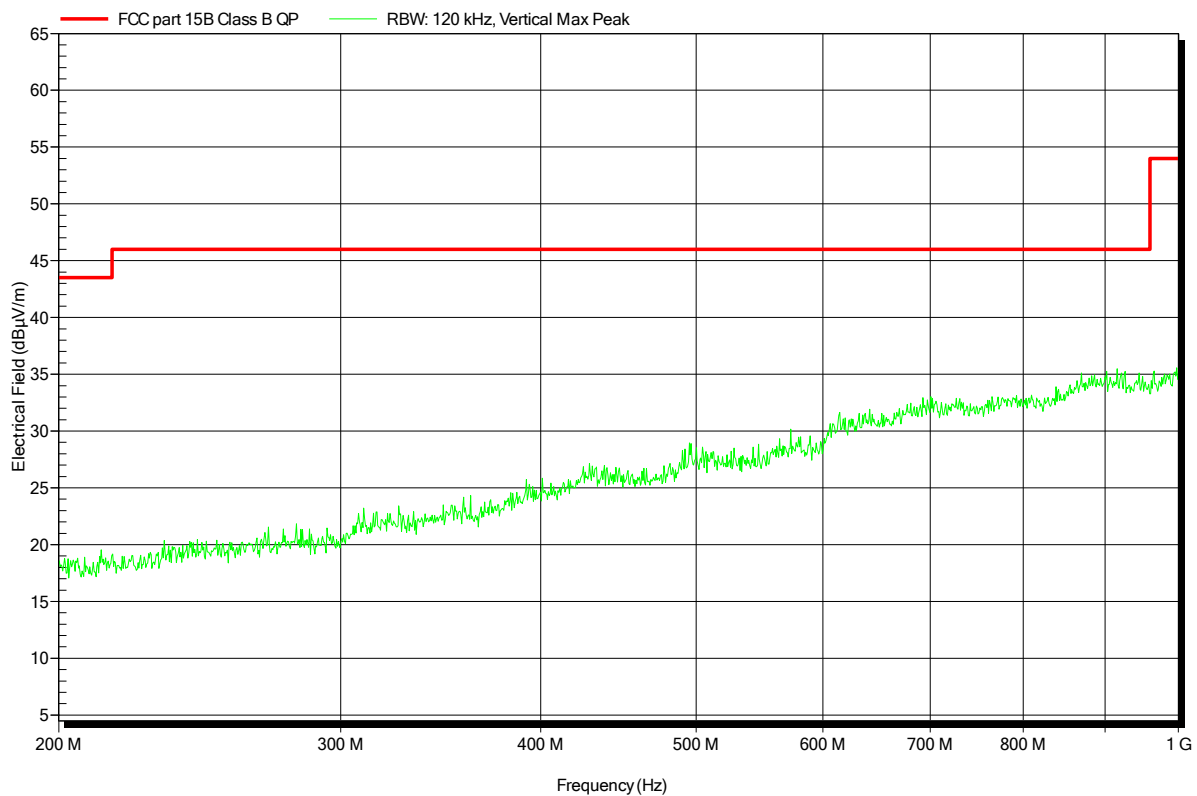


Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1406-3920

Manufacturer:	GN Netcom A/S
EUT Name:	Bluetooth headset
Model:	Jabra / OTE20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 22°C, Unom: 120 V AC (AC/DC adaptor)
Antenna:	Rohde & Schwarz HL 223, Horizontal
Measurement distance:	3m
Mode:	charging
Test Date:	2014-06-26
Note:	

Index 67

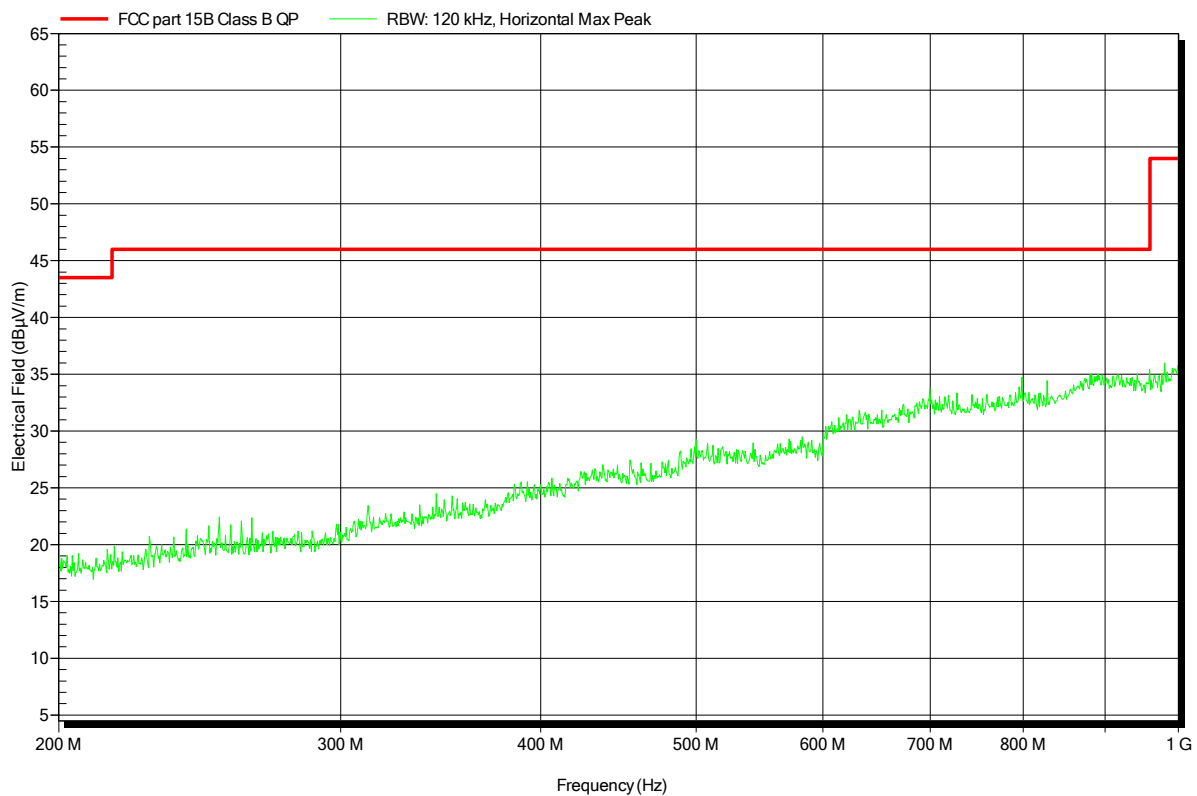


Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1406-3920

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth headset
 Model: Jabra / OTE20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 22°C, Unom: 120 V AC (AC/DC adaptor)
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 3m
 Mode: charging
 Test Date: 2014-06-26
 Note:

Index 69

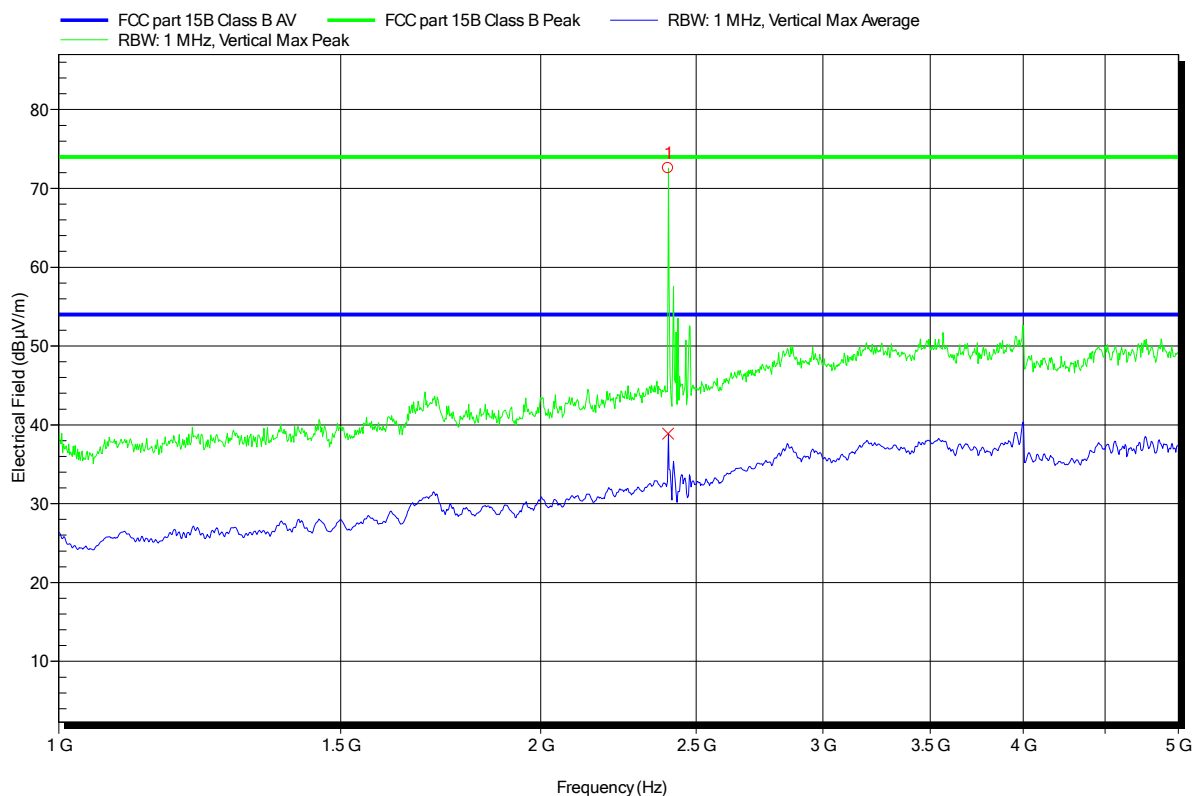

Frequency
2.402 GHz


Bluetooth first harmonic

Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1406-3920

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth headset
 Model: Jabra / OTE20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 22°C, Unom: 120 V AC (AC/DC adaptor)
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3m
 Mode: charging
 Test Date: 2014-06-26
 Note:

Index 68

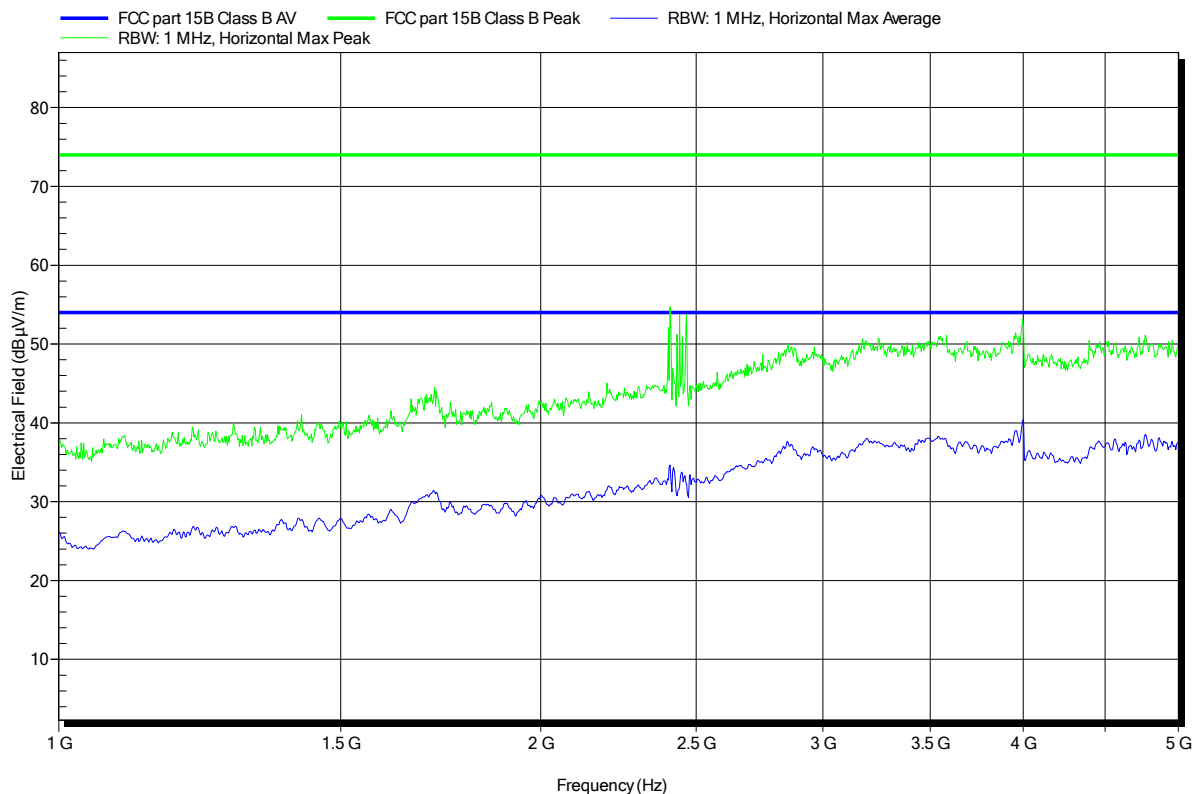


Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1406-3920

Manufacturer:	GN Netcom A/S
EUT Name:	Bluetooth headset
Model:	Jabra / OTE20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 22°C, Unom: 3.7V DC (battery)
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3m
Mode:	active Bluetooth link
Test Date:	2014-06-26
Note:	

Index 62

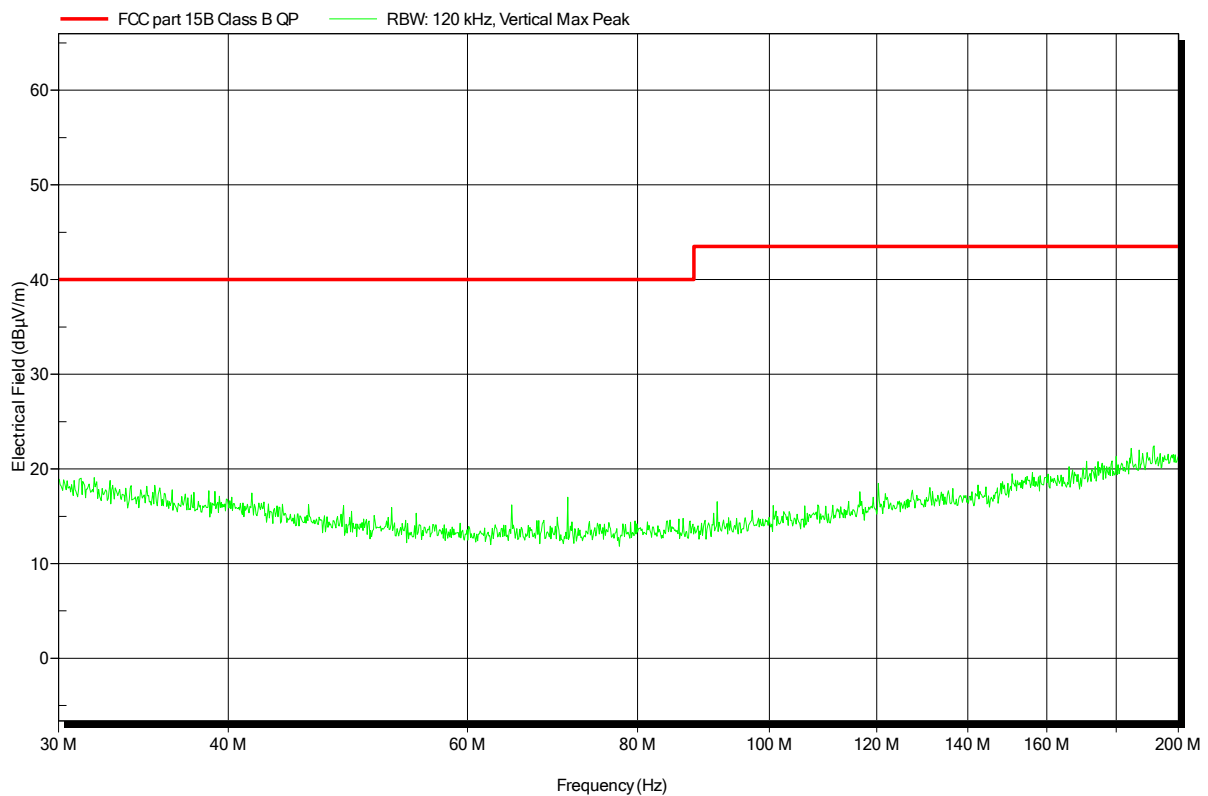

Test Report No.: G0M-1406-3920-EF0115B-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1406-3920

Manufacturer:	GN Netcom A/S
EUT Name:	Bluetooth headset
Model:	Jabra / OTE20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 22°C, Unom: 3.7V DC (battery)
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3m
Mode:	active Bluetooth link
Test Date:	2014-06-26
Note:	

Index 63

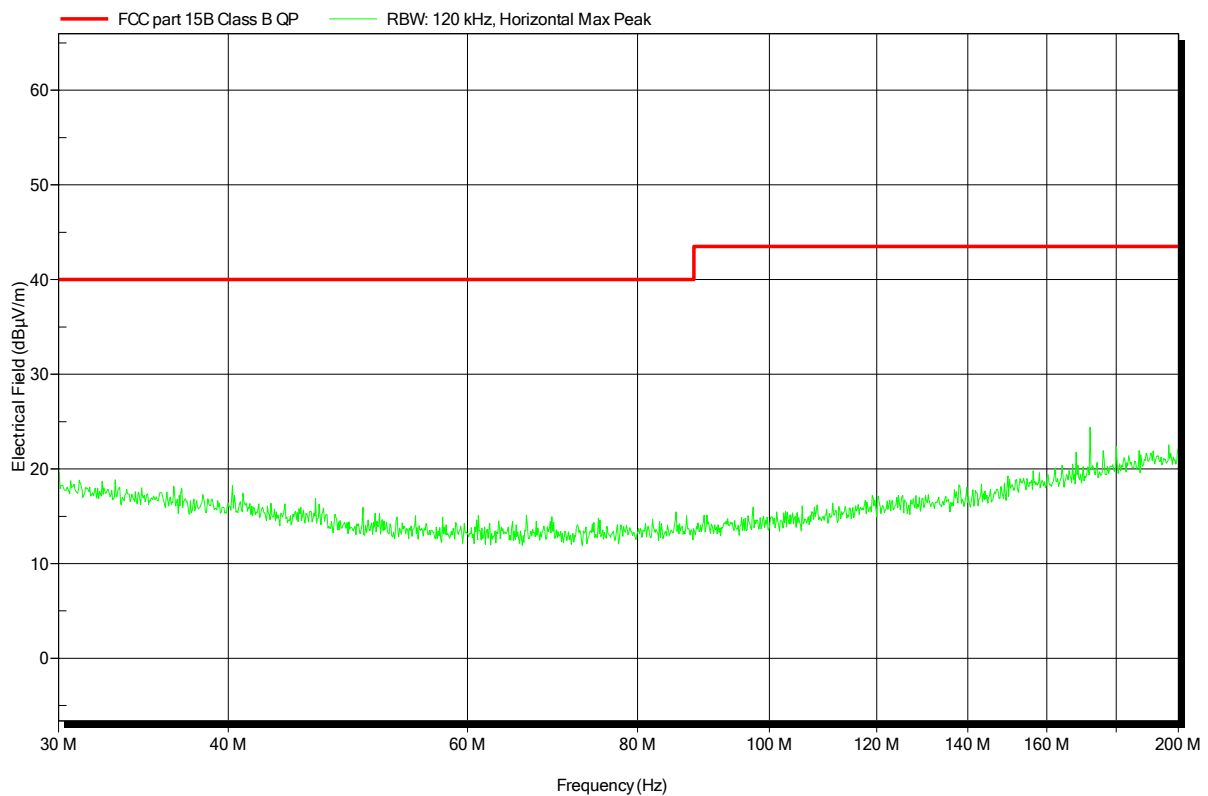

Test Report No.: G0M-1406-3920-EF0115B-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1406-3920

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth headset
 Model: Jabra / OTE20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 22°C, Unom: 3.7V DC (battery)
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3m
 Mode: active Bluetooth link
 Test Date: 2014-06-26
 Note:

Index 60

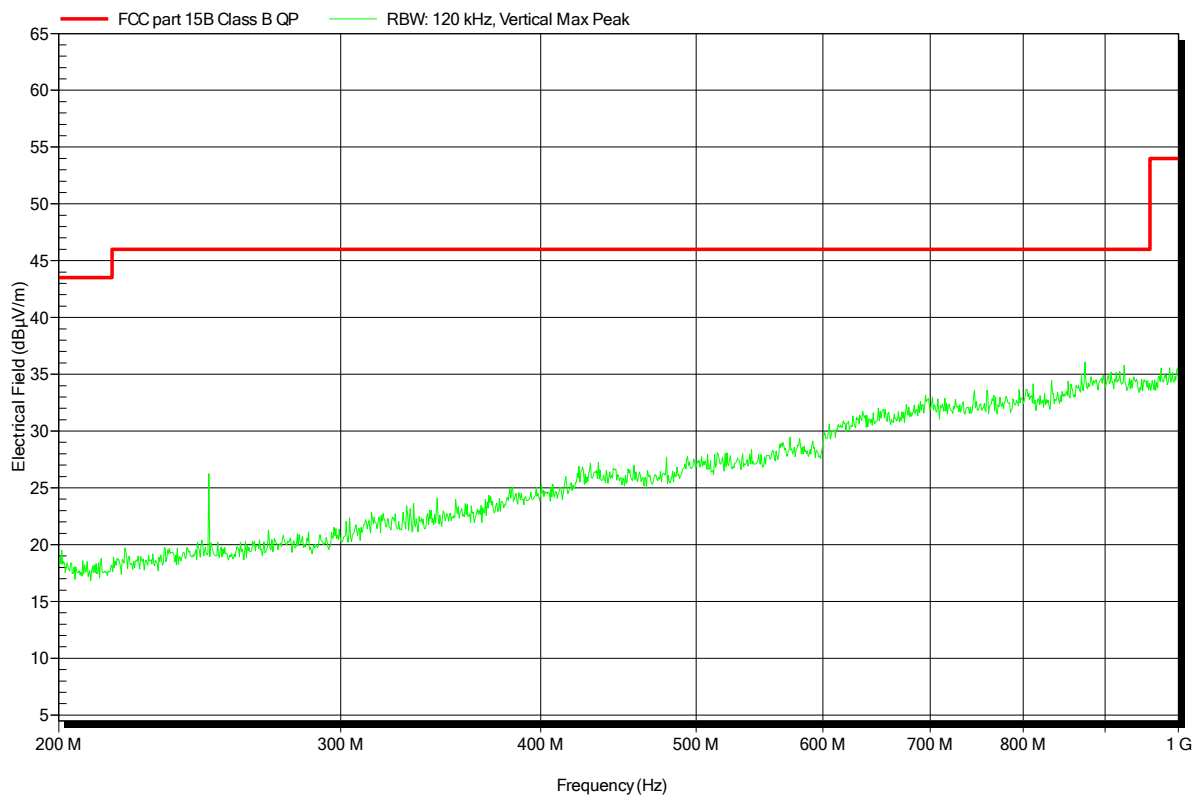


Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1406-3920

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth headset
 Model: Jabra / OTE20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 22°C, Unom: 3.7V DC (battery)
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3m
 Mode: active Bluetooth link
 Test Date: 2014-06-26
 Note:

Index 61

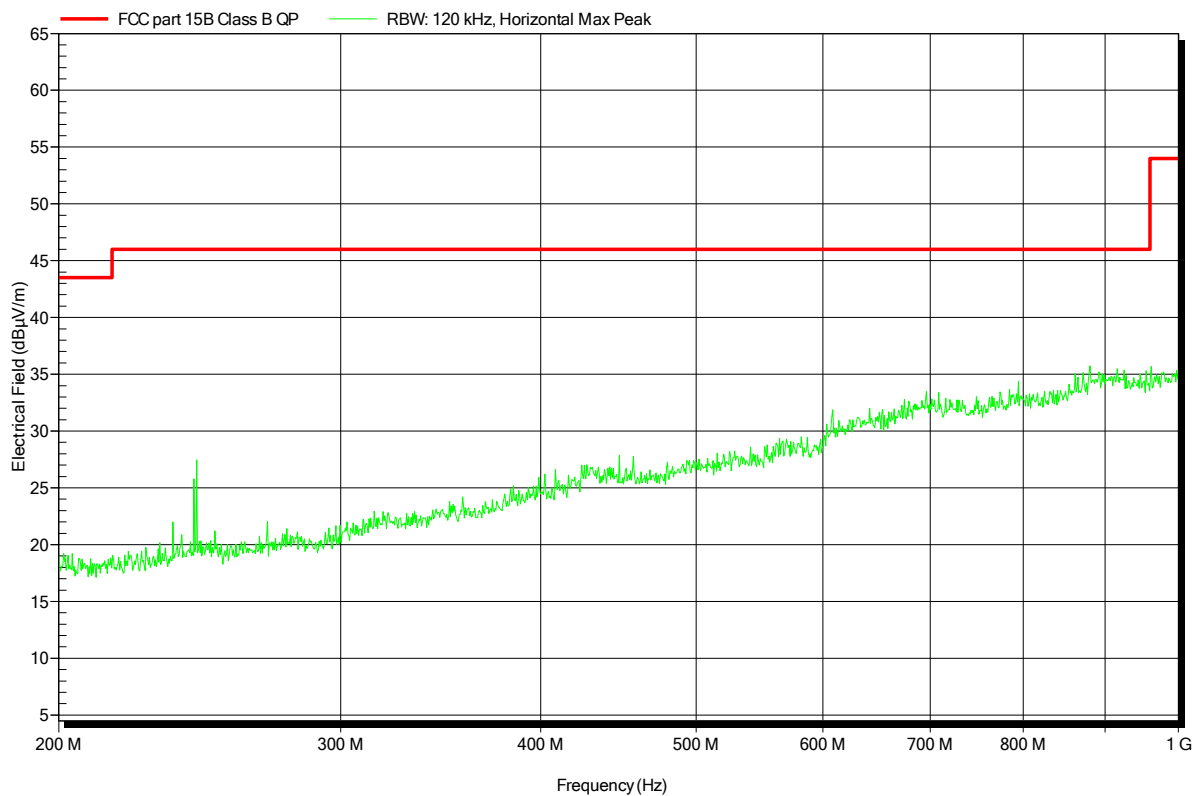


Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1406-3920

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth headset
 Model: Jabra / OTE20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 22°C, Unom: 3.7V DC (battery)
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 3m
 Mode: active Bluetooth link
 Test Date: 2014-06-26
 Note:

Index 58

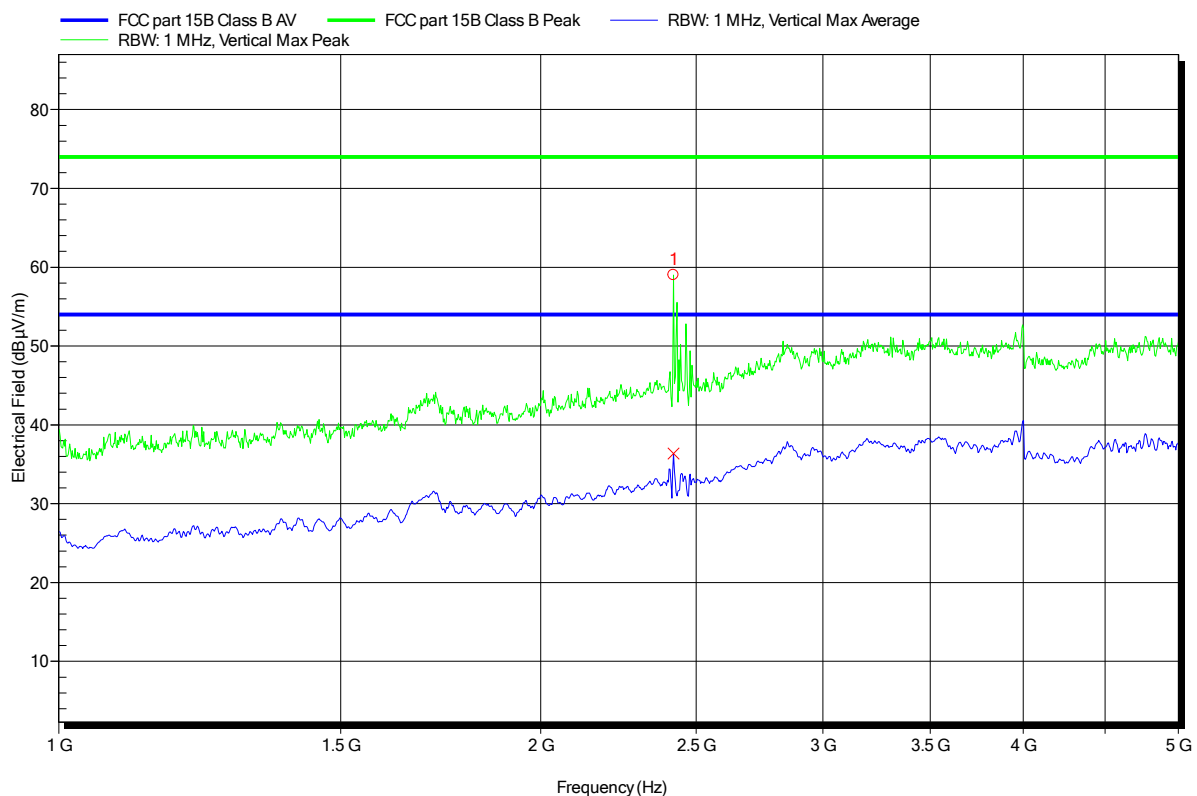

Frequency
2.42 GHz


Bluetooth first harmonic

Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1406-3920

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth headset
 Model: Jabra / OTE20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 22°C, Unom: 3.7V DC (battery)
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3m
 Mode: active Bluetooth link
 Test Date: 2014-06-26
 Note:

Index 59

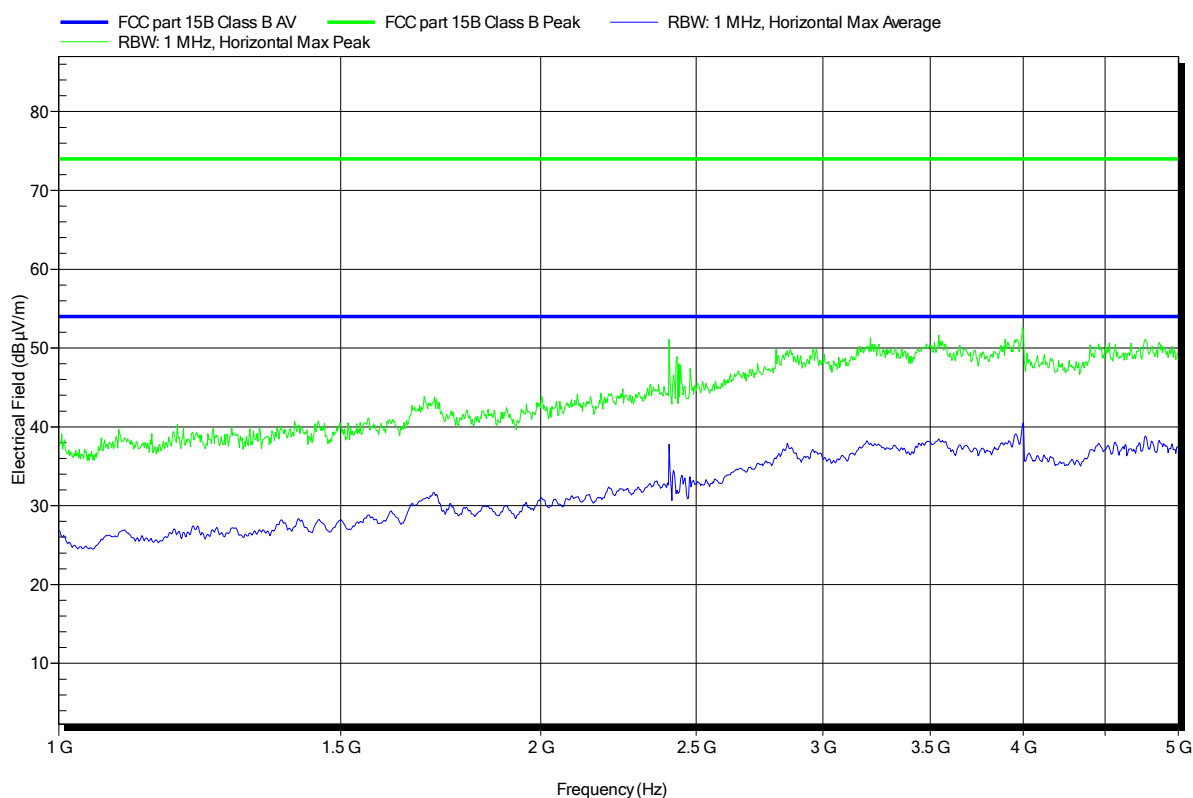

3.2 Test Conditions and Results – AC power line conducted emissions


Conducted emissions acc. FCC 47 CFR 15.107 / IC RSS-Gen			Verdict: PASS	
Laboratory Parameters:		Required prior to the test		During the test
Ambient Temperature		15 to 35 °C		24°C
Relative Humidity		30 to 60 %		37%
Test according referenced standards		Reference Method		
		ANSI C63.4		
Fully configured sample scanned over the following frequency range		Frequency range		
		0.15 MHz to 30 MHz		
Sample is tested with respect to the requirements of the equipment class		Equipment class		
		Class B		
Points of Application		Application Interface		
AC Mains		LISN		
Operating mode		1		
Limits and results Class B				
Frequency [MHz]	Quasi-Peak [dBµV]	Result	Average [dBµV]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments:				
* Limit decreases linearly with the logarithm of the frequency.				

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1406-3920

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth headset
 Model: Jabra / OTE20
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 22°C, Unom: 120 V AC (AC/DC adaptor)
 LISN: ESH2-Z5 N
 Mode: charging
 Test Date: 2014-06-25
 Note:

Index 56

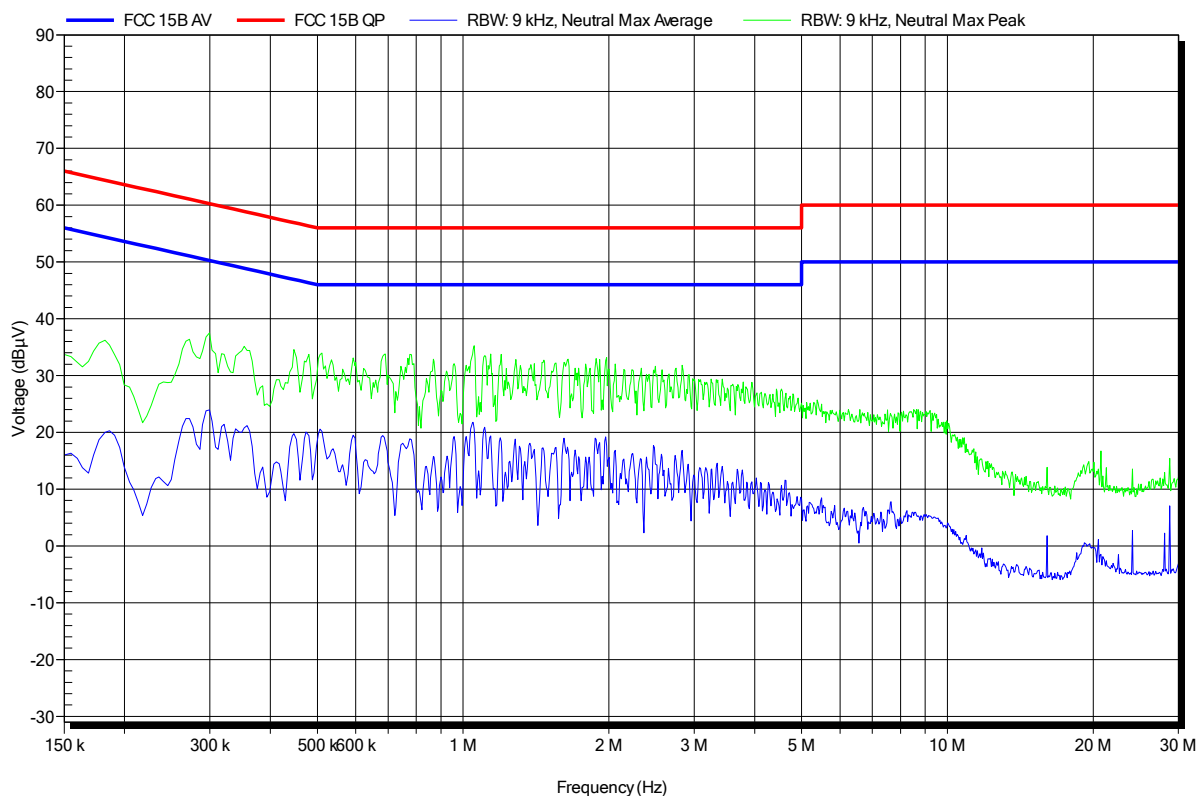

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1406-3920

Manufacturer:	GN Netcom A/S
EUT Name:	Bluetooth headset
Model:	Jabra / OTE20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 22°C, Unom: 120 V AC (AC/DC adaptor)
LISN:	ESH2-Z5 L
Mode:	charging
Test Date:	2014-06-25
Note:	

Index 57

