

Intermec Technologies Corporation

Simultaneous Transmission - FCC Part 15.247

Testing for Class II Permissive Change of FCC ID: EHA2610CF
to authorize co-location with FCC ID: EHAEM3420,
FCC ID: EHASMC46, & FCC ID: EHABTS080

700C configured with three internal radio modules:
CDMA (FCC ID: EHAEM3420) or GSM (FCC ID: EHASMC46)
802.11b/g (FCC ID: EHA2610CF)
Bluetooth (FCC ID: EHABTS080)

March 30, 2005

Report No. ITRM0074

Report Prepared By



www.nwemc.com
1-888-EMI-CERT

© 2004 Northwest EMC, Inc

EMC Test Report



22975 NW Evergreen Parkway
Suite 400
Hillsboro, Oregon 97124

Certificate of Test

Issue Date: March 30, 2005

Intermec Technologies Corporation

700C configured with four internal radio modules:

CDMA (FCC ID: EHAEM3420) or GSM (FCC ID: EHASMC46)

802.11b/g (FCC ID: EHA2610CF)

Bluetooth (FCC ID: EHABTS080)

Specification	Emissions		
	Test Method	Pass	Fail
FCC 15.247(d) Spurious Radiated Emissions:2004 (Simultaneous Transmit)	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Modifications made to the product

See the Modifications section of this report

Test Facility

- The measurement facility used to collect the data is located at:

Northwest EMC, Inc
22975 NW Evergreen Parkway, Suite 400
Hillsboro, OR 97124

Phone: (503) 844-4066 Fax: 844-3826

This site has been fully described in a report filed with and accepted by the FCC (Federal Communications Commission) and Industry Canada.

Approved By:

Don Facteau, IS Manager

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.

Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested, the specific description is noted in each of the individual sections of the test report supporting this certificate of test.

Revision Number	Description	Date	Page Number
00	None		

FCC: Accredited by NVLAP for performance of FCC radio, digital, and ISM device testing. Our Open Area Test Sites, certification chambers, and conducted measurement facilities, have been fully described in reports filed with the FCC and accepted by the FCC in letters maintained in our files. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by the FCC as a Telecommunications Certification Body (TCB). This allows Northwest EMC to certify transmitters to FCC specifications in accordance with 47 CFR 2.960 and 2.962.



NVLAP: Northwest EMC, Inc. is recognized under the United States Department of Commerce, National Institute of Standards and Technology, National Voluntary Laboratory Accreditation Program for satisfactory compliance with the requirements of ISO/IEC 17025 for Testing Laboratories. The NVLAP accreditation encompasses Electromagnetic Compatibility Testing in accordance with the European Union EMC Directive 89/336/EEC, ANSI C63.4, MIL-STD 461E, DO-160D and SAE J1113. Additionally, Northwest EMC is accredited by NVLAP to perform radio testing in accordance with the European Union R&TTE Directive 1999/5/EEC, the requirements of FCC, and the RSS radio standards for Industry Canada. Accreditation has been granted to Northwest EMC, Inc. under Certificate Numbers: 200629-0, 200630-0, and 200676-0.



Industry Canada: Accredited by NVLAP for performance of Industry Canada RSS and ICES testing. Our Open Area Test Sites and certification chambers comply with RSS 212, Issue 1 (Provisional) and have been filed with Industry Canada and accepted. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by NIST and recognized by Industry Canada as a Certification Body (CB) per the APEC Mutual Recognition Arrangement (MRA). This allows Northwest EMC to certify transmitters to Industry Canada technical requirements.



CAB: Designated by NIST and validated by the European Commission as a Conformity Assessment Body (CAB) to conduct tests and approve products to the EMC directive and transmitters to the R&TTE directive, as described in the U.S. - EU Mutual Recognition Agreement



TÜV Product Service: Included in TÜV Product Service Group's Listing of Recognized Laboratories. It qualifies in connection with the TÜV Certification after Recognition of Agent's Testing Program for the product categories and/or standards shown in TÜV's current Listing of CARAT Laboratories available from TÜV. A certificate was issued to represent that this laboratory continues to meet TÜV's CARAT Program requirements. Certificate No. USA0401C



TÜV Rheinland: Authorized to carryout EMC tests by order and under supervision of TÜV Rheinland. This authorization is based on "Conditions for EMC-Subcontractors" of November 1992.



NEMKO: Assessed and accredited by NEMKO (Norwegian testing and certification body) for European emissions and immunity testing. As a result of NEMKO's laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification (Authorization No. ELA 119).



Technology International: Assessed in accordance with ISO Guide 25 defining the general international requirements for the competence of calibration and testing laboratories and with ITI assessment criteria LACO196. Based upon that assessment Interference Technology International, Ltd., has granted approval for specifications implementing the EU Directive on EMC (89/336/EEC and amendments). The scope of the approval was provided on a Schedule of Assessment supplied with the certificate and is available upon request.



Australia/New Zealand: The National Association of Testing Authorities (NATA), Australia has been appointed by the ACA as an accreditation body to accredit test laboratories and competent bodies for EMC standards. Accredited test reports or assessments by competent bodies must carry the NATA logo. Test reports made by an overseas laboratory that has been accredited for the relevant standards by an overseas accreditation body that has a Mutual Recognition Agreement (MRA) with NATA are also accepted as technical grounds for product conformity. The report should be endorsed with the respective logo of the accreditation body. (NVLAP)



VCCI: Accepted as an Associate Member to the VCCI, Acceptance No. 564. Conducted and radiated measurement facilities have been registered in accordance with Regulations for Voluntary Control Measures, Article 8. (*Registration Nos. - Evergreen: C-1071 and R-1025, Trails End: C-1877 and R-1760, Sultan: R-871, C-1784 and R-1761*)



BSMI: Northwest EMC has been designated by NIST and validated by C-Taipei (BSMI) as a CAB to conduct tests as described in the APEC Mutual Recognition Agreement. License No.SL2-IN-E-1017.



GOST: Northwest EMC, Inc. has been assessed and accredited by the Russian Certification bodies Certinform VNIINMASH, CERTINFO, SAMTES, and Federal CHEC, to perform EMC and Hygienic testing for Information Technology Products. As a result of their laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification



SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/scope.asp>

What is measurement uncertainty?

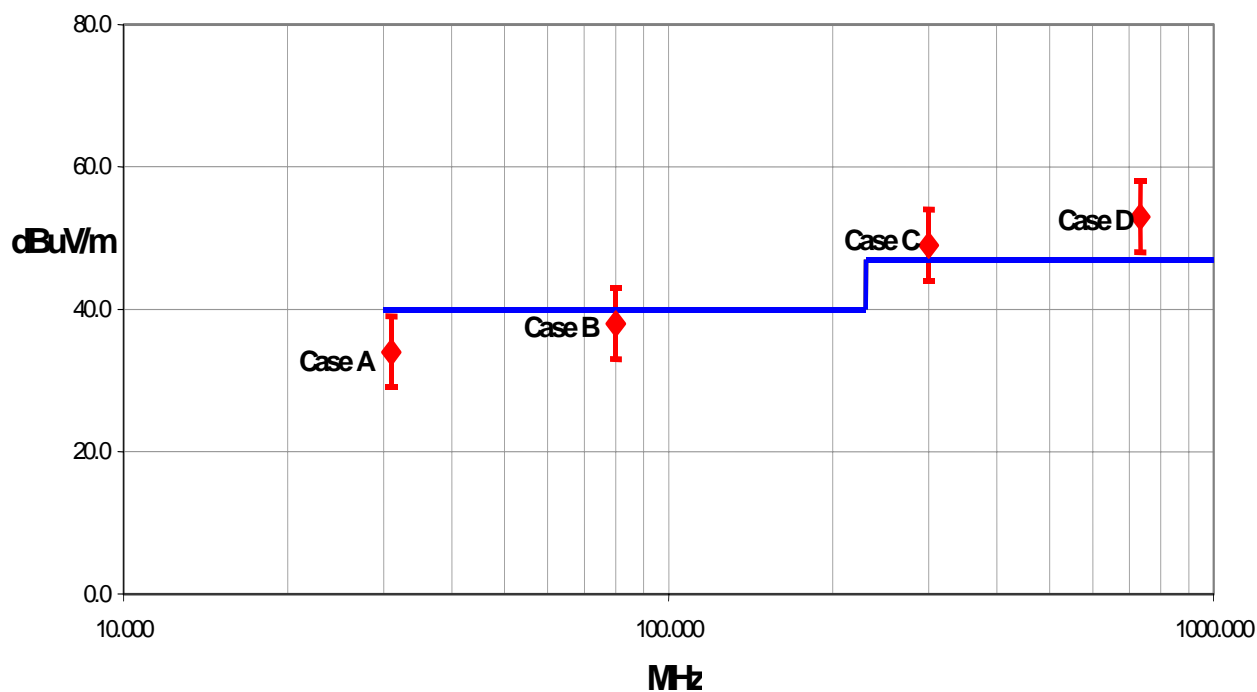
When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. The following statement of measurement uncertainty is used to reflect the accuracy of the measured result as compared with its “true” value. In the case of transient tests (ESD, EFT, Surge, Voltage Dips and Interruptions), the test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements.

The following documents were the basis for determining the uncertainty levels of our measurements:

- “ISO Guide to the Expression of Uncertainty in Measurements”, October 1993
- “NIS81: The Treatment of Uncertainty in EMC Measurements”, May 1994
- “IEC CISPR 16-3 A1 f1 Ed.1: Radio-interference measurements and statistical techniques”, December 2000

How might measurement uncertainty be applied to test results?

If the diamond marks the measured value for the test and the vertical bars bracket the range of + and – measurement uncertainty, then test results can be interpreted from the diagram below.



Test Result Scenarios:

Case A: Product complies.

Case B: Product conditionally complies. It is not possible to say with 95% confidence that the product complies.

Case C: Product conditionally does not comply. It is not possible to say with 95% confidence that the product does not comply.

Case D: Product does not comply.

Radiated Emissions ≤ 1 GHz

Value (dB)

Test Distance	Probability Distribution	Biconical Antenna		Log Periodic Antenna		Dipole Antenna	
		3m	10m	3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.86 - 1.88	+ 1.82 - 1.87	+ 2.23 - 1.41	+ 1.29 - 1.26	+ 1.31 - 1.27	+ 1.25 - 1.25
Expanded uncertainty U (level of confidence $\approx 95\%$)	normal (k=2)	+ 3.72 - 3.77	+ 3.64 - 3.73	+ 4.46 - 2.81	+ 2.59 - 2.52	+ 2.61 - 2.55	+ 2.49 - 2.49

Radiated Emissions > 1 GHz

Value (dB)

Test Distance	Probability Distribution	Without High Pass Filter		With High Pass Filter	
		3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.29 - 1.25	+ 1.38 - 1.35	+ 1.29 - 1.25	+ 1.38 - 1.35
Expanded uncertainty U (level of confidence $\approx 95\%$)	normal (k=2)	+ 2.57 - 2.51	+ 2.76 - 2.70	+ 2.57 - 2.51	+ 2.76 - 2.70

Conducted Emissions

Test Distance	Probability Distribution	Value (+/- dB)
Combined standard uncertainty $u_c(y)$	normal	1.48
Expanded uncertainty U (level of confidence $\approx 95\%$)	normal (k = 2)	2.97

Radiated Immunity

Test Distance	Probability Distribution	Value (+/- dB)
Combined standard uncertainty $u_c(y)$	normal	1.05
Expanded uncertainty U (level of confidence $\approx 95\%$)	normal (k = 2)	2.11

Conducted Immunity

Test Distance	Probability Distribution	Value (+/- dB)
Combined standard uncertainty $u_c(y)$	normal	1.05
Expanded uncertainty U (level of confidence $\approx 95\%$)	normal (k = 2)	2.10

Legend

$u_c(y)$ = square root of the sum of squares of the individual standard uncertainties

U = combined standard uncertainty multiplied by the coverage factor: k . This defines an interval about the measured result that will encompass the true value with a confidence level of approximately 95%. If a higher level of confidence is required, then $k=3$ (CL of 99.7%) can be used. Please note that with a coverage factor of one, $u_c(y)$ yields a confidence level of only 68%.

**California****Orange County Facility**

41 Tesla Ave.
Irvine, CA 92618
(888) 364-2378
FAX (503) 844-3826

**Oregon****Evergreen Facility**

22975 NW Evergreen Pkwy.,
Suite 400
Hillsboro, OR 97124
(503) 844-4066
FAX (503) 844-3826

**Oregon****Trails End Facility**

30475 NE Trails End Lane
Newberg, OR 97132
(503) 844-4066
FAX (503) 537-0735

**Washington****Sultan Facility**

14128 339th Ave. SE
Sultan, WA 98294
(888) 364-2378
FAX (360) 793-2536

Party Requesting the Test

Company Name:	Intermec Technologies Corporation
Address:	550 Second St. SE
City, State, Zip:	Cedar Rapids, IA 52401-2023
Test Requested By:	Scott Holub
Model:	700C configured with three internal radio modules: CDMA (FCC ID: EHAEM3420) or GSM (FCC ID: EHASMC46) 802.11b/g (FCC ID: EHA2610CF) Bluetooth (FCC ID: EHABTS080)
First Date of Test:	2-2-2005
Last Date of Test:	3-16-2005
Receipt Date of Samples:	2-2-2005
Equipment Design Stage:	Production
Equipment Condition:	No visual damage.

Information Provided by the Party Requesting the Test

Clocks/Oscillators:	Not provided at the time of test.
I/O Ports:	Serial

Functional Description of the EUT (Equipment Under Test):

Intermec's Handheld Computer, Model 700C was configured with three co-located radios. The 700C contained a CDMA radio (FCC ID: EHAEM3420) or GSM radio (FCC ID: EHASMC46), an 802.11(b)/(g) radio (FCC ID: EHA2610CF), and a Bluetooth radio (FCC ID: EHABTS080). The CDMA and GSM radios are never installed in the same 700C.

Client Justification for EUT Selection:

Not Provided

Client Justification for Test Selection:

This test demonstrated compliance with FCC Part 15.247 emissions limits while the co-located radios were transmitting simultaneously. Each radio transmits through its own antenna. This report will be used as part of a Class II Permissive Change to authorize the co-location of the CDMA or GSM, and Bluetooth radios with the 802.11b/g radio.

EUT Photo

Equipment modifications					
Item	Test	Date	Modification	Note	Disposition of EUT
1	Spurious Radiated Emissions	02/02/2005 to 03/16/2005	No EMI suppression devices were added or modified during this test.	Same configuration as delivered.	EUT remained at Northwest EMC.

Justification

Intermec's Handheld Computer, Model 700C was configured with three co-located radios. The 700C contained a CDMA radio (FCC ID: EHAEM3420), an 802.11(b)/(g) radio (FCC ID: EHA2610CF), and a Bluetooth radio (FCC ID: EHABTS080). This test demonstrated compliance with FCC Part 15.247 emissions limits while the co-located radios were transmitting simultaneously. Each radio transmits through its own antenna.

All possible combinations of harmonic emissions from the CDMA, 802.11(b)/(g), and Bluetooth radios were compared numerically. It was determined that there were no possible coincidental harmonics below 1 GHz. All the radios were configured for simultaneous transmission at the channels specified below.

Channels in Specified Band Investigated:

802.11(b):	1, 11
CDMA (Cellular):	54, 55, 395, 467
CDMA (PCS):	1, 35, 1153
Bluetooth:	5, 11, 62, 68, 79

Operating Modes Investigated:**Bluetooth Radio in PW40 with 700C in cradle:**

Simultaneous transmission of Bluetooth Channel 11, 802.11(b) Channel 1, & CDMA PCS Channel 1
Simultaneous transmission of Bluetooth Channel 11, 802.11(b) Channel 1, & CDMA PCS Channel 1153
Simultaneous transmission of Bluetooth Channel 68, 802.11(b) Channel 11, & CDMA PCS Channel 35
Simultaneous transmission of Bluetooth Channel 62, 802.11(b) Channel 11, & CDMA PCS Channel 1153
Simultaneous transmission of Bluetooth Channel 11, 802.11(b) Channel 1, & CDMA Cellular Channel 467
Simultaneous transmission of Bluetooth Channel 5, 802.11(b) Channel 1, & CDMA Cellular Channel 395
Simultaneous transmission of Bluetooth Channel 79, 802.11(b) Channel 11, & CDMA Cellular Channel 55
Simultaneous transmission of Bluetooth Channel 79, 802.11(b) Channel 11, & CDMA Cellular Channel 54

Antennas Investigated:

802.11(b):	Folded Monopole internal to 700C, P/N 805-608-104
CDMA:	Tri-band Antenna external to 700C, P/N 805-624-001
Bluetooth:	Chip antenna integral to Bluetooth module inside 700C

Data Rates Investigated:

Maximum

Power Input Settings Investigated:

120 VAC, 60 Hz.

Frequency Range Investigated

Start Frequency	1 GHz	Stop Frequency	25 GHz
------------------------	-------	-----------------------	--------

Software\Firmware Applied During Test

Exercise software	FCC Tests Blue Test Test Utility	Version	Unknown Unknown 0.4
Description			
This system was tested using special test software to exercise the functions of the device during the testing such as channels, power, and modulation during simultaneous transmission.			

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
Handheld Computer	Intermec Technologies Corporation	700C	13790400011
AC Adapter	Elpac Power Systems	FW1812	011025

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads	PA	1.3	PA	Handheld Computer	AC Adapter
AC Power	No	2.0	No	AC Adapter	AC Mains
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

Measurement Equipment

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Antenna, Horn	EMCO	3160-09	AHG	NCR	NA
Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	10/08/2003	24 mo
Antenna, Biconilog	EMCO	3141	AXE	12/03/2003	24 mo
Pre-Amplifier	Amplifier Research	LN1000A	APS	02/05/2004	13 mo
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APJ	01/05/2004	13 mo
High Pass Filter	Micro-Tronics	HPM50111	HFO	04/13/2004	13 mo
Attenuator		2082-6148-20	ATE	02/03/2004	13 mo
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQF	12/02/2004	13 mo
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/02/2004	13 mo
Spectrum Analyzer Display	Hewlett Packard	85662A	AALD	12/02/2004	13 mo
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo
Antenna, Horn	EMCO	3160-08	AHK	NCR	NA
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APC	10/08/2003	15 mo

Test Description

Requirement: Per 15.247(d), the field strength of any spurious emissions or modulation products that fall in a restricted band, as defined in 47 CFR 15.205, is measured. The peak level must comply with the limits specified in 47 CFR 15.35(b). The average level (taken with a 10Hz VBW) must comply with the limits specified in 15.209.

Configuration: Intermec's Handheld Computer, Model 700C was configured with three co-located radios. The 700C contained a CDMA radio (FCC ID: EHAEM3420), an 802.11(b)/(g) radio (FCC ID: EHA2610CF), and a Bluetooth radio (FCC ID: EHABTS080). This test demonstrated compliance with FCC Part 15.247 emissions limits while the co-located radios were transmitting simultaneously. Each radio transmits through its own antenna.

Simultaneous Transmission: For co-located radios, it is necessary to measure the field strength of spurious emissions, while co-located radios are transmitting simultaneously. The following is an excerpt from the FCC/TCB training Q & A, October 2002, Day 2, Question 7:


Assuming that the radios do not share an antenna, only radiated tests for simultaneous transmission is required. If the radios share an antenna, antenna conducted measurements would also be required. Only one set of worst case simultaneous transmission data is going to be requested to be submitted at this time. The test engineer should indicate the worst case condition and provide justification as to why the worst case condition was chosen. The grantee should be reminded that even if the FCC requests one set of data, they are responsible for compliance for all modes of simultaneous transmission.


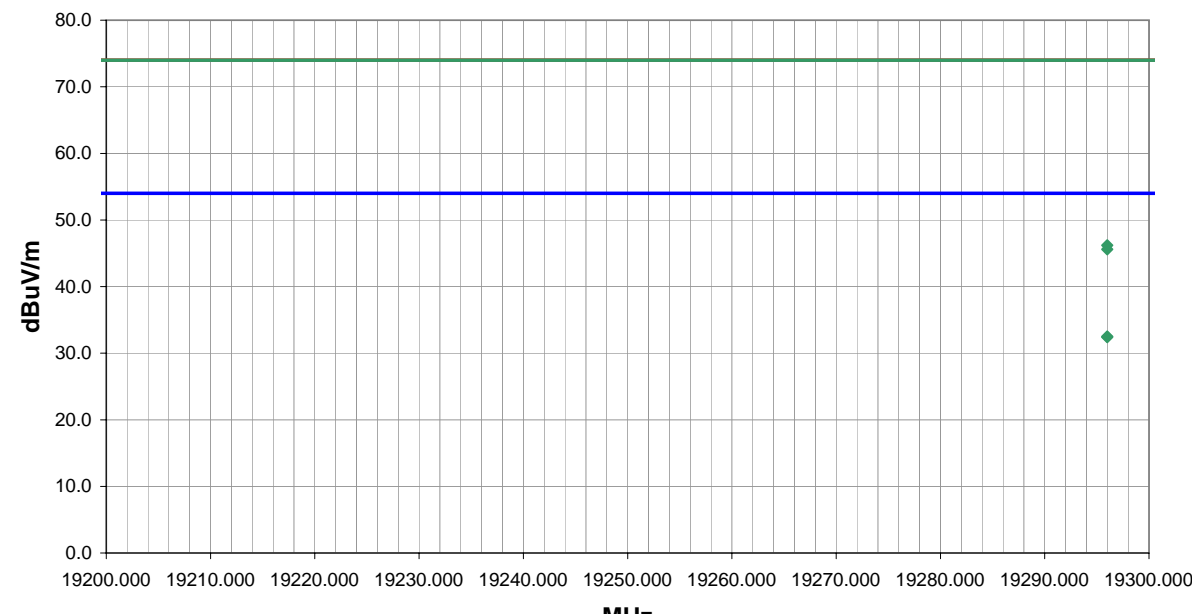
All possible combinations of harmonic emissions from the CDMA, 802.11(b), and Bluetooth radios were compared numerically. It was determined that there were no possible coincidental harmonics below 1 GHz. The frequency range from 1 GHz to 25 GHz was investigated for channel combinations that would produce coincidental harmonics. Compliance with the restricted band at 2483.5 – 2500 MHz was also measured.


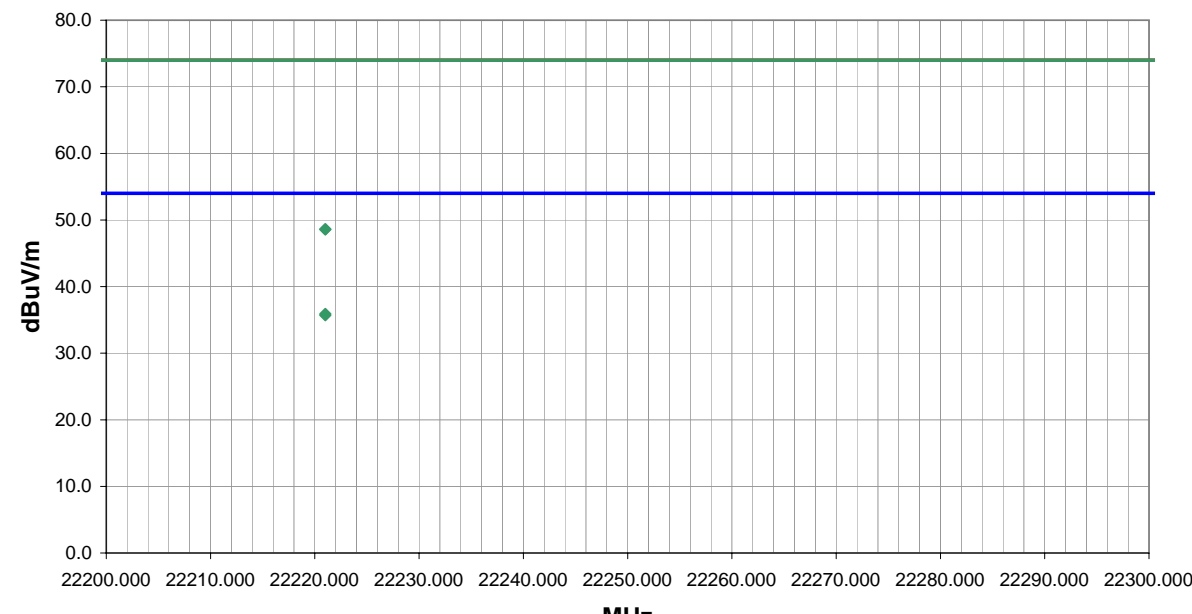
All the radios were configured for simultaneous transmission at the channels specified in the previous pages. The highest gain antennas to be used with the radios were tested. The spectrum was scanned throughout the specified range. While scanning, emissions from the radios were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antennas in three orthogonal axes, and adjusting the measurement antenna height and polarization (per ANSI C63.4:2003). A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.


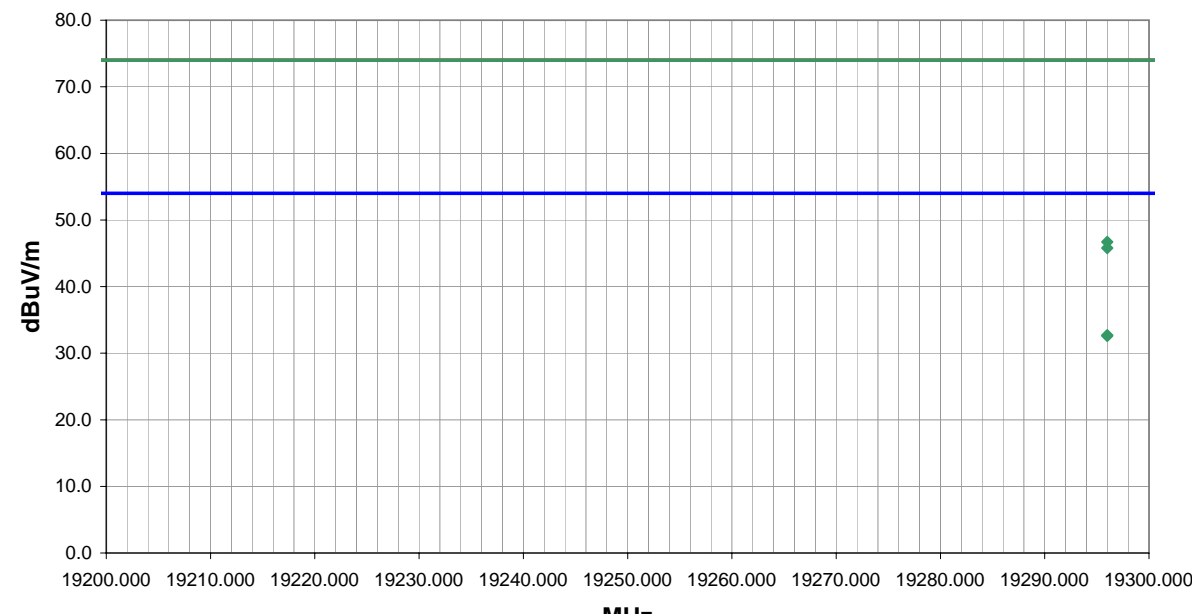
Bandwidths Used for Measurements			
Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
Above 1000	1000.0	N/A	1000.0
<i>Measurements were made using the bandwidths and detectors specified. No video filter was used.</i>			


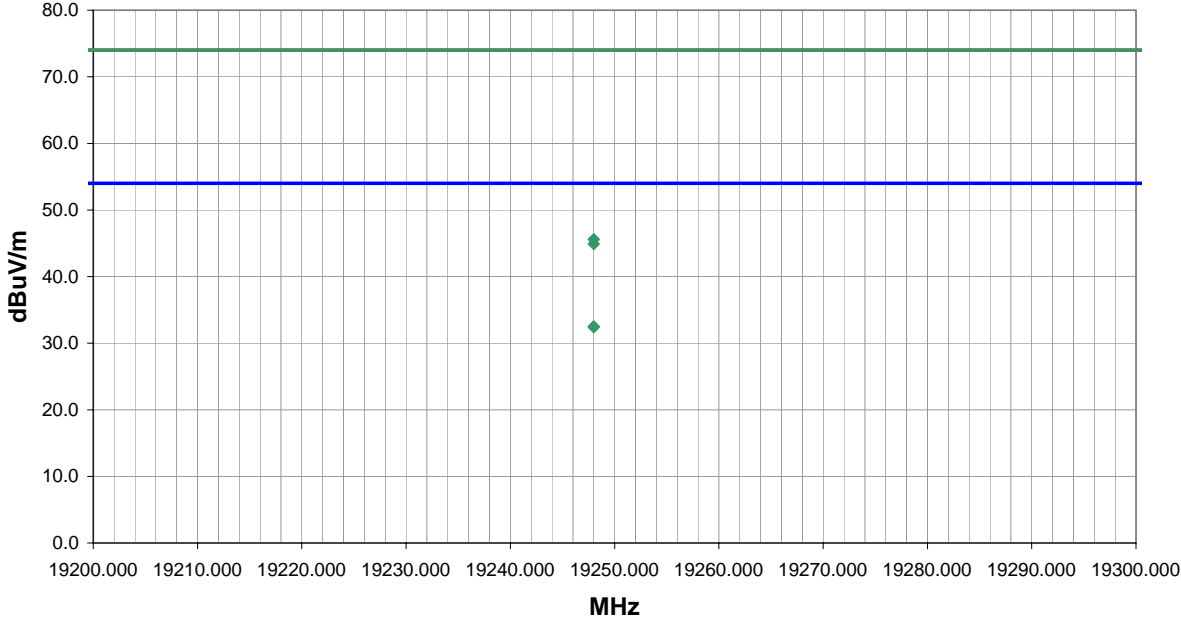
Completed by:


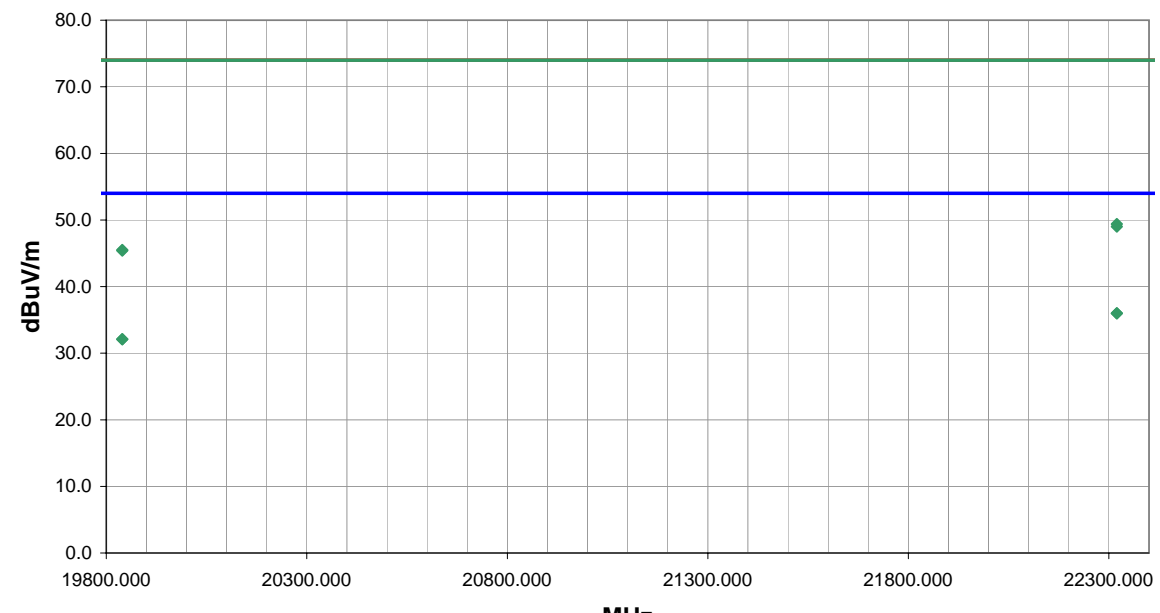



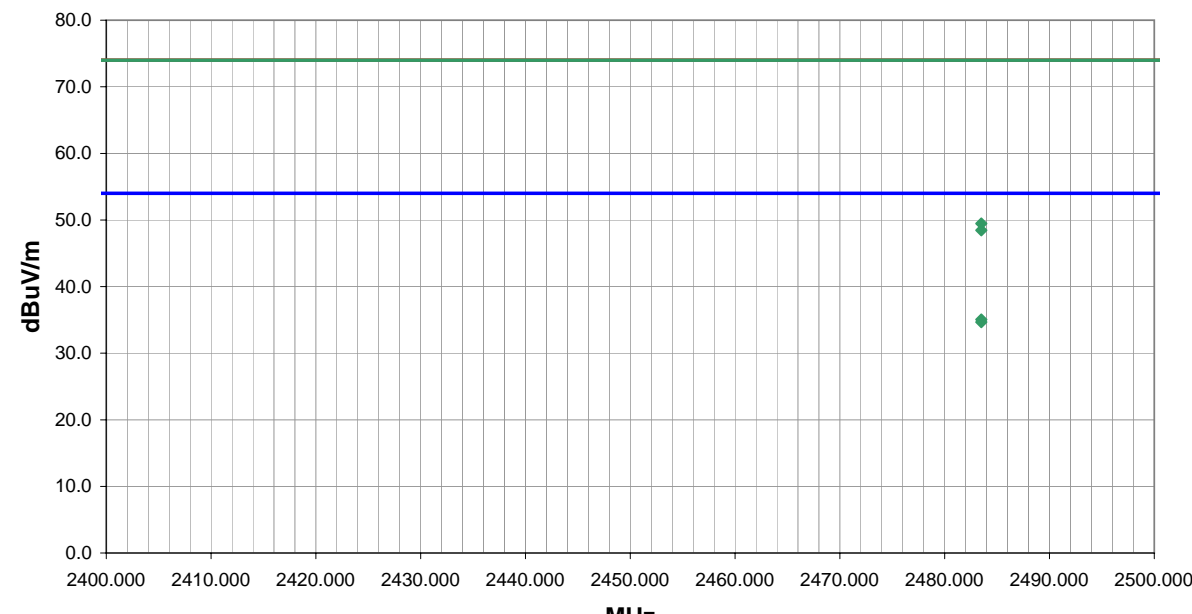
NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET										ACQ 2005.1.3 EMI A2.13	
EUT: 2610CF						Work Order: ITRM0054							
Serial Number: Unknown						Date: 02/02/05							
Customer: Intermec Technologies Corporation						Temperature: 70							
Attendees: None						Humidity: 38%							
Cust. Ref. No.: N/A						Barometric Pressure: 30.15							
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz		Job Site: EV01							
TEST SPECIFICATIONS													
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004						Method: ANSI C63.4:2003							
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
EUT OPERATING MODES													
Bluetooth 11, 802.11b 11, CDMA 1153 (PCS) on 700C													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS										Run #			
Pass										30			
Other													
						 Tested By:							
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
19296.000	24.5	8.0	360.0	1.0	3.0	0.0	V-High Horr	AV	0.0	32.5	54.0	-21.5	
19296.000	24.4	8.0	-1.0	1.0	3.0	0.0	I-High Horr	AV	0.0	32.4	54.0	-21.6	
19296.000	38.2	8.0	360.0	1.0	3.0	0.0	V-High Horr	PK	0.0	46.2	74.0	-27.8	
19296.000	37.6	8.0	-1.0	1.0	3.0	0.0	I-High Horr	PK	0.0	45.6	74.0	-28.4	


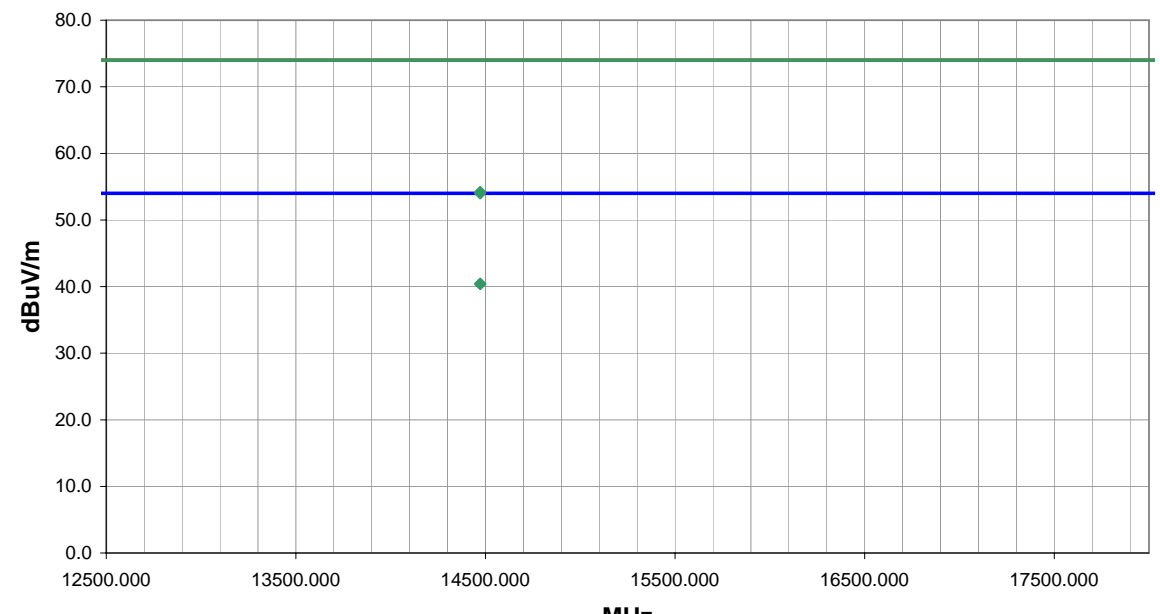
NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		ACQ 2005.1.3 EMI A2.13								
EUT: 2610CF			Work Order: ITRM0054									
Serial Number: Unknown			Date: 02/02/05									
Customer: Intermec Technologies Corporation			Temperature: 70									
Attendees: None			Humidity: 38%									
Cust. Ref. No.: N/A			Barometric Pressure: 30.15									
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004			Method: ANSI C63.4:2003									
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
EUT OPERATING MODES												
Bluetooth 68, 802.11b 11, CDMA 35 (PCS) on 700C												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS					Run #							
Pass					31							
Other												
					 Tested By:							
												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
22221.000	26.9	9.0	-1.0	1.0	3.0	0.0	V-High Horr	AV	0.0	35.9	54.0	-18.1
22221.000	26.7	9.0	360.0	1.0	3.0	0.0	V-High Horr	AV	0.0	35.7	54.0	-18.3
22221.000	39.6	9.0	360.0	1.0	3.0	0.0	V-High Horr	PK	0.0	48.6	74.0	-25.4
22221.000	39.6	9.0	-1.0	1.0	3.0	0.0	V-High Horr	PK	0.0	48.6	74.0	-25.4


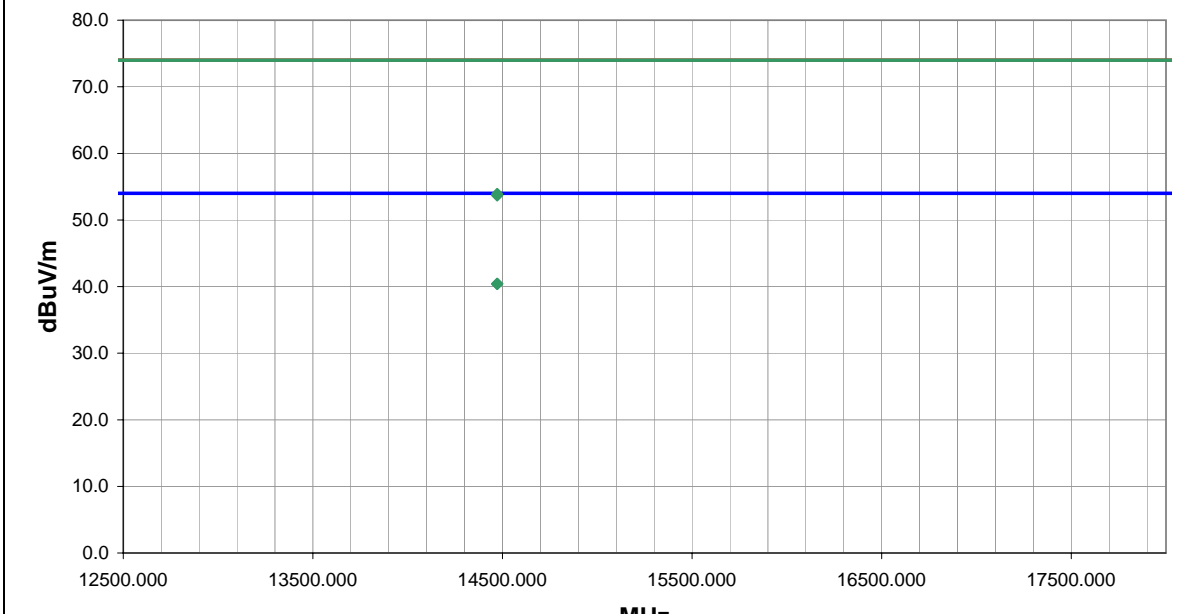
NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET										ACQ 2005.1.3 EMI A2.13	
EUT: 2610CF						Work Order: ITRM0054							
Serial Number: Unknown						Date: 02/02/05							
Customer: Intermec Technologies Corporation						Temperature: 70							
Attendees: None						Humidity: 38%							
Cust. Ref. No.: N/A						Barometric Pressure: 30.15							
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz		Job Site: EV01							
TEST SPECIFICATIONS													
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004						Method: ANSI C63.4:2003							
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
EUT OPERATING MODES													
Bluetooth 11, 802.11b 1, CDMA 467 (cellular) on 700C													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS										Run #			
Pass										32			
Other													
										 Tested By:			
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
19296.000	24.7	8.0	360.0	1.0	3.0	0.0	-I-High Horr	AV	0.0	32.7	54.0	-21.3	
19296.000	24.6	8.0	-1.0	1.0	3.0	0.0	-I-High Horr	AV	0.0	32.6	54.0	-21.4	
19296.000	38.7	8.0	360.0	1.0	3.0	0.0	-I-High Horr	PK	0.0	46.7	74.0	-27.3	
19296.000	37.8	8.0	-1.0	1.0	3.0	0.0	-I-High Horr	PK	0.0	45.8	74.0	-28.2	


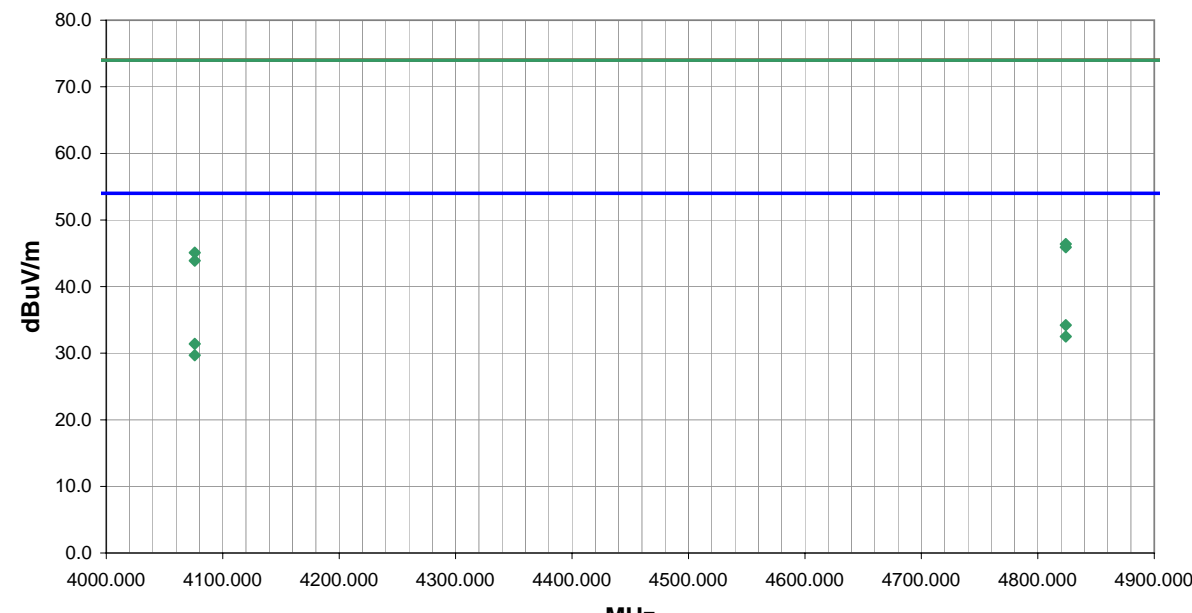
NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		ACQ 2005.1.3 EMI A2.13								
EUT: 2610CF			Work Order: ITRM0054									
Serial Number: Unknown			Date: 02/02/05									
Customer: Intermec Technologies Corporation			Temperature: 70									
Attendees: None			Humidity: 38%									
Cust. Ref. No.: N/A			Barometric Pressure: 30.15									
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004			Method: ANSI C63.4:2003									
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
EUT OPERATING MODES												
Bluetooth 5, 802.11b 1, CDMA 395 (cellular) on 700C												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS					Run #							
Pass					33							
Other												
					 Tested By:							
												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
19248.000	24.7	7.8	-1.0	1.0	3.0	0.0	I-High Horr	AV	0.0	32.5	54.0	-21.5
19248.000	24.6	7.8	360.0	1.0	3.0	0.0	V-High Horr	AV	0.0	32.4	54.0	-21.6
19248.000	37.8	7.8	360.0	1.0	3.0	0.0	V-High Horr	PK	0.0	45.6	74.0	-28.4
19248.000	37.1	7.8	-1.0	1.0	3.0	0.0	I-High Horr	PK	0.0	44.9	74.0	-29.1


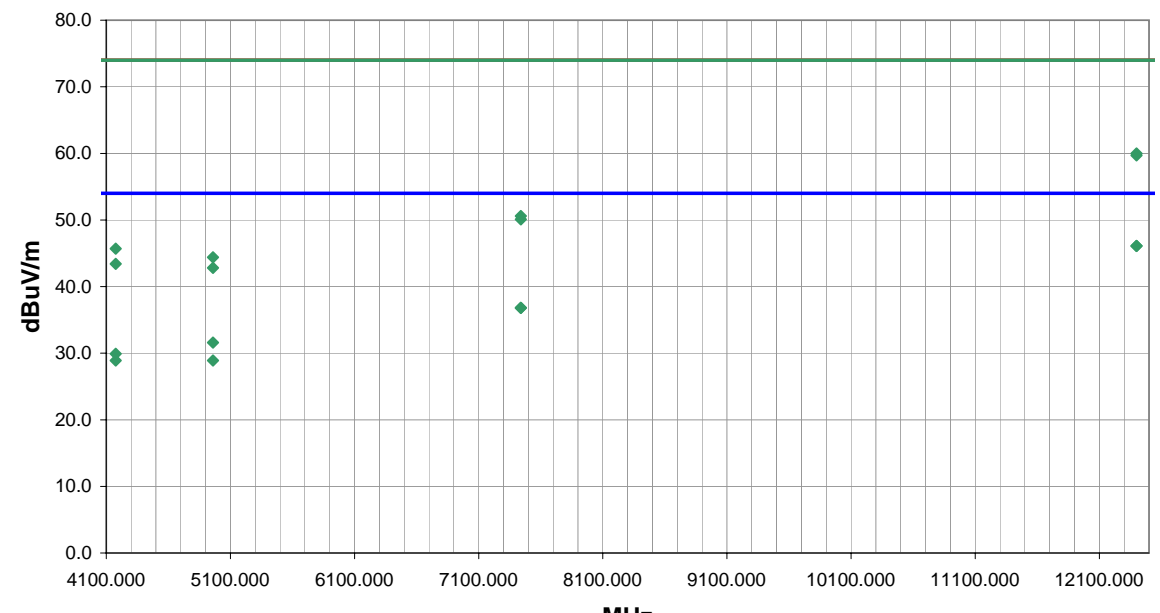
NORTHWEST		ACQ 2005.1.3 EMI A2.13										
EMC		RADIATED EMISSIONS DATA SHEET										
EUT: 2610CF		Work Order: ITRM0054										
Serial Number: Unknown		Date: 02/02/05										
Customer: Intermec Technologies Corporation		Temperature: 70										
Attendees: None		Humidity: 38%										
Cust. Ref. No.: N/A		Barometric Pressure: 30.15										
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz	Job Site: EV01									
TEST SPECIFICATIONS												
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004		Method: ANSI C63.4:2003										
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
EUT OPERATING MODES												
Bluetooth 79, 802.11b 11, CDMA 55 (cellular) on 700C												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS			Run #									
Pass			34									
Other		 Tested By:										
												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
22320.000	26.8	9.2	-1.0	1.0	3.0	0.0	I-High Horr	AV	0.0	36.0	54.0	-18.0
22320.000	26.8	9.2	360.0	1.0	3.0	0.0	V-High Horr	AV	0.0	36.0	54.0	-18.0
19840.000	23.2	8.9	360.0	1.0	3.0	0.0	I-High Horr	AV	0.0	32.1	54.0	-21.9
19840.000	23.2	8.9	-1.0	1.0	3.0	0.0	V-High Horr	AV	0.0	32.1	54.0	-21.9
22320.000	40.2	9.2	360.0	1.0	3.0	0.0	V-High Horr	PK	0.0	49.4	74.0	-24.6
22320.000	39.8	9.2	-1.0	1.0	3.0	0.0	I-High Horr	PK	0.0	49.0	74.0	-25.0
19840.000	36.6	8.9	360.0	1.0	3.0	0.0	I-High Horr	PK	0.0	45.5	74.0	-28.5
19840.000	36.5	8.9	-1.0	1.0	3.0	0.0	V-High Horr	PK	0.0	45.4	74.0	-28.6


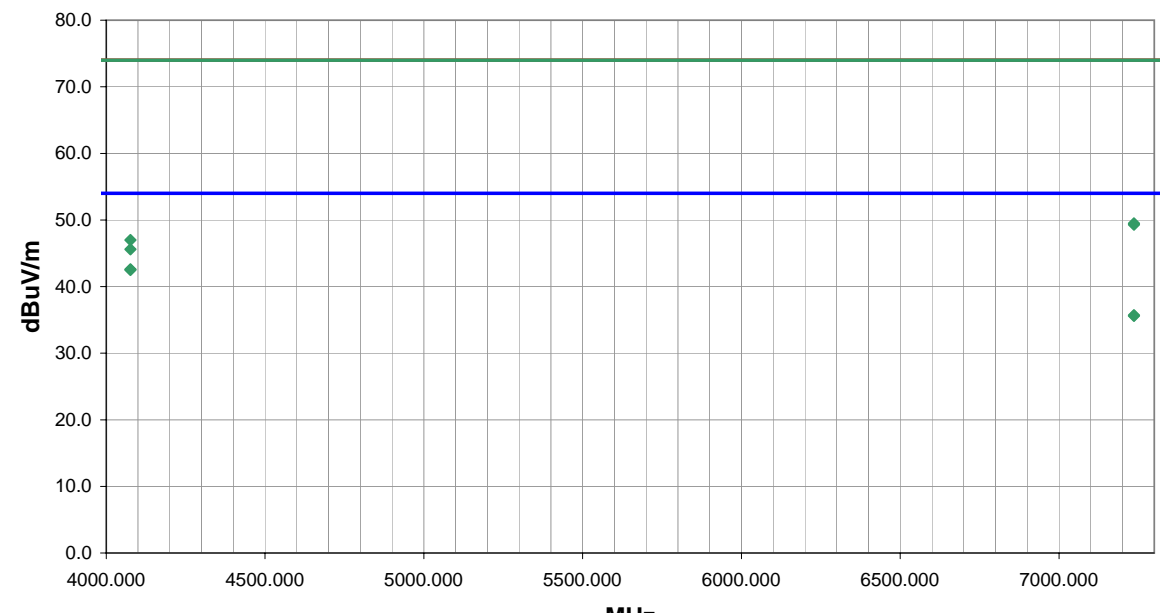
NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET										ACQ 2005.1.3 EMI A2.13	
EUT: 2610CF		Work Order: ITRM0054											
Serial Number: Unknown		Date: 02/02/05											
Customer: Intermec Technologies Corporation		Temperature: 21											
Attendees: None		Humidity: 38%											
Cust. Ref. No.:		Barometric Pressure: 30.47											
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS													
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004		Method: ANSI C63.4:2003											
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
EUT OPERATING MODES													
Bluetooth 62, 802.11b 11, CDMA 1153 (PCS) on 700C													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS												Run #	
Pass												35	
Other													
												Tested By:	
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
2483.500	12.6	32.0	165.0	1.2	1.0	0.0	V-Horn	AV	-9.5	35.1	54.0	-18.9	
2483.500	12.2	32.0	327.0	1.2	1.0	0.0	H-Horn	AV	-9.5	34.7	54.0	-19.3	
2483.500	27.0	32.0	165.0	1.2	1.0	0.0	V-Horn	PK	-9.5	49.5	74.0	-24.5	
2483.500	26.0	32.0	327.0	1.2	1.0	0.0	H-Horn	PK	-9.5	48.5	74.0	-25.5	


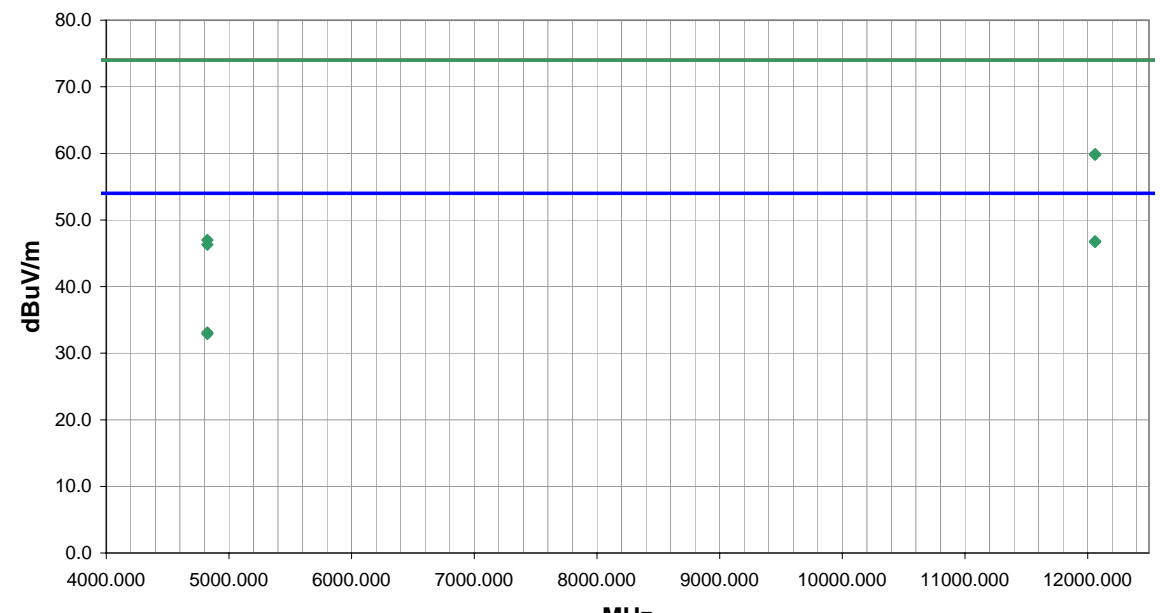
NORTHWEST		RADIATED EMISSIONS DATA SHEET				ACQ 2005.1.3 EMI 2005.1.3						
EMC												
EUT: 2610CF		Work Order: ITRM0054										
Serial Number: Unknown		Date: 02/02/05										
Customer: Intermec Technologies Corporation		Temperature: 20										
Attendees: None		Humidity: 35%										
Cust. Ref. No.:		Barometric Pressure: 30.38										
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004		Method: ANSI C63.4:2003										
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
EUT OPERATING MODES												
Bluetooth 11, 802.11b 1, CDMA 1 (PCS) on 700C												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS						Run #						
Pass						36						
Other						 Tested By:						
												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
14472.000	26.6	13.8	26.0	2.9	3.0	0.0	V-Horn	AV	0.0	40.4	54.0	-13.6
14472.000	26.6	13.8	193.0	1.4	3.0	0.0	H-Horn	AV	0.0	40.4	54.0	-13.6
14472.000	40.4	13.8	193.0	1.4	3.0	0.0	H-Horn	PK	0.0	54.2	74.0	-19.8
14472.000	40.2	13.8	26.0	2.9	3.0	0.0	V-Horn	PK	0.0	54.0	74.0	-20.0


NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		ACQ 2005.1.3 EMI 2005.1.3								
EUT: 2610CF			Work Order: ITRM0054									
Serial Number: Unknown			Date: 02/02/05									
Customer: Intermec Technologies Corporation			Temperature: 21									
Attendees: None			Humidity: 38%									
Cust. Ref. No.:			Barometric Pressure: 30.47									
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004				Method: ANSI C63.4:2003								
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
EUT OPERATING MODES												
Bluetooth 11, 802.11b 1, CDMA 467 (cellular) on 700C												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS					Run #							
Pass					37							
Other												
					 Tested By:							
												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
14472.000	26.6	13.8	253.0	1.9	3.0	0.0	H-Horn	AV	0.0	40.4	54.0	-13.6
14472.000	26.6	13.8	278.0	1.2	3.0	0.0	V-Horn	AV	0.0	40.4	54.0	-13.6
14472.000	40.1	13.8	253.0	1.9	3.0	0.0	H-Horn	PK	0.0	53.9	74.0	-20.1
14472.000	39.9	13.8	278.0	1.2	3.0	0.0	V-Horn	PK	0.0	53.7	74.0	-20.3

NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		ACQ 2005.1.3 EMI 2005.1.3								
EUT: 2610CF			Work Order: ITRM0054									
Serial Number: Unknown			Date: 02/02/05									
Customer: Intermec Technologies Corporation			Temperature: 22									
Attendees: None			Humidity: 37%									
Cust. Ref. No.:			Barometric Pressure: 30.47									
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004			Method: ANSI C63.4:2003									
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
EUT OPERATING MODES												
Bluetooth 11, 802.11b 1, CDMA 467 (Cellular) on 700C												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS					Run #							
Pass					38							
Other												
					 Tested By:							
												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
4823.973	30.9	3.3	144.0	1.2	3.0	0.0	H-Horn	AV	0.0	34.2	54.0	-19.8
4823.973	29.2	3.3	209.0	1.2	3.0	0.0	V-Horn	AV	0.0	32.5	54.0	-21.5
4075.981	29.0	2.4	360.0	1.3	3.0	0.0	H-Horn	AV	0.0	31.4	54.0	-22.6
4075.981	27.3	2.4	125.0	1.2	3.0	0.0	V-Horn	AV	0.0	29.7	54.0	-24.3
4823.973	43.1	3.3	144.0	1.2	3.0	0.0	H-Horn	PK	0.0	46.4	74.0	-27.6
4823.973	42.6	3.3	209.0	1.2	3.0	0.0	V-Horn	PK	0.0	45.9	74.0	-28.1
4075.981	42.7	2.4	350.0	1.3	3.0	0.0	H-Horn	PK	0.0	45.1	74.0	-28.9
4075.981	41.5	2.4	125.0	1.2	3.0	0.0	V-Horn	PK	0.0	43.9	74.0	-30.1

NORTHWEST EMC										ACQ 2005.1.3 EMI 2005.1.3			
RADIATED EMISSIONS DATA SHEET													
EUT: 2610CF					Work Order: ITRM0054								
Serial Number: Unknown					Date: 02/02/05								
Customer: Intermec Technologies Corporation					Temperature: 21								
Attendees: None					Humidity: 38%								
Cust. Ref. No.:					Barometric Pressure: 30.47								
Tested by: Holly Ashkannejhad					Power: 120VAC/60Hz					Job Site: EV01			
TEST SPECIFICATIONS													
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004					Method: ANSI C63.4:2003								
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
EUT OPERATING MODES													
Bluetooth 79, 802.11b 11, CDMA 55 (Cellular) on 700C													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS										Run #			
Pass										39			
Other													
										 Tested By:			
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
12400.000	25.3	20.8	293.0	1.5	3.0	0.0	H-Horn	AV	0.0	46.1	54.0	-7.9	
12400.000	25.3	20.8	275.0	1.2	3.0	0.0	V-Horn	AV	0.0	46.1	54.0	-7.9	
12400.000	39.2	20.8	293.0	1.5	3.0	0.0	H-Horn	PK	0.0	60.0	74.0	-14.0	
12400.000	38.9	20.8	275.0	1.2	3.0	0.0	V-Horn	PK	0.0	59.7	74.0	-14.3	
7440.000	25.7	11.1	295.0	1.2	3.0	0.0	V-Horn	AV	0.0	36.8	54.0	-17.2	
7440.000	25.7	11.1	40.0	2.8	3.0	0.0	H-Horn	AV	0.0	36.8	54.0	-17.2	
4959.969	28.0	3.6	209.0	1.1	3.0	0.0	V-Horn	AV	0.0	31.6	54.0	-22.4	
7440.000	39.5	11.1	40.0	2.8	3.0	0.0	H-Horn	PK	0.0	50.6	74.0	-23.4	
7440.000	39.0	11.1	295.0	1.2	3.0	0.0	V-Horn	PK	0.0	50.1	74.0	-23.9	
4175.990	27.5	2.4	224.0	1.3	3.0	0.0	H-Horn	AV	0.0	29.9	54.0	-24.1	
4175.990	26.5	2.4	131.0	1.2	3.0	0.0	V-Horn	AV	0.0	28.9	54.0	-25.1	
4959.969	25.3	3.6	-1.0	1.3	3.0	0.0	H-Horn	AV	0.0	28.9	54.0	-25.1	
4175.990	43.3	2.4	224.0	1.3	3.0	0.0	H-Horn	PK	0.0	45.7	74.0	-28.3	
4959.969	40.8	3.6	209.0	1.1	3.0	0.0	V-Horn	PK	0.0	44.4	74.0	-29.6	
4175.990	41.0	2.4	131.0	1.2	3.0	0.0	V-Horn	PK	0.0	43.4	74.0	-30.6	
4959.969	39.2	3.6	-1.0	1.3	3.0	0.0	H-Horn	PK	0.0	42.8	74.0	-31.2	

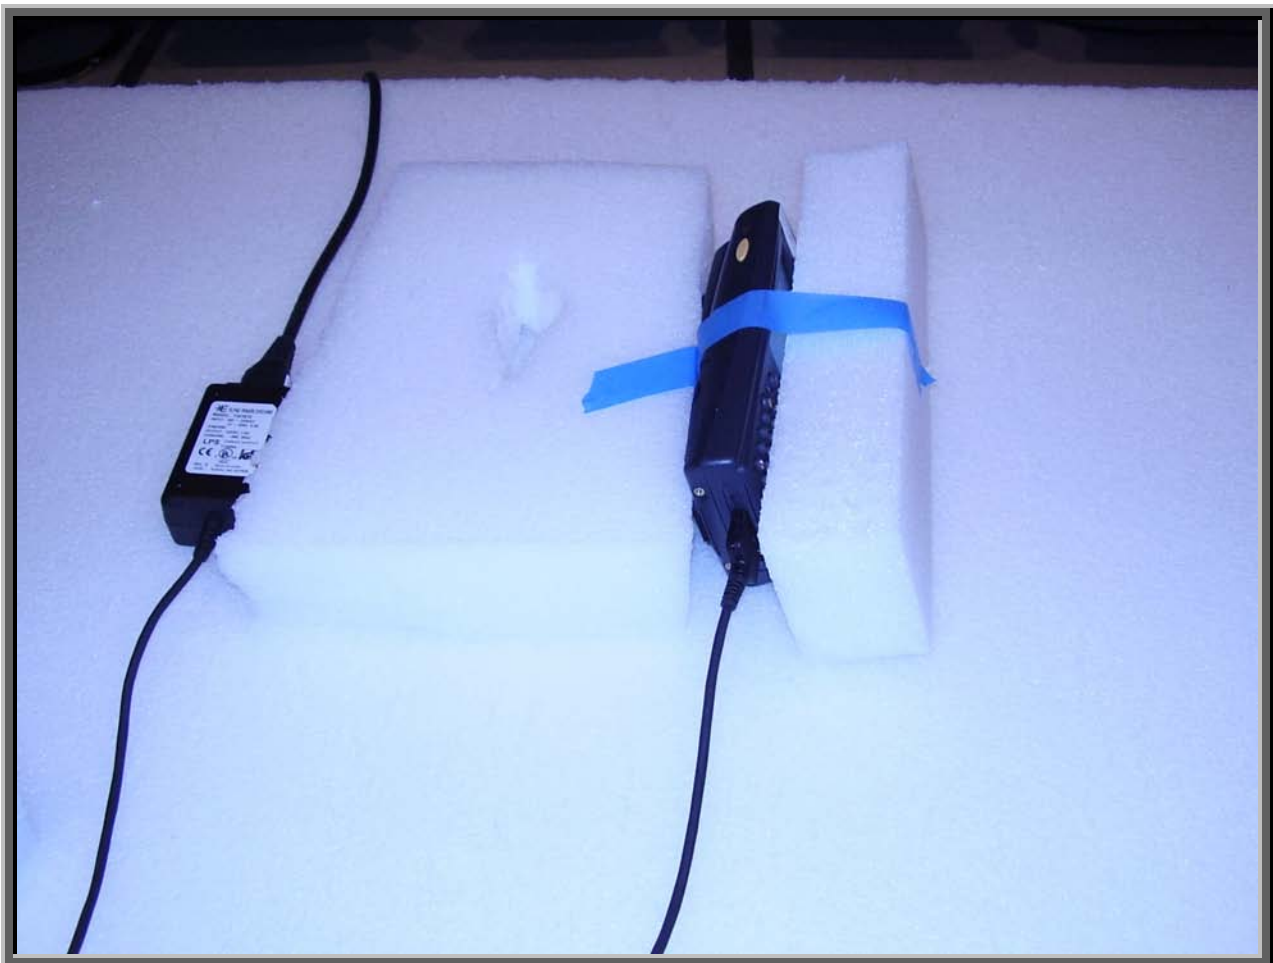
NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		ACQ 2005.1.3 EMI 2005.1.3								
EUT: 2610CF			Work Order: ITRM0054									
Serial Number: Unknown			Date: 02/02/05									
Customer: Intermec Technologies Corporation			Temperature: 21									
Attendees: None			Humidity: 38%									
Cust. Ref. No.:			Barometric Pressure: 30.47									
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004			Method: ANSI C63.4:2003									
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
EUT OPERATING MODES												
Bluetooth 11, 802.11b 1, CDMA 1 (PCS) on 700C												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS					Run #							
Pass					40							
Other												
					 Tested By:							
												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
4075.990	40.2	2.4	263.0	1.5	3.0	0.0	V-Horn	AV	0.0	42.6	54.0	-11.4
4075.990	40.1	2.4	250.0	1.5	3.0	0.0	H-Horn	AV	0.0	42.5	54.0	-11.5
7236.000	25.6	10.1	32.0	1.3	3.0	0.0	H-Horn	AV	0.0	35.7	54.0	-18.3
7236.000	25.5	10.1	253.0	1.5	3.0	0.0	V-Horn	AV	0.0	35.6	54.0	-18.4
7236.000	39.4	10.1	32.0	1.3	3.0	0.0	H-Horn	PK	0.0	49.5	74.0	-24.5
7236.000	39.2	10.1	253.0	1.5	3.0	0.0	V-Horn	PK	0.0	49.3	74.0	-24.7
4075.990	44.6	2.4	250.0	1.5	3.0	0.0	H-Horn	PK	0.0	47.0	74.0	-27.0
4075.990	43.2	2.4	263.0	1.5	3.0	0.0	V-Horn	PK	0.0	45.6	74.0	-28.4

NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		ACQ 2005.1.3 EMI 2005.1.3								
EUT: 2610CF			Work Order: ITRM0054									
Serial Number: Unknown			Date: 02/02/05									
Customer: Intermec Technologies Corporation			Temperature: 21									
Attendees: None			Humidity: 38%									
Cust. Ref. No.:			Barometric Pressure: 30.47									
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004			Method: ANSI C63.4:2003									
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
EUT OPERATING MODES												
Bluetooth 11, 802.11b 1, CDMA 1153 (PCS) on 700C												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS					Run #							
Pass					41							
Other												
					 Tested By:							
												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
12060.000	26.6	20.2	145.0	1.2	3.0	0.0	V-Horn	AV	0.0	46.8	54.0	-7.2
12060.000	26.5	20.2	232.0	1.3	3.0	0.0	H-Horn	AV	0.0	46.7	54.0	-7.3
12060.000	39.7	20.2	232.0	1.3	3.0	0.0	H-Horn	PK	0.0	59.9	74.0	-14.1
12060.000	39.6	20.2	145.0	1.2	3.0	0.0	V-Horn	PK	0.0	59.8	74.0	-14.2
4823.940	29.8	3.3	204.0	1.2	3.0	0.0	V-Horn	AV	0.0	33.1	54.0	-20.9
4823.940	29.6	3.3	257.0	1.3	3.0	0.0	H-Horn	AV	0.0	32.9	54.0	-21.1
4823.940	43.7	3.3	204.0	1.2	3.0	0.0	V-Horn	PK	0.0	47.0	74.0	-27.0
4823.940	43.0	3.3	257.0	1.3	3.0	0.0	H-Horn	PK	0.0	46.3	74.0	-27.7

NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		ACQ 2005.1.3 EMI 2005.1.3	
EUT: 2610CF			Work Order: ITRM0054		
Serial Number: Unknown			Date: 02/02/05		
Customer: Intermec Technologies Corporation			Temperature: 21		
Attendees: None			Humidity: 38%		
Cust. Ref. No.:			Barometric Pressure: 30.47		
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01	
TEST SPECIFICATIONS					
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004			Method: ANSI C63.4:2003		
SAMPLE CALCULATIONS					
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation					
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator					
COMMENTS					
EUT OPERATING MODES					
Bluetooth 68, 802.11b 11, CDMA 35 (PCS) on 700C					
DEVIATIONS FROM TEST STANDARD					
No deviations.					
RESULTS					Run #
Pass					42
Other			 Tested By:		

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
7407.000	35.2	11.1	121.0	1.1	3.0	0.0	V-Horn	AV	0.0	46.3	54.0	-7.7
7407.000	35.0	11.1	212.0	1.6	3.0	0.0	H-Horn	AV	0.0	46.1	54.0	-7.9
4175.987	38.6	2.4	259.0	1.5	3.0	0.0	H-Horn	AV	0.0	41.0	54.0	-13.0
4175.987	38.5	2.4	300.0	1.1	3.0	0.0	H-Horn	AV	0.0	40.9	54.0	-13.1
7407.000	46.9	11.1	121.0	1.1	3.0	0.0	V-Horn	PK	0.0	58.0	74.0	-16.0
7407.000	46.2	11.1	212.0	1.6	3.0	0.0	H-Horn	PK	0.0	57.3	74.0	-16.7
4175.987	44.1	2.4	259.0	1.5	3.0	0.0	H-Horn	PK	0.0	46.5	74.0	-27.5
4175.987	43.2	2.4	300.0	1.1	3.0	0.0	H-Horn	PK	0.0	45.6	74.0	-28.4





Justification

Intermec's Handheld Computer, Model 700C was configured with three co-located radios. The 700C contained a GSM radio (FCC ID: EHASMC46), an 802.11(b)/(g) radio (FCC ID: EHA2610CF), and a Bluetooth radio (FCC ID: EHABTS080). This test demonstrated compliance with FCC Part 15.247 emissions limits while the co-located radios were transmitting simultaneously. Each radio transmits through its own antenna.

All possible combinations of harmonic emissions from the GSM, 802.11(b)/(g), and Bluetooth radios were compared numerically. It was determined that there were no possible coincidental harmonics below 1 GHz. All the radios were configured for simultaneous transmission at the channels specified below.

Channels in Specified Band Investigated:

802.11(b):	1, 11
GSM (Cellular):	140, 141, 191, 202
GSM (PCS):	516, 606
Bluetooth:	2, 11, 67, 80

Operating Modes Investigated:**Bluetooth Radio in PW40 with 700C in cradle:**

Simultaneous transmission of Bluetooth Channel 11, 802.11(b) Channel 1, & GSM PCS Channel 516
Simultaneous transmission of Bluetooth Channel 67, 802.11(b) Channel 11, & GSM PCS Channel 516
Simultaneous transmission of Bluetooth Channel 2, 802.11(b) Channel 1, & GSM PCS Channel 606
Simultaneous transmission of Bluetooth Channel 80, 802.11(b) Channel 11, & GSM PCS Channel 606
Simultaneous transmission of Bluetooth Channel 11, 802.11(b) Channel 1, & GSM cellular Channel 202
Simultaneous transmission of Bluetooth Channel 5, 802.11(b) Channel 1, & GSM cellular Channel 191
Simultaneous transmission of Bluetooth Channel 79, 802.11(b) Channel 11, & GSM cellular Channel 141
Simultaneous transmission of Bluetooth Channel 79, 802.11(b) Channel 11, & GSM cellular Channel 140

Antennas Investigated:

802.11(b):	Folded Monopole internal to 700C, P/N 805-608-104
GSM:	Tri-band Antenna external to 700C, P/N 805-624-001
Bluetooth:	Chip antenna integral to Bluetooth module inside 700C

Data Rates Investigated:

Maximum

Power Input Settings Investigated:

120 VAC, 60 Hz.

Frequency Range Investigated

Start Frequency	1 GHz	Stop Frequency	25 GHz
------------------------	-------	-----------------------	--------

Software\Firmware Applied During Test

Exercise software	Phone Blue Test Test Utility	Version	Unknown Unknown 0.4
Description			
This system was tested using special test software to exercise the functions of the device during the testing such as channels, power, and modulation during simultaneous transmission.			

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
Handheld Computer	Intermec Technologies Corporation	700C	18190400041
AC Adapter	Elpac Power Systems	FW1812	014868
GSM Radio in 700C	Intermec Technologies Corporation	SMC46	Unknown
Bluetooth Radio in 700C	Intermec Technologies Corporation	BTS080	Unknown
802.11(b)/(g) radio in 700C	Intermec Technologies Corporation	2601CF	Unknown

Remote Equipment Outside of Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
GSM/DCS/PCS MS Test Set	Hewlett Packard	8922M	3829U02903
GSM/DCS/PCS RF Interface	Hewlett Packard	83220E	3842U05679
Wireless Communications Test Set	Agilent	8960 Series 10 E5515C	QB44051960
Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary			

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads	PA	1.3	PA	Handheld Computer	AC Adapter
AC Power	No	2.0	No	AC Adapter	AC Mains

Measurement Equipment					
Description	Manufacturer	Model	Identifier	Last Cal	Interval
Antenna, Horn	EMCO	3160-09	AHG	NCR	NA
Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	10/08/2003	24 mo
Antenna, Biconilog	EMCO	3141	AXE	12/03/2003	24 mo
Pre-Amplifier	Amplifier Research	LN1000A	APS	02/05/2004	13 mo
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APJ	01/05/2004	13 mo
High Pass Filter	Micro-Tronics	HPM50111	HFO	04/13/2004	13 mo
Attenuator		2082-6148-20	ATE	02/03/2004	13 mo
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQF	12/02/2004	13 mo
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/02/2004	13 mo
Spectrum Analyzer Display	Hewlett Packard	85662A	AALD	12/02/2004	13 mo
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo
Antenna, Horn	EMCO	3160-08	AHK	NCR	NA
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APC	10/08/2003	15 mo

Test Description

Requirement: Per 15.247(d), the field strength of any spurious emissions or modulation products that fall in a restricted band, as defined in 47 CFR 15.205, is measured. The peak level must comply with the limits specified in 47 CFR 15.35(b). The average level (taken with a 10Hz VBW) must comply with the limits specified in 15.209.

Configuration: Intermec's Handheld Computer, Model 700C was configured with three co-located radios. The 700C contained a GSM radio (FCC ID: EHASM46), an 802.11(b)/(g) radio (FCC ID: EHA2610CF), and a Bluetooth radio (FCC ID: EHABTS080). This test demonstrated compliance with FCC Part 15.247 emissions limits while the co-located radios were transmitting simultaneously. Each radio transmits through its own antenna.

Simultaneous Transmission: For co-located radios, it is necessary to measure the field strength of spurious emissions, while co-located radios are transmitting simultaneously. The following is an excerpt from the FCC/TCB training Q & A, October 2002, Day 2, Question 7:

Assuming that the radios do not share an antenna, only radiated tests for simultaneous transmission is required. If the radios share an antenna, antenna conducted measurements would also be required. Only one set of worst case simultaneous transmission data is going to be requested to be submitted at this time. The test engineer should indicate the worst case condition and provide justification as to why the worst case condition was chosen. The grantee should be reminded that even if the FCC requests one set of data, they are responsible for compliance for all modes of simultaneous transmission.

All possible combinations of harmonic emissions from the GSM, 802.11(b), and Bluetooth radios were compared numerically. It was determined that there were no possible coincidental harmonics below 1 GHz. The frequency range from 1 GHz to 25 GHz was investigated for channel combinations that would


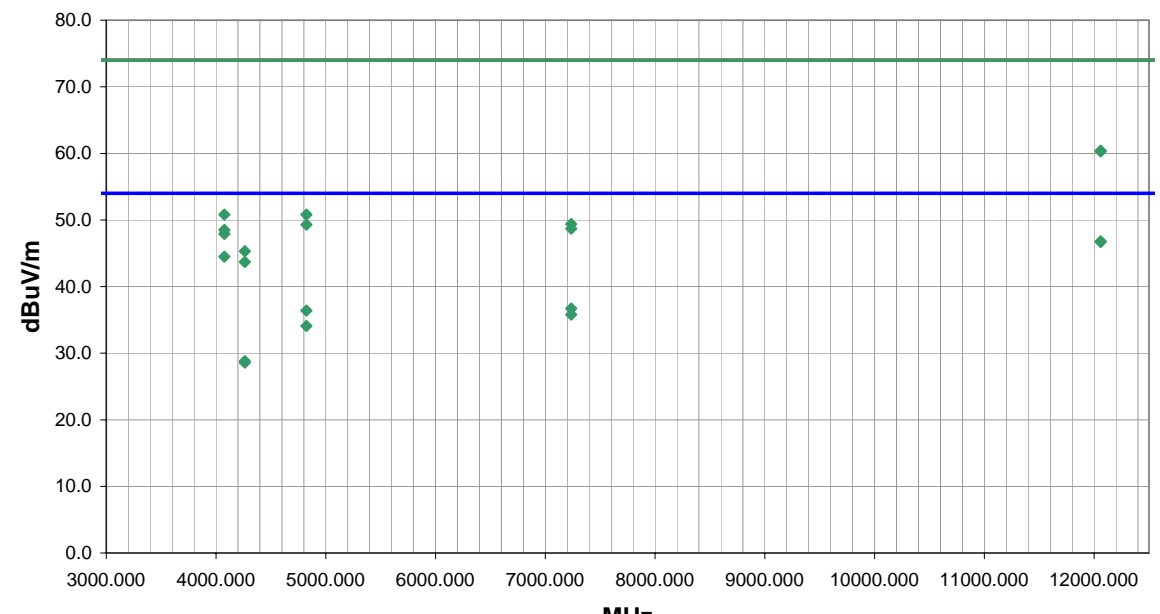
produce coincidental harmonics. Compliance with the restricted band at 2483.5 – 2500 MHz was also measured.


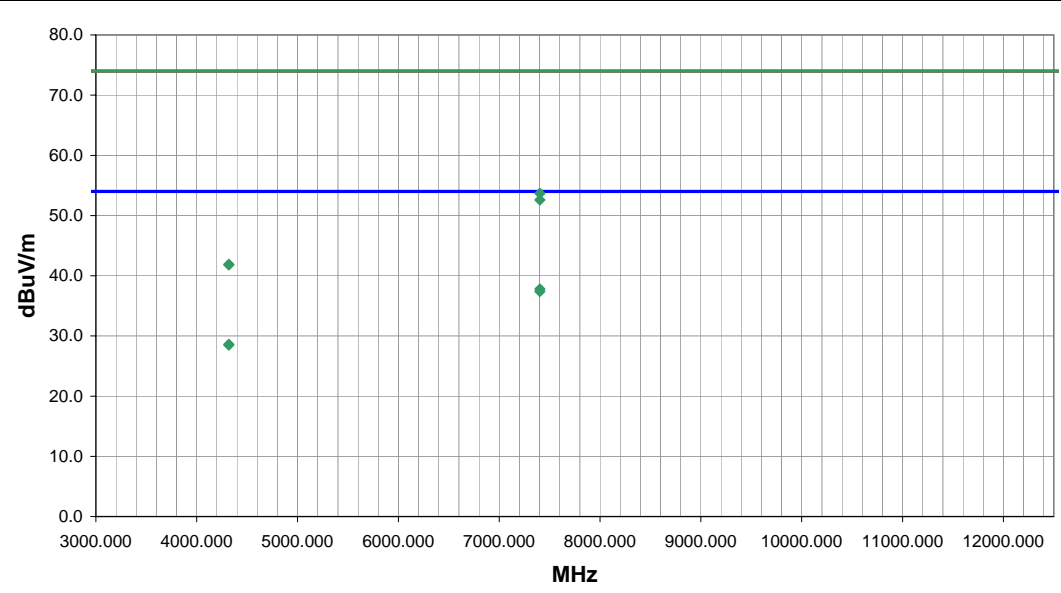
All the radios were configured for simultaneous transmission at the channels specified in the previous pages. The highest gain antennas to be used with the radios were tested. The spectrum was scanned throughout the specified range. While scanning, emissions from the radios were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antennas in three orthogonal axes, and adjusting the measurement antenna height and polarization (per ANSI C63.4:2003). A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.


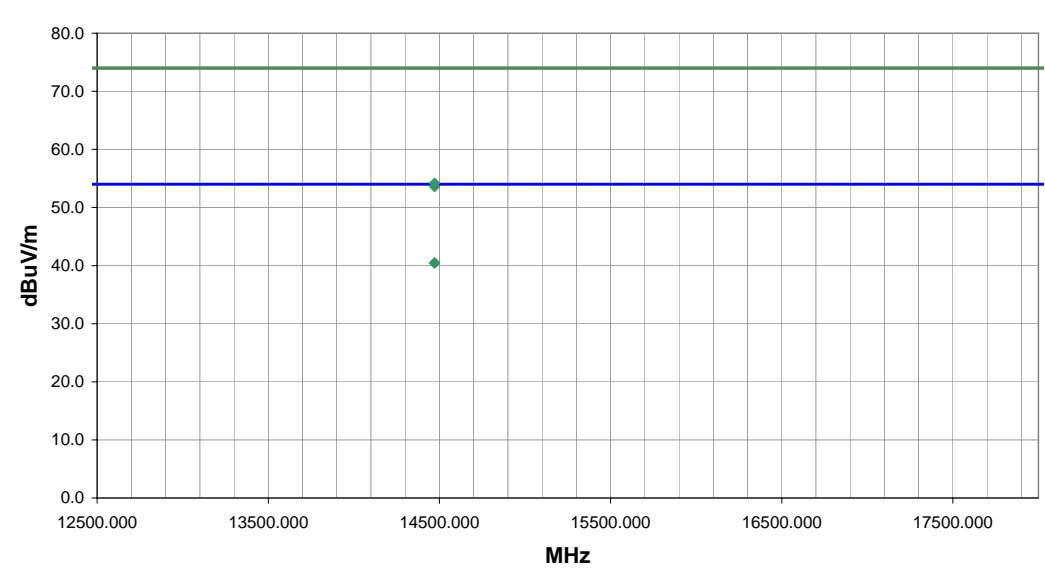
Bandwidths Used for Measurements			
Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
Above 1000	1000.0	N/A	1000.0
<i>Measurements were made using the bandwidths and detectors specified. No video filter was used.</i>			


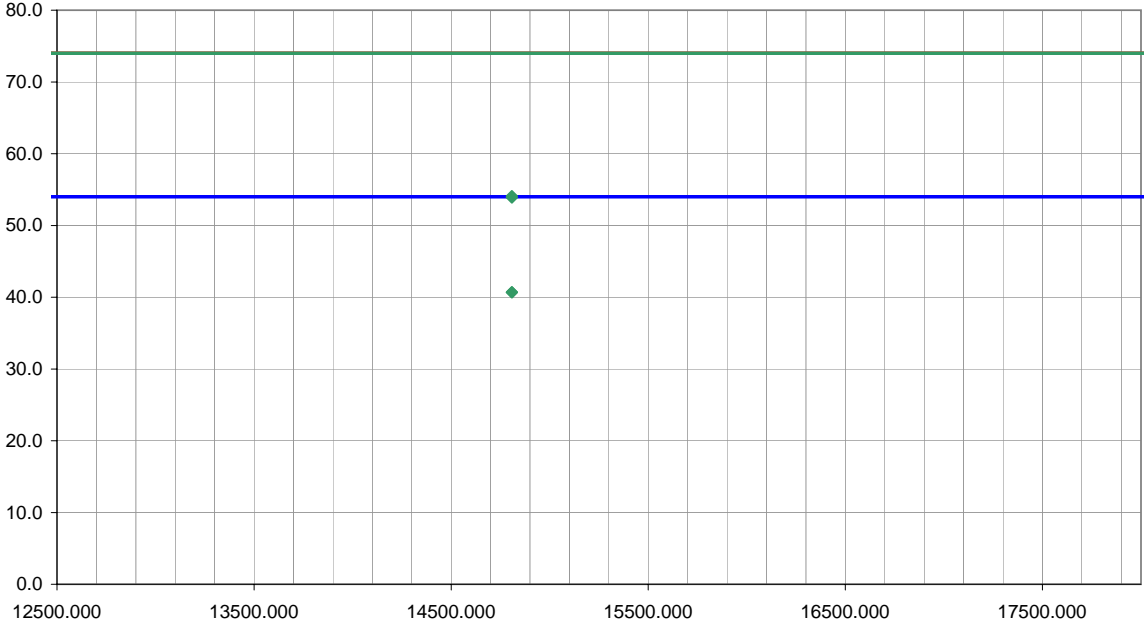
Completed by:


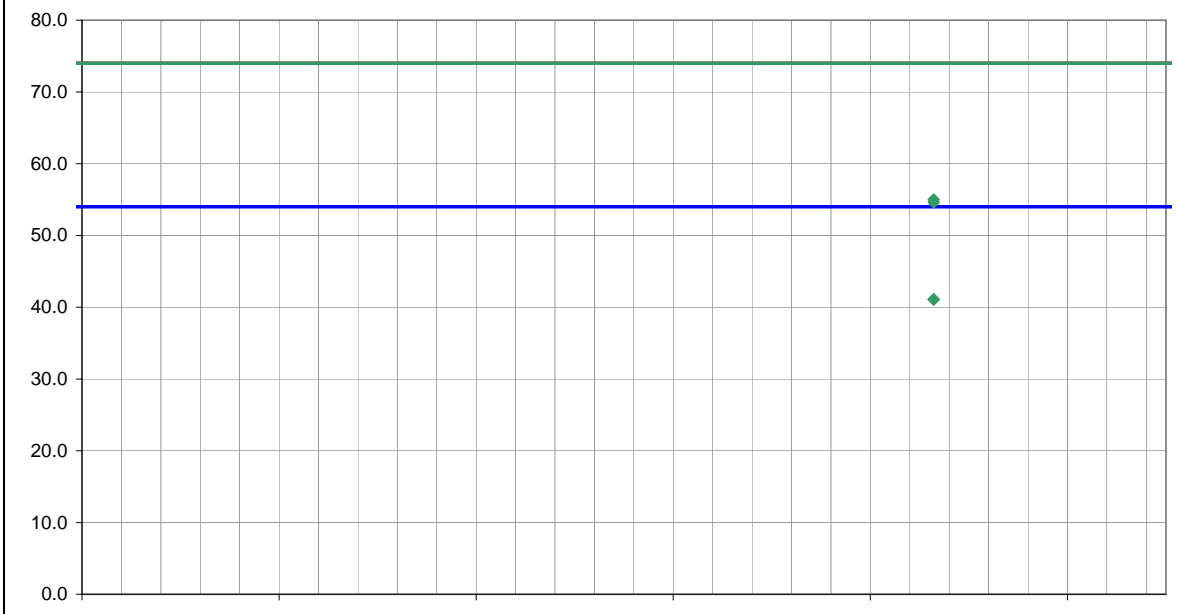


NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET				ACQ 2005.1.3 EMI 2005.1.3						
EUT: 2610CF					Work Order: ITRM0054							
Serial Number: Unknown					Date: 02/07/05							
Customer: Intermec Technologies Corporation					Temperature: 20							
Attendees: None					Humidity: 34%							
Cust. Ref. No.:					Barometric Pressure: 30.24							
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz	Job Site: EV01							
TEST SPECIFICATIONS												
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004					Method: ANSI C63.4:2003							
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
EUT OPERATING MODES												
Bluetooth 11, 802.11b 1, GSM 516 (PCS) on 700C												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS							Run #					
Pass							75					
Other					 Tested By:							
												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
4075.975	46.1	2.4	50.0	1.3	3.0	0.0	H-Horn	AV	0.0	48.5	54.0	-5.5
12060.000	26.6	20.2	186.0	1.2	3.0	0.0	V-Horn	AV	0.0	46.8	54.0	-7.2
12060.000	26.5	20.2	239.0	1.3	3.0	0.0	H-Horn	AV	0.0	46.7	54.0	-7.3
4075.975	42.1	2.4	47.0	1.3	3.0	0.0	V-Horn	AV	0.0	44.5	54.0	-9.5
12060.000	40.2	20.2	186.0	1.2	3.0	0.0	V-Horn	PK	0.0	60.4	74.0	-13.6
12060.000	40.1	20.2	239.0	1.3	3.0	0.0	H-Horn	PK	0.0	60.3	74.0	-13.7
7236.000	26.6	10.1	306.0	1.3	3.0	0.0	H-Horn	AV	0.0	36.7	54.0	-17.3
4824.000	33.1	3.3	344.0	1.2	3.0	0.0	H-Horn	AV	0.0	36.4	54.0	-17.6
7236.000	25.7	10.1	127.0	1.2	3.0	0.0	V-Horn	AV	0.0	35.8	54.0	-18.2
4824.000	30.8	3.3	116.0	1.5	3.0	0.0	V-Horn	AV	0.0	34.1	54.0	-19.9
4075.975	48.4	2.4	50.0	1.3	3.0	0.0	H-Horn	PK	0.0	50.8	74.0	-23.2
4824.000	47.5	3.3	344.0	1.2	3.0	0.0	H-Horn	PK	0.0	50.8	74.0	-23.2
7236.000	39.3	10.1	306.0	1.3	3.0	0.0	H-Horn	PK	0.0	49.4	74.0	-24.6
4824.000	46.0	3.3	116.0	1.5	3.0	0.0	V-Horn	PK	0.0	49.3	74.0	-24.7
4263.005	26.3	2.5	358.0	1.2	3.0	0.0	H-Horn	AV	0.0	28.8	54.0	-25.2
7236.000	38.6	10.1	127.0	1.2	3.0	0.0	V-Horn	PK	0.0	48.7	74.0	-25.3
4263.005	26.1	2.5	288.0	1.2	3.0	0.0	V-Horn	AV	0.0	28.6	54.0	-25.4
4075.975	45.5	2.4	47.0	1.3	3.0	0.0	V-Horn	PK	0.0	47.9	74.0	-26.1
4263.005	42.8	2.5	358.0	1.2	3.0	0.0	H-Horn	PK	0.0	45.3	74.0	-28.7
4263.005	41.2	2.5	288.0	1.2	3.0	0.0	V-Horn	PK	0.0	43.7	74.0	-30.3

NORTHWEST EMC										ACQ 2005.1.3 EMI 2005.1.3			
RADIATED EMISSIONS DATA SHEET													
EUT: 2610CF						Work Order: ITRM0054							
Serial Number: Unknown						Date: 02/07/05							
Customer: Intermec Technologies Corporation						Temperature: 20							
Attendees: None						Humidity: 35%							
Cust. Ref. No.:						Barometric Pressure: 30.24				Job Site: EV01			
Tested by: Holly Ashkannejhad						Power: 120VAC/60Hz							
TEST SPECIFICATIONS													
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004										Method: ANSI C63.4:2003			
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
EUT OPERATING MODES													
Bluetooth 67, 802.11b 11, GSM 516 (PCS) on 700C													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS												Run #	
Pass												76	
Other													
<div style="text-align: right;">  Tested By: </div>													
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
7403.952	26.7	11.1	280.0	1.4	3.0	0.0	H-Horn	AV	0.0	37.8	54.0	-16.2	EUT vertical.
7404.000	26.3	11.1	54.0	1.2	3.0	0.0	V-Horn	AV	0.0	37.4	54.0	-16.6	EUT on side
7404.000	42.6	11.1	280.0	1.4	3.0	0.0	H-Horn	PK	0.0	53.7	74.0	-20.3	EUT vertical.
7404.000	41.5	11.1	54.0	1.2	3.0	0.0	V-Horn	PK	0.0	52.6	74.0	-21.4	EUT on side
4319.007	26.1	2.5	194.0	1.3	3.0	0.0	H-Horn	AV	0.0	28.6	54.0	-25.4	EUT vertical.
4319.007	26.0	2.5	123.0	1.5	3.0	0.0	V-Horn	AV	0.0	28.5	54.0	-25.5	EUT vertical.
4319.007	39.4	2.5	194.0	1.3	3.0	0.0	H-Horn	PK	0.0	41.9	74.0	-32.1	EUT vertical.
4319.007	39.3	2.5	123.0	1.5	3.0	0.0	V-Horn	PK	0.0	41.8	74.0	-32.2	EUT vertical.


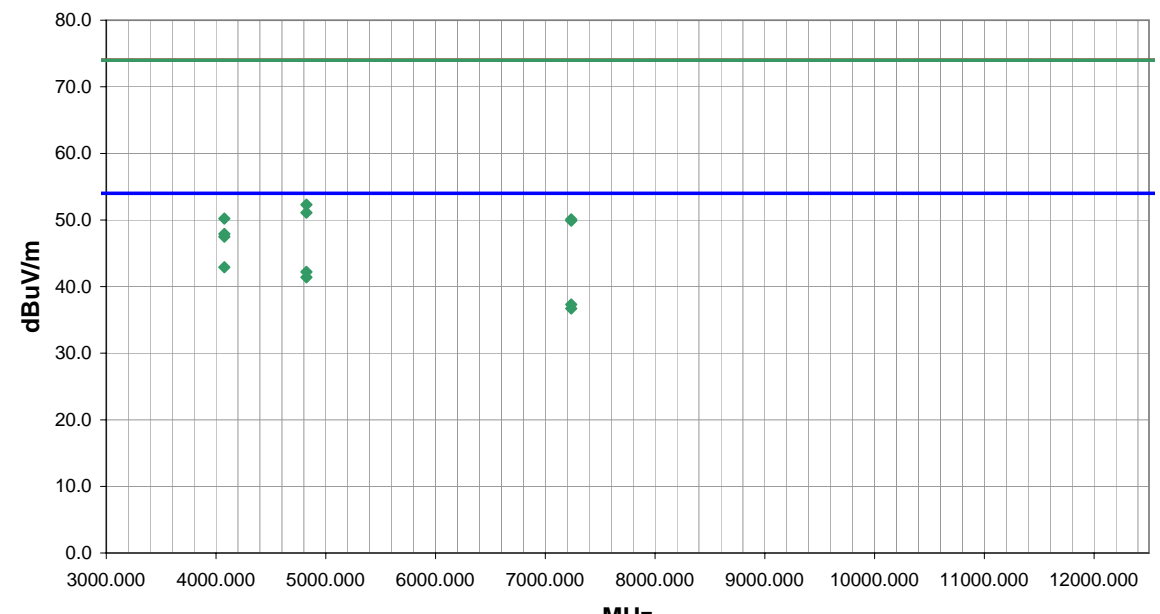
NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET										ACQ 2005.1.3 EMI 2005.1.3	
EUT: 2610CF						Work Order: ITRM0054							
Serial Number: Unknown						Date: 02/09/05							
Customer: Intermec Technologies Corporation						Temperature: 20							
Attendees: None						Humidity: 36%							
Cust. Ref. No.:						Barometric Pressure: 30.14							
Tested by: Holly Ashkannejhad						Power: 120VAC/60Hz							
						Job Site: EV01							
TEST SPECIFICATIONS													
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004						Method: ANSI C63.4:2003							
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
EUT OPERATING MODES													
Bluetooth 11, 802.11b 1, GSM 516 (PCS) on 700C													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS													
Pass										Run #			
										77			
Other													
<div style="text-align: right;">  Tested By: </div>													
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
14472.000	26.7	13.8	219.0	1.2	3.0	0.0	V-Horn	AV	0.0	40.5	54.0	-13.5	EUT horizontal
14472.000	26.6	13.8	230.0	1.3	3.0	0.0	H-Horn	AV	0.0	40.4	54.0	-13.6	EUT horizontal
14472.000	40.4	13.8	230.0	1.3	3.0	0.0	H-Horn	PK	0.0	54.2	74.0	-19.8	EUT horizontal
14472.000	39.8	13.8	219.0	1.2	3.0	0.0	V-Horn	PK	0.0	53.6	74.0	-20.4	EUT horizontal


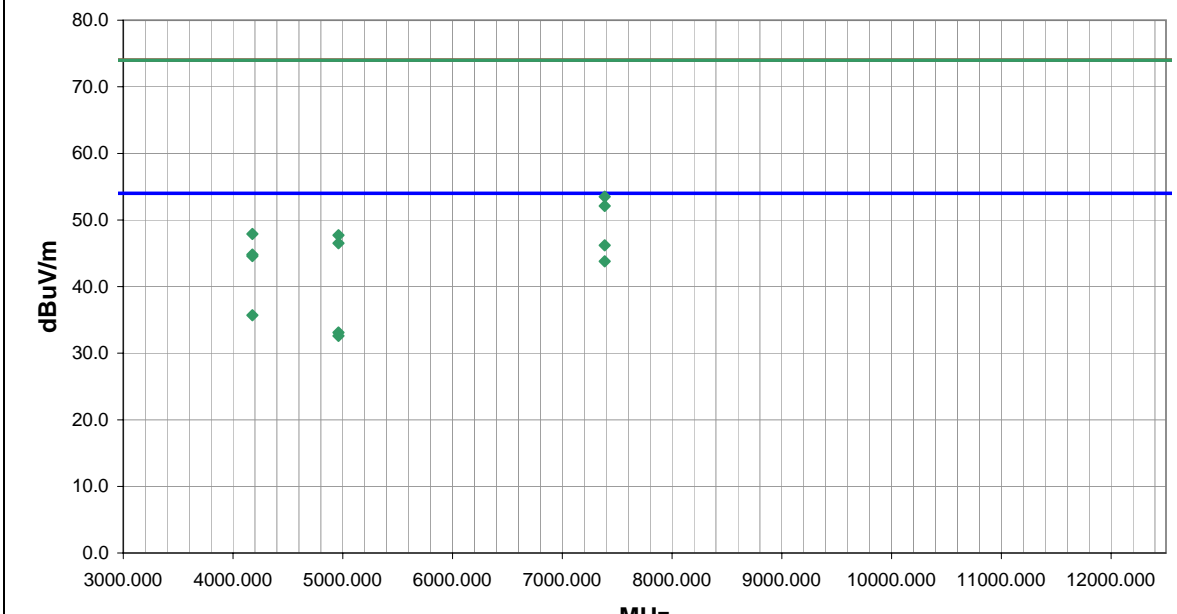
NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		ACQ 2005.1.3 EMI 2005.1.3								
EUT: 2610CF			Work Order: ITRM0054									
Serial Number: Unknown			Date: 02/09/05									
Customer: Intermec Technologies Corporation			Temperature: 20									
Attendees: None			Humidity: 36%									
Cust. Ref. No.:			Barometric Pressure: 30.14									
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004			Method: ANSI C63.4:2003									
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
EUT OPERATING MODES												
Bluetooth 67, 802.11b 11, GSM 516 (PCS) on 700C												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS					Run #							
Pass					79							
Other												
					 Tested By:							
												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
14808.000	26.7	14.0	31.0	1.2	3.0	0.0	V-Horn	AV	0.0	40.7	54.0	-13.3
14808.000	26.7	14.0	105.0	4.0	3.0	0.0	H-Horn	AV	0.0	40.7	54.0	-13.3
14808.000	40.1	14.0	105.0	4.0	3.0	0.0	H-Horn	PK	0.0	54.1	74.0	-19.9
14808.000	39.9	14.0	31.0	1.2	3.0	0.0	V-Horn	PK	0.0	53.9	74.0	-20.1

NORTHWEST EMC										ACQ 2005.1.3 EMI 2005.1.3			
RADIATED EMISSIONS DATA SHEET													
EUT: 2610CF					Work Order: ITRM0054								
Serial Number: Unknown					Date: 02/09/05								
Customer: Intermec Technologies Corporation					Temperature: 20								
Attendees: None					Humidity: 33%								
Cust. Ref. No.:					Barometric Pressure: 30.14								
Tested by: Holly Ashkannejhad					Power: 120VAC/60Hz					Job Site: EV01			
TEST SPECIFICATIONS													
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004					Method: ANSI C63.4:2003								
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
EUT OPERATING MODES													
Bluetooth 2, 802.11b 1, GSM 606 (PCS) on 700C													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS										Run #			
Pass										80			
Other										 Tested By:			
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
16821.000	26.2	14.9	279.0	1.3	3.0	0.0	H-Horn	AV	0.0	41.1	54.0	-12.9	
16821.000	26.2	14.9	160.0	1.2	3.0	0.0	V-Horn	AV	0.0	41.1	54.0	-12.9	
16821.000	40.1	14.9	279.0	1.3	3.0	0.0	H-Horn	PK	0.0	55.0	74.0	-19.0	
16821.000	39.7	14.9	160.0	1.2	3.0	0.0	V-Horn	PK	0.0	54.6	74.0	-19.4	


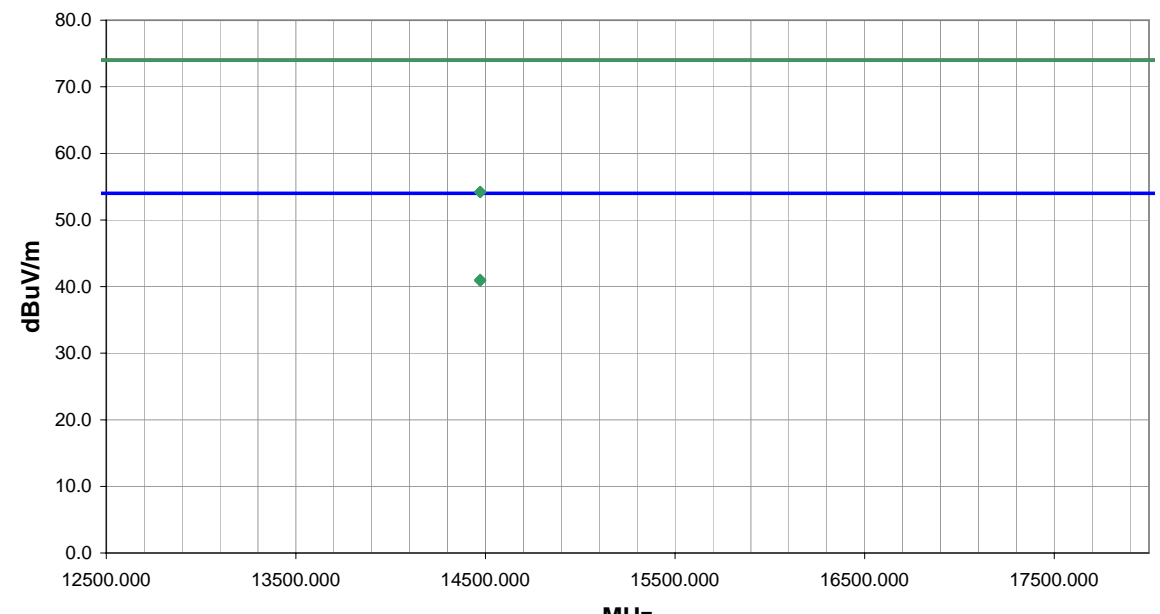
NORTHWEST		<h1 style="margin:0;">RADIATED EMISSIONS DATA SHEET</h1>				ACQ 2005.1.3 EMI A2.13	
EMC							
EUT: 2610CF				Work Order: ITRM0054			
Serial Number: Unknown				Date: 02/09/05			
Customer: Intermec Technologies Corporation				Temperature: 20			
Attendees: None				Humidity: 34%			
Cust. Ref. No.:				Barometric Pressure: 30.24			
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01			
TEST SPECIFICATIONS							
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004				Method: ANSI C63.4:2003			
SAMPLE CALCULATIONS							
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation							
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator							
COMMENTS							
EUT OPERATING MODES							
Bluetooth 11, 802.11b 1, GSM 516 (PCS) on 700C							
DEVIATIONS FROM TEST STANDARD							
No deviations.							
RESULTS						Run #	
Pass						81	
Other						 Tested By: _____	


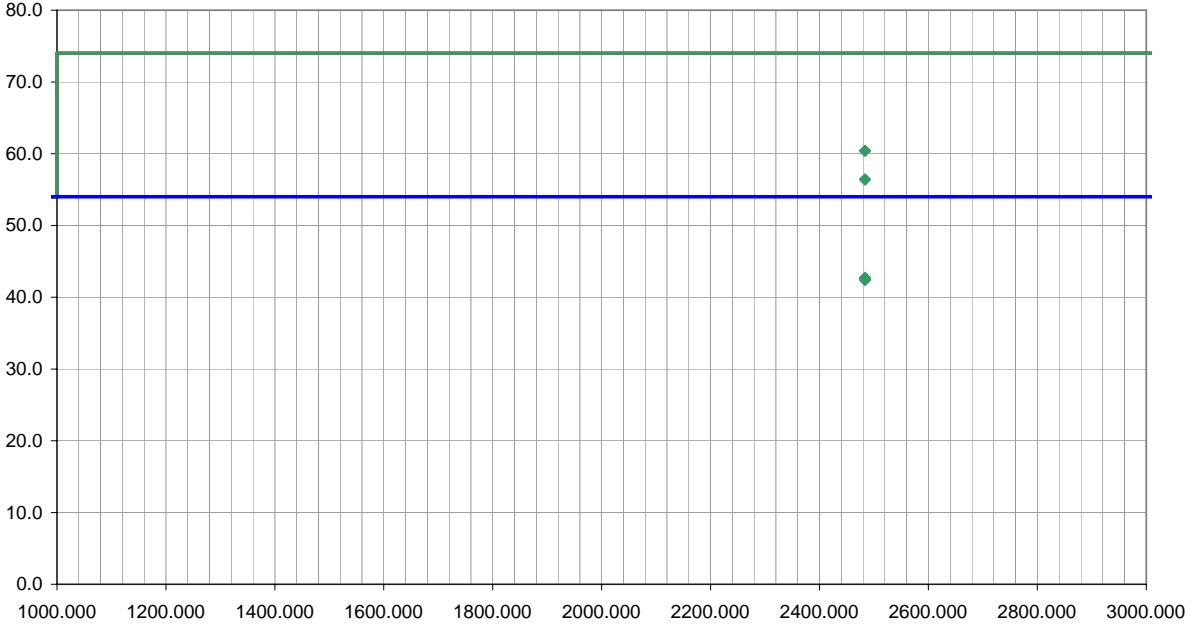
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
23612.000	27.3	10.3	239.0	1.1	3.0	0.0	V-High Horr	AV	0.0	37.6	54.0	-16.4
23612.000	27.0	10.3	281.0	1.1	3.0	0.0	I-High Horr	AV	0.0	37.3	54.0	-16.7
19310.000	26.1	8.0	84.0	1.1	3.0	0.0	I-High Horr	AV	0.0	34.1	54.0	-19.9
19310.000	25.8	8.0	306.0	1.1	3.0	0.0	V-High Horr	AV	0.0	33.8	54.0	-20.2
19296.000	25.4	8.0	-1.0	1.0	3.0	0.0	I-High Horr	AV	0.0	33.4	54.0	-20.6
19296.000	25.3	8.0	360.0	1.0	3.0	0.0	V-High Horr	AV	0.0	33.3	54.0	-20.7
19674.000	24.3	8.6	299.0	1.1	3.0	0.0	I-High Horr	AV	0.0	32.9	54.0	-21.1
19674.000	24.3	8.6	245.0	1.1	3.0	0.0	V-High Horr	AV	0.0	32.9	54.0	-21.1
23612.000	41.3	10.3	239.0	1.1	3.0	0.0	V-High Horr	PK	0.0	51.6	74.0	-22.4
23612.000	40.7	10.3	281.0	1.1	3.0	0.0	I-High Horr	PK	0.0	51.0	74.0	-23.0
19310.000	40.2	8.0	84.0	1.1	3.0	0.0	I-High Horr	PK	0.0	48.2	74.0	-25.8
19310.000	39.3	8.0	306.0	1.1	3.0	0.0	V-High Horr	PK	0.0	47.3	74.0	-26.7
19674.000	37.6	8.6	299.0	1.1	3.0	0.0	I-High Horr	PK	0.0	46.2	74.0	-27.8
19296.000	37.9	8.0	360.0	1.0	3.0	0.0	V-High Horr	PK	0.0	45.9	74.0	-28.1
19674.000	37.2	8.6	245.0	1.1	3.0	0.0	V-High Horr	PK	0.0	45.8	74.0	-28.2
19296.000	37.4	8.0	-1.0	1.0	3.0	0.0	I-High Horr	PK	0.0	45.4	74.0	-28.6


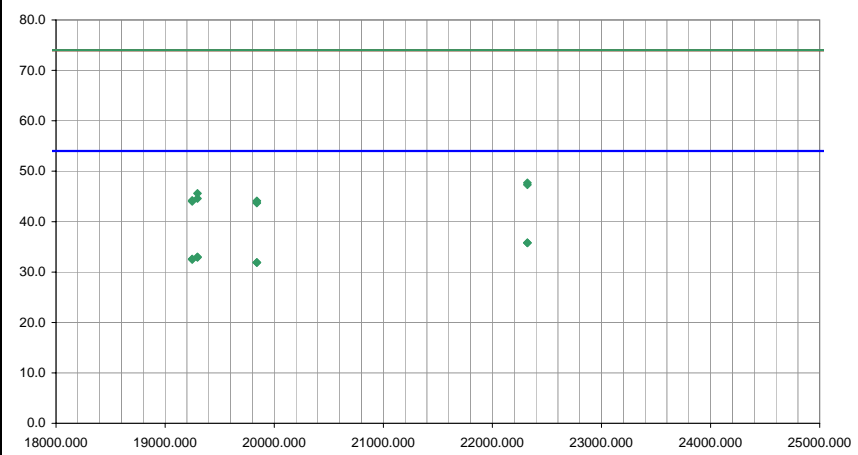
NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		ACQ 2005.1.3 EMI 2005.1.3								
EUT: 2610CF			Work Order: ITRM0054									
Serial Number: Unknown			Date: 03/12/05									
Customer: Intermec Technologies Corporation			Temperature: 18									
Attendees: None			Humidity: 36%									
Cust. Ref. No.:			Barometric Pressure: 30.01									
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004				Method: ANSI C63.4:2003								
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
EUT OPERATING MODES												
Bluetooth 11, 802.11b 1, GSM 202 (cellular) on 700C												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS					Run #							
Pass					92							
Other												
					 Tested By:							
												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
4075.975	45.5	2.4	237.0	1.1	3.0	0.0	H-Horn	AV	0.0	47.9	54.0	-6.1
4075.975	40.5	2.4	268.0	1.3	3.0	0.0	V-Horn	AV	0.0	42.9	54.0	-11.1
4823.954	38.9	3.3	258.0	1.1	3.0	0.0	H-Horn	AV	0.0	42.2	54.0	-11.8
4823.954	38.1	3.3	288.0	1.6	3.0	0.0	V-Horn	AV	0.0	41.4	54.0	-12.6
7236.000	27.2	10.1	230.0	1.3	3.0	0.0	H-Horn	AV	0.0	37.3	54.0	-16.7
7236.000	26.6	10.1	232.0	1.6	3.0	0.0	V-Horn	AV	0.0	36.7	54.0	-17.3
4823.954	49.0	3.3	258.0	1.1	3.0	0.0	H-Horn	PK	0.0	52.3	74.0	-21.7
4823.954	47.8	3.3	288.0	1.6	3.0	0.0	V-Horn	PK	0.0	51.1	74.0	-22.9
4075.975	47.8	2.4	237.0	1.1	3.0	0.0	H-Horn	PK	0.0	50.2	74.0	-23.8
7236.000	40.0	10.1	230.0	1.3	3.0	0.0	H-Horn	PK	0.0	50.1	74.0	-23.9
7236.000	39.8	10.1	232.0	1.6	3.0	0.0	V-Horn	PK	0.0	49.9	74.0	-24.1
4075.975	45.1	2.4	268.0	1.3	3.0	0.0	V-Horn	PK	0.0	47.5	74.0	-26.5

NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		ACQ 2005.1.3 EMI 2005.1.3								
EUT: 2610CF			Work Order: ITRM0054									
Serial Number: Unknown			Date: 03/12/05									
Customer: Intermec Technologies Corporation			Temperature: 18									
Attendees: None			Humidity: 36%									
Cust. Ref. No.:			Barometric Pressure: 30.01									
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004			Method: ANSI C63.4:2003									
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
EUT OPERATING MODES												
Bluetooth 79, 802.11b 11, GSM 141 (cellular) on 700C												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS					Run #							
Pass					93							
Other												
					 Tested By:							
												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
7386.210	35.4	10.8	276.0	1.2	3.0	0.0	V-Horn	AV	0.0	46.2	54.0	-7.8
4175.967	42.2	2.4	233.0	1.1	3.0	0.0	H-Horn	AV	0.0	44.6	54.0	-9.4
7386.210	33.0	10.8	319.0	1.6	3.0	0.0	H-Horn	AV	0.0	43.8	54.0	-10.2
4175.967	33.3	2.4	276.0	1.2	3.0	0.0	V-Horn	AV	0.0	35.7	54.0	-18.3
7386.210	42.7	10.8	276.0	1.2	3.0	0.0	V-Horn	PK	0.0	53.5	74.0	-20.5
4959.963	29.5	3.6	86.0	1.3	3.0	0.0	H-Horn	AV	0.0	33.1	54.0	-20.9
4959.963	29.0	3.6	13.0	1.3	3.0	0.0	V-Horn	AV	0.0	32.6	54.0	-21.4
7386.210	41.3	10.8	319.0	1.6	3.0	0.0	H-Horn	PK	0.0	52.1	74.0	-21.9
4175.967	45.5	2.4	233.0	1.1	3.0	0.0	H-Horn	PK	0.0	47.9	74.0	-26.1
4959.963	44.1	3.6	86.0	1.3	3.0	0.0	H-Horn	PK	0.0	47.7	74.0	-26.3
4959.963	42.9	3.6	13.0	1.3	3.0	0.0	V-Horn	PK	0.0	46.5	74.0	-27.5
4175.967	42.4	2.4	276.0	1.2	3.0	0.0	V-Horn	PK	0.0	44.8	74.0	-29.2

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET					ACQ 2005.1.3 EMI 2005.1.3	
EUT: 2610CF										Work Order: ITRM0054						
Serial Number: Unknown										Date: 03/13/05						
Customer: Intermec Technologies Corporation										Temperature: 18						
Attendees: None										Humidity: 36%						
Cust. Ref. No.:										Barometric Pressure: 30.01						
Tested by: Holly Ashkannejhad					Power: 120VAC/60Hz					Job Site: EV01						
TEST SPECIFICATIONS																
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004										Method: ANSI C63.4:2003						
SAMPLE CALCULATIONS																
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation																
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator																
COMMENTS																
EUT OPERATING MODES																
Bluetooth 5, 802.11b 1, GSM 191 (cellular) on 700C																
DEVIATIONS FROM TEST STANDARD																
No deviations.																
RESULTS																
Pass															Run #	
															98	
Other										 Tested By:						
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)				
4075.922	44.5	2.4	246.0	1.8	3.0	0.0	H-Horn	AV	0.0	46.9	54.0	-7.1				
4075.922	40.9	2.4	279.0	1.2	3.0	0.0	V-Horn	AV	0.0	43.3	54.0	-10.7				
4811.954	33.0	3.3	274.0	1.1	3.0	0.0	H-Horn	AV	0.0	36.3	54.0	-17.7				
4811.954	32.3	3.3	113.0	1.1	3.0	0.0	V-Horn	AV	0.0	35.6	54.0	-18.4				
4811.954	48.7	3.3	274.0	1.1	3.0	0.0	H-Horn	PK	0.0	52.0	74.0	-22.0				
4811.954	47.5	3.3	113.0	1.1	3.0	0.0	V-Horn	PK	0.0	50.8	74.0	-23.2				
4075.922	47.0	2.4	246.0	1.8	3.0	0.0	H-Horn	PK	0.0	49.4	74.0	-24.6				
4075.922	44.9	2.4	279.0	1.2	3.0	0.0	V-Horn	PK	0.0	47.3	74.0	-26.7				

NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		ACQ 2005.1.3 EMI 2005.1.3								
EUT: 2610CF			Work Order: ITRM0054									
Serial Number: Unknown			Date: 03/13/05									
Customer: Intermec Technologies Corporation			Temperature: 18									
Attendees: None			Humidity: 36%									
Cust. Ref. No.:			Barometric Pressure: 30.01									
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004			Method: ANSI C63.4:2003									
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
EUT OPERATING MODES												
Bluetooth 11, 802.11b 1, GSM 202 (cellular) on 700C												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS					Run #							
Pass					99							
Other												
					 Tested By:							
												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
14472.000	26.7	14.3	318.0	1.3	3.0	0.0	H-Horn	AV	0.0	41.0	54.0	-13.0
14472.000	26.6	14.3	109.0	1.2	3.0	0.0	V-Horn	AV	0.0	40.9	54.0	-13.1
14472.000	39.9	14.3	318.0	1.3	3.0	0.0	H-Horn	PK	0.0	54.2	74.0	-19.8
14472.000	39.9	14.3	109.0	1.2	3.0	0.0	V-Horn	PK	0.0	54.2	74.0	-19.8

NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET										ACQ 2005.1.3 EMI A2.13	
EUT: 2610CF		Work Order: ITRM0054											
Serial Number: Unknown		Date: 03/16/05											
Customer: Intermec Technologies Corporation		Temperature: 21											
Attendees: None		Humidity: 32%											
Cust. Ref. No.:		Barometric Pressure: 30.12											
Tested by: Greg Kiemel		Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS													
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004		Method: ANSI C63.4:2003											
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
EUT OPERATING MODES													
Bluetooth 79, 802.11b 11, GSM 140 (cellular) on 700C													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS												Run #	
Pass												111	
Other													
<div style="text-align: right;">  Tested By: _____ </div>													
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
2483.500	12.3	30.4	168.0	1.7	3.0	0.0	H-Horn	AV	0.0	42.7	54.0	-11.3	
2483.500	12.0	30.4	130.0	1.6	3.0	0.0	V-Horn	AV	0.0	42.4	54.0	-11.6	
2483.500	30.0	30.4	168.0	1.7	3.0	0.0	H-Horn	PK	0.0	60.4	74.0	-13.6	
2483.500	26.0	30.4	130.0	1.6	3.0	0.0	V-Horn	PK	0.0	56.4	74.0	-17.6	

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET										ACQ 2005.1.3 EMI A2.13									
EUT: 2610CF										Work Order: ITRM0054																			
Serial Number: Unknown										Date: 03/16/05																			
Customer: Intermec Technologies Corporation										Temperature: 21																			
Attendees: None										Humidity: 32%																			
Cust. Ref. No.:										Barometric Pressure: 30.12																			
Tested by: Greg Kiemel										Power: 120VAC/60Hz										Job Site: EV01									
TEST SPECIFICATIONS																													
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004										Method: ANSI C63.4:2003																			
SAMPLE CALCULATIONS																													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation																													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator																													
COMMENTS																													
EUT OPERATING MODES																													
Simultaneous Transmission of 700C/GSMcellular/802.11b/Bluetooth)																													
DEVIATIONS FROM TEST STANDARD																													
No deviations.																													
RESULTS										Run #																			
Pass										112																			
Other										<div>Tested By: </div>																			
																													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments																
22320.000	26.6	9.2	0.0	1.0	3.0	0.0 V-High Horr	AV		0.0	35.8	54.0	-18.2	Config. 3: Bluetooth Ch. 79, 802.11b Ch. 11, GSM Ch. 141.																
22320.000	26.6	9.2	0.0	1.0	3.0	0.0 +High Horr	AV		0.0	35.8	54.0	-18.2	Config. 3: Bluetooth Ch. 79, 802.11b Ch. 11, GSM Ch. 141.																
19296.000	25.0	8.0	0.0	1.0	3.0	0.0 +High Horr	AV		0.0	33.0	54.0	-21.0	Config. 1: Bluetooth Ch. 11, 802.11b Ch. 1, GSM Ch. 202.																
19296.000	24.9	8.0	0.0	1.0	3.0	0.0 V-High Horr	AV		0.0	32.9	54.0	-21.1	Config. 1: Bluetooth Ch. 11, 802.11b Ch. 1, GSM Ch. 202.																
19248.000	24.8	7.8	0.0	1.0	3.0	0.0 V-High Horr	AV		0.0	32.6	54.0	-21.4	Config. 2: Bluetooth Ch. 5, 802.11b Ch. 1, GSM Ch. 191.																
19248.000	24.7	7.8	0.0	1.0	3.0	0.0 +High Horr	AV		0.0	32.5	54.0	-21.5	Config. 2: Bluetooth Ch. 5, 802.11b Ch. 1, GSM Ch. 191.																
19840.000	23.0	8.9	0.0	1.0	3.0	0.0 +High Horr	AV		0.0	31.9	54.0	-22.1	Config. 3: Bluetooth Ch. 79, 802.11b Ch. 11, GSM Ch. 141.																
19840.000	23.0	8.9	0.0	1.0	3.0	0.0 V-High Horr	AV		0.0	31.9	54.0	-22.1	Config. 3: Bluetooth Ch. 79, 802.11b Ch. 11, GSM Ch. 141.																
22320.000	38.5	9.2	0.0	1.0	3.0	0.0 V-High Horr	PK		0.0	47.7	74.0	-26.3	Config. 3: Bluetooth Ch. 79, 802.11b Ch. 11, GSM Ch. 141.																
22320.000	38.1	9.2	0.0	1.0	3.0	0.0 +High Horr	PK		0.0	47.3	74.0	-26.7	Config. 3: Bluetooth Ch. 79, 802.11b Ch. 11, GSM Ch. 141.																
19296.000	37.6	8.0	0.0	1.0	3.0	0.0 +High Horr	PK		0.0	45.6	74.0	-28.4	Config. 1: Bluetooth Ch. 11, 802.11b Ch. 1, GSM Ch. 202.																
19296.000	36.6	8.0	0.0	1.0	3.0	0.0 V-High Horr	PK		0.0	44.6	74.0	-29.4	Config. 1: Bluetooth Ch. 11, 802.11b Ch. 1, GSM Ch. 202.																
19248.000	36.4	7.8	0.0	1.0	3.0	0.0 V-High Horr	PK		0.0	44.2	74.0	-29.8	Config. 2: Bluetooth Ch. 5, 802.11b Ch. 1, GSM Ch. 191.																
19840.000	35.2	8.9	0.0	1.0	3.0	0.0 V-High Horr	PK		0.0	44.1	74.0	-29.9	Config. 3: Bluetooth Ch. 79, 802.11b Ch. 11, GSM Ch. 141.																
19248.000	36.2	7.8	0.0	1.0	3.0	0.0 +High Horr	PK		0.0	44.0	74.0	-30.0	Config. 2: Bluetooth Ch. 5, 802.11b Ch. 1, GSM Ch. 191.																
19840.000	34.8	8.9	0.0	1.0	3.0	0.0 +High Horr	PK		0.0	43.7	74.0	-30.3	Config. 3: Bluetooth Ch. 79, 802.11b Ch. 11, GSM Ch. 141.																

