


RF TEST REPORT

Applicant	Nokia Shanghai Bell Co., Ltd.
FCC ID	2ADZRG1426GD
Product	NOKIA ONT
Brand	NOKIA
Model	G-1426G-D; G-0126G-A
Report No.	R2410A1477-R2V1
Issue Date	December 23, 2024

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15E (2023)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.



Prepared by: Xu Ying



Approved by: Xu Kai

Eurofins TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1. Test Laboratory	5
1.1. Notes of the test report	5
1.2. Test facility	5
1.3. Testing Location.....	5
2. General Description of Equipment under Test	6
2.1. Applicant and Manufacturer Information	6
2.2. General information	6
3. Applied Standards	8
4. Test Configuration.....	9
5. Test Case Results.....	12
5.1. Occupied Bandwidth.....	12
5.2. Average Power Output	82
5.3. Frequency Stability	107
5.4. Power Spectral Density	111
5.5. Unwanted Emission	425
5.6. Conducted Emission.....	586
6. Main Test Instruments	589
ANNEX A: The EUT Appearance.....	590
ANNEX B: Test Setup Photos	591

Version	Revision Description	Issue Date
Rev.0	Initial issue of report.	December 17, 2024
Rev.1	Updated information.	December 23, 2024
Note: This revised report (Report No.: R2410A1477-R2V1) supersedes and replaces the previously issued report (Report No.: R2410A1477-R2). Please discard or destroy the previously issued report and dispose of it accordingly.		

Summary of measurement results

Number	Test Case	Clause in FCC rules	Verdict
1	Average output power	15.407(a)	PASS
2	Occupied bandwidth	15.407(e)	PASS
3	Frequency stability	15.407(g)	PASS
4	Power spectral density	15.407(a)	PASS
5	Unwanted Emissions	15.407(b)	PASS
6	Conducted Emissions	15.207	PASS
Date of Testing: October 30, 2024 ~ November 26, 2024			
Date of Sample Received: October 12, 2024			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard. All indications of Pass/Fail in this report are opinions expressed by Eurofins TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3. Testing Location

Company: Eurofins TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <https://www.eurofins.com/electrical-and-electronics>
E-mail: Kain.Xu@cpt.eurofinscn.com

2. General Description of Equipment under Test

2.1. Applicant and Manufacturer Information

Applicant	Nokia Shanghai Bell Co., Ltd.
Applicant address	No.388, Ningqiao Rd, Pilot Free Trade Zone, Shanghai, 201206 P.R. China
Manufacturer	Nokia Shanghai Bell Co., Ltd.
Manufacturer address	No.388, Ningqiao Rd, Pilot Free Trade Zone, Shanghai, 201206 P.R. China

2.2. General information

EUT Description			
Model	G-1426G-D; G-0126G-A		
SN	Conducted	ALCLB458EBCA	
	Radiated	ALCLB458EBD5	
Hardware Version	PEM2		
Software Version	3TN01213HJLL48		
Power Supply	AC adapter		
Antenna Type	External Antenna		
Antenna Connector	I-PEX antenna (meet with the standard FCC Part 15.203 requirement)		
Antenna Gain	Band	Antenna 1	Antenna 2
	U-NII-1	5.44 dBi	5.17dBi
	U-NII-2A	5.24 dBi	4.85dBi
	U-NII-2C	5.75 dBi	5.67dBi
Directional Gain	Band	Beamforming Mode for Power	Beamforming Mode for PSD
	U-NII-1	5.44dBi	8.15dBi
	U-NII-2A	5.24dBi	7.99dBi
	U-NII-2C	5.75dBi	8.71dBi
Operating Frequency Range(s)	U-NII-1: 5150MHz-5250MHz U-NII-2A: 5250MHz -5350MHz U-NII-2C: 5470MHz-5725MHz U-NII-3: 5725MHz -5850MHz		
Modulation Type	802.11a: OFDM 802.11n (HT20/HT40): OFDM 802.11ac (VHT20/VHT40/VHT80/VHT160): OFDM 802.11ax (HE20/ HE40/ HE80/HE160): OFDMA		

Max. Output Power	28.77 dBm
Operating temperature range	-5 ° C to 40 ° C
Operating voltage range	11.4 VDC to 12.6 VDC
Testing temperature range	-30 ° C to 50° C
Testing voltage range	10 VDC - 12 VDC - 14 VDC
State voltage	12 VDC
EUT Accessory	
Adapter 1	Manufacturer: MOSO Model: MS-V1000R120-012R0-AG
Adapter 2	Manufacturer: MNC Model: MAUS-1201001202
Adapter 3	Manufacturer: Keli Model: KL-WA120100-E
Note: 1. The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant. 2. This device support automatically discontinue transmission, while the device is not transmitting any information, the device can automatically discontinue transmission and become standby mode for power saving. The device can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission. 3. (a) Manufacturers implements security features in any digitally modulated devices capable of operating in any of the U-NII bands, so that third parties are not able to reprogram the device to operate outside the parameters for which the device was certified. The software prevents the user from operating the transmitter with operating frequencies, output power, modulation types or other radio frequency parameters outside those that were approved for the device. Manufacturers uses means including, but not limited to the use of a private network that allows only authenticated users to download software, electronic signatures in software or coding in hardware that is decoded by software to verify that new software can be legally loaded into a device to meet these requirements and must describe the methods in their application for equipment authorization. (b) Manufacturers take steps to ensure that DFS functionality cannot be disabled by the operator of the U-NII device.	

The differences between G-1426G-D and G-0126G-A are as follows.

Model	G-1426G-D	G-0126G-A
GE ports	4	1
POTS port	1	/
USB port	And also, G-1426G-D have two different variants, one have USB port, one do not have USB port.	/
Others	The same	

3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 15E (2023) Unlicensed National Information Infrastructure Devices

ANSI C63.10-2013

Reference standard:

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

4. Test Configuration

Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Mode	Data Rate			
	Antenna 1	Antenna 2	MIMO	Beamforming
802.11a	6 Mbps	6 Mbps	/	/
802.11n HT20	MCS0	MCS0	MCS8	MCS8
802.11n HT40	MCS0	MCS0	MCS8	MCS8
802.11ac VHT20	MCS0	MCS0	MCS0	MCS0
802.11ac VHT40	MCS0	MCS0	MCS0	MCS0
802.11ac VHT80	MCS0	MCS0	MCS0	MCS0
802.11ac VHT160	MCS0	MCS0	MCS0	MCS0
802.11ax HE20	MCS0	MCS0	MCS0	MCS0
802.11ax HE40	MCS0	MCS0	MCS0	MCS0
802.11ax HE80	MCS0	MCS0	MCS0	MCS0
802.11ax HE160	MCS0	MCS0	MCS0	MCS0

The worst case Antenna mode for each of the following tests for Wi-Fi:

Test Cases	Antenna 1	Antenna 2	MIMO	Beamforming
Average conducted output power	O	O	802.11n HT20/40 802.11ac VHE20/40/80/160 802.11ax HE20/40/80/160	802.11n HT20/40 802.11ac VHE20/40/80/160 802.11ax HE20/40/80/160
Occupied bandwidth	O	--	--	--
Frequency stability	802.11a	--	--	--
Power Spectral Density	O	O	802.11n HT20/40 802.11ac VHE20/40/80/160 802.11ax HE20/40/80/160	802.11n HT20/40 802.11ac VHE20/40/80/160 802.11ax HE20/40/80/160
Unwanted Emissions	O	--	--	--
Conducted Emissions	O	--	--	--
Note: "O": test all bands				

Wireless Technology and Frequency Range

Wireless Technology		Bandwidth	Channel	Frequency
Wi-Fi	U-NII-1	20 MHz	36	5180MHz
			40	5200MHz
			44	5220MHz
			48	5240MHz
		40 MHz	38	5190MHz
			46	5230MHz
		80 MHz	42	5210MHz
		160 MHz	50	5250MHz
	U-NII-2A	20 MHz	52	5260MHz
			56	5280MHz
			60	5300MHz
			64	5320MHz
		40 MHz	54	5270MHz
			62	5310MHz
		80 MHz	58	5290MHz
	U-NII-2C	20 MHz	100	5500MHz
			104	5520MHz
			108	5540MHz
			112	5560MHz
			116	5580MHz
			120	5600MHz
			124	5620MHz
			128	5640MHz
			132	5660MHz
			136	5680MHz
			140	5700MHz
			144	5720MHz
		40 MHz	102	5510MHz
			110	5550MHz
			118	5590MHz
			126	5630MHz
			134	5670MHz
			142	5710MHz
		80 MHz	106	5530MHz
			122	5610MHz
			138	5690MHz
		160 MHz	114	5570MHz

Test Report		Report No.: R2410A1477-R24		
	U-NII-3	20 MHz	149	5745MHz
			153	5765MHz
			157	5785MHz
			161	5805MHz
			165	5825MHz
		40 MHz	151	5755MHz
			159	5795MHz
		80 MHz	155	5775MHz
Does this device support TPC Function? ☒ Yes ☐ No				
Does this device support TDWR Band? ☒ Yes ☐ No				

5. Test Case Results

5.1. Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
15°C ~ 35°C	20% ~ 80%	86 kPa ~ 106 kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable.


For U-NII-1/U-NII-2A/U-NII-2C, set RBW $\approx 1\%$ OCB kHz, VBW $\geq 3 \times$ RBW, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

For U-NII-3, Set RBW = 100 kHz, VBW $\geq 3 \times$ RBW, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

Use the 99 % power bandwidth function of the instrument

Test Setup



Limits

For U-NII-1/U-NII-2A/U-NII-2C

No specific occupied bandwidth requirements in Part 15.407.

For U-NII-3

Rule FCC Part §15.407(e)

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

Test Results:
U-NII-1

Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 26 dB bandwidth (MHz)	Conclusion
802.11a	5180	19.293	35.825	PASS
802.11a	5200	19.451	36.206	PASS
802.11a	5240	18.504	35.876	PASS
802.11ax (HE20)	5180	19.830	39.234	PASS
802.11ax (HE20)	5200	19.470	39.047	PASS
802.11ax (HE20)	5240	19.318	38.796	PASS
802.11ax (HE40)	5190	41.495	77.616	PASS
802.11ax (HE40)	5230	39.313	78.159	PASS
802.11ax (HE80)	5210	84.239	158.650	PASS
802.11n(HT20)	5180	19.040	38.178	PASS
802.11n(HT20)	5200	19.934	39.563	PASS
802.11n(HT20)	5240	18.586	37.316	PASS
802.11n(HT40)	5190	40.659	79.153	PASS
802.11n(HT40)	5230	38.659	79.096	PASS
802.11ac (VHT20)	5180	19.402	37.799	PASS
802.11ac (VHT20)	5200	18.755	39.614	PASS
802.11ac (VHT20)	5240	19.092	38.961	PASS
802.11ac (VHT40)	5190	41.715	79.968	PASS
802.11ac (VHT40)	5230	39.236	79.761	PASS
802.11ac (VHT80)	5210	84.005	157.154	PASS

U-NII-2A

Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 26 dB bandwidth (MHz)	Conclusion
802.11a	5260	16.442	18.906	PASS
802.11a	5300	16.432	18.915	PASS
802.11a	5320	16.432	18.801	PASS
802.11n(HT20)	5260	17.577	19.722	PASS
802.11n(HT20)	5300	17.577	19.726	PASS
802.11n(HT20)	5320	17.580	19.594	PASS
802.11n(HT40)	5270	36.195	53.521	PASS
802.11n(HT40)	5310	36.256	55.540	PASS
802.11ac (VHT20)	5260	17.578	19.599	PASS
802.11ac (VHT20)	5300	17.568	19.659	PASS
802.11ac (VHT20)	5320	17.584	19.847	PASS
802.11ac (VHT40)	5270	36.156	44.456	PASS
802.11ac (VHT40)	5310	36.187	48.824	PASS
802.11ac (VHT80)	5290	76.180	92.652	PASS
802.11ac (VHT160)	5250	155.724	254.535	PASS
802.11ax (HE20)	5260	18.919	20.300	PASS
802.11ax (HE20)	5300	18.920	20.279	PASS
802.11ax (HE20)	5320	18.916	20.410	PASS
802.11ax (HE40)	5270	37.794	40.196	PASS
802.11ax (HE40)	5310	37.904	46.578	PASS
802.11ax (HE80)	5290	77.311	96.050	PASS
802.11ax (HE160)	5250	157.465	296.299	PASS

U-NII-2C

Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 26 dB bandwidth (MHz)	Conclusion
802.11a	5500	16.435	18.692	PASS
802.11a	5600	16.398	18.643	PASS
802.11a	5700	16.413	18.938	PASS
802.11a	5720	16.409	18.729	PASS
802.11n(HT20)	5500	17.573	19.656	PASS
802.11n(HT20)	5600	17.558	19.647	PASS
802.11n(HT20)	5700	17.564	19.692	PASS
802.11n(HT20)	5720	17.563	19.755	PASS
802.11n(HT40)	5510	37.874	46.473	PASS
802.11n(HT40)	5590	37.828	49.078	PASS
802.11n(HT40)	5670	37.822	46.574	PASS
802.11n(HT40)	5710	37.880	61.931	PASS
802.11ac (VHT20)	5500	17.572	19.611	PASS
802.11ac (VHT20)	5600	17.572	19.781	PASS
802.11ac (VHT20)	5700	17.565	19.578	PASS
802.11ac (VHT20)	5720	17.586	19.567	PASS
802.11ac (VHT40)	5510	36.180	54.914	PASS
802.11ac (VHT40)	5590	36.191	39.323	PASS
802.11ac (VHT40)	5670	36.194	56.908	PASS
802.11ac (VHT40)	5710	36.236	67.286	PASS
802.11ac (VHT80)	5530	75.924	85.012	PASS
802.11ac (VHT80)	5610	76.160	105.670	PASS
802.11ac (VHT80)	5690	76.097	106.472	PASS
802.11ac (VHT160)	5570	155.704	281.508	PASS
802.11ax (HE20)	5500	18.928	20.246	PASS
802.11ax (HE20)	5600	18.916	20.365	PASS
802.11ax (HE20)	5700	18.888	20.208	PASS
802.11ax (HE20)	5720	18.911	20.439	PASS
802.11ax (HE40)	5510	37.852	46.553	PASS
802.11ax (HE40)	5590	37.820	48.847	PASS
802.11ax (HE40)	5670	37.823	46.597	PASS
802.11ax (HE40)	5710	37.860	62.099	PASS
802.11ax (HE80)	5530	77.004	81.049	PASS
802.11ax (HE80)	5610	77.396	96.566	PASS
802.11ax (HE80)	5690	77.266	96.577	PASS
802.11ax (HE160)	5570	157.385	295.645	PASS

U-NII-3


Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Limit (kHz)	Conclusion
802.11a	5745	26.765	500	PASS
802.11a	5785	27.654	500	PASS
802.11a	5825	27.739	500	PASS
802.11n(HT20)	5745	28.138	500	PASS
802.11n(HT20)	5785	28.379	500	PASS
802.11n(HT20)	5825	28.096	500	PASS
802.11n(HT40)	5755	54.530	500	PASS
802.11n(HT40)	5795	58.581	500	PASS
802.11ac (VHT20)	5745	27.156	500	PASS
802.11ac (VHT20)	5785	28.564	500	PASS
802.11ac (VHT20)	5825	27.762	500	PASS
802.11ac (VHT40)	5755	54.688	500	PASS
802.11ac (VHT40)	5795	58.696	500	PASS
802.11ac (VHT80)	5775	112.849	500	PASS
802.11ax (HE20)	5745	25.852	500	PASS
802.11ax (HE20)	5785	27.416	500	PASS
802.11ax (HE20)	5825	27.838	500	PASS
802.11ax (HE40)	5755	51.952	500	PASS
802.11ax (HE40)	5795	56.856	500	PASS
802.11ax (HE80)	5775	112.022	500	PASS

Mode	Carrier frequency (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11a	5720	16.313	500	PASS
802.11a	5745	16.293	500	PASS
802.11a	5785	16.306	500	PASS
802.11a	5825	16.290	500	PASS
802.11n(HT20)	5720	17.553	500	PASS
802.11n(HT20)	5745	16.784	500	PASS
802.11n(HT20)	5785	17.287	500	PASS
802.11n(HT20)	5825	16.317	500	PASS
802.11n(HT40)	5710	36.130	500	PASS
802.11n(HT40)	5755	36.297	500	PASS
802.11n(HT40)	5795	36.262	500	PASS
802.11ac (VHT20)	5720	16.887	500	PASS
802.11ac (VHT20)	5745	16.934	500	PASS
802.11ac (VHT20)	5785	17.557	500	PASS
802.11ac (VHT20)	5825	17.150	500	PASS
802.11ac (VHT40)	5710	35.779	500	PASS
802.11ac (VHT40)	5755	35.896	500	PASS
802.11ac (VHT40)	5795	36.286	500	PASS
802.11ac (VHT80)	5690	75.460	500	PASS
802.11ac (VHT80)	5775	75.095	500	PASS
802.11ax (HE20)	5720	18.522	500	PASS
802.11ax (HE20)	5745	17.798	500	PASS
802.11ax (HE20)	5785	18.026	500	PASS
802.11ax (HE20)	5825	17.930	500	PASS
802.11ax (HE40)	5710	37.843	500	PASS
802.11ax (HE40)	5755	37.789	500	PASS
802.11ax (HE40)	5795	37.544	500	PASS
802.11ax (HE80)	5690	76.665	500	PASS
802.11ax (HE80)	5775	75.094	500	PASS


99% bandwidth

U-NII-1


OBW 802.11a 5180MHz

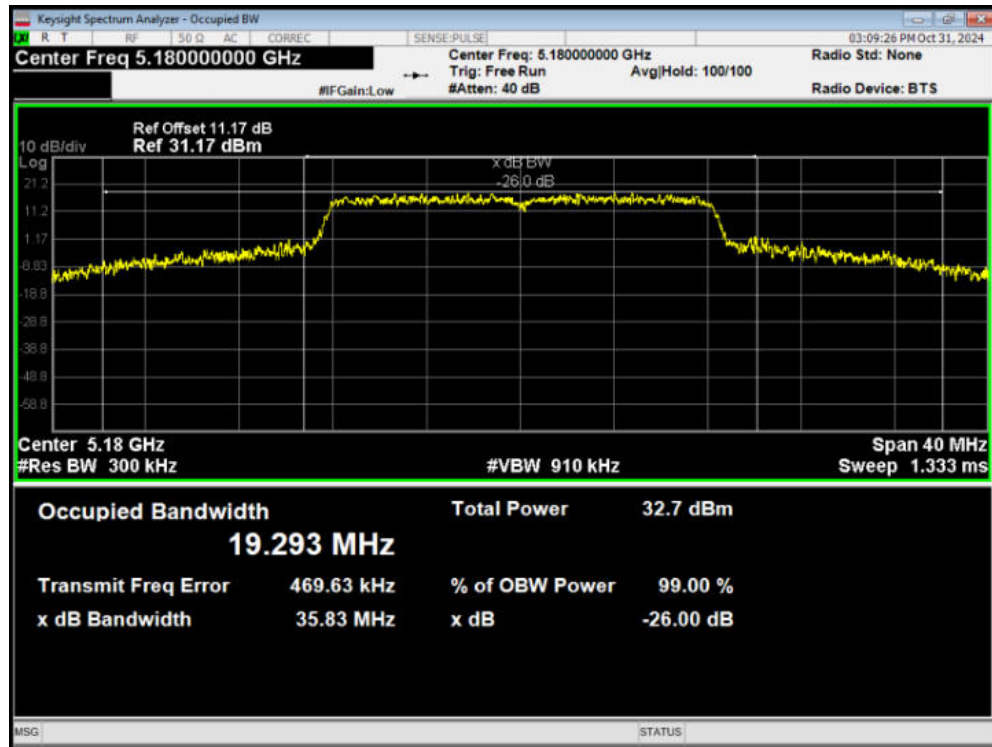


OBW 802.11a 5200MHz

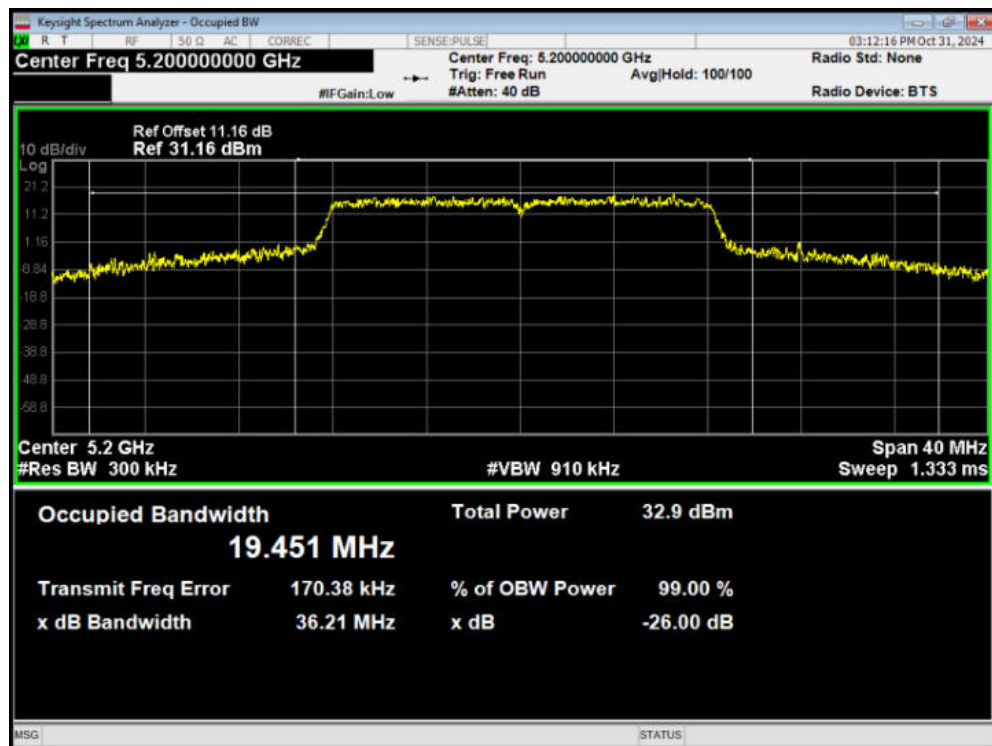


OBW 802.11a 5240MHz

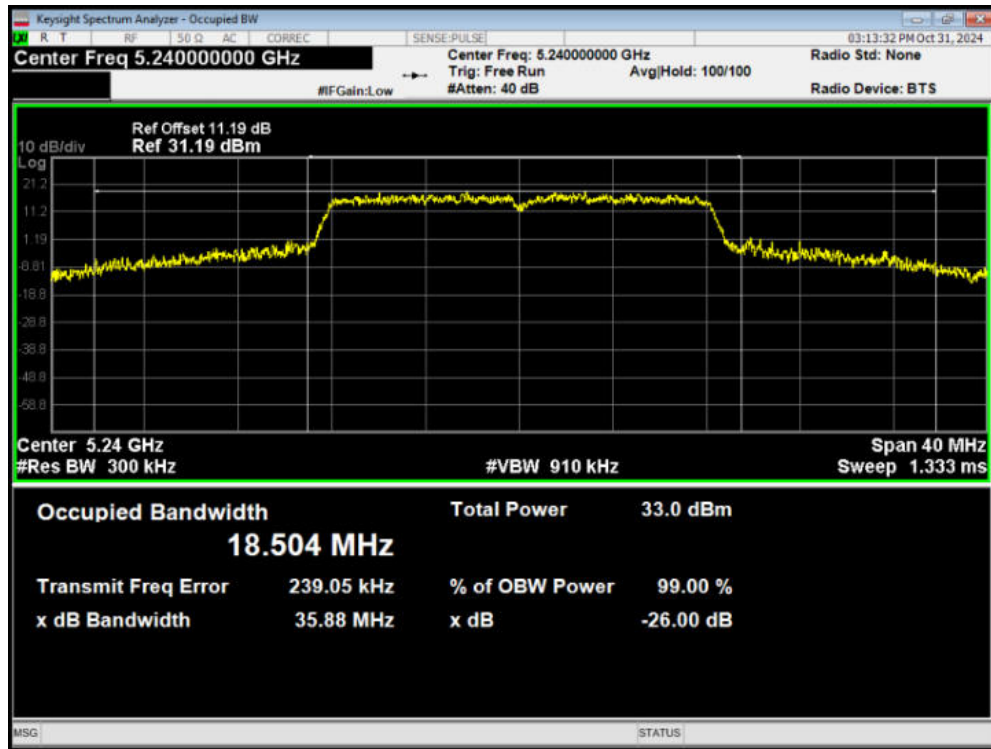


OBW 802.11ac(VHT20) 5180MHz

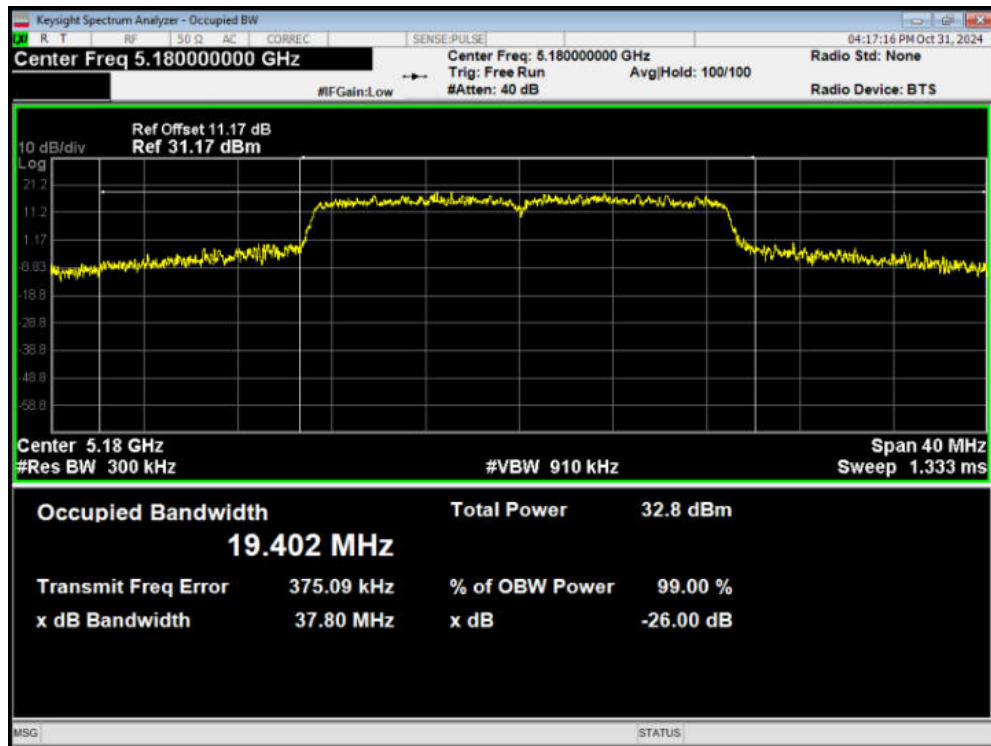


OBW 802.11ac(VHT20) 5200MHz

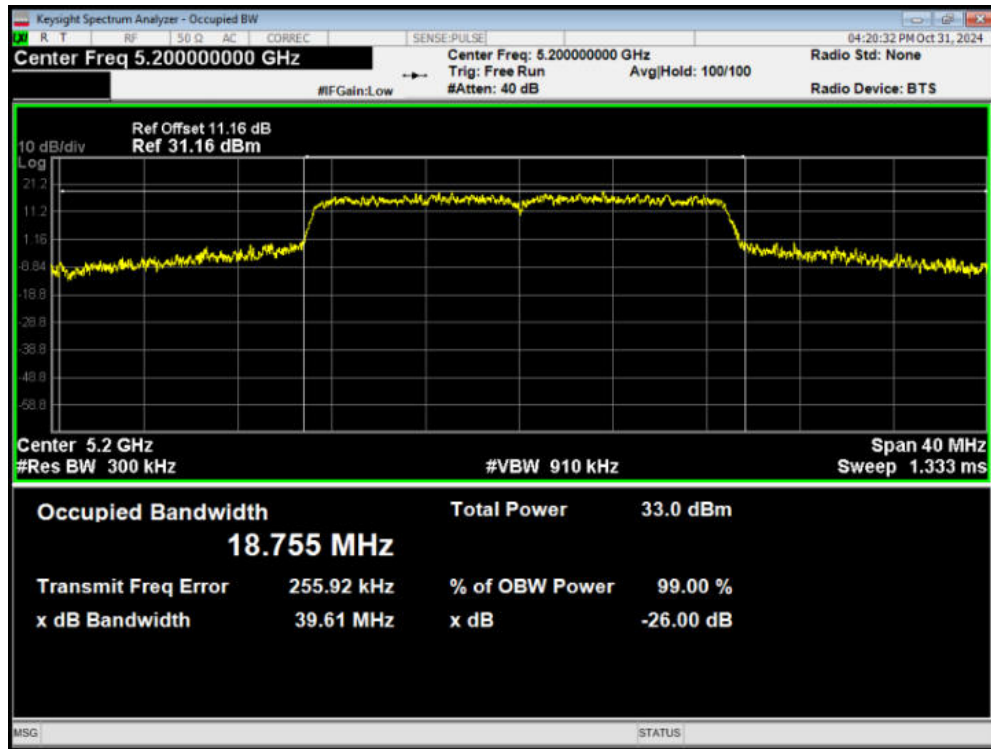


OBW 802.11ac(VHT20) 5240MHz

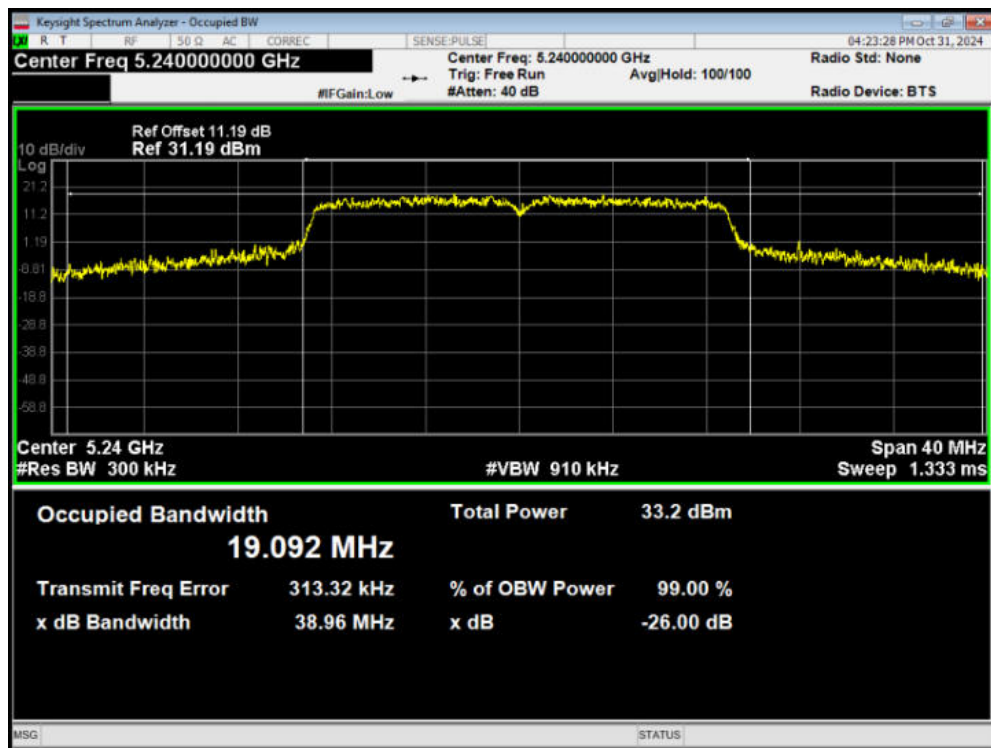


OBW 802.11ac(VHT40) 5190MHz

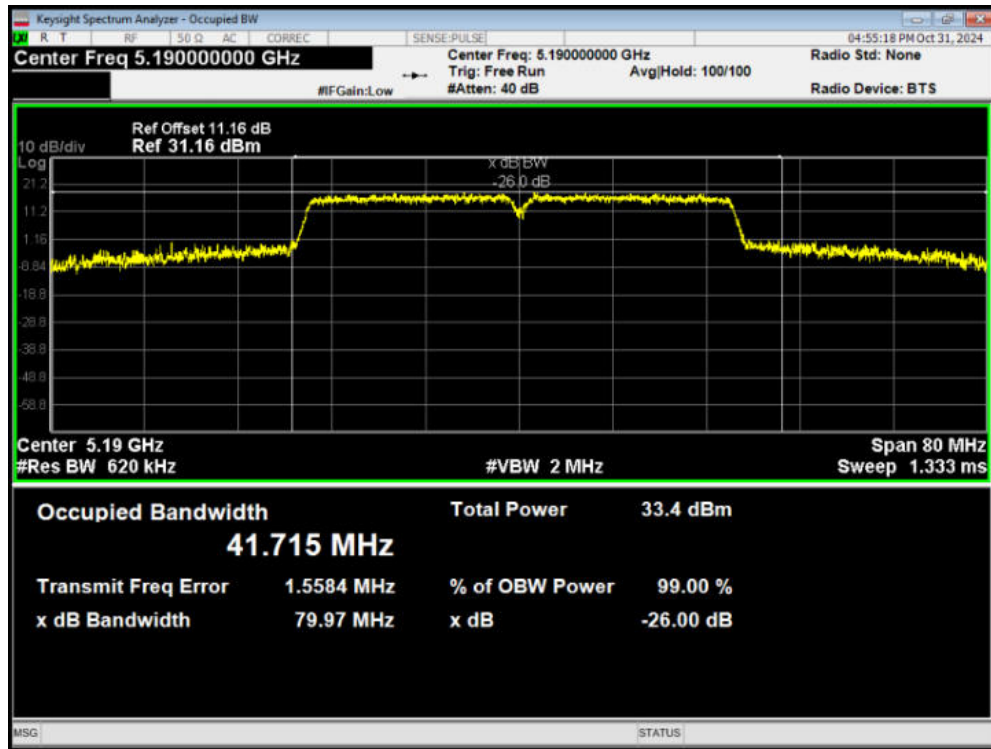


OBW 802.11ac(VHT40) 5230MHz

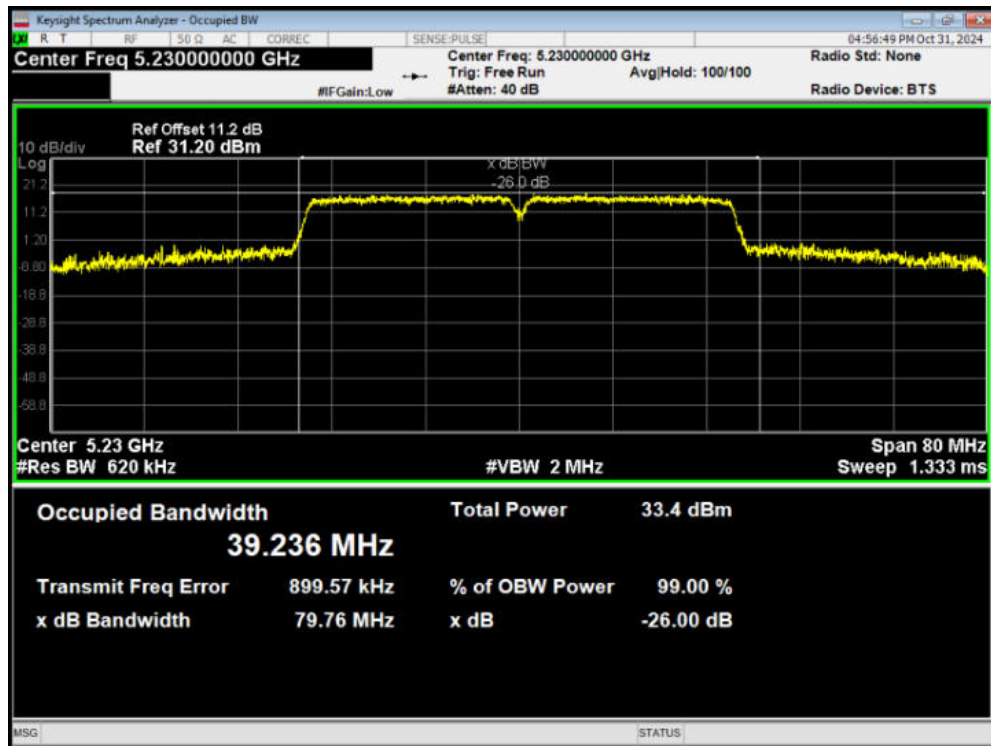


OBW 802.11ac(VHT80) 5210MHz

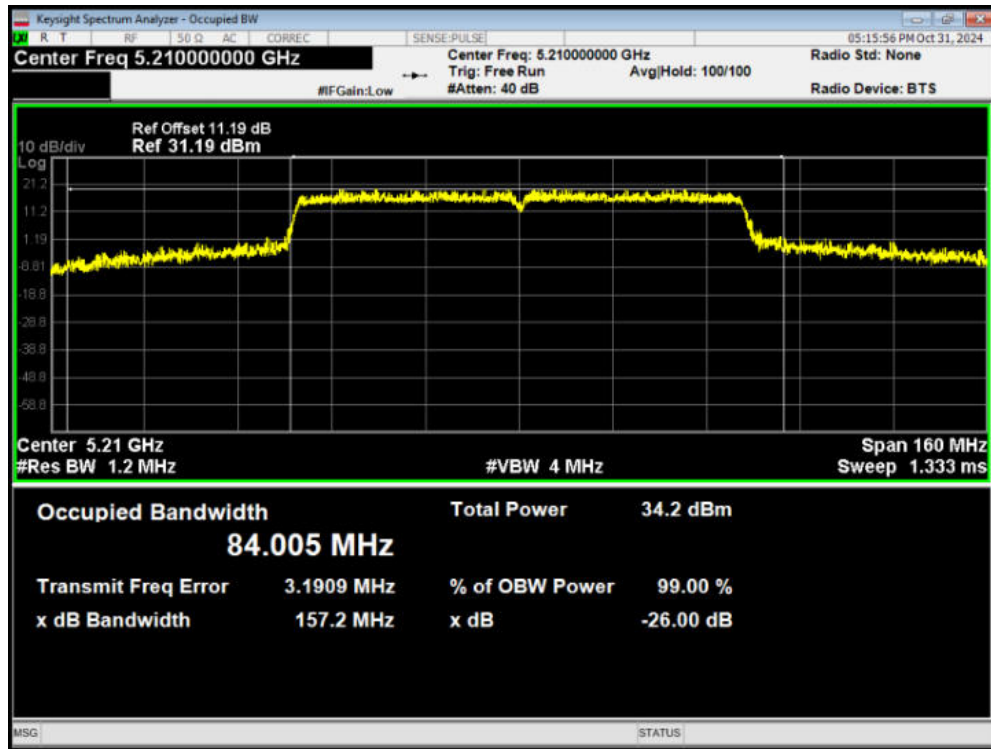


OBW 802.11ax(HE20) 5180MHz

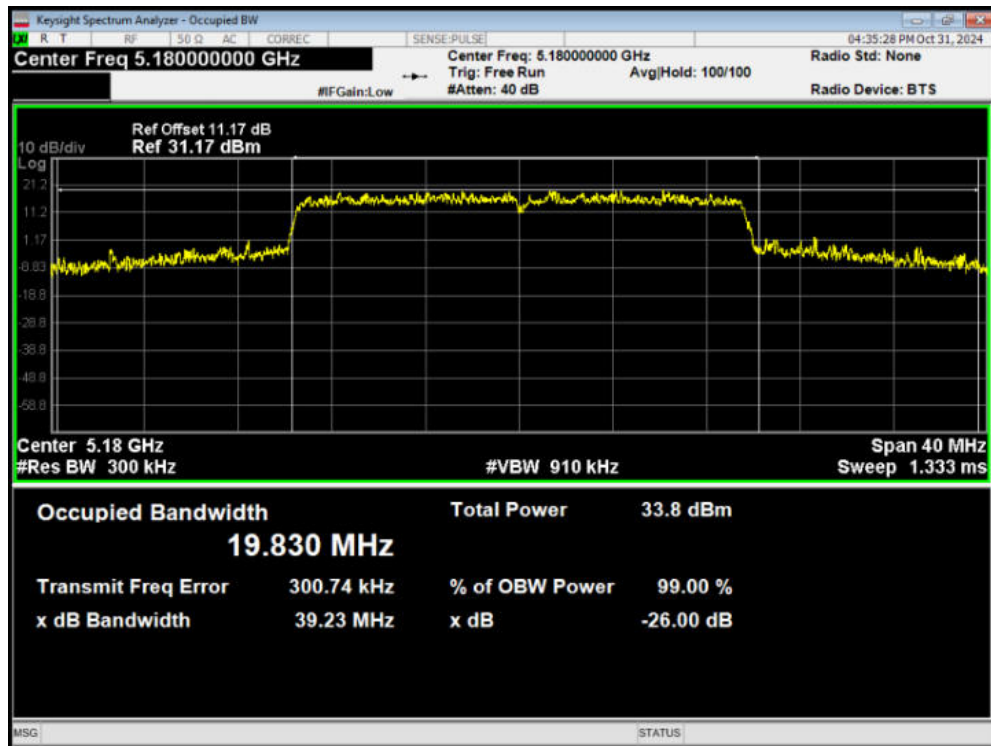


OBW 802.11ax(HE20) 5200MHz

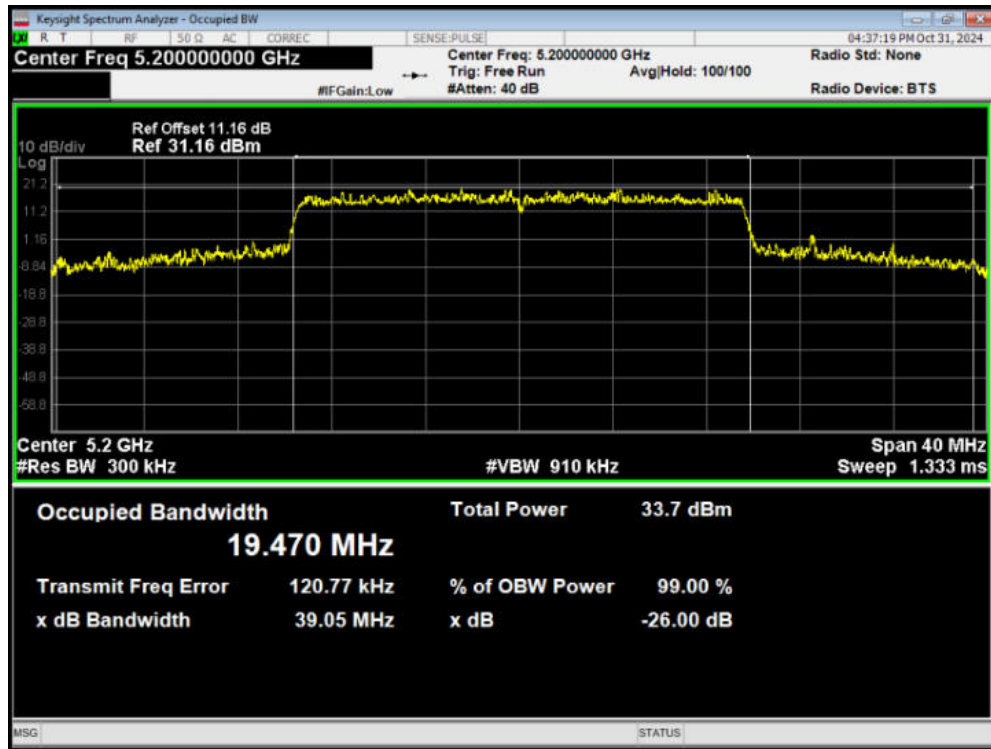


OBW 802.11ax(HE20) 5240MHz

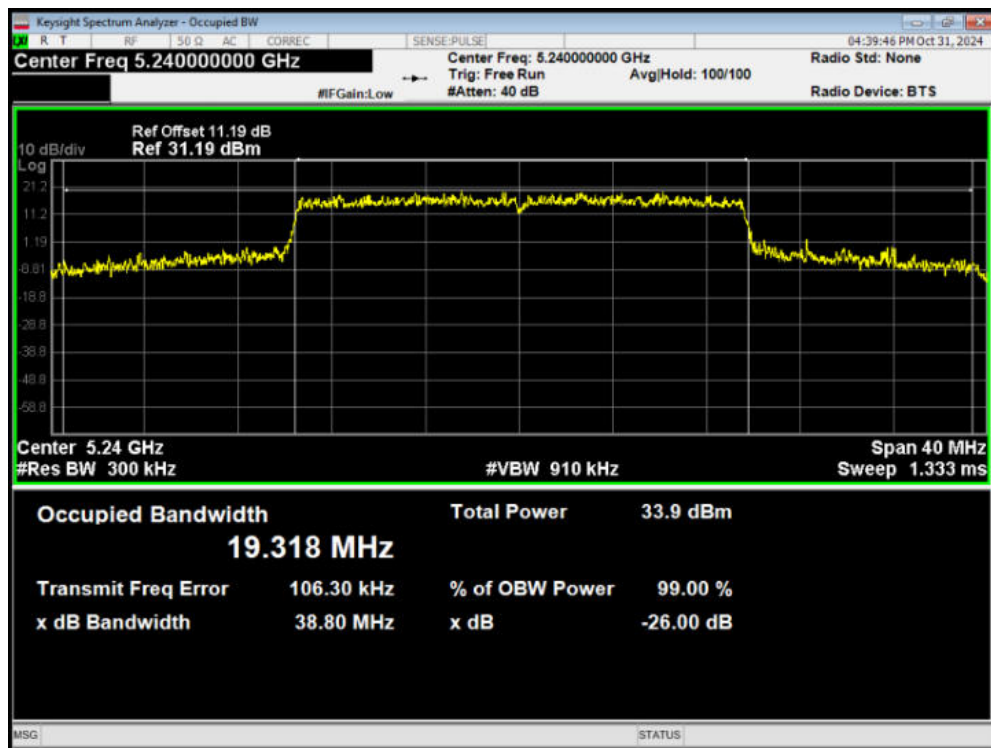


OBW 802.11ax(HE40) 5190MHz

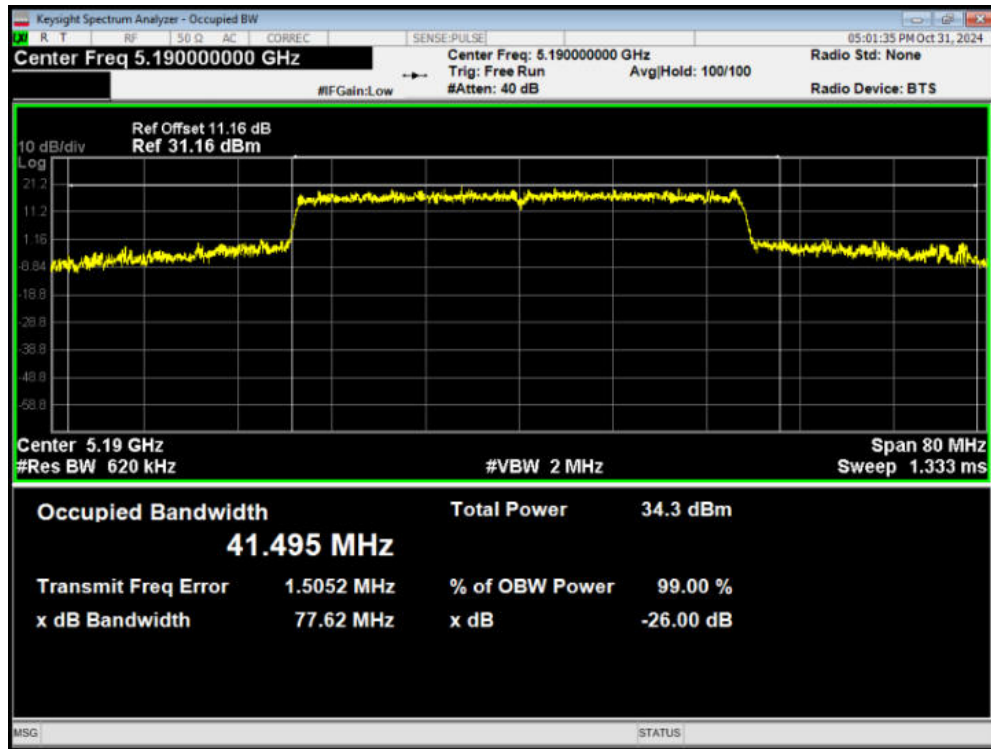


OBW 802.11ax(HE40) 5230MHz

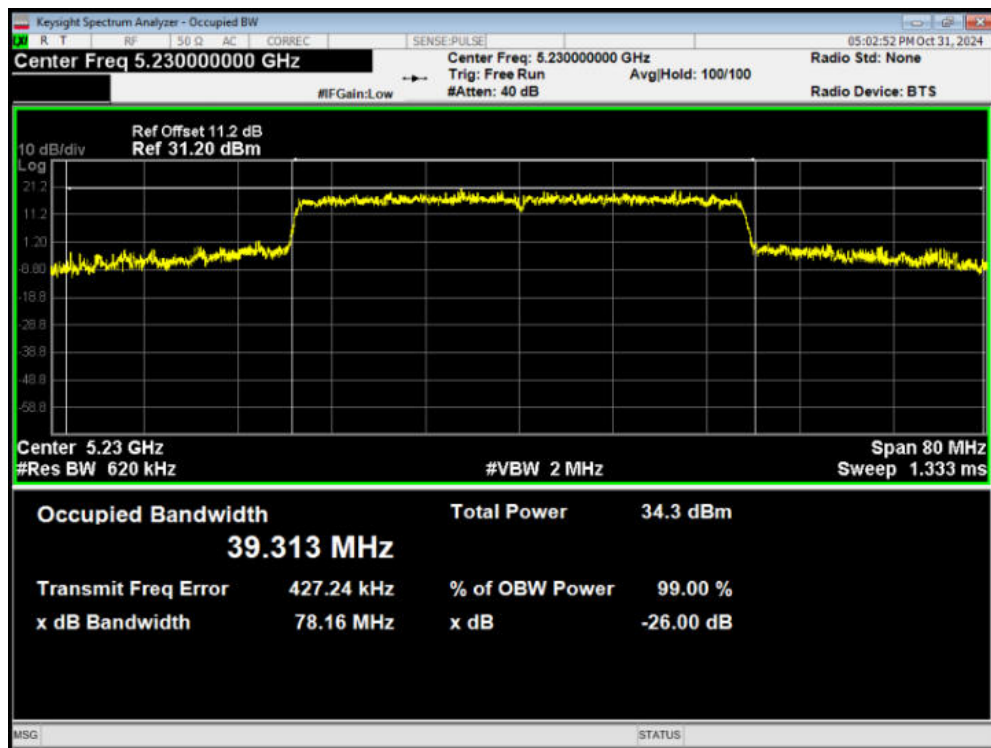


OBW 802.11ax(HE80) 5210MHz

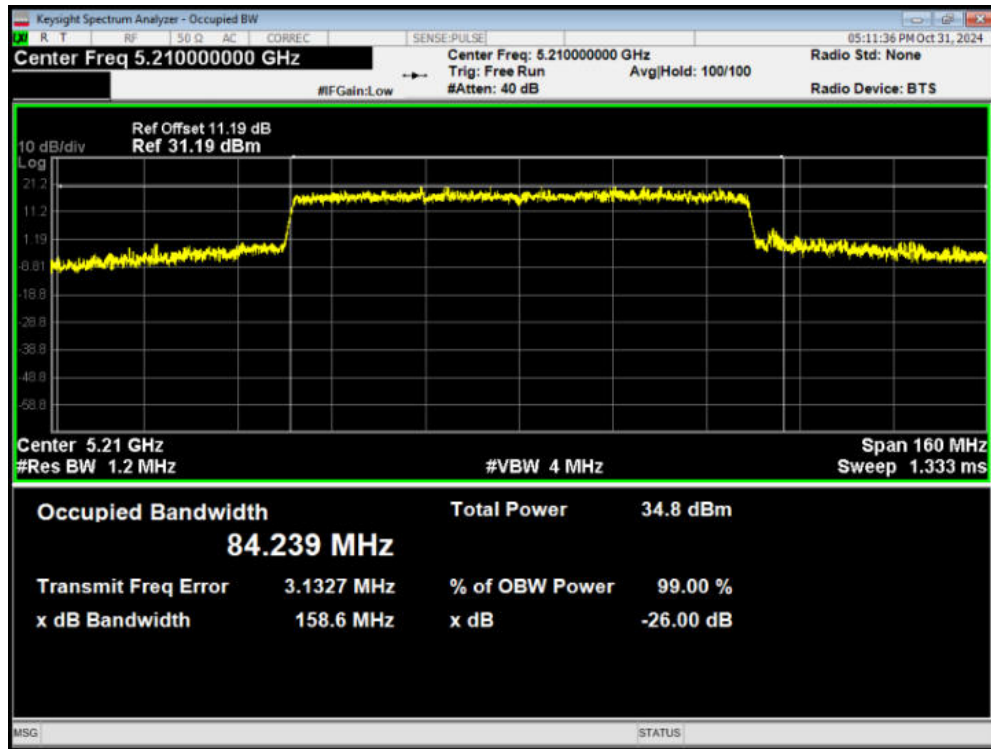


OBW 802.11n(HT20) 5180MHz

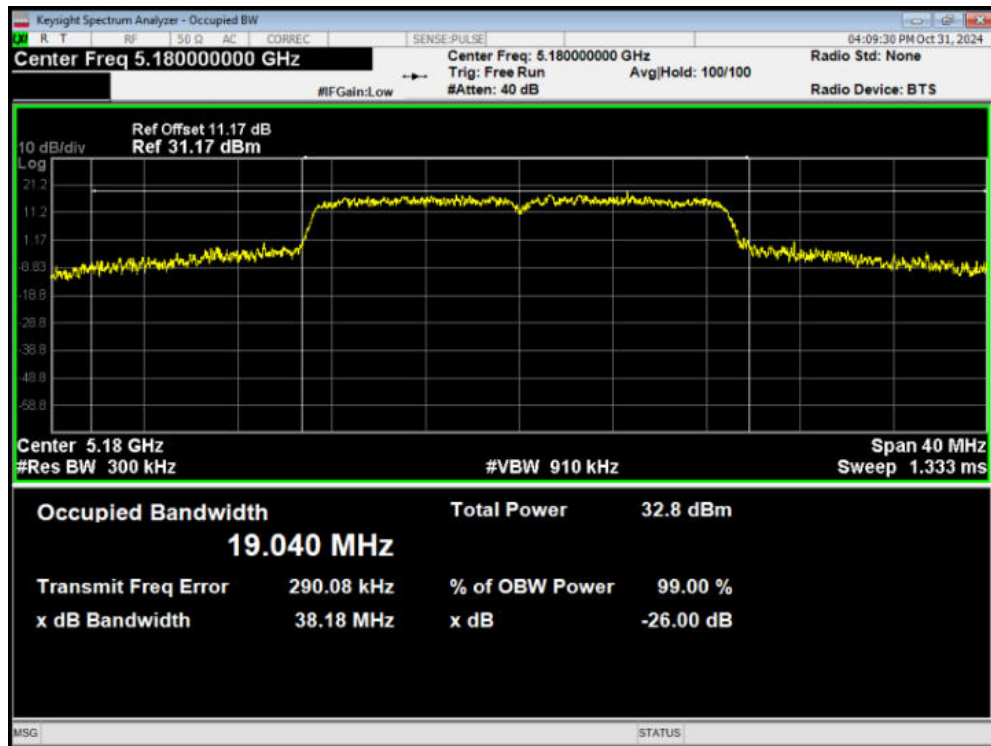


OBW 802.11n(HT20) 5200MHz

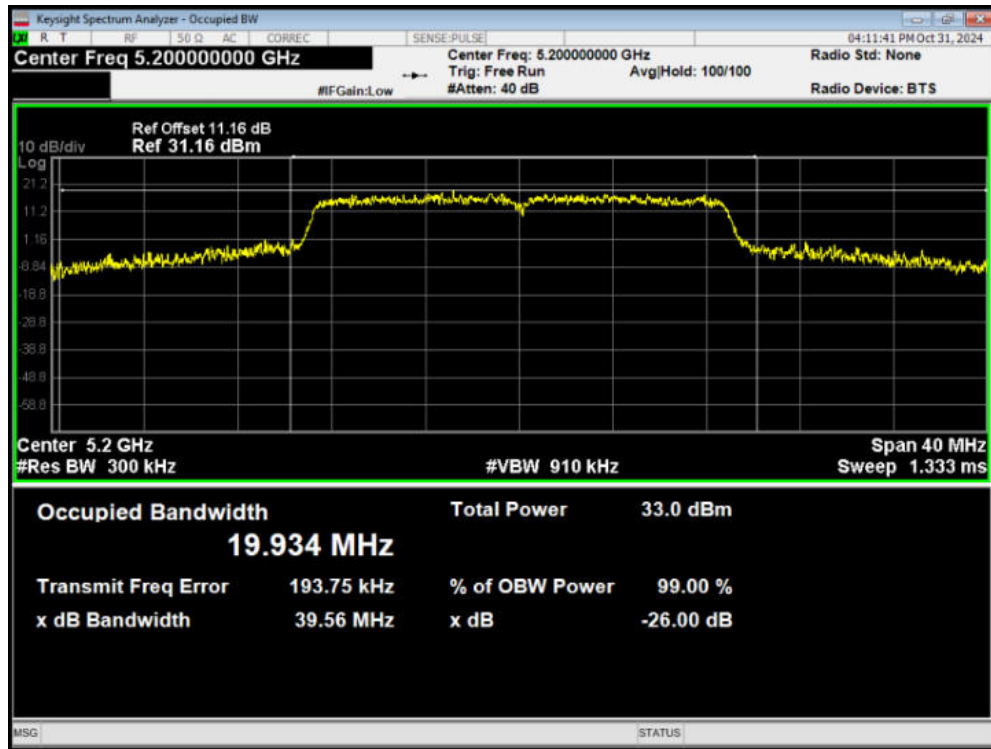


OBW 802.11n(HT20) 5240MHz

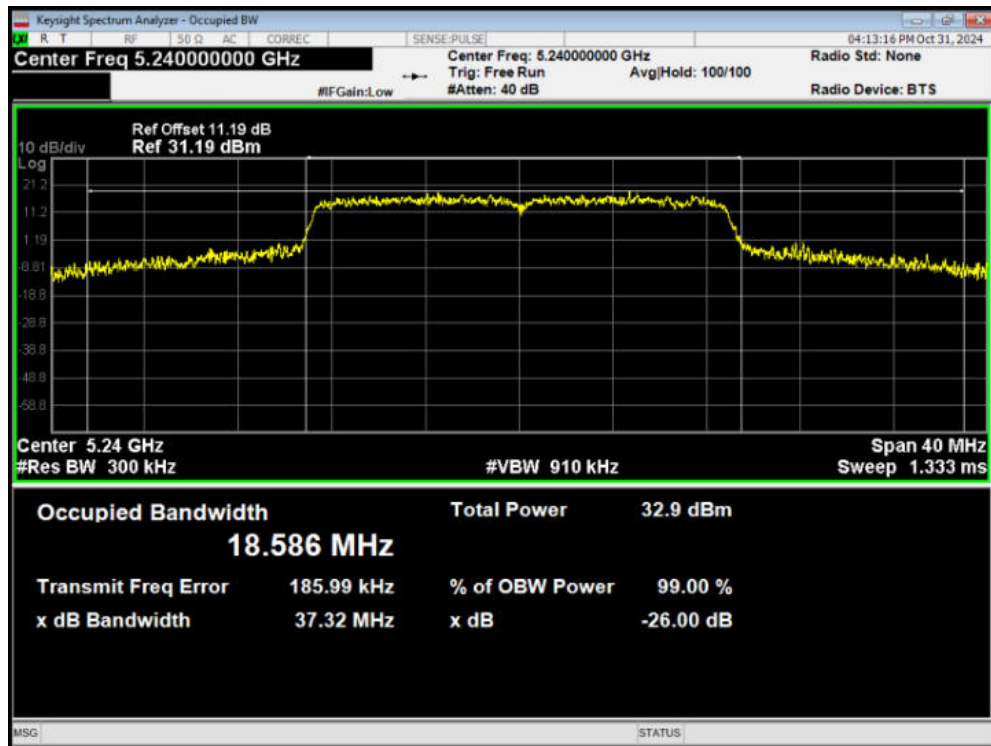


OBW 802.11n(HT40) 5190MHz

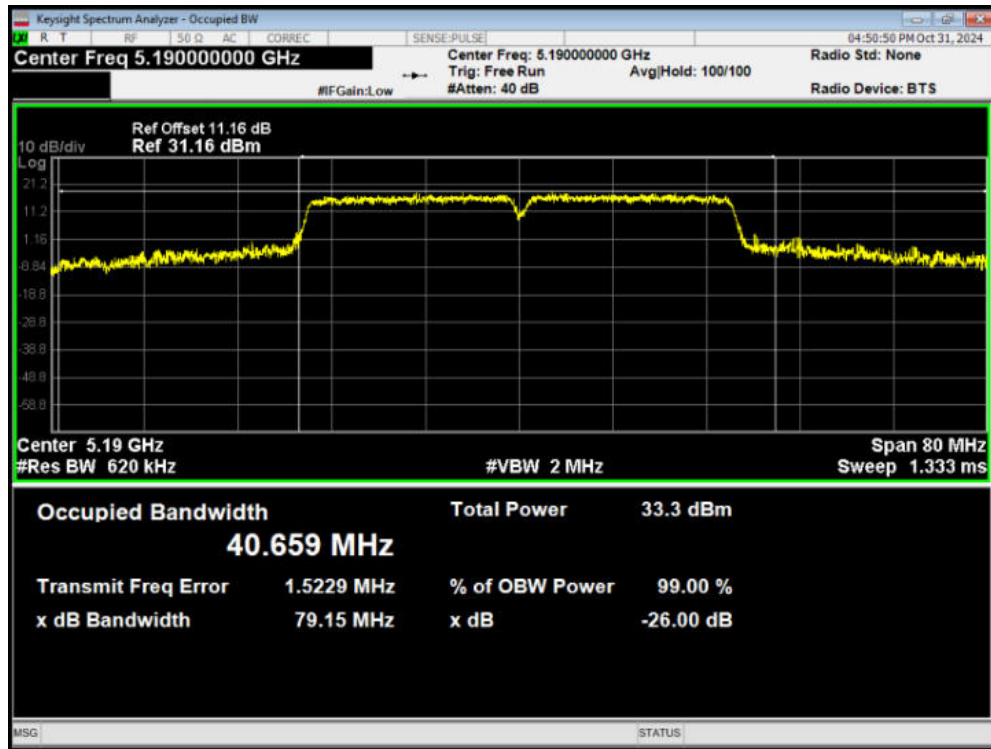


OBW 802.11n(HT40) 5230MHz

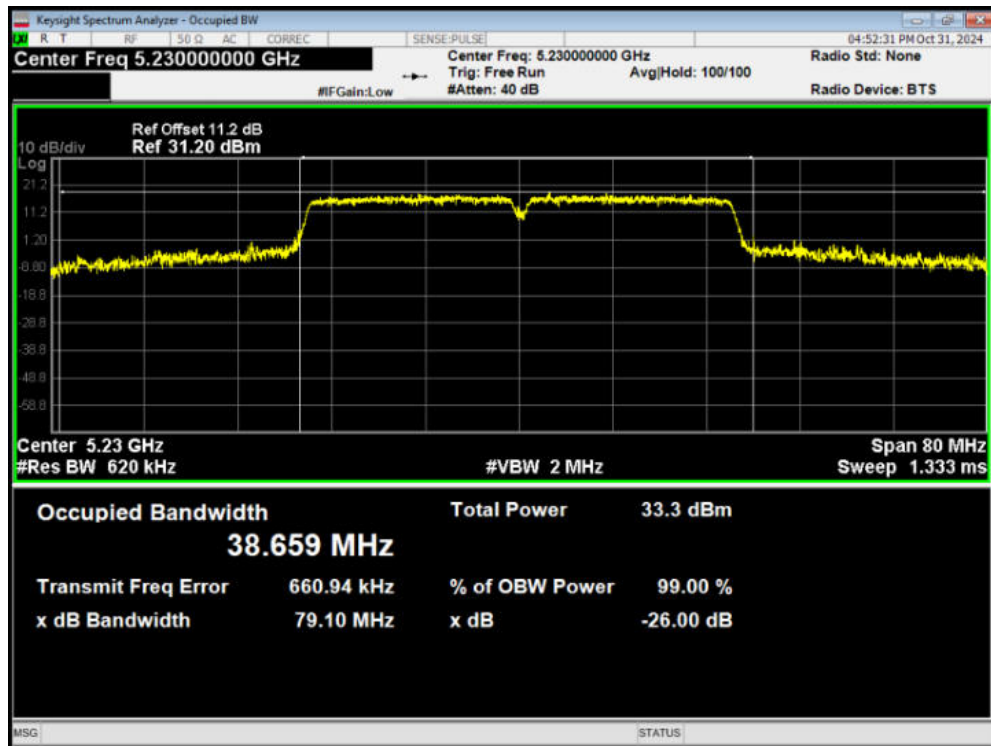


OBW 802.11a 5260MHz

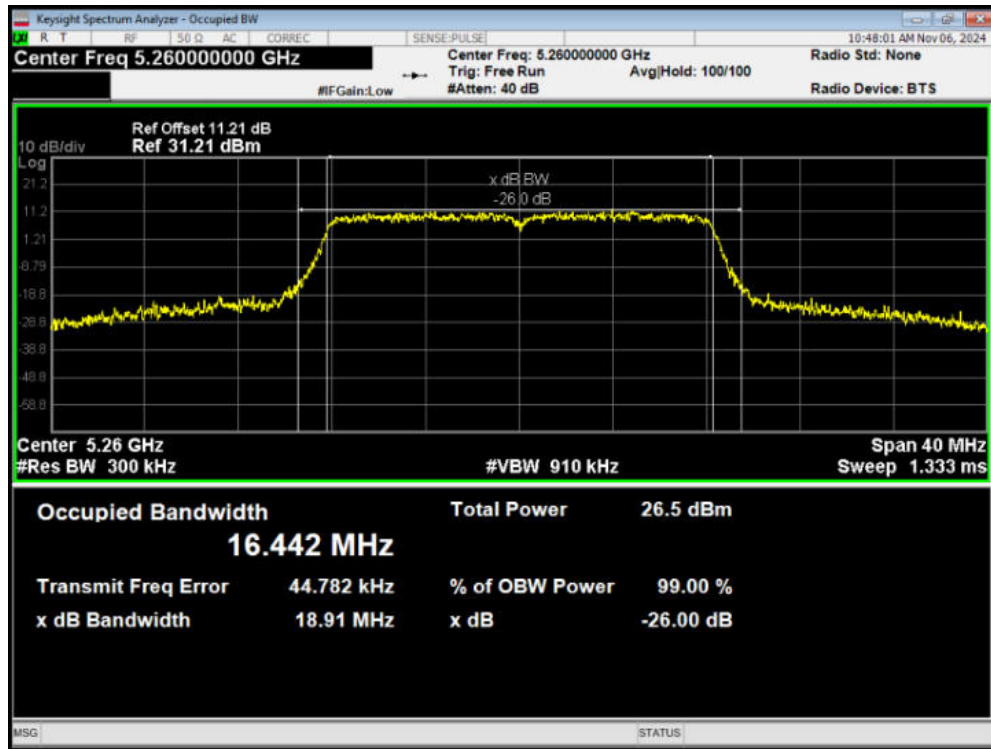


OBW 802.11a 5300MHz

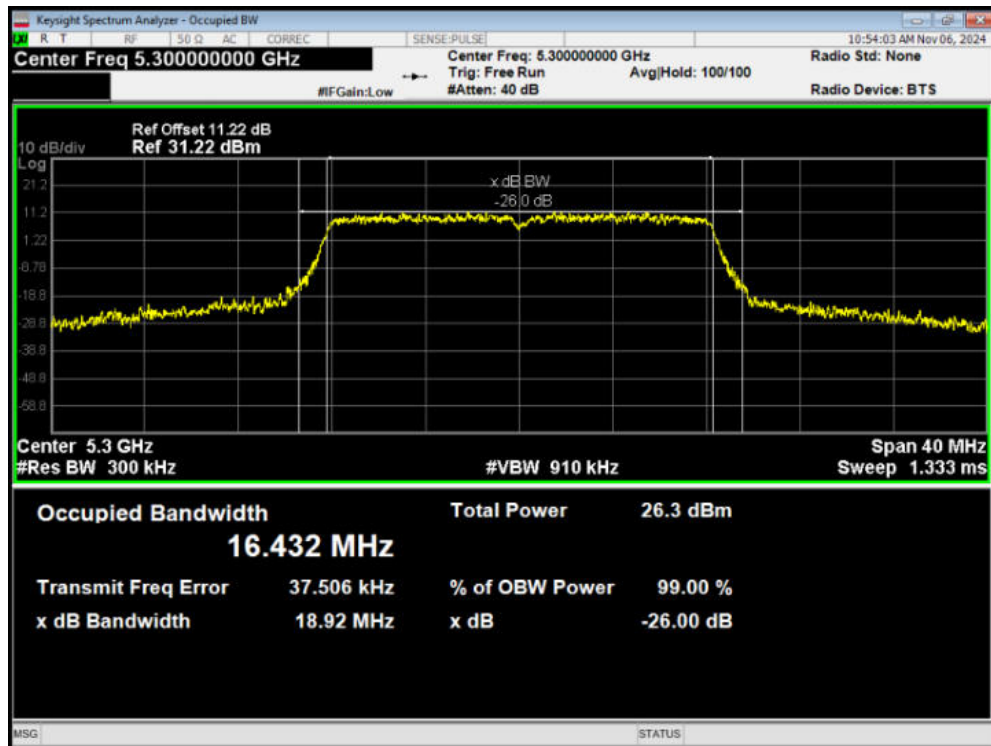


OBW 802.11a 5320MHz

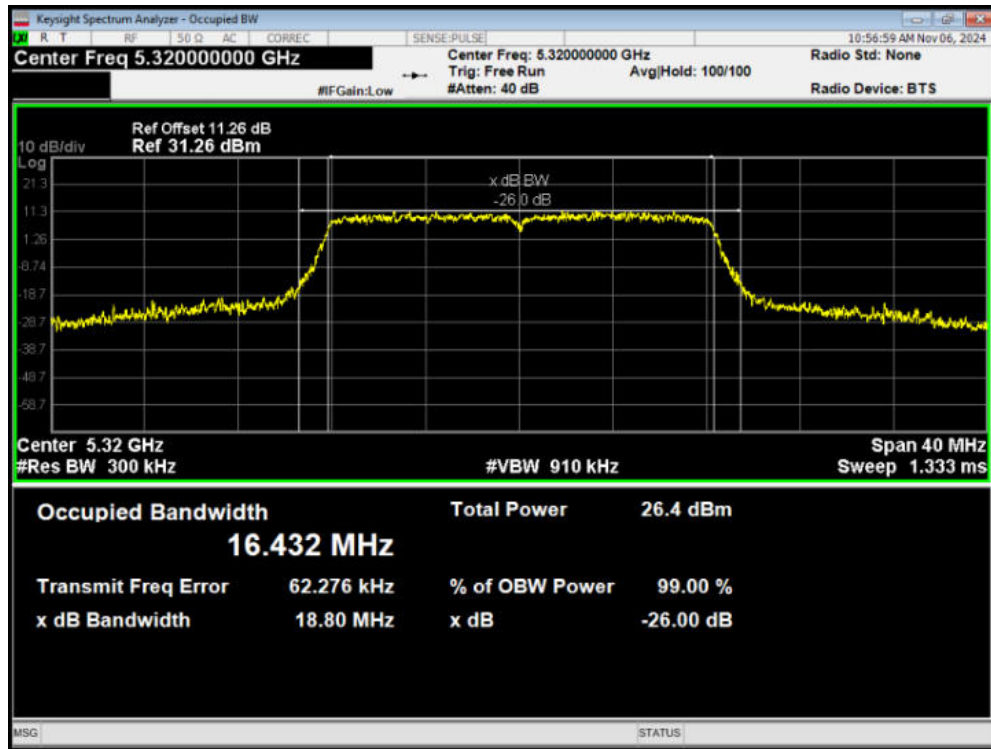


OBW 802.11ac(VHT160) 5250MHz

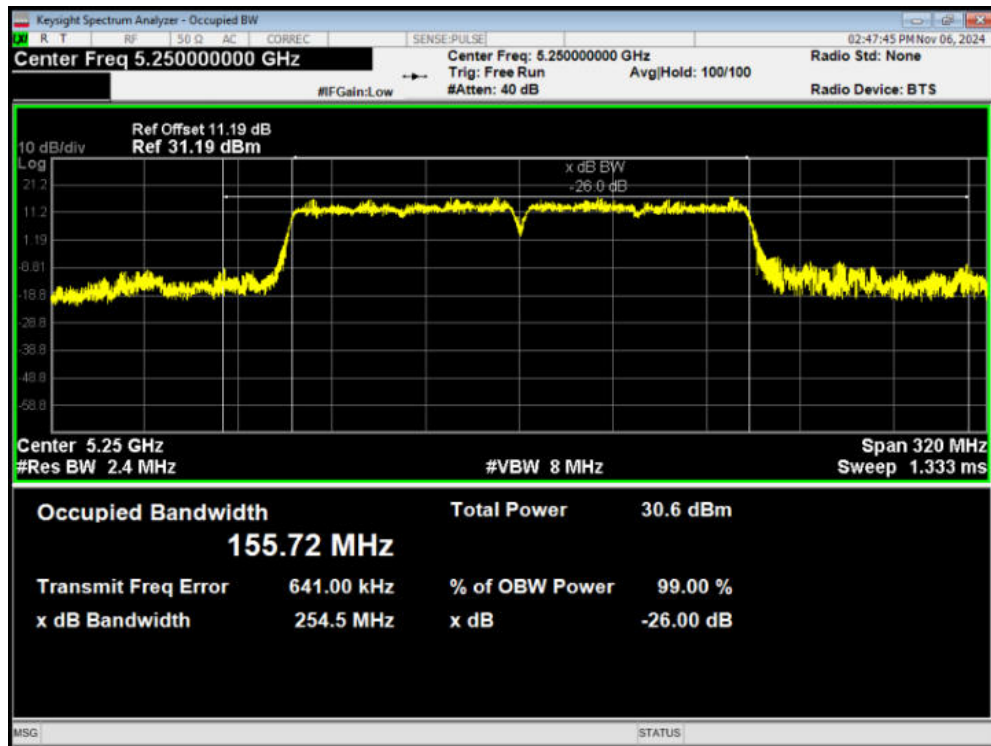


OBW 802.11ac(VHT20) 5260MHz

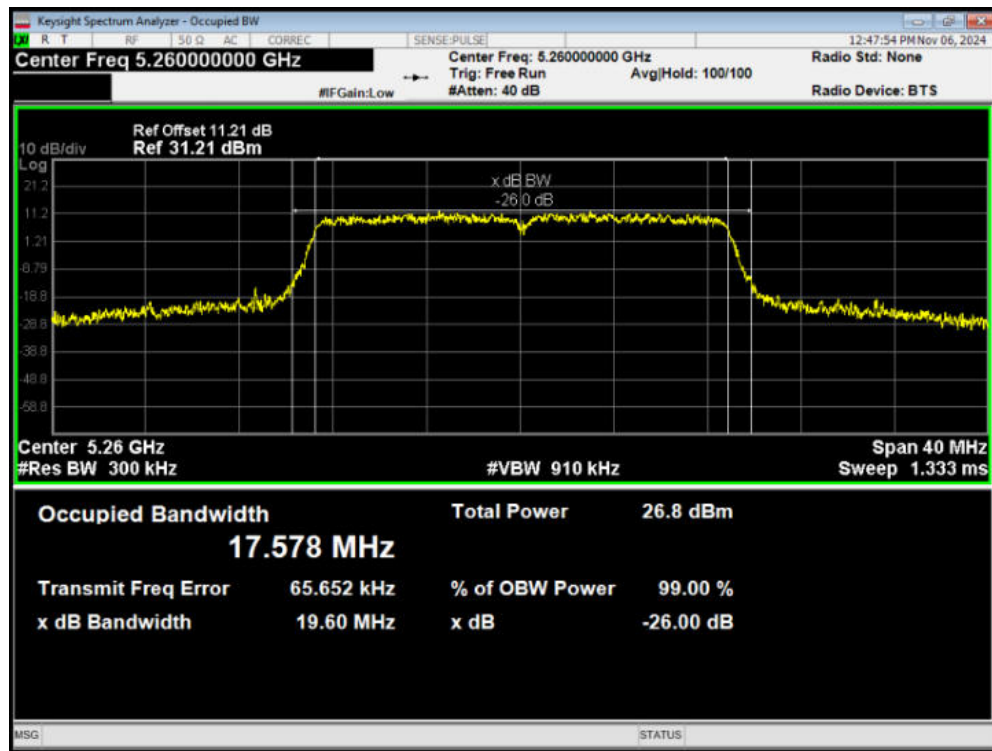


OBW 802.11ac(VHT20) 5300MHz

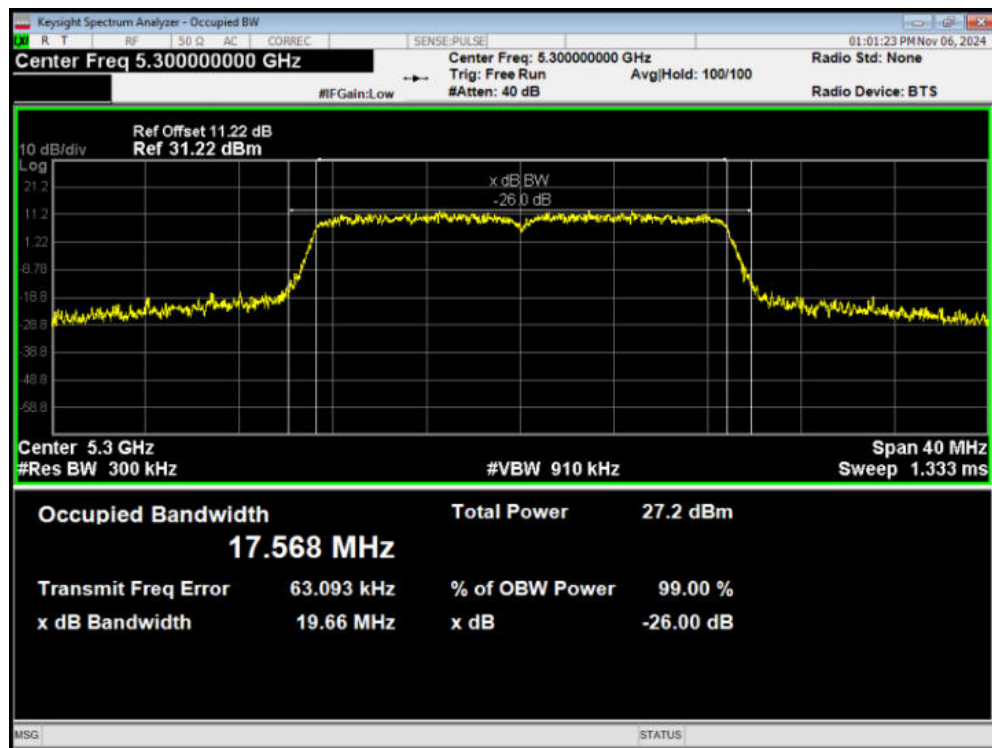


OBW 802.11ac(VHT20) 5320MHz

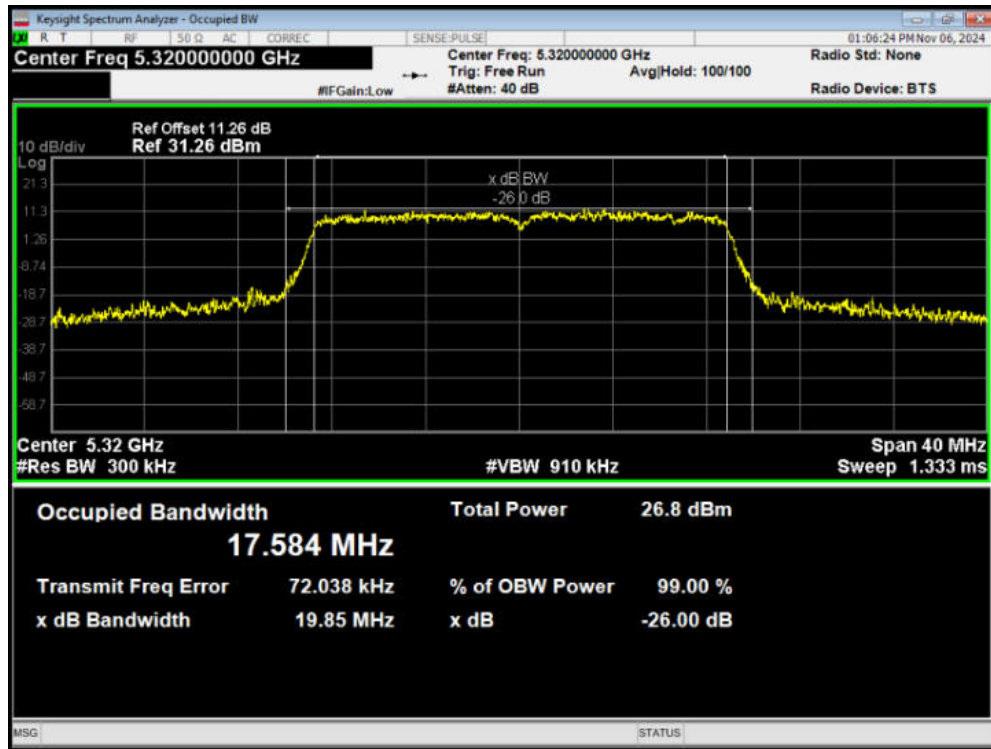


OBW 802.11ac(VHT40) 5270MHz

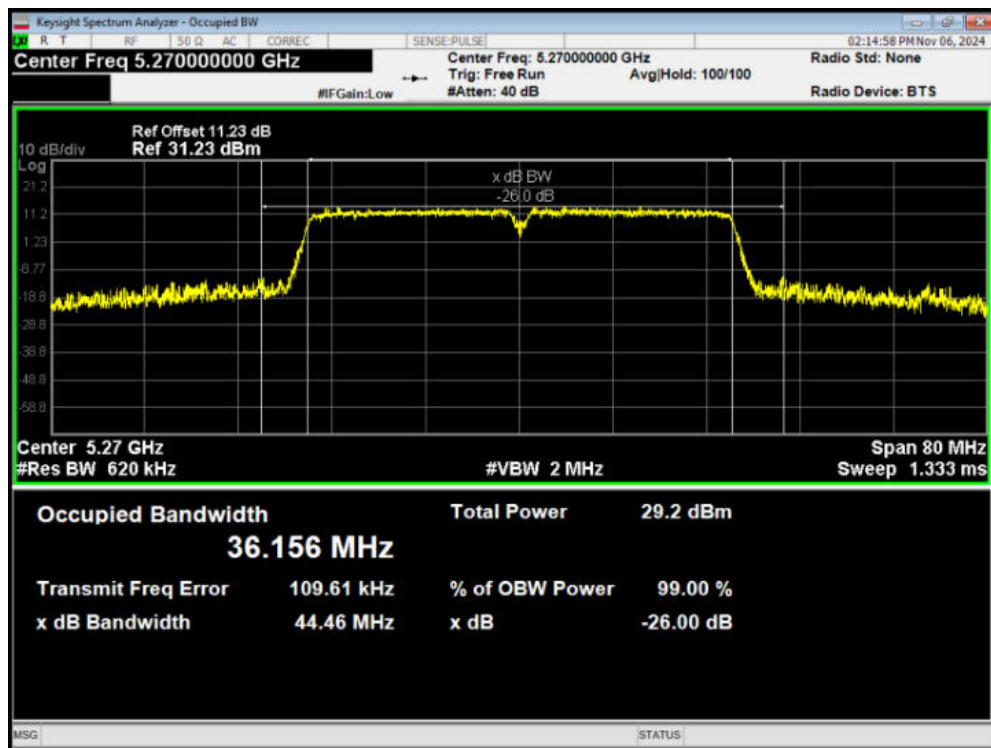


OBW 802.11ac(VHT40) 5310MHz

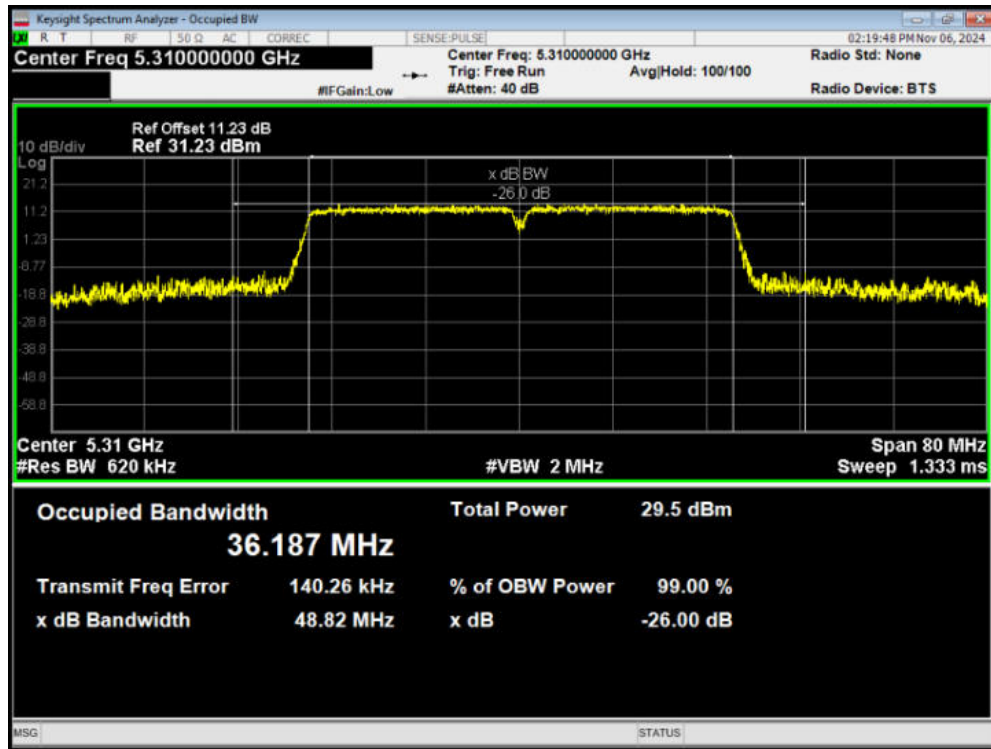


OBW 802.11ac(VHT80) 5290MHz

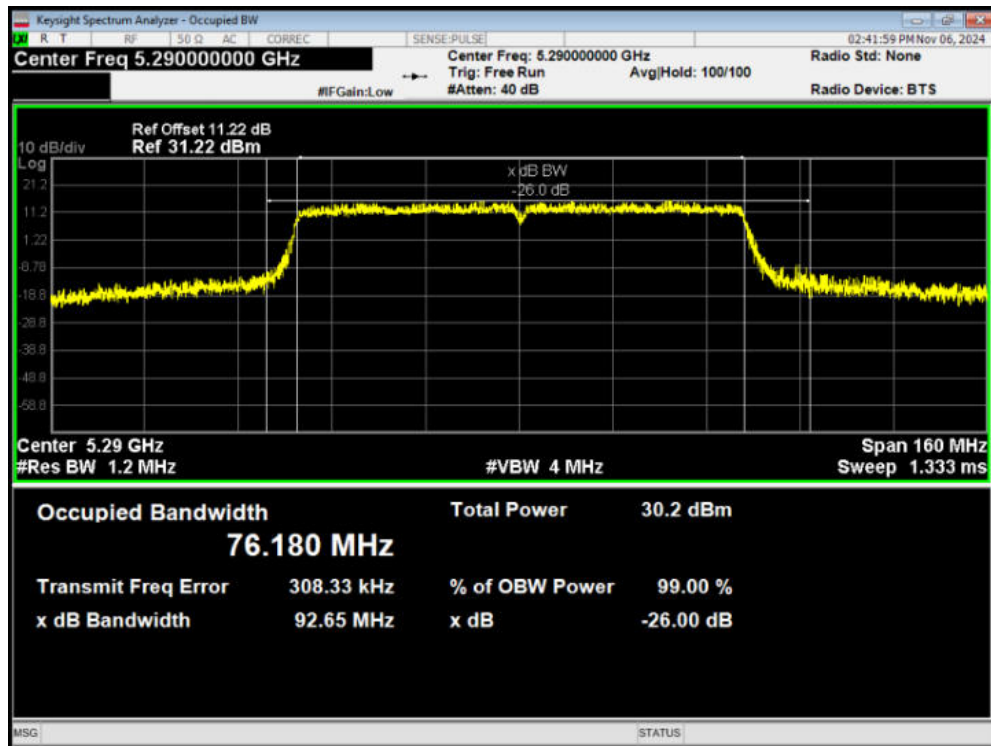


OBW 802.11ax(HE160) 5250MHz

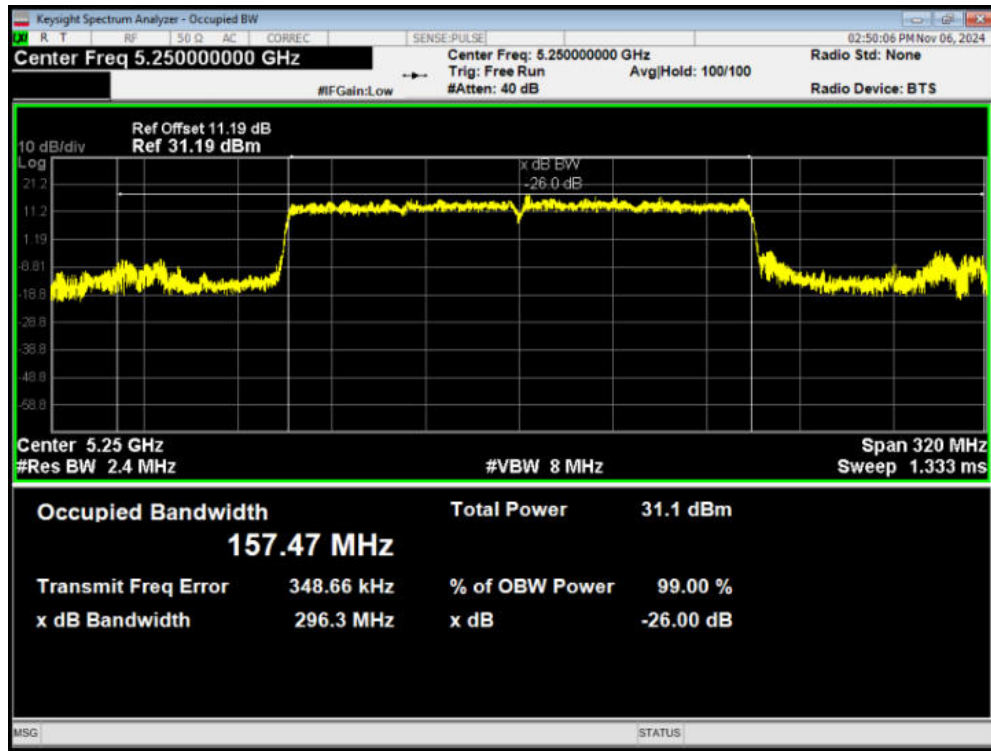


OBW 802.11ax(HE20) 5260MHz

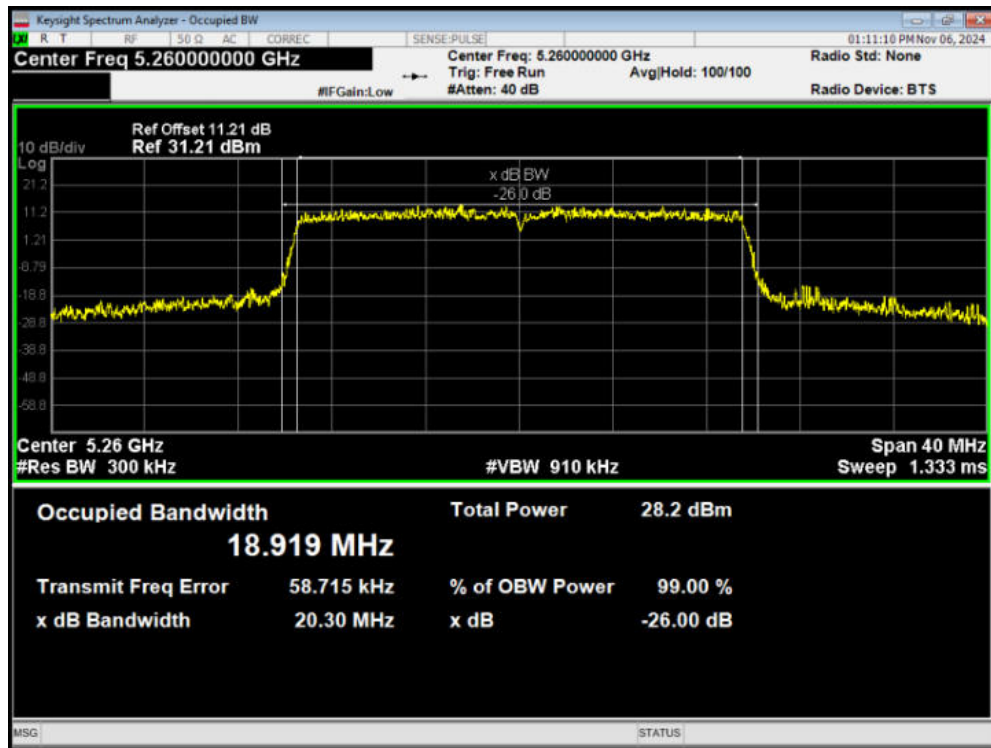


OBW 802.11ax(HE20) 5300MHz

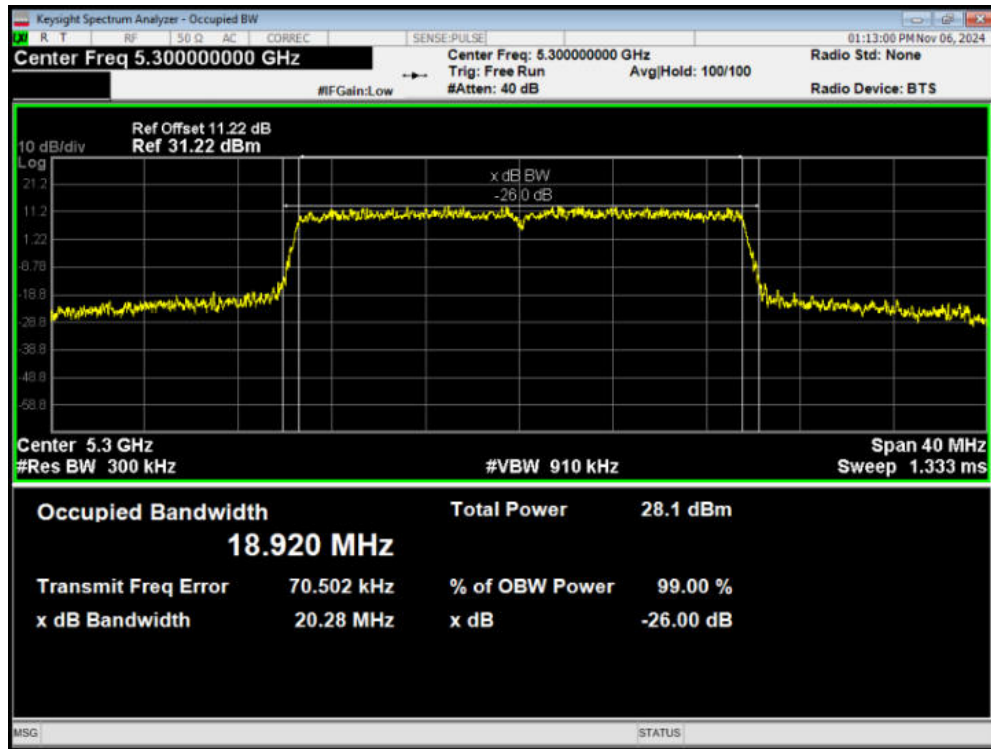


OBW 802.11ax(HE20) 5320MHz

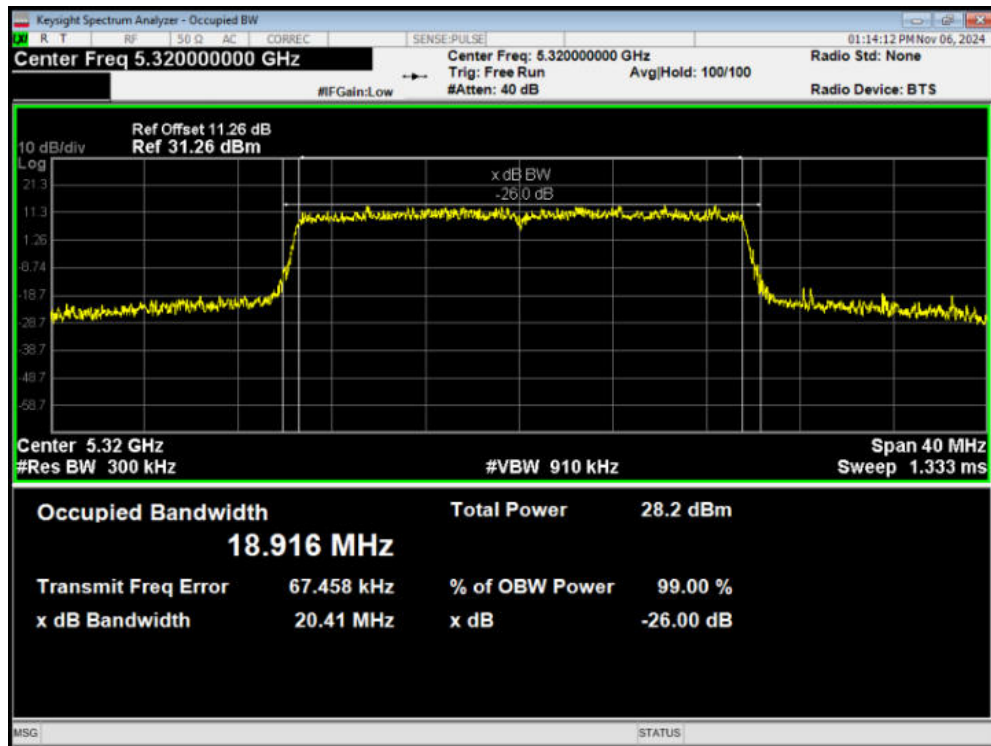


OBW 802.11ax(HE40) 5270MHz

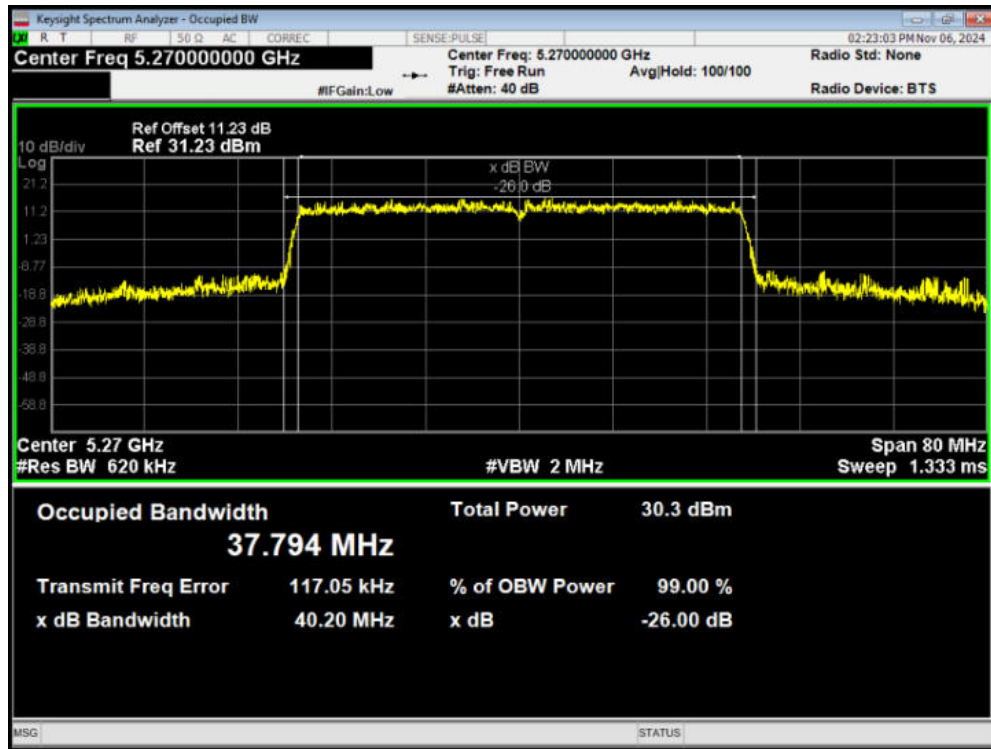


OBW 802.11ax(HE40) 5310MHz

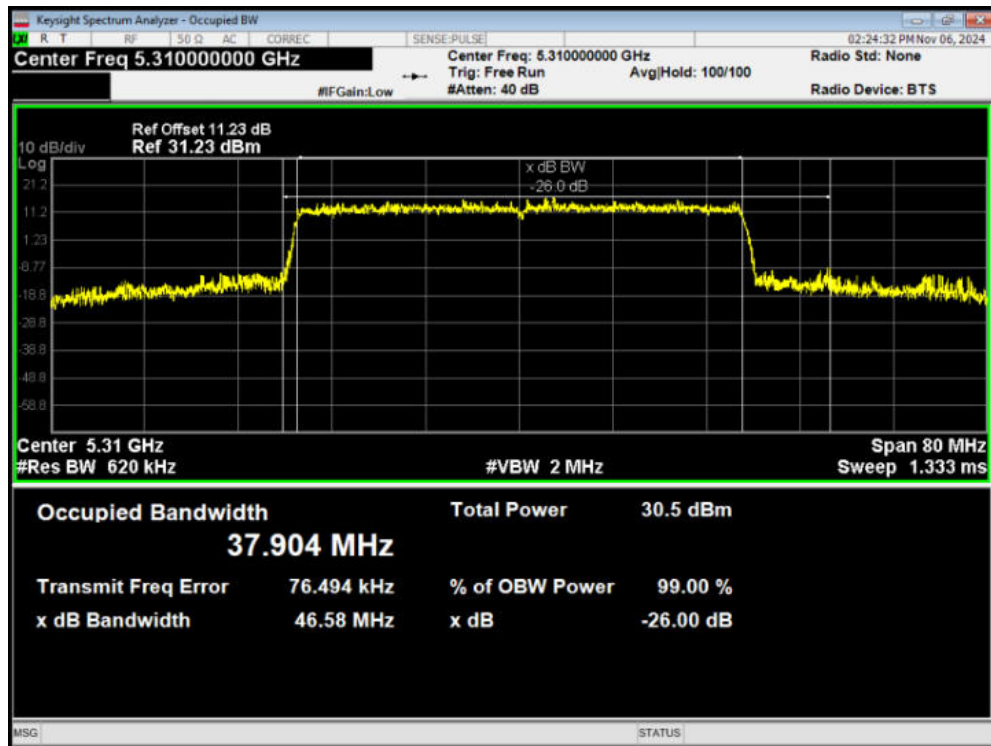


OBW 802.11ax(HE80) 5290MHz

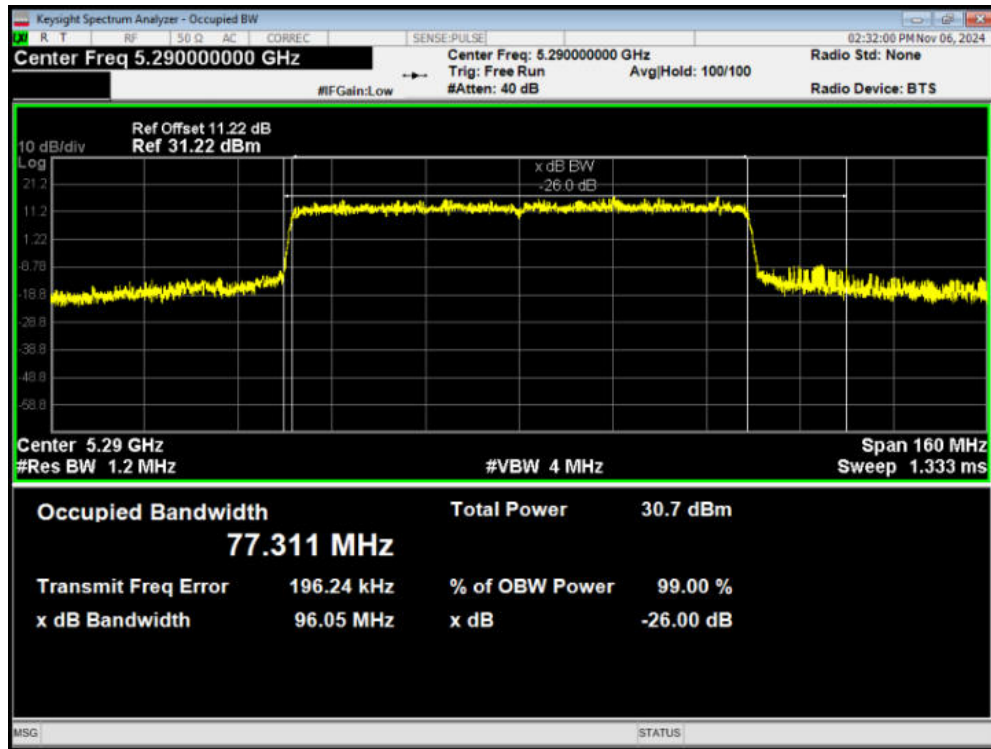


OBW 802.11n(HT20) 5260MHz

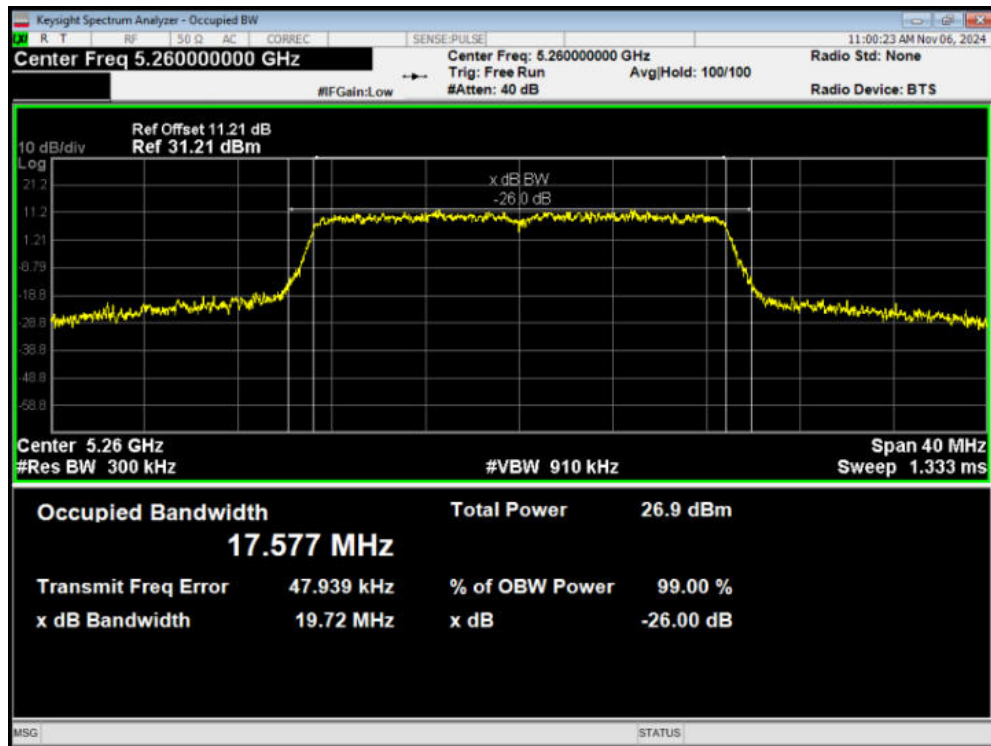


OBW 802.11n(HT20) 5300MHz

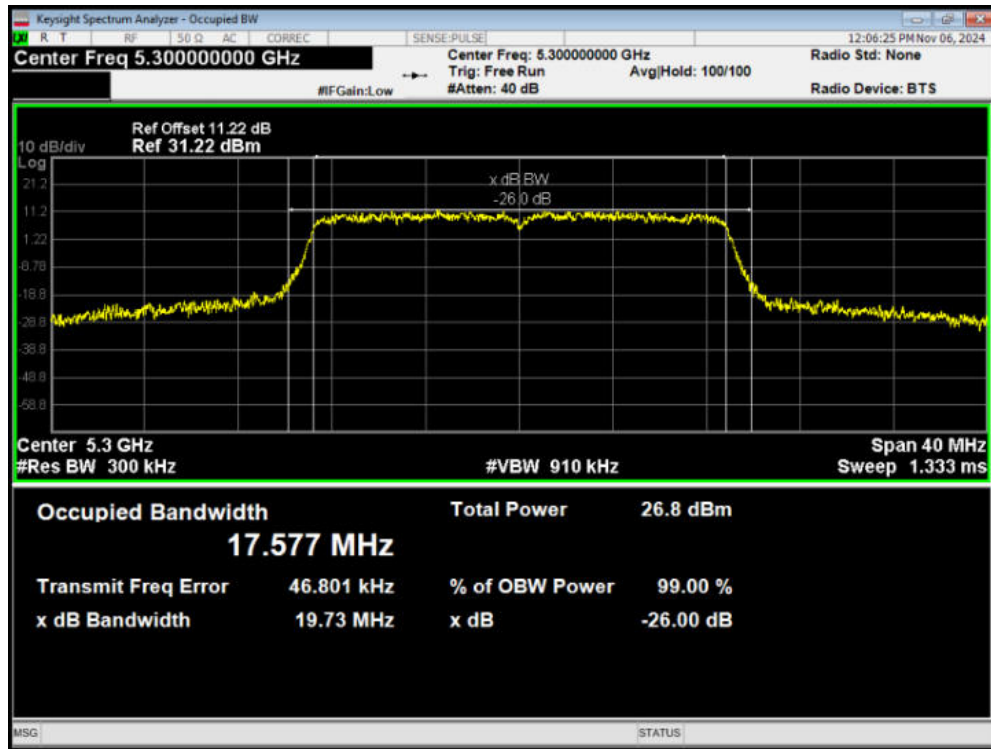


OBW 802.11n(HT20) 5320MHz

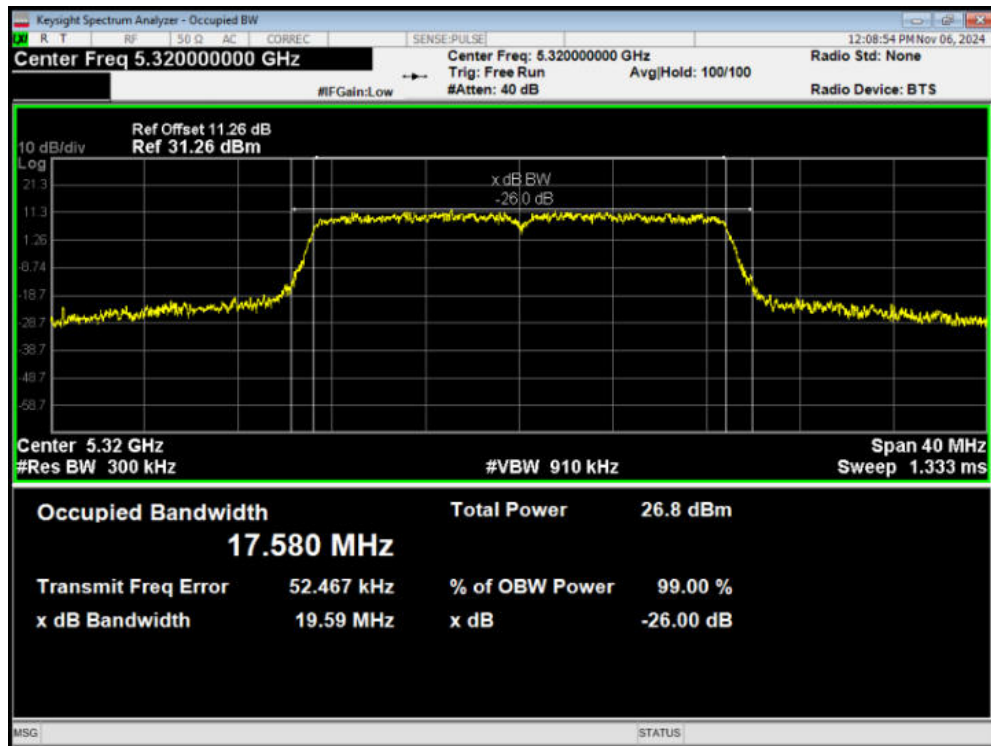


OBW 802.11n(HT40) 5270MHz

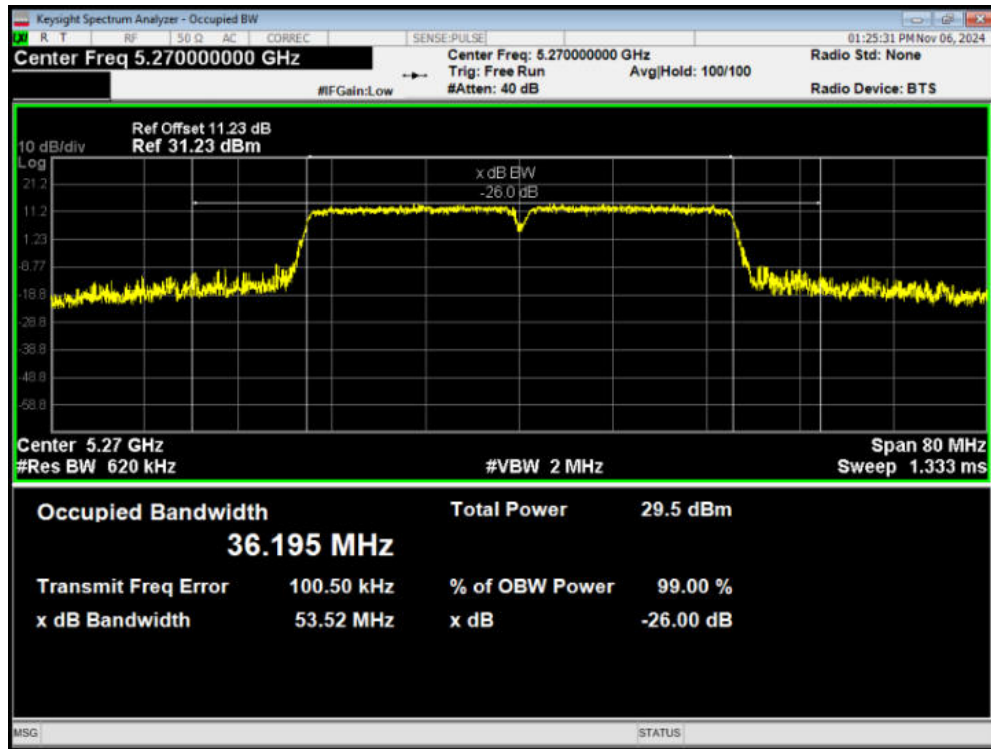


OBW 802.11n(HT40) 5310MHz

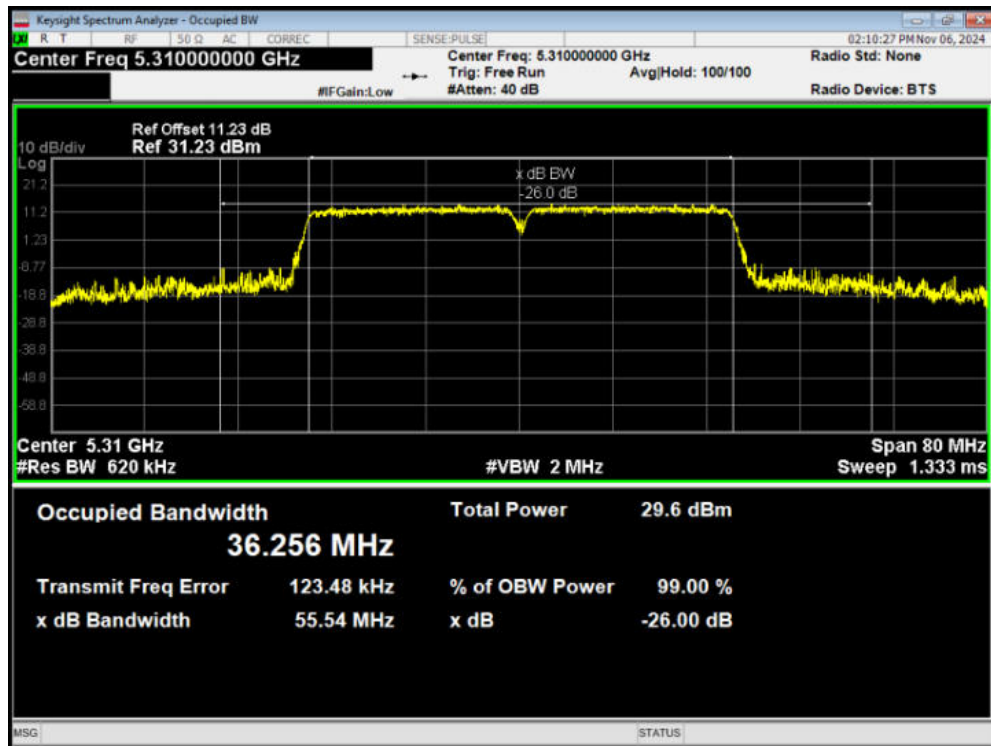


OBW 802.11a 5500MHz

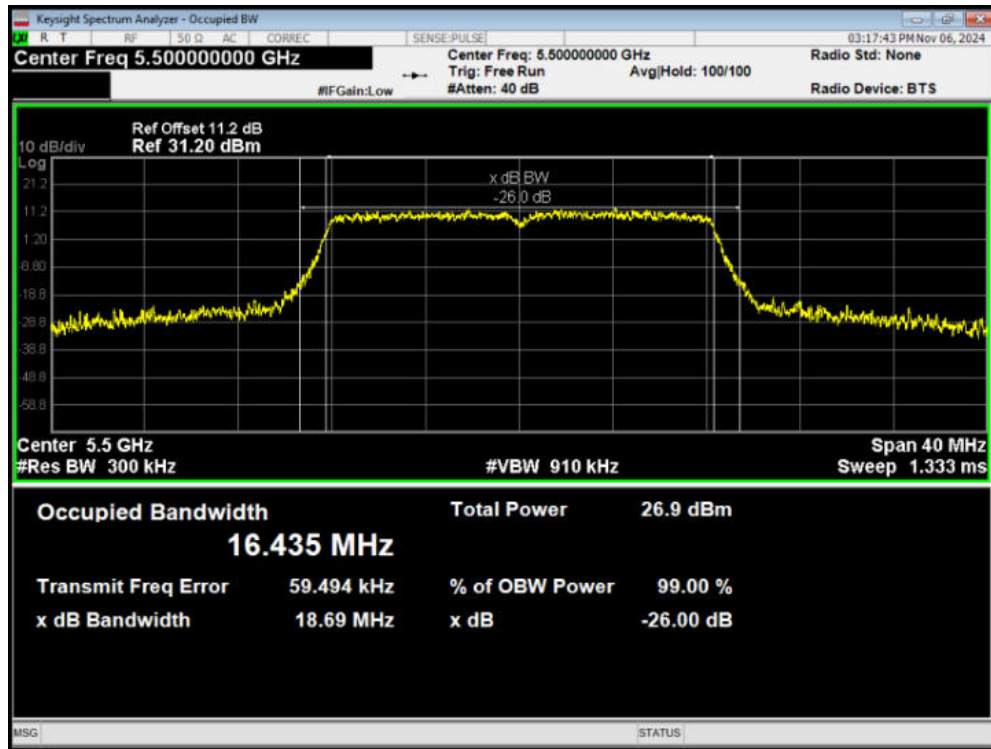


OBW 802.11a 5600MHz

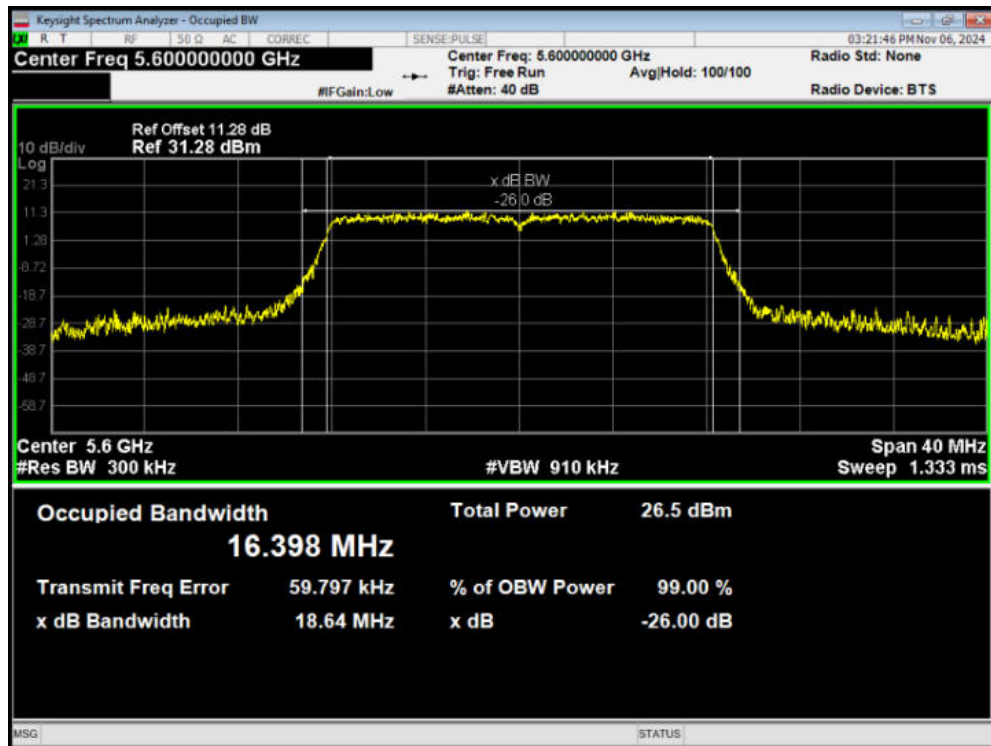


OBW 802.11a 5700MHz

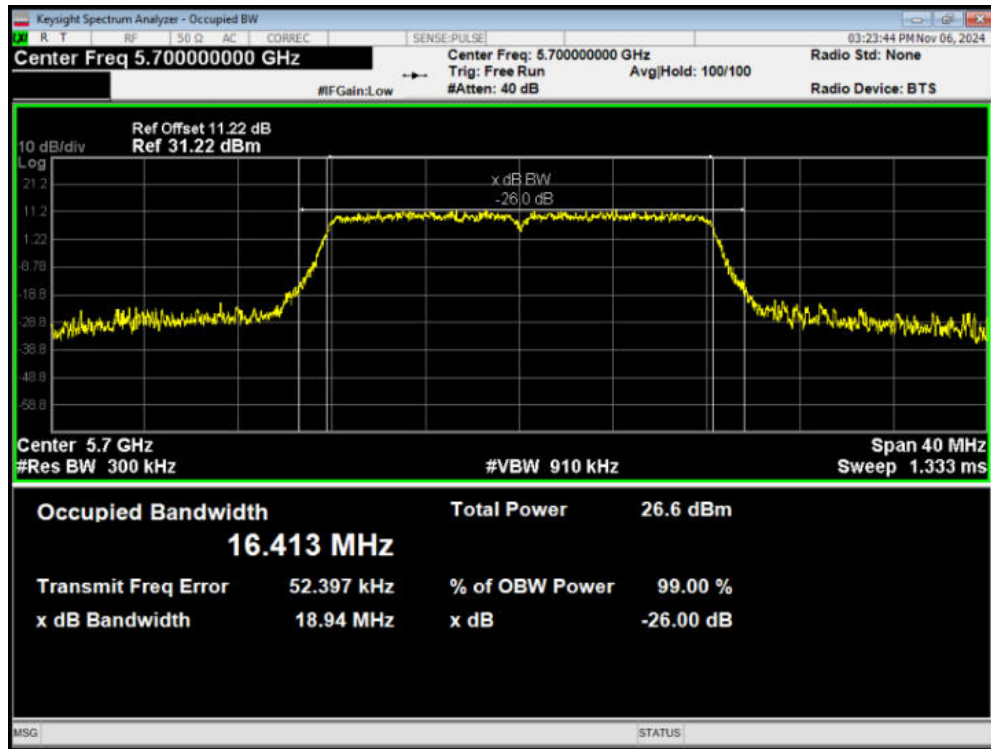


OBW 802.11a 5720MHz

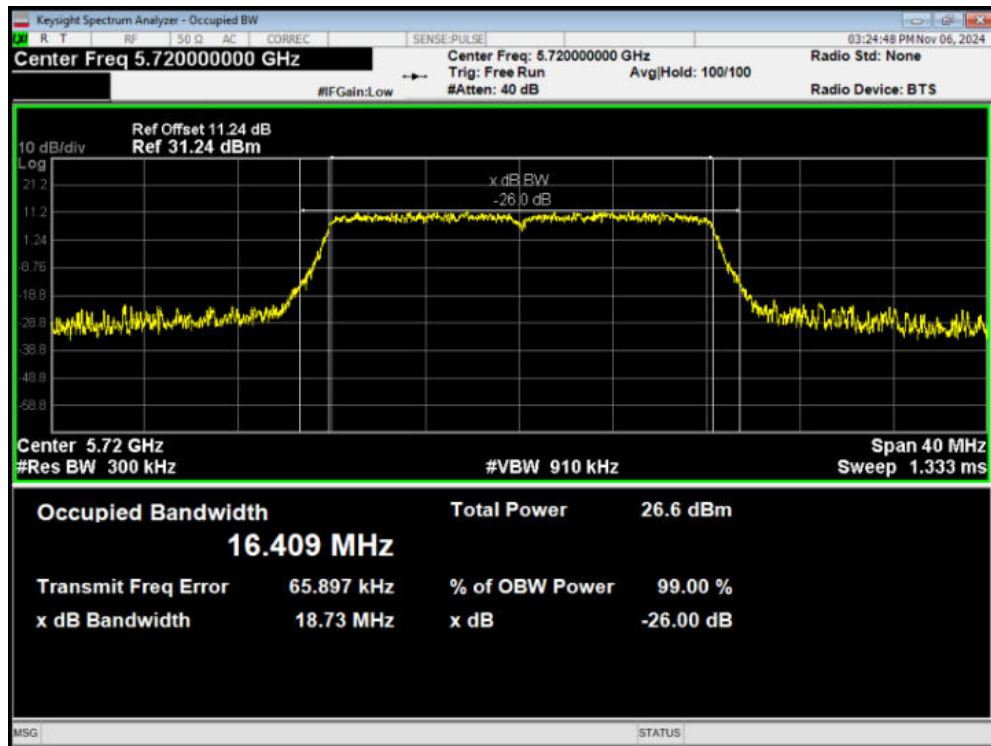


OBW 802.11ac(VHT160) 5570MHz

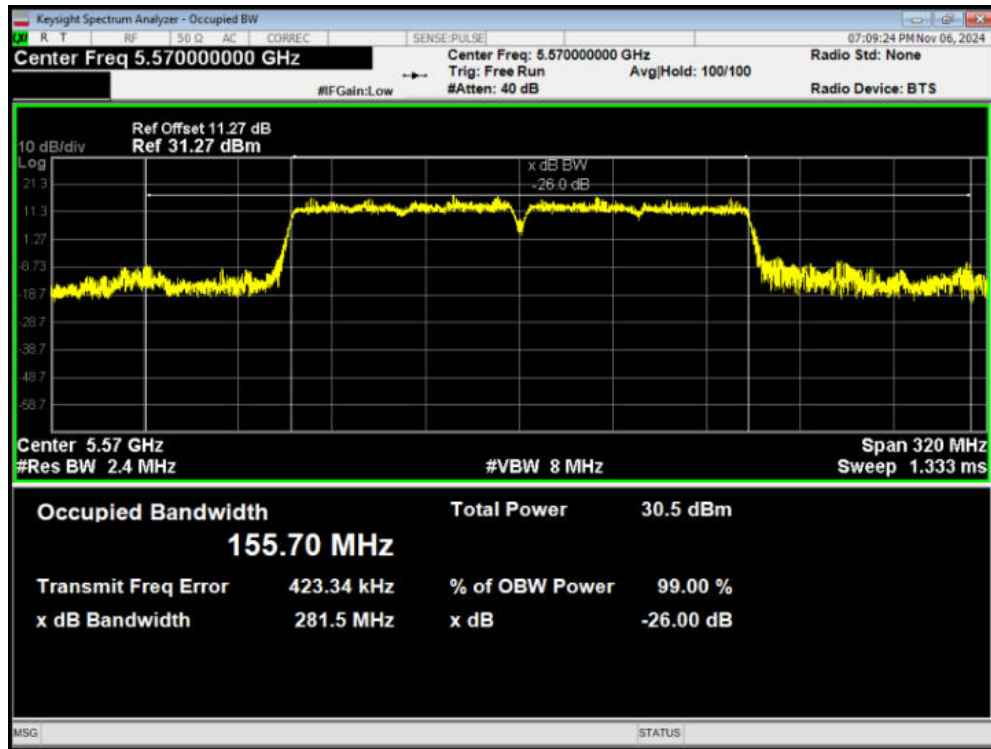


OBW 802.11ac(VHT20) 5500MHz

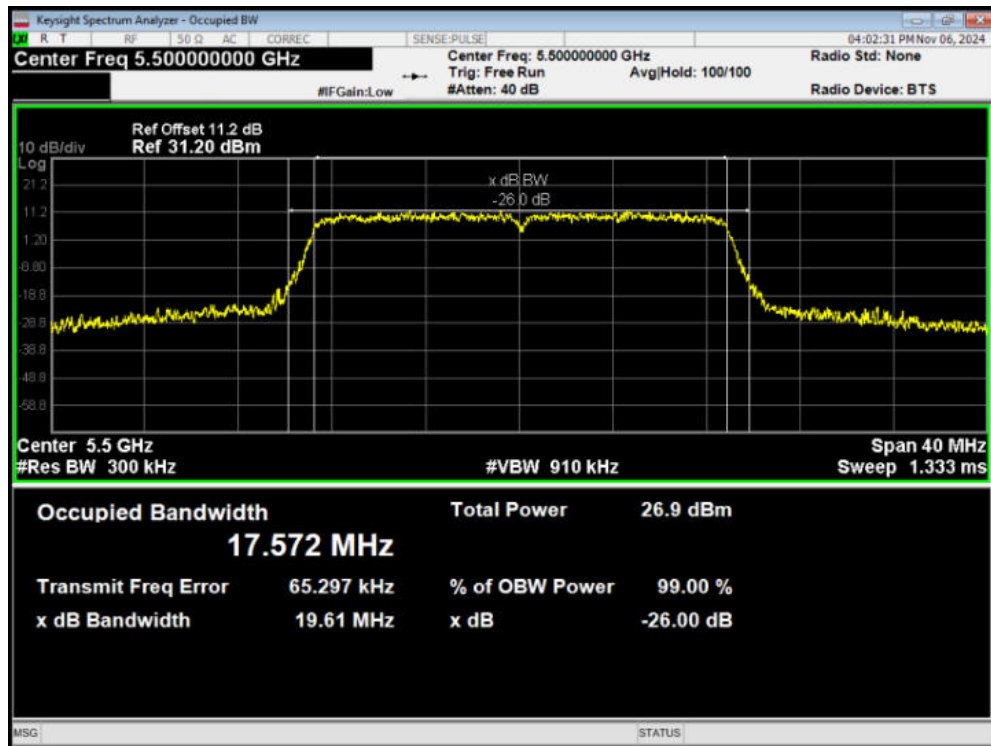


OBW 802.11ac(VHT20) 5600MHz

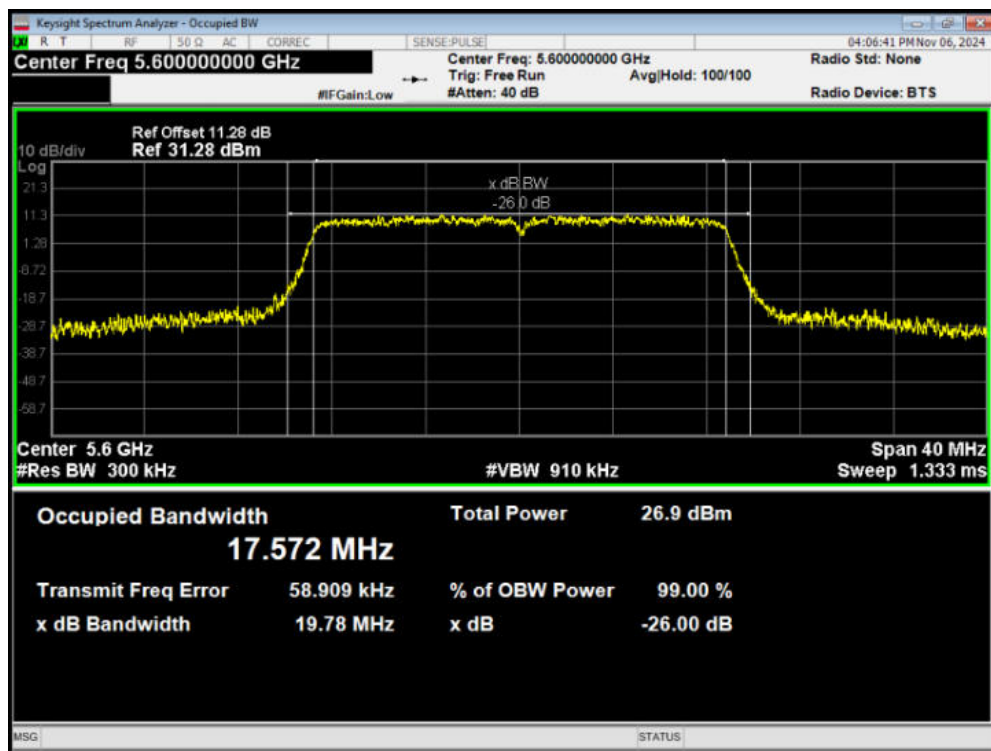


OBW 802.11ac(VHT20) 5700MHz

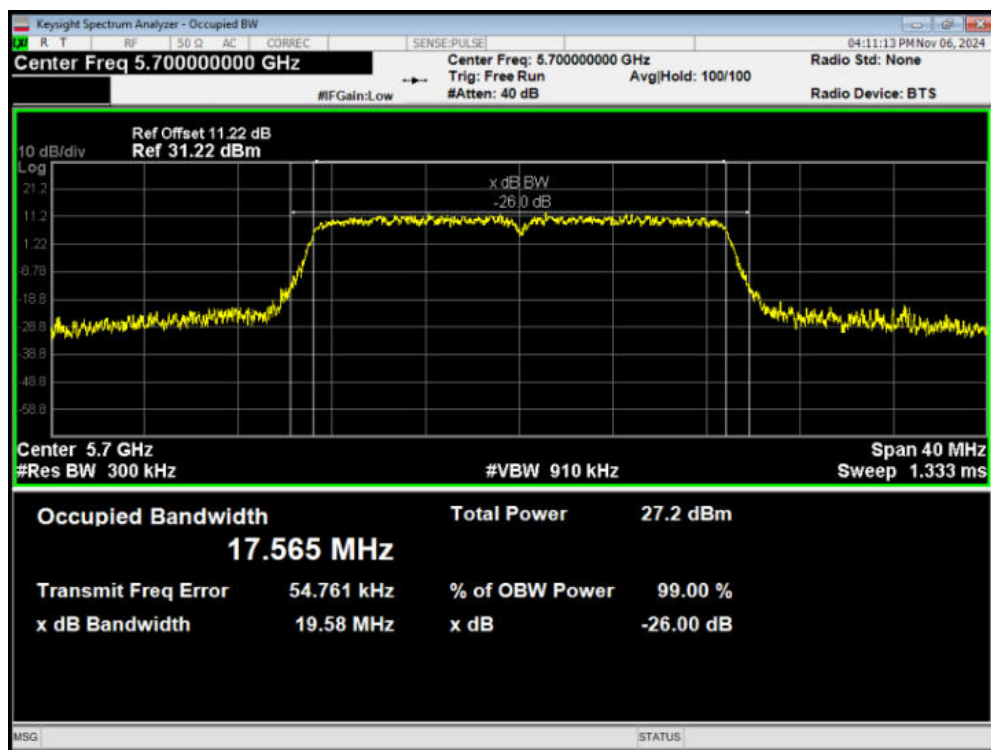


OBW 802.11ac(VHT20) 5720MHz

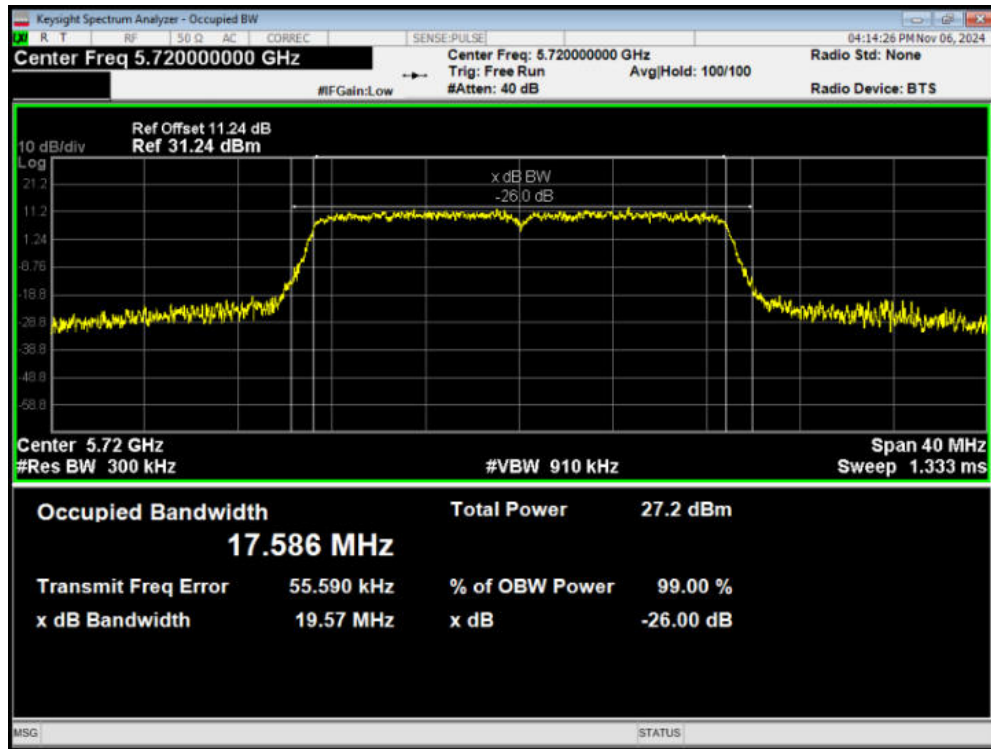


OBW 802.11ac(VHT40) 5510MHz

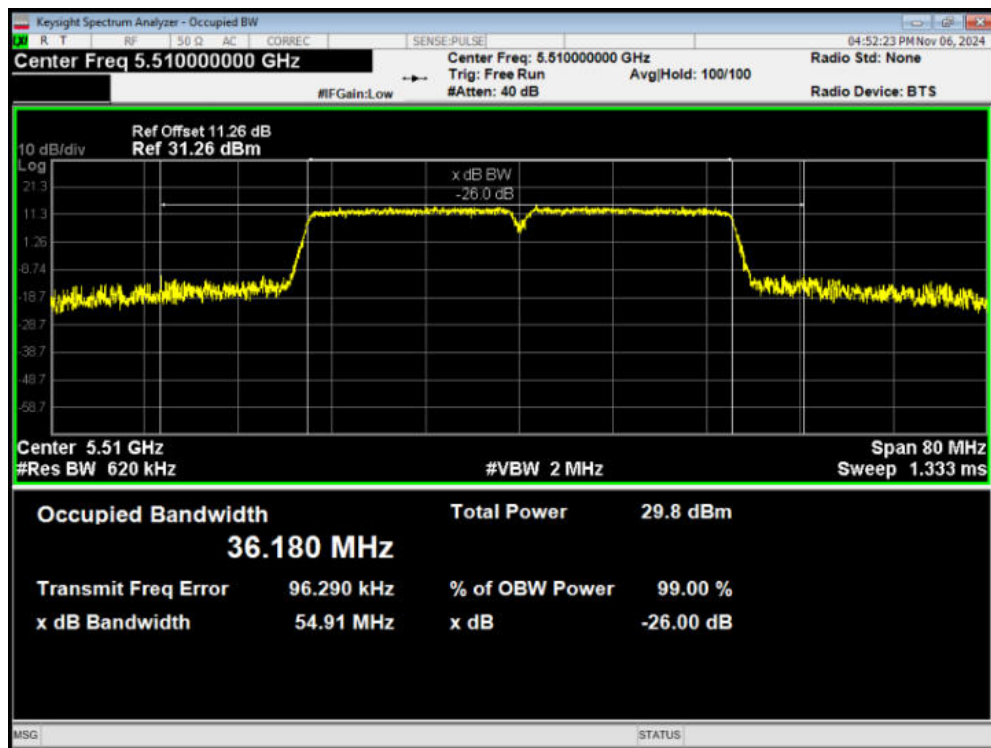


OBW 802.11ac(VHT40) 5590MHz

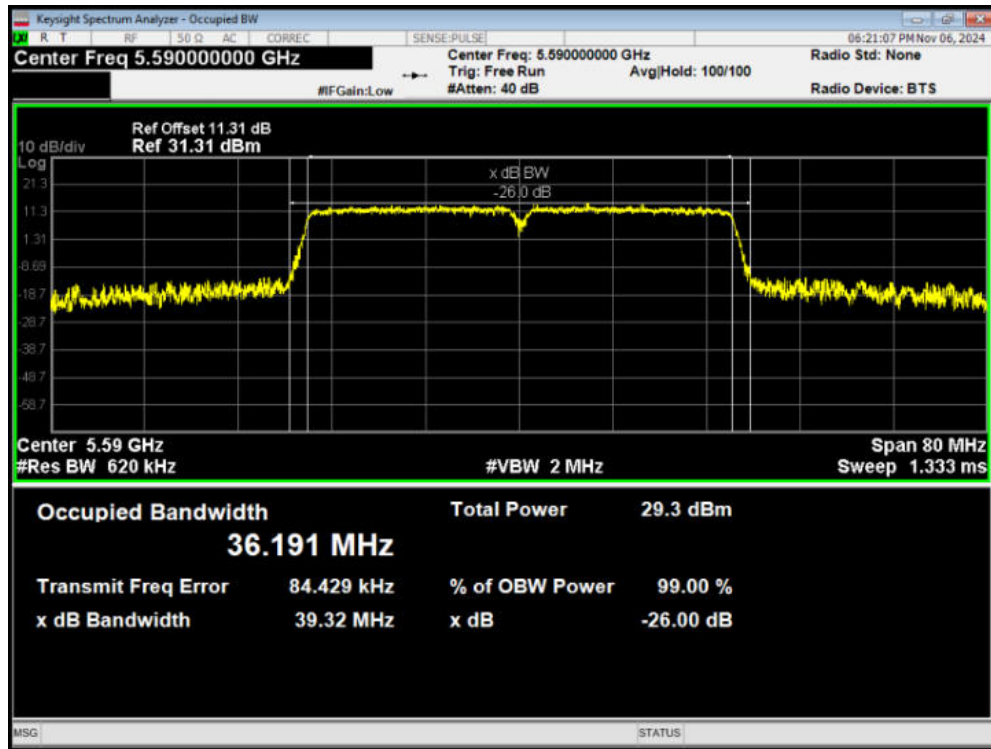

OBW 802.11ac(VHT40) 5670MHz

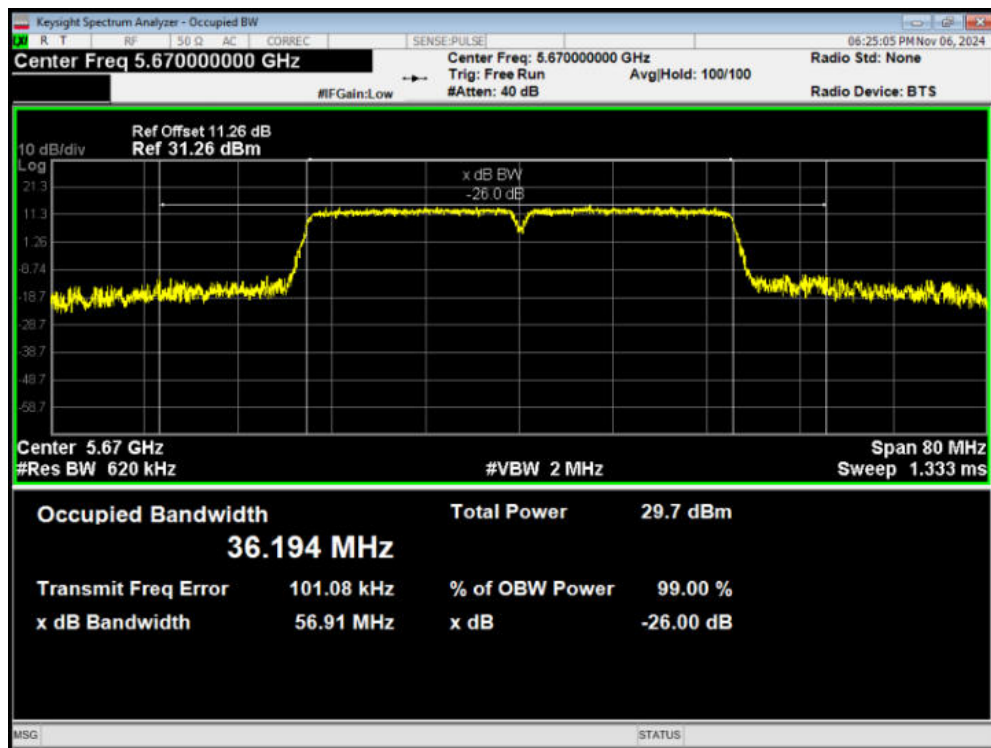

OBW 802.11ac(VHT40) 5710MHz

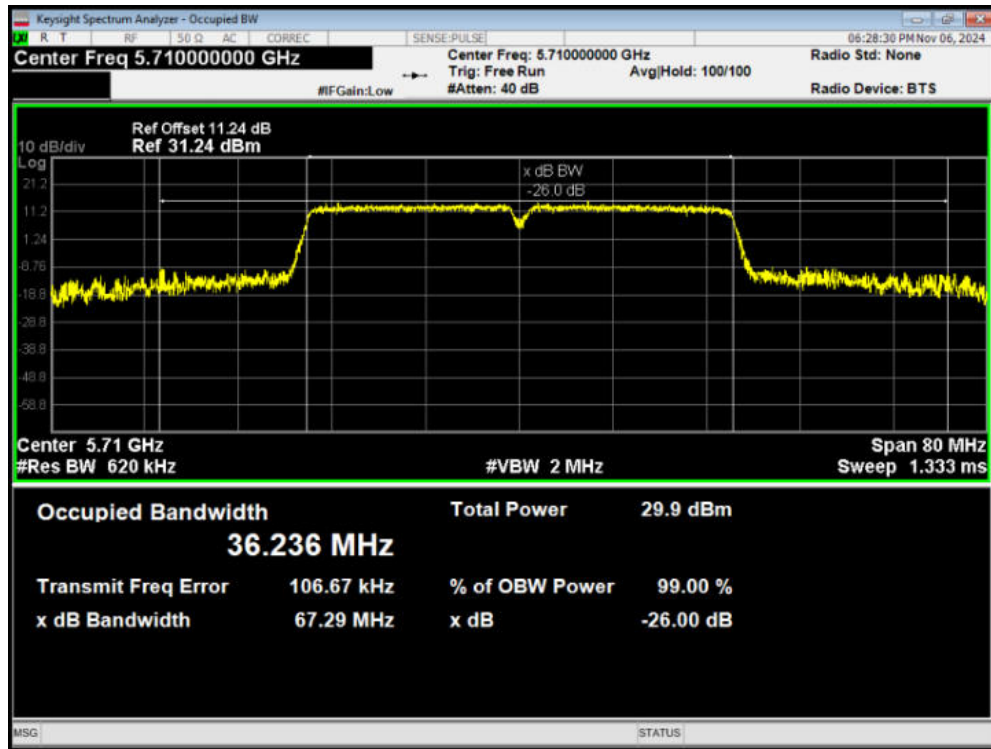

OBW 802.11ac(VHT80) 5530MHz

