


FCC Test Report

FCC ID : I88WSQ60
Equipment : Multy X AC3000 Tri-Band WiFi System
Model No. : WSQ50
Multiple Listing : Refer to item 1.1.1 for more details
Brand Name : ZYXEL
Applicant : Zyxel Communications Corporation
Address : No.2, Industry East Road IX, Hsinchu Science
Park, Hsinchu, 30075, Taiwan, R.O.C.
Standard : 47 CFR FCC Part 15.247
Received Date : Jan. 31, 2018
Tested Date : Mar. 07 ~ Mar. 31, 2018

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:


Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	9
1.3	Test Setup Chart	9
1.4	The Equipment List	10
1.5	Test Standards	11
1.6	Measurement Uncertainty	11
2	TEST CONFIGURATION	12
2.1	Testing Condition	12
2.2	The Worst Test Modes and Channel Details	12
3	TRANSMITTER TEST RESULTS.....	13
3.1	Conducted Emissions.....	13
3.2	Unwanted Emissions into Restricted Frequency Bands	16
4	TEST LABORATORY INFORMATION	44

Release Record

Report No.	Version	Description	Issued Date
FR760801-02AC	Rev. 01	Initial issue	Jun. 15, 2018

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.484MHz 29.50 (Margin -16.77dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 2390.00MHz 53.86 (Margin -0.14dB) - AV	Pass
15.247(b)(3)	Maximum Output Power	Refer to FR760801AC	Pass
15.247(a)(2)	6dB Bandwidth	Refer to FR760801AC	Pass
15.247(e)	Power Spectral Density	Refer to FR760801AC	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

1 General Description

1.1 Information

1.1.1 Product Details

The following models are provided to this EUT.

Brand Name	Model Name	Product Name	Description
ZYXEL	WSQ50	Multy X AC3000 Tri-Band WiFi System	For marketing different
	WSQ60	Multy Plus AC3000 Tri-Band WiFi System	
✦ All models are electrically identical, different model names are for marketing purpose. ✦ The above models, model WSQ50 was selected as a representative one for the final test and only its data was recorded in this report.			

1.1.2 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
2400-2483.5	b	2412-2462	1-11 [11]	2	1-11 Mbps
2400-2483.5	g	2412-2462	1-11 [11]	2	6-54 Mbps
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	2	MCS 0-15
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	2	MCS 0-15
Note 1: RF output power specifies that Maximum Conducted (Average) Output Power. Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation. Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.					

1.1.3 Main Chipset / RF Chipset

Function	Model No.
Main Chipset	IPQ4019
2.4G	IPQ4019
5G 2T2R	IPQ4019
5G 4T4R	QCA9984
Bluetooth LE	CSR8811

1.1.4 Antenna Details

Ant. No.	Model	Type	Connector	Operating Frequency (MHz) / Gain (dBi)		
				2400~2483.5	5150~5250	5725~5850
1	ALX17P-051XXB-00	PCB dipole	UFL	0	0	0
2	ALX17P-051XXC-00	PCB dipole	UFL	0	0	0
3	ALX17P-091XX5-00	PCB dipole	UFL	0	0	0
4	ALX17P-091XX6-00	PCB dipole	UFL	0	0	0
5	ALX17P-091XX7-00	PCB dipole	UFL	0	0	0
6	ALX17P-091XX8-00	PCB dipole	UFL	0	0	0
7	ALX17P-091XX9-00	PCB dipole	UFL	0	0	0
8	ALX17P-091XXA-00	PCB dipole	UFL	0	0	0

1.1.5 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	12Vdc from adapter
-------------------	--------------------

1.1.6 Accessories


Accessories		
No.	Equipment	Description
1	AC adapter	Brand Name: APD Model Name: WA-36A12FU I/P: 100-240Vac, 50-60Hz 0.9 Max O/P: 12Vdc, 3A Power line: 1.75m non-shielded without core
2	AC adapter	Brand Name: APD Model Name: WA-36A12R I/P: 100-240Vac, 50-60Hz 0.9 Max O/P: 12Vdc, 3A Power line: 1.75m non-shielded without core
3	RJ45 cable	1.9m non-shielded without core

1.1.7 Channel List

Frequency band (MHz)		2400~2483.5	
802.11 b / g / n HT20		802.11n HT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	3	2422
2	2417	4	2427
3	2422	5	2432
4	2427	6	2437
5	2432	7	2442
6	2437	8	2447
7	2442	9	2452
8	2447	---	---
9	2452	---	---
10	2457	---	---
11	2462	---	---

1.1.8 Test Tool and Duty Cycle


Test Tool	QRCT, V3.0.144.0		
Duty Cycle and Duty Factor	Mode	Duty cycle (%)	Duty factor (dB)
	11b	100.00%	0.00
	11g	96.58%	0.15
	HT20	98.91%	0.05
	HT40	97.33%	0.12

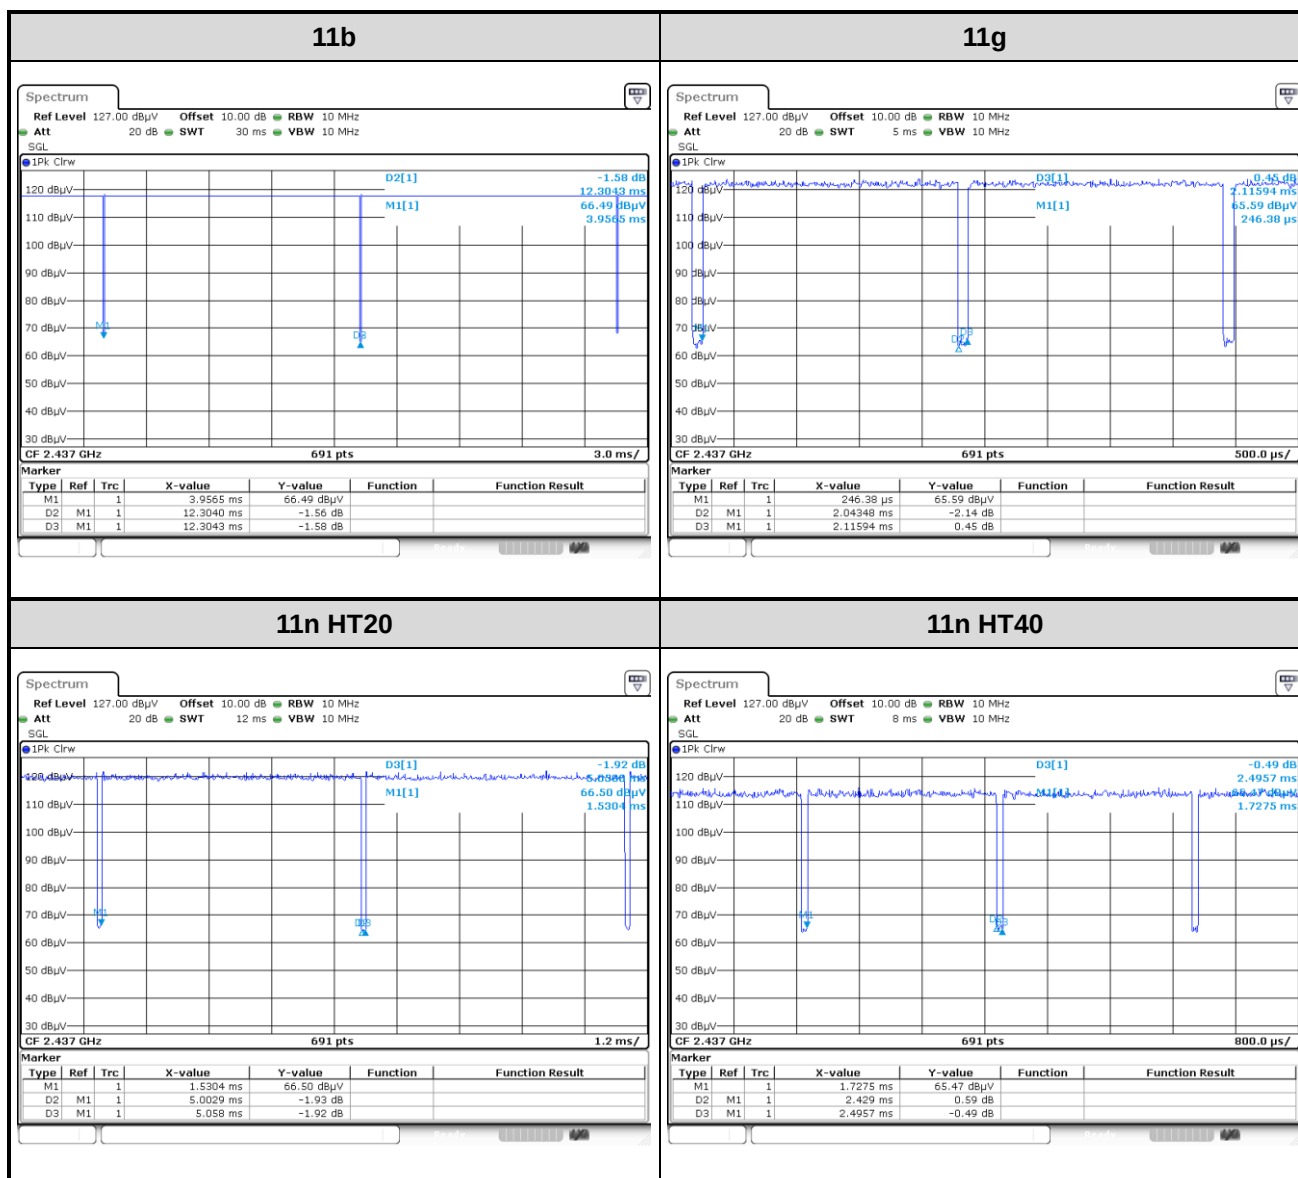

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	Latitude E6430	DoC	RJ45, 10m non-shielded.
2	Notebook	DELL	Latitude E5420	DoC	RJ45, 10m non-shielded.
3	USB Flash	Kingston	DTSE9	---	---
4	Dummy Load	---	---	---	RJ45, 1m(x2) non-shielded.

1.3 Test Setup Chart

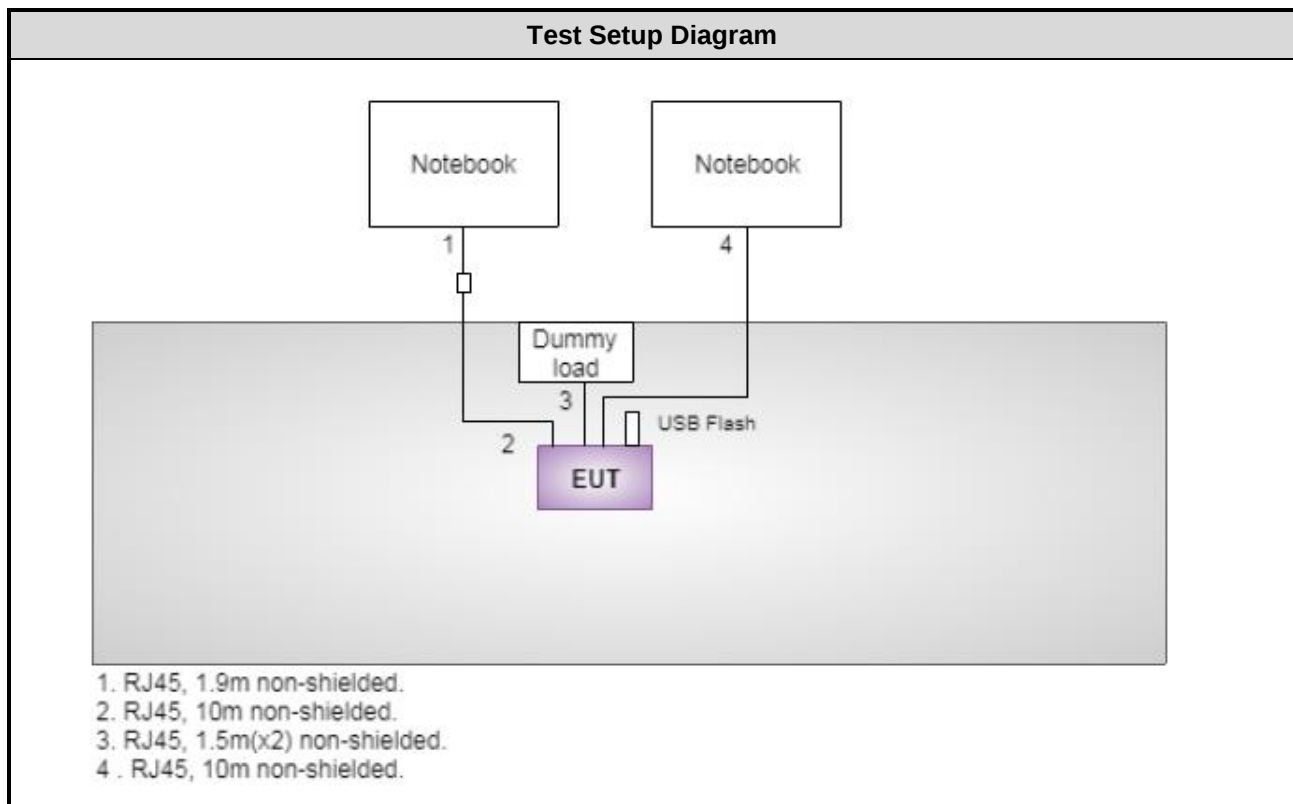

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Mar. 31, 2018				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	Agilent	N9038A	MY53290044	Sep. 26, 2017	Sep. 25, 2018
LISN	R&S	ENV216	101579	Feb. 13, 2018	Feb. 12, 2019
RF Cable-CON	EMC	EMCCFD300-BM-B M-6000	50821	Dec. 18, 2017	Dec. 17, 2018
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Mar. 07 ~ Mar. 17, 2018				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 04, 2017	Dec. 03, 2018
Receiver	R&S	ESR3	101658	Nov. 20, 2017	Nov. 19, 2018
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 25, 2017	Jul. 24, 2018
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 20, 2017	Dec. 19, 2018
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 23, 2017	Nov. 22, 2018
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 13, 2017	Nov. 12, 2018
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Dec. 07, 2017	Dec. 06, 2018
Preamplifier	EMC	EMC02325	980225	Jul. 28, 2017	Jul. 27, 2018
Preamplifier	Agilent	83017A	MY39501308	Oct. 06, 2017	Oct. 05, 2018
Preamplifier	EMC	EMC184045B	980192	Aug. 22, 2017	Aug. 21, 2018
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 07, 2017	Dec. 06, 2018
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 07, 2017	Dec. 06, 2018
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 07, 2017	Dec. 06, 2018
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	16052	Dec. 07, 2017	Dec. 06, 2018
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 07, 2017	Dec. 06, 2018
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 07, 2017	Dec. 06, 2018
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

FCC KDB 558074 D01 DTS Meas Guidance v04

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.134 Hz
Conducted power	±0.808 dB
Power density	±0.463 dB
Conducted emission	±2.670 dB
AC conducted emission	±2.90 dB
Radiated emission ≤ 1GHz	±3.66 dB
Radiated emission > 1GHz	±5.63 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	24°C / 57%	Alex Tsai
Radiated Emissions	03CH01-WS	20-22°C / 63-64%	Vincent Yeh Roger Lu

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- IC site registration No.: 10807A-1

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Conducted Emissions	11b	2437	1 Mbps	---
Radiated Emissions ≤1GHz	11b	2437	1 Mbps	---
Radiated Emissions >1GHz	11b	2412 / 2437 / 2462	1 Mbps	---
	11g	2412 / 2437 / 2462	6 Mbps	
	HT20	2412 / 2437 / 2462	MCS 0	
	HT40	2422 / 2437 / 2452	MCS 0	

Note:

- Two adapters (WA-36A12FU and WA-36A12R) had been covered during the pretest, and found that **WA-36A12FU adapter** was the worst case and was selected for final test.
- The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.


3.1.3 Test Setup



- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions


Modulation	11b	Test Freq. (MHz)	2437
Power Phase	Line		

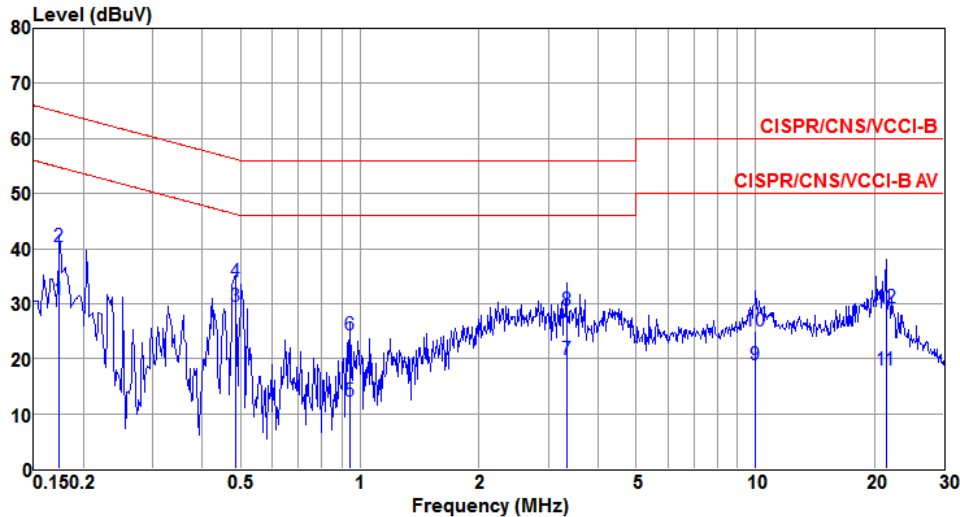

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	dBuV	Limit	Level	factor	loss	
				dB	dBuV	dB	dB	
1	0.174	30.60	54.77	-24.17	20.85	9.73	0.02	Average
2	0.174	40.33	64.77	-24.44	30.58	9.73	0.02	QP
3	0.484	29.50	46.27	-16.77	19.75	9.73	0.02	Average
4	0.484	34.11	56.27	-22.16	24.36	9.73	0.02	QP
5	0.943	12.36	46.00	-33.64	2.60	9.73	0.03	Average
6	0.943	24.38	56.00	-31.62	14.62	9.73	0.03	QP
7	3.328	19.94	46.00	-26.06	10.00	9.75	0.19	Average
8	3.328	28.79	56.00	-27.21	18.85	9.75	0.19	QP
9	10.019	18.93	50.00	-31.07	8.83	9.78	0.32	Average
10	10.019	25.01	60.00	-34.99	14.91	9.78	0.32	QP
11	21.373	18.06	50.00	-31.94	8.01	9.70	0.35	Average
12	21.373	29.24	60.00	-30.76	19.19	9.70	0.35	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

Modulation	11b	Test Freq. (MHz)	2437
Power Phase	Neutral		

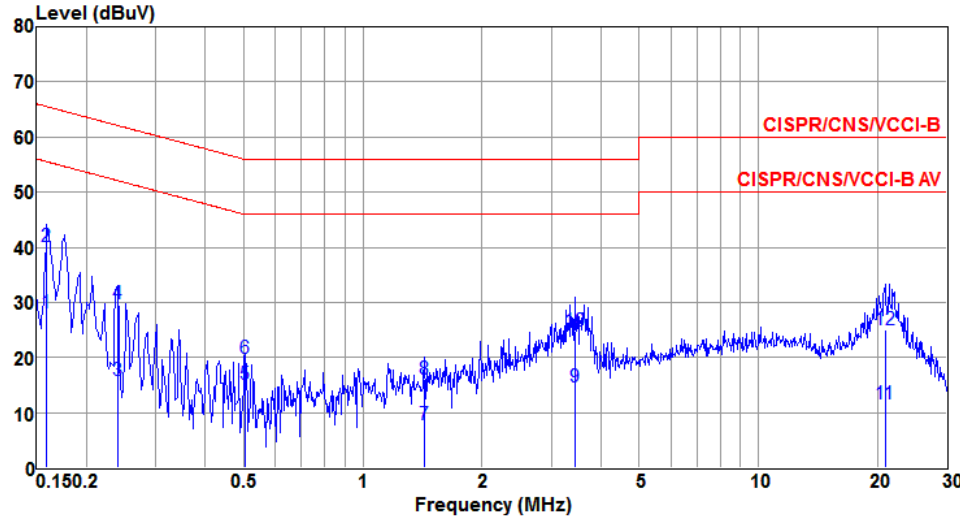

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.159	28.17	55.52	-27.35	18.48	9.68	0.01	Average
2@	0.159	40.19	65.52	-25.33	30.50	9.68	0.01	QP
3	0.240	15.81	52.08	-36.27	6.11	9.67	0.03	Average
4	0.240	29.72	62.08	-32.36	20.02	9.67	0.03	QP
5	0.505	15.21	46.00	-30.79	5.52	9.67	0.02	Average
6	0.505	19.88	56.00	-36.12	10.19	9.67	0.02	QP
7	1.433	7.79	46.00	-38.21	-1.96	9.68	0.07	Average
8	1.433	15.99	56.00	-40.01	6.24	9.68	0.07	QP
9	3.436	14.71	46.00	-31.29	4.83	9.69	0.19	Average
10	3.436	24.68	56.00	-31.32	14.80	9.69	0.19	QP
11	20.924	11.56	50.00	-38.44	1.38	9.83	0.35	Average
12	20.924	25.06	60.00	-34.94	14.88	9.83	0.35	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

3.2 Unwanted Emissions into Restricted Frequency Bands

3.2.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.2.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.2.3 Test Setup

Radiated Emissions below 1 GHz

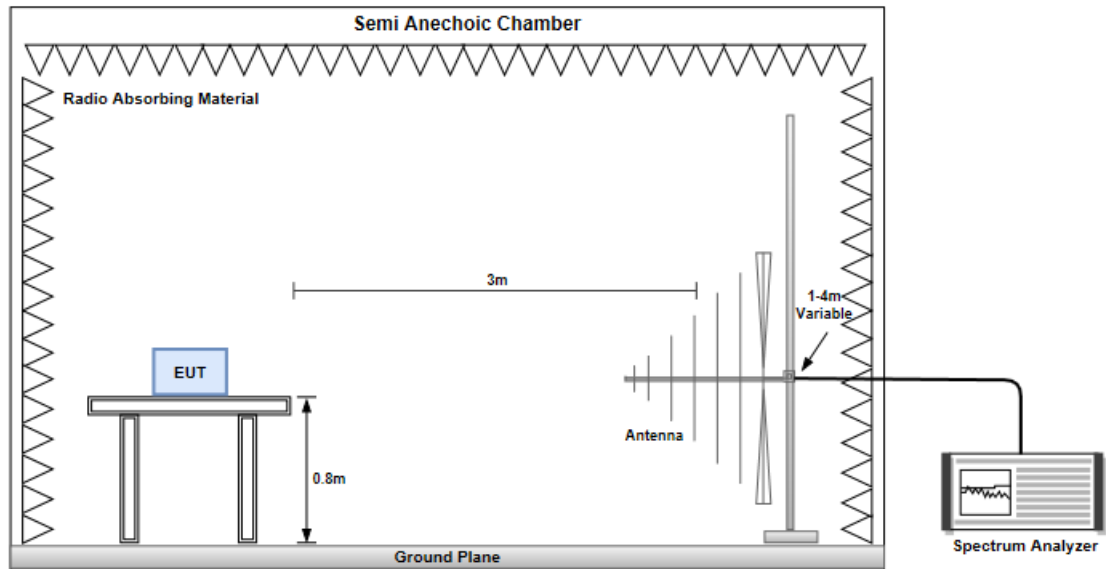


Radiated Emissions above 1 GHz

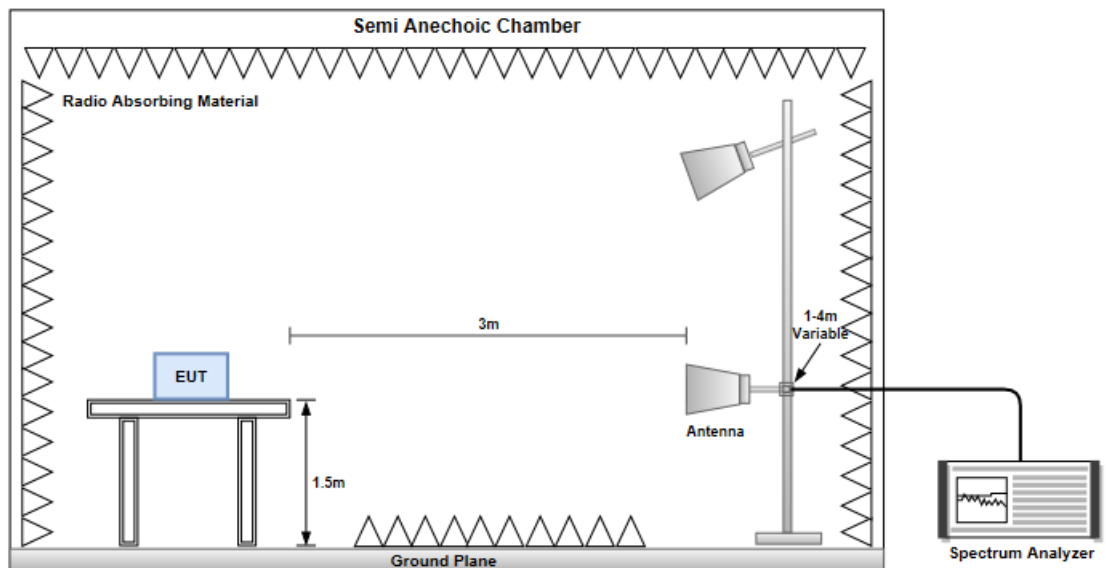

3.2.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)


Modulation	11b	Test Freq. (MHz)	2437
Polarization	Horizontal		

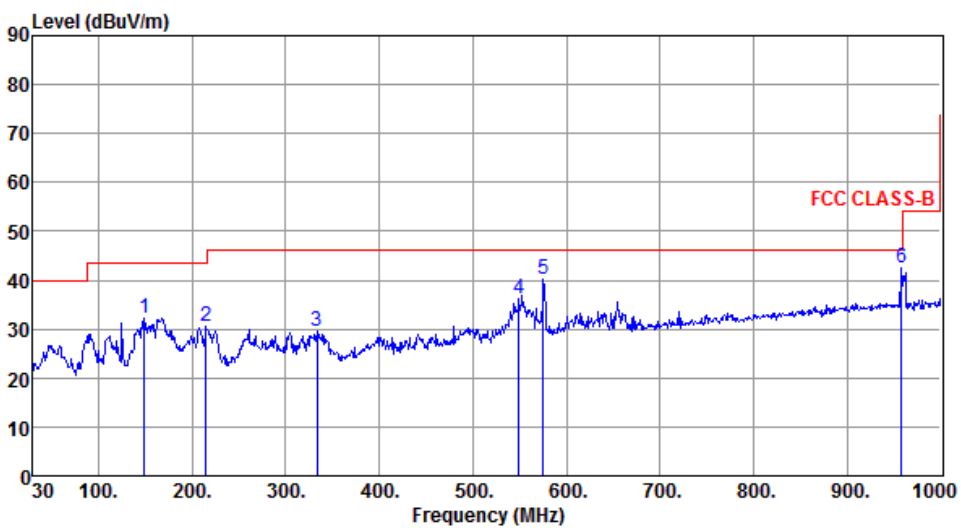

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	149.31	32.36	43.50	-11.14	40.68	-8.32	Peak	---	---
2	215.27	30.48	43.50	-13.02	41.26	-10.78	Peak	---	---
3	333.61	29.54	46.00	-16.46	36.35	-6.81	Peak	---	---
4	548.95	36.21	46.00	-9.79	37.96	-1.75	Peak	---	---
5	575.14	40.08	46.00	-5.92	41.28	-1.20	Peak	---	---
6	958.29	42.48	46.00	-3.52	37.49	4.99	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	11b	Test Freq. (MHz)	2437
Polarization	Vertical		

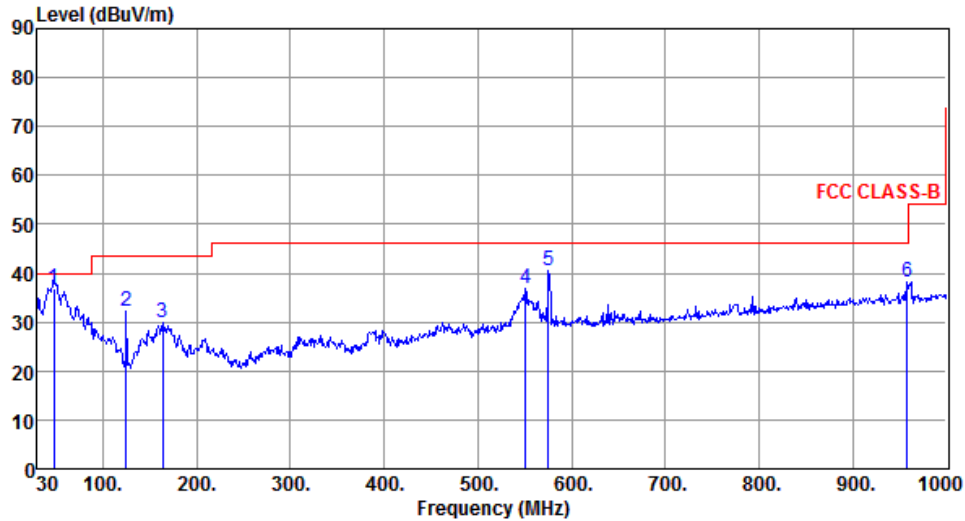

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	47.46	36.89	40.00	-3.11	44.61	-7.72	QP	100	205
2	125.06	32.16	43.50	-11.34	42.23	-10.07	Peak	---	---
3	163.86	29.93	43.50	-13.57	38.26	-8.33	Peak	---	---
4	550.89	36.98	46.00	-9.02	38.69	-1.71	Peak	---	---
5	575.14	40.45	46.00	-5.55	41.65	-1.20	Peak	---	---
6	958.29	38.11	46.00	-7.89	33.12	4.99	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.2.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

Modulation	11b			Test Freq. (MHz)			2412		
Polarization	Horizontal								

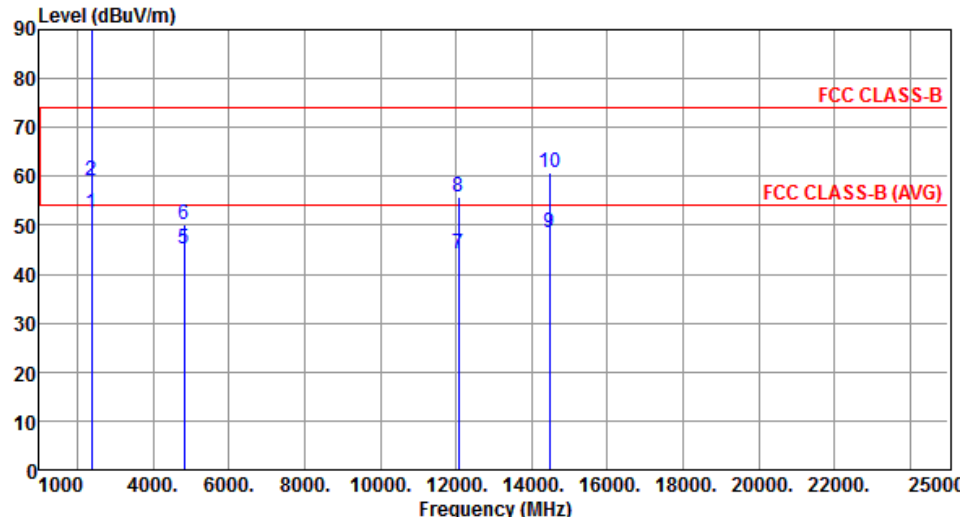

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.49	54.00	-1.51	56.09	-3.60	Average	100	348
2	2390.00	59.01	74.00	-14.99	62.61	-3.60	Peak	100	348
3 *	2412.00	113.30			116.81	-3.51	Average	100	348
4 *	2412.00	116.23			119.74	-3.51	Peak	100	348
5	4824.00	45.26	54.00	-8.74	41.66	3.60	Average	108	125
6	4824.00	50.13	74.00	-23.87	46.53	3.60	Peak	108	125
7	12060.00	44.15	54.00	-9.85	31.01	13.14	Average	100	333
8	12060.00	55.95	74.00	-18.05	42.81	13.14	Peak	100	333
9	14472.00	48.62	54.00	-5.38	31.01	17.61	Average	100	130
10	14472.00	60.77	74.00	-13.23	43.16	17.61	Peak	100	130


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3: "*" is Peak / Average value of fundamental frequency

Modulation	11b	Test Freq. (MHz)	2412
Polarization	Vertical		

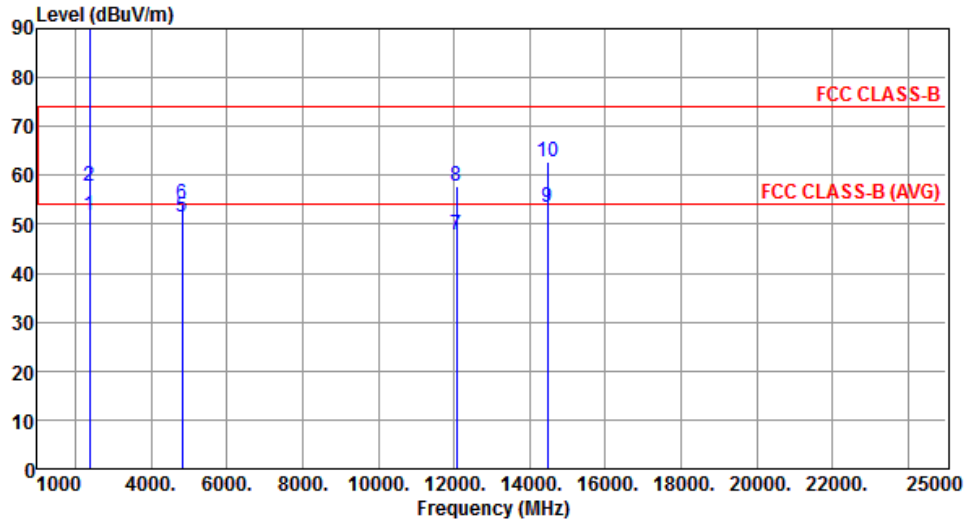

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	51.91	54.00	-2.09	55.51	-3.60	Average	301	0
2	2390.00	57.90	74.00	-16.10	61.50	-3.60	Peak	301	0
3 *	2412.00	112.50			116.01	-3.51	Average	301	0
4 *	2412.00	115.27			118.78	-3.51	Peak	301	0
5	4824.00	51.41	54.00	-2.59	47.81	3.60	Average	278	256
6	4824.00	54.02	74.00	-19.98	50.42	3.60	Peak	278	256
7	12060.00	47.85	54.00	-6.15	34.71	13.14	Average	100	43
8	12060.00	57.89	74.00	-16.11	44.75	13.14	Peak	100	43
9	14472.00	53.60	54.00	-0.40	35.99	17.61	Average	100	225
10	14472.00	62.72	74.00	-11.28	45.11	17.61	Peak	100	225

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "*" is Peak / Average value of fundamental frequency

Modulation	11b	Test Freq. (MHz)	2437
Polarization	Horizontal		
Level (dBuV/m) </			

Modulation	11b	Test Freq. (MHz)	2437
Polarization	Vertical		
Level (dBUV/m)			

Modulation	11b	Test Freq. (MHz)	2462
Polarization	Horizontal		

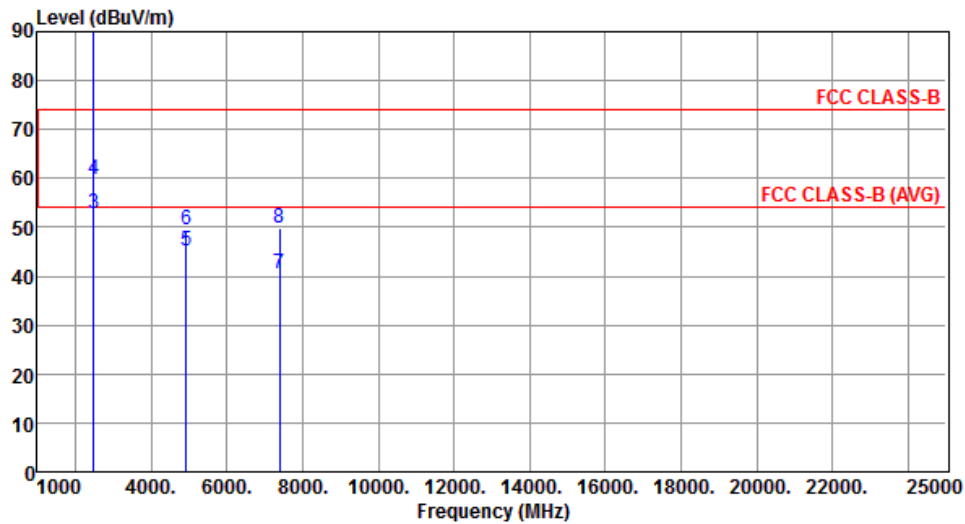

		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	*	2462.00	114.16			117.44	-3.28	Average	100	15
2	*	2462.00	116.85			120.13	-3.28	Peak	100	15
3		2483.50	52.83	54.00	-1.17	56.02	-3.19	Average	100	330
4		2483.50	59.94	74.00	-14.06	63.13	-3.19	Peak	100	330
5		4924.00	45.26	54.00	-8.74	41.34	3.92	Average	116	124
6		4924.00	49.50	74.00	-24.50	45.58	3.92	Peak	116	124
7		7386.00	40.58	54.00	-13.42	32.35	8.23	Average	100	45
8		7386.00	49.86	74.00	-24.14	41.63	8.23	Peak	100	45


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "*" is Peak / Average value of fundamental frequency

Modulation	11b	Test Freq. (MHz)	2462
Polarization	Vertical		

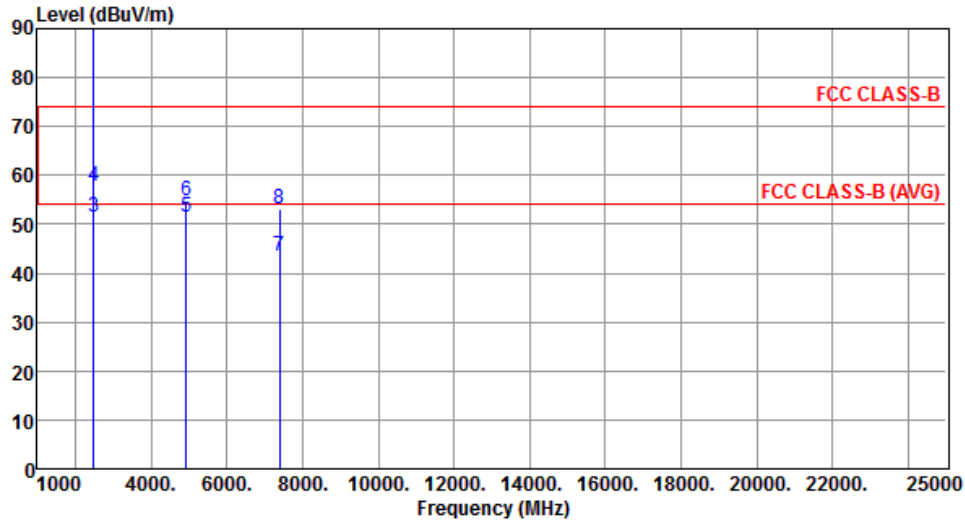

		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	*	2462.00	113.03			116.31	-3.28	Average	288	0
2	*	2462.00	115.75			119.03	-3.28	Peak	288	0
3		2483.50	51.39	54.00	-2.61	54.58	-3.19	Average	288	0
4		2483.50	57.83	74.00	-16.17	61.02	-3.19	Peak	288	0
5		4924.00	51.36	54.00	-2.64	47.44	3.92	Average	284	275
6		4924.00	54.67	74.00	-19.33	50.75	3.92	Peak	284	275
7		7386.00	43.40	54.00	-10.60	35.17	8.23	Average	100	262
8		7386.00	52.99	74.00	-21.01	44.76	8.23	Peak	100	262

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "*" is Peak / Average value of fundamental frequency

3.2.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

Modulation	11g		Test Freq. (MHz)		2412	
Polarization	Horizontal					

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	53.75	54.00	-0.25	57.35	-3.60	Average	256	5
2	2390.00	72.15	74.00	-1.85	75.75	-3.60	Peak	256	5
3 *	2412.00	105.30			108.81	-3.51	Average	256	5
4 *	2412.00	115.95			119.46	-3.51	Peak	256	5
5	4824.00	34.10	54.00	-19.90	30.50	3.60	Average	100	125
6	4824.00	45.10	74.00	-28.90	41.50	3.60	Peak	100	125
7	14472.00	47.71	54.00	-6.29	30.10	17.61	Average	100	139
8	14472.00	58.58	74.00	-15.42	40.97	17.61	Peak	100	139

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "*" is Peak / Average value of fundamental frequency

Modulation	11g	Test Freq. (MHz)	2412
Polarization	Vertical		
Level (dBuV/m)			

Modulation	11g	Test Freq. (MHz)	2437
Polarization	Horizontal		

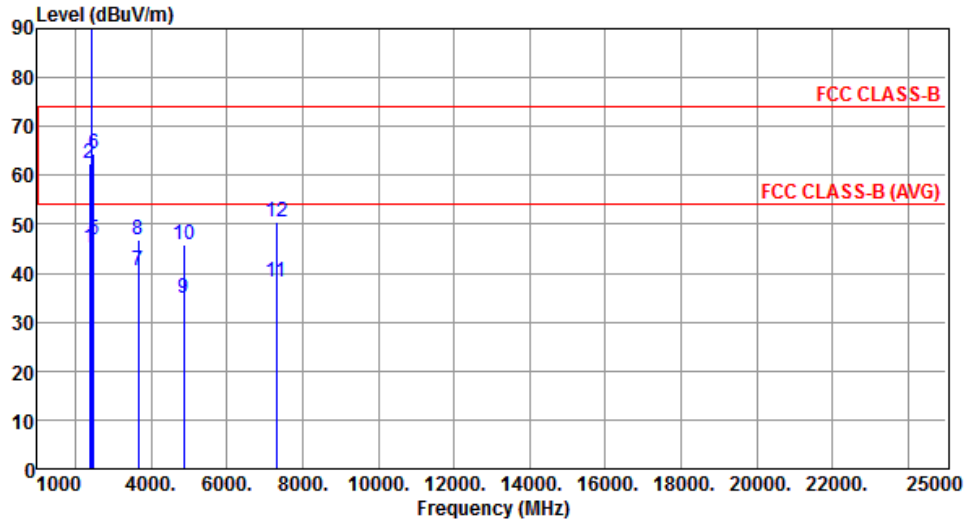

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	45.03	54.00	-8.97	48.63	-3.60	Average	195	6
2	2390.00	62.50	74.00	-11.50	66.10	-3.60	Peak	195	6
3 *	2437.00	109.11			112.51	-3.40	Average	195	6
4 *	2437.00	120.00			123.40	-3.40	Peak	195	6
5	2483.50	46.96	54.00	-7.04	50.15	-3.19	Average	195	6
6	2483.50	64.44	74.00	-9.56	67.63	-3.19	Peak	195	6
7	3655.50	40.67	54.00	-13.33	40.67	0.00	Average	100	293
8	3655.50	46.77	74.00	-27.23	46.77	0.00	Peak	100	293
9	4874.00	34.81	54.00	-19.19	31.06	3.75	Average	119	127
10	4874.00	45.81	74.00	-28.19	42.06	3.75	Peak	119	127
11	7311.00	38.19	54.00	-15.81	30.06	8.13	Average	100	48
12	7311.00	50.35	74.00	-23.65	42.22	8.13	Peak	100	48

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "*" is Peak / Average value of fundamental frequency

Modulation	11g	Test Freq. (MHz)	2437
Polarization	Vertical		
Level (dBuV/m)			

Modulation	11g	Test Freq. (MHz)	2462
Polarization	Horizontal		

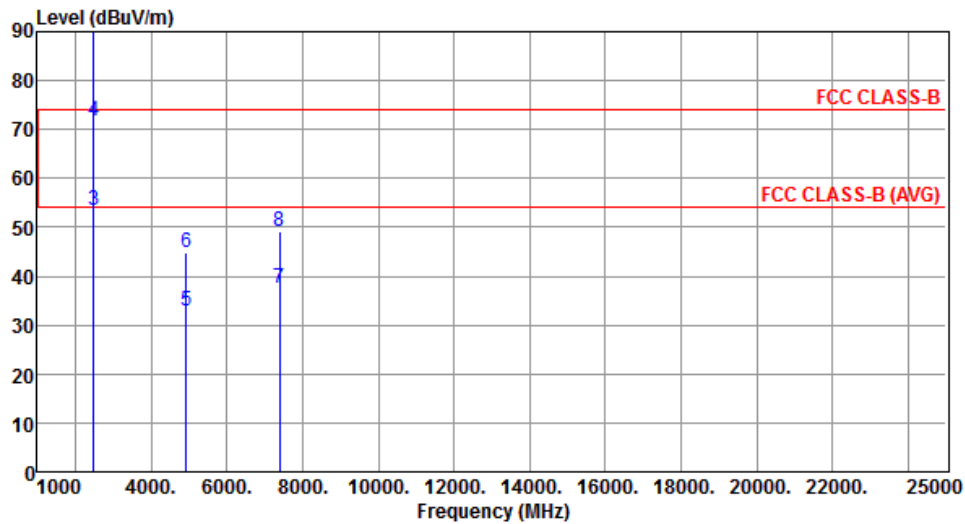

		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	*	2462.00	104.10			107.38	-3.28	Average	275	353
2	*	2462.00	114.68			117.96	-3.28	Peak	275	353
3		2483.50	53.56	54.00	-0.44	56.75	-3.19	Average	275	353
4		2483.50	71.73	74.00	-2.27	74.92	-3.19	Peak	275	353
5		4924.00	32.74	54.00	-21.26	28.82	3.92	Average	106	123
6		4924.00	44.74	74.00	-29.26	40.82	3.92	Peak	106	123
7		7386.00	37.68	54.00	-16.32	29.45	8.23	Average	100	56
8		7386.00	49.12	74.00	-24.88	40.89	8.23	Peak	100	56


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "*" is Peak / Average value of fundamental frequency

Modulation	11g	Test Freq. (MHz)	2462
Polarization	Vertical		

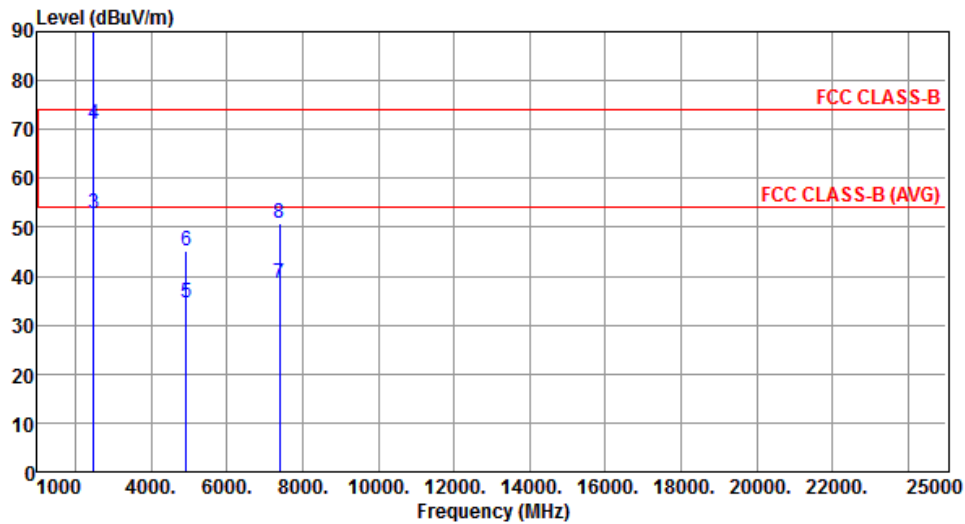

		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	*	2462.00	103.34			106.62	-3.28	Average	317	5
2	*	2462.00	114.22			117.50	-3.28	Peak	317	5
3		2483.50	52.66	54.00	-1.34	55.85	-3.19	Average	317	5
4		2483.50	71.09	74.00	-2.91	74.28	-3.19	Peak	317	5
5		4924.00	34.38	54.00	-19.62	30.46	3.92	Average	262	270
6		4924.00	45.30	74.00	-28.70	41.38	3.92	Peak	262	270
7		7386.00	38.63	54.00	-15.37	30.40	8.23	Average	100	263
8		7386.00	50.66	74.00	-23.34	42.43	8.23	Peak	100	263

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "*" is Peak / Average value of fundamental frequency

3.2.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

Modulation	HT20		Test Freq. (MHz)		2412	
Polarization	Horizontal					

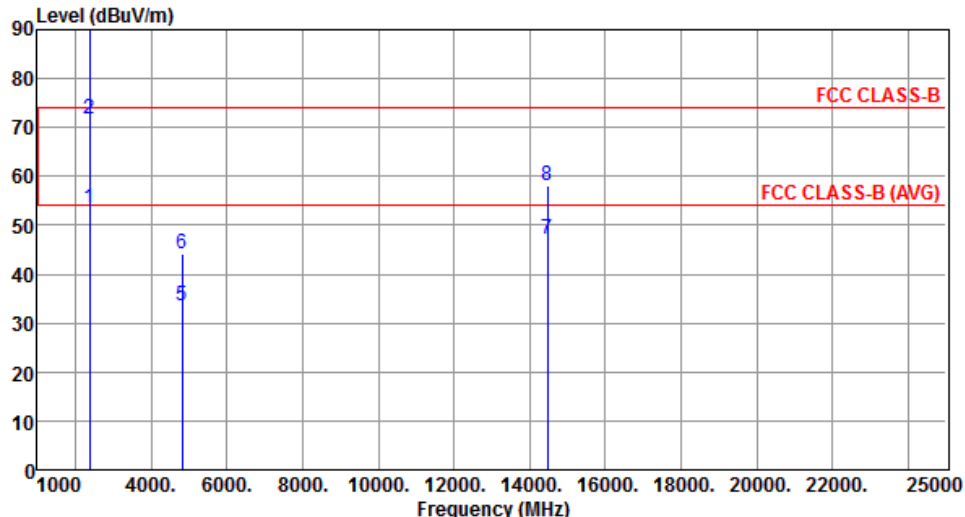

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	53.56	54.00	-0.44	57.16	-3.60	Average	251	2
2	2390.00	71.86	74.00	-2.14	75.46	-3.60	Peak	251	2
3 *	2412.00	104.24			107.75	-3.51	Average	251	2
4 *	2412.00	116.79			120.30	-3.51	Peak	251	2
5	4824.00	33.67	54.00	-20.33	30.07	3.60	Average	100	121
6	4824.00	44.23	74.00	-29.77	40.63	3.60	Peak	100	121
7	14472.00	47.32	54.00	-6.68	29.71	17.61	Average	100	145
8	14472.00	57.98	74.00	-16.02	40.37	17.61	Peak	100	145


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: "*" is Peak / Average value of fundamental frequency

Modulation	HT20	Test Freq. (MHz)	2412
Polarization	Vertical		
Level (dBuV/m) <			

Modulation	HT20	Test Freq. (MHz)	2437
Polarization	Horizontal		
Level (dBuV/m) </			

Modulation	HT20	Test Freq. (MHz)	2437
Polarization	Vertical		
Level (dBuV/m)			

Modulation	HT20	Test Freq. (MHz)	2462
Polarization	Horizontal		

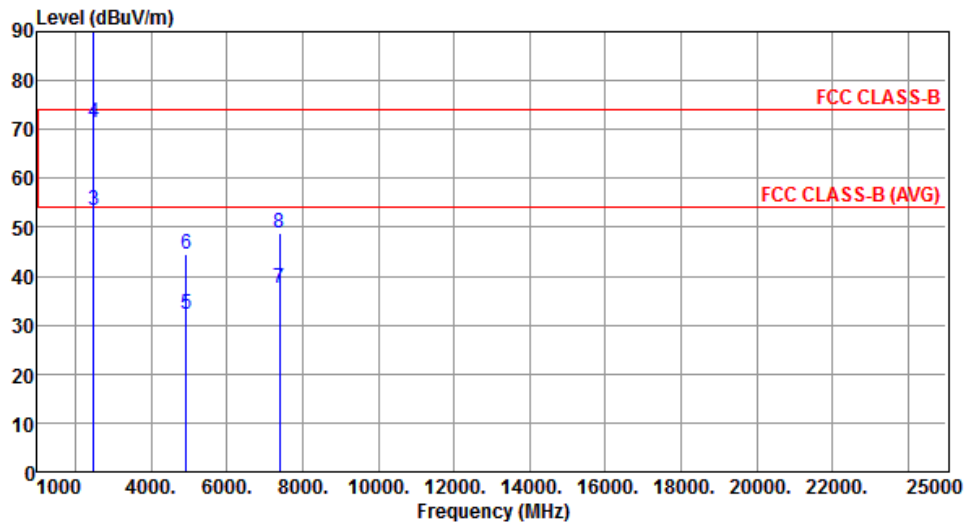

		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	*	2462.00	103.18			106.46	-3.28	Average	269	1
2	*	2462.00	115.30			118.58	-3.28	Peak	269	1
3		2483.50	53.51	54.00	-0.49	56.70	-3.19	Average	269	1
4		2483.50	71.52	74.00	-2.48	74.71	-3.19	Peak	269	1
5		4924.00	32.26	54.00	-21.74	28.34	3.92	Average	100	135
6		4924.00	44.44	74.00	-29.56	40.52	3.92	Peak	100	135
7		7386.00	37.55	54.00	-16.45	29.32	8.23	Average	100	61
8		7386.00	48.67	74.00	-25.33	40.44	8.23	Peak	100	61


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "*" is Peak / Average value of fundamental frequency

Modulation	HT20	Test Freq. (MHz)	2462
Polarization	Vertical		

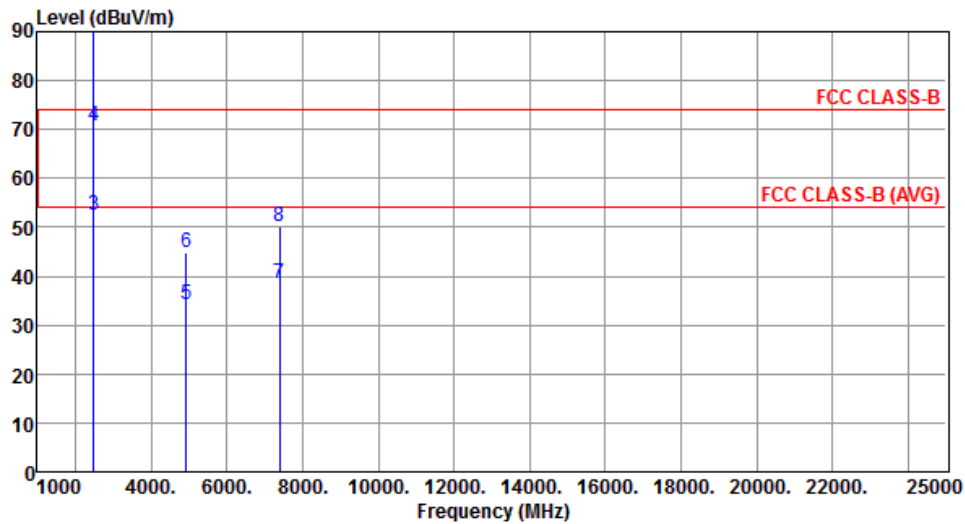

		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	*	2462.00	102.27			105.55	-3.28	Average	303	1
2	*	2462.00	114.85			118.13	-3.28	Peak	303	1
3		2483.50	52.51	54.00	-1.49	55.70	-3.19	Average	303	1
4		2483.50	70.87	74.00	-3.13	74.06	-3.19	Peak	303	1
5		4924.00	34.05	54.00	-19.95	30.13	3.92	Average	258	275
6		4924.00	44.88	74.00	-29.12	40.96	3.92	Peak	258	275
7		7386.00	38.53	54.00	-15.47	30.30	8.23	Average	100	258
8		7386.00	49.99	74.00	-24.01	41.76	8.23	Peak	100	258

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "*" is Peak / Average value of fundamental frequency

3.2.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

Modulation	HT40	Test Freq. (MHz)	2422
Polarization	Horizontal		

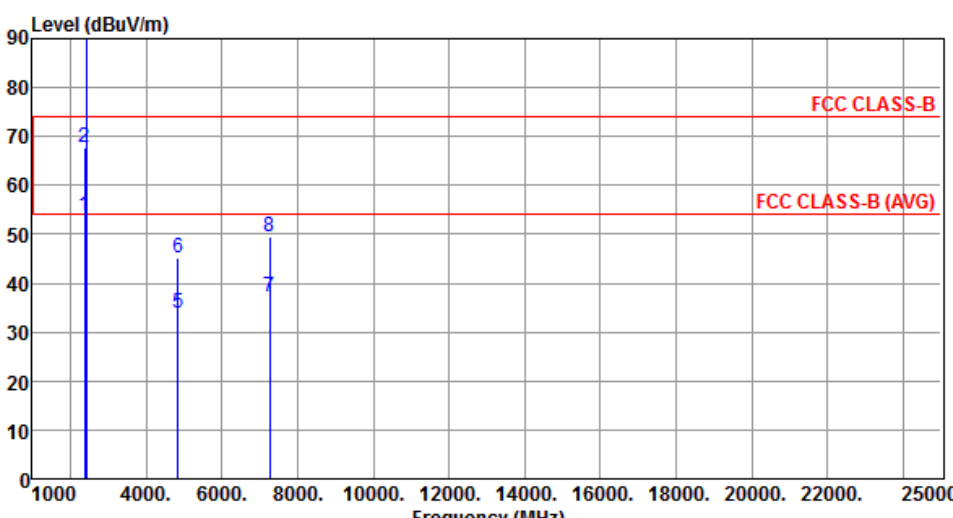

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	53.86	54.00	-0.14	57.46	-3.60	Average	197	1
2	2390.00	67.91	74.00	-6.09	71.51	-3.60	Peak	197	1
3 *	2422.00	100.66			104.13	-3.47	Average	197	1
4 *	2422.00	110.92			114.39	-3.47	Peak	197	1
5	4844.00	33.73	54.00	-20.27	30.06	3.67	Average	106	122
6	4844.00	45.10	74.00	-28.90	41.43	3.67	Peak	106	122
7	7266.00	37.12	54.00	-16.88	29.06	8.06	Average	100	58
8	7266.00	49.34	74.00	-24.66	41.28	8.06	Peak	100	58

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
 Note 3: "*" is Peak / Average value of fundamental frequency

Modulation	HT40	Test Freq. (MHz)	2422
Polarization	Vertical		
Level (dBuV/m) </			

Modulation	HT40	Test Freq. (MHz)	2437
Polarization	Horizontal		
Level (dBuV/m) </			

Modulation	HT40	Test Freq. (MHz)	2437
Polarization	Vertical		
Level (dBUV/m)			

Modulation	HT40	Test Freq. (MHz)	2452
Polarization	Horizontal		

		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	*	2452.00	98.53			101.86	-3.33	Average	183	2
2	*	2452.00	107.97			111.30	-3.33	Peak	183	2
3		2483.50	53.85	54.00	-0.15	57.04	-3.19	Average	183	2
4		2483.50	68.04	74.00	-5.96	71.23	-3.19	Peak	183	2
5		4904.00	33.11	54.00	-20.89	29.25	3.86	Average	100	116
6		4904.00	44.13	74.00	-29.87	40.27	3.86	Peak	100	116
7		7356.00	36.69	54.00	-17.31	28.49	8.20	Average	100	63
8		7356.00	48.55	74.00	-25.45	40.35	8.20	Peak	100	63


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency

Modulation	HT40	Test Freq. (MHz)	2452
Polarization	Vertical		

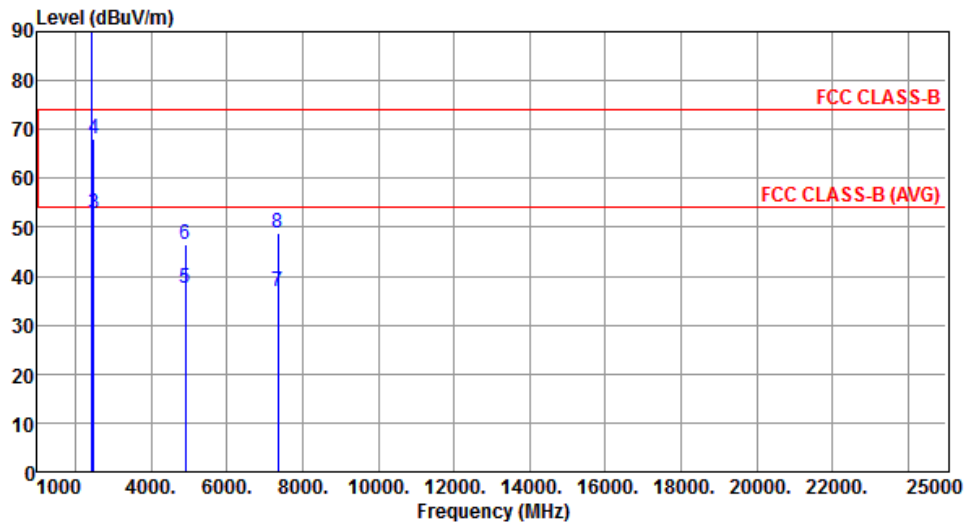

		Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	*	2452.00	96.47			99.80	-3.33	Average	310	5
2	*	2452.00	106.73			110.06	-3.33	Peak	310	5
3		2483.50	52.79	54.00	-1.21	55.98	-3.19	Average	310	5
4		2483.50	68.01	74.00	-5.99	71.20	-3.19	Peak	310	5
5		4904.00	37.37	54.00	-16.63	33.51	3.86	Average	271	280
6		4904.00	46.51	74.00	-27.49	42.65	3.86	Peak	271	280
7		7356.00	36.97	54.00	-17.03	28.77	8.20	Average	100	263
8		7356.00	48.90	74.00	-25.10	40.70	8.20	Peak	100	263

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3: "*" is Peak / Average value of fundamental frequency

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==