



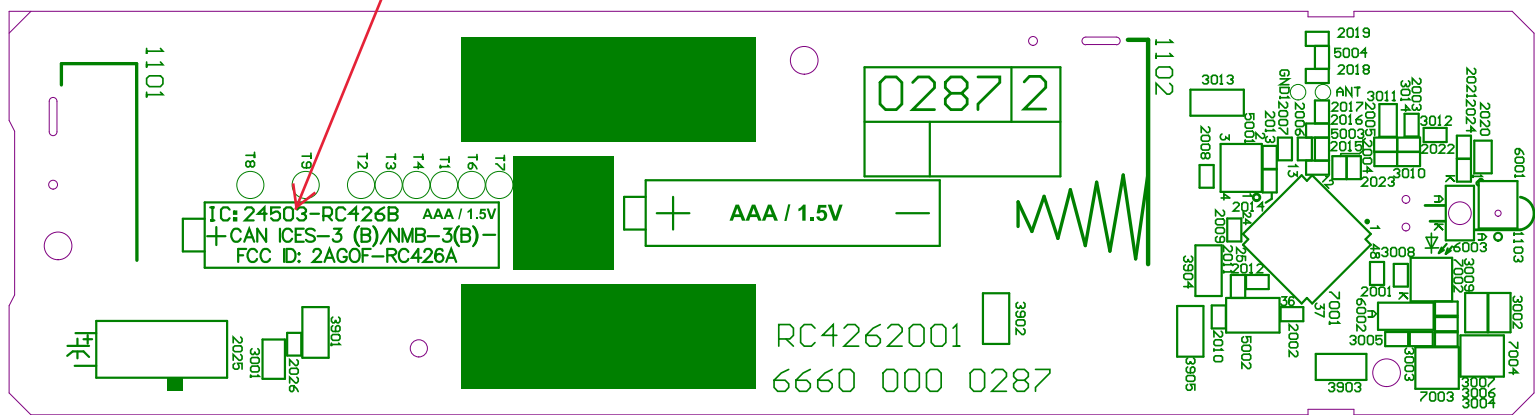

This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference and
(2) this device must accept any interference received,
including interference that may cause undesired operation.

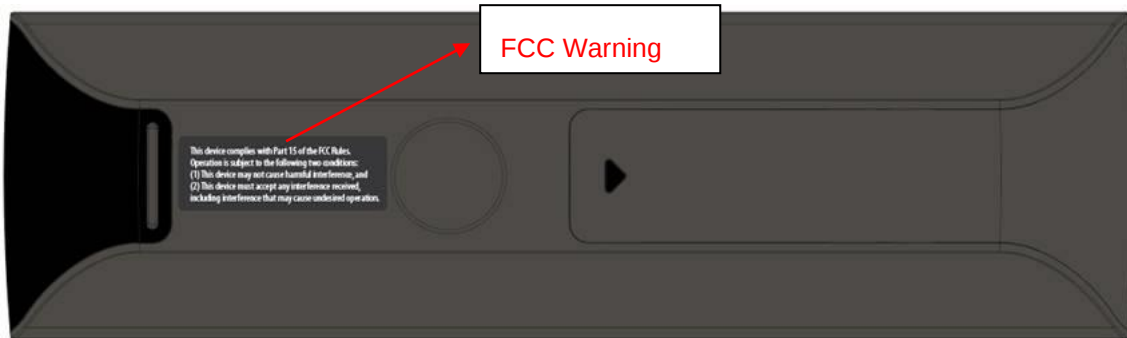

1, FACTORY PLATE (3139 225 5089X 20*7.5mm)

PRODUCT VERSION - REFER TO BELLOW TABLE
(FILLED BY MANUFACTORY)

RC4262001/01R GGG
3139 238 39571
MADE IN XXXX
AA ZZ BCCDD E FFFFFF

COUNTRY OF ORIGIN
(FILLED BY MANUFACTORY)

PRODUCTION CODE - REFER TO BELLOW TABLE
(FILLED BY MANUFACTORY)



2, PHOTO LABEL (3139 235 5438X 80*50mm)

RC4262001/01R

3139 238 39571

MADE IN XXXXX

100 PCS

AA : BCCDD

LOT NO:XXXXXX CTN: XXX/XXX




COUNTRY OF ORIGIN
(FILLED BY MANUFACTORY)

PRODUCTION CODE - REFER TO BELLOW TABLE
(FILLED BY MANUFACTORY)

CARTON NUMBER.
(FILLED BY MANUFACTORY)

LOT NUMBER.
(FILLED BY MANUFACTORY)

STICK ON CARTON

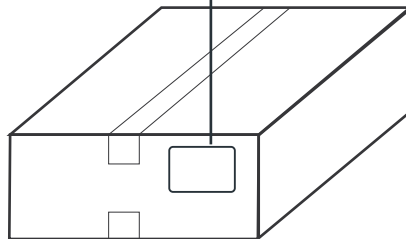


AA	Production site, BS = Batam, CS = Suzhou, CP = CBET, CF = Funide, CKH=HANA
ZZ	Factory change code or version nbr (follow version management procedure) 01 = 1 st version PCB assy point 1; 09 = 1 st version PCB assy point 9 11 = 2 nd version PCB assy point 1; 19 = 2 nd version PCB assy point 9 Maximum to 9 version PCB assy and point 9
B	Production day code, 1 = Monday, 2 = Tuesday, ... so on.
CC	Production year code, 00 = 2000, 01 = 2001, so on
DD	Production week code, 01 = week 1, 02= week 2, ... until 52 = week 52
E	Production shift, 0 = no need indication, A = normal or 1 st shift, B = 2 nd shift, C = 3 rd shift
FFFFFF	Serial No. starts from 000001 AND renew every new production lot
GGG	S , PTR, TR, CO S = Sample ; PTR = Pre-Trial Run ; TR = Trial Run CO = Concession Order (same meaning as Risk Order)

DESCRIPTION
RC4262001/01R

3139 238 3957


1	-----
1	XXX
.	.
.	.

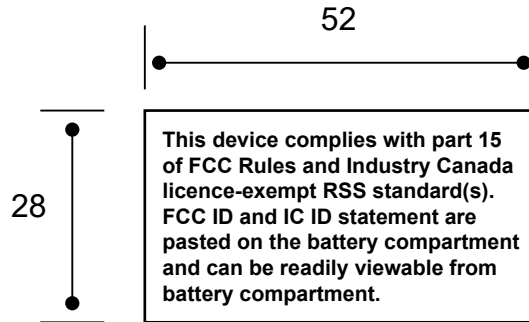

Cutting line, not print.

Note:

- 1, QDS Dimension before folded : 52 * 28 mm (± 0.5 mm)
QDS Dimension after folded: Not fold
- 2, Material: white offset paper
 - a, Grammage: 80 g/m² $\pm 5\%$
 - b, Basic color: white
 - c, Folding endurance(times): ≥ 8
- 3, Printing:
 - a, Artwork: Refer to drawing.
 - b, Printing color: Black
 - c, Color fastness: Meet the requirements in GB/T 7705
- 4, Other unspecified requirements refer to GB/T 7705, GB/T 30130, GB/T 10335.1, GB/T 10335.2



MATERIAL & TREATMENT :

.
. Refer to drawing
.

mm
1 : 1

ENVIRONMENTAL REQUIREMENT:
NO RESTRICTED SUBSTANCES
ACCORDING TO HCS RSL 2019

FCC NOTE
RC4262001

6630 000 0327