

# FCC RF Test Report

APPLICANT : ASKEY COMPUTER CORP.  
EQUIPMENT : Module  
BRAND NAME : ASKEY  
MODEL NAME : NMQ2210  
FCC ID : H8NNMQ2210-D187  
STANDARD : 47 CFR Part 90(R)  
CLASSIFICATION : PCS Licensed Transmitter (PCB)  
TEST DATE(S) : Aug. 28, 2024 ~ Sep. 04, 2024

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



**Sporton International Inc. (ShenZhen)**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055**

**People's Republic of China**



## TABLE OF CONTENTS

<b>REVISION HISTORY .....</b>	<b>3</b>
<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1 GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1 Applicant .....	5
1.2 Manufacturer .....	5
1.3 Feature of Equipment Under Test .....	5
1.4 Maximum Conducted Power and Emission Designator .....	6
1.5 Testing Site .....	6
1.6 Test Software .....	7
1.7 Applied Standards .....	7
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>	<b>8</b>
2.1 Test Mode .....	8
2.2 Connection Diagram of Test System .....	9
2.3 Support Unit used in test configuration and system .....	9
2.4 Measurement Results Explanation Example .....	10
2.5 Frequency List of Low/Middle/High Channels .....	10
<b>3 CONDUCTED TEST ITEMS .....</b>	<b>11</b>
3.1 Measuring Instruments .....	11
3.2 Conducted Output Power and ERP .....	12
3.3 Peak-to-Average Ratio .....	13
3.4 Occupied Bandwidth .....	14
3.5 Conducted Band Edge Measurement .....	15
3.6 Emission Mask .....	16
3.7 Conducted Spurious Emission Measurement .....	17
3.8 Frequency Stability Measurement .....	18
<b>4 RADIATED TEST ITEMS .....</b>	<b>19</b>
4.1 Measuring Instruments .....	19
4.2 Test Setup .....	19
4.3 Test Result of Radiated Test .....	20
4.4 Radiated Spurious Emission Measurement .....	21
<b>5 LIST OF MEASURING EQUIPMENT .....</b>	<b>22</b>
<b>6 MEASUREMENT UNCERTAINTY .....</b>	<b>23</b>
<b>APPENDIX A. TEST RESULTS OF CONDUCTED TEST</b>	
<b>APPENDIX B. TEST RESULTS OF RADIATED TEST</b>	
<b>APPENDIX C. TEST SETUP PHOTOGRAPHS</b>	



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG471806C	Rev. 01	Initial issue of report	Dec. 05, 2024

## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.2	§2.1046	Conducted Output Power	—	Reporting only	-
	§90.542 (a)(7)	Effective Radiated Power	ERP < 3Watt	PASS	-
3.3	-	Peak-to-Average Ratio	—	Reporting only	-
3.4	§2.1049	Occupied Bandwidth	—	Reporting only	-
3.5	§2.1053 §90.543 (e)(2)(3)	Conducted Band Edge Measurement	Refer standard	PASS	-
3.6	§2.1051 §90.210(n)	Emission Mask	Mask B	PASS	-
3.7	§2.1053 §90.543 (e)(3)	Conducted Spurious Emission	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
3.8	§2.1055 §90.539 (e)	Frequency Stability Temperature & Voltage	< ±1.25 ppm	PASS	-
4.4	§2.1053 §90.543 (e)(3) §90.543 (f)	Radiated Spurious Emission	< 43+10log <sub>10</sub> (P[Watts])	PASS	Under limit 0.71 dB at 1577.00 MHz

**Conformity Assessment Condition:**

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

# 1 General Description

## 1.1 Applicant

ASKEY COMPUTER CORP.

10F, No.119, Jiansong Rd., Zhonghe Dist., New Taipei City, Taiwan

## 1.2 Manufacturer

ASKEY COMPUTER CORP.

10F, No.119, Jiansong Rd., Zhonghe Dist., New Taipei City, Taiwan

## 1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Module
Brand Name	ASKEY
Model Name	NMQ2210
FCC ID	H8NNMQ2210-D187
Tx Frequency	LTE Band 14: 788 MHz ~ 798 MHz
Rx Frequency	LTE Band 14: 758 MHz ~ 768 MHz
Bandwidth	5MHz / 10MHz
Maximum Output Power to Antenna	Ant.0: 22.93 dBm
Antenna Gain	Ant.0: 0.93 dBi
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM
SN / IMEI Code	Conducted: 355241830363892(IMEI) Radiation: 411001(SN)
HW Version	REV3
SW Version	NMQ2210_NA_V4.2.25.1
EUT Stage	Production Unit

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Maximum Conducted Power and Emission Designator

LTE Band 14		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)
5	790.5~795.5	0.1923	4M48G7D	0.1626	4M50W7D
10	793	0.1963	9M07G7D	0.1644	9M01W7D

Note: All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

## 1.5 Testing Site

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International Inc. (ShenZhen)		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	TH01-SZ	CN1256	421272

<b>Test Firm</b>	Sporton International Inc. (ShenZhen)		
<b>Test Site Location</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH01-SZ	CN1256	421272

## 1.6 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24

## 1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 90(R)
- ♦ ANSI C63.26
- ♦ KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ KDB 412172 D01 Determining ERP and EIRP v01r01

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode


Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission. (X Plane)

Conducted Test Cases	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16 QAM	64 QAM	256 QAM	1	Half	Full	L	M	H
Max. Output Power	14	-	-	V	-	-	-	V	V			V			V	V	V
	14	-	-		V	-	-	V	V	V	V	V	V	V		V	
Peak-to-Average Ratio	14	-	-	V	V	-	-	V	V	V				V		V	
26dB and 99% Bandwidth	14	-	-	V	V	-	-	V	V					V		V	
Conducted Band Edge	14	-	-	V		-	-	V	V	V		V		V	V		V
	14	-	-		V	-	-	V	V	V		V		V		V	
Emission Mask	14	-	-	V		-	-	V	V	V		V		V	V	V	V
	14	-	-		V	-	-	V	V	V		V		V		V	
Conducted Spurious Emission	14	-	-	V		-	-	V				V			V	V	V
	14	-	-		V	-	-	V				V				V	
Frequency Stability	14	-	-		V	-	-	V						V		V	
E.R.P	14	-	-	V	-	-	-	V	V			V			V	V	V
	14	-	-		V	-	-	V	V	V	V	V	V	V		V	
Radiated Spurious Emission	14	-	-		V	-	-	V				V				V	
Note	<ol style="list-style-type: none"> <li>The mark "V" means that this configuration is chosen for testing</li> <li>The mark "-" means that this bandwidth is not supported.</li> <li>The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> <li>All test items are based on engineering evaluation.</li> <li>For QAM modulation mode, the whole testing has assessed 16QAM&amp;64QAM mode by referring to the higher conducted power</li> </ol>																



## 2.2 Connection Diagram of Test System

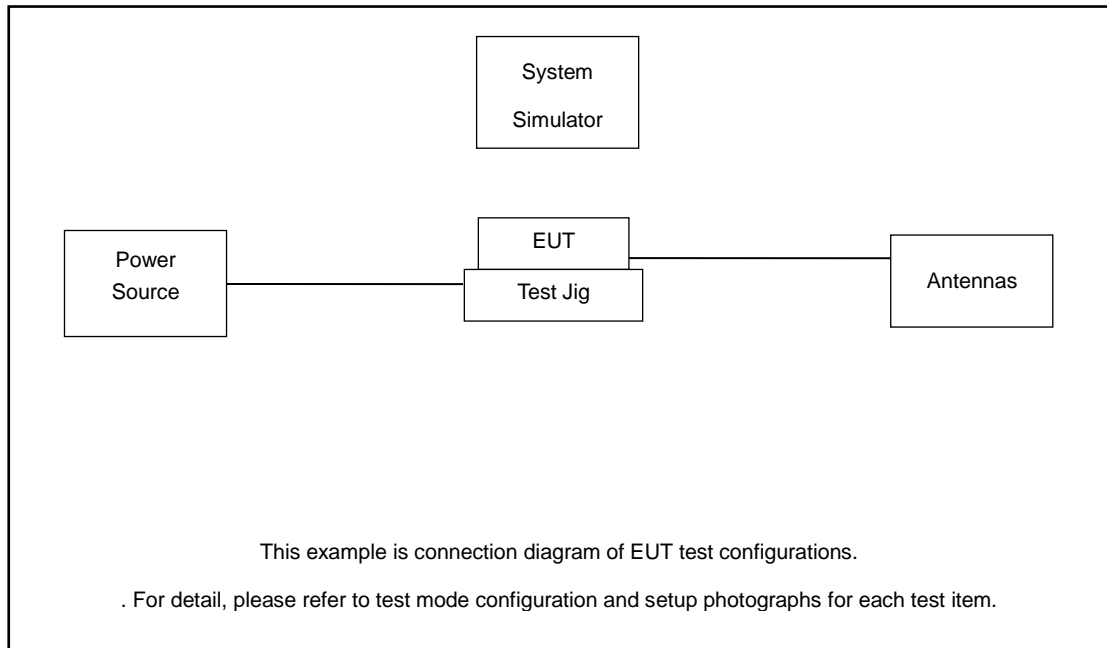

## 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
3.	Adapter(with cable)	N/A	N/A	N/A	N/A	N/A
4.	Test Jig	N/A	N/A	N/A	N/A	N/A
5.	Antenna	N/A	N/A	N/A	N/A	N/A

## 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.0 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.0 + 10 = 14.0 \text{ (dB)} \end{aligned}$$

## 2.5 Frequency List of Low/Middle/High Channels

LTE Band 14 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	23330	-
	Frequency	-	793	-
5	Channel	23305	23330	23355
	Frequency	790.5	793	795.5


### 3 Conducted Test Items

#### 3.1 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.1 Test Setup

##### 3.1.2 Conducted Output Power

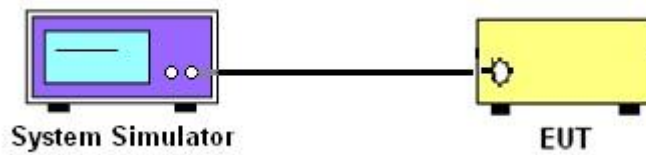

##### 3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge, Emission Mask, and Conducted Spurious Emission



##### 3.1.4 Frequency Stability



##### 3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

## **3.2 Conducted Output Power and ERP**

### **3.2.1 Description of the Conducted Output Power Measurement and ERP**

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 14.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

### **3.2.2 Test Procedures**

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

### 3.3 Peak-to-Average Ratio

#### 3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### 3.3.2 Test Procedures

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.

### **3.4 Occupied Bandwidth**

#### **3.4.1 Description of Occupied Bandwidth Measurement**

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

#### **3.4.2 Test Procedures**

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

## 3.5 Conducted Band Edge Measurement

### 3.5.1 Description of Conducted Band Edge Measurement

For operations in the 758-768 MHz and the 788-798 MHz bands

- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations.
- (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.
- (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least  $43 + 10 \log (P)$  dB.

### 3.5.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set spectrum analyzer with RMS detector.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from  $43 + 10 \log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10 \log(P)] \text{ (dB)}$   
 $= [30 + 10 \log(P)] \text{ (dBm)} - [43 + 10 \log(P)] \text{ (dB)} = -13 \text{ dBm}.$

## 3.6 Emission Mask

### 3.6.1 Description of Emission Mask

<Emission Mask B>.

For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least  $43 + 10 \log (P)$  dB.

### 3.6.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.  
The path loss was compensated to the results for each measurement.
4. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
5. Set spectrum analyzer with RMS detector.
6. Taking the record of maximum spurious emission.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
 $= -13$  dBm.



## 3.7 Conducted Spurious Emission Measurement

### 3.7.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30MHz up to a frequency including its 10<sup>th</sup> harmonic.

### 3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and base station via power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's, for under 1GHz RBW = 100kHz, VBW = 300kHz and for above 1GHz RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. Set spectrum analyzer with RMS detector.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
=  $P(W) - [43 + 10\log(P)]$  (dB)  
=  $[30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
= -13dBm.

### **3.8 Frequency Stability Measurement**

#### **3.8.1 Description of Frequency Stability Measurement**

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 1.25$  ppm of the center frequency.

#### **3.8.2 Test Procedures for Temperature Variation**

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### **3.8.3 Test Procedures for Voltage Variation**

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments

See list of measuring instruments of this test report.

### 4.2 Test Setup


#### 4.2.1 For radiated test below 30MHz

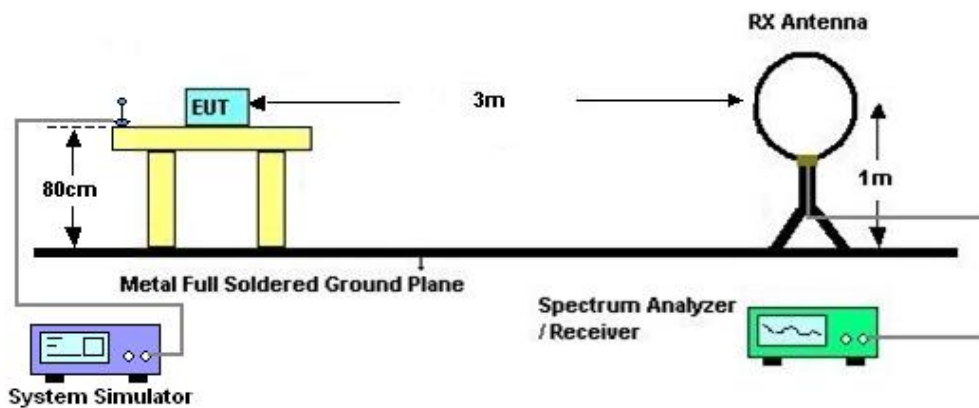

#### 4.2.2 For radiated test from 30MHz to 1GHz



#### 4.2.3 For radiated test above 1GHz

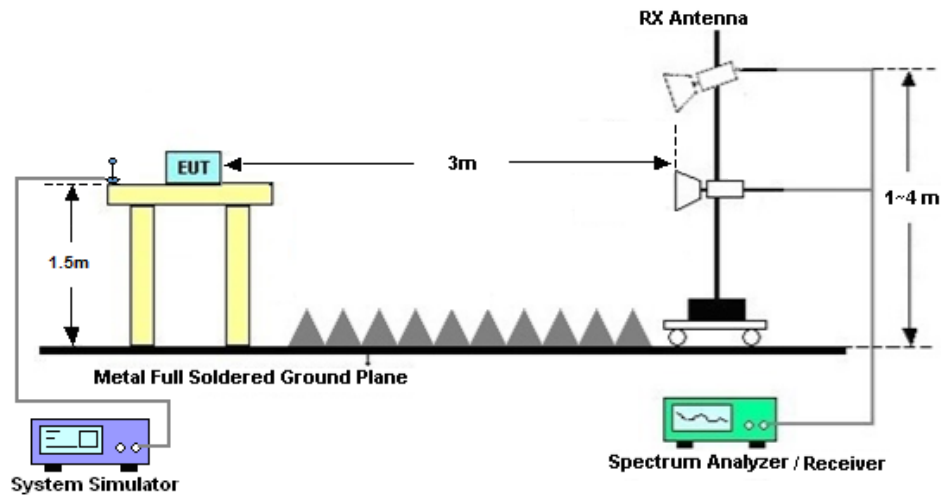

### 4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

## 4.4 Radiated Spurious Emission Measurement

### 4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

### 4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11.  $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$

## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Aug. 28, 2024~ Sep. 03, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct. 16, 2023	Aug. 28, 2024~ Sep. 03, 2024	Oct. 15, 2024	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2023	Aug. 28, 2024~ Sep. 03, 2024	Dec. 24, 2024	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 03, 2024	Aug. 28, 2024~ Sep. 03, 2024	Jul. 02, 2025	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 27, 2023	Sep. 04, 2024	Dec. 26, 2024	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 29, 2023	Sep. 04, 2024	Dec. 28, 2024	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 18, 2023	Sep. 04, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Oct. 24, 2023	Sep. 04, 2024	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Sep. 04, 2024	Jul. 03, 2025	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 09, 2024	Sep. 04, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 09, 2024	Sep. 04, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Sep. 04, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 03, 2024	Sep. 04, 2024	Jul. 02, 2025	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Oct. 18, 2023	Sep. 04, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Sep. 04, 2024	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Sep. 04, 2024	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

## 6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Peak to Average Ratio	±1.34 dB
Frequency Stability	±1.3 Hz

### Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.48 dB
---	---------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.53 dB
---	---------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.02 dB
---	---------

----- THE END -----

## Appendix A. Test Results of Conducted Test

Test Engineer :	Khan Zhen	Temperature :	22~23°C
		Relative Humidity :	40~42%

### Conducted Output Power(Average power) and ERP

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP(W)		
Channel				23330					
Frequency (MHz)				793					
10	QPSK	1	0		22.93			0.1483	
10	QPSK	1	25		22.91			0.1476	
10	QPSK	1	49		22.84			0.1452	
10	QPSK	25	0		21.97			0.1189	
10	QPSK	25	12		21.95			0.1183	
10	QPSK	25	25		21.88			0.1164	
10	QPSK	50	0		21.94			0.1180	
10	16QAM	1	0		22.16			0.1242	
10	64QAM	1	0		21.18			0.0991	
10	256QAM	1	0		18.15			0.0493	
Channel				23305	23330	23355	ERP(W)		
Frequency (MHz)				790.5	793	795.5	L	M	H
5	QPSK	1	0	22.79	22.84	22.84	0.1435	0.1452	0.1452
5	16QAM	1	0	22.11	22.09	22.03	0.1227	0.1222	0.1205




## LTE Band 14

### Peak-to-Average Ratio

Mode	LTE Band 14 / 5MHz			
Mod.	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Result
Middle CH	5.39	6.38	6.87	PASS
Mode	LTE Band 14 / 10MHz			
Mod.	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Result
Middle CH	5.36	6.26	6.72	PASS


LTE Band 14 / 5MHz / QPSK

Middle Channel / Full RB

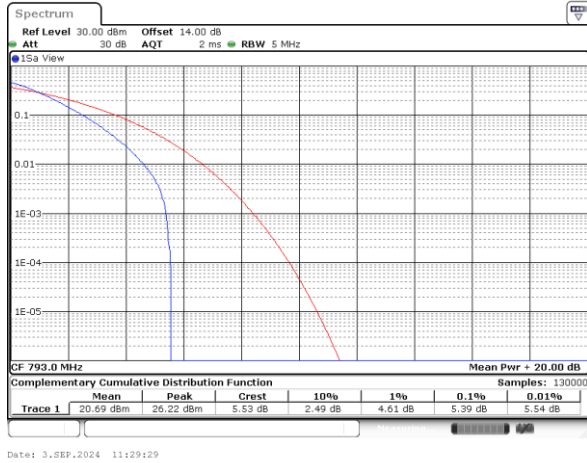


LTE Band 14 / 5MHz / 16QAM

Middle Channel / Full RB

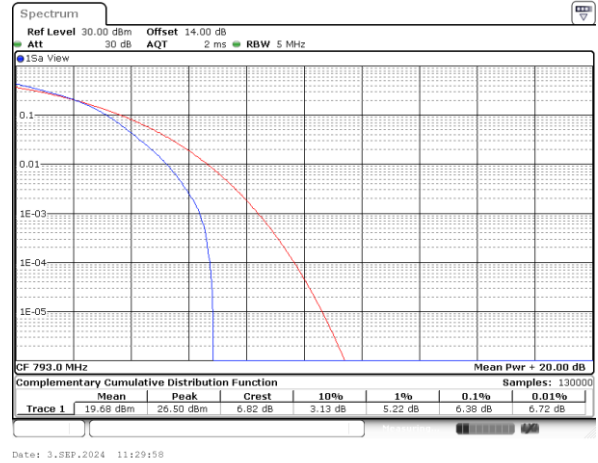


LTE Band 14 / 5MHz / 64QAM

Middle Channel / Full RB

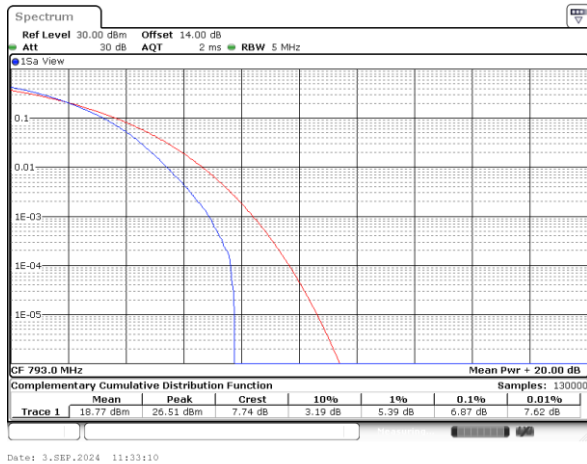

LTE Band 14 / 10MHz / QPSK


Middle Channel / Full RB

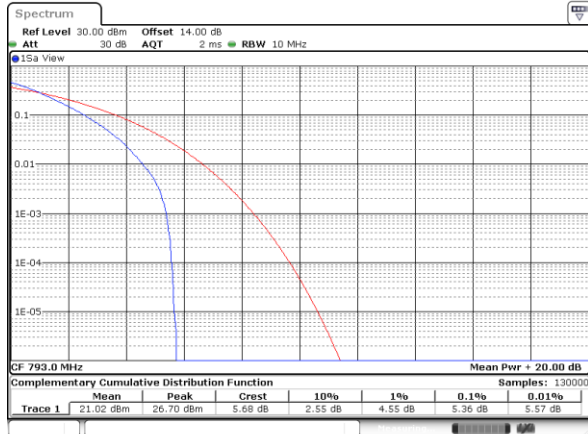

Date: 28.AUG.2024 12:04:53

LTE Band 14 / 10MHz / 16QAM


Middle Channel / Full RB

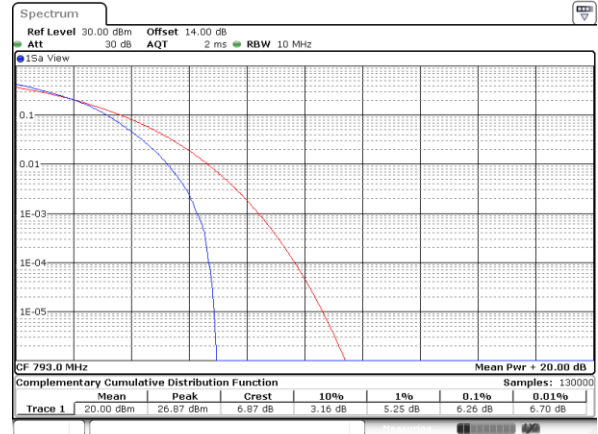

Date: 28.AUG.2024 12:05:23

LTE Band 14 / 10MHz / 64QAM

Middle Channel / Full RB

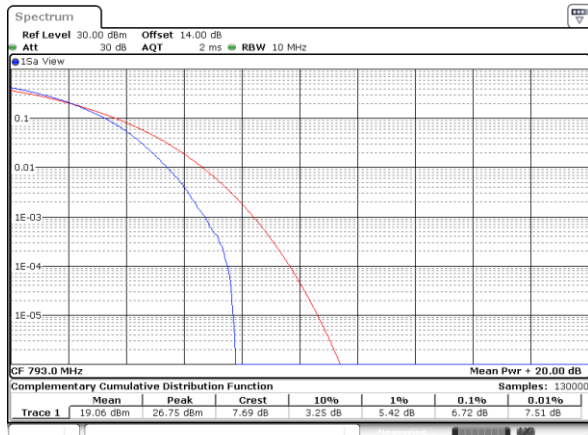

Date: 28.AUG.2024 12:05:53


## 26dB Bandwidth

Mode	LTE Band 14 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	-	-	-	-	5.06	5.09	9.75	9.83	-	-	-	-




## LTE Band 14


## Middle Channel / 5MHz / QPSK

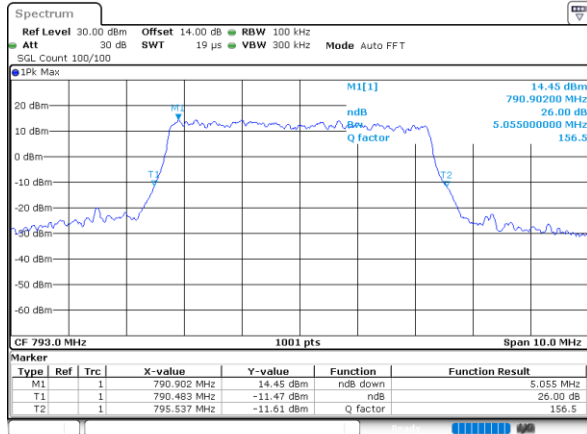


## Middle Channel / 5MHz / 16QAM

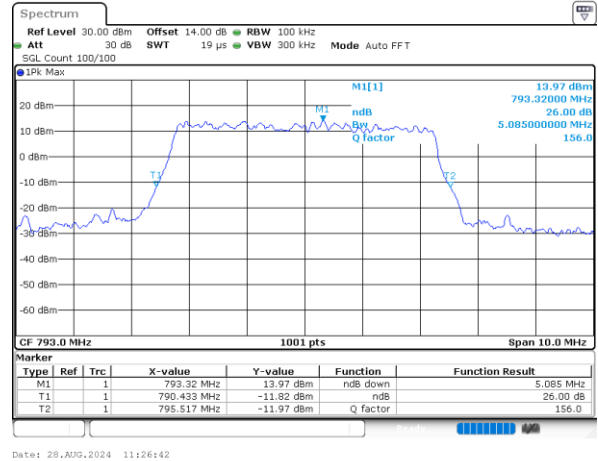

## Middle Channel / 10MHz / QPSK

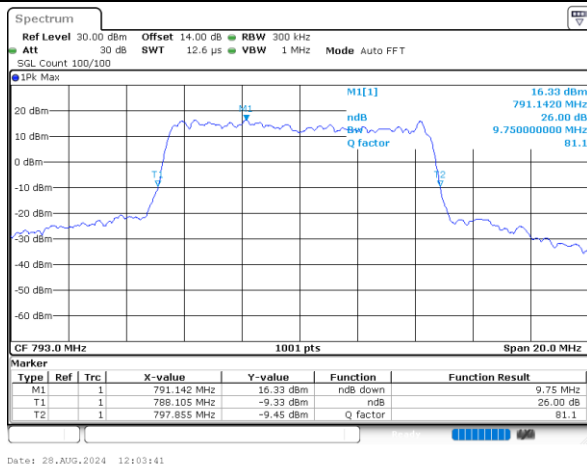

## Middle Channel / 10MHz / 16QAM

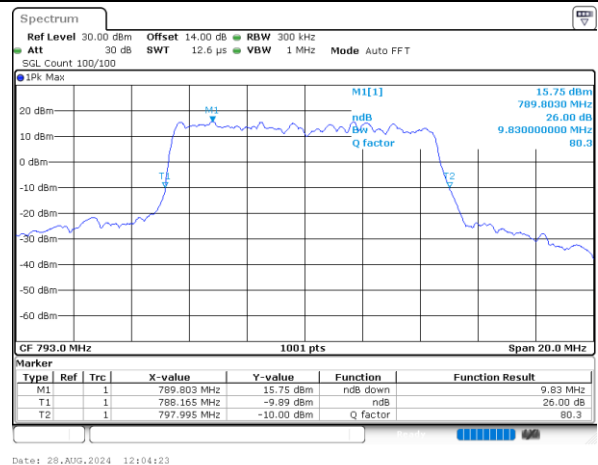


## Occupied Bandwidth

Mode	LTE Band 14 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	-	-	-	-	4.48	4.50	9.07	9.01	-	-	-	-




## LTE Band 14


## Middle Channel / 5MHz / QPSK

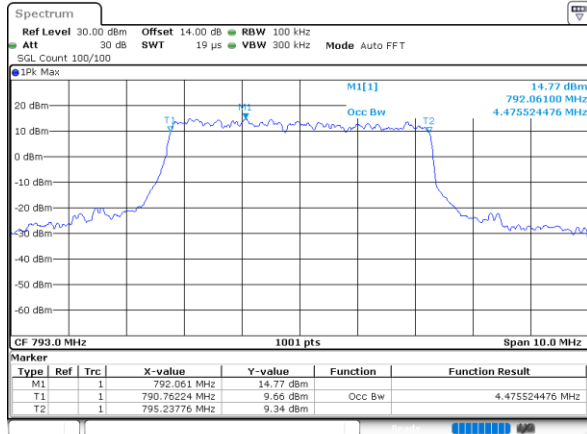


## Middle Channel / 5MHz / 16QAM

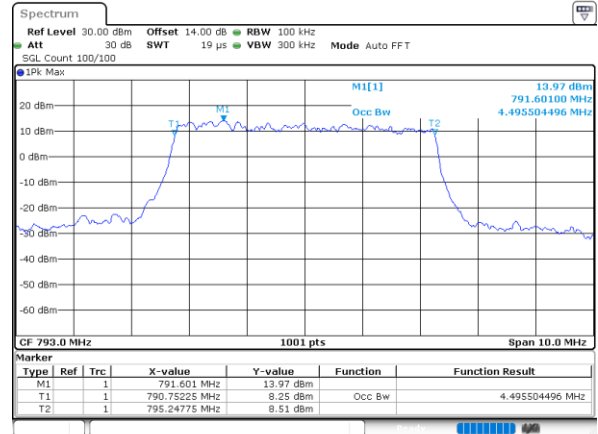

## Middle Channel / 10MHz / QPSK

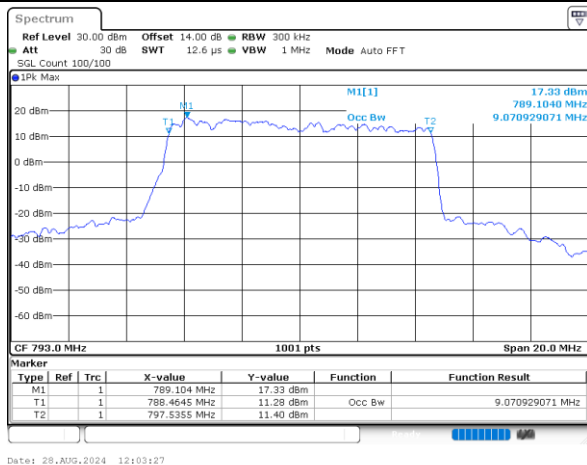

## Middle Channel / 10MHz / 16QAM

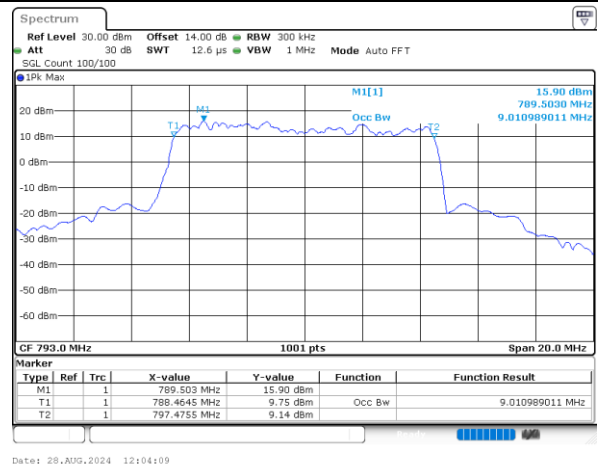





# Conducted Band Edge

## LTE Band 14 / 5MHz / QPSK


### Lowest Band Edge / 1 RB

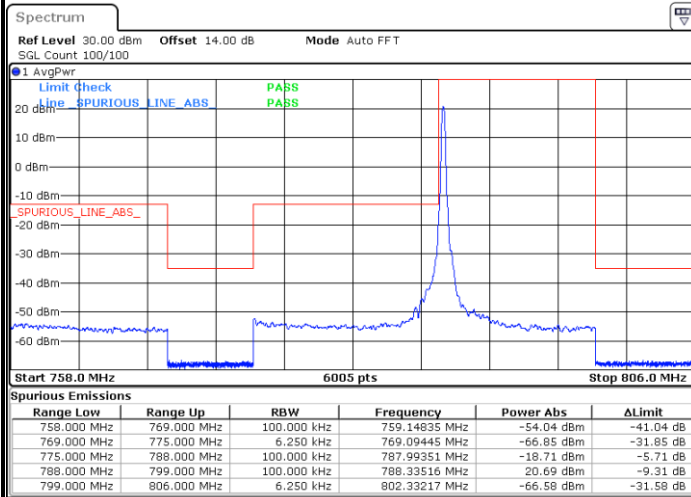


### Highest Band Edge / 1 RB

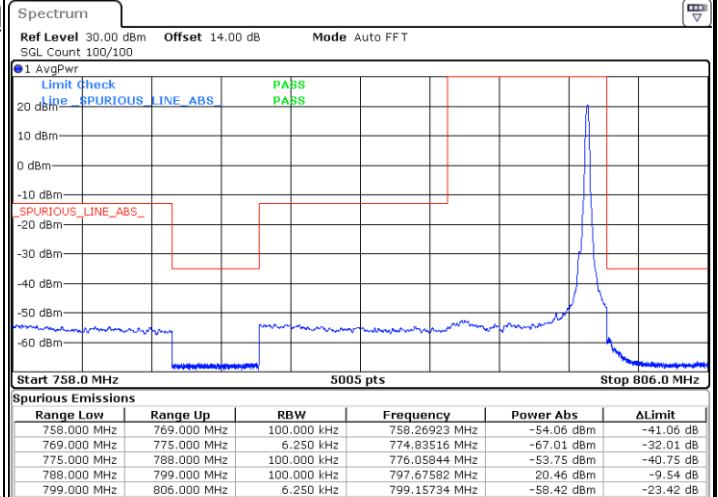

### Lowest Band Edge / Full RB

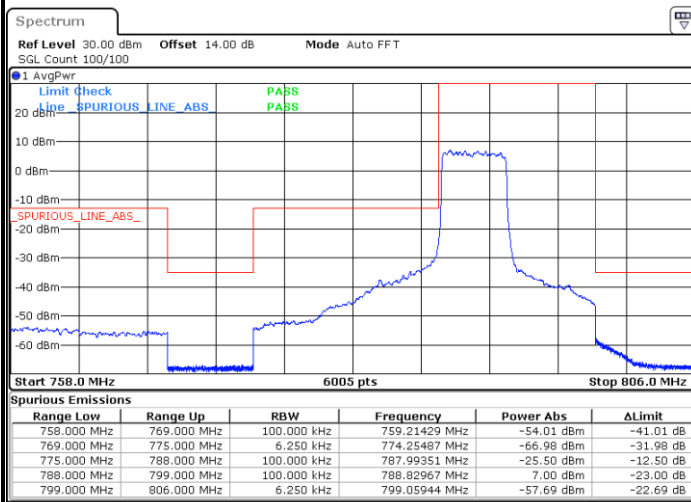

### Highest Band Edge / Full RB

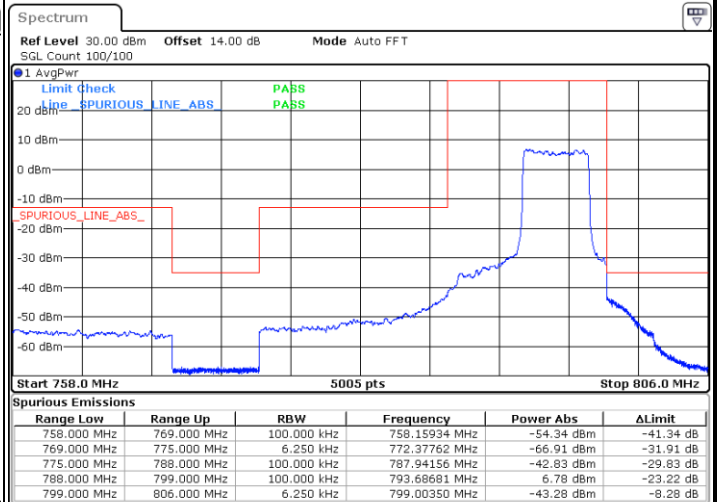






## LTE Band 14 / 5MHz / 16QAM


## Lowest Band Edge / 1 RB

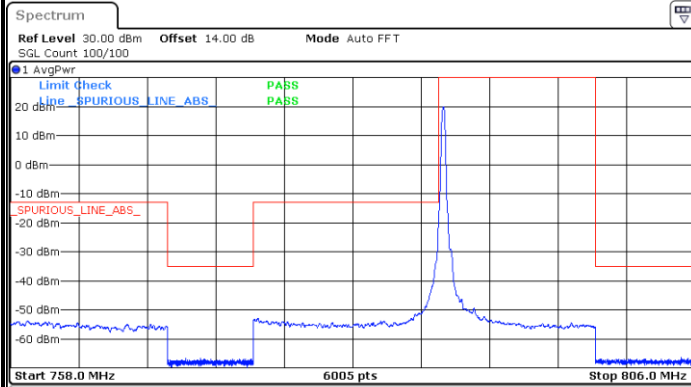

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
758.000 MHz	769.000 MHz	100.000 kHz	759.17033 MHz	-53.80 dBm	-40.80 dB
769.000 MHz	775.000 MHz	6.250 kHz	770.25487 MHz	-66.61 dBm	-31.61 dB
775.000 MHz	788.000 MHz	100.000 kHz	787.99351 MHz	-20.52 dBm	-7.52 dB
788.000 MHz	799.000 MHz	100.000 kHz	788.35714 MHz	19.90 dBm	-10.10 dB
799.000 MHz	806.000 MHz	6.250 kHz	805.02448 MHz	-66.52 dBm	-31.52 dB

Date: 28.AUG.2024 10:58:12


## Highest Band Edge / 1 RB

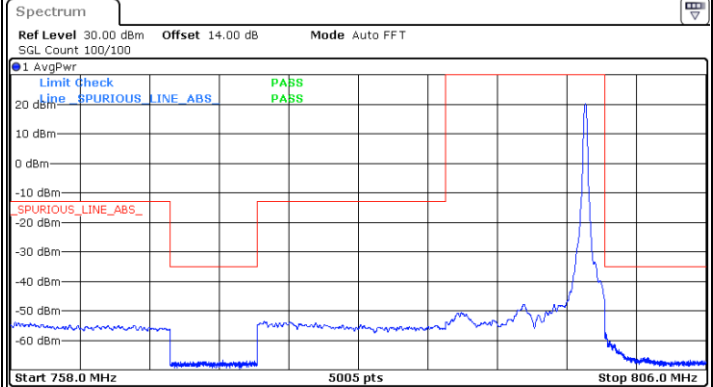

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
758.000 MHz	769.000 MHz	100.000 kHz	758.31319 MHz	-53.74 dBm	-40.74 dB
769.000 MHz	775.000 MHz	6.250 kHz	772.62338 MHz	-66.79 dBm	-31.79 dB
775.000 MHz	788.000 MHz	100.000 kHz	775.48701 MHz	-53.61 dBm	-40.61 dB
788.000 MHz	799.000 MHz	100.000 kHz	797.67582 MHz	20.03 dBm	-9.97 dB
799.000 MHz	806.000 MHz	6.250 kHz	799.05245 MHz	-57.57 dBm	-22.57 dB

Date: 28.AUG.2024 11:28:19


## Lowest Band Edge / Full RB

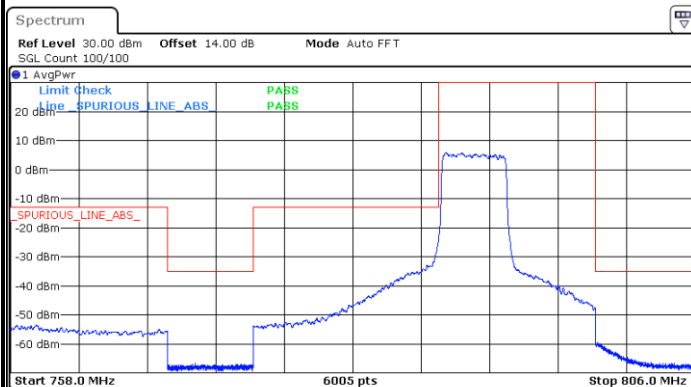

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
758.000 MHz	769.000 MHz	100.000 kHz	759.80769 MHz	-53.58 dBm	-40.58 dB
769.000 MHz	775.000 MHz	6.250 kHz	770.95952 MHz	-66.85 dBm	-31.85 dB
775.000 MHz	788.000 MHz	100.000 kHz	787.99351 MHz	-24.77 dBm	-11.77 dB
788.000 MHz	799.000 MHz	100.000 kHz	788.52198 MHz	5.96 dBm	-24.04 dB
799.000 MHz	806.000 MHz	6.250 kHz	799.01748 MHz	-59.45 dBm	-24.45 dB

Date: 28.AUG.2024 11:00:38

## Highest Band Edge / Full RB

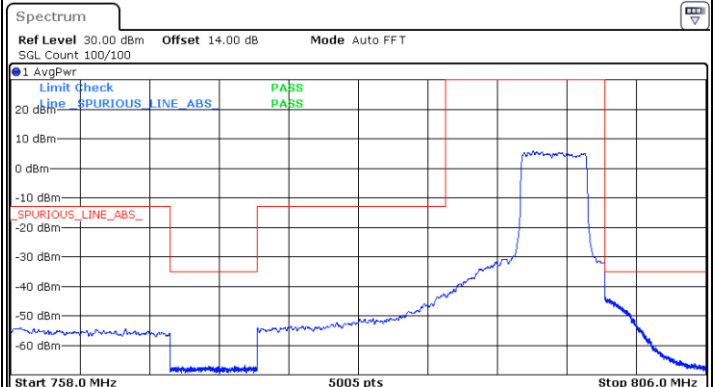


Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
758.000 MHz	769.000 MHz	100.000 kHz	758.65385 MHz	-54.28 dBm	-41.28 dB
769.000 MHz	775.000 MHz	6.250 kHz	774.16384 MHz	-66.77 dBm	-31.77 dB
775.000 MHz	788.000 MHz	100.000 kHz	787.88961 MHz	-42.56 dBm	-29.56 dB
788.000 MHz	799.000 MHz	100.000 kHz	794.07143 MHz	5.84 dBm	-24.16 dB
799.000 MHz	806.000 MHz	6.250 kHz	799.01748 MHz	-43.75 dBm	-8.75 dB

Date: 28.AUG.2024 11:30:45




## LTE Band 14 / 5MHz / 64QAM


## Lowest Band Edge / 1 RB

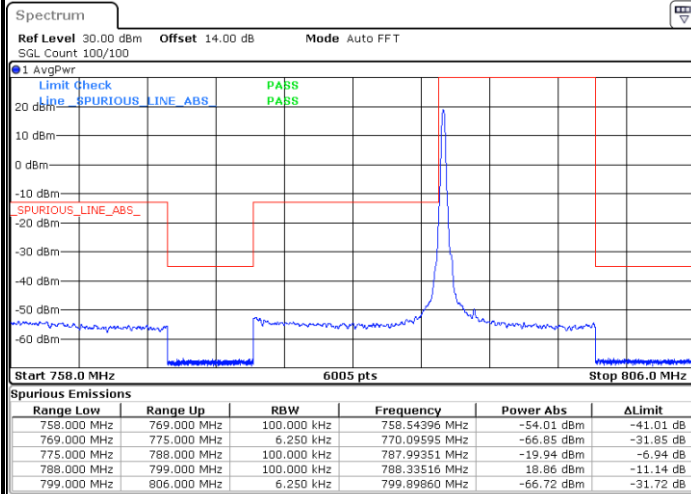


## Highest Band Edge / 1 RB

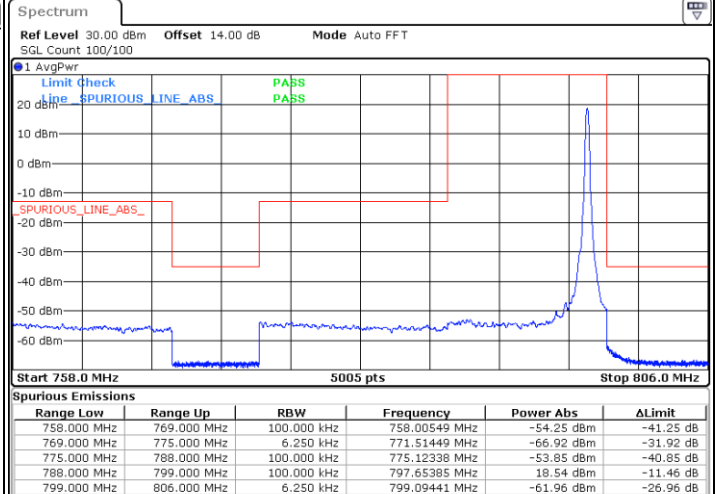

## Lowest Band Edge / Full RB

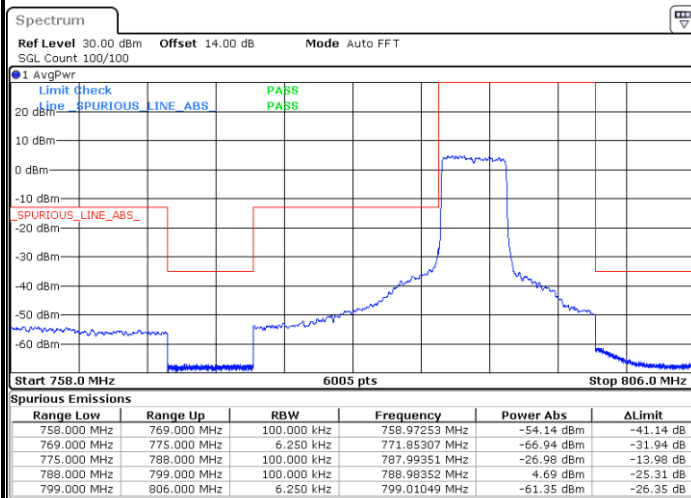


## Highest Band Edge / Full RB

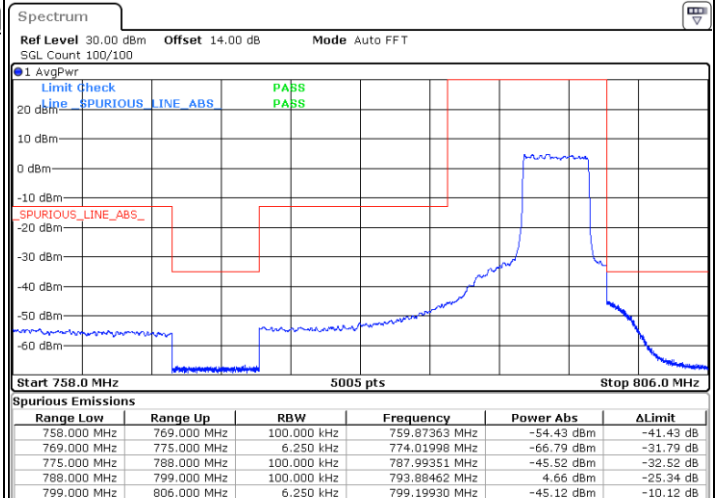



## LTE Band 14 / 10MHz / QPSK


## Band Edge / Full RB

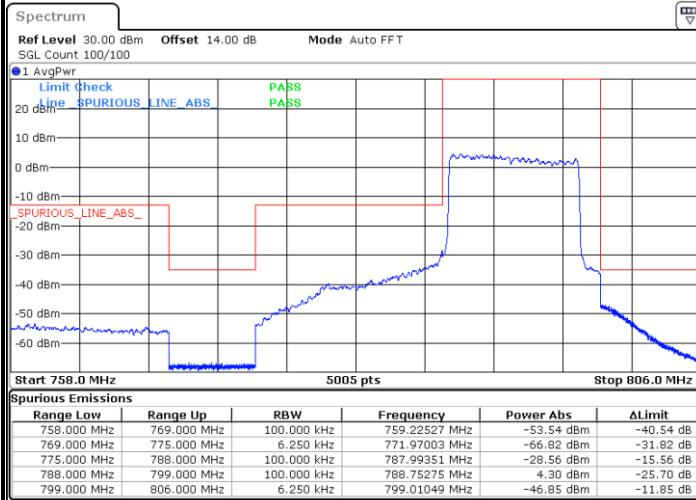

Date: 28.AUG.2024 11:49:21

## LTE Band 14 / 10MHz / 16QAM


## Band Edge / Full RB

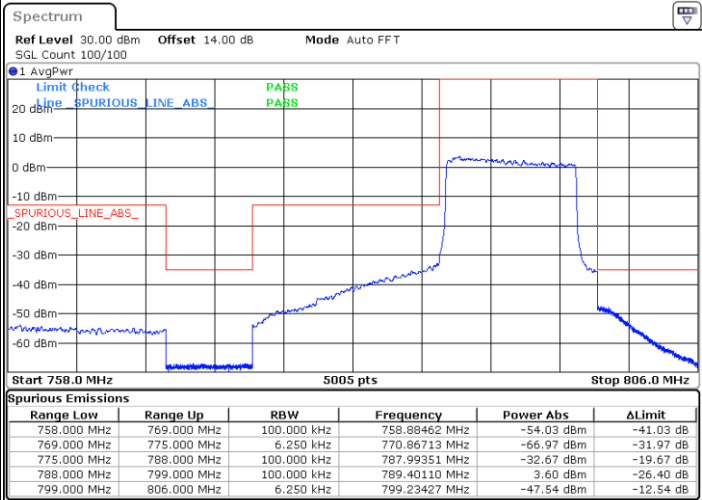

Date: 28.AUG.2024 11:50:09

## LTE Band 14 / 10MHz / 64QAM

## Band Edge / Full RB

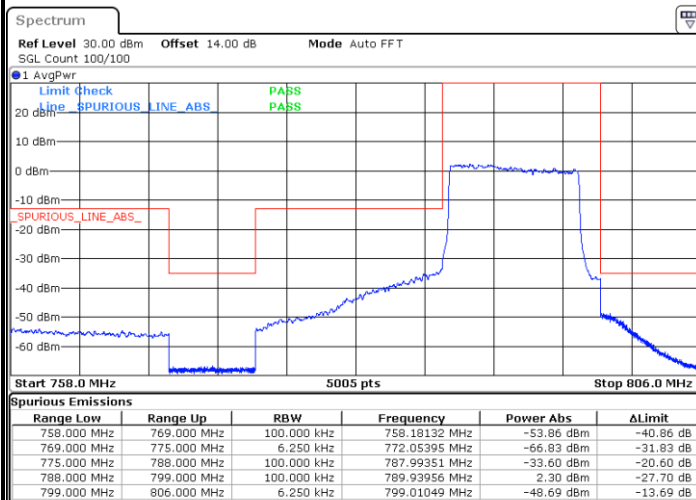


Date: 28.AUG.2024 11:50:58



## LTE Band 14 / 10MHz / QPSK


## Band Edge / 1 RB0

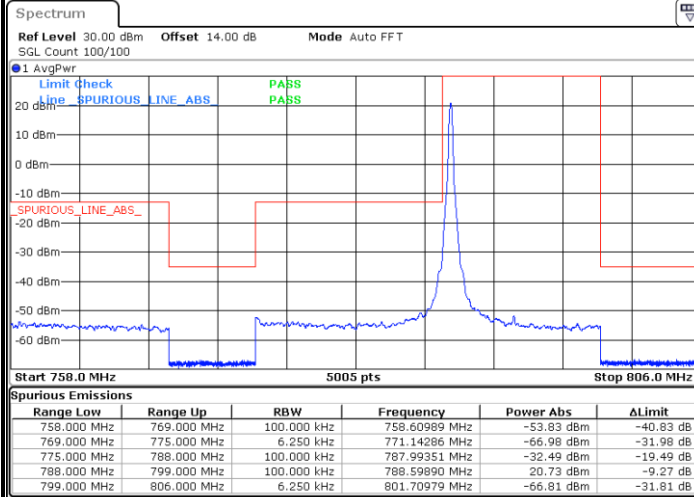

Date: 28.AUG.2024 11:44:32

## LTE Band 14 / 10MHz / 16QAM


## Band Edge / 1 RB0

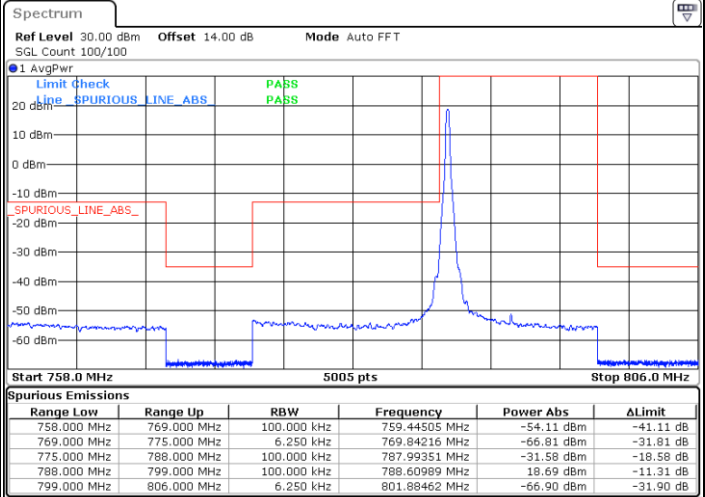

Date: 28.AUG.2024 11:45:21

## LTE Band 14 / 10MHz / 64QAM

## Band Edge / 1 RB0

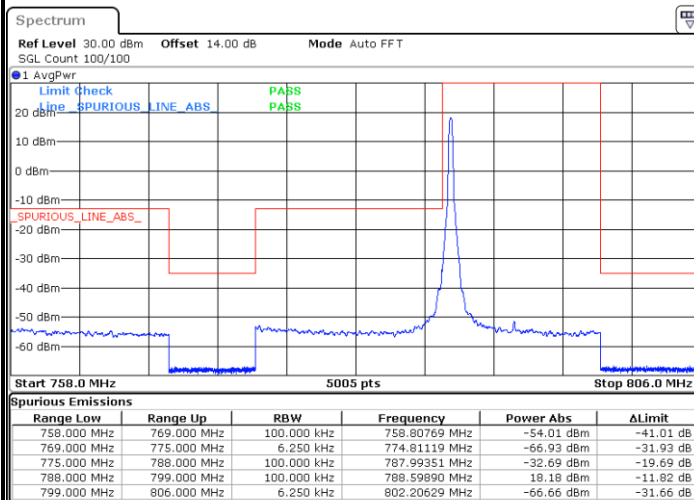


Date: 28.AUG.2024 11:46:09



## LTE Band 14 / 10MHz / QPSK


## Band Edge / 1 RBmax

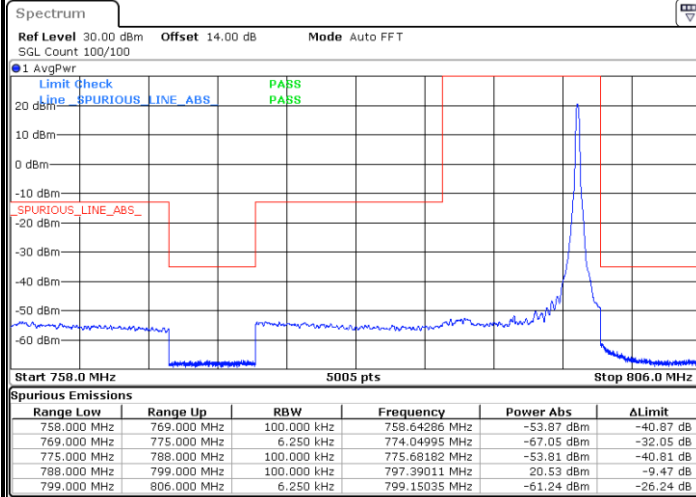

Date: 28.AUG.2024 11:48:33

## LTE Band 14 / 10MHz / 16QAM


## Band Edge / 1 RBmax

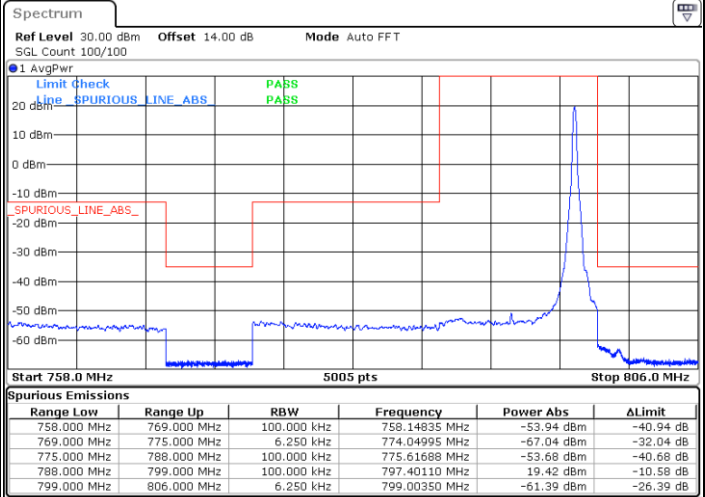

Date: 28.AUG.2024 11:47:45

## LTE Band 14 / 10MHz / 64QAM

## Band Edge / 1 RBmax

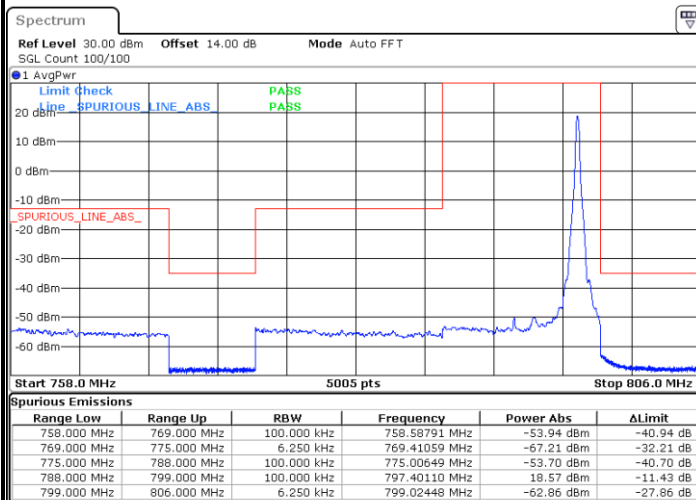


Date: 28.AUG.2024 11:46:57




# Conducted Spurious Emission

## LTE Band 14 / 5MHz


### Lowest Channel / QPSK

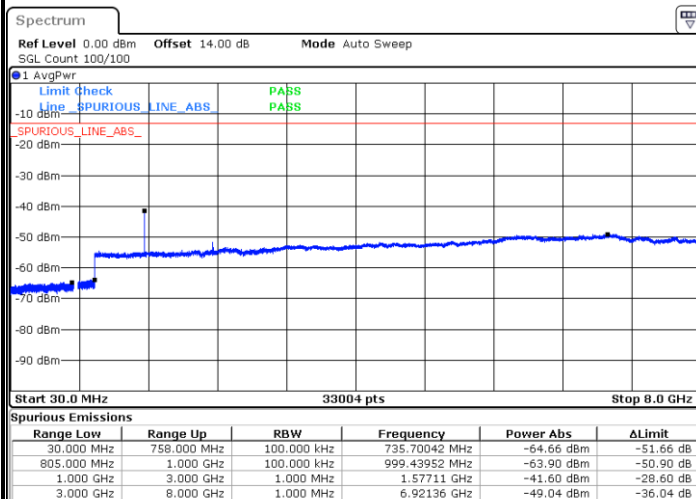

### Middle Channel / QPSK

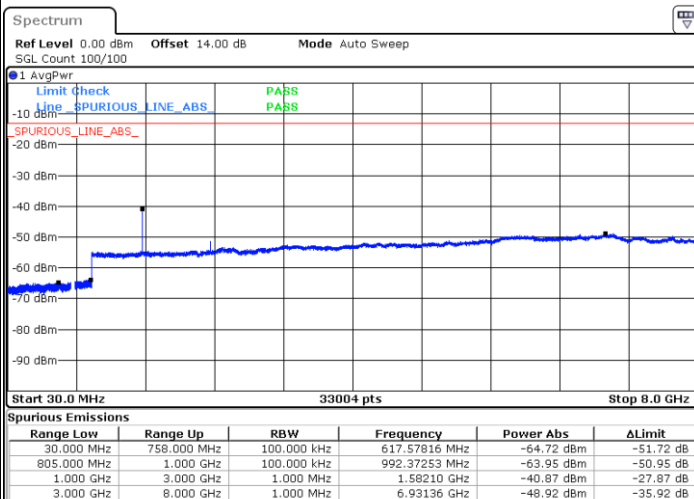


### Highest Channel / QPSK

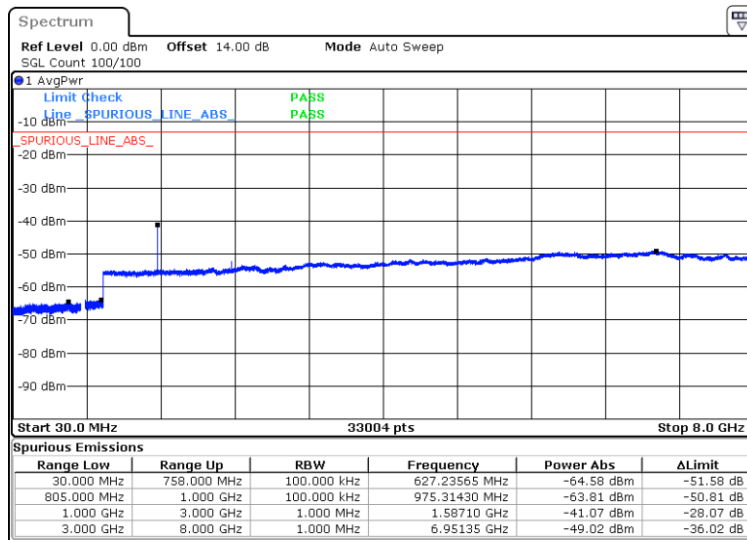



LTE Band 14 / 10MHz

Middle Channel / QPSK

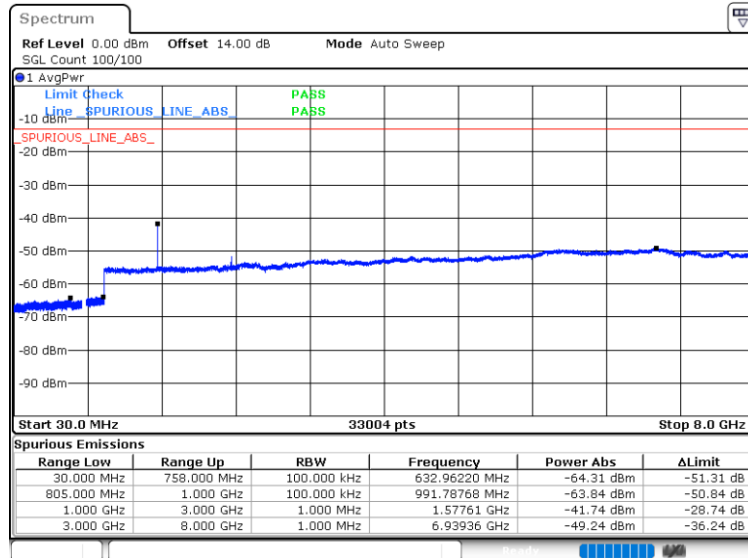


Date: 28.AUG.2024 12:02:57




## Mask

## LTE Band 14 / 5MHz / QPSK

## Lowest Channel / 1RB

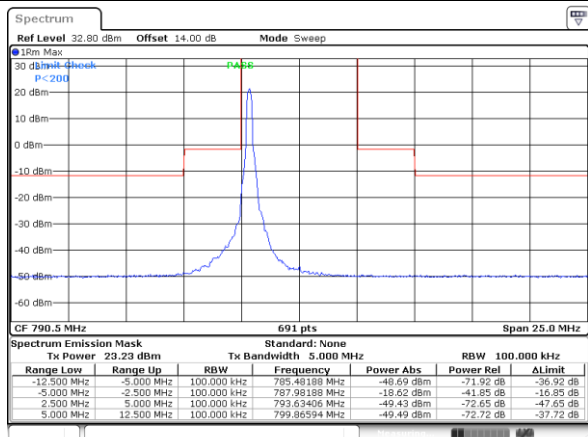


Date: 28.AUG.2024 11:02:40

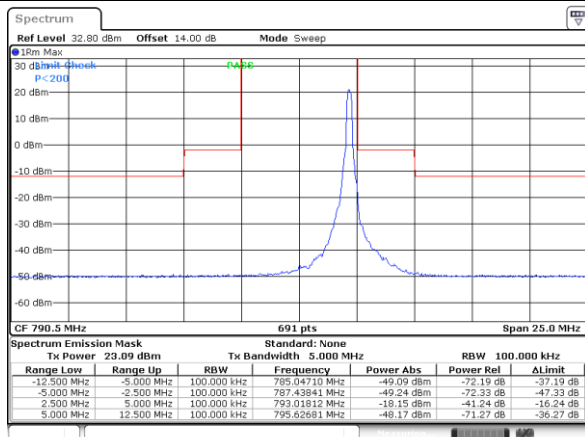

Date: 28.AUG.2024 11:06:17

## Lowest Channel / Full RB


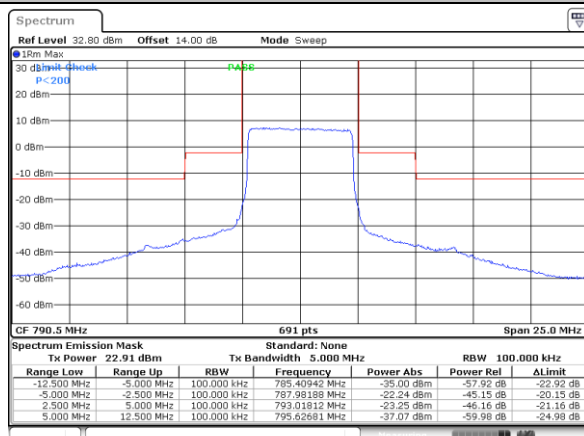


Date: 28.AUG.2024 11:09:55




## LTE Band 14 / 5MHz / 16QAM

### Lowest Channel / 1RB

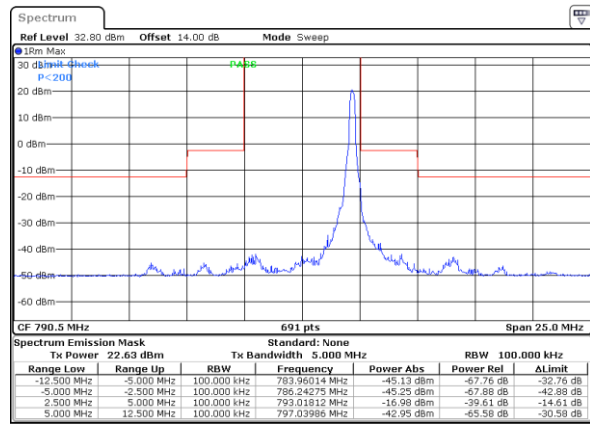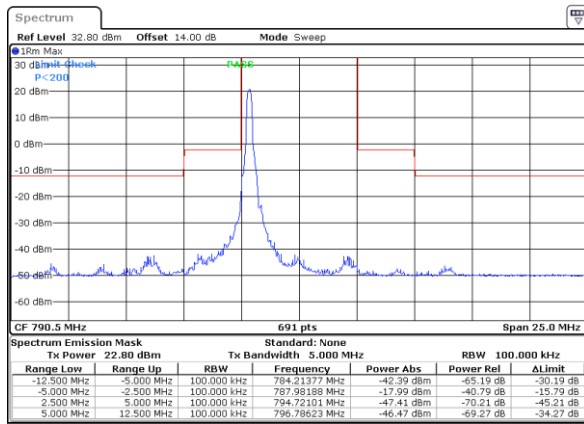


### Lowest Channel / Full RB

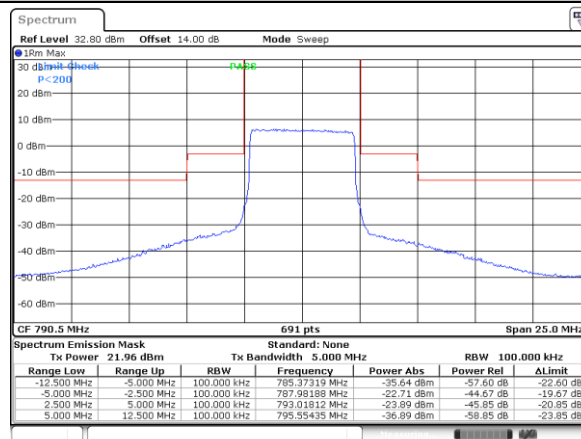




LTE Band 14 / 5MHz / 64QAM

Lowest Channel / 1RB

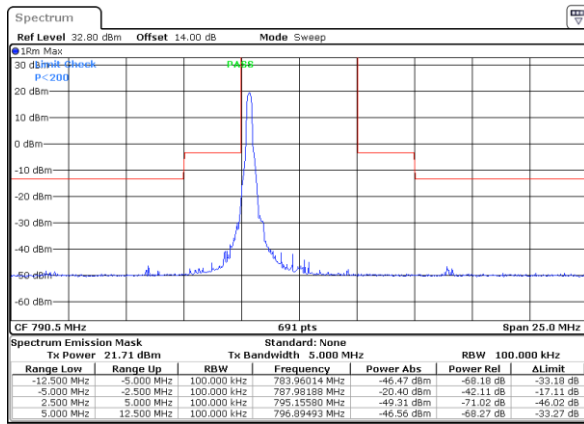


Date: 28.AUG.2024 11:05:05

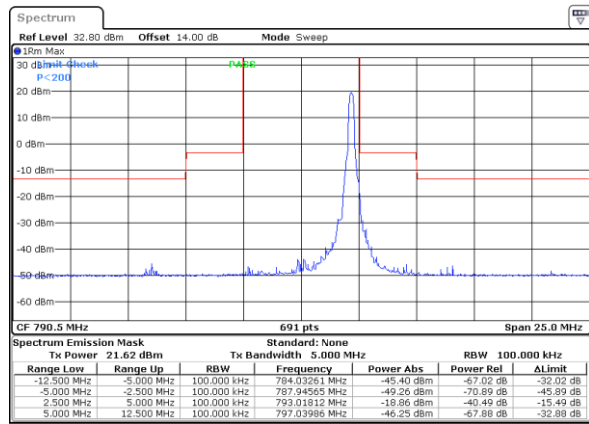

Date: 28.AUG.2024 11:08:42



Lowest Channel / Full RB

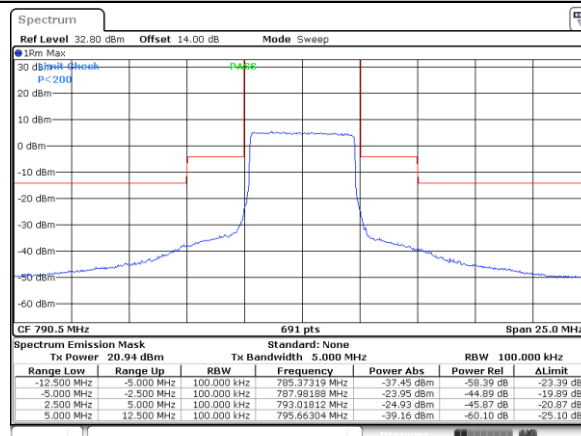


Date: 28.AUG.2024 11:12:19

## LTE Band 14 / 5MHz / QPSK

### Middle Channel / 1RB

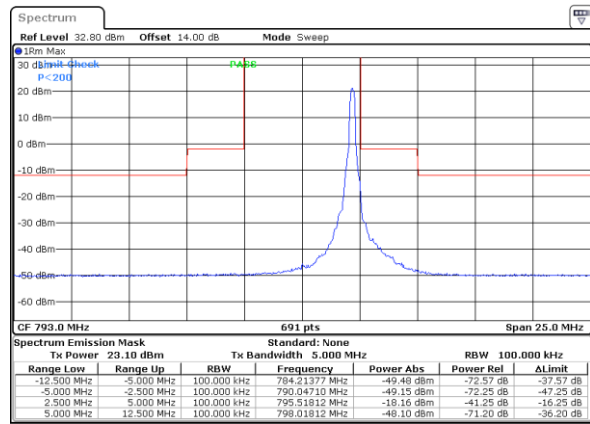
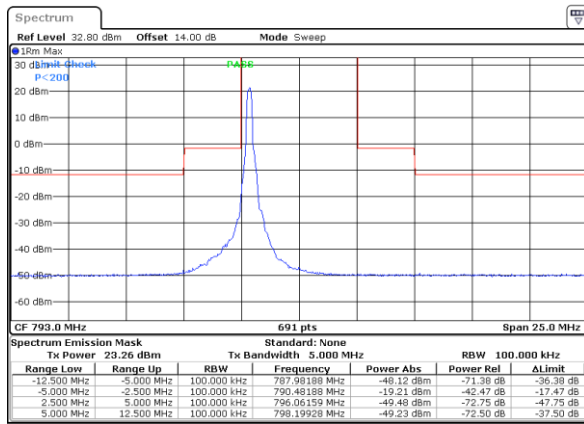


### Middle Channel / Full RB

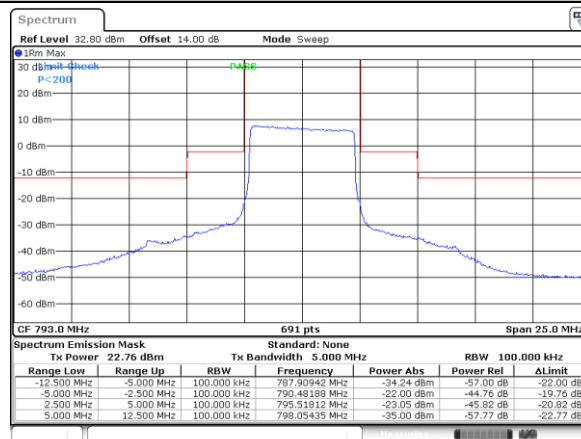


## LTE Band 14 / 5MHz / 16QAM

### Middle Channel / 1RB

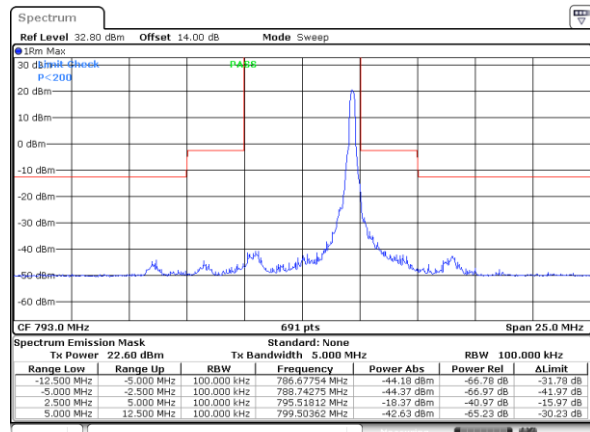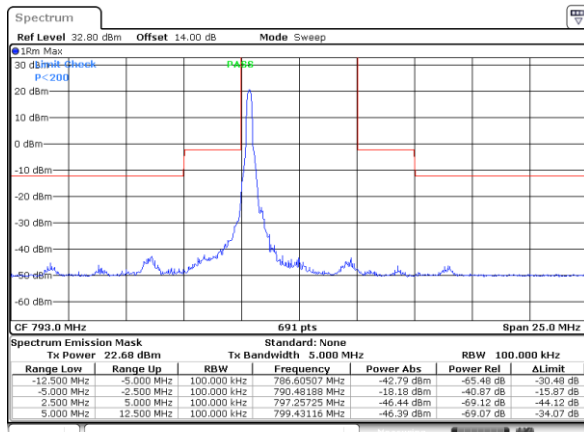


### Middle Channel / Full RB

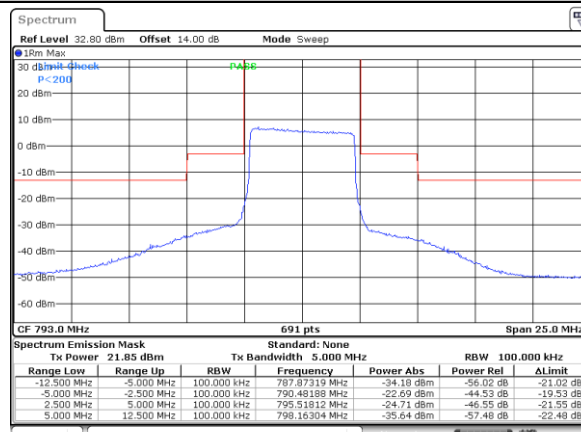


## LTE Band 14 / 5MHz / 64QAM

### Middle Channel / 1RB

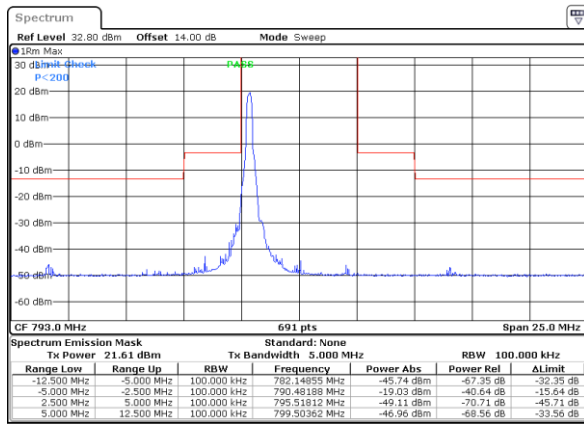


Date: 28.AUG.2024 11:18:06

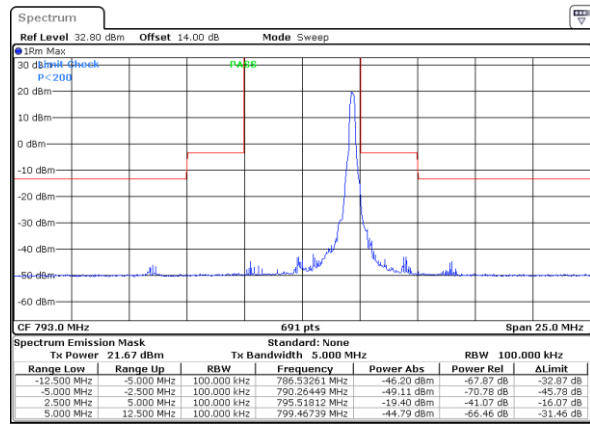

Date: 28.AUG.2024 11:21:41



### Middle Channel / Full RB

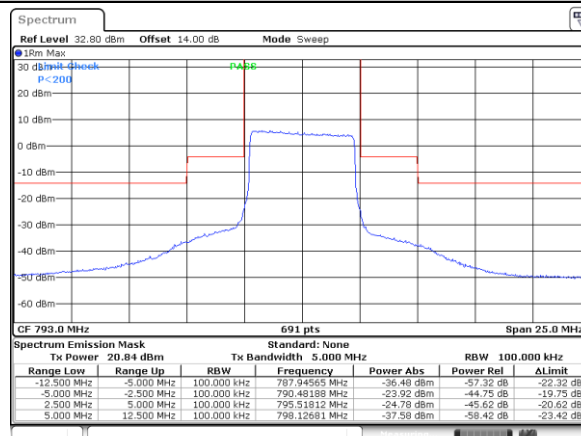


Date: 28.AUG.2024 11:25:17

## LTE Band 14 / 5MHz / QPSK

### Highest Channel / 1RB

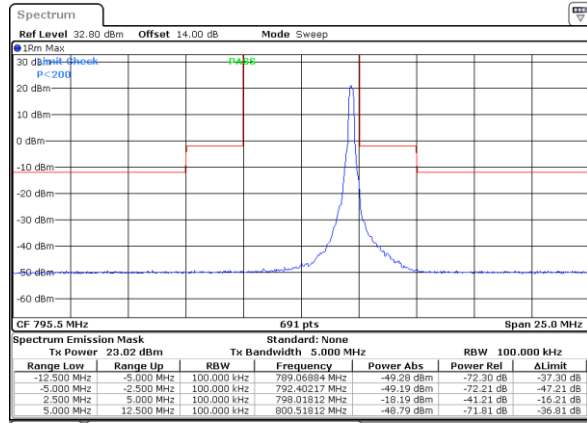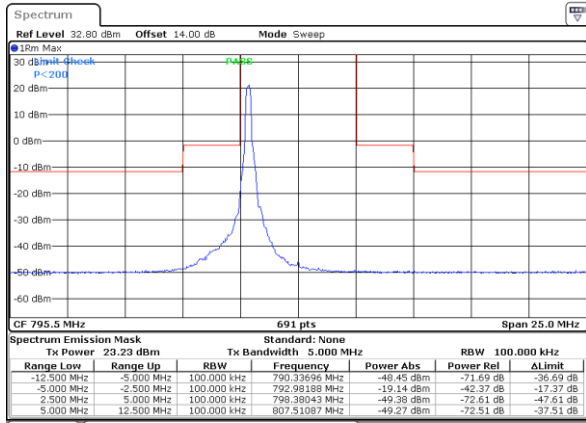


### Highest Channel / Full RB

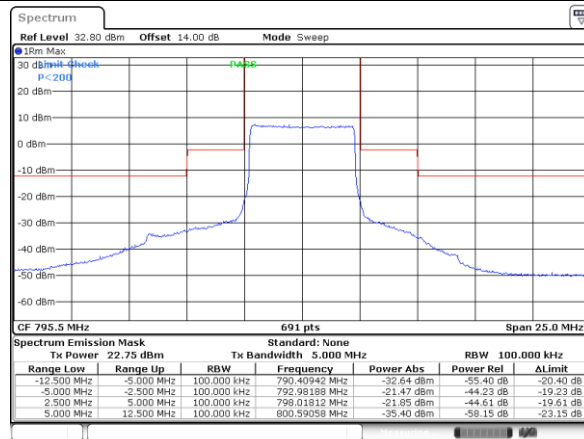


## LTE Band 14 / 5MHz / 16QAM

### Highest Channel / 1RB

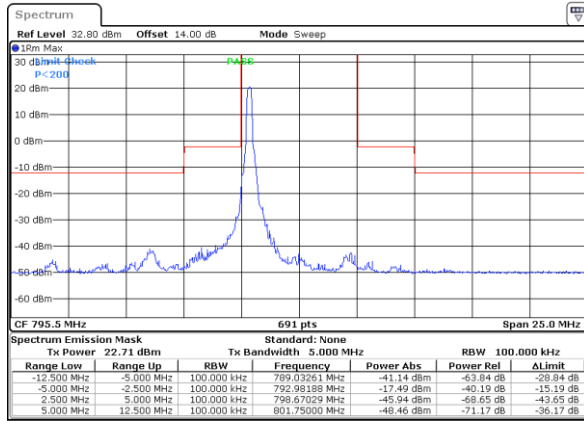


Date: 28.AUG.2024 11:33:59

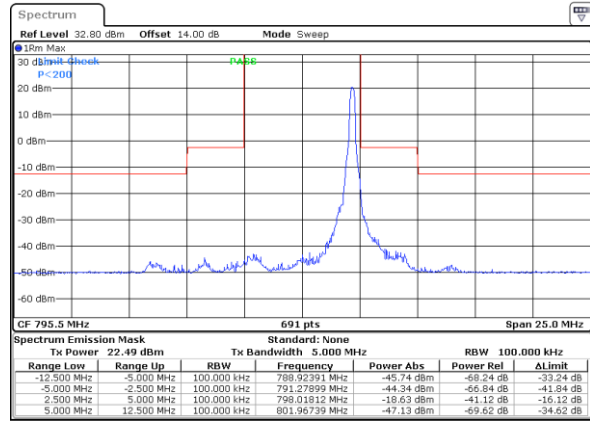

Date: 28.AUG.2024 11:37:37



### Highest Channel / Full RB

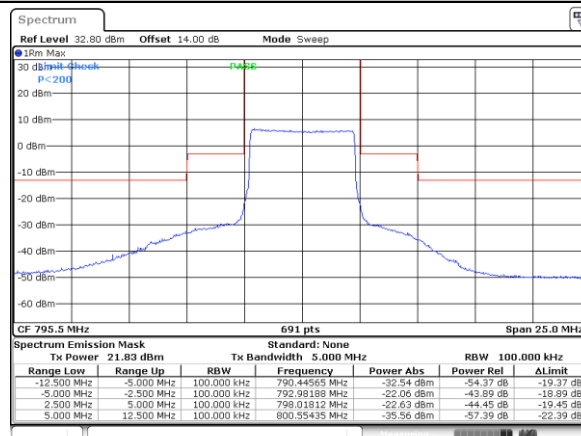


Date: 28.AUG.2024 11:41:14

## LTE Band 14 / 5MHz / 64QAM

### Highest Channel / 1RB

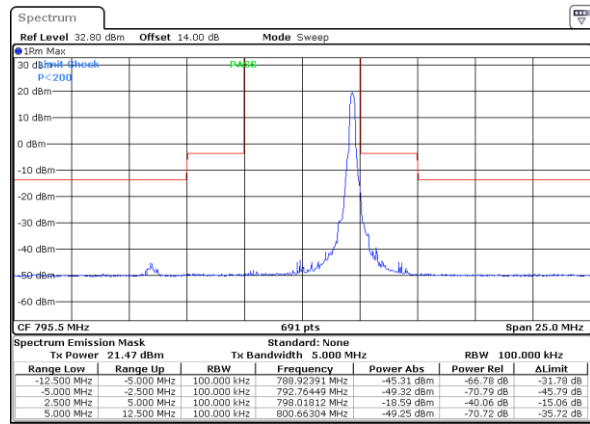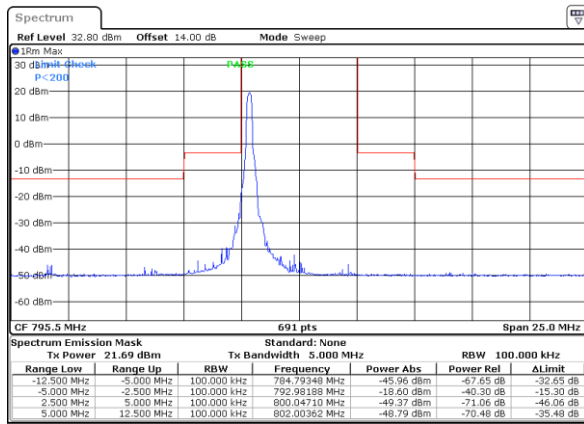



### Highest Channel / Full RB

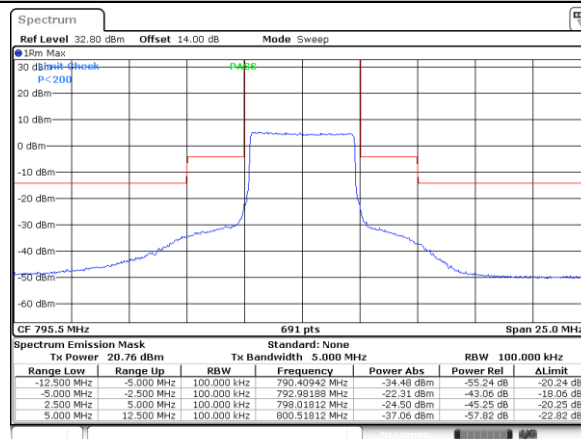




## LTE Band 14 / 10MHz / QPSK

### Middle Channel / 1RB

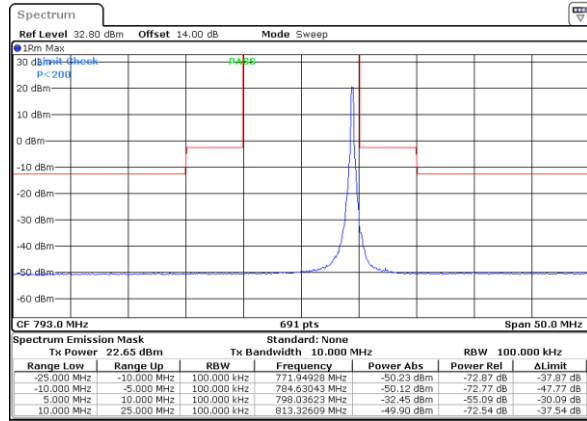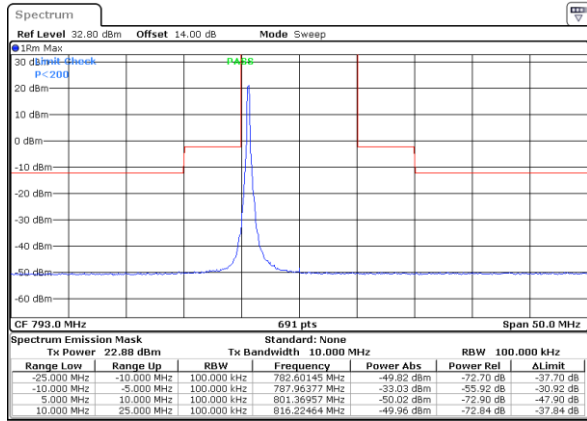


### Middle Channel / Full RB

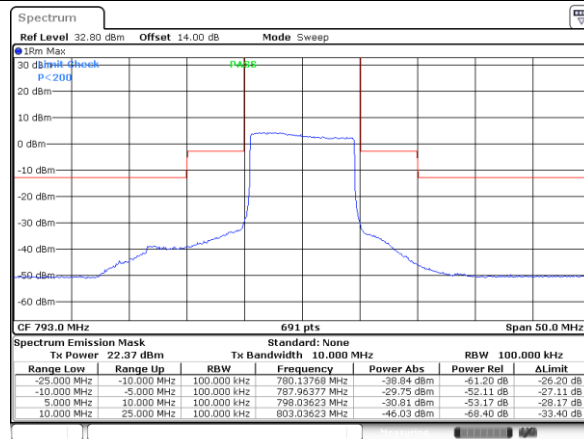




LTE Band 14 / 10MHz / 16QAM

Middle Channel / 1RB

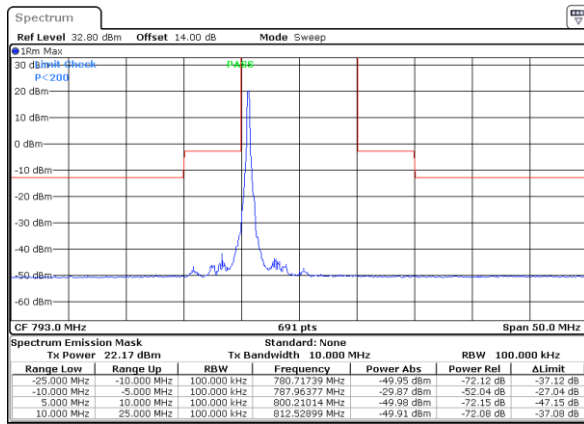


Date: 28.AUG.2024 11:53:22

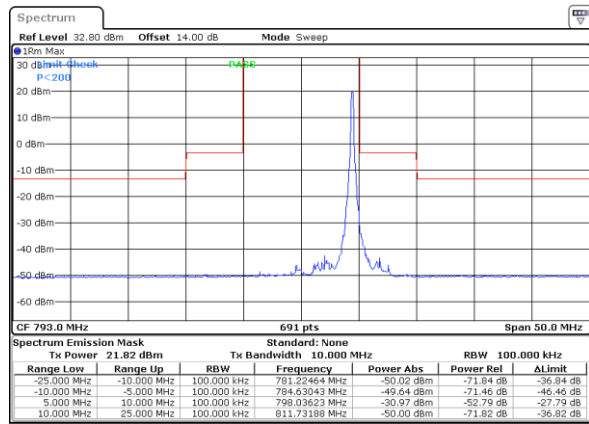

Date: 28.AUG.2024 11:56:58


Middle Channel / Full RB

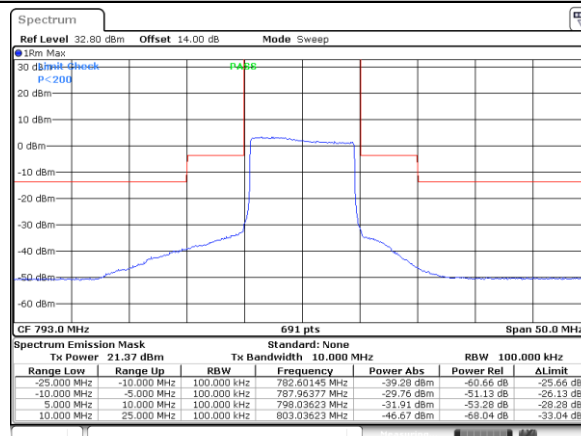


Date: 28.AUG.2024 12:00:33

## LTE Band 14 / 10MHz / 64QAM

### Middle Channel / 1RB

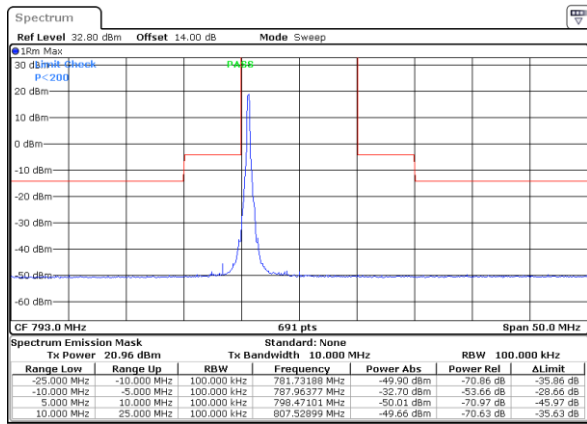


Date: 28.AUG.2024 11:54:134

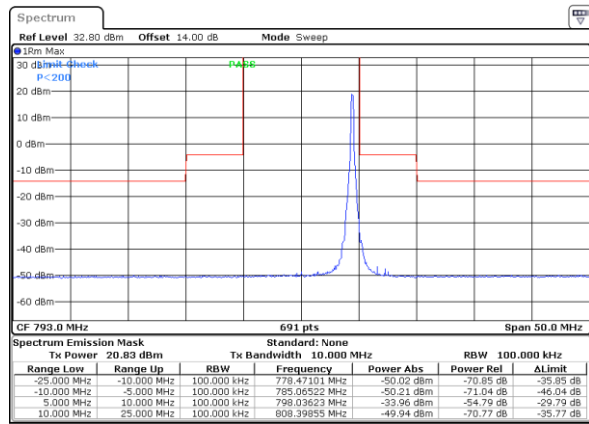

Date: 28.AUG.2024 11:58:109

### Middle Channel / Full RB

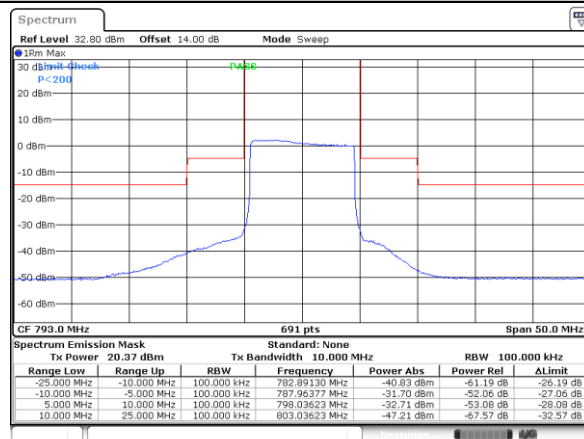

Date: 28.AUG.2024 12:01:45

## Frequency Stability

Test Conditions		LTE Band 14 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	≤1.25ppm
		Deviation (ppm)	Result
50	Normal Voltage	0.0010	PASS
40	Normal Voltage	0.0001	
30	Normal Voltage	0.0003	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0024	
0	Normal Voltage	0.0004	
-10	Normal Voltage	0.0001	
-20	Normal Voltage	0.0005	
-30	Normal Voltage	0.0008	
20	Maximum Voltage	0.0006	
20	Normal Voltage	0.0000	
20	Minimum Voltage	0.0009	

**Note:**

1. Normal Voltage = 3.8 V. ; Minimum Voltage = 3.4 V. ; Maximum Voltage = 4.4 V.
2. The frequency fundamental emissions stay within the authorized frequency block.

## Appendix B. Test Results of Radiated Test

### Field Strength of Spurious Radiated

Test Engineer :	Jia Kuang	Temperature :	22~25°C
		Relative Humidity :	48~52%

LTE Band 14 / QPSK / 10MHz									
Bandwidth	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
10MHz	1577	-42.86	-42.15	-0.71	-51.77	-46.11	4.00	9.40	H
	2365.5	-60.67	-13	-47.67	-72.47	-64.24	4.88	10.60	H
	3154	-61.53	-13	-48.53	-76.12	-66.46	5.52	12.60	H
	3942.5	-59.89	-13	-46.89	-75.61	-64.36	6.00	12.62	H
	4731	-54.94	-13	-41.94	-73.78	-58.35	7.14	12.70	H
	5519.5	-48.87	-13	-35.87	-68.50	-52.10	7.62	13.00	H
	6308	-47.15	-13	-34.15	-68.71	-49.70	8.00	12.70	H
	7096.5	-56.66	-13	-43.66	-79.97	-57.61	8.40	11.50	H
	1577	-50.90	-42.15	-8.75	-59.57	-54.15	4.00	9.40	V
	2365.5	-56.09	-13	-43.09	-67.83	-59.66	4.88	10.60	V
	3154	-59.75	-13	-46.75	-74.10	-64.68	5.52	12.60	V
	3942.5	-56.72	-13	-43.72	-72.53	-61.19	6.00	12.62	V
	4731	-50.72	-13	-37.72	-69.47	-54.13	7.14	12.70	V
	5519.5	-41.45	-13	-28.45	-60.95	-44.68	7.62	13.00	V
	6308	-39.48	-13	-26.48	-61.15	-42.03	8.00	12.70	V
	7096.5	-51.71	-13	-38.71	-75.52	-52.66	8.40	11.50	V
Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.									
Test Result					PASS				