

Stamped Metal Antenna 5.1 - 5.9 GHz



Electrical Parameters

Frequency (MHz)	5100 – 5900
Gain (dBi)	6 ±0.5
S-Parameter(S11)dB	< -10
VSWR	<1.5
Polarization	H & V
Pattern Type	Omni
Max. Power Input (Watts)	1
Impedance (Ω)	50 ±5
Cable & Connector Termination	250mm cable (1.13mm dia) & U.FL Connector


Mechanical Parameters

Dimension (mm)	20 X 15 x 7
Gross Weight (grams)	<15±5
Radiating Material	Al (0.035mm thick)
Mounting Surface	Must be mounted on 1 to 1.5mm thick metallic surface


Environmental Parameters

Temperature Range(°C)	(-) 50 to (+) 130
------------------------------	-------------------

Return Loss

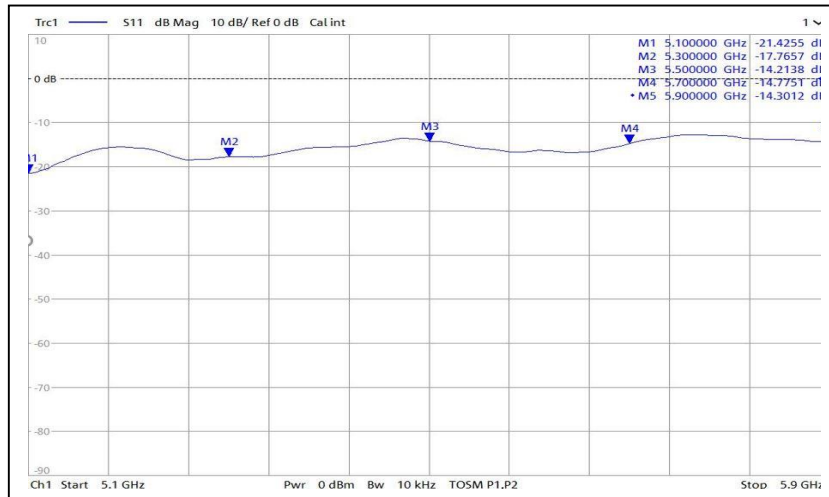

Radiation Pattern (Vertical)

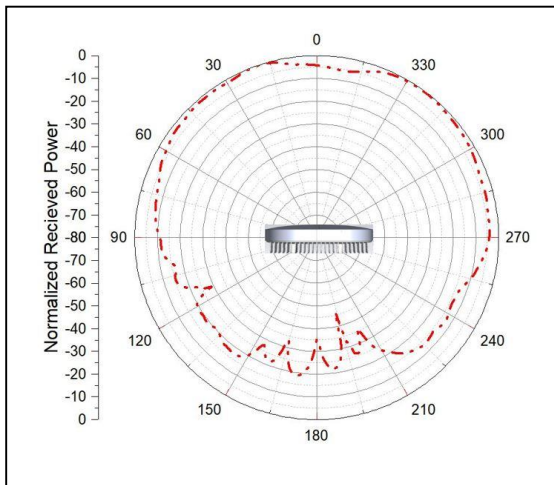

Radiation Pattern (Horizontal)

