



# FCC RADIO TEST REPORT

Applicant : Ubiquiti Inc.

Address : 685 Third Avenue, New York, New York 10017, USA

Equipment : UniFi Connect Cast

Model No. : UC-Cast

Trade Name : UBIQUITI

FCC ID : SWX-UCCAST

## I HEREBY CERTIFY THAT :

The sample was received on Jan. 04, 2022 and the testing was completed on Jan. 19, 2022 at Cerpass Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of Cerpass Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

Cerpass Technology Corporation Test Laboratory





## Contents

<b>1. Summary of Test Procedure and Test Results.....</b>	<b>5</b>
1.1 Applicable Standards .....	5
<b>2. Test Configuration of Equipment under Test.....</b>	<b>6</b>
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channels.....	7
2.3 Test Mode and Test Software.....	8
2.4 Description of Test System.....	9
2.5 General Information of Test.....	10
2.6 Measurement Uncertainty .....	10
<b>3. Test Equipment and Ancillaries Used for Tests .....</b>	<b>11</b>
<b>4. Antenna Requirements.....</b>	<b>13</b>
4.1 Standard Applicable .....	13
4.2 Antenna Construction and Directional Gain.....	13
<b>5. Test of AC Power Line Conducted Emission .....</b>	<b>14</b>
5.1 Test Limit .....	14
5.2 Test Procedures .....	14
5.3 Typical Test Setup .....	15
5.4 Test Result and Data.....	16
5.5 Test Photographs .....	18
<b>6. Test of Radiated Spurious Emission.....</b>	<b>19</b>
6.1 Test Limit .....	19
6.2 Test Procedures .....	20
6.3 Typical Test Setup .....	21
6.4 Test Result and Data (9KHz ~ 30MHz) .....	22
6.5 Test Result and Data (30MHz ~ 1GHz).....	22
6.6 Test Result and Data (1GHz ~ 25GHz).....	24
6.7 Restricted Bands of Operation.....	48
6.8 Test Photographs (30MHz ~ 1GHz) .....	49
6.9 Test Photographs (1GHz ~ 25GHz) .....	50
<b>7. Test of Conducted Spurious Emission .....</b>	<b>52</b>
7.1 Test Limit .....	52
7.2 Test Procedure .....	52
7.3 Test Setup Layout .....	52
7.4 Test Result and Data.....	52
<b>8. On Time, Duty Cycle and Measurement methods .....</b>	<b>61</b>
8.1 Test Limit .....	61
8.2 Test Procedure .....	61
8.3 Test Setup Layout .....	61
8.4 Test Result and Data.....	61
<b>9. 6dB Bandwidth Measurement Data .....</b>	<b>63</b>
9.1 Test Limit .....	63
9.2 Test Procedures .....	63



---

9.3	Test Setup Layout .....	63
9.4	Test Result and Data .....	63
<b>10.</b>	<b>Maximum Average Output Power .....</b>	<b>66</b>
10.1	Test Limit .....	66
10.2	Test Procedures .....	66
10.3	Test Setup Layout .....	66
10.4	Test Result and Data .....	66
<b>11.</b>	<b>Power Spectral Density .....</b>	<b>67</b>
11.1	Test Limit .....	67
11.2	Test Procedures .....	67
11.3	Test Setup Layout .....	67
11.4	Test Result and Data .....	67
<b>12.</b>	<b>Radio Frequency Exposure .....</b>	<b>70</b>
12.1	Applicable Standards .....	70
12.2	EUT Specification .....	70
12.3	Test Results .....	71
12.4	Calculation .....	71
12.5	Maximum Permissible Exposure .....	72



## History of this test report



## 1. Summary of Test Procedure and Test Results

### 1.1 Applicable Standards

**ANSI C63.10:2013**

**FCC Rules and Regulations Part 15 Subpart C §15.247**

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	PASS
15.207	. AC Power Line Conducted Emission	PASS
15.209 15.205	. Radiated Spurious Emission	PASS
15.247(d)	. Conducted Spurious Emission	PASS
15.247(a)(2)	. 6dB Bandwidth	PASS
15.247(b)	. Output Power	PASS
15.247(e)	. Power Spectral Density	PASS
2.1091	. Radio Frequency Exposure	PASS

\*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement.

\*This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report(21120307-TEFV01).



## 2. Test Configuration of Equipment under Test

### 2.1 Feature of Equipment under Test

Operation Frequency Range	BT / BLE: 2400-2483.5MHz 802.11b/g/n: 2400-2483.5MHz 802.11a/n/ac: 5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5850MHz
Center Frequency Range	BT / BLE: 2402MHz-2480MHz 802.11b/g/n: 2412MHz-2462MHz 802.11a/n/ac: 5180-5240MHz, 5260-5320MHz, 5500-5700MHz, 5745-5825MHz
Modulation Type	BT: GFSK, $\pi/4$ -DQPSK, 8DPSK BLE: GFSK WLAN: 2.4GHz: 802.11b: CCK, DQPSK, DBPSK 802.11g/n: BPSK, QPSK, 16QAM, 64QAM 5GHz: 802.11n/a: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM
Modulation Technology	DSSS, OFDM, FHSS, DTS
Data Rate	BT: GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps BLE: GFSK: 1Mbps, GFSK: 2Mbps WLAN: 2.4GHz: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS7, HT20/40 5GHz: 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS7, HT20/40 802.11ac: MCS0 – MCS9, VHT20/40/80
Antenna Type	PIFA Antenna
Antenna Gain	For BT / BLE: 2400-2480MHz: 0.3dBi For WLAN: 2400-2483.5MHz: 0.3dBi 5150-5250MHz: 5.4dBi 5250-5350MHz: 5.4dBi 5470-5725MHz: 5.4dBi 5725-5850MHz: 5.4dBi
Adapter	Brand: UBIQUITI Model: E005-1I050100VU
HDMI cable	Brand: YUQIU ELECTRONICS CO., LTD. Model: 680-00265

Note:

1. EUT support TPC Function.
2. WLAN 5GHz and BT can simultaneously transmission.
3. EUT support DFS Client Mode, without radar detection.
4. For more details, please refer to the User's manual of the EUT.



## 2.2 Carrier Frequency of Channels

802.11b, 802.11g, 802.11n HT20 (2412MHz-2462MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
<b>*01</b>	<b>2412</b>	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	<b>*11</b>	<b>2462</b>
<b>*06</b>	<b>2437</b>	---	---

802.11n HT40 (2422MHz-2452MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
---	---	07	2442
---	---	08	2447
<b>*03</b>	<b>2422</b>	<b>*09</b>	<b>2452</b>
04	2427	---	---
05	2432	---	---
<b>*06</b>	<b>2437</b>	---	---

Note: Channels remarked \* are selected to perform test.



### 2.3 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- b. The complete test system included remote workstation and EUT for RF test. The remote workstation included Notebook.
- c. An executive program, " wl command" under Windows OS system was executed to transmit and receive data via WLAN.
- d. The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	802.11b (1Mbps) With Adapter
2	802.11g (6Mbps) With Adapter
3	802.11n HT20 (6.5Mbps) With Adapter
4	802.11n HT40 (13.5Mbps) With Adapter
5	802.11b (1Mbps) With PoE
6	802.11g (6Mbps) With PoE
7	802.11n HT20 (6.5Mbps) With PoE
8	802.11n HT40 (13.5Mbps) With PoE

caused "Test Mode 7" generated the worst case, it was reported as the final data.

Radiation Emissions (9KHz ~30MHz & 30MHz ~ 1GHz)	
Test Mode	Operating Description
1	802.11b (1Mbps) With Adapter
2	802.11g (6Mbps) With Adapter
3	802.11n HT20 (6.5Mbps) With Adapter
4	802.11n HT40 (13.5Mbps) With Adapter
5	802.11b (1Mbps) With PoE
6	802.11g (6Mbps) With PoE
7	802.11n HT20 (6.5Mbps) With PoE
8	802.11n HT40 (13.5Mbps) With PoE

caused "Test Mode 3" generated the worst case, they were reported as the final data.

Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
1	802.11b (1Mbps) ,
2	802.11g (6Mbps)
3	802.11n HT20 (6.5Mbps)
4	802.11n HT40 (13.5Mbps)

caused "Test Mode 1~4" generated the worst case, they were reported as the final data.

#### Note:

There are two kinds of test voltage: AC 120V / 60Hz and AC 240V / 60Hz.

For AC Power Line Conducted Emission, AC 240V / 60Hz is worst case.

For Radiated Spurious Emission, (9KHz ~30MHz & 30MHz ~ 1GHz), AC 240V / 60Hz is worst case.

Modulation Type	TX CONFIGURATION
802.11b	1TX
802.11g	1TX
802.11n HT20	1TX
802.11n HT40	1TX



## 2.4 Description of Test System

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	lenovo	S1GL2W	N/A	N/A
type C	kolin	KEX-DLCP07	1m / NS	N/A
RJ45 Cable	TE CONNECTIVITY	Cat5e	1.2m / NS	N/A
POE	UBIQUITI	GP-H480-050G	N/A	0.6m / NS
Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
type C	kolin	KEX-DLCP07	1m / NS	N/A
RJ45 Cable	TE CONNECTIVITY	Cat5e	1.2m / NS	N/A
POE	UBIQUITI	GP-H480-050G	N/A	0.6m / NS
Monitor	DELL	U2410f	NA	N/A
AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
type C	kolin	KEX-DLCP07	1m / NS	N/A
RJ45 Cable	TE CONNECTIVITY	Cat5e	1.2m / NS	N/A
POE	UBIQUITI	GP-H480-050G	N/A	0.6m / NS
Monitor	DELL	U2410f	NA	N/A



## 2.5 General Information of Test

Test Site	Cerpass Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881				
	FCC	TW1439, TW1079			
	IC	4934E-1, 4934E-2			
	VCCI	T-2205 for Telecommunication test C-4663 for Conducted emission test R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz			
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25,000MHz				
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.				

Test Item	Test Site	Test Period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2022/01/17~2022/01/19	23~25°C /50~53%	Dian Chen
Radiated Emissions	3M02-NK	2022/01/13	20~21°C / 45~29%	Dian Chen
AC Power Line Conducted Emission	CON01-NK	2022/01/13~2022/01/19	19~20°C / 47~53%	Dian Chen

## 2.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±3.12dB
Radiated Spurious Emission(9KHz~30MHz)	±3.4dB
Radiated Spurious Emission(30MHz~1GHz)	±5.6dB
Radiated Spurious Emission(1GHz~25GHz)	±6.6dB
Conducted Spurious Emission	±1.8dB
6dB Bandwidth	±4.4%
20dB Bandwidth	±4.4%
Occupied Bandwidth	±4.4%
Peak Output Power(Conducted Power Meter)	±1.1dB
Dwell Time / Deactivation Time	±1.2%
Power Spectral Density	±1.8dB
Duty Cycle	±1.2%



### 3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	275	2021/11/05	2022/11/04
Active Loop Antenna	EMCO	6507	40855	2021/06/10	2022/06/09
Horn Antenna	EMCO	3115	31601	2021/10/14	2022/10/13
EMI Receiver	ROHDE & SCHWARZ	ESCI	101402	2021/03/12	2022/03/11
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2021/08/06	2022/08/05
Preamplifier	EM Electronics corp.	EM330	60658	2021/10/13	2022/10/12
Preamplifier	Agilent	8449B	3008A01954	2021/03/22	2022/03/21
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2021/04/19	2022/04/18
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2021/04/12	2022/04/11
Cable-0.5m(1G-18G)	EMEC	EM104-SMSM-0.5M	CCE1354	2021/05/06	2022/05/05
Cable-3m(1G-18G)	EMEC	EM104-SMSM-3M	CCE1355	2021/05/06	2022/05/05
Cable-8m(1G-18G)	EMEC	EM104-SMSM-8M	CCE1356	2021/05/06	2022/05/05
Cable-0.5m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	28420/2	2021/04/03	2022/04/02
Cable-3m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	MY2608/2	2021/04/09	2022/04/08
Cable-0.5m(1G-40G)	Rapidtek	40GHZ 50CM	38MS-38MS50314	2021/04/08	2022/04/07
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130605	2021/09/22	2022/09/21
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2021/04/19	2022/04/18
CAX Signal Analyzer	KEYSIGHT	N9000B	MY57100339	2022/01/10	2023/01/09
Attenuator	KEYSIGHT	8491B	MY39250703	2021/04/09	2022/04/08
TEMP & HUMI CHAMBER	T-MACHINE	TMJ-9712	T-12-040111	2021/08/27	2022/08/26
Cable-0.5m(1G-26.5G)	HUBER SUHNER	SUCOFLEX 102	28422/2	2021/04/08	2022/04/07
Power Meter	Anritsu	ML2495A	1224005	2021/04/14	2022/04/13
Power Sensor	Anritsu	MA2411B	1207295	2021/04/14	2022/04/13
Switch Box	Theda	1-4	TW5451159	NA	NA
MXG-B RF Vector Signal Generator	KEYSIGHT	N5182B	MY53051383	2021/06/30	2022/06/29



Test Item	AC Power Line Conducted Emission				
Test Site	CON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESCI	101200	2021/08/30	2022/08/29
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127-568	2021/06/02	2022/06/01
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	101934	2021/03/10	2022/03/09
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130606	2021/03/15	2022/03/14
E3	AUDIX	v8.2014-8-6	RK-000531	NA	NA



## 4. Antenna Requirements

### 4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 4.2 Antenna Construction and Directional Gain

Antenna Type	PIFA Antenna
Antenna Gain	0.3dBi



## 5. Test of AC Power Line Conducted Emission

### 5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


\*Decreases with the logarithm of the frequency.

### 5.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




### 5.3 Typical Test Setup

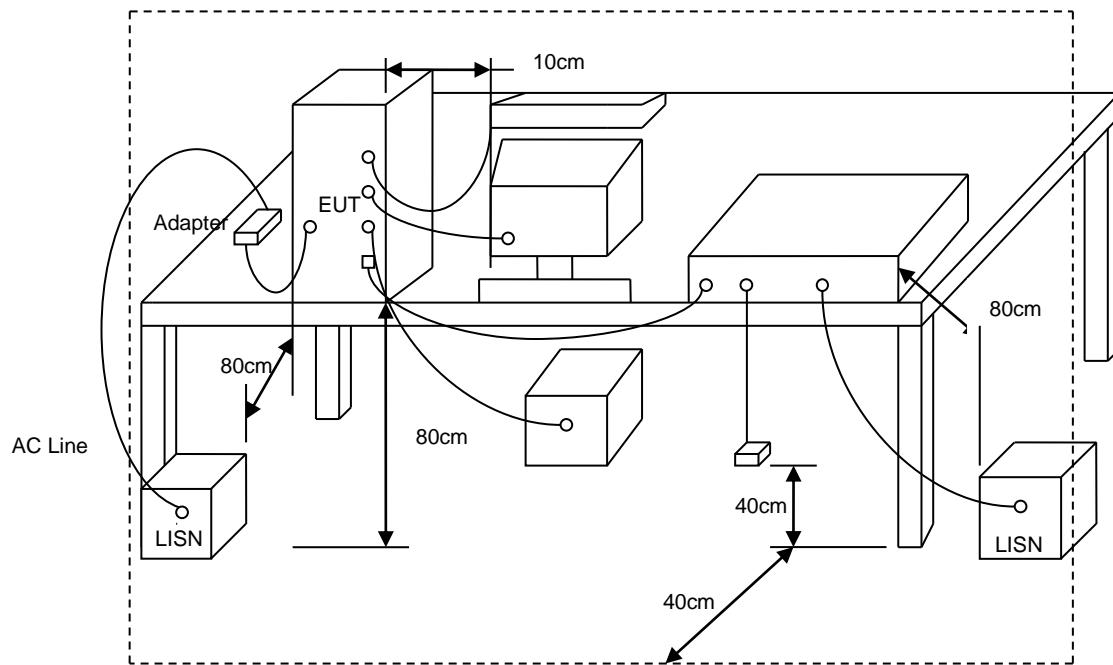



## 5.4 Test Result and Data

Power :	AC 240V / 60Hz	Pol/Phase :	LINE
Test Mode :	Mode 7	:	

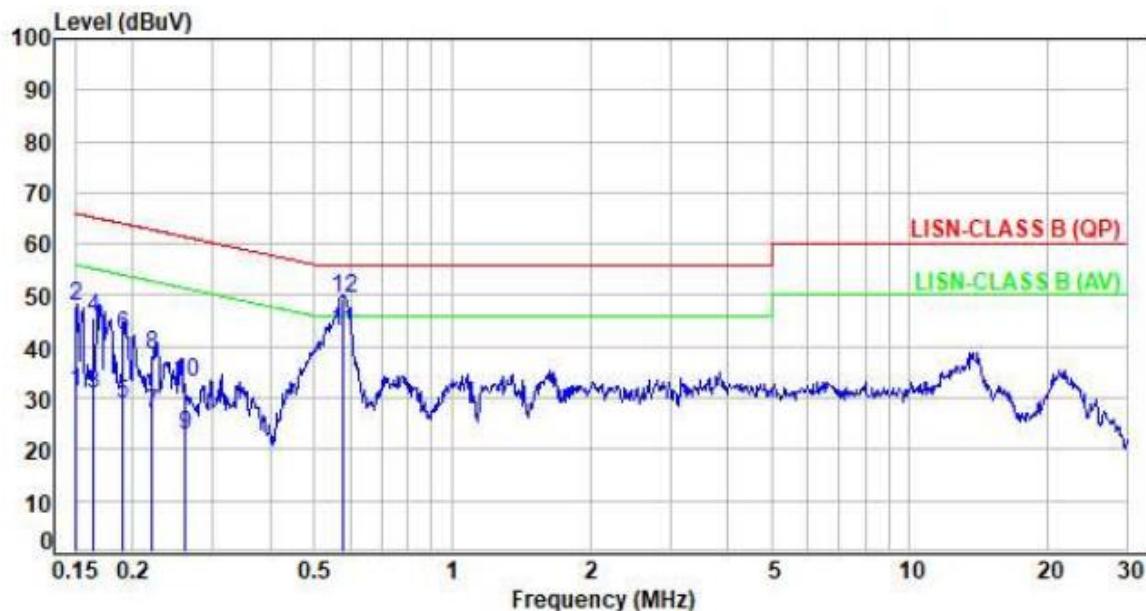

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.92	21.15	31.07	55.98	-24.91	Average	P
2	0.15	9.92	37.94	47.86	65.98	-18.12	QP	P
3	0.16	9.92	20.82	30.74	55.21	-24.47	Average	P
4	0.16	9.92	35.84	45.76	65.21	-19.45	QP	P
5	0.19	9.92	18.97	28.89	53.98	-25.09	Average	P
6	0.19	9.92	32.27	42.19	63.98	-21.79	QP	P
7	0.22	9.92	16.97	26.89	52.82	-25.93	Average	P
8	0.22	9.92	28.58	38.50	62.82	-24.32	QP	P
9	0.26	9.91	12.76	22.67	51.43	-28.76	Average	P
10	0.26	9.91	23.01	32.92	61.43	-28.51	QP	P
11	0.58	9.92	33.03	42.95	46.00	-3.05	Average	P
12	0.58	9.92	39.47	49.39	56.00	-6.61	QP	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power :	AC 240V / 60Hz	Pol/Phase :	NEUTRAL
Test Mode :	Mode 7	:	

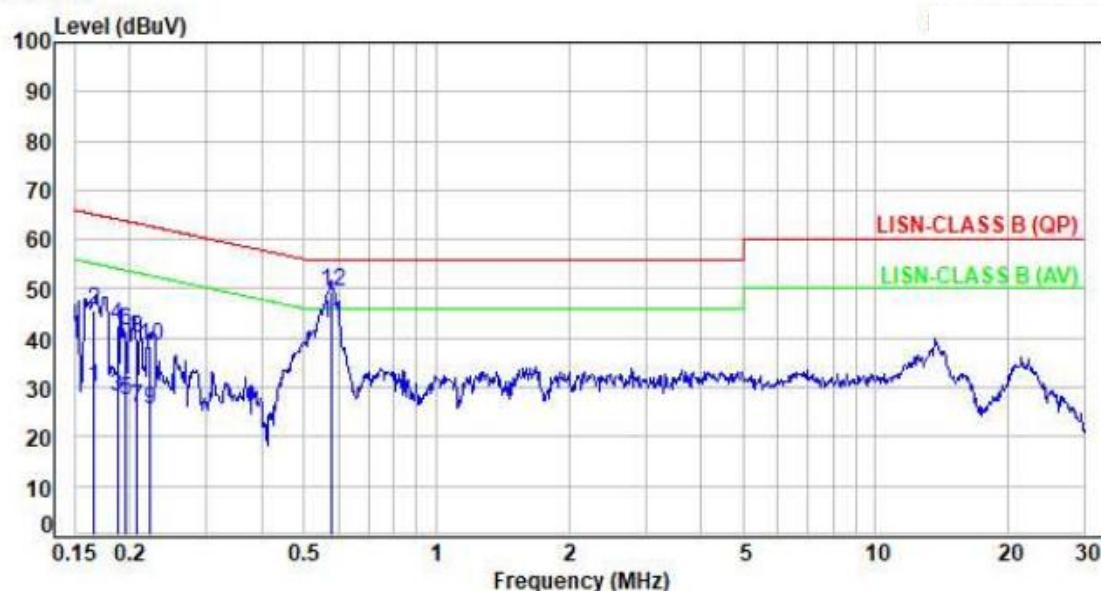

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.17	9.92	20.01	29.93	55.13	-25.20	Average	P
2	0.17	9.92	35.65	45.57	65.13	-19.56	QP	P
3	0.19	9.92	18.13	28.05	54.15	-26.10	Average	P
4	0.19	9.92	32.75	42.67	64.15	-21.48	QP	P
5	0.20	9.92	17.31	27.23	53.76	-26.53	Average	P
6	0.20	9.92	31.67	41.59	63.76	-22.17	QP	P
7	0.21	9.92	15.93	25.85	53.32	-27.47	Average	P
8	0.21	9.92	29.83	39.75	63.32	-23.57	QP	P
9	0.22	9.92	15.68	25.60	52.72	-27.12	Average	P
10	0.22	9.92	28.50	38.42	62.72	-24.30	QP	P
11	0.58	9.91	32.90	42.81	46.00	-3.19	Average	P
12	0.58	9.91	39.49	49.40	56.00	-6.60	QP	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



## 6. Test of Radiated Spurious Emission

### 6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3



## 6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.


Note:

- 1.The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.  
(Z-AXIS is the worst.)
- 2.Due to the test software function limit the operation band setting(200dBuV/m).  
There's no corresponding limitation in the actual test item.




### 6.3 Typical Test Setup


Below 30MHz test setup

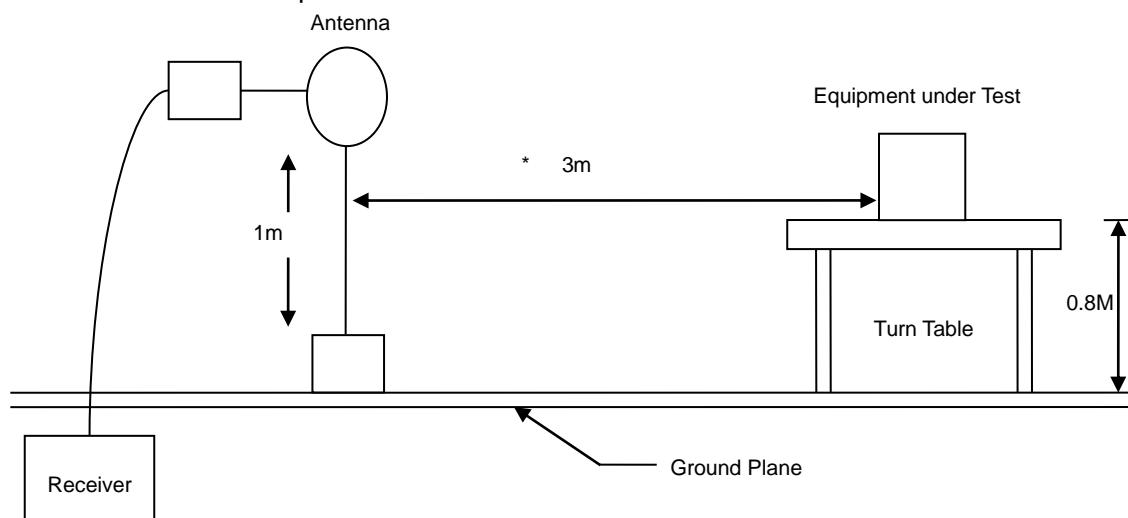

30MHz- 1GHz Test Setup

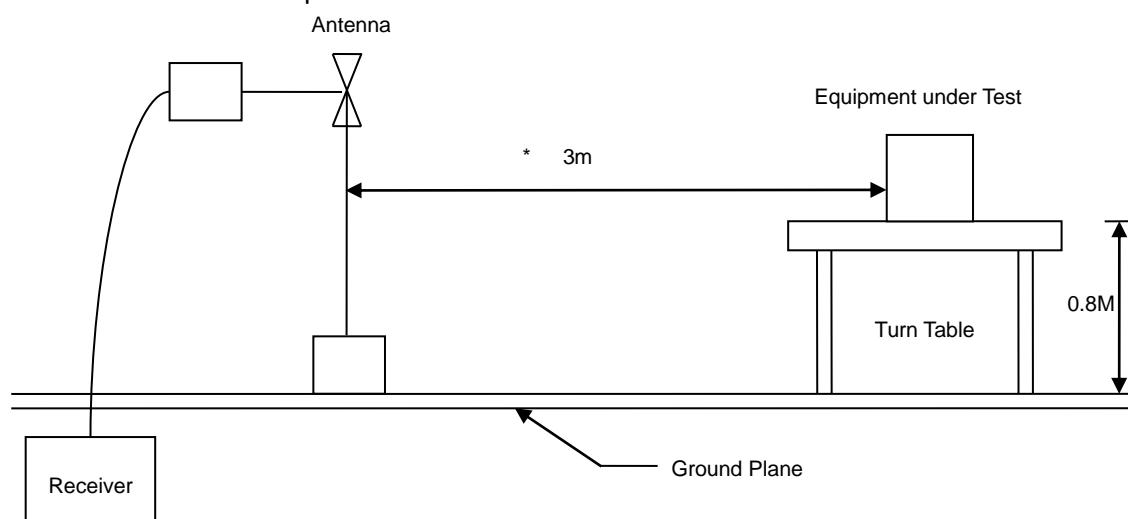

Above 1GHz Test Setup

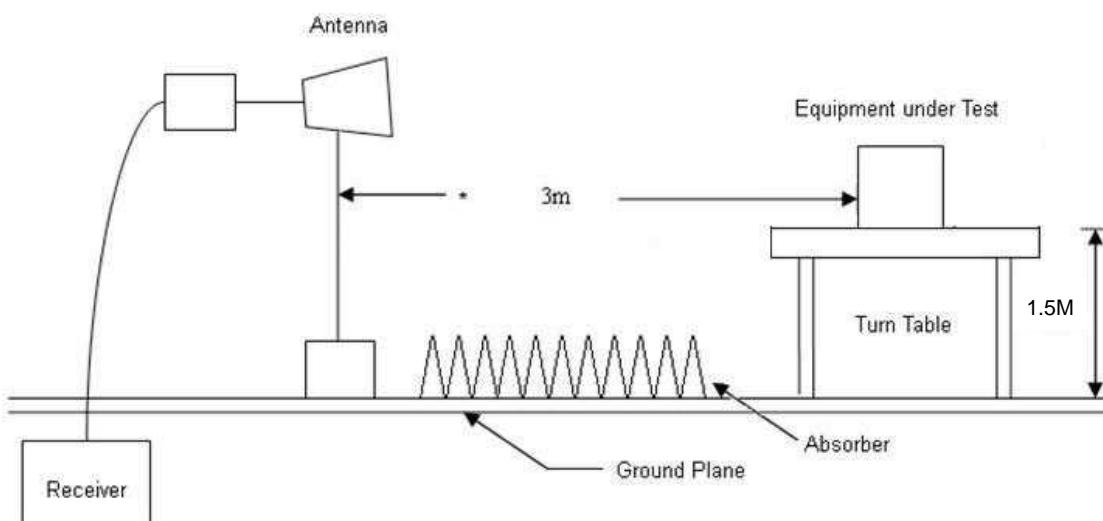




## 6.4 Test Result and Data (9KHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

## 6.5 Test Result and Data (30MHz ~ 1GHz)

Power :	AC 240V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 3	:	

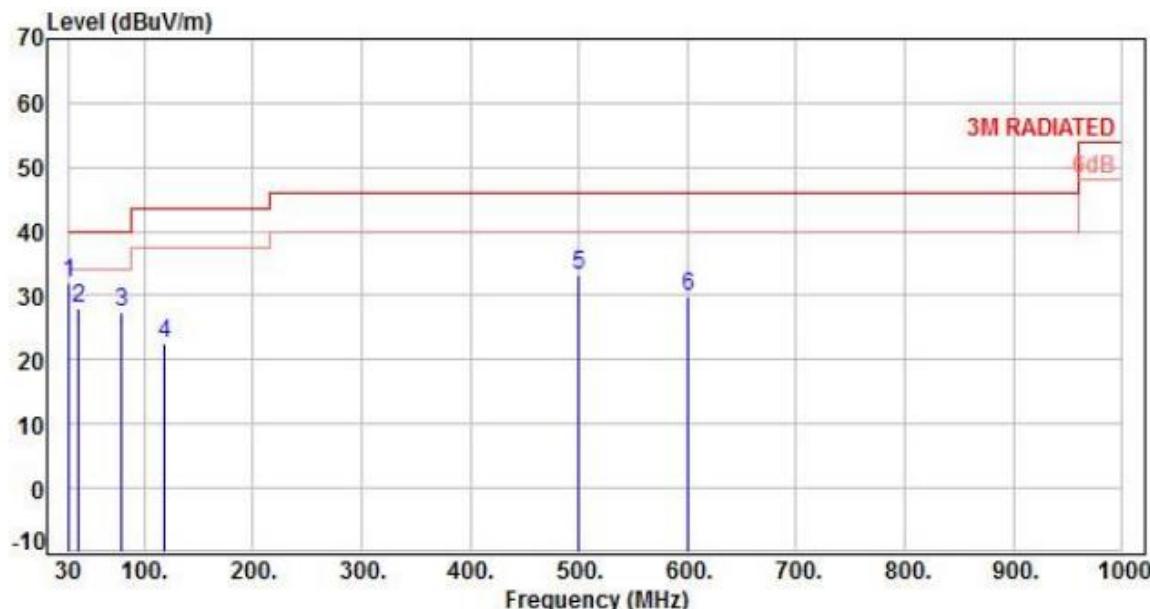

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	30.00	-12.63	44.67	32.04	40.00	-7.96	Peak	400	360	P
2	39.70	-11.86	39.78	27.92	40.00	-12.08	Peak	400	360	P
3	78.50	-15.51	43.06	27.55	40.00	-12.45	Peak	400	360	P
4	119.24	-13.82	36.30	22.48	43.50	-21.02	Peak	400	360	P
5	499.48	-5.46	38.70	33.24	46.00	-12.76	Peak	400	360	P
6	600.36	-2.94	32.67	29.73	46.00	-16.27	Peak	400	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 240V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 3	:	

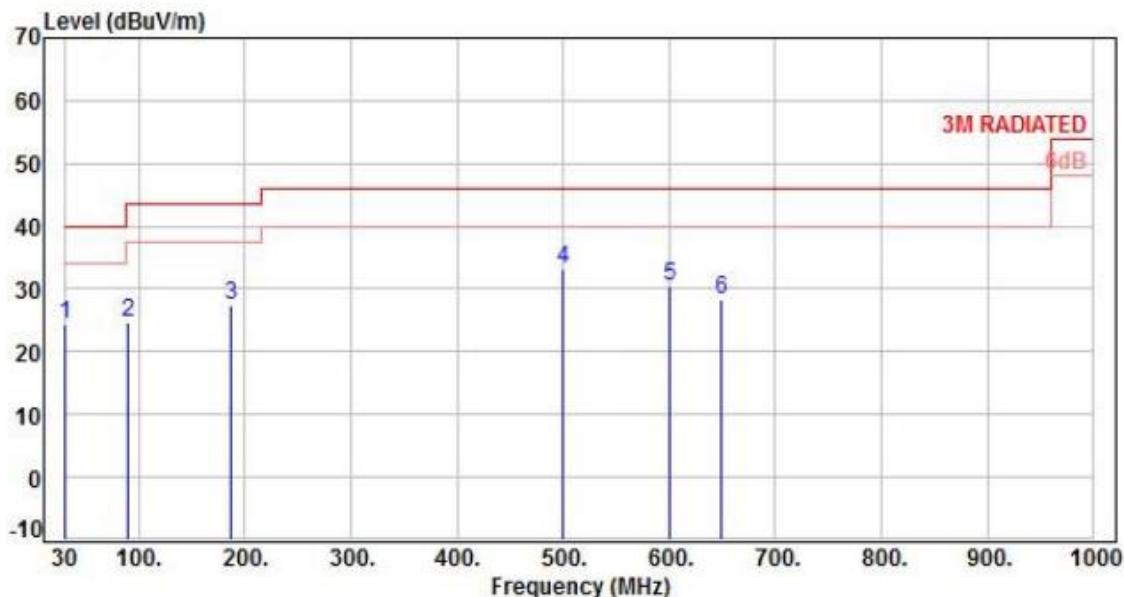

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	30.00	-12.63	37.13	24.50	40.00	-15.50	Peak	400	0	P
2	90.14	-16.64	41.33	24.69	43.50	-18.81	Peak	400	0	P
3	187.14	-13.30	40.62	27.32	43.50	-16.18	Peak	400	0	P
4	499.48	-5.46	38.68	33.22	46.00	-12.78	Peak	400	0	P
5	600.36	-2.94	33.40	30.46	46.00	-15.54	Peak	400	0	P
6	648.86	-2.16	30.55	28.39	46.00	-17.61	Peak	400	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



## 6.6 Test Result and Data (1GHz ~ 25GHz)

Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 1, CH01	:	

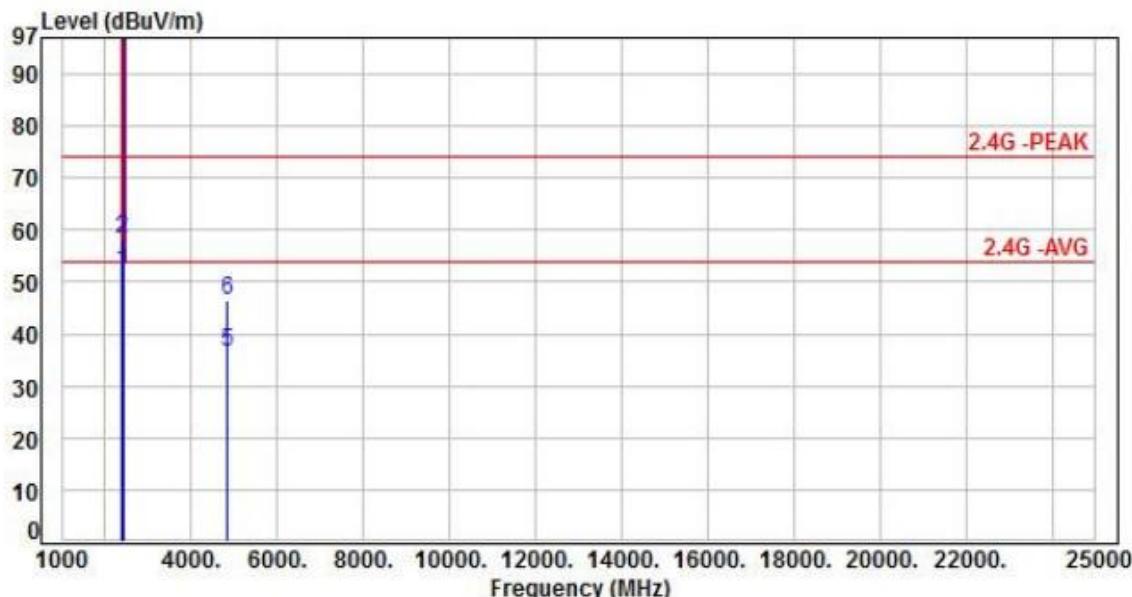

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.54	55.57	52.03	54.00	-1.97	Average	112	143	P
2	2390.00	-3.54	61.74	58.20	74.00	-15.80	Peak	112	143	P
3	2412.00	-3.50	104.38	100.88	200.00	-99.12	Average	112	143	P
4	2412.00	-3.50	107.47	103.97	200.00	-96.03	Peak	112	143	P
5	4824.00	3.83	32.67	36.50	54.00	-17.50	Average	355	210	P
6	4824.00	3.83	42.74	46.57	74.00	-27.43	Peak	355	210	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 1, CH01		:

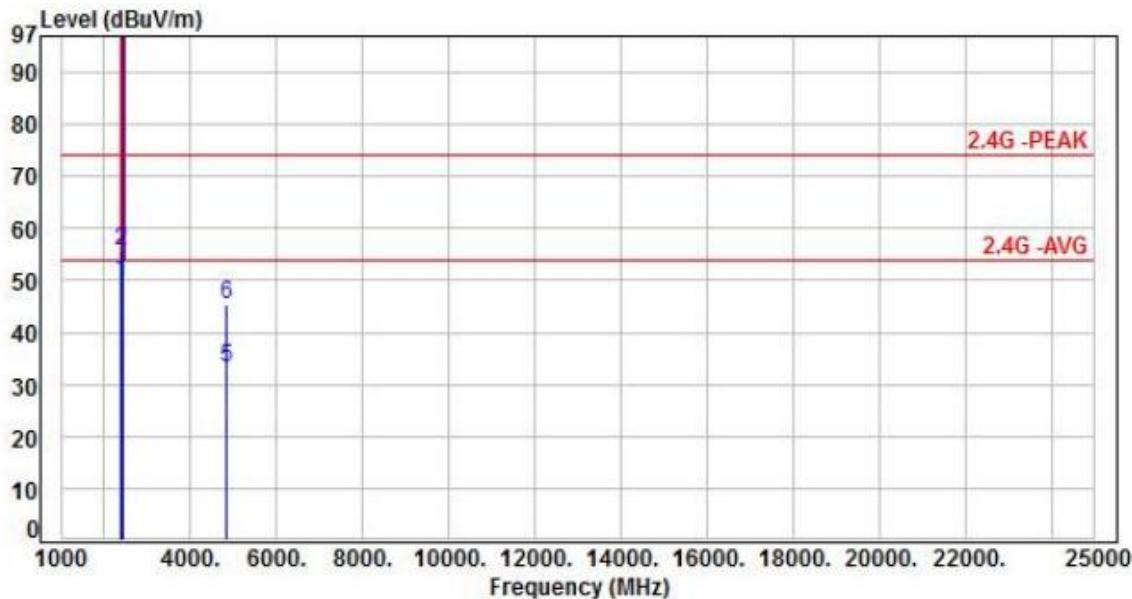

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.54	53.16	49.62	54.00	-4.38	Average	100	46	P
2	2390.00	-3.54	59.34	55.80	74.00	-18.20	Peak	100	46	P
3	2412.00	-3.50	101.26	97.76	200.00	-102.24	Average	100	46	P
4	2412.00	-3.50	104.37	100.87	200.00	-99.13	Peak	100	46	P
5	4824.00	3.83	29.30	33.13	54.00	-20.87	Average	124	230	P
6	4824.00	3.83	41.62	45.45	74.00	-28.55	Peak	124	230	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 1, CH06	:	

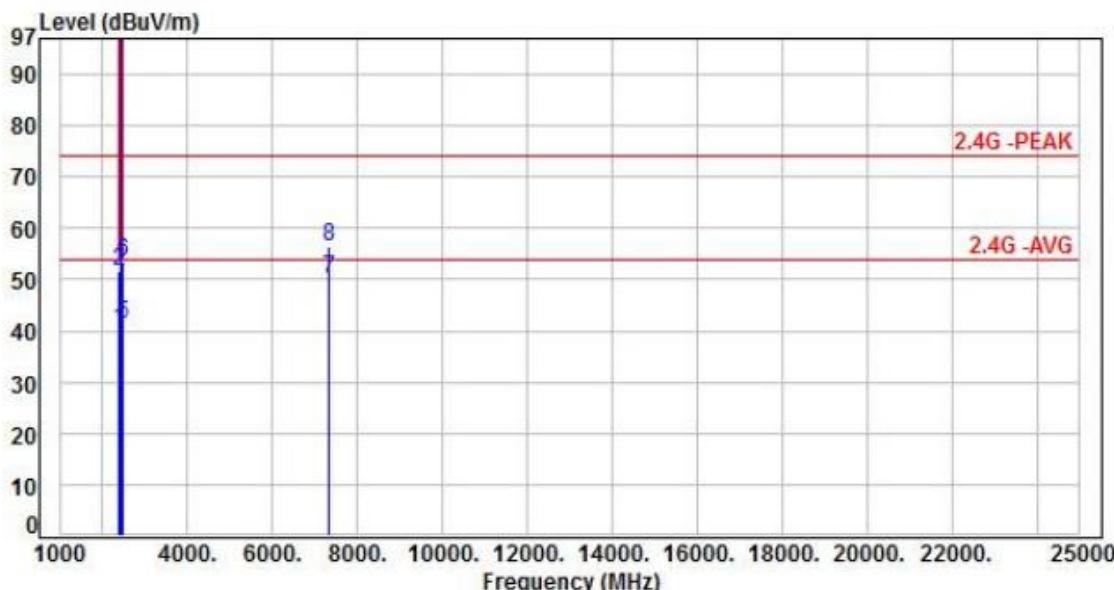

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.54	43.75	40.21	54.00	-13.79	Average	100	143	P
2	2390.00	-3.54	55.30	51.76	74.00	-22.24	Peak	100	143	P
3	2437.00	-3.47	104.81	101.34	200.00	-98.66	Average	100	143	P
4	2437.00	-3.47	108.07	104.60	200.00	-95.40	Peak	100	143	P
5	2483.50	-3.30	44.70	41.40	54.00	-12.60	Average	100	143	P
6	2483.50	-3.30	56.65	53.35	74.00	-20.65	Peak	100	143	P
7	7311.00	8.64	41.61	50.25	54.00	-3.75	Average	324	304	P
8	7311.00	8.64	47.66	56.30	74.00	-17.70	Peak	324	304	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 1, CH06		:

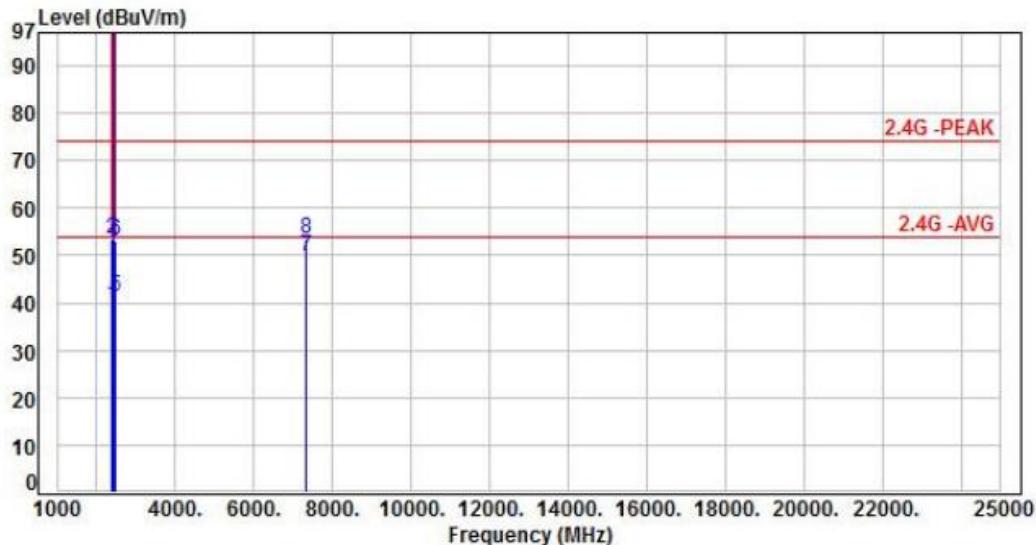

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.54	42.87	39.33	54.00	-14.67	Average	106	114	P
2	2390.00	-3.54	56.84	53.30	74.00	-20.70	Peak	106	114	P
3	2437.00	-3.47	101.13	97.66	200.00	-102.34	Average	106	114	P
4	2437.00	-3.47	104.27	100.80	200.00	-99.20	Peak	106	114	P
5	2483.50	-3.30	44.58	41.28	54.00	-12.72	Average	106	114	P
6	2483.50	-3.30	56.47	53.17	74.00	-20.83	Peak	106	114	P
7	7311.00	8.64	41.31	49.95	54.00	-4.05	Average	110	124	P
8	7311.00	8.64	44.67	53.31	74.00	-20.69	Peak	110	124	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 1, CH11	:	

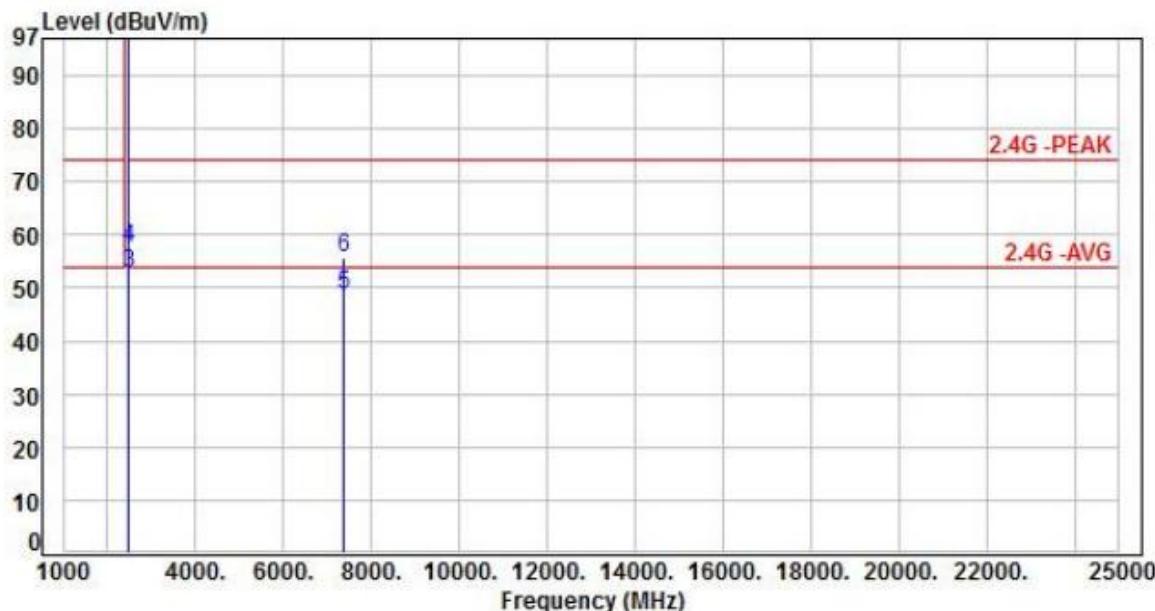

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-3.40	105.22	101.82	200.00	-98.18	Average	105	145	P
2	2462.00	-3.40	108.36	104.96	200.00	-95.04	Peak	105	145	P
3	2483.50	-3.30	55.94	52.64	54.00	-1.36	Average	104	145	P
4	2483.50	-3.30	60.88	57.58	74.00	-16.42	Peak	105	145	P
5	7386.00	8.66	40.06	48.72	54.00	-5.28	Average	101	141	P
6	7386.00	8.66	47.16	55.82	74.00	-18.18	Peak	101	141	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 1, CH11	:	

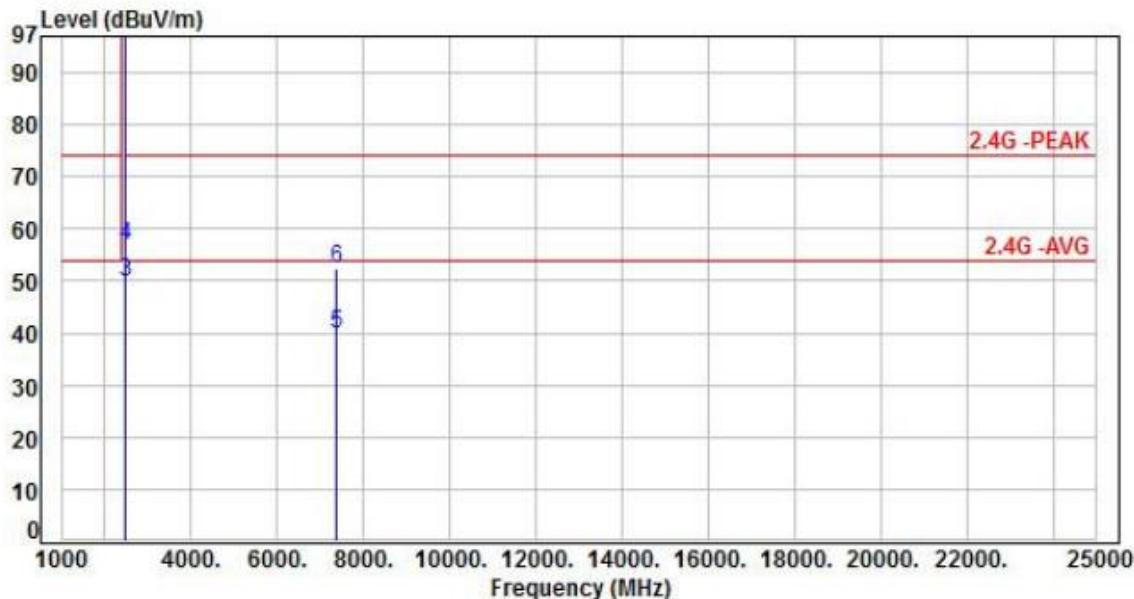

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-3.40	102.58	99.18	200.00	-100.82	Average	363	211	P
2	2462.00	-3.40	105.68	102.28	200.00	-97.72	Peak	363	211	P
3	2483.50	-3.30	52.98	49.68	54.00	-4.32	Average	363	211	P
4	2483.50	-3.30	60.18	56.88	74.00	-17.12	Peak	363	211	P
5	7386.00	8.66	31.29	39.95	54.00	-14.05	Average	394	209	P
6	7386.00	8.66	43.62	52.28	74.00	-21.72	Peak	394	209	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 2, CH01	:	

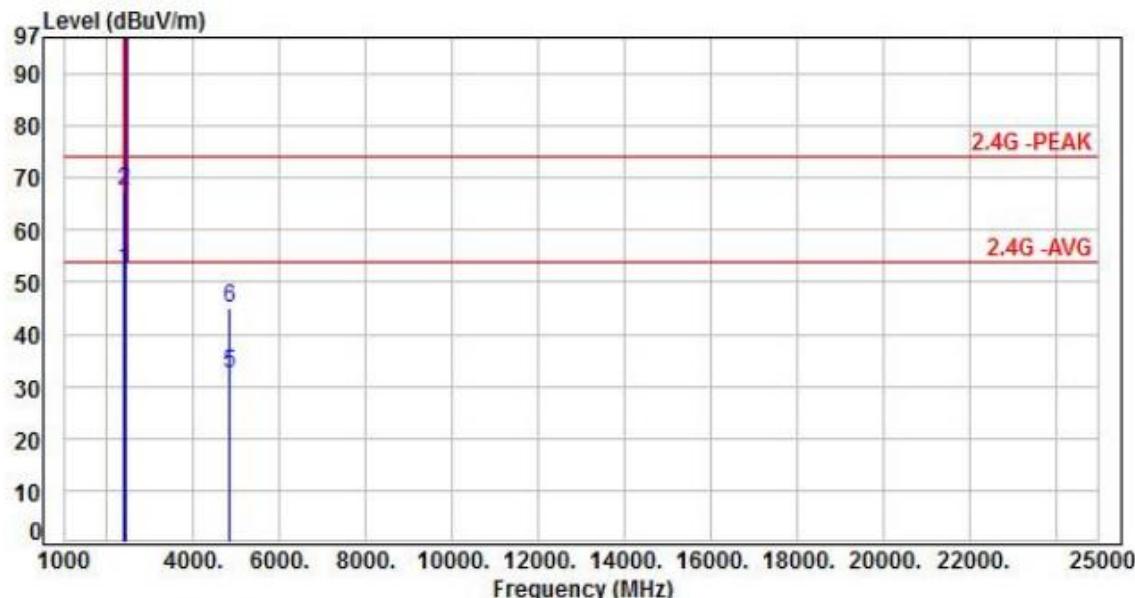

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.54	55.81	52.27	54.00	-1.73	Average	107	146	P
2	2390.00	-3.54	70.95	67.41	74.00	-6.59	Peak	107	146	P
3	2412.00	-3.50	101.21	97.71	200.00	-102.29	Average	107	146	P
4	2412.00	-3.50	110.40	106.90	200.00	-93.10	Peak	107	146	P
5	4824.00	3.83	28.72	32.55	54.00	-21.45	Average	100	214	P
6	4824.00	3.83	41.14	44.97	74.00	-29.03	Peak	100	214	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 2, CH01	:	

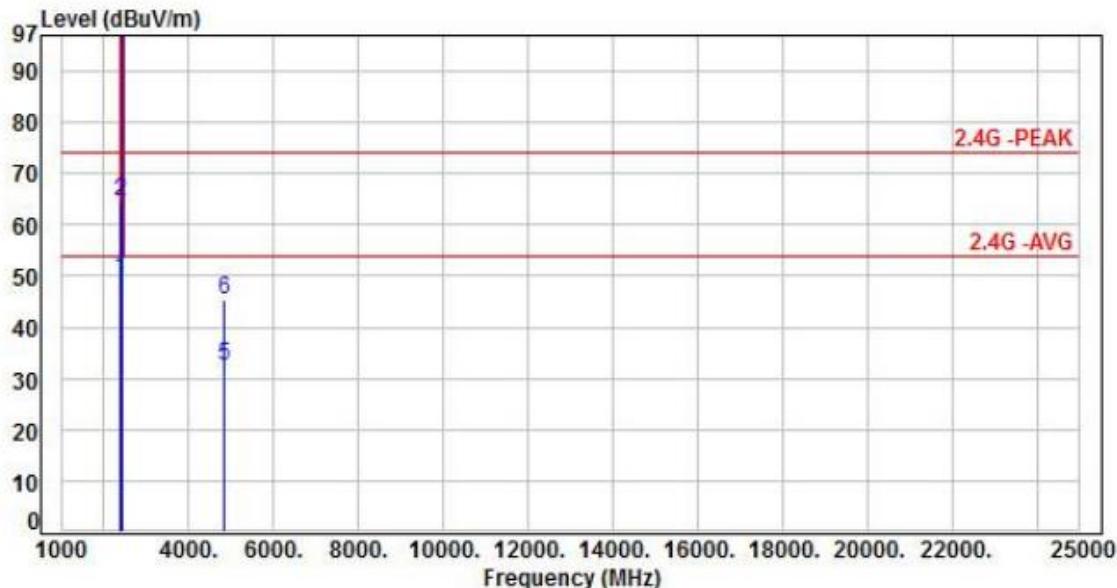

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.54	52.85	49.31	54.00	-4.69	Average	114	317	P
2	2390.00	-3.54	68.23	64.69	74.00	-9.31	Peak	114	317	P
3	2412.00	-3.50	99.19	95.69	200.00	-104.31	Average	114	317	P
4	2412.00	-3.50	108.41	104.91	200.00	-95.09	Peak	114	317	P
5	4824.00	3.83	28.69	32.52	54.00	-21.48	Average	100	231	P
6	4824.00	3.83	41.58	45.41	74.00	-28.59	Peak	100	231	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 2, CH06	:	

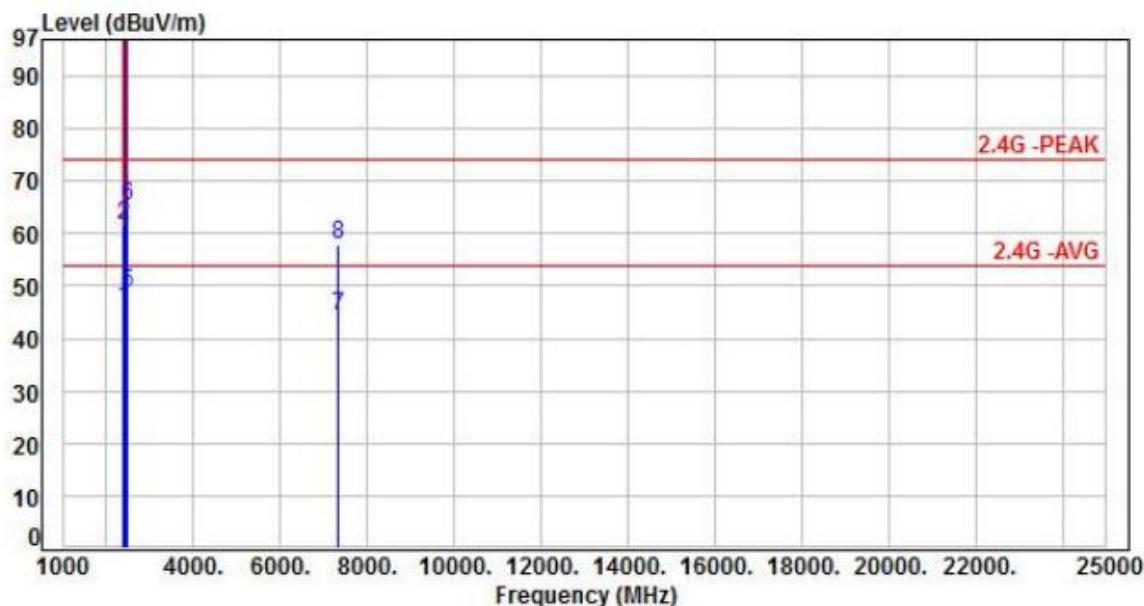

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.54	49.23	45.69	54.00	-8.31	Average	129	144	P
2	2390.00	-3.54	65.00	61.46	74.00	-12.54	Peak	129	144	P
3	2437.00	-3.47	104.59	101.12	200.00	-98.88	Average	129	144	P
4	2437.00	-3.47	113.73	110.26	200.00	-89.74	Peak	129	144	P
5	2483.50	-3.30	51.82	48.52	54.00	-5.48	Average	129	144	P
6	2483.50	-3.30	68.42	65.12	74.00	-8.88	Peak	129	144	P
7	7311.00	8.64	35.49	44.13	54.00	-9.87	Average	106	127	P
8	7311.00	8.64	49.35	57.99	74.00	-16.01	Peak	106	127	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 2, CH06	:	

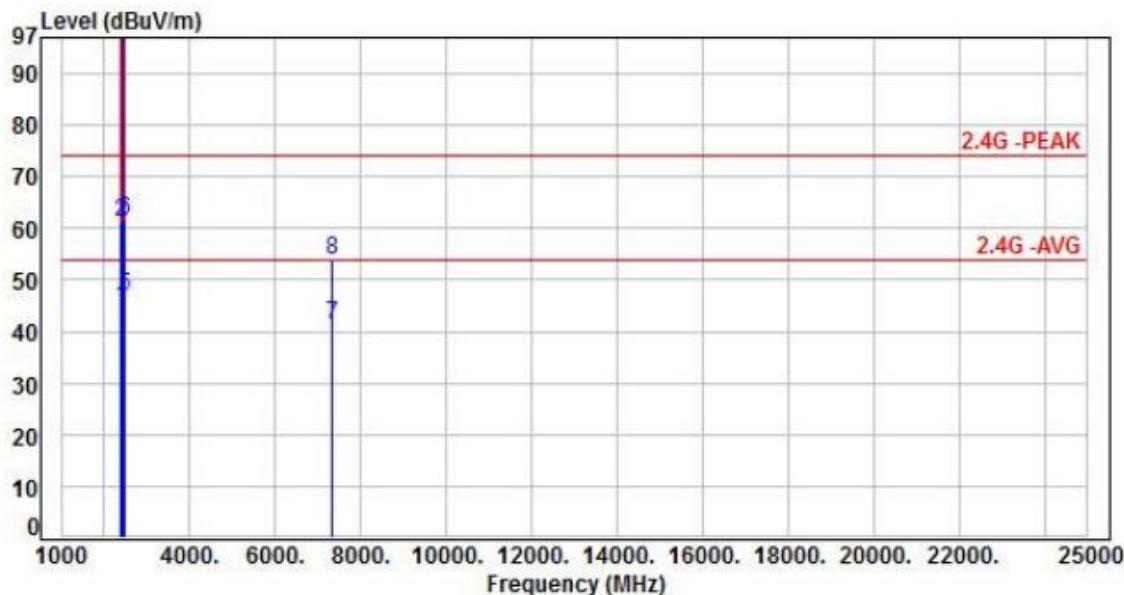

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.54	48.27	44.73	54.00	-9.27	Average	101	208	P
2	2390.00	-3.54	64.70	61.16	74.00	-12.84	Peak	101	208	P
3	2437.00	-3.47	101.07	97.60	200.00	-102.40	Average	101	208	P
4	2437.00	-3.47	110.26	106.79	200.00	-93.21	Peak	101	208	P
5	2483.50	-3.30	50.24	46.94	54.00	-7.06	Average	101	208	P
6	2483.50	-3.30	65.07	61.77	74.00	-12.23	Peak	101	208	P
7	7311.00	8.64	32.49	41.13	54.00	-12.87	Average	100	21	P
8	7311.00	8.64	45.38	54.02	74.00	-19.98	Peak	100	21	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 2, CH11	:	

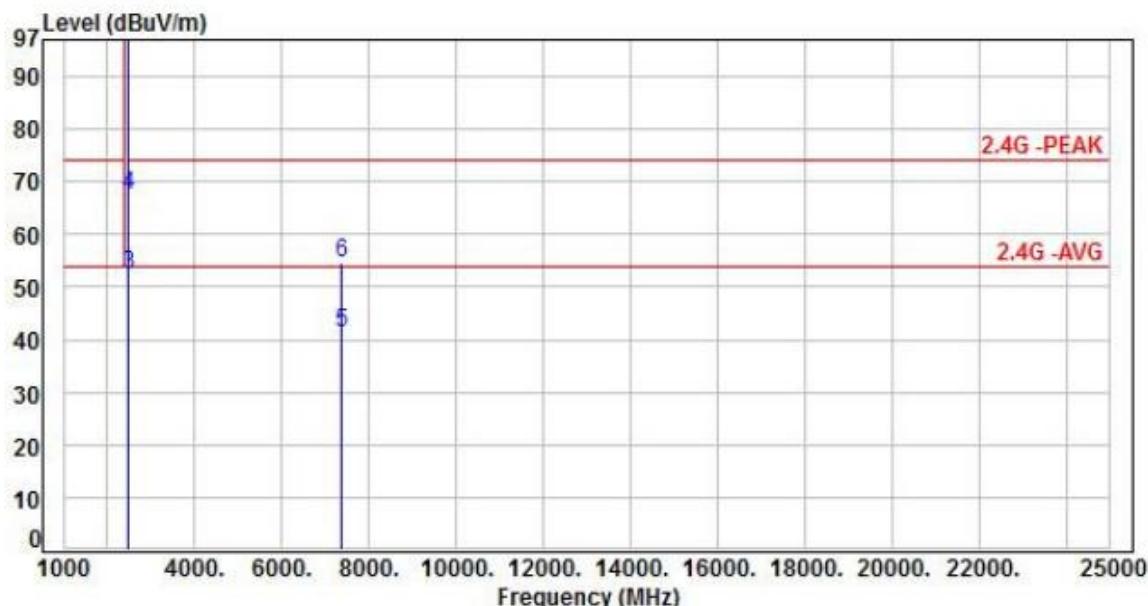

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-3.40	101.04	97.64	200.00	-102.36	Average	100	144	P
2	2462.00	-3.40	110.33	106.93	200.00	-93.07	Peak	100	144	P
3	2483.50	-3.30	55.80	52.50	54.00	-1.50	Average	100	144	P
4	2483.50	-3.30	70.83	67.53	74.00	-6.47	Peak	100	144	P
5	7386.00	8.66	32.72	41.38	54.00	-12.62	Average	372	301	P
6	7386.00	8.66	46.10	54.76	74.00	-19.24	Peak	372	301	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 2, CH11	:	

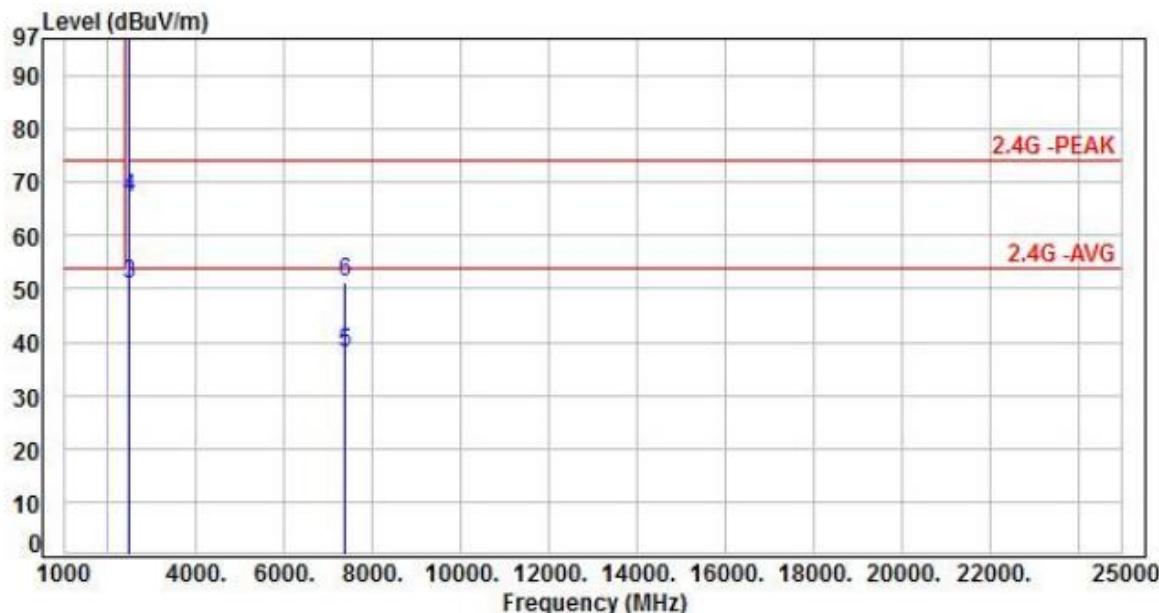

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth P/F (deg)
1	2462.00	-3.40	99.93	96.53	200.00	-103.47	Average	255	225 P
2	2462.00	-3.40	109.18	105.78	200.00	-94.22	Peak	255	225 P
3	2483.50	-3.30	54.31	51.01	54.00	-2.99	Average	255	225 P
4	2483.50	-3.30	70.44	67.14	74.00	-6.86	Peak	255	225 P
5	7386.00	8.66	29.51	38.17	54.00	-15.83	Average	100	15 P
6	7386.00	8.66	42.72	51.38	74.00	-22.62	Peak	100	15 P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 3, CH01	:	

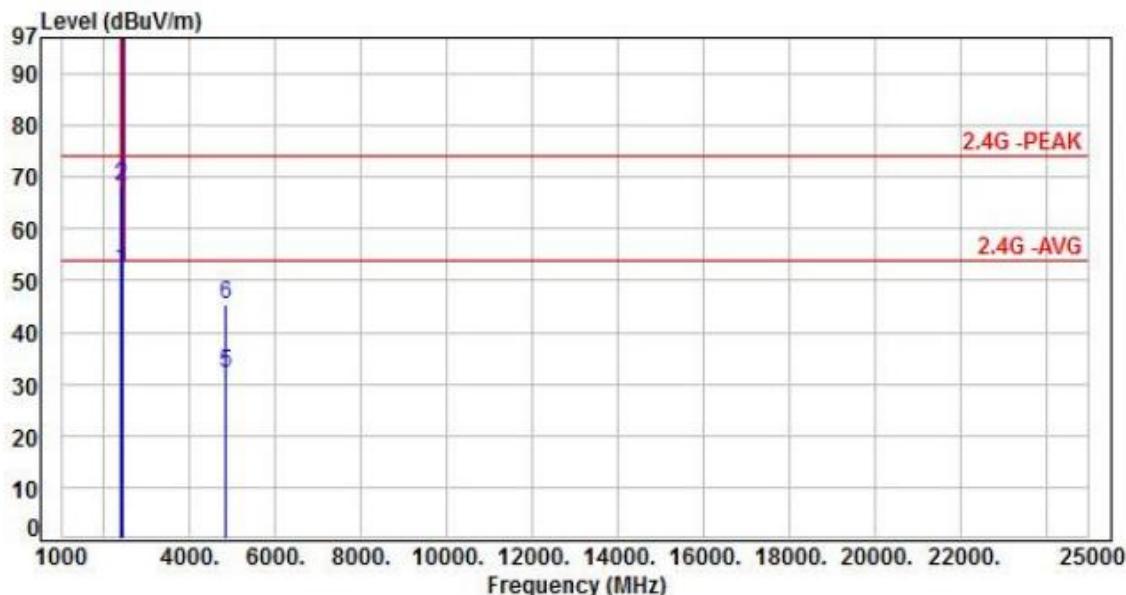

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.54	55.73	52.19	54.00	-1.81	Average	117	145	P
2	2390.00	-3.54	71.91	68.37	74.00	-5.63	Peak	117	145	P
3	2412.00	-3.50	99.74	96.24	200.00	-103.76	Average	117	145	P
4	2412.00	-3.50	109.33	105.83	200.00	-94.17	Peak	117	145	P
5	4824.00	3.83	28.26	32.09	54.00	-21.91	Average	100	229	P
6	4824.00	3.83	41.38	45.21	74.00	-28.79	Peak	100	229	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 3, CH01	:	

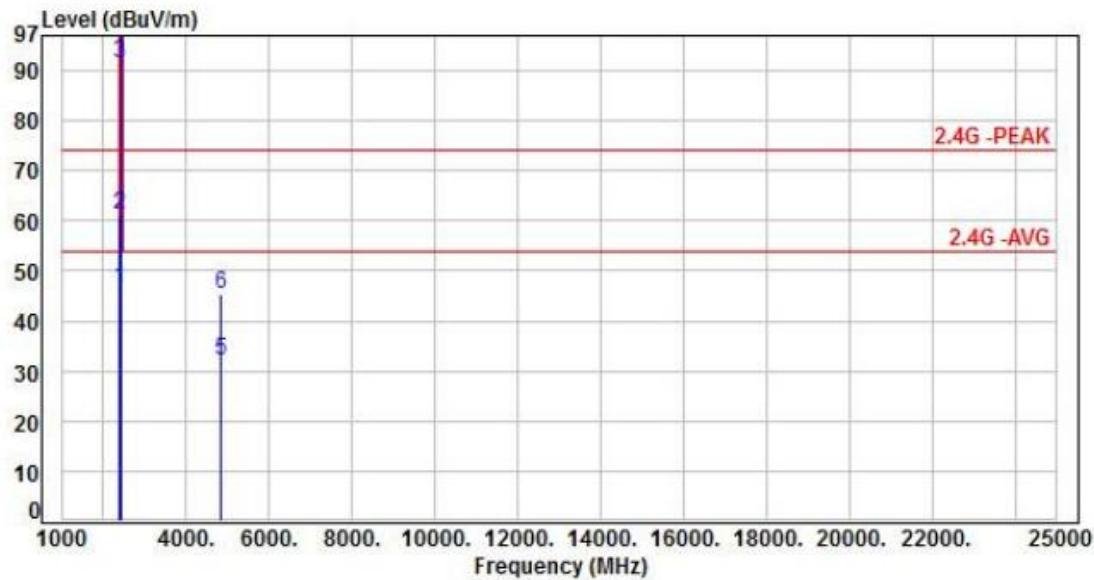

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.54	50.10	46.56	54.00	-7.44	Average	235	92	P
2	2390.00	-3.54	64.81	61.27	74.00	-12.73	Peak	235	92	P
3	2412.00	-3.50	95.08	91.58	200.00	-108.42	Average	235	92	P
4	2412.00	-3.50	104.68	101.18	200.00	-98.82	Peak	235	92	P
5	4824.00	3.83	28.41	32.24	54.00	-21.76	Average	100	238	P
6	4824.00	3.83	41.55	45.38	74.00	-28.62	Peak	100	238	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 3, CH06	:	

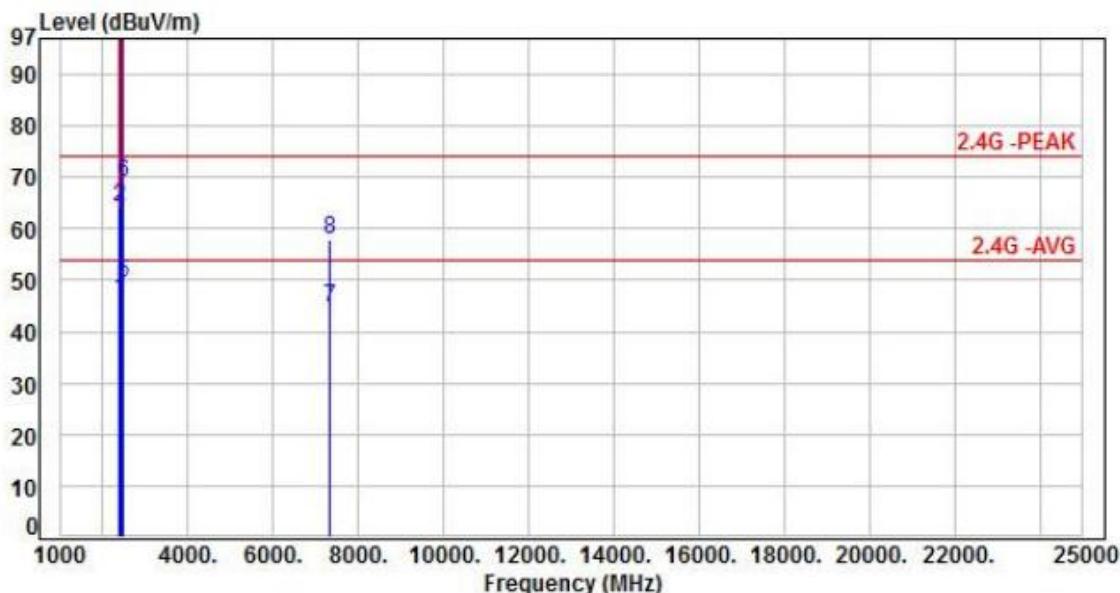


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.54	49.61	46.07	54.00	-7.93	Average	109	141	P
2	2390.00	-3.54	67.88	64.34	74.00	-9.66	Peak	109	141	P
3	2437.00	-3.47	104.10	100.63	200.00	-99.37	Average	109	141	P
4	2437.00	-3.47	113.75	110.28	200.00	-89.72	Peak	109	141	P
5	2483.50	-3.30	52.62	49.32	54.00	-4.68	Average	109	141	P
6	2483.50	-3.30	72.09	68.79	74.00	-5.21	Peak	109	141	P
7	7311.00	8.64	35.97	44.61	54.00	-9.39	Average	100	129	P
8	7311.00	8.64	49.25	57.89	74.00	-16.11	Peak	100	129	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 3, CH06	:	

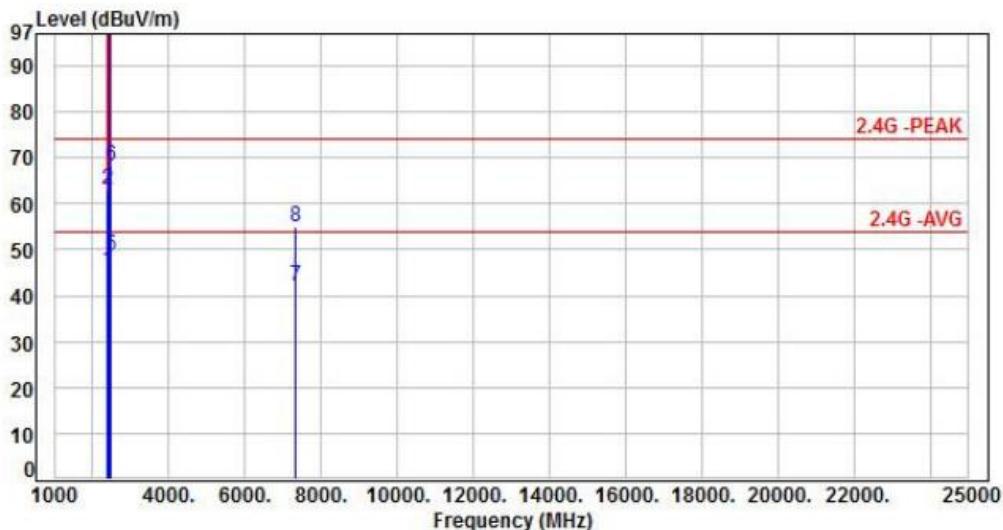


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.54	48.91	45.37	54.00	-8.63	Average	125	198	P
2	2390.00	-3.54	66.54	63.00	74.00	-11.00	Peak	125	198	P
3	2437.00	-3.47	100.89	97.42	200.00	-102.58	Average	125	198	P
4	2437.00	-3.47	110.51	107.04	200.00	-92.96	Peak	125	198	P
5	2483.50	-3.30	52.09	48.79	54.00	-5.21	Average	125	198	P
6	2483.50	-3.30	71.62	68.32	74.00	-5.68	Peak	125	198	P
7	7311.00	8.64	33.39	42.03	54.00	-11.97	Average	100	19	P
8	7311.00	8.64	46.25	54.89	74.00	-19.11	Peak	100	19	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 3, CH11	:	

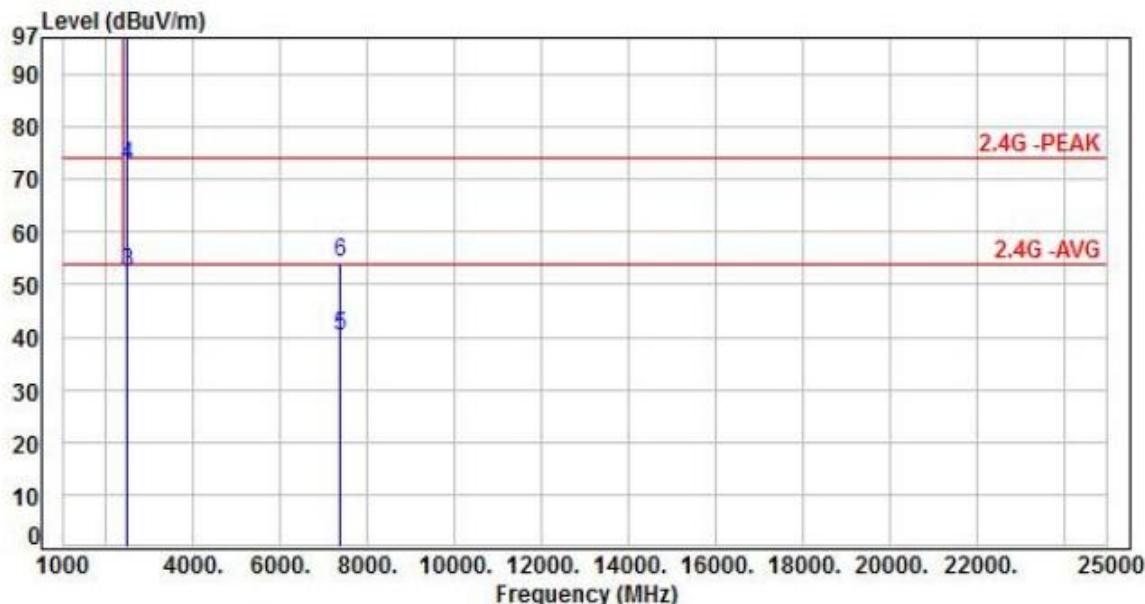

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-3.40	101.07	97.67	200.00	-102.33	Average	100	146	P
2	2462.00	-3.40	111.29	107.89	200.00	-92.11	Peak	100	146	P
3	2483.50	-3.30	55.81	52.51	54.00	-1.49	Average	100	146	P
4	2483.50	-3.30	75.79	72.49	74.00	-1.51	Peak	100	146	P
5	7386.00	8.66	31.56	40.22	54.00	-13.78	Average	104	232	P
6	7386.00	8.66	45.74	54.40	74.00	-19.60	Peak	104	232	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 3, CH11	:	

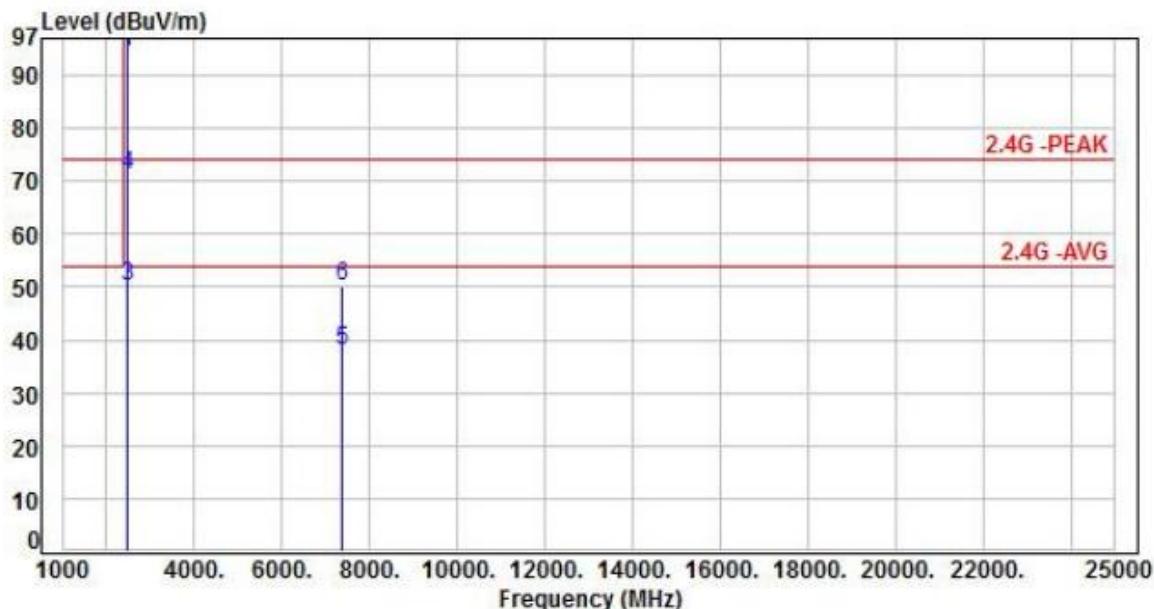

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-3.40	97.86	94.46	200.00	-105.54	Average	255	225	P
2	2462.00	-3.40	108.03	104.63	200.00	-95.37	Peak	255	225	P
3	2483.50	-3.30	53.57	50.27	54.00	-3.73	Average	255	225	P
4	2483.50	-3.30	74.48	71.18	74.00	-2.82	Peak	255	225	P
5	7386.00	8.66	29.18	37.84	54.00	-16.16	Average	100	19	P
6	7386.00	8.66	41.64	50.30	74.00	-23.70	Peak	100	19	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 4, CH03	:	

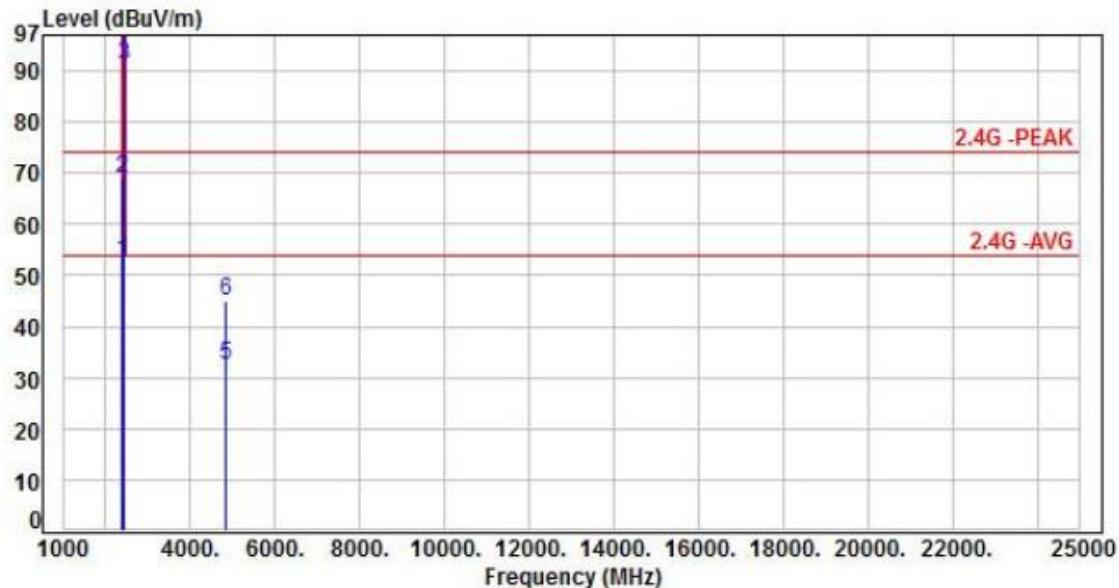

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.54	56.12	52.58	54.00	-1.42	Average	300	327	P
2	2390.00	-3.54	72.50	68.96	74.00	-5.04	Peak	300	327	P
3	2422.00	-3.49	94.47	90.98	200.00	-109.02	Average	300	327	P
4	2422.00	-3.49	103.68	100.19	200.00	-99.81	Peak	300	327	P
5	4844.00	3.90	28.42	32.32	54.00	-21.68	Average	100	227	P
6	4844.00	3.90	41.25	45.15	74.00	-28.85	Peak	100	227	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 4, CH03	:	

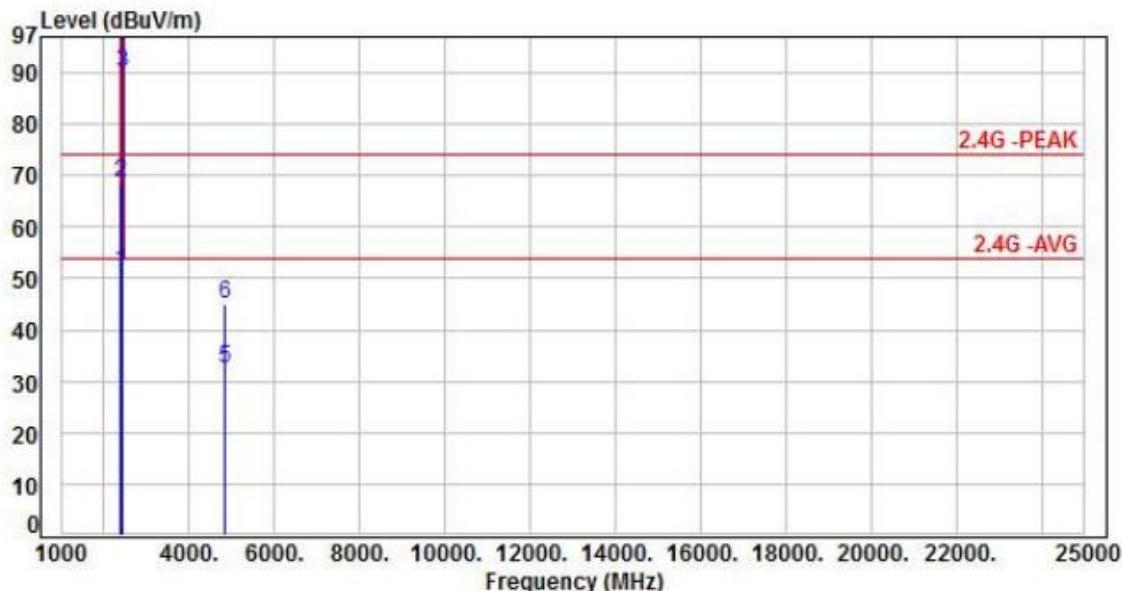

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.54	54.98	51.44	54.00	-2.56	Average	265	226	P
2	2390.00	-3.54	72.02	68.48	74.00	-5.52	Peak	265	226	P
3	2422.00	-3.49	93.54	90.05	200.00	-109.95	Average	265	226	P
4	2422.00	-3.49	102.40	98.91	200.00	-101.09	Peak	265	226	P
5	4844.00	3.90	28.68	32.58	54.00	-21.42	Average	100	218	P
6	4844.00	3.90	41.16	45.06	74.00	-28.94	Peak	100	218	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 4, CH06	:	

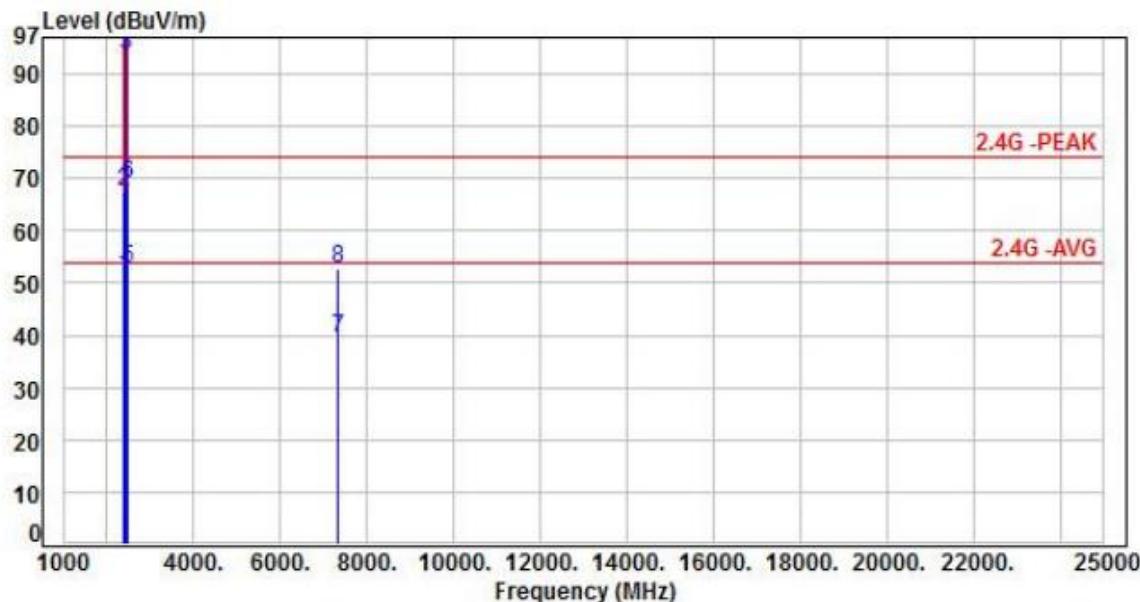

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.54	54.92	51.38	54.00	-2.62	Average	335	332	P
2	2390.00	-3.54	71.11	67.57	74.00	-6.43	Peak	335	332	P
3	2437.00	-3.47	97.32	93.85	200.00	-106.15	Average	335	332	P
4	2437.00	-3.47	106.43	102.96	200.00	-97.04	Peak	335	332	P
5	2483.50	-3.30	55.87	52.57	54.00	-1.43	Average	335	332	P
6	2483.50	-3.30	72.26	68.96	74.00	-5.04	Peak	335	332	P
7	7311.00	8.64	30.76	39.40	54.00	-14.60	Average	102	235	P
8	7311.00	8.64	44.27	52.91	74.00	-21.09	Peak	102	235	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 4, CH06	:	

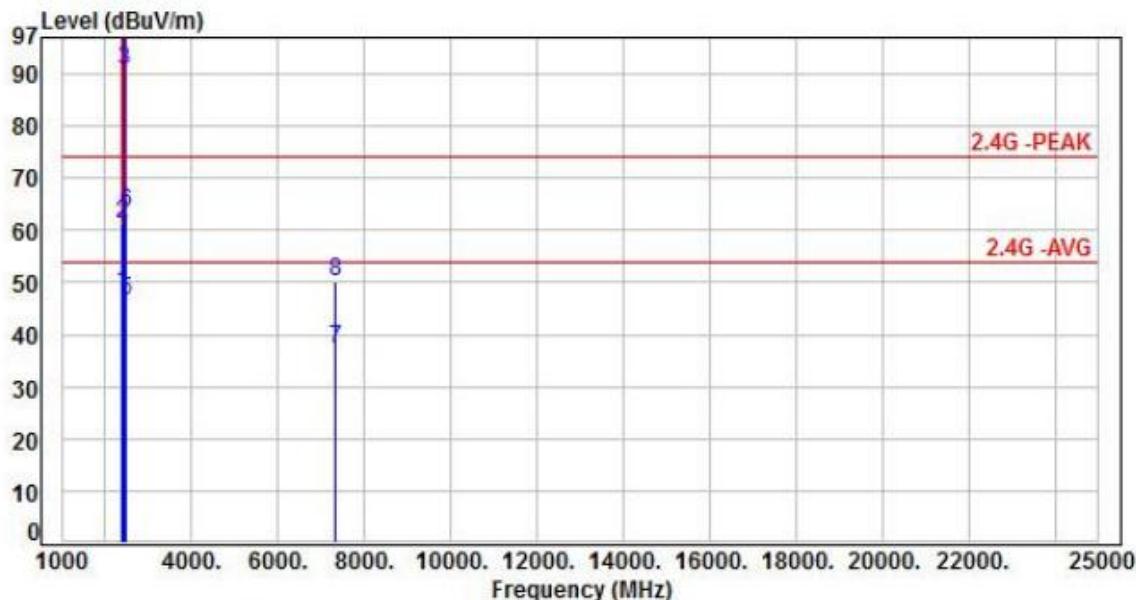

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.54	51.63	48.09	54.00	-5.91	Average	334	123	P
2	2390.00	-3.54	64.87	61.33	74.00	-12.67	Peak	334	123	P
3	2437.00	-3.47	94.08	90.61	200.00	-109.39	Average	334	123	P
4	2437.00	-3.47	103.35	99.88	200.00	-100.12	Peak	334	123	P
5	2483.50	-3.30	49.72	46.42	54.00	-7.58	Average	334	123	P
6	2483.50	-3.30	66.63	63.33	74.00	-10.67	Peak	334	123	P
7	7311.00	8.64	28.76	37.40	54.00	-16.60	Average	100	17	P
8	7311.00	8.64	41.50	50.14	74.00	-23.86	Peak	100	17	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 4, CH09	:	

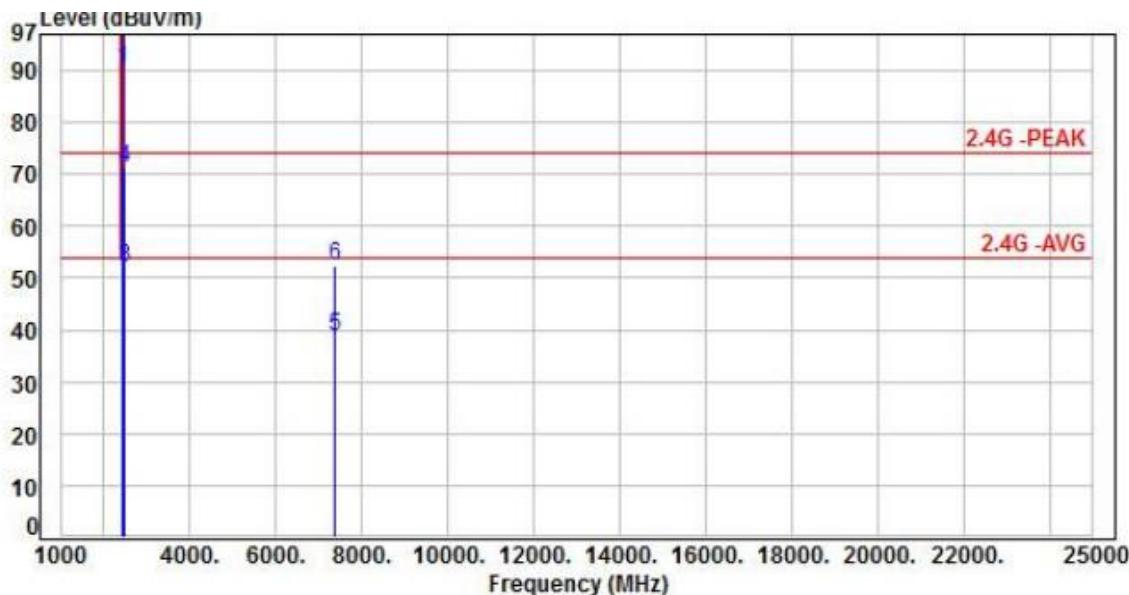

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2452.00	-3.45	93.93	90.48	200.00	-109.52	Average	150	327	P
2	2452.00	-3.45	103.49	100.04	200.00	-99.96	Peak	150	327	P
3	2483.50	-3.30	55.42	52.12	54.00	-1.88	Average	150	327	P
4	2483.50	-3.30	74.45	71.15	74.00	-2.85	Peak	150	327	P
5	7356.00	8.59	30.29	38.88	54.00	-15.12	Average	100	232	P
6	7356.00	8.59	43.82	52.41	74.00	-21.59	Peak	100	232	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 4, CH09	:	

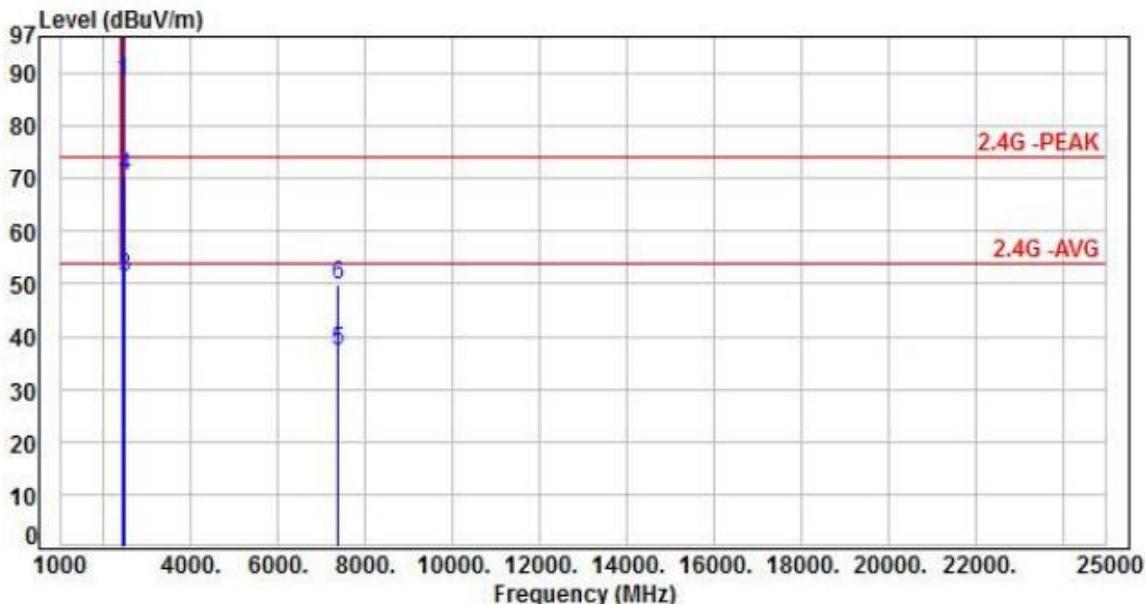

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2452.00	-3.45	91.90	88.45	200.00	-111.55	Average	253	225	P
2	2452.00	-3.45	101.15	97.70	200.00	-102.30	Peak	253	225	P
3	2483.50	-3.30	54.72	51.42	54.00	-2.58	Average	253	225	P
4	2483.50	-3.30	73.61	70.31	74.00	-3.69	Peak	253	225	P
5	7356.00	8.59	28.52	37.11	54.00	-16.89	Average	100	20	P
6	7356.00	8.59	41.23	49.82	74.00	-24.18	Peak	100	20	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



## 6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

\*\*: Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



## 7. Test of Conducted Spurious Emission

### 7.1 Test Limit

According to the methods defined in ANSI C63.10-2013 Section 11.11.1


Below –30dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

### 7.2 Test Procedure

According to the methods defined in ANSI C63.10-2013 Section 11.11.2 & 11.11.3

- a. The transmitter output was connected to the spectrum analyzer via a low loss cable.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- c. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 30dB relative to the maximum measured in-band peak PSD level.
- d. The band edges was measured and recorded.

### 7.3 Test Setup Layout




### 7.4 Test Result and Data



Note: Test plots refers to the following pages.



Modulation Type: 802.11b, CH 01

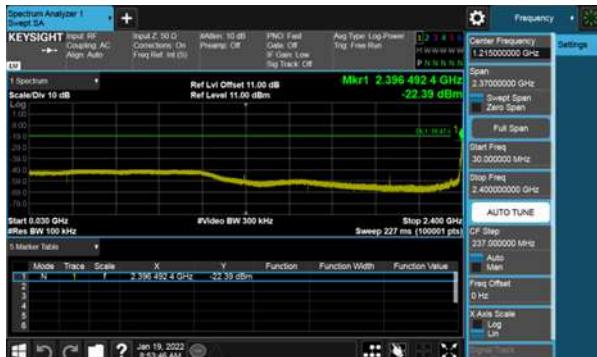


Modulation Type: 802.11b, CH 06

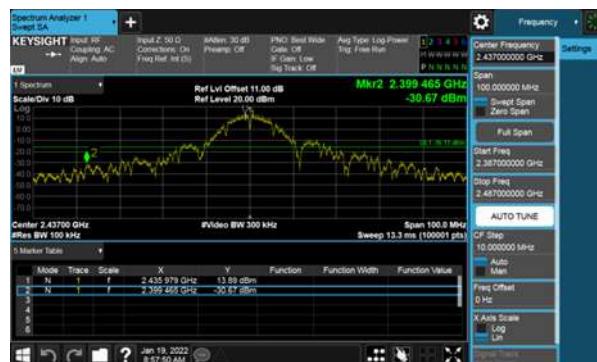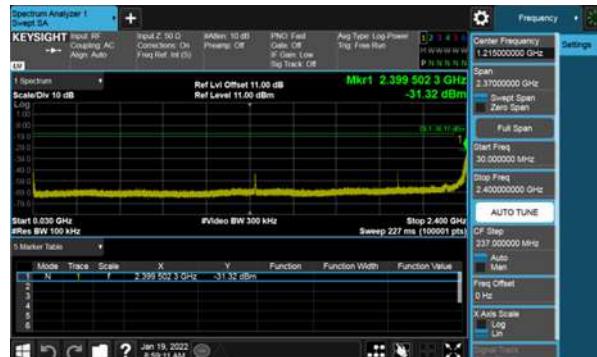




Modulation Type: 802.11b, CH 11


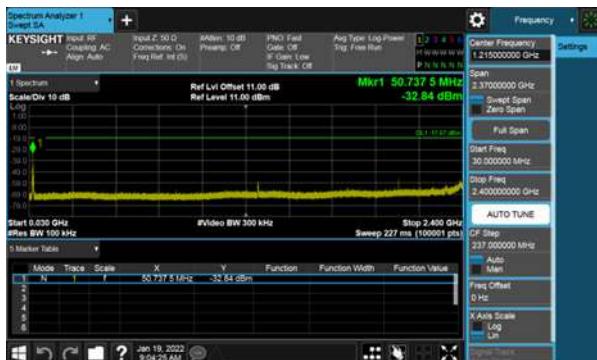




Modulation Type: 802.11g, CH 01

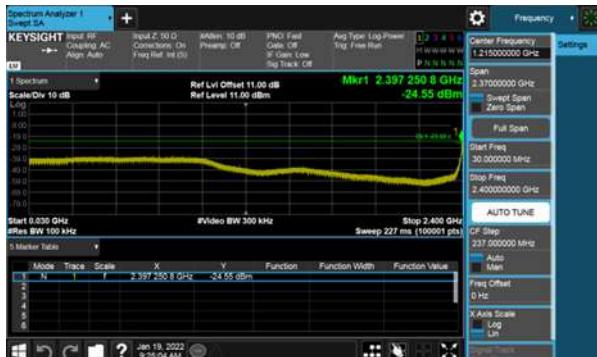

Modulation Type: 802.11g, CH 06

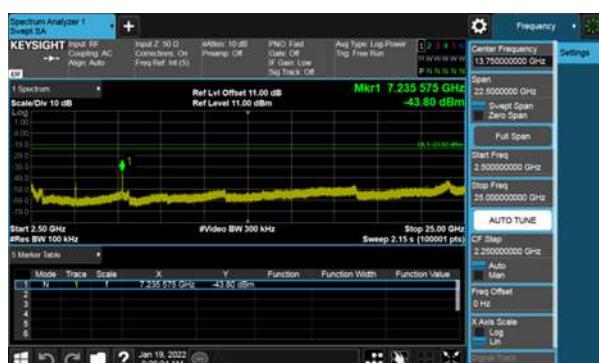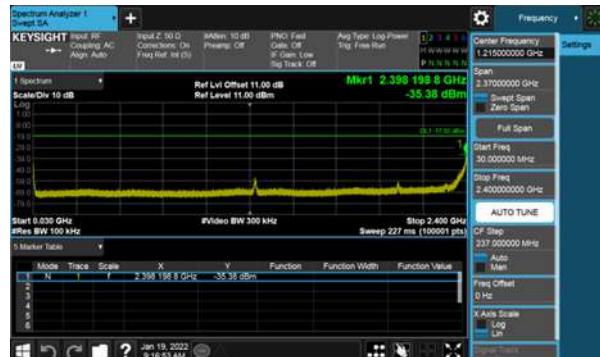




Modulation Type: 802.11g, CH 11









Modulation Type: 802.11n HT20, CH01

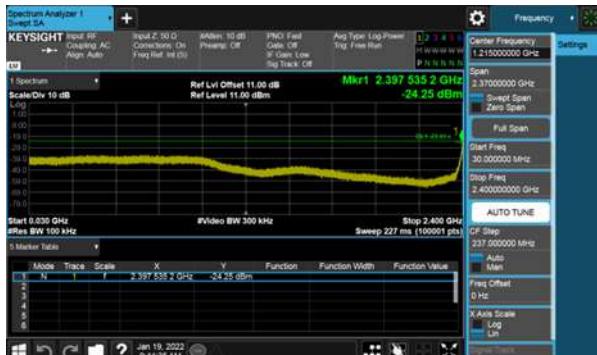

Modulation Type: 802.11n HT20, CH06

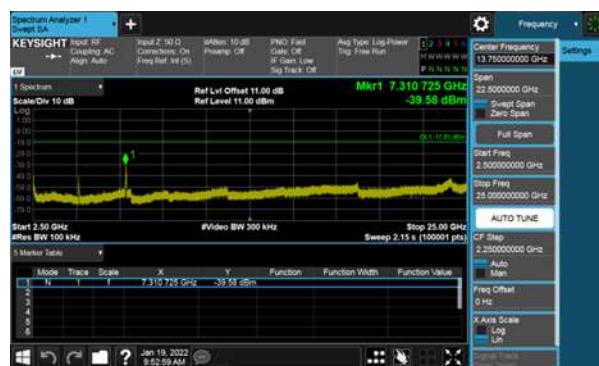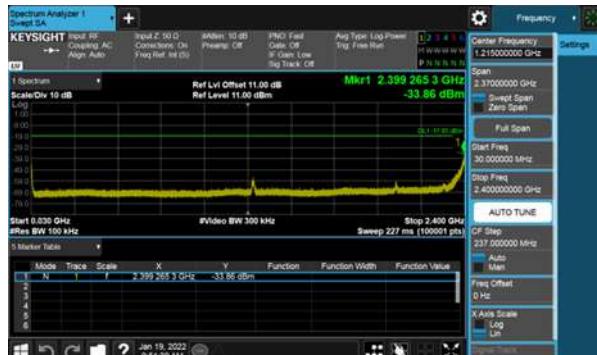


Modulation Type: 802.11n HT20, CH11

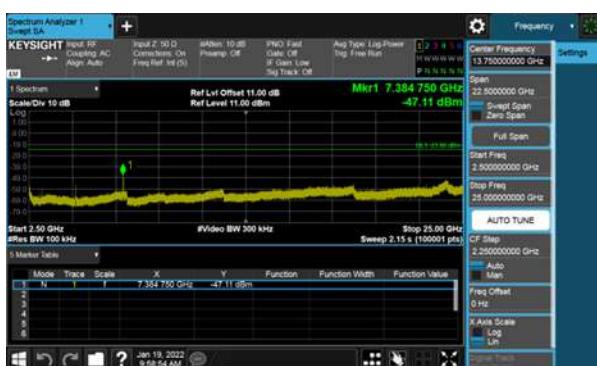
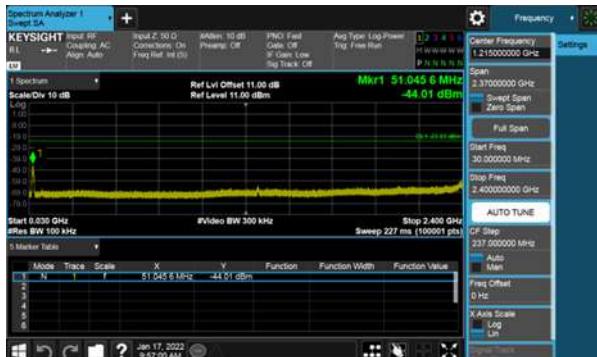




Modulation Type: 802.11n HT40, CH03


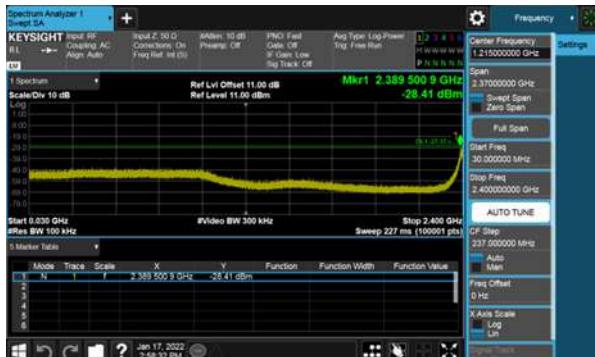


Modulation Type: 802.11n HT40, CH06

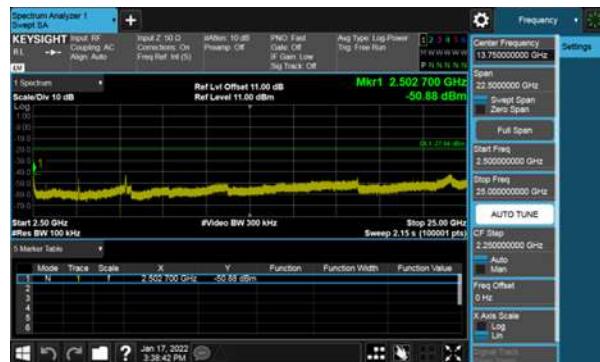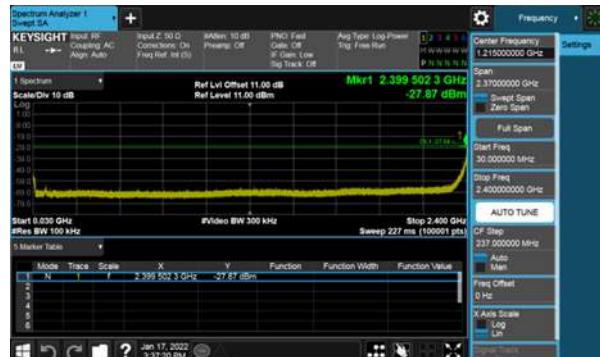



Modulation Type: 802.11n HT40, CH09

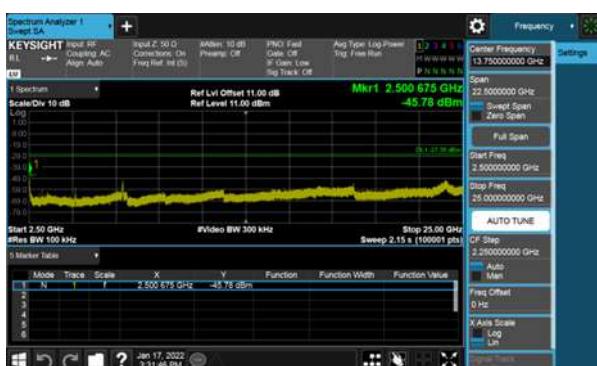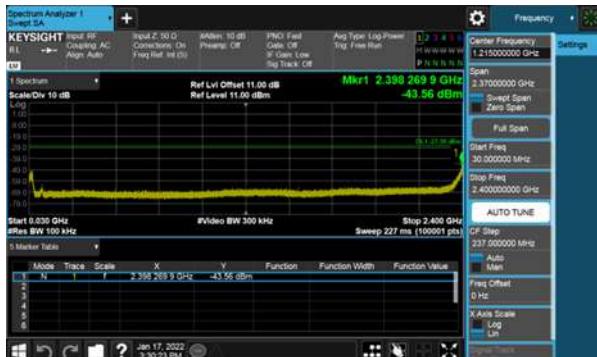



## 8. On Time, Duty Cycle and Measurement methods


### 8.1 Test Limit

None; for reporting purposes only.

### 8.2 Test Procedure

According to the methods defined in ANSI C63.10-2013 Section 11.6  
Zero-Span Spectrum Analyzer Method.

### 8.3 Test Setup Layout



### 8.4 Test Result and Data

Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
11b,1M	8.42	8.52	98.83%
11g,6M	1.40	1.50	93.20%
11n HT20	1.31	1.41	92.83%
11n HT40	0.65	0.75	85.92%



Modulation Type: 802.11b(1Mbps)



Modulation Type: 802.11n HT40(13.5Mbps)



Modulation Type: 802.11g(6Mbps)



Modulation Type: 802.11n HT20(6.5Mbps)





## 9. 6dB Bandwidth Measurement Data

### 9.1 Test Limit


The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

### 9.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.8

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- c. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- d. The 6dB Bandwidth was measured and recorded.

### 9.3 Test Setup Layout



### 9.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth	Limit (MHz)
			(MHz)	
11b	1	2412	8.01	0.5
	6	2437	8.01	0.5
	11	2462	8.01	0.5
11g	1	2412	15.18	0.5
	6	2437	15.18	0.5
	11	2462	15.18	0.5
11n HT20	1	2412	15.15	0.5
	6	2437	15.18	0.5
	11	2462	15.18	0.5
11n HT40	3	2422	35.16	0.5
	6	2437	35.16	0.5
	9	2452	35.16	0.5



6dB Bandwidth

Modulation Type: 802.11b  
CH01Modulation Type: 802.11g  
CH01

CH06



CH06



CH11



CH11





Modulation Type: 802.11n HT20  
CH01



Modulation Type: 802.11n HT40  
CH03



CH06



CH06



CH11



CH09





## 10. Maximum Average Output Power

### 10.1 Test Limit

The Maximum Average Output Power Measurement is 30dBm.


If transmitting antennas of directional gain greater than 6 dBi are used, the average output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

### 10.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.9.2.3.2

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

### 10.3 Test Setup Layout



### 10.4 Test Result and Data

Setting	Modulation Mode	Channel	Frequency (MHz)	Conducted(average) output power (dBm)	Total AV power (dBm)	Total AV power (mW)	Power Limit (dBm)
				ANT A			
68	11b	1	2412	19.93	19.93	98.401	30.00
79		6	2437	22.15	22.15	164.059	30.00
68		11	2462	20.26	20.26	106.170	30.00
66	11g	1	2412	18.03	18.03	63.533	30.00
79		6	2437	22.11	22.11	162.555	30.00
64		11	2462	17.87	17.87	61.235	30.00
66	11n HT20	1	2412	17.80	17.80	60.256	30.00
79		6	2437	22.17	22.17	164.816	30.00
63		11	2462	17.67	17.67	58.479	30.00
53	11n HT40	3	2422	15.96	15.96	39.446	30.00
53		6	2437	16.19	16.19	41.591	30.00
53		9	2452	16.29	16.29	42.560	30.00



## 11. Power Spectral Density

### 11.1 Test Limit


The Maximum of Power Spectral Density Measurement is 8dBm.

If transmitting antennas of directional gain greater than 6 dBi are used, the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

### 11.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.10

### 11.3 Test Setup Layout



### 11.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 100KHz Bandwidth(dBm)	Sum chain (dBm)	Duty Cycle CF(dB)	Total PSD (dBm)	Limit (dBm)
			ANT A				
11b	1	2412	3.455	3.46	0.00	3.46	8.00
	6	2437	5.446	5.45	0.00	5.45	8.00
	11	2462	3.973	3.97	0.00	3.97	8.00
11g	1	2412	0.633	0.63	0.31	0.94	8.00
	6	2437	4.611	4.61	0.31	4.92	8.00
	11	2462	0.822	0.82	0.31	1.13	8.00
11n HT20	1	2412	-0.102	-0.10	0.32	0.22	8.00
	6	2437	4.146	4.15	0.32	4.47	8.00
	11	2462	-0.197	-0.20	0.32	0.12	8.00
11n HT40	3	2422	-5.184	-5.18	0.66	-4.52	8.00
	6	2437	-5.285	-5.29	0.66	-4.63	8.00
	9	2452	-5.077	-5.08	0.66	-4.42	8.00



Modulation Type: 802.11b  
CH01



Modulation Type: 802.11g  
CH01



CH06



CH06



CH11



CH11






Modulation Type: 802.11n HT20  
CH01




Modulation Type: 802.11n HT40  
CH03

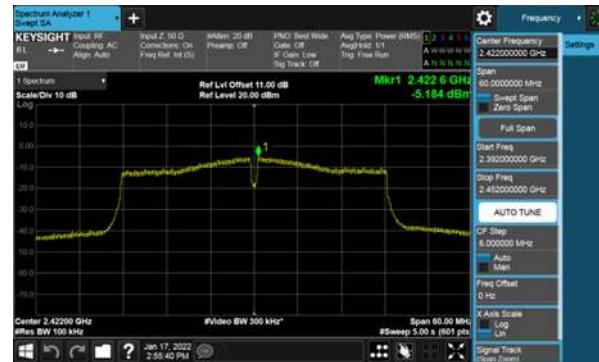

CH06



CH06

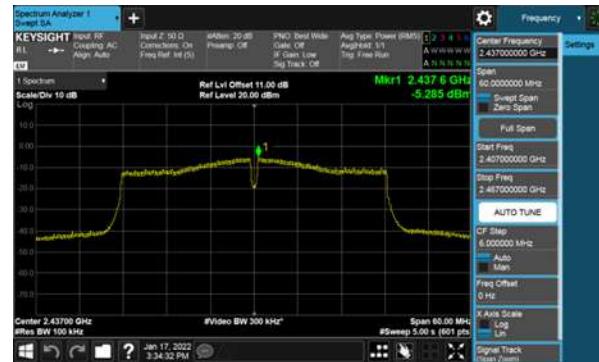

CH11



CH09

