


# 性能参数

- 1、频率范围：433MHz
- 2、驻波比： $\leq 1.5$
- 3、输入阻抗：50
- 4、增益：2db
- 5、线径：1.05mm
- 6、弹簧外径：4.6mm
- 7、总长度包括焊接部分：300mm
- 8、接口形式：焊接

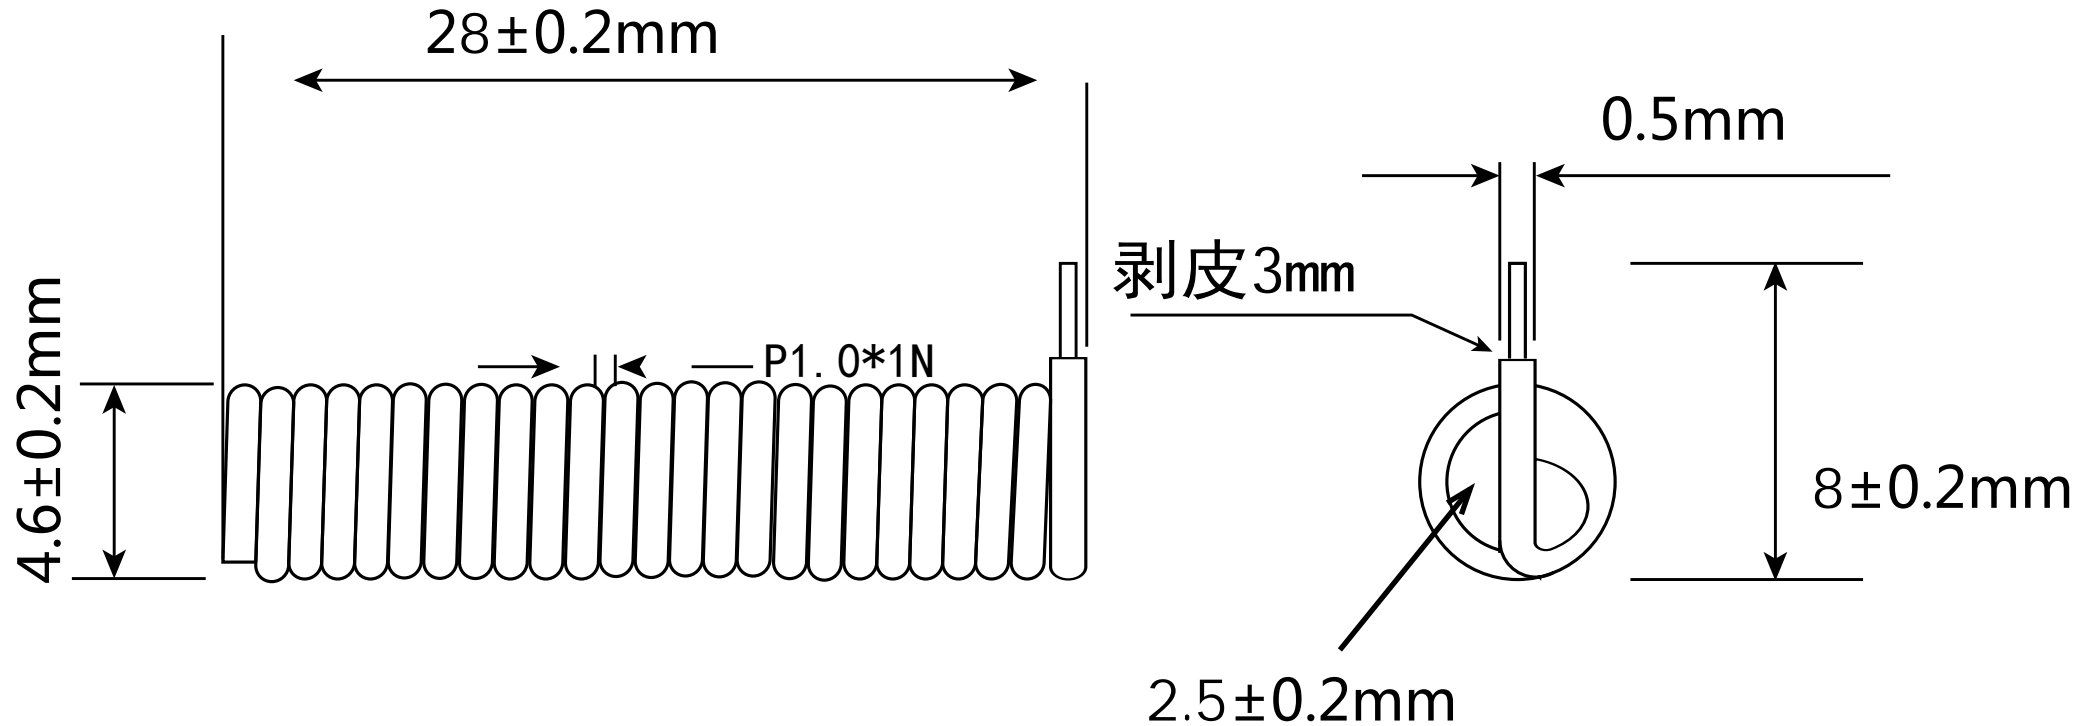

材料: 单 芯线径 $1.05 \pm 0.02\text{mm}$  ,  
25圈 , 绝缘材质黑色PVC料

300MM


温度：线皮塑胶最高温度120

# Zhongshan Kaiyi Electronics Co., Ltd.

Address: No. 7 Beihai Road, Guzhen Town, Zhongshan City, Guangdong Province.

Only radiated measurements are used to show compliance with FCC limits for fundamental and spurious emissions.

1. Frequency range: 433.92MHz
2. Standing wave ratio:  $\leq 1.5$
3. Input impedance: 50
4. Gain: 2db
5. Wire diameter: 1.05mm
6. Spring outer diameter: 4.6mm
7. Total length including welding part: 300mm
8. Interface form: Welding

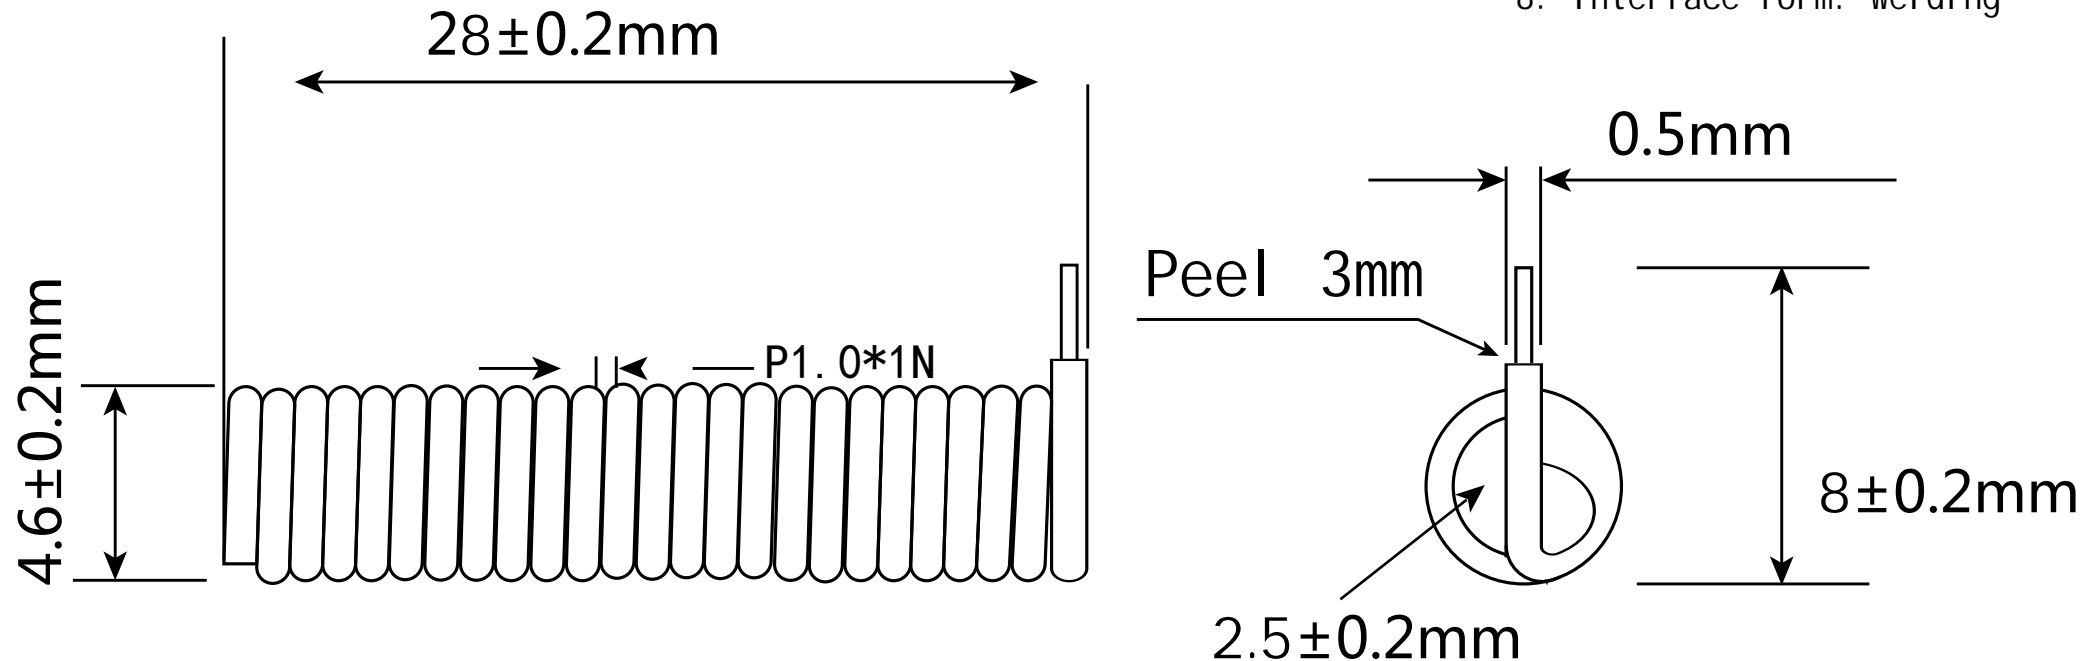

Material: Single copper core wire diameter  $1.05 \pm 0.02\text{mm}$ , straight length: 300MM, number of turns: 25 turns for spring type, insulation material black PVC.

Temperature: Maximum temperature for wire skin plastic  $120^{\circ}\text{C}$ .