

#01_WLAN2.4GHz_802.11b 1Mbps_Right Cheek_0mm_Ch6;Ant 1

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1.005

Medium: HSL_2450_221107 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.791$ S/m; $\epsilon_r = 39.64$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.54, 7.54, 7.54) @ 2437 MHz; Calibrated: 2022/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2022/3/29
- Phantom: Twin-SAM V5.0 (30deg probe tilt)_Right; Type: QD 000 P40 CD; Serial: TP-1479
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.59 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 25.10 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.518 W/kg

Maximum value of SAR (measured) = 1.69 W/kg

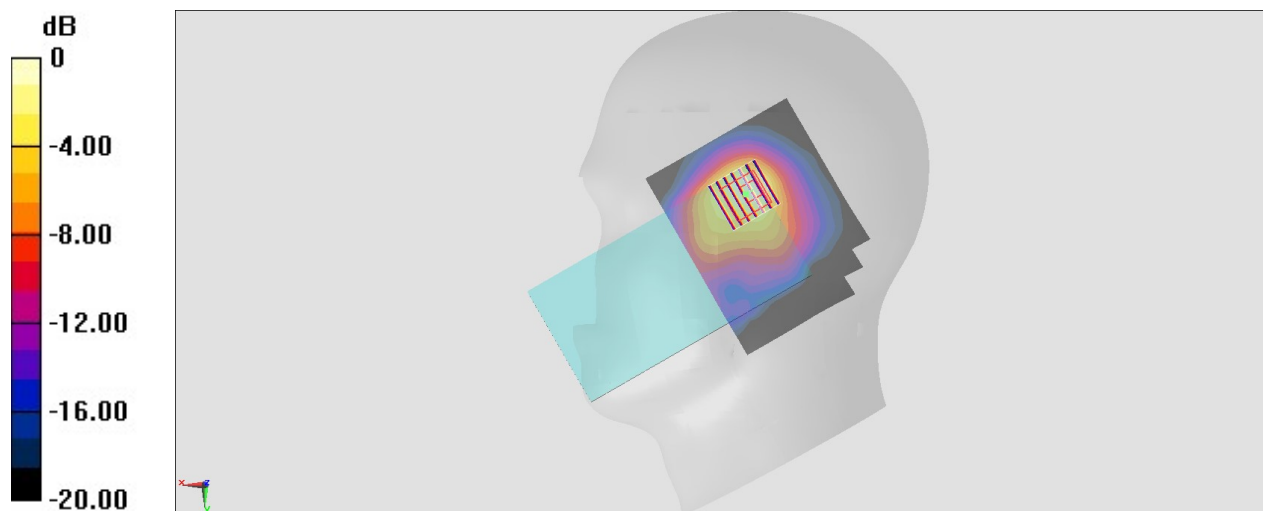

0 dB = 1.69 W/kg = 2.28 dBW/kg

#02_WLAN5GHz_802.11n-HT40 MCS0_Right Cheek_0mm_Ch54;Ant 1+2

Communication System: 802.11n; Frequency: 5270 MHz; Duty Cycle: 1:1.037

Medium: HSL_5G_221107 Medium parameters used: $f = 5270$ MHz; $\sigma = 4.84$ S/m; $\epsilon_r = 36.992$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(5.34, 5.34, 5.34) @ 5270 MHz; Calibrated: 2022/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2022/3/29
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1801
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (121x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.64 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 13.08 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.74 W/kg

SAR(1 g) = 0.717 W/kg; SAR(10 g) = 0.220 W/kg

Maximum value of SAR (measured) = 1.79 W/kg

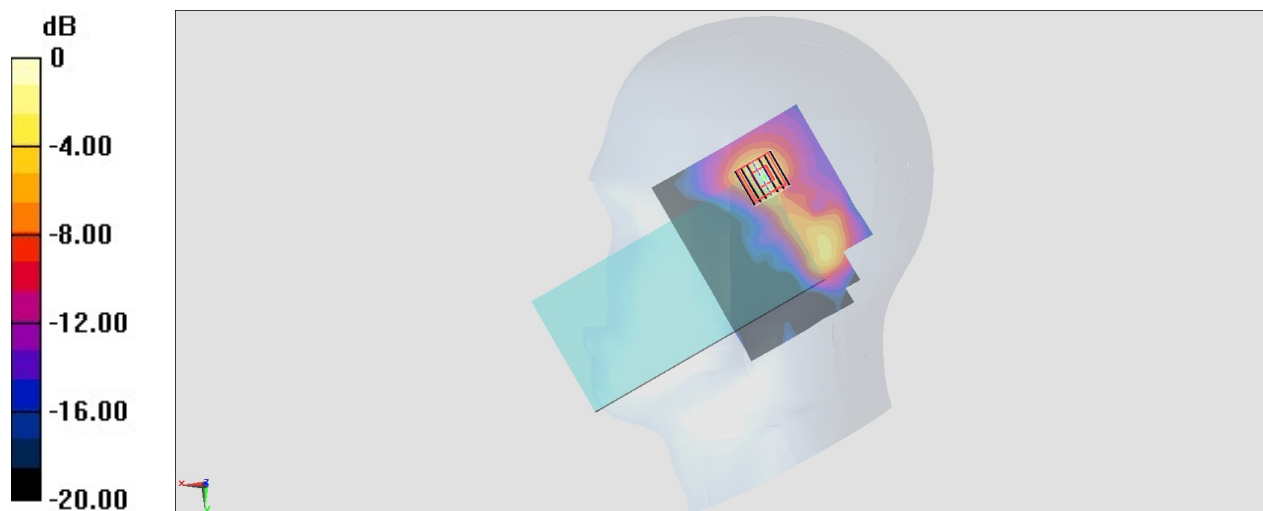

0 dB = 1.79 W/kg = 2.53 dBW/kg

#03_WLAN5GHz_802.11n-HT40 MCS0_Right Cheek_0mm_Ch142;Ant 1+2

Communication System: 802.11n; Frequency: 5710 MHz; Duty Cycle: 1:1.037

Medium: HSL_5G_221107 Medium parameters used: $f = 5710$ MHz; $\sigma = 5.305$ S/m; $\epsilon_r = 36.478$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(4.96, 4.96, 4.96) @ 5710 MHz; Calibrated: 2022/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2022/3/29
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1801
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (121x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.43 W/kg


Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 15.60 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.78 W/kg

SAR(1 g) = 0.662 W/kg; SAR(10 g) = 0.228 W/kg

Maximum value of SAR (measured) = 1.37 W/kg

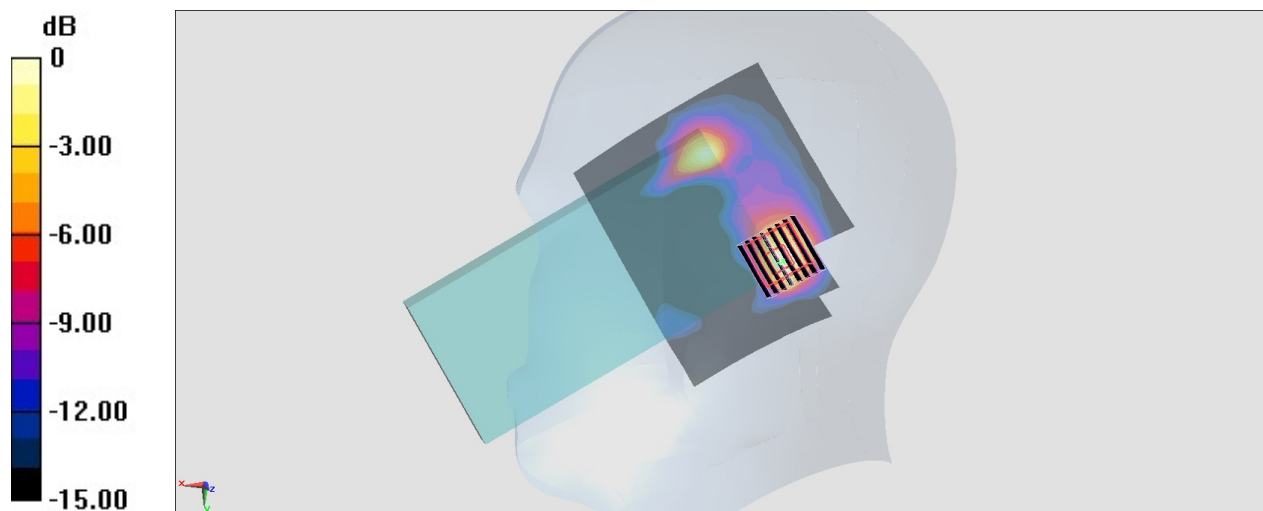

0 dB = 1.37 W/kg = 1.37 dBW/kg

#04_WLAN5GHz_802.11n-HT40 MCS0_Left Cheek_0mm_Ch159;Ant 1+2

Communication System: 802.11n; Frequency: 5795 MHz; Duty Cycle: 1:1.037

Medium: HSL_5G_221109 Medium parameters used : $f = 5795$ MHz; $\sigma = 5.155$ S/m; $\epsilon_r = 35.439$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(5.15, 5.15, 5.15) @ 5795 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2022/5/30
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (121x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.20 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 19.84 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 3.44 W/kg

SAR(1 g) = 0.846 W/kg; SAR(10 g) = 0.237 W/kg

Maximum value of SAR (measured) = 2.14 W/kg

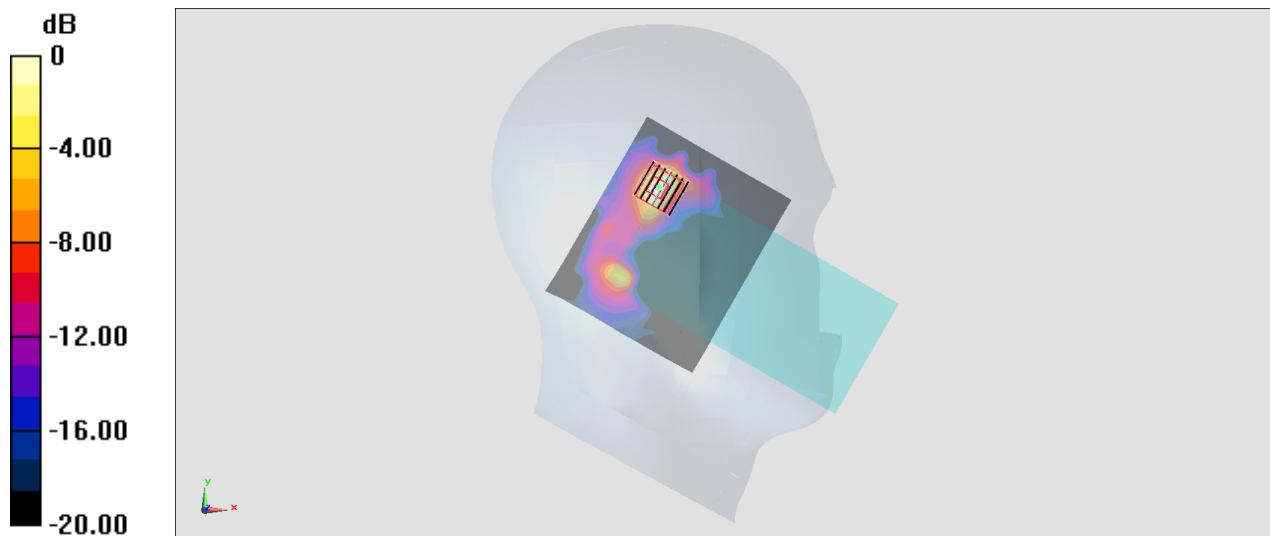

0 dB = 2.14 W/kg = 3.30 dBW/kg

#05_Bluetooth_1Mbps_Right Cheek_0mm_Ch78;Ant 1

Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1.295

Medium: HSL_2450_221109 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.868$ S/m; $\epsilon_r = 39.19$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(8.2, 8.2, 8.2) @ 2480 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2022/5/30
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (101x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.225 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.440 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.198 W/kg

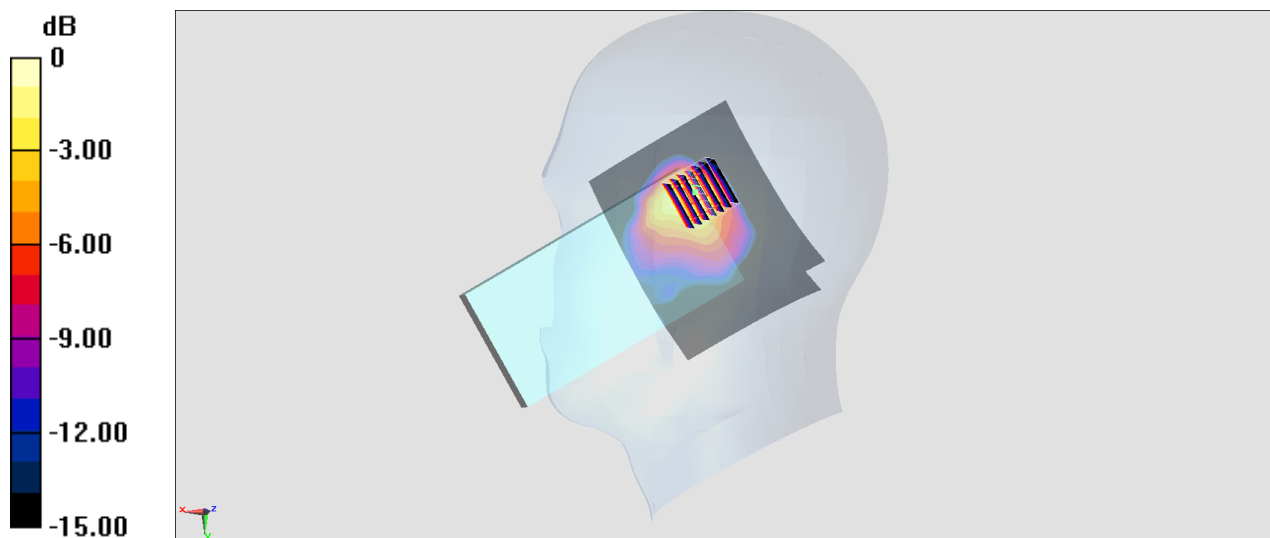

0 dB = 0.198 W/kg = -7.03 dBW/kg

#06_WLAN2.4GHz_802.11b 1Mbps_Back_15mm_Ch1;Ant 1

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1.005

Medium: HSL_2450_221107 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.756$ S/m; $\epsilon_r = 39.655$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.54, 7.54, 7.54) @ 2412 MHz; Calibrated: 2022/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2022/3/29
- Phantom: Twin-SAM V5.0 (30deg probe tilt)_Right; Type: QD 000 P40 CD; Serial: TP-1479
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.348 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.28 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.413 W/kg

SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.122 W/kg

Maximum value of SAR (measured) = 0.336 W/kg

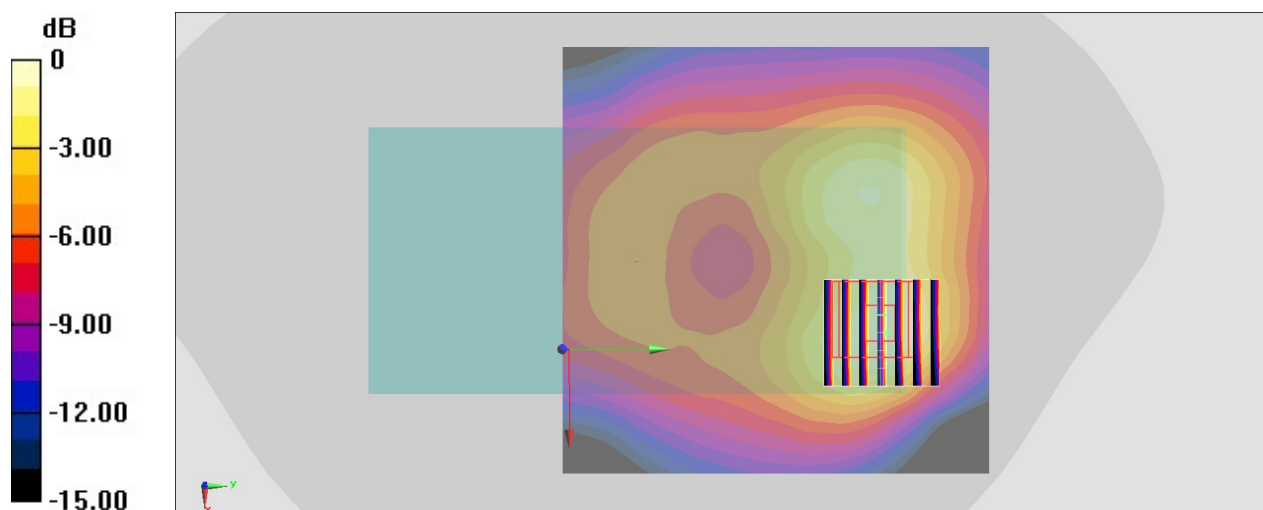

0 dB = 0.336 W/kg = -4.74 dBW/kg

#07_WLAN5GHz_802.11n-HT40 MCS0_Back_15mm_Ch54;Ant 1+2

Communication System: 802.11n; Frequency: 5270 MHz; Duty Cycle: 1:1.037

Medium: HSL_5G_221109 Medium parameters used: $f = 5270$ MHz; $\sigma = 4.622$ S/m; $\epsilon_r = 36.094$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(5.71, 5.71, 5.71) @ 5270 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2022/5/30
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.595 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 12.33 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.947 W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.125 W/kg

Maximum value of SAR (measured) = 0.634 W/kg

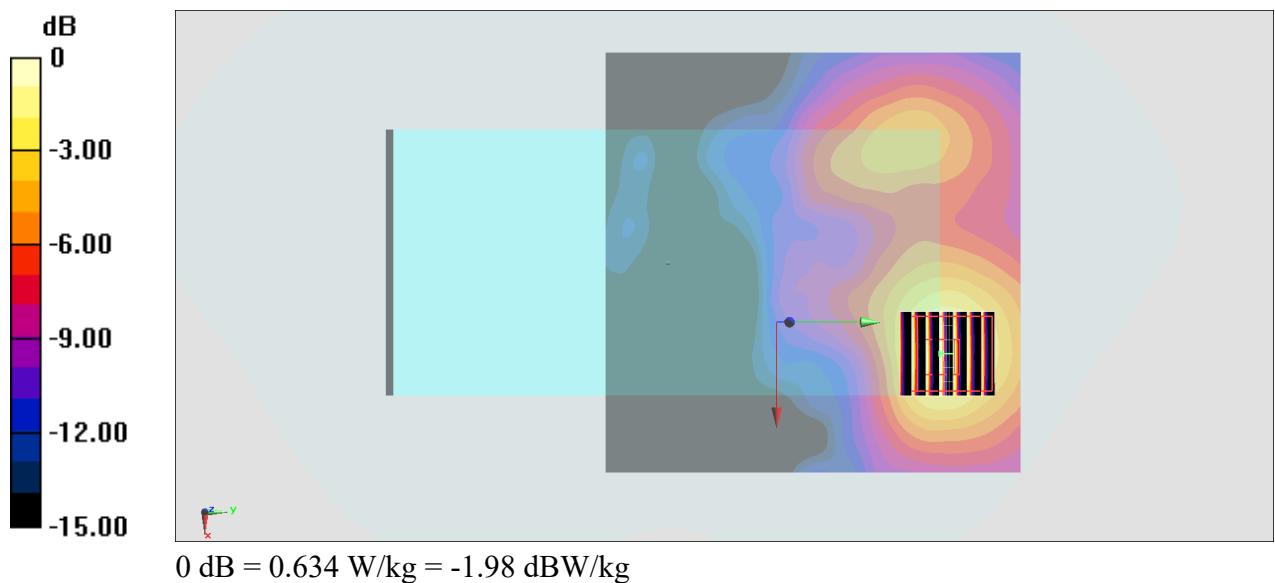

#08_WLAN5GHz_802.11n-HT40 MCS0_Back_15mm_Ch142;Ant 1+2

Communication System: 802.11n; Frequency: 5710 MHz; Duty Cycle: 1:1.037

Medium: HSL_5G_221109 Medium parameters used: $f = 5710$ MHz; $\sigma = 5.053$ S/m; $\epsilon_r = 35.555$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(5.15, 5.15, 5.15) @ 5710 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2022/5/30
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (121x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.07 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 13.09 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.456 W/kg; SAR(10 g) = 0.183 W/kg

Maximum value of SAR (measured) = 0.997 W/kg

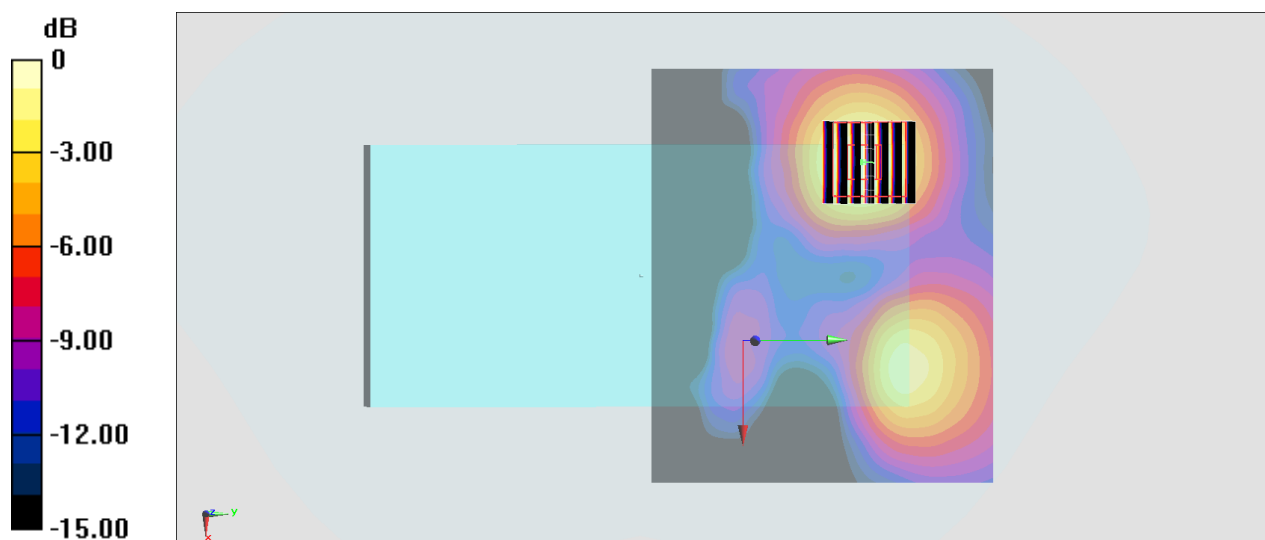

0 dB = 0.997 W/kg = -0.01 dBW/kg

#09_WLAN5GHz_802.11n-HT40 MCS0_Back_15mm_Ch159;Ant 1+2

Communication System: 802.11n; Frequency: 5795 MHz; Duty Cycle: 1:1.037

Medium: HSL_5G_221109 Medium parameters used : $f = 5795$ MHz; $\sigma = 5.155$ S/m; $\epsilon_r = 35.439$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(5.15, 5.15, 5.15) @ 5795 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2022/5/30
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (121x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.19 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 12.36 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.516 W/kg; SAR(10 g) = 0.210 W/kg

Maximum value of SAR (measured) = 1.13 W/kg

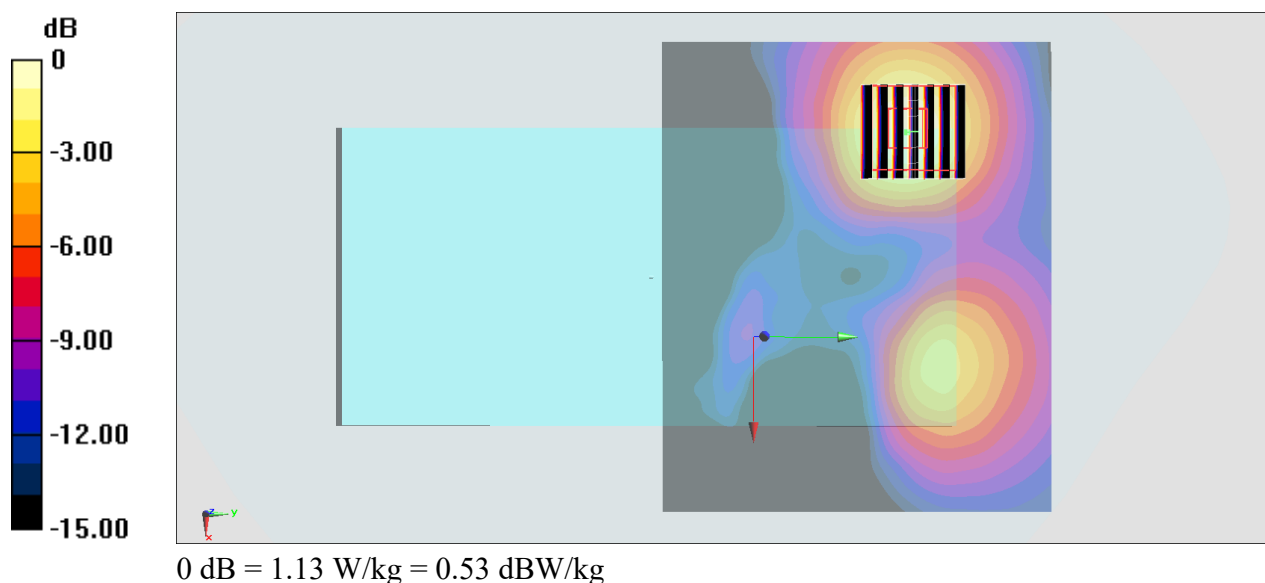

#10_Bluetooth_1Mbps_Back_15mm_Ch78;Ant 1

Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1.295

Medium: HSL_2450_221109 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.868$ S/m; $\epsilon_r = 39.19$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(8.2, 8.2, 8.2) @ 2480 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2022/5/30
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (101x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0318 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.368 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.0410 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0323 W/kg

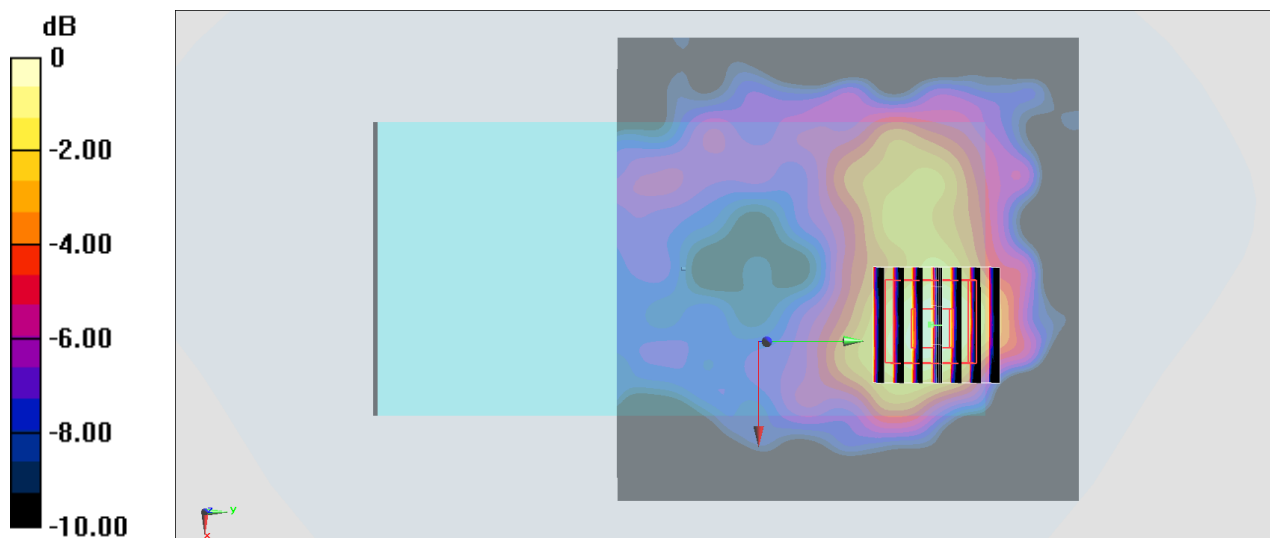

#11_WLAN2.4GHz_802.11b 1Mbps_Back_0mm_Ch11;Ant 2

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1.005

Medium: HSL_2450_221107 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.817$ S/m; $\epsilon_r = 39.48$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.54, 7.54, 7.54) @ 2462 MHz; Calibrated: 2022/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2022/3/29
- Phantom: Twin-SAM V5.0 (30deg probe tilt)_Right; Type: QD 000 P40 CD; Serial: TP-1479
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 6.05 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 52.99 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 8.19 W/kg

SAR(1 g) = 3.17 W/kg; SAR(10 g) = 1.3 W/kg

Maximum value of SAR (measured) = 5.84 W/kg

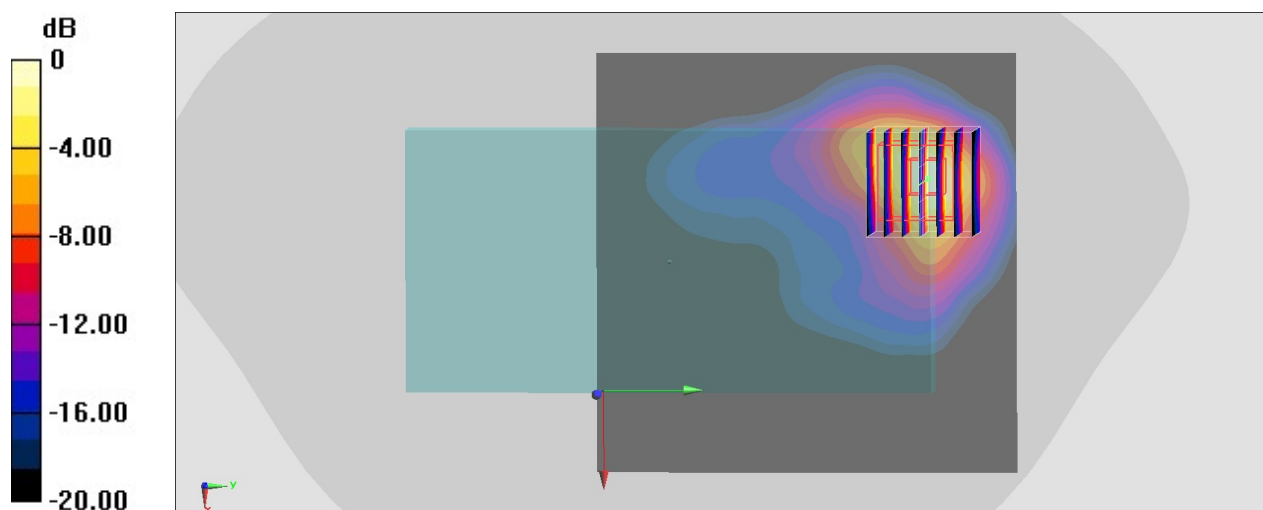

0 dB = 5.84 W/kg = 7.66 dBW/kg

#12_WLAN5GHz_802.11n-HT40 MCS0_Back_0mm_Ch54;Ant 1+2

Communication System: 802.11n; Frequency: 5270 MHz; Duty Cycle: 1:1.037

Medium: HSL_5G_221109 Medium parameters used: $f = 5270$ MHz; $\sigma = 4.622$ S/m; $\epsilon_r = 36.094$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(5.71, 5.71, 5.71) @ 5270 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2022/5/30
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (121x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.86 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 38.60 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 10.6 W/kg

SAR(1 g) = 2.58 W/kg; SAR(10 g) = 0.714 W/kg

Maximum value of SAR (measured) = 6.83 W/kg

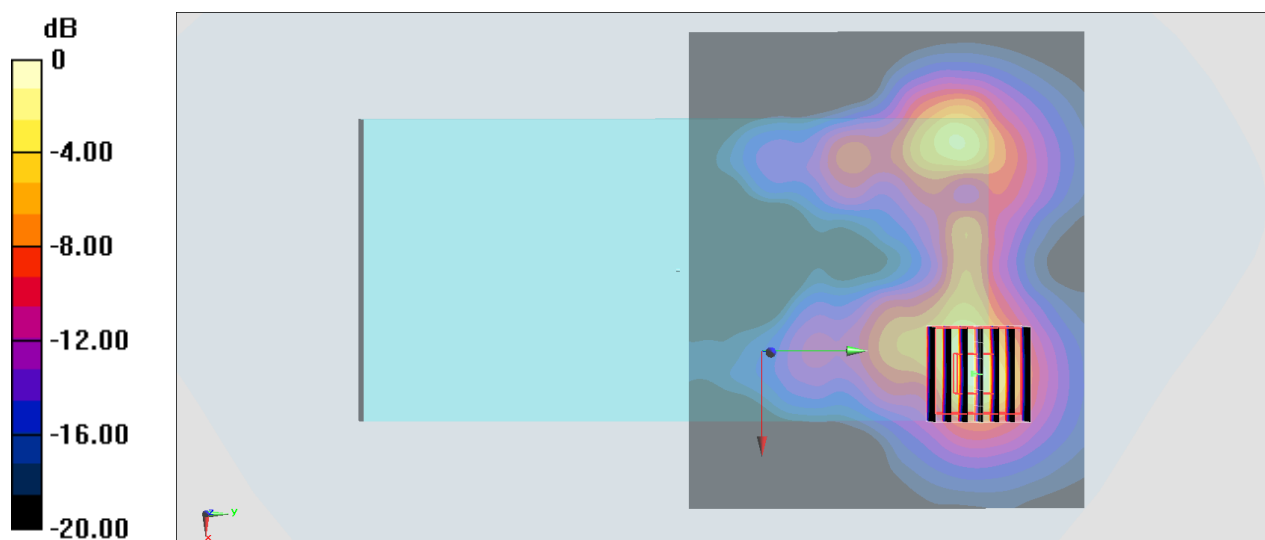

0 dB = 6.83 W/kg = 8.34 dBW/kg

#13_WLAN5GHz_802.11n-HT40 MCS0_Back_0mm_Ch142;Ant 1+2

Communication System: 802.11n; Frequency: 5710 MHz; Duty Cycle: 1:1.037

Medium: HSL_5G_221109 Medium parameters used: $f = 5710$ MHz; $\sigma = 5.053$ S/m; $\epsilon_r = 35.555$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(5.15, 5.15, 5.15) @ 5710 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2022/5/30
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (121x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 12.4 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 34.91 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 23.1 W/kg

SAR(1 g) = 4.51 W/kg; SAR(10 g) = 0.965 W/kg

Maximum value of SAR (measured) = 13.2 W/kg

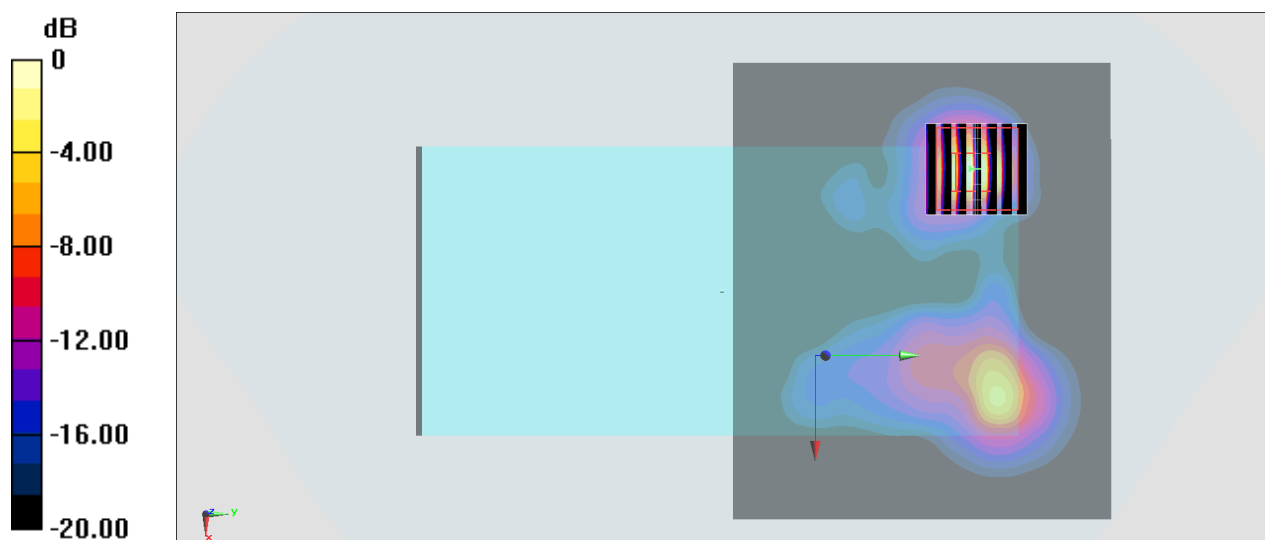

0 dB = 13.2 W/kg = 11.21 dBW/kg

#14_WLAN5GHz_802.11n-HT40 MCS0_Back_0mm_Ch159;Ant 1+2

Communication System: 802.11n; Frequency: 5795 MHz; Duty Cycle: 1:1.037

Medium: HSL_5G_221109 Medium parameters used : $f = 5795$ MHz; $\sigma = 5.155$ S/m; $\epsilon_r = 35.439$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(5.15, 5.15, 5.15) @ 5795 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2022/5/30
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (121x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 16.8 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 30.25 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 31.4 W/kg

SAR(1 g) = 6.05 W/kg; SAR(10 g) = 1.29 W/kg

Maximum value of SAR (measured) = 18.5 W/kg

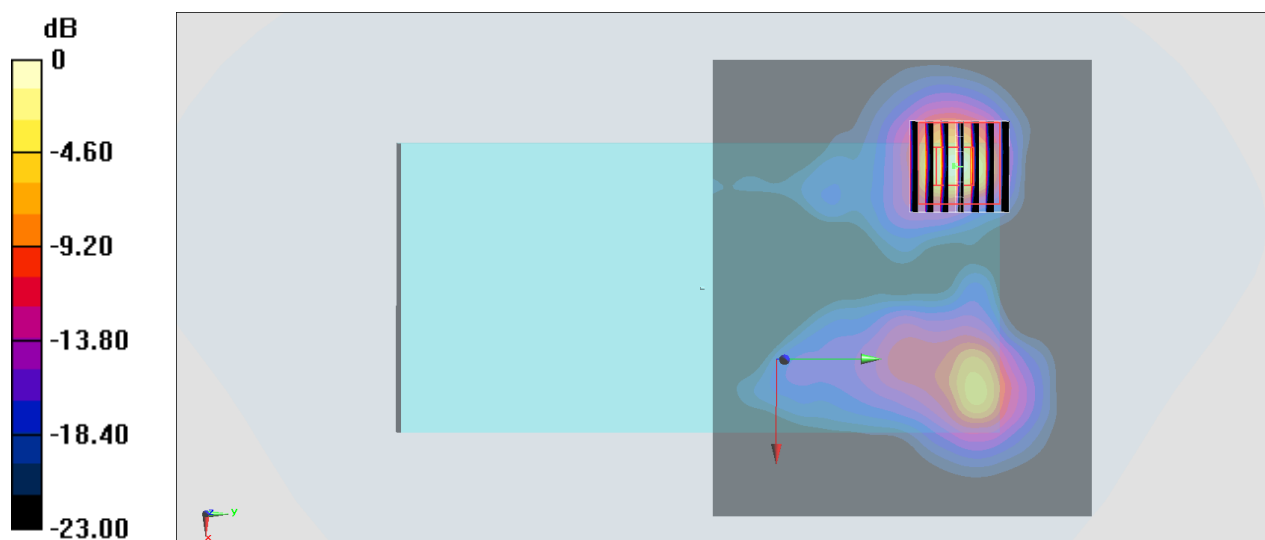

0 dB = 18.5 W/kg = 12.67 dBW/kg

#15_Bluetooth_1Mbps_Back_0mm_Ch78;Ant 1

Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1.295

Medium: HSL_2450_221109 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.868$ S/m; $\epsilon_r = 39.19$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(8.2, 8.2, 8.2) @ 2480 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2022/5/30
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (101x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.349 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.06 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.443 W/kg

SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.097 W/kg

Maximum value of SAR (measured) = 0.356 W/kg

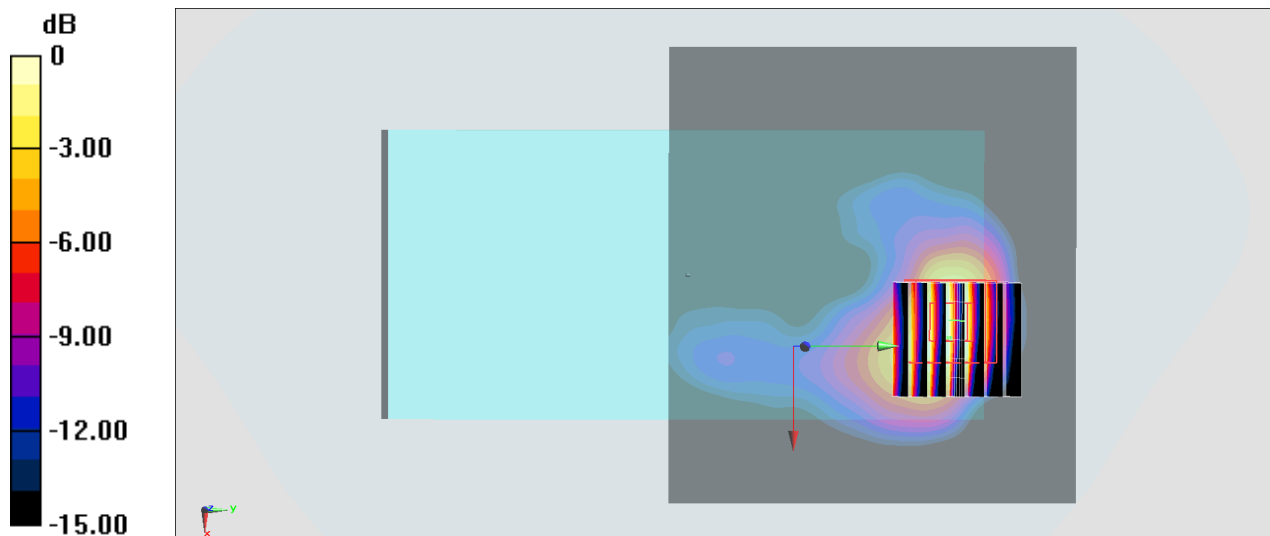

0 dB = 0.356 W/kg = -4.49 dBW/kg