


|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC3                                   | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin Ding  |
| Probe: HF907_102861_1-18GHz                     | Polarity: Horizontal  |
| EUT: Mobile Computer                            | Power: By Battery     |
| Test Mode: Transmit by VHT20 at channel 2462MHz |                       |

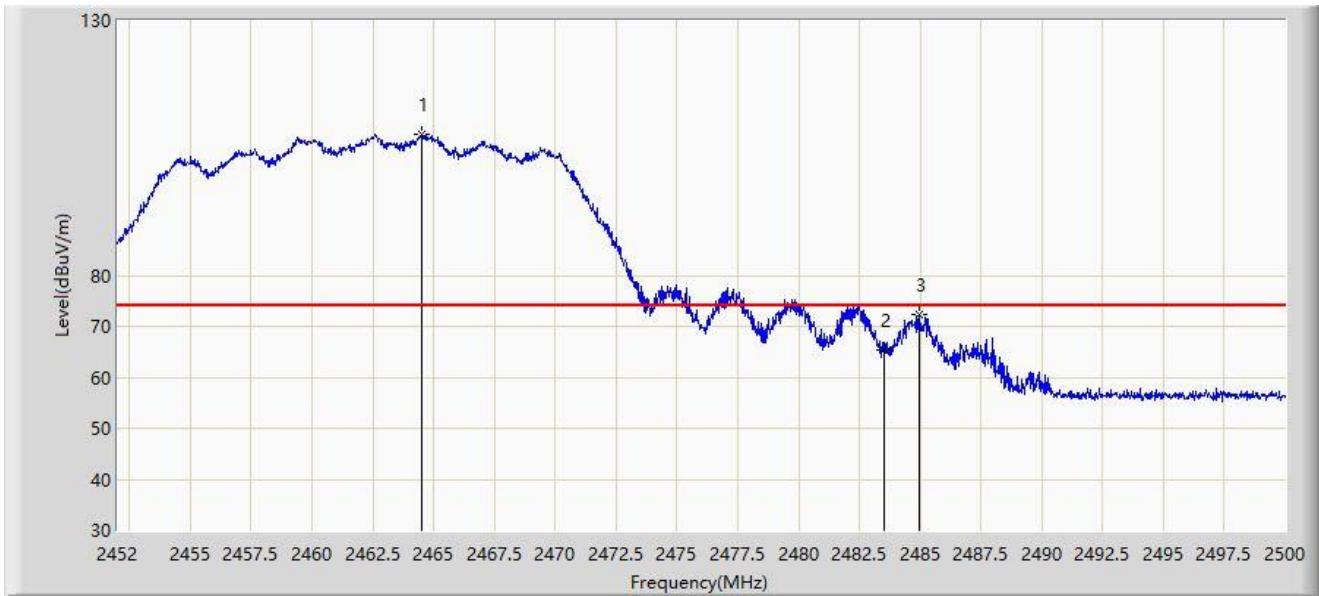


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2464.528        | 107.549                | 75.324               | N/A         | N/A            | 32.225        | PK   |
| 2  |      | 2483.500        | 65.449                 | 33.144               | -8.551      | 74.000         | 32.305        | PK   |
| 3  | *    | 2484.952        | 72.278                 | 39.966               | -1.722      | 74.000         | 32.313        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC3                                   | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin Ding  |
| Probe: HF907_102861_1-18GHz                     | Polarity: Horizontal  |
| EUT: Mobile Computer                            | Power: By Battery     |
| Test Mode: Transmit by VHT20 at channel 2462MHz |                       |

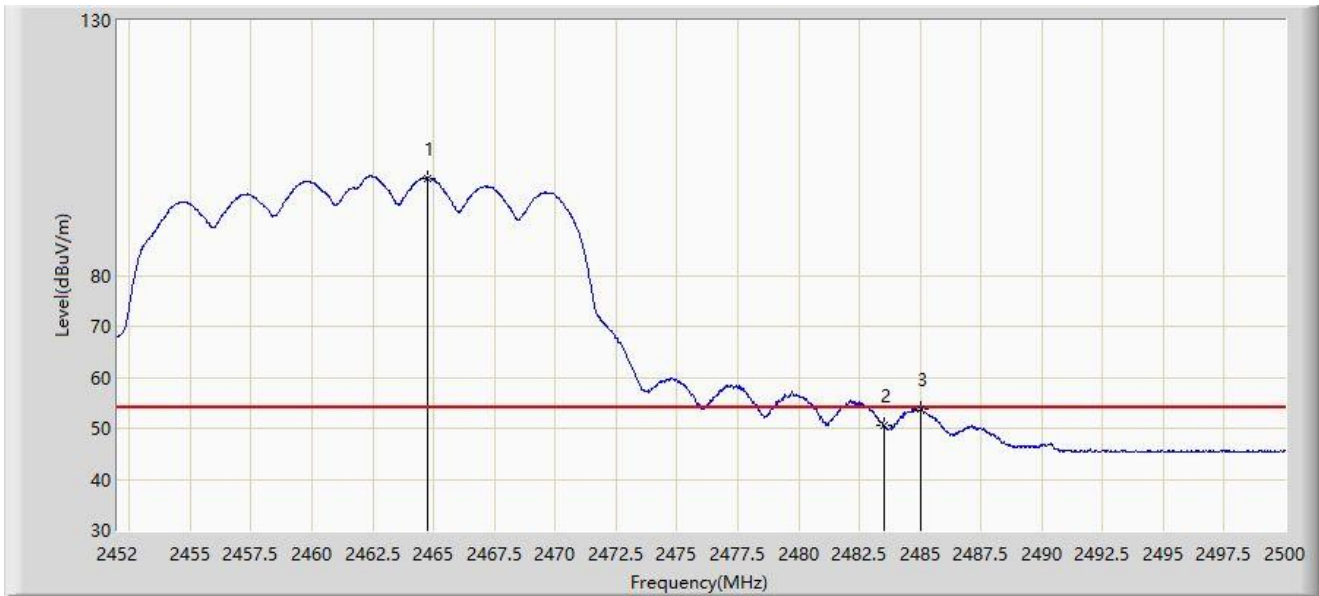


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2464.744        | 99.124                 | 66.898               | N/A         | N/A            | 32.226        | AV   |
| 2  |      | 2483.500        | 50.668                 | 18.363               | -3.332      | 54.000         | 32.305        | AV   |
| 3  | *    | 2485.048        | 53.862                 | 21.549               | -0.138      | 54.000         | 32.313        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC3                                   | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin Ding  |
| Probe: HF907_102861_1-18GHz                     | Polarity: Vertical    |
| EUT: Mobile Computer                            | Power: By Battery     |
| Test Mode: Transmit by VHT20 at channel 2462MHz |                       |

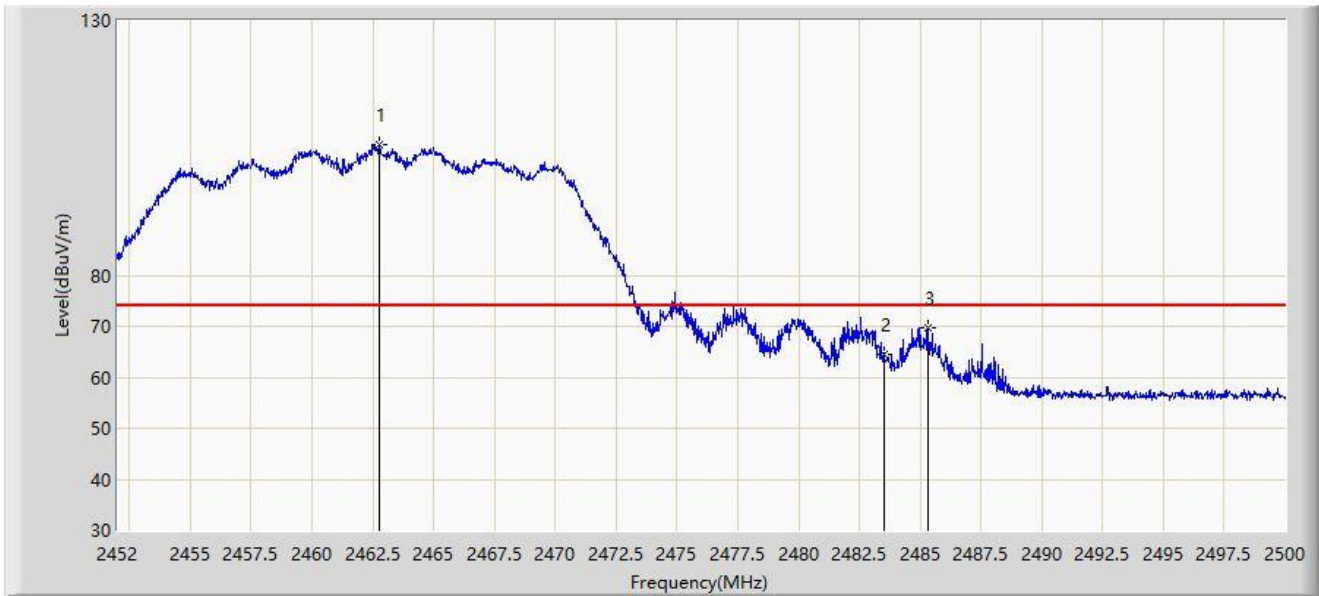


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2462.776        | 105.511                | 73.293               | N/A         | N/A            | 32.218        | PK   |
| 2  |      | 2483.500        | 64.437                 | 32.132               | -9.563      | 74.000         | 32.305        | PK   |
| 3  | *    | 2485.312        | 69.781                 | 37.467               | -4.219      | 74.000         | 32.314        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC3                                   | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin Ding  |
| Probe: HF907_102861_1-18GHz                     | Polarity: Vertical    |
| EUT: Mobile Computer                            | Power: By Battery     |
| Test Mode: Transmit by VHT20 at channel 2462MHz |                       |

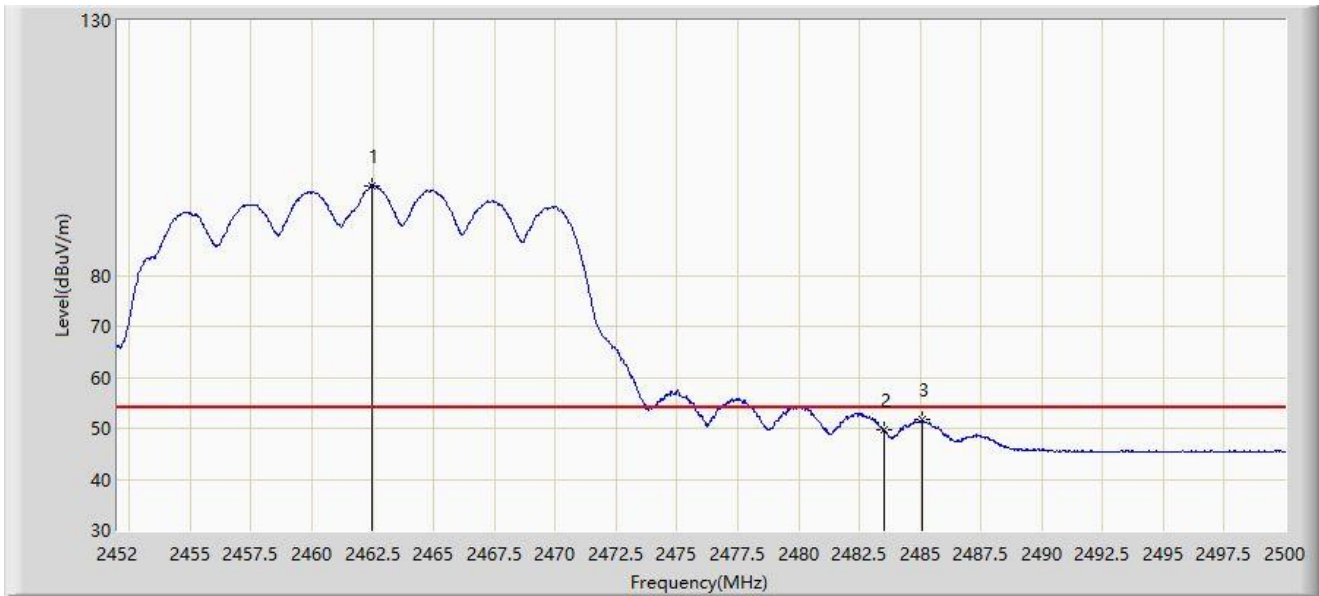


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2462.440        | 97.574                 | 65.357               | N/A         | N/A            | 32.217        | AV   |
| 2  |      | 2483.500        | 49.800                 | 17.495               | -4.200      | 54.000         | 32.305        | AV   |
| 3  | *    | 2485.072        | 51.713                 | 19.400               | -2.287      | 54.000         | 32.313        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC3                                   | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin Ding  |
| Probe: HF907_102861_1-18GHz                     | Polarity: Horizontal  |
| EUT: Mobile Computer                            | Power: By Battery     |
| Test Mode: Transmit by VHT40 at channel 2422MHz |                       |

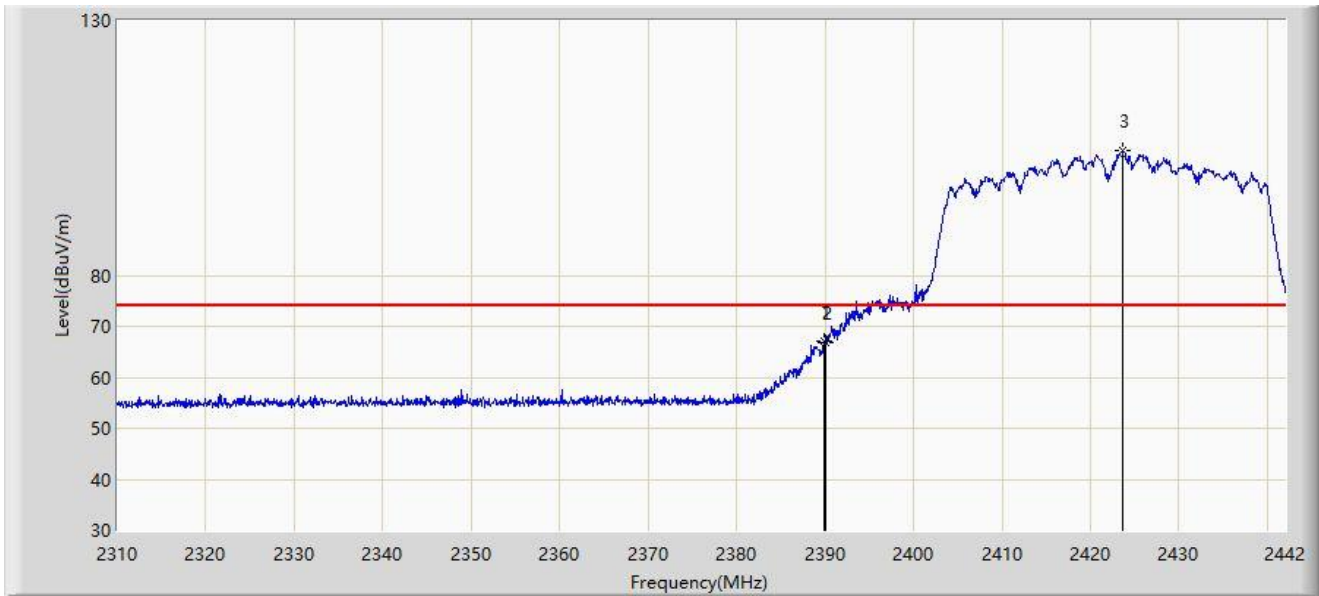


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.926        | 67.000                 | 35.072               | -7.000      | 74.000         | 31.928        | PK   |
| 2  |      | 2390.000        | 66.891                 | 34.962               | -7.109      | 74.000         | 31.929        | PK   |
| 3  |      | 2423.652        | 104.421                | 72.353               | N/A         | N/A            | 32.068        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC3                                   | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin Ding  |
| Probe: HF907_102861_1-18GHz                     | Polarity: Horizontal  |
| EUT: Mobile Computer                            | Power: By Battery     |
| Test Mode: Transmit by VHT40 at channel 2422MHz |                       |

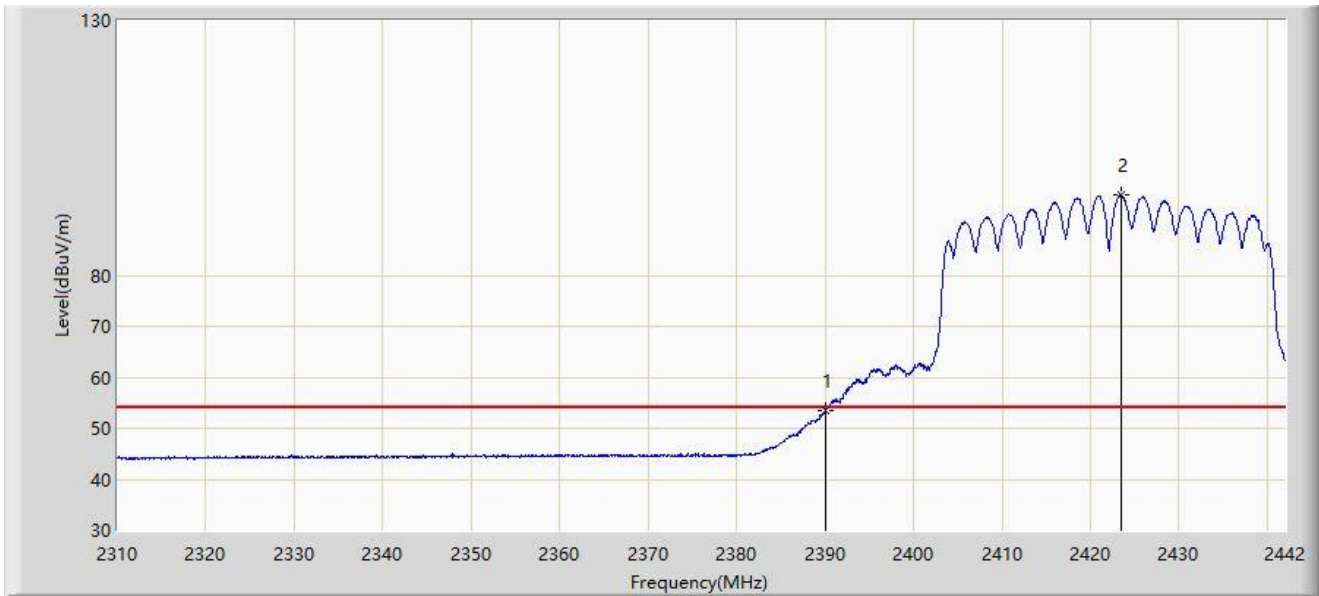


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2390.000        | 53.340                 | 21.411               | -0.660      | 54.000         | 31.929        | AV   |
| 2  |      | 2423.454        | 95.845                 | 63.777               | N/A         | N/A            | 32.069        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC3                                   | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin Ding  |
| Probe: HF907_102861_1-18GHz                     | Polarity: Vertical    |
| EUT: Mobile Computer                            | Power: By Battery     |
| Test Mode: Transmit by VHT40 at channel 2422MHz |                       |

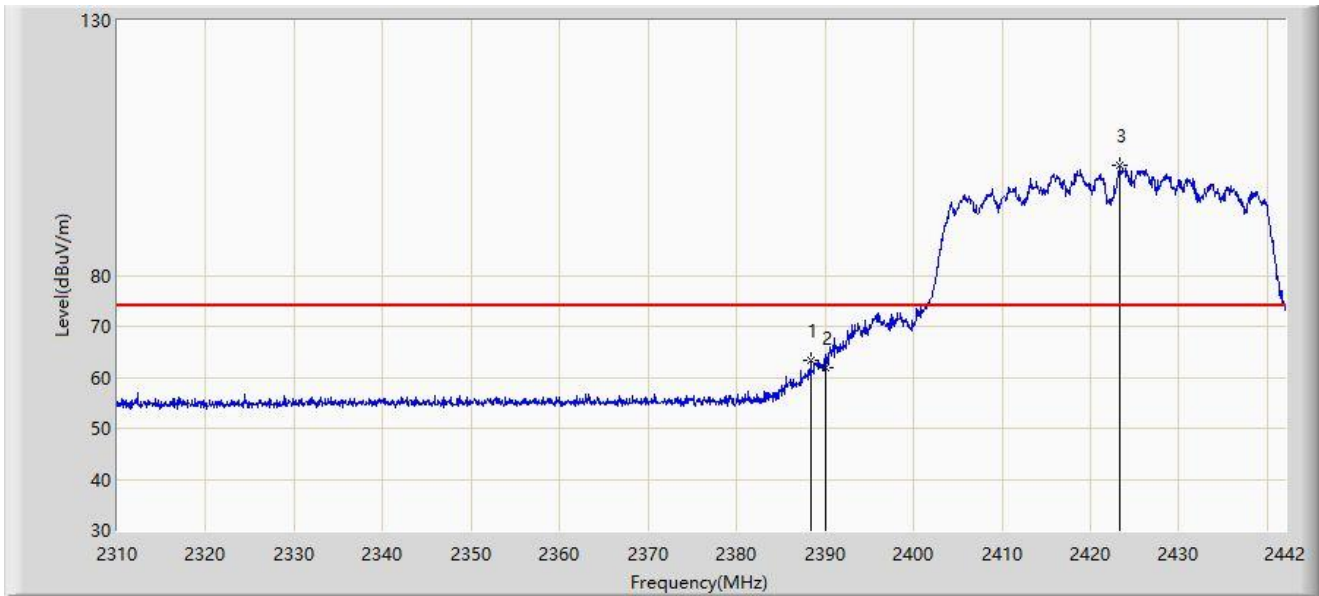


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2388.408        | 63.358                 | 31.439               | -10.642     | 74.000         | 31.920        | PK   |
| 2  |      | 2390.000        | 61.800                 | 29.871               | -12.200     | 74.000         | 31.929        | PK   |
| 3  |      | 2423.322        | 101.738                | 69.669               | N/A         | N/A            | 32.068        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC3                                   | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin Ding  |
| Probe: HF907_102861_1-18GHz                     | Polarity: Vertical    |
| EUT: Mobile Computer                            | Power: By Battery     |
| Test Mode: Transmit by VHT40 at channel 2422MHz |                       |

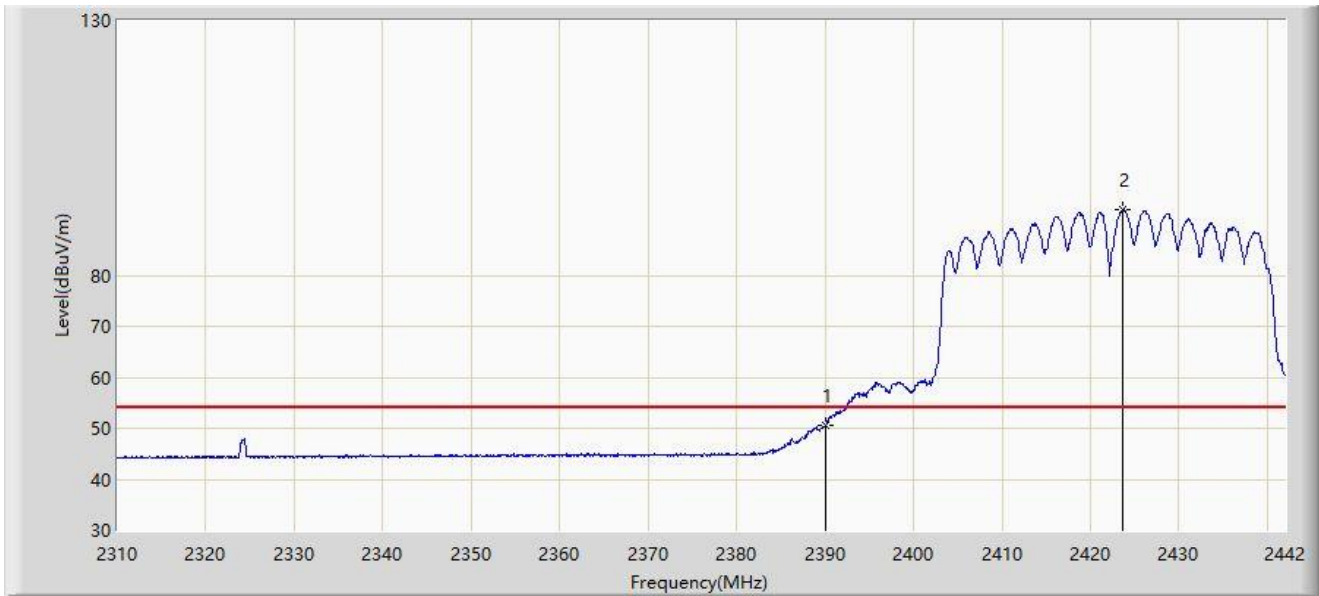

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2390.000        | 50.477                 | 18.548               | -3.523      | 54.000         | 31.929        | AV   |
| 2  |      | 2423.652        | 92.886                 | 60.818               | N/A         | N/A            | 32.068        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC3                                   | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin Ding  |
| Probe: HF907_102861_1-18GHz                     | Polarity: Horizontal  |
| EUT: Mobile Computer                            | Power: By Battery     |
| Test Mode: Transmit by VHT40 at channel 2452MHz |                       |




| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2466.306        | 104.472                | 72.240               | N/A         | N/A            | 32.232        | PK   |
| 2  |      | 2483.500        | 64.493                 | 32.188               | -9.507      | 74.000         | 32.305        | PK   |
| 3  | *    | 2486.366        | 69.078                 | 36.758               | -4.922      | 74.000         | 32.319        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC3                                   | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin Ding  |
| Probe: HF907_102861_1-18GHz                     | Polarity: Horizontal  |
| EUT: Mobile Computer                            | Power: By Battery     |
| Test Mode: Transmit by VHT40 at channel 2452MHz |                       |

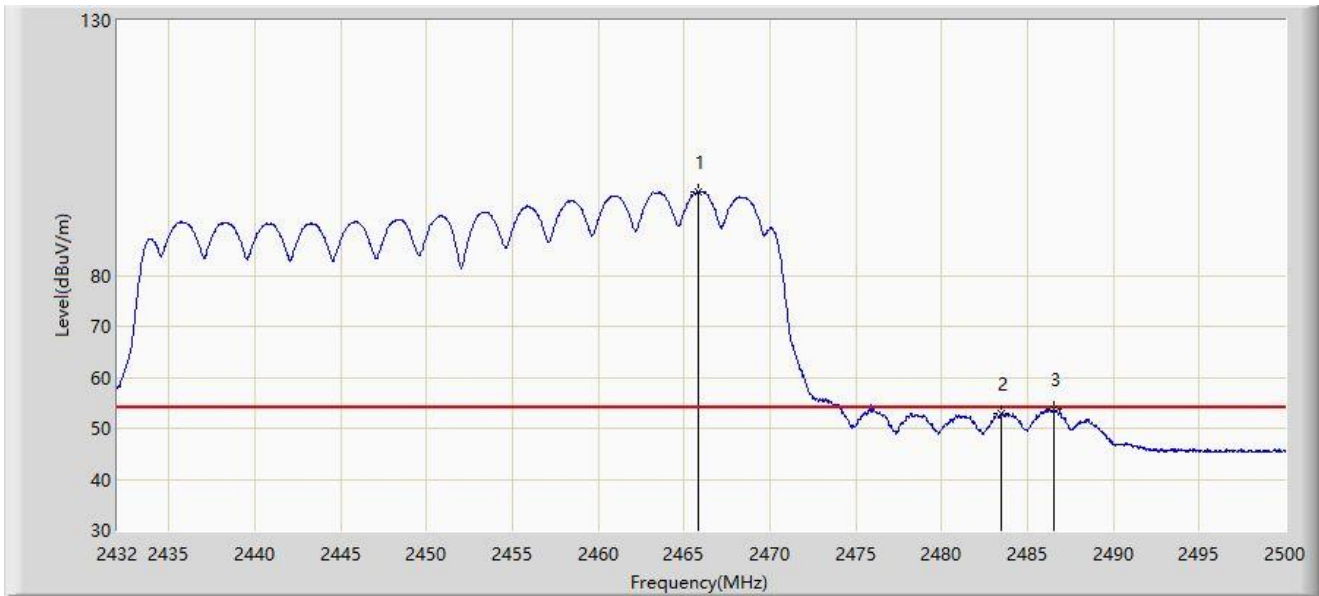


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2465.864        | 96.321                 | 64.091               | N/A         | N/A            | 32.231        | AV   |
| 2  |      | 2483.500        | 52.935                 | 20.630               | -1.065      | 54.000         | 32.305        | AV   |
| 3  | *    | 2486.502        | 53.778                 | 21.458               | -0.222      | 54.000         | 32.320        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC3                                   | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin Ding  |
| Probe: HF907_102861_1-18GHz                     | Polarity: Vertical    |
| EUT: Mobile Computer                            | Power: By Battery     |
| Test Mode: Transmit by VHT40 at channel 2452MHz |                       |

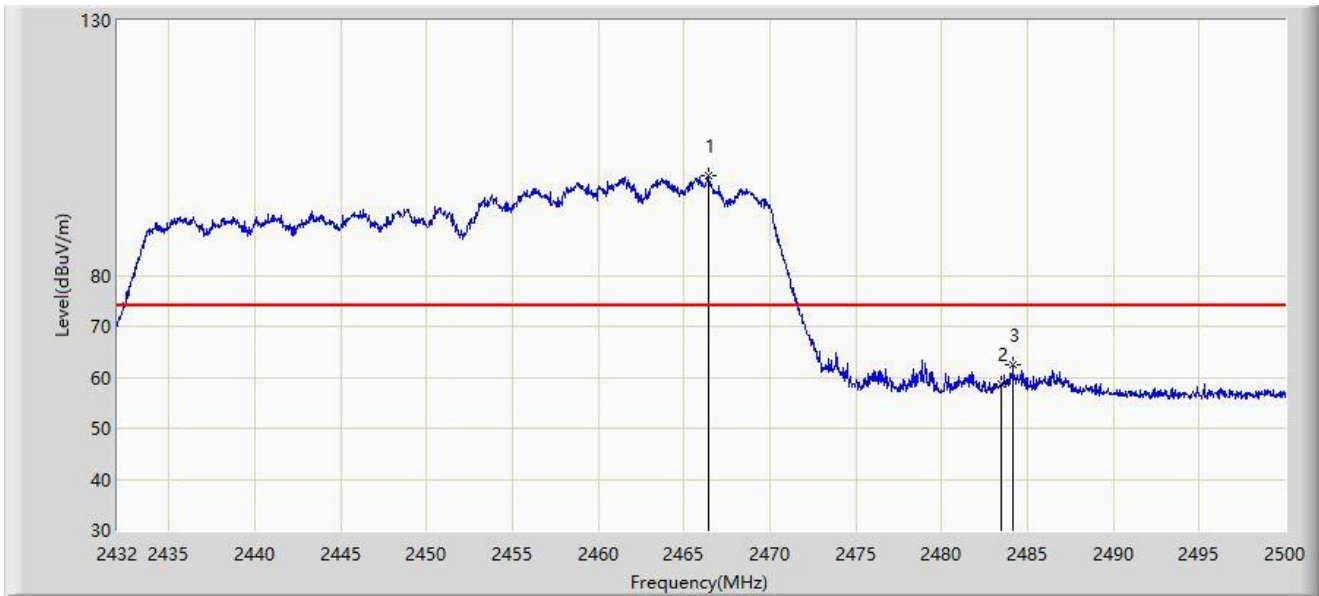


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2466.408        | 99.466                 | 67.233               | N/A         | N/A            | 32.233        | PK   |
| 2  |      | 2483.500        | 58.683                 | 26.378               | -15.317     | 74.000         | 32.305        | PK   |
| 3  | *    | 2484.156        | 62.340                 | 30.032               | -11.660     | 74.000         | 32.308        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                       |
|-------------------------------------------------|-----------------------|
| Site: SIP-AC3                                   | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin Ding  |
| Probe: HF907_102861_1-18GHz                     | Polarity: Vertical    |
| EUT: Mobile Computer                            | Power: By Battery     |
| Test Mode: Transmit by VHT40 at channel 2452MHz |                       |

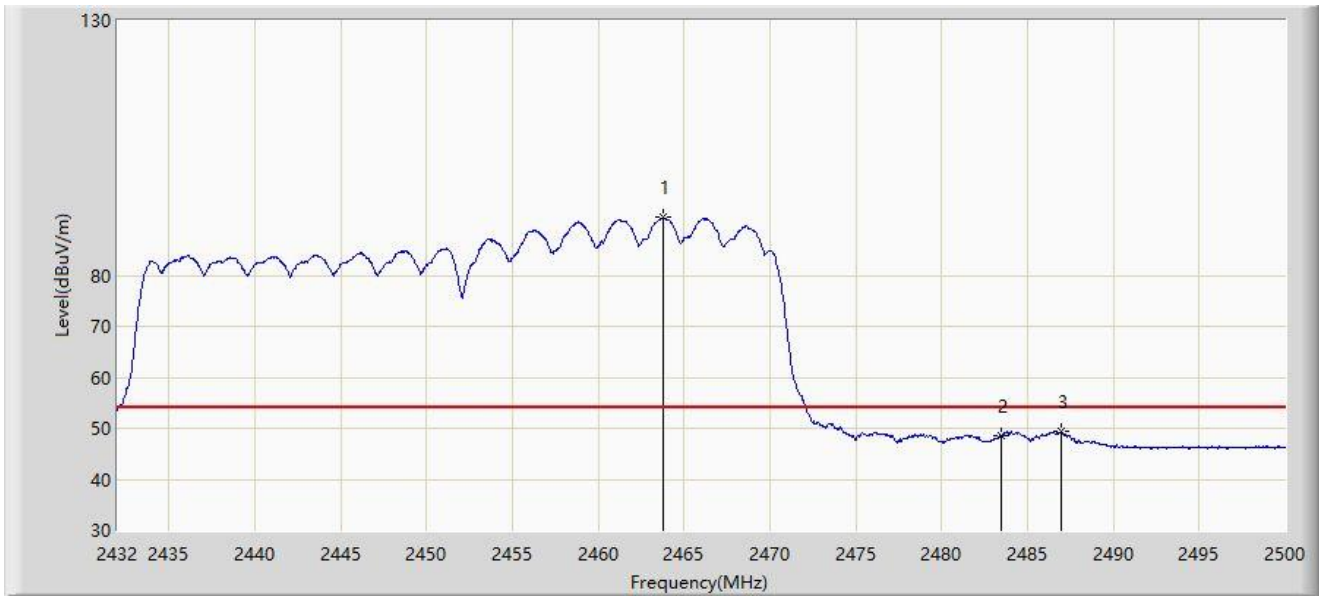


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2463.790        | 91.381                 | 59.159               | N/A         | N/A            | 32.222        | AV   |
| 2  |      | 2483.500        | 48.497                 | 16.192               | -5.503      | 54.000         | 32.305        | AV   |
| 3  | *    | 2486.944        | 49.296                 | 16.974               | -4.704      | 54.000         | 32.322        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                    |                       |
|--------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                      | Test Date: 2022-10-18 |
| Limit: FCC_2.4G_RE(3m)                                             | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                        | Polarity: Horizontal  |
| EUT: Mobile Computer                                               | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz 26Tone RU0 |                       |

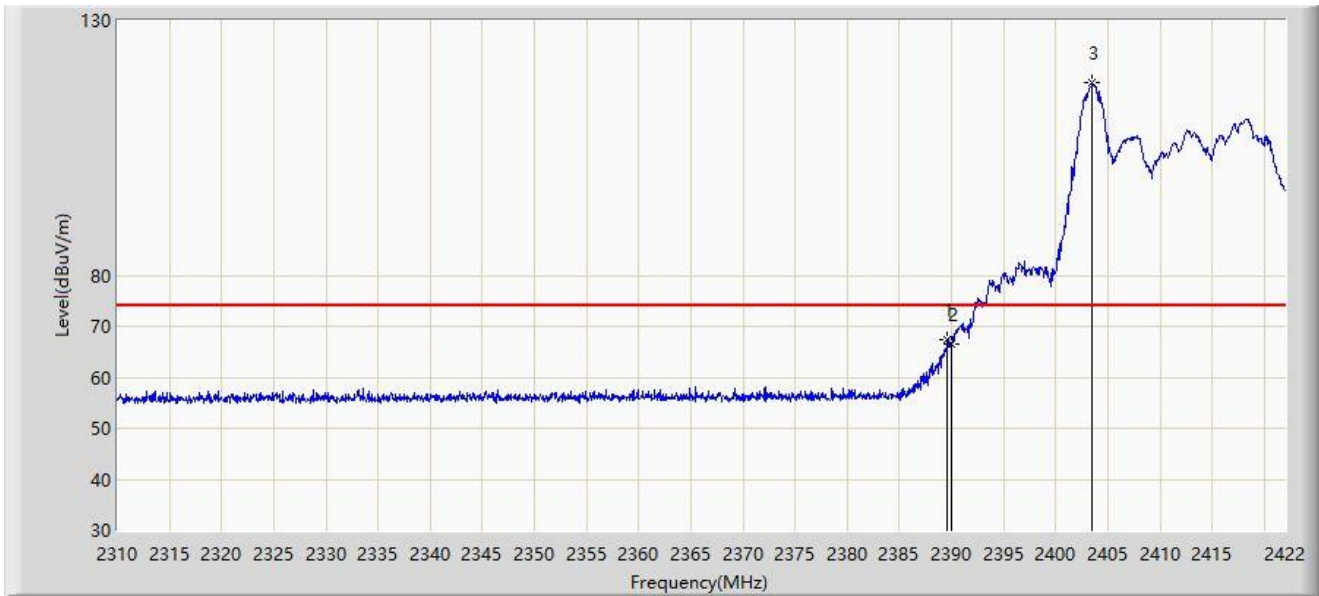


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.632        | 67.520                 | 35.593               | -6.480      | 74.000         | 31.926        | PK   |
| 2  |      | 2390.000        | 66.511                 | 34.582               | -7.489      | 74.000         | 31.929        | PK   |
| 3  |      | 2403.464        | 117.692                | 85.669               | N/A         | N/A            | 32.023        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                    |                       |
|--------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                      | Test Date: 2022-10-18 |
| Limit: FCC_2.4G_RE(3m)                                             | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                        | Polarity: Horizontal  |
| EUT: Mobile Computer                                               | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz 26Tone RU0 |                       |

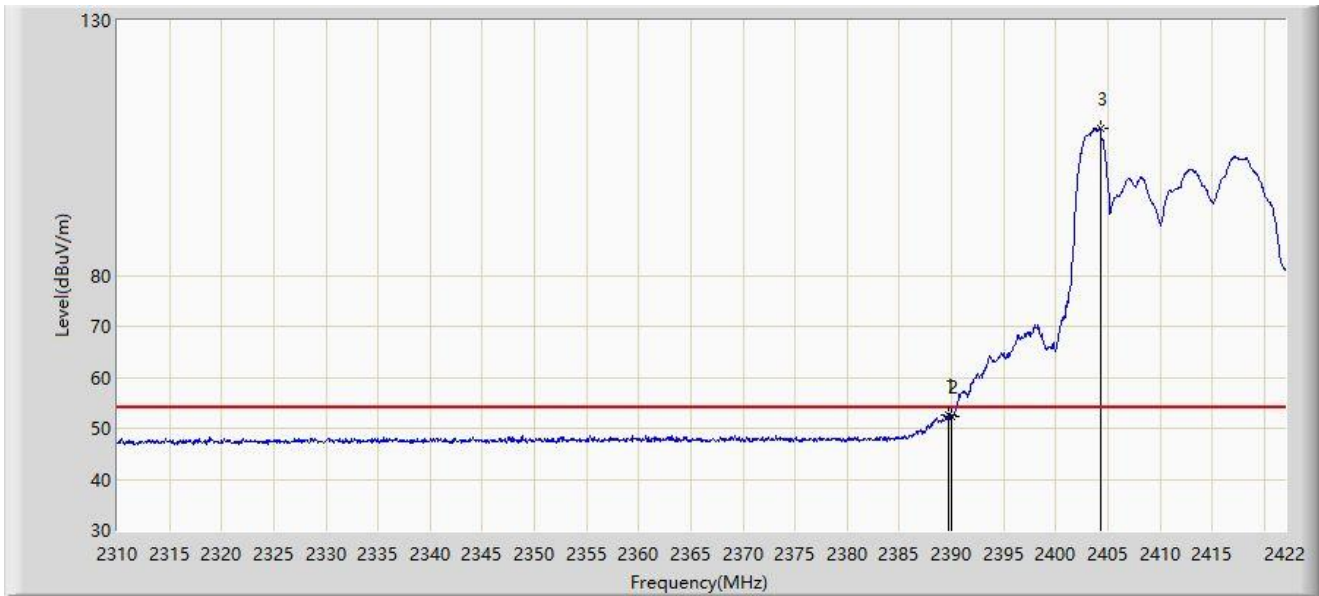


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.744        | 52.526                 | 20.599               | -1.474      | 54.000         | 31.928        | AV   |
| 2  |      | 2390.000        | 52.357                 | 20.428               | -1.643      | 54.000         | 31.929        | AV   |
| 3  |      | 2404.248        | 108.744                | 76.715               | N/A         | N/A            | 32.028        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                    |                       |
|--------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                      | Test Date: 2022-10-18 |
| Limit: FCC_2.4G_RE(3m)                                             | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                        | Polarity: Vertical    |
| EUT: Mobile Computer                                               | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz 26Tone RU0 |                       |

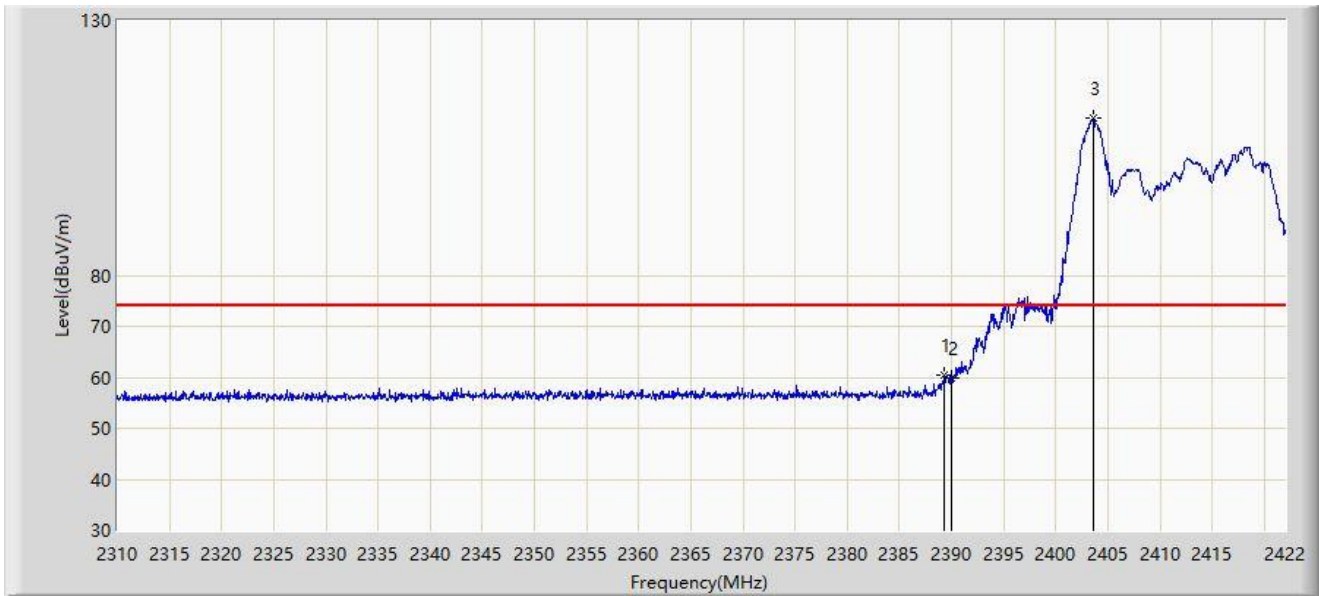


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.296        | 60.557                 | 28.632               | -13.443     | 74.000         | 31.925        | PK   |
| 2  |      | 2390.000        | 59.986                 | 28.057               | -14.014     | 74.000         | 31.929        | PK   |
| 3  |      | 2403.632        | 110.786                | 78.762               | N/A         | N/A            | 32.024        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                    |                       |
|--------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                      | Test Date: 2022-10-18 |
| Limit: FCC_2.4G_RE(3m)                                             | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                        | Polarity: Vertical    |
| EUT: Mobile Computer                                               | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz 26Tone RU0 |                       |

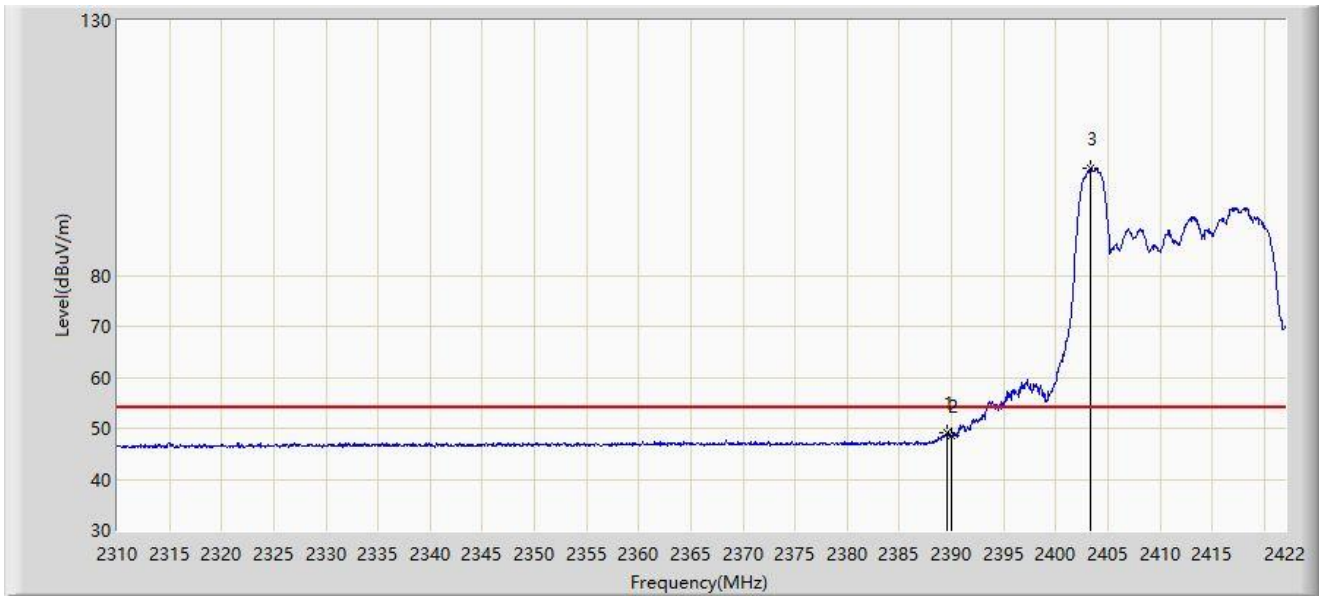


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.520        | 48.989                 | 17.063               | -5.011      | 54.000         | 31.926        | AV   |
| 2  |      | 2390.000        | 48.450                 | 16.521               | -5.550      | 54.000         | 31.929        | AV   |
| 3  |      | 2403.296        | 101.041                | 69.019               | N/A         | N/A            | 32.021        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                    |                       |
|--------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                      | Test Date: 2022-10-18 |
| Limit: FCC_2.4G_RE(3m)                                             | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                        | Polarity: Horizontal  |
| EUT: Mobile Computer                                               | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz 26Tone RU8 |                       |

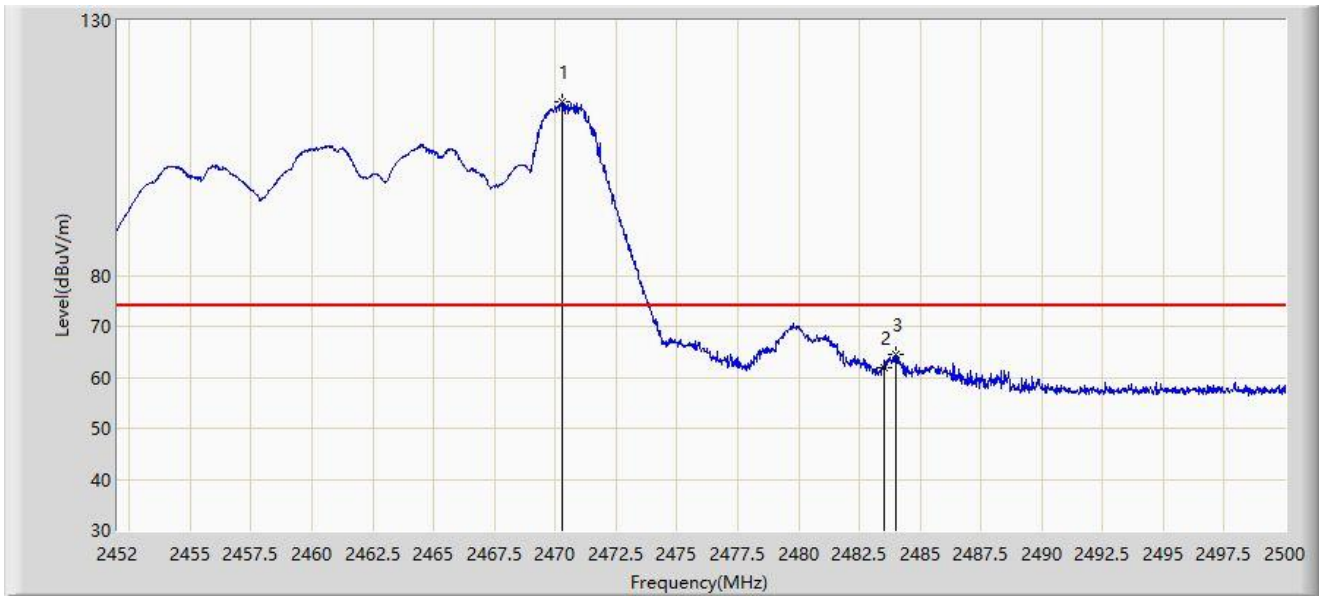


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2470.312        | 113.922                | 81.674               | N/A         | N/A            | 32.248        | PK   |
| 2  |      | 2483.500        | 61.890                 | 29.585               | -12.110     | 74.000         | 32.305        | PK   |
| 3  | *    | 2484.016        | 64.596                 | 32.288               | -9.404      | 74.000         | 32.308        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                    |                       |
|--------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                      | Test Date: 2022-10-18 |
| Limit: FCC_2.4G_RE(3m)                                             | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                        | Polarity: Horizontal  |
| EUT: Mobile Computer                                               | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz 26Tone RU8 |                       |

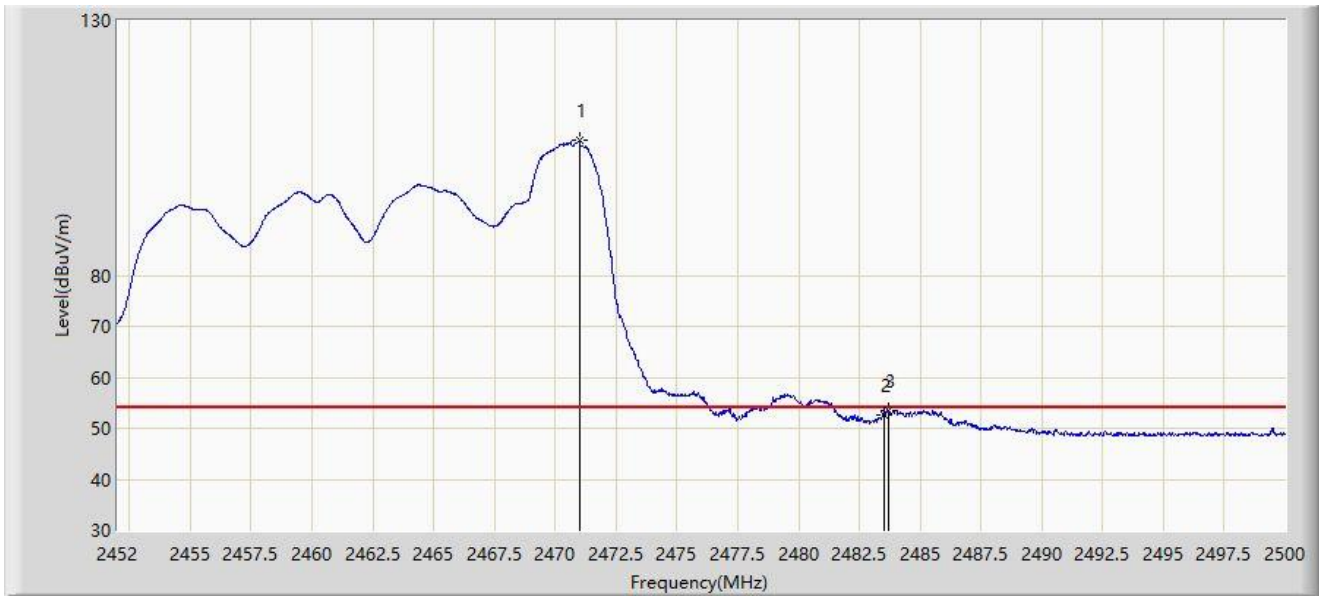


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2471.008        | 106.413                | 74.162               | N/A         | N/A            | 32.251        | AV   |
| 2  |      | 2483.500        | 52.710                 | 20.405               | -1.290      | 54.000         | 32.305        | AV   |
| 3  | *    | 2483.704        | 53.536                 | 21.230               | -0.464      | 54.000         | 32.306        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                    |                       |
|--------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                      | Test Date: 2022-10-18 |
| Limit: FCC_2.4G_RE(3m)                                             | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                        | Polarity: Vertical    |
| EUT: Mobile Computer                                               | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz 26Tone RU8 |                       |

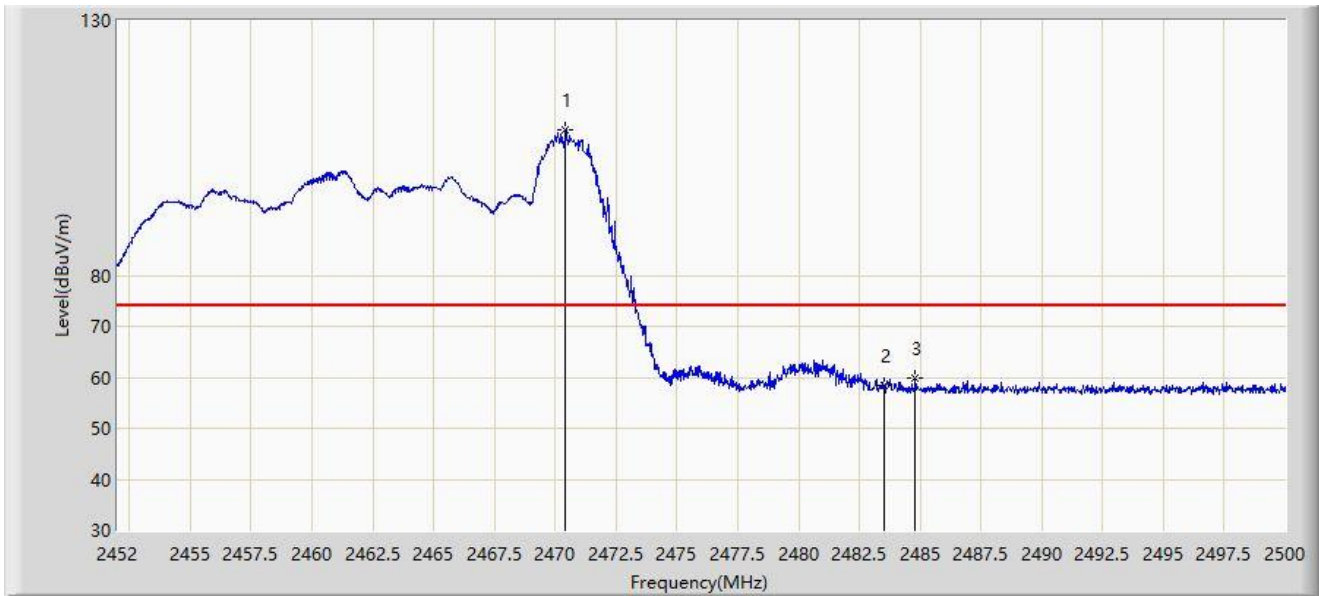


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2470.432        | 108.615                | 76.366               | N/A         | N/A            | 32.249        | PK   |
| 2  |      | 2483.500        | 58.297                 | 25.992               | -15.703     | 74.000         | 32.305        | PK   |
| 3  | *    | 2484.808        | 59.954                 | 27.642               | -14.046     | 74.000         | 32.312        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                    |                       |
|--------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                      | Test Date: 2022-10-18 |
| Limit: FCC_2.4G_RE(3m)                                             | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                        | Polarity: Vertical    |
| EUT: Mobile Computer                                               | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz 26Tone RU8 |                       |

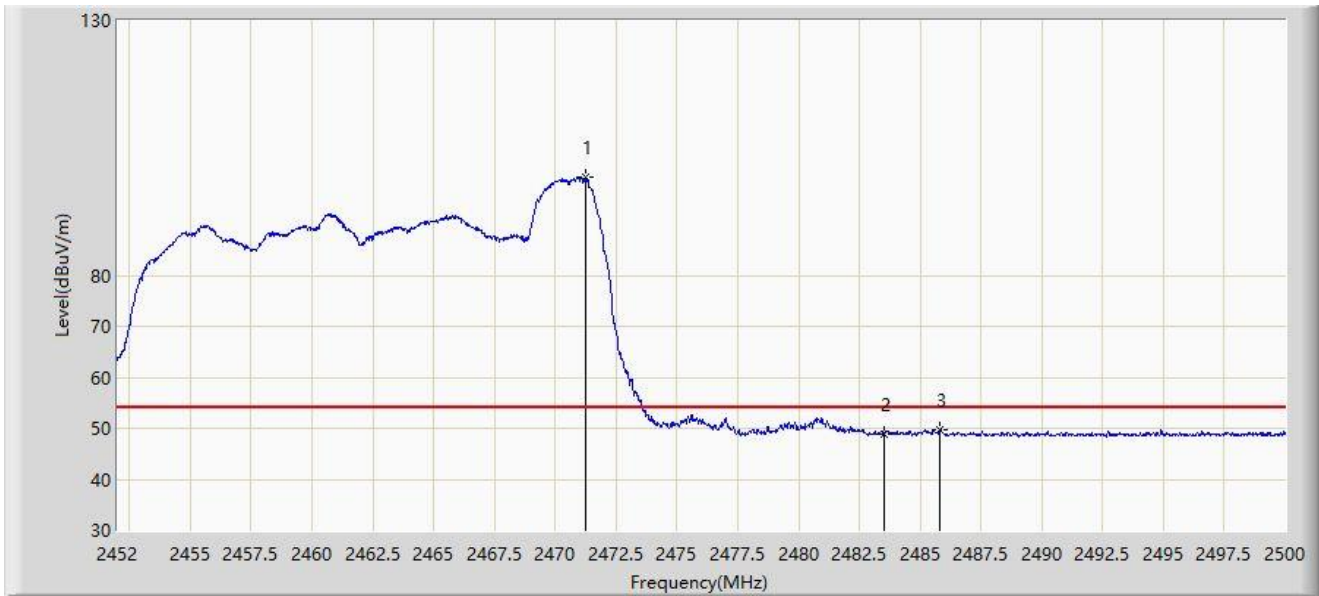


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2471.272        | 99.250                 | 66.998               | N/A         | N/A            | 32.252        | AV   |
| 2  |      | 2483.500        | 48.931                 | 16.626               | -5.069      | 54.000         | 32.305        | AV   |
| 3  | *    | 2485.816        | 49.834                 | 17.517               | -4.166      | 54.000         | 32.316        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                       |                       |
|-----------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                         | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                                                | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                           | Polarity: Horizontal  |
| EUT: Mobile Computer                                                  | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz 242 Tone RU61 |                       |

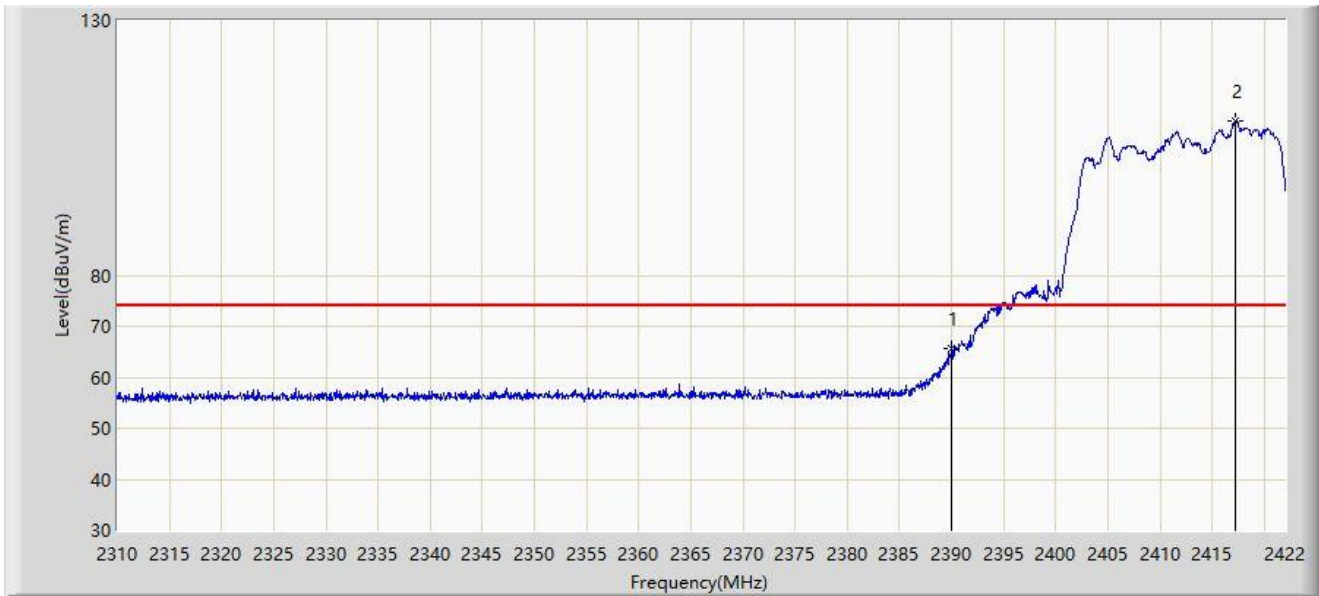


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2390.000        | 65.638                 | 33.709               | -8.362      | 74.000         | 31.929        | PK   |
| 2  |      | 2417.184        | 110.351                | 78.278               | N/A         | N/A            | 32.074        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                       |                       |
|-----------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                         | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                                                | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                           | Polarity: Horizontal  |
| EUT: Mobile Computer                                                  | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz 242 Tone RU61 |                       |

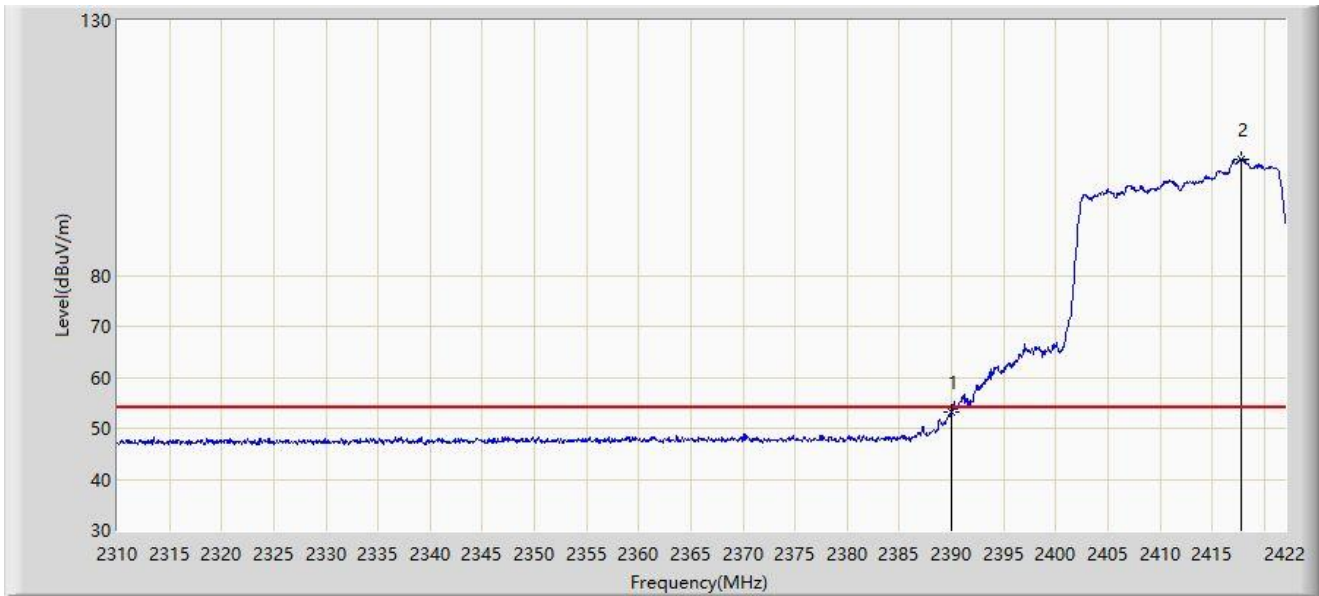


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2390.000        | 53.322                 | 21.393               | -0.678      | 54.000         | 31.929        | AV   |
| 2  |      | 2417.856        | 102.868                | 70.795               | N/A         | N/A            | 32.073        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                       |                       |
|-----------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                         | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                                                | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                           | Polarity: Vertical    |
| EUT: Mobile Computer                                                  | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz 242 Tone RU61 |                       |

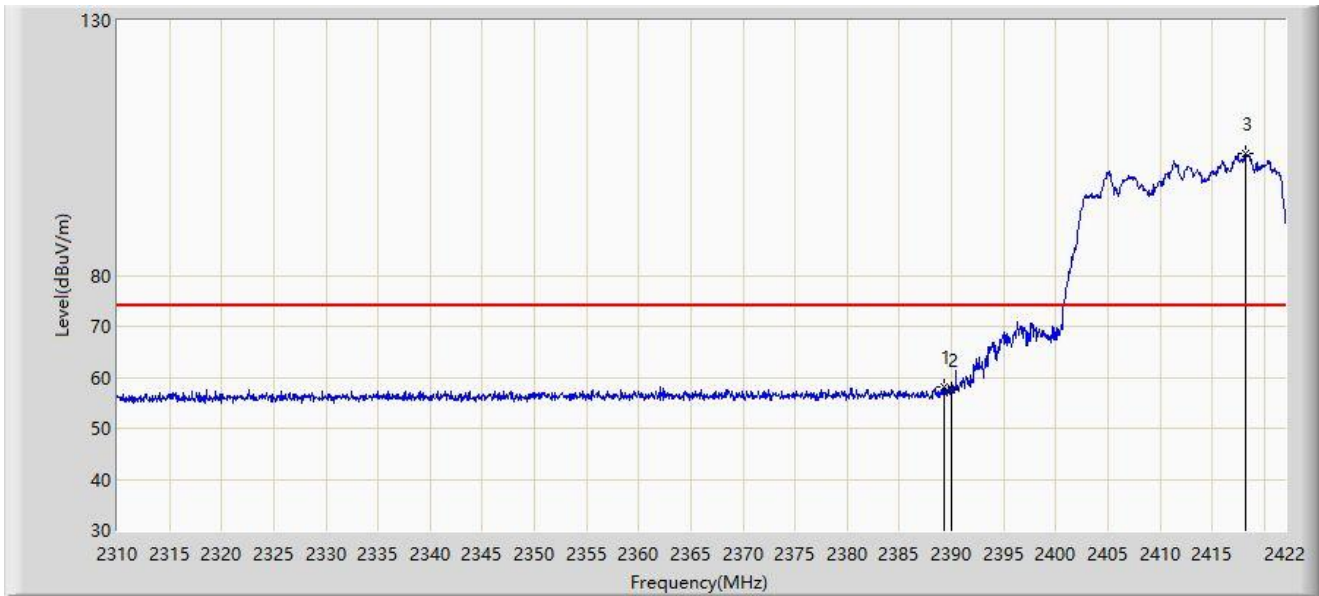


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.240        | 58.236                 | 26.312               | -15.764     | 74.000         | 31.924        | PK   |
| 2  |      | 2390.000        | 57.583                 | 25.654               | -16.417     | 74.000         | 31.929        | PK   |
| 3  |      | 2418.248        | 103.993                | 71.920               | N/A         | N/A            | 32.072        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                       |                       |
|-----------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                         | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                                                | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                           | Polarity: Vertical    |
| EUT: Mobile Computer                                                  | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz 242 Tone RU61 |                       |

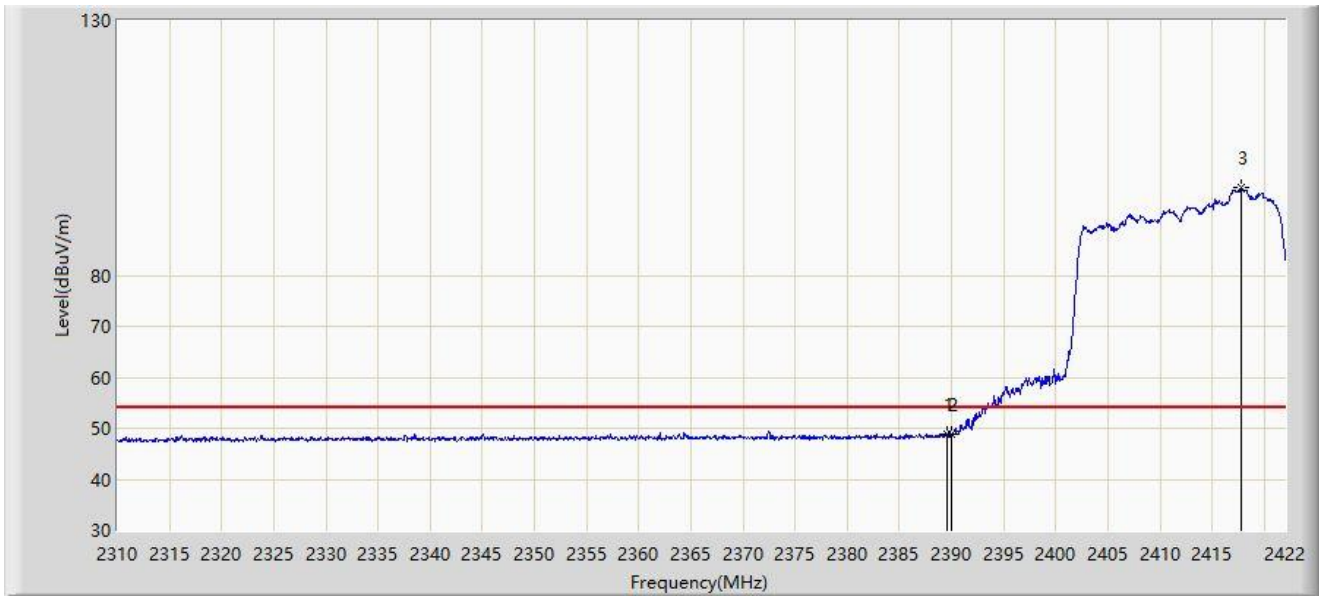

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.632        | 48.983                 | 17.056               | -5.017      | 54.000         | 31.926        | AV   |
| 2  |      | 2390.000        | 48.786                 | 16.857               | -5.214      | 54.000         | 31.929        | AV   |
| 3  |      | 2417.744        | 97.139                 | 65.066               | N/A         | N/A            | 32.073        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                       |                       |
|-----------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                         | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                                                | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                           | Polarity: Horizontal  |
| EUT: Mobile Computer                                                  | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz 242 Tone RU61 |                       |




| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2465.104        | 106.614                | 74.387               | N/A         | N/A            | 32.227        | PK   |
| 2  |      | 2483.500        | 63.819                 | 31.514               | -10.181     | 74.000         | 32.305        | PK   |
| 3  | *    | 2483.560        | 64.774                 | 32.469               | -9.226      | 74.000         | 32.305        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                       |                       |
|-----------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                         | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                                                | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                           | Polarity: Horizontal  |
| EUT: Mobile Computer                                                  | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz 242 Tone RU61 |                       |

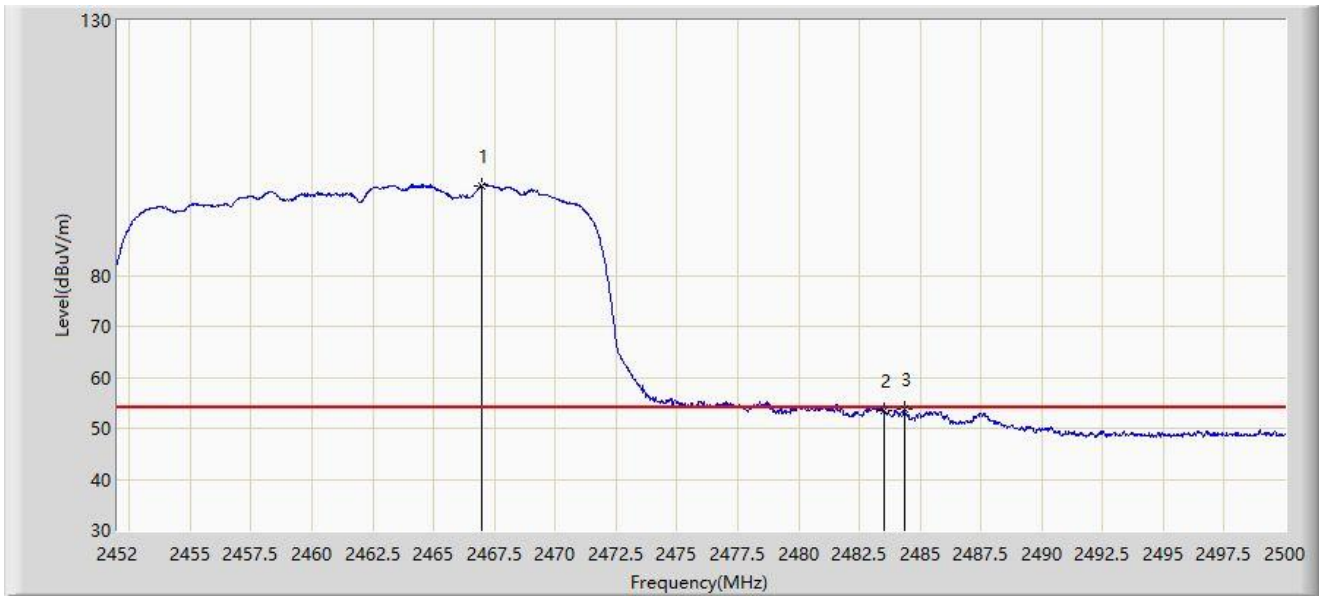


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2466.976        | 97.574                 | 65.339               | N/A         | N/A            | 32.235        | AV   |
| 2  |      | 2483.500        | 53.465                 | 21.160               | -0.535      | 54.000         | 32.305        | AV   |
| 3  | *    | 2484.352        | 53.653                 | 21.344               | -0.347      | 54.000         | 32.310        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                       |                       |
|-----------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                         | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                                                | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                           | Polarity: Vertical    |
| EUT: Mobile Computer                                                  | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz 242 Tone RU61 |                       |

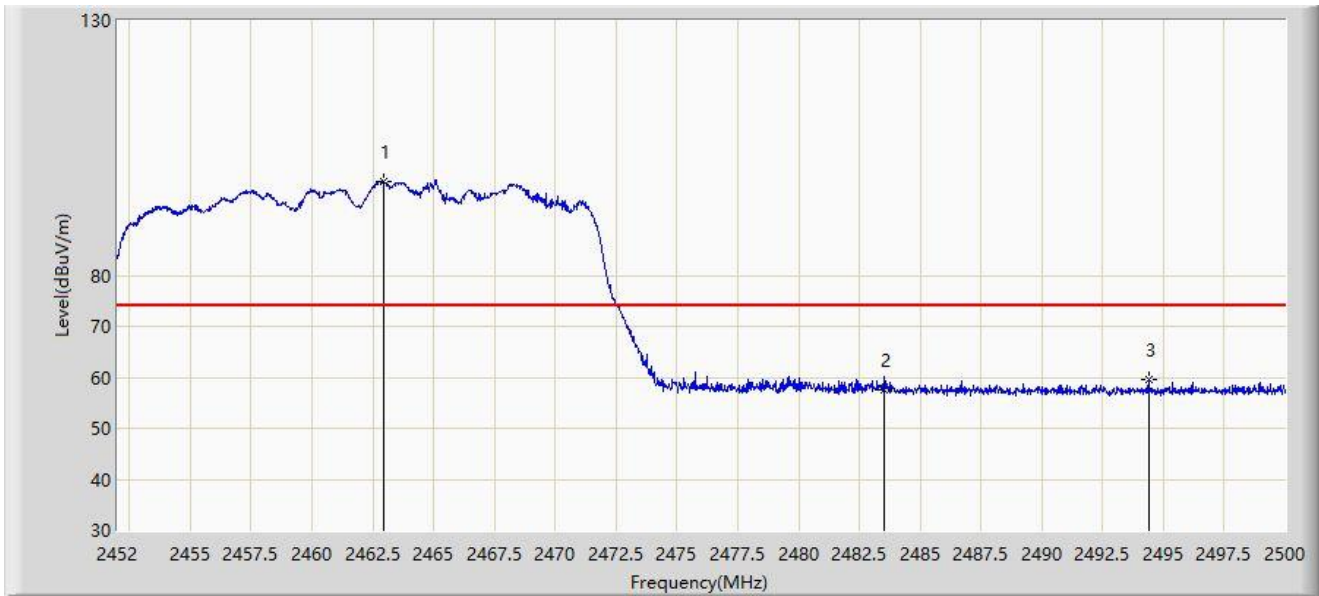


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2462.944        | 98.502                 | 66.283               | N/A         | N/A            | 32.219        | PK   |
| 2  |      | 2483.500        | 57.581                 | 25.276               | -16.419     | 74.000         | 32.305        | PK   |
| 3  | *    | 2494.384        | 59.589                 | 27.229               | -14.411     | 74.000         | 32.360        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                       |                       |
|-----------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                         | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                                                | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                           | Polarity: Vertical    |
| EUT: Mobile Computer                                                  | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz 242 Tone RU61 |                       |

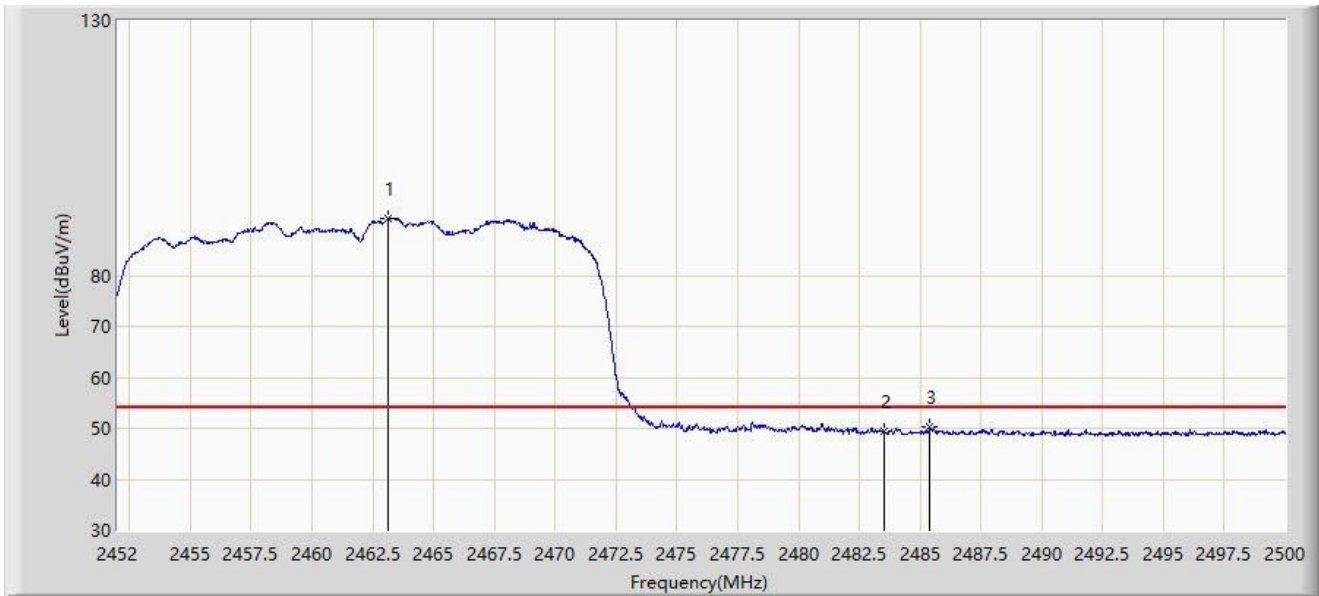

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2463.136        | 91.106                 | 58.886               | N/A         | N/A            | 32.220        | AV   |
| 2  |      | 2483.500        | 49.367                 | 17.062               | -4.633      | 54.000         | 32.305        | AV   |
| 3  | *    | 2485.408        | 50.225                 | 17.910               | -3.775      | 54.000         | 32.315        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                     |                       |
|---------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                       | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                                              | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                         | Polarity: Horizontal  |
| EUT: Mobile Computer                                                | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz 26 Tone RU0 |                       |




| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.625        | 65.999                 | 34.072               | -8.001      | 74.000         | 31.926        | PK   |
| 2  |      | 2390.000        | 65.595                 | 33.666               | -8.405      | 74.000         | 31.929        | PK   |
| 3  |      | 2404.250        | 111.972                | 79.943               | N/A         | N/A            | 32.028        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                     |                       |
|---------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                       | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                                              | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                         | Polarity: Horizontal  |
| EUT: Mobile Computer                                                | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz 26 Tone RU0 |                       |

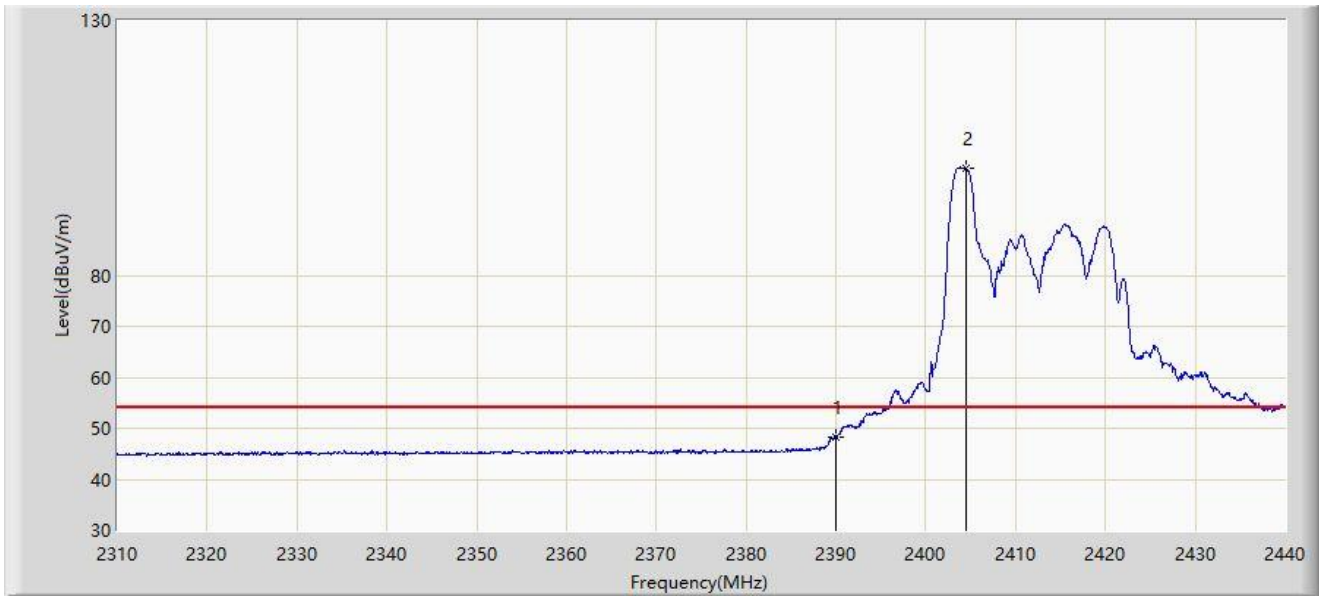


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2390.000        | 48.338                 | 16.409               | -5.662      | 54.000         | 31.929        | AV   |
| 2  |      | 2404.510        | 101.067                | 69.037               | N/A         | N/A            | 32.030        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                     |                       |
|---------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                       | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                                              | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                         | Polarity: Vertical    |
| EUT: Mobile Computer                                                | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz 26 Tone RU0 |                       |

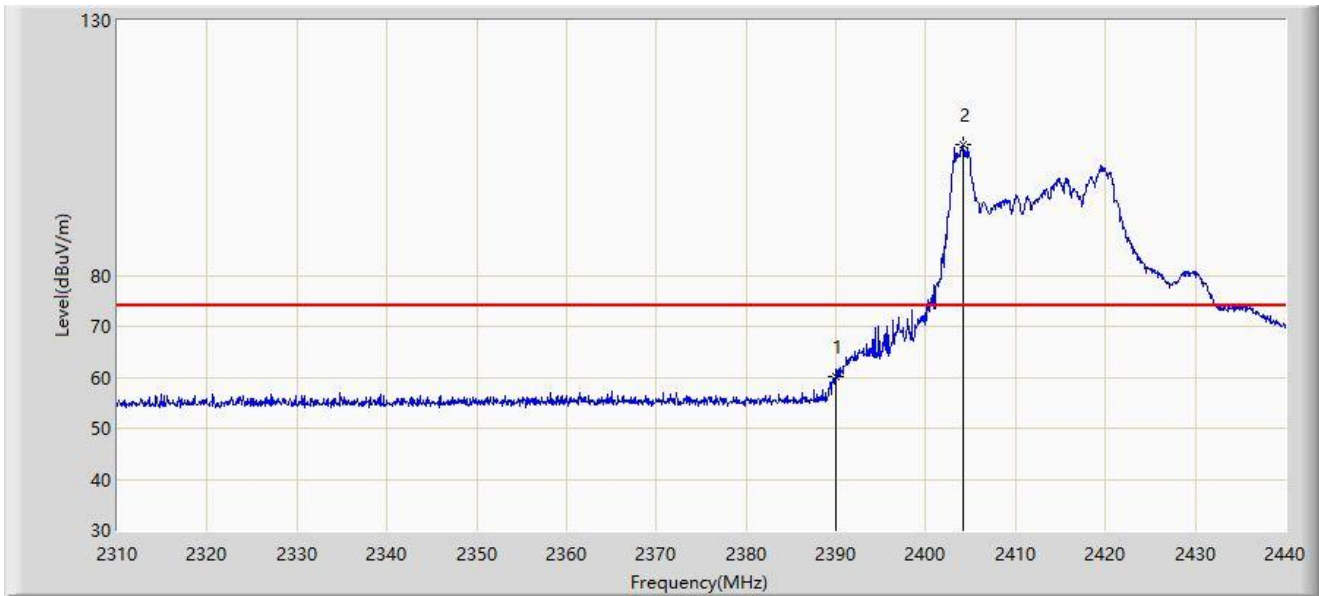


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2390.000        | 60.006                 | 28.077               | -13.994     | 74.000         | 31.929        | PK   |
| 2  |      | 2404.120        | 105.583                | 73.555               | N/A         | N/A            | 32.028        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                     |                       |
|---------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                       | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                                              | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                         | Polarity: Vertical    |
| EUT: Mobile Computer                                                | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz 26 Tone RU0 |                       |

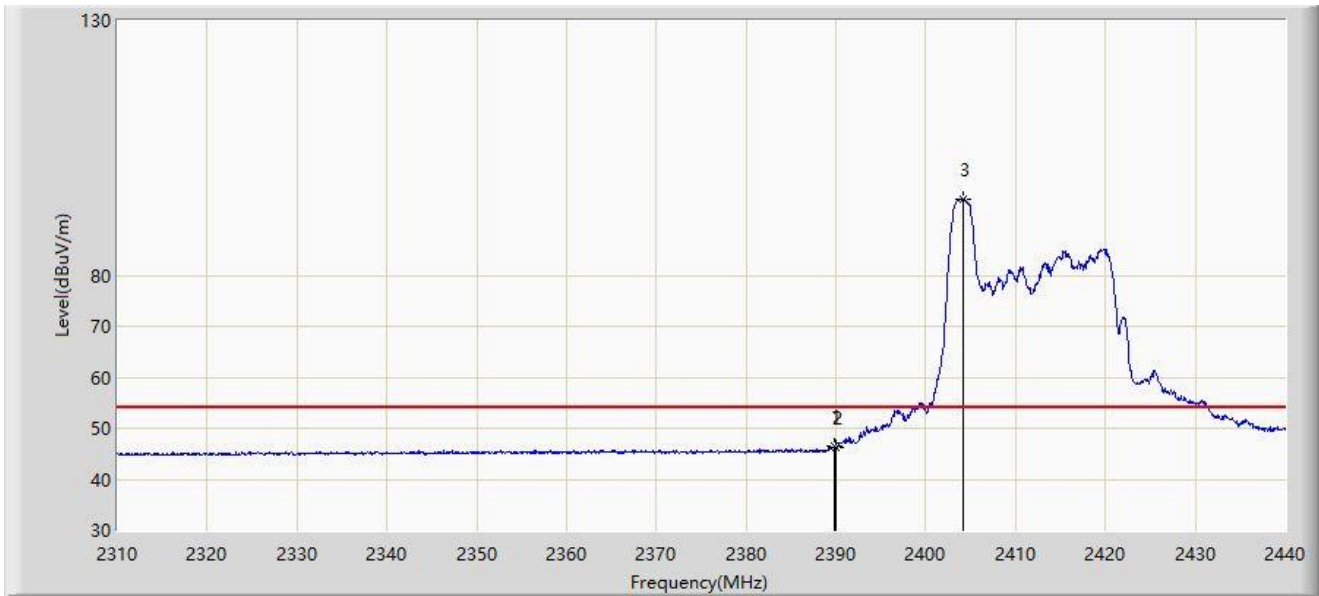


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.755        | 46.575                 | 14.648               | -7.425      | 54.000         | 31.928        | AV   |
| 2  |      | 2390.000        | 46.245                 | 14.316               | -7.755      | 54.000         | 31.929        | AV   |
| 3  |      | 2404.120        | 94.860                 | 62.832               | N/A         | N/A            | 32.028        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                      |                       |
|----------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                        | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                                               | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                          | Polarity: Horizontal  |
| EUT: Mobile Computer                                                 | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz 26 Tone RU17 |                       |

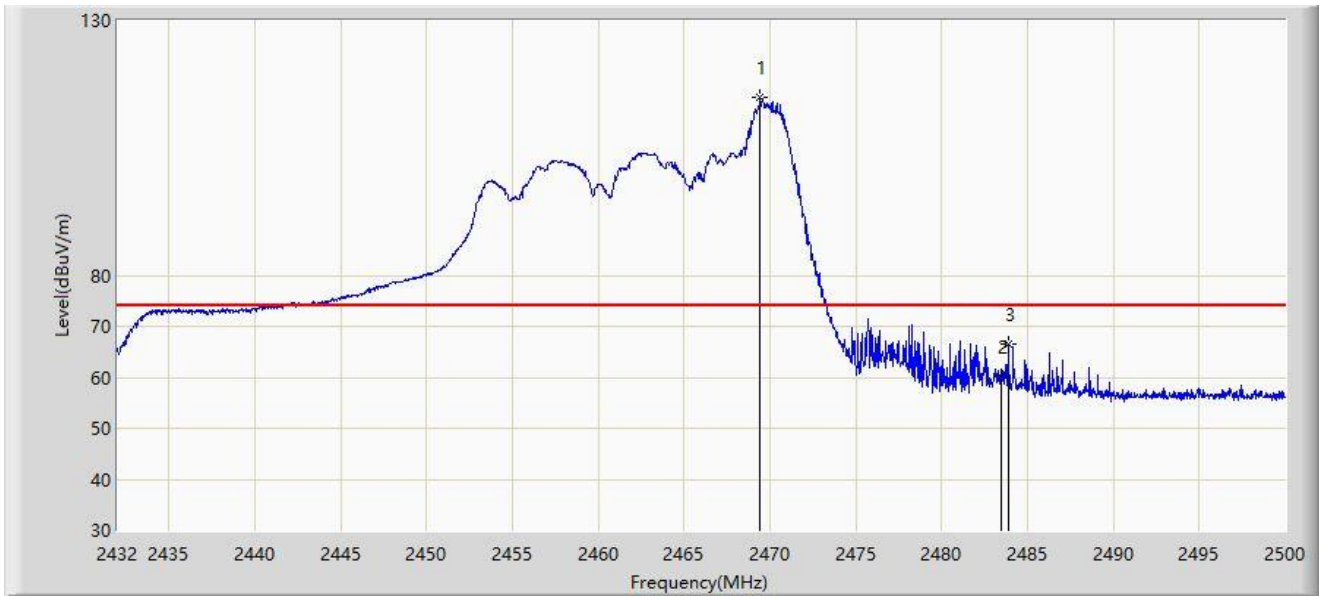


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2469.434        | 114.911                | 82.666               | N/A         | N/A            | 32.244        | PK   |
| 2  |      | 2483.500        | 60.069                 | 27.764               | -13.931     | 74.000         | 32.305        | PK   |
| 3  | *    | 2483.884        | 66.496                 | 34.189               | -7.504      | 74.000         | 32.307        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                      |                       |
|----------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                        | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                                               | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                          | Polarity: Horizontal  |
| EUT: Mobile Computer                                                 | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz 26 Tone RU17 |                       |

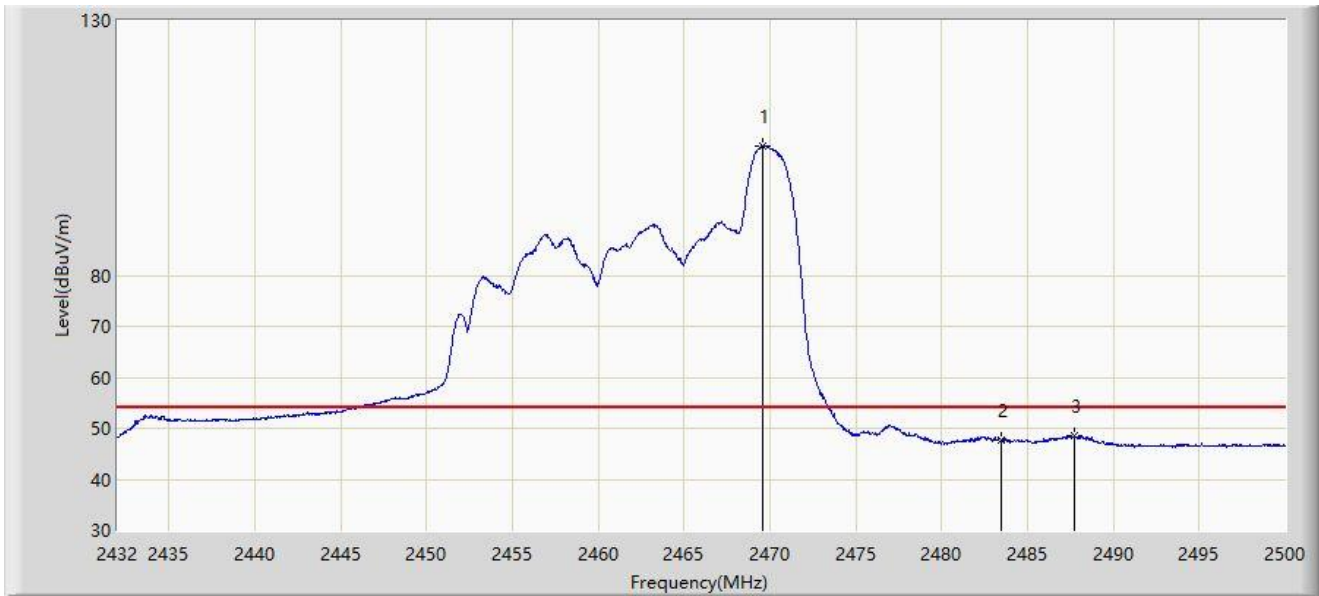


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2469.570        | 105.343                | 73.098               | N/A         | N/A            | 32.245        | AV   |
| 2  |      | 2483.500        | 47.544                 | 15.239               | -6.456      | 54.000         | 32.305        | AV   |
| 3  | *    | 2487.726        | 48.452                 | 16.126               | -5.548      | 54.000         | 32.327        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                      |                       |
|----------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                        | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                                               | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                          | Polarity: Vertical    |
| EUT: Mobile Computer                                                 | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz 26 Tone RU17 |                       |

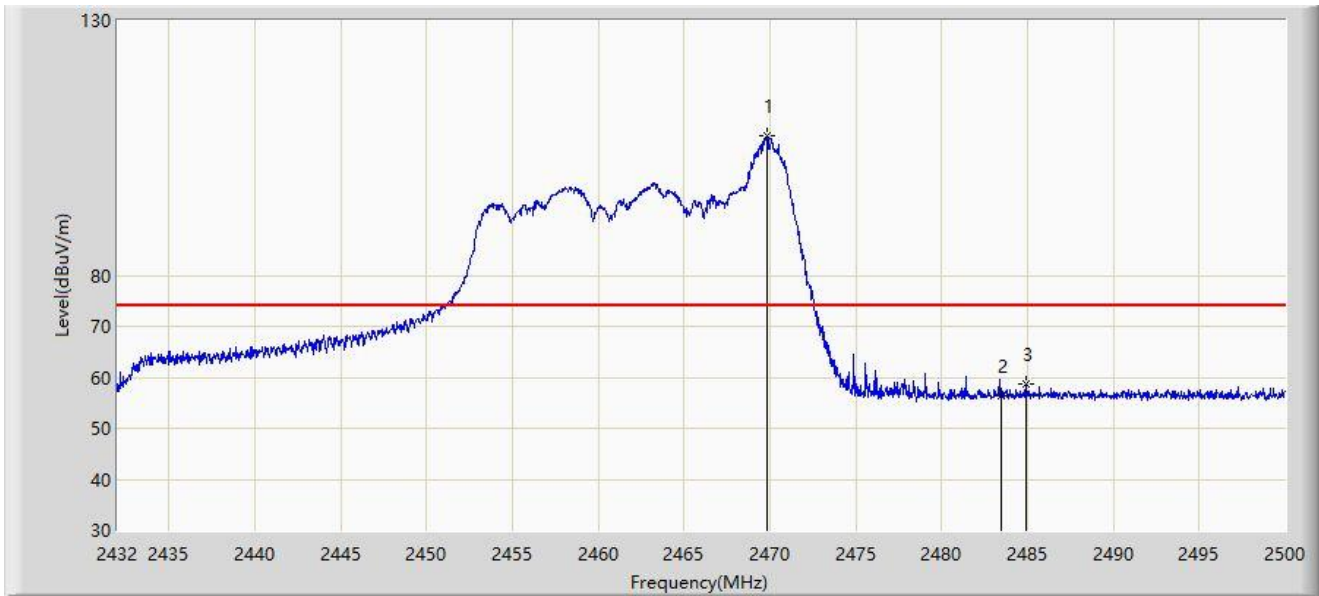


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2469.808        | 107.297                | 75.051               | N/A         | N/A            | 32.247        | PK   |
| 2  |      | 2483.500        | 56.287                 | 23.982               | -17.713     | 74.000         | 32.305        | PK   |
| 3  | *    | 2484.938        | 58.560                 | 26.248               | -15.440     | 74.000         | 32.313        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                      |                       |
|----------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                        | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                                               | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                          | Polarity: Vertical    |
| EUT: Mobile Computer                                                 | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz 26 Tone RU17 |                       |

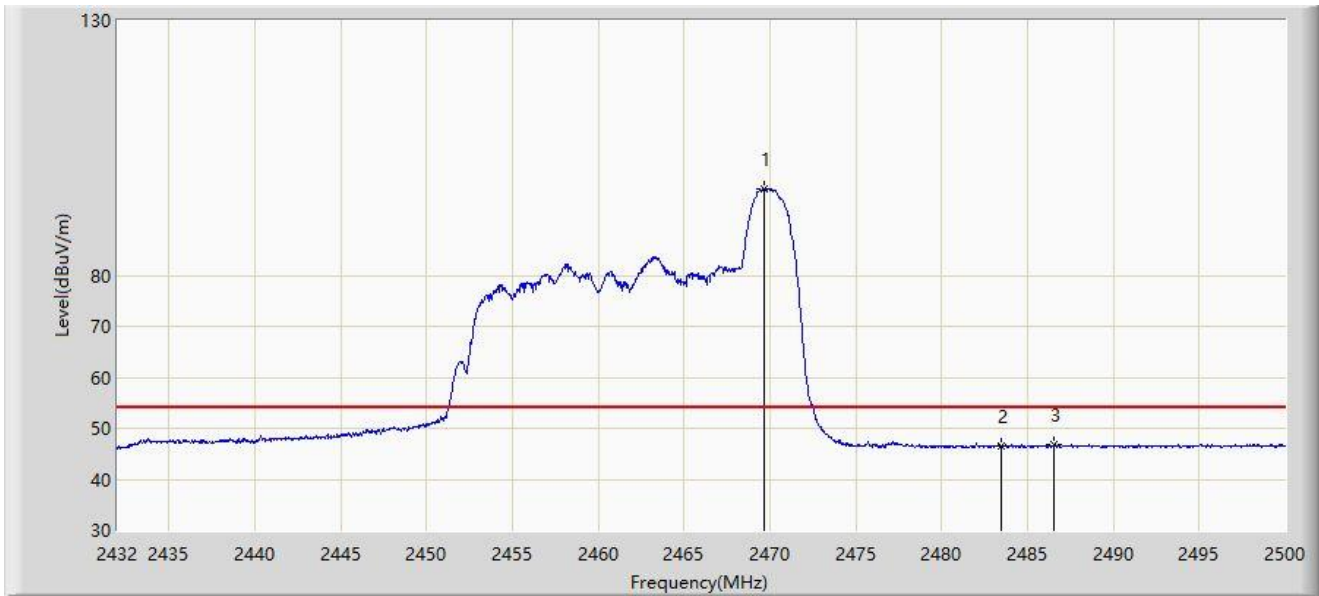


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2469.706        | 96.979                 | 64.733               | N/A         | N/A            | 32.245        | AV   |
| 2  |      | 2483.500        | 46.510                 | 14.205               | -7.490      | 54.000         | 32.305        | AV   |
| 3  | *    | 2486.536        | 46.710                 | 14.390               | -7.290      | 54.000         | 32.321        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                       |                       |
|-----------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                         | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                                                | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                           | Polarity: Horizontal  |
| EUT: Mobile Computer                                                  | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz 484 Tone RU65 |                       |

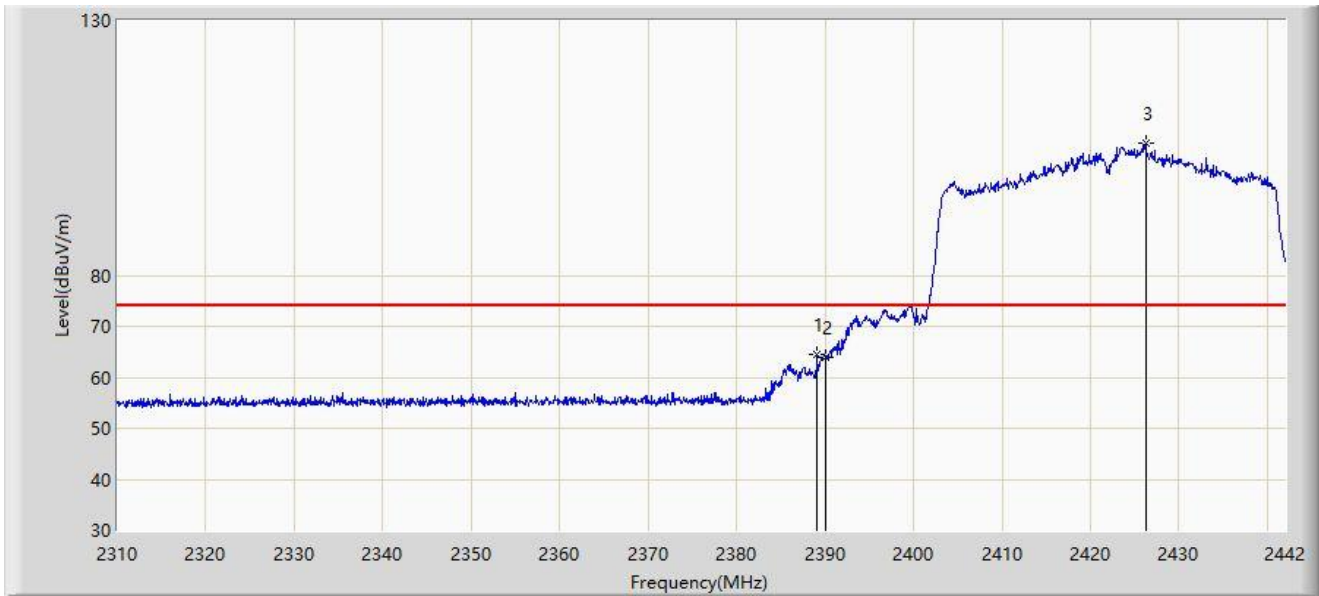


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.068        | 64.379                 | 32.456               | -9.621      | 74.000         | 31.923        | PK   |
| 2  |      | 2390.000        | 63.844                 | 31.915               | -10.156     | 74.000         | 31.929        | PK   |
| 3  |      | 2426.292        | 105.855                | 73.789               | N/A         | N/A            | 32.066        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                       |                       |
|-----------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                         | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                                                | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                           | Polarity: Horizontal  |
| EUT: Mobile Computer                                                  | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz 484 Tone RU65 |                       |

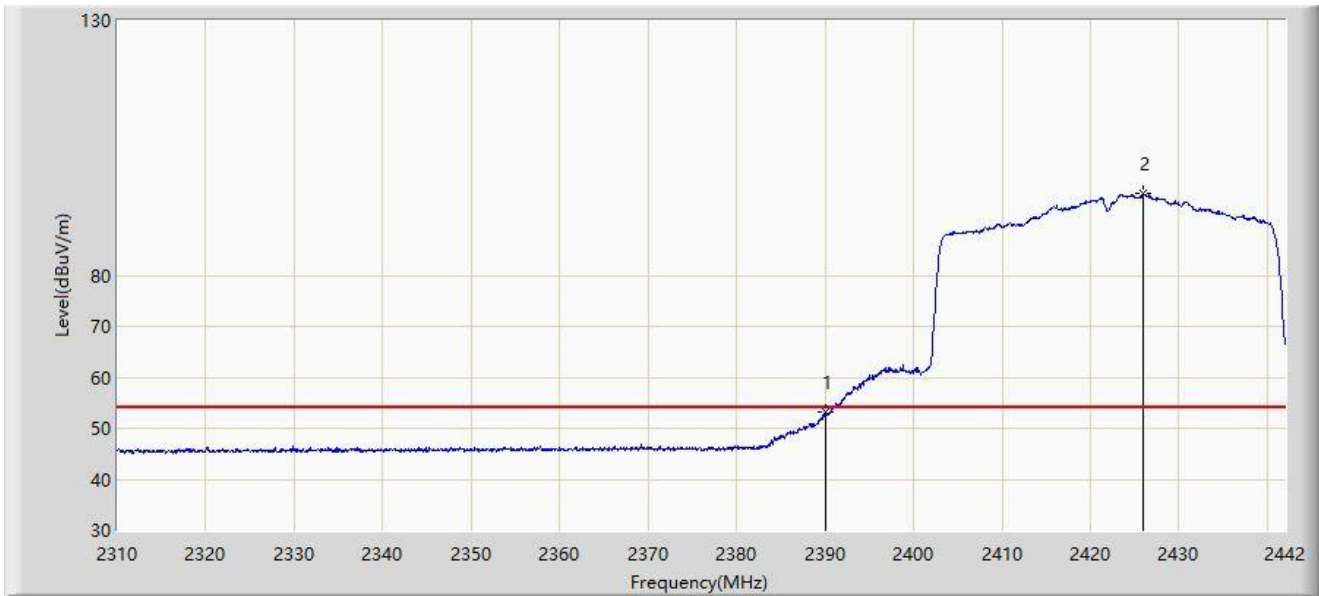


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2390.000        | 53.199                 | 21.270               | -0.801      | 54.000         | 31.929        | AV   |
| 2  |      | 2426.028        | 96.058                 | 63.992               | N/A         | N/A            | 32.066        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                       |                       |
|-----------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                         | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                                                | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                           | Polarity: Vertical    |
| EUT: Mobile Computer                                                  | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz 484 Tone RU65 |                       |

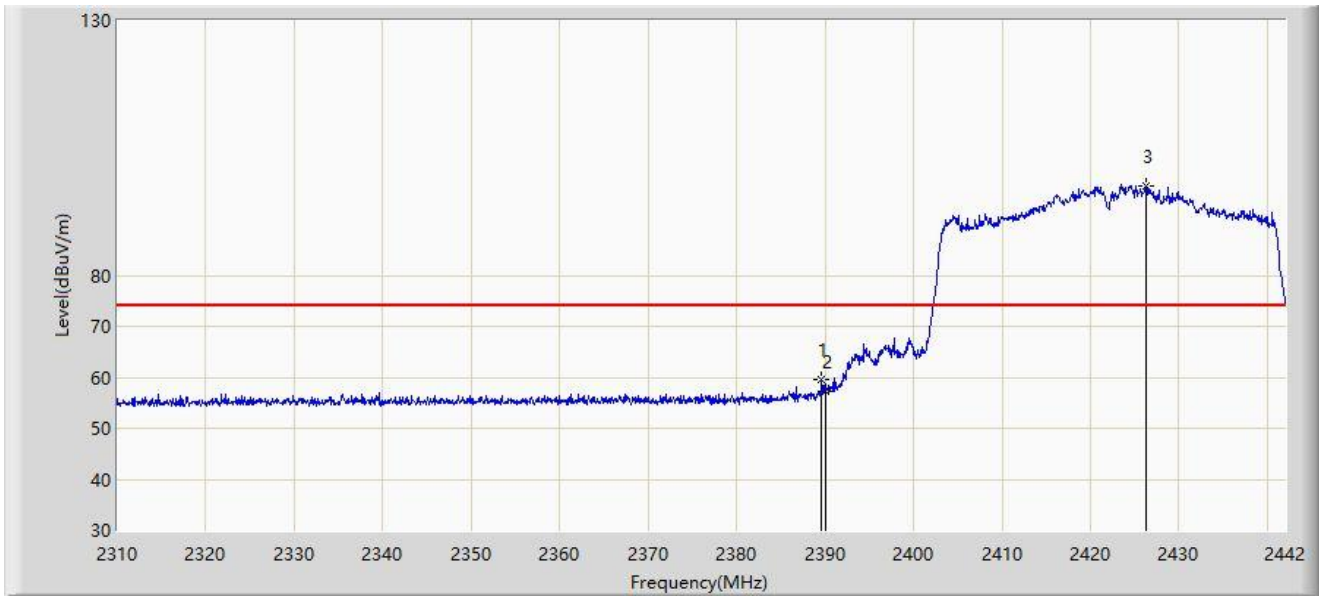


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.596        | 59.438                 | 27.512               | -14.562     | 74.000         | 31.926        | PK   |
| 2  |      | 2390.000        | 57.325                 | 25.396               | -16.675     | 74.000         | 31.929        | PK   |
| 3  |      | 2426.292        | 97.605                 | 65.539               | N/A         | N/A            | 32.066        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                       |                       |
|-----------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                         | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                                                | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                           | Polarity: Vertical    |
| EUT: Mobile Computer                                                  | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz 484 Tone RU65 |                       |

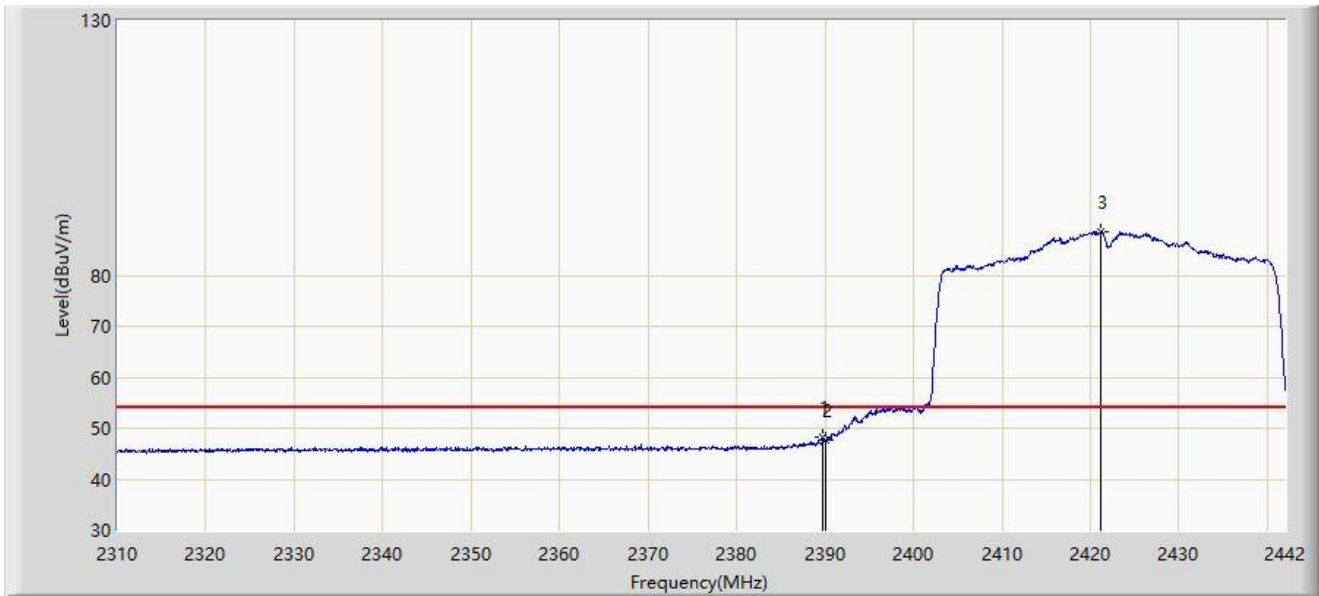


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.794        | 48.172                 | 16.244               | -5.828      | 54.000         | 31.928        | AV   |
| 2  |      | 2390.000        | 47.721                 | 15.792               | -6.279      | 54.000         | 31.929        | AV   |
| 3  |      | 2421.144        | 88.576                 | 56.506               | N/A         | N/A            | 32.071        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                       |                       |
|-----------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                         | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                                                | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                           | Polarity: Horizontal  |
| EUT: Mobile Computer                                                  | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz 484 Tone RU65 |                       |

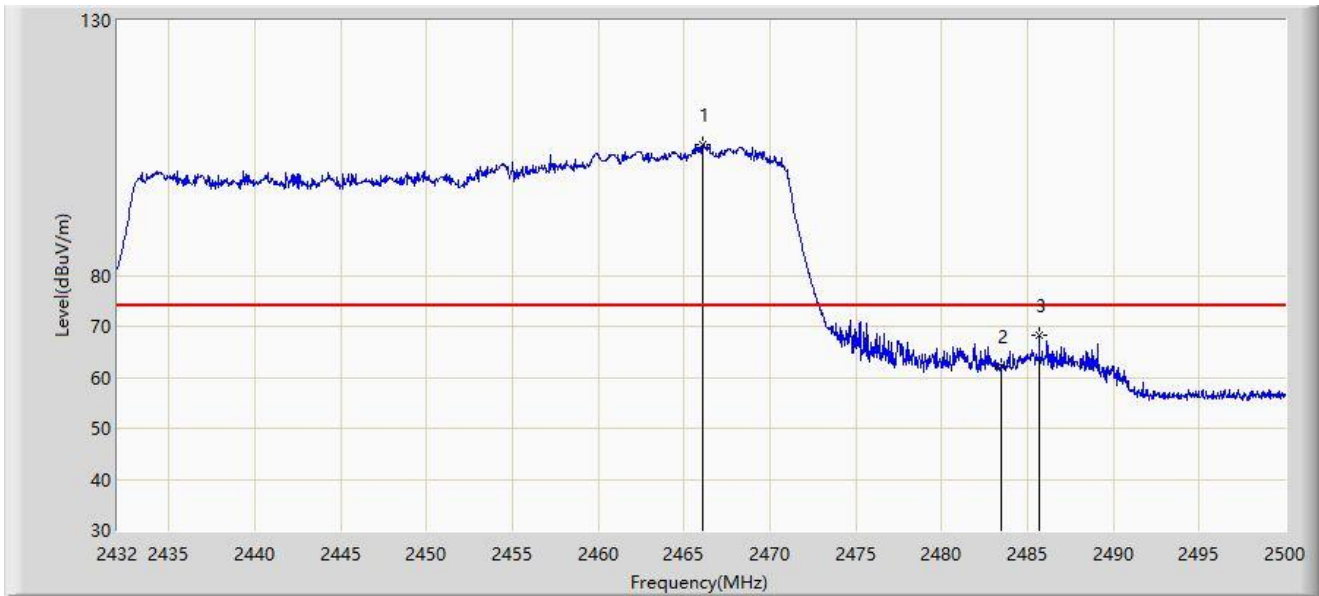


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2466.068        | 105.735                | 73.504               | N/A         | N/A            | 32.231        | PK   |
| 2  |      | 2483.500        | 62.114                 | 29.809               | -11.886     | 74.000         | 32.305        | PK   |
| 3  | *    | 2485.686        | 68.372                 | 36.056               | -5.628      | 74.000         | 32.316        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                       |                       |
|-----------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                         | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                                                | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                           | Polarity: Horizontal  |
| EUT: Mobile Computer                                                  | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz 484 Tone RU65 |                       |

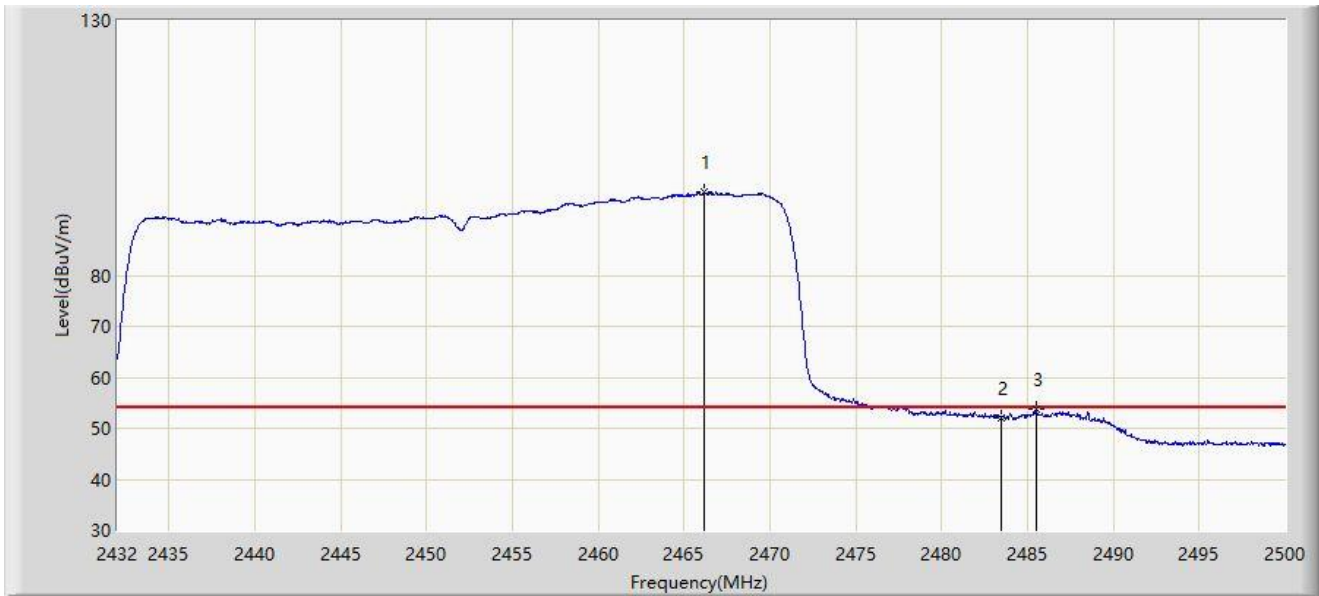


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2466.170        | 96.389                 | 64.157               | N/A         | N/A            | 32.232        | AV   |
| 2  |      | 2483.500        | 52.141                 | 19.836               | -1.859      | 54.000         | 32.305        | AV   |
| 3  | *    | 2485.482        | 53.788                 | 21.473               | -0.212      | 54.000         | 32.315        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                       |                       |
|-----------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                         | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                                                | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                           | Polarity: Vertical    |
| EUT: Mobile Computer                                                  | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz 484 Tone RU65 |                       |

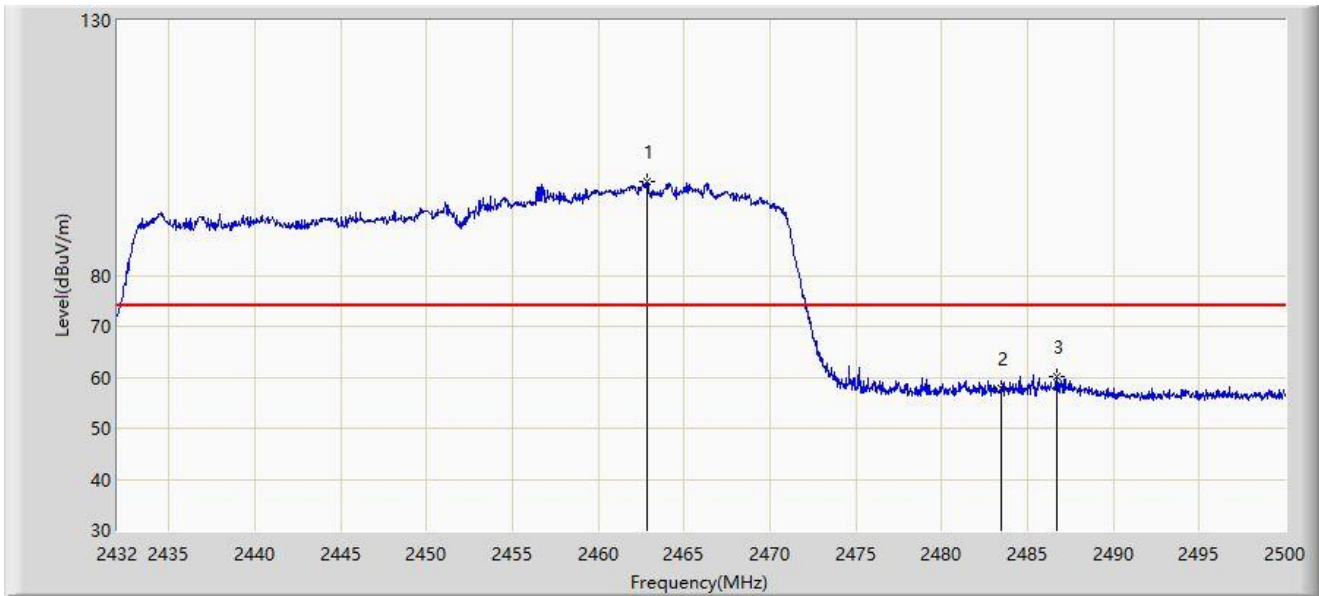


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2462.872        | 98.268                 | 66.049               | N/A         | N/A            | 32.219        | PK   |
| 2  |      | 2483.500        | 57.928                 | 25.623               | -16.072     | 74.000         | 32.305        | PK   |
| 3  | *    | 2486.740        | 60.281                 | 27.960               | -13.719     | 74.000         | 32.321        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                       |                       |
|-----------------------------------------------------------------------|-----------------------|
| Site: SIP-AC3                                                         | Test Date: 2022-10-19 |
| Limit: FCC_2.4G_RE(3m)                                                | Engineer: Mero Zhou   |
| Probe: HF907_102861_1-18GHz                                           | Polarity: Vertical    |
| EUT: Mobile Computer                                                  | Power: By Battery     |
| Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz 484 Tone RU65 |                       |

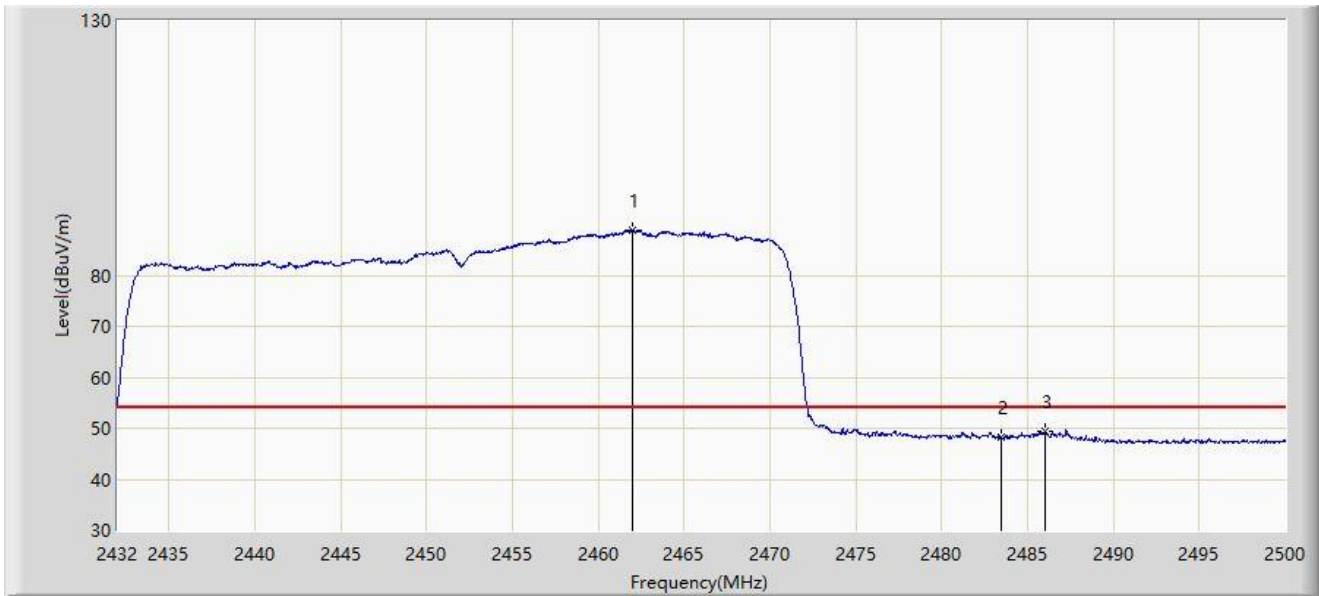

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2461.988        | 88.878                 | 56.663               | N/A         | N/A            | 32.215        | AV   |
| 2  |      | 2483.500        | 48.231                 | 15.926               | -5.769      | 54.000         | 32.305        | AV   |
| 3  | *    | 2486.026        | 49.433                 | 17.115               | -4.567      | 54.000         | 32.318        | AV   |


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

### A.8 AC Conducted Emissions Test Result

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: SIP-SR2                                                  | Time: 2022/10/27 - 14:14 |
| Temperature: 24.4°C                                            | Humidity: 60.5%          |
| Limit: FCC_Part15.107_CE_AC Power_Class B                      | Engineer: Miron Ding     |
| Probe: SIP-SR2-ENV216_101684_E                                 | Polarity: Line           |
| EUT: Mobile Computer                                           | Power: AC 120V/60Hz      |
| <b>Test Mode:</b> Transmit by 802.11ax-HE20 at channel 2462MHz |                          |

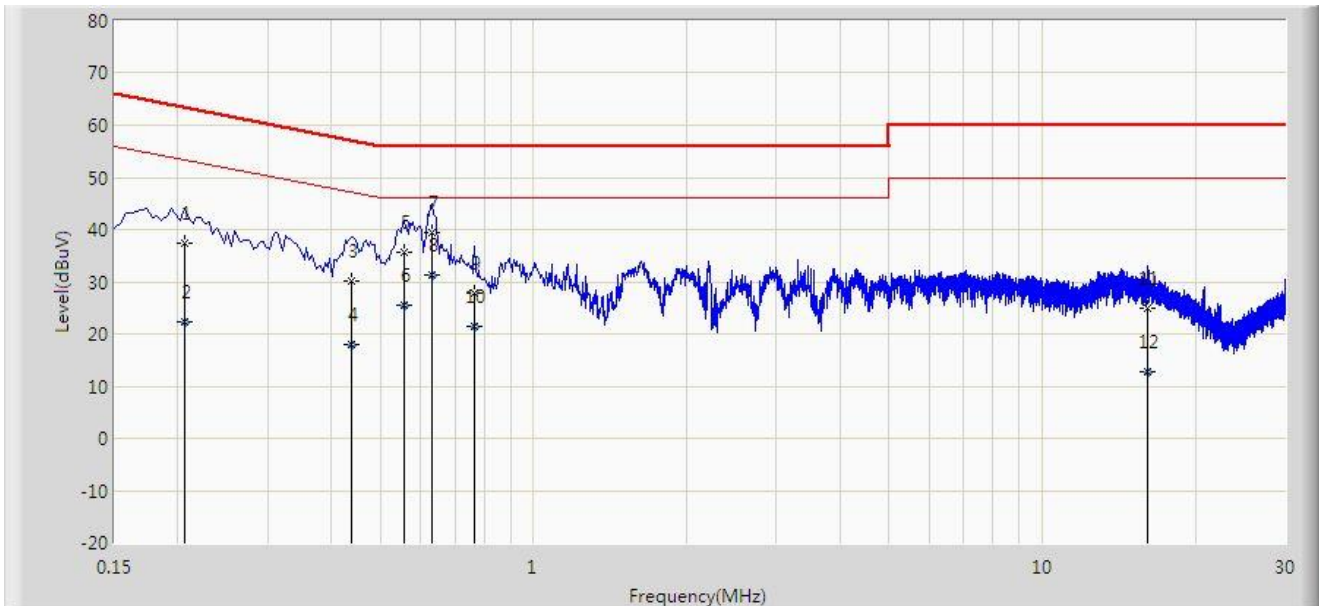


| No | Mark | Frequency (MHz) | Measure Level (dBμV) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV) | Factor (dB) | Type |
|----|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      | 0.206           | 37.417               | 27.646               | -25.948     | 63.365       | 9.771       | QP   |
| 2  |      | 0.206           | 22.334               | 12.564               | -31.031     | 53.365       | 9.771       | AV   |
| 3  |      | 0.438           | 30.246               | 20.423               | -26.854     | 57.100       | 9.823       | QP   |
| 4  |      | 0.438           | 18.084               | 8.261                | -29.015     | 47.100       | 9.823       | AV   |
| 5  |      | 0.558           | 35.631               | 25.801               | -20.369     | 56.000       | 9.830       | QP   |
| 6  |      | 0.558           | 25.375               | 15.545               | -20.625     | 46.000       | 9.830       | AV   |
| 7  |      | 0.630           | 39.315               | 29.480               | -16.685     | 56.000       | 9.835       | QP   |
| 8  | *    | 0.630           | 31.427               | 21.591               | -14.573     | 46.000       | 9.835       | AV   |
| 9  |      | 0.766           | 27.934               | 18.090               | -28.066     | 56.000       | 9.844       | QP   |
| 10 |      | 0.766           | 21.486               | 11.641               | -24.514     | 46.000       | 9.844       | AV   |
| 11 |      | 16.150          | 24.911               | 12.690               | -35.089     | 60.000       | 12.220      | QP   |
| 12 |      | 16.150          | 12.667               | 0.447                | -37.333     | 50.000       | 12.220      | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: SIP-SR2                                                  | Time: 2022/10/27 - 14:19 |
| Temperature: 24.4°C                                            | Humidity: 60.5%          |
| Limit: FCC_Part15.107_CE_AC Power_Class B                      | Engineer: Miron Ding     |
| Probe: SIP-SR2-ENV216_101684_E                                 | Polarity: Neutral        |
| EUT: Mobile Computer                                           | Power: AC 120V/60Hz      |
| <b>Test Mode:</b> Transmit by 802.11ax-HE20 at channel 2462MHz |                          |

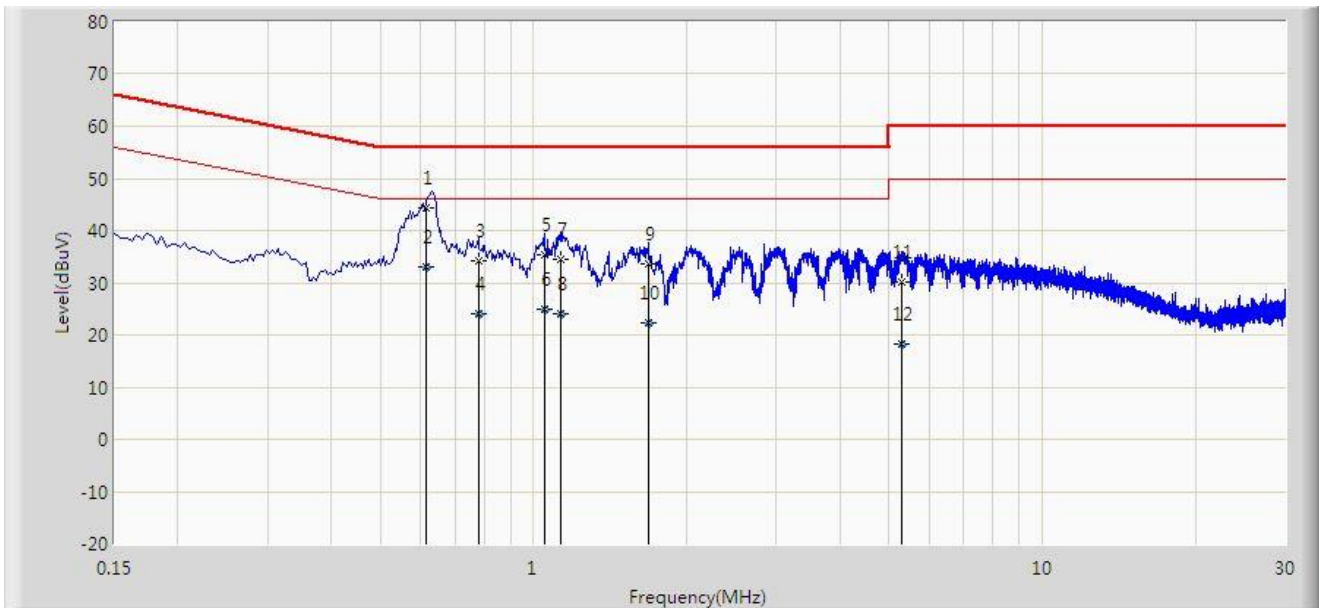

| No | Mark | Frequency (MHz) | Measure Level (dBμV) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV) | Factor (dB) | Type |
|----|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  | *    | 0.616           | 44.225               | 34.400               | -11.775     | 56.000       | 9.825       | QP   |
| 2  |      | 0.616           | 33.025               | 23.200               | -12.975     | 46.000       | 9.825       | AV   |
| 3  |      | 0.778           | 34.194               | 24.356               | -21.806     | 56.000       | 9.838       | QP   |
| 4  |      | 0.778           | 23.952               | 14.114               | -22.048     | 46.000       | 9.838       | AV   |
| 5  |      | 1.050           | 35.262               | 25.408               | -20.738     | 56.000       | 9.853       | QP   |
| 6  |      | 1.050           | 24.849               | 14.995               | -21.151     | 46.000       | 9.853       | AV   |
| 7  |      | 1.130           | 34.527               | 24.661               | -21.473     | 56.000       | 9.866       | QP   |
| 8  |      | 1.130           | 23.962               | 14.096               | -22.038     | 46.000       | 9.866       | AV   |
| 9  |      | 1.678           | 33.507               | 23.596               | -22.493     | 56.000       | 9.911       | QP   |
| 10 |      | 1.678           | 22.380               | 12.469               | -23.620     | 46.000       | 9.911       | AV   |
| 11 |      | 5.306           | 30.082               | 19.850               | -29.918     | 60.000       | 10.232      | QP   |
| 12 |      | 5.306           | 18.146               | 7.914                | -31.854     | 50.000       | 10.232      | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

## **Appendix B – Test Setup Photograph**

Refer to “2209RSU040-UT” file.

## **Appendix C – EUT Photograph**

Refer to “2209RSU040-UE” file.

\_\_\_\_\_ The End \_\_\_\_\_