


FCC SAR Test Report

APPLICANT : Sony Mobile Communications Inc.
BRAND NAME : Sony
FCC ID : PY7-08608T
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Applied.....	5
4. Equipment Under Test (EUT) Information.....	6
4.1 General Information	6
4.2 Device Serial Number	6
5. RF Exposure Limits.....	7
5.1 Uncontrolled Environment.....	7
5.2 Controlled Environment.....	7
6. Specific Absorption Rate (SAR).....	8
6.1 Introduction	8
6.2 SAR Definition.....	8
7. System Description and Setup	9
7.1 E-Field Probe	10
7.2 Data Acquisition Electronics (DAE)	10
7.3 Phantom.....	11
7.4 Device Holder.....	12
8. Measurement Procedures	13
8.1 Spatial Peak SAR Evaluation.....	13
8.2 Power Reference Measurement.....	14
8.3 Area Scan	14
8.4 Zoom Scan.....	15
8.5 Volume Scan Procedures.....	15
8.6 Power Drift Monitoring.....	15
9. Test Equipment List.....	16
10. System Verification	17
10.1 Tissue Simulating Liquids.....	17
10.2 Tissue Verification	18
10.3 System Performance Check Results.....	20
11. RF Exposure Positions	22
11.1 Ear and handset reference point	22
11.2 Definition of the cheek position.....	23
11.3 Definition of the tilt position.....	24
11.4 Body Worn Accessory	25
11.5 Wireless Router.....	25
12. Conducted RF Output Power (Unit: dBm).....	26
13. RF Exposure Conditions	54
14. SAR Test Results	55
14.1 Head SAR	57
14.2 Hotspot SAR	60
14.3 Body Worn Accessory SAR.....	63
14.4 Repeated SAR Measurement	65
15. Simultaneous Transmission Analysis	66
15.1 Head Exposure Conditions	67
15.2 Hotspot Exposure Conditions.....	69
15.3 Body-Worn Accessory Exposure Conditions	71
16. Uncertainty Assessment	72
17. References.....	75
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Antenna Location & Test Setup Photos	

Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA760710-01	Rev. 01	Initial issue of report	Oct. 24, 2017



1. Statement of Compliance

Applicant Name	Sony Mobile Communications Inc.			
EUT Description	GSM/WCDMA/LTE Phone+Bluetooth, DTS/UNII a/b/g/n/ac and NFC			
Brand Name	Sony			
FCC ID	PY7-08608T			
HW Version	A			
SW Version	1.14			
RF Exposure Conditions	Equipment Class			
	Licensed	DTS	U-NII	DSS
Head (1g SAR W/kg)	0.70	0.76	0.52	0.19
Body-Worn (1g SAR W/kg)	0.88	0.06	0.09	0.02
Wireless Router (1g SAR W/kg)	1.12	0.17		0.04
Highest Simultaneous Transmission (1g SAR W/kg)	Head:1.46 Body-worn:0.96 Hotspot:1.29	Head:1.46 Body-worn:0.93 Hotspot:1.29	Head:1.21 Body-worn:0.96 Hotspot:N/A	Head:0.89 Body-worn:0.89 Hotspot:1.15
Date Tested	2017/9/11 ~ 2017/9/29			
Test Result	Pass			
Remark:				
1. This device 2.4GHz WLAN support Hotspot operation and Bluetooth support tethering applications.				
2. GSM1900, WCDMA B2 and LTE B2 power reduction is activated in hotspot mode.				
3. This product have two samples, the different between these samples are had speaker / Fingerprint / Battery, sample1 as the main tested, sample2 will spot-check worst case found in sample1.				

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	Sony Mobile Communications Inc.
Address	4-12-3 Higashi-Shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan

Manufacturer	
Company Name	Sony Mobile Communications Inc.
Address	4-12-3 Higashi-Shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Wireless Technologies	Frequency	Operating Mode	
GSM	850 1900	· GSM Voice · GPRS (GMSK) · EDGE (8PSK)	Multi-Slot Class: Class 33
	Does device support dual transfer mode? (Yes)		
W-CDMA (UMTS)	Band 2 Band 5	· AMR / RMC 12.2Kbps · HSDPA · HSUPA · DC-HSDPA	
LTE (FDD)	Band 2 Band 5 Band 7	· QPSK · 16QAM · 64QAM · Rel 11 Carrier Aggregation Downlink only (Inter-Band and Intra-Band possible combinations please referred to section 12)	
LTE (TDD)	Band 41		
WiFi	2.4GHz: 2412 MHz ~ 2462 MHz	· 11b · 11g · 11n (HT20) · 11ac (VHT20)	
	5GHz: 5.2GHz: 5180 MHz ~ 5240 MHz 5.3GHz: 5260 MHz ~ 5320 MHz 5.5GHz: 5500 MHz ~ 5720 MHz 5.8GHz: 5745 MHz ~ 5825 MHz	· 11a · 11n (HT20) · 11n (HT40) · 11ac (VHT20) · 11ac (VHT40) · 11ac (VHT80)	
Bluetooth	2.4GHz	· BR / EDR / LE	
NFC	13.56MHz	· ASK	

Accessories Information		
Battery 1	Model Name	LIP1654ERPC
	Type	Li-ion
Battery 2	Model Name	SNYSK84
	Type	Li-ion
Earphone 1	Model Name	MH410c
	Type Name	AG-1100
Earphone 2	Model Name	MH410c
	Type Name	AG-1103

4.2 Device Serial Number

Band	SN
WWAN	CQ300000ER
	CQ300000FH
WLAN	CQ300000F4
	CQ300000FC

Note: Several samples were used with identical hardware to support SAR testing. The manufacturer has confirmed that the device tested gave the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

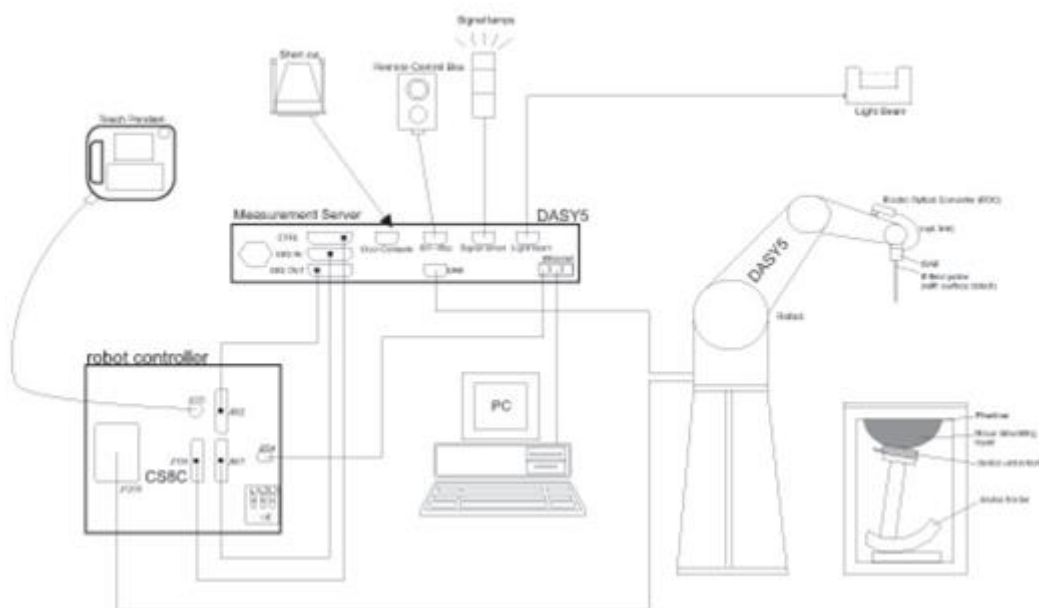

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is Battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

7.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE

7.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

7.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 21, 2017	Mar. 20, 2018
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Sep. 30, 2016	Sep. 29, 2017
SPEAG	2450MHz System Validation Kit	D2450V2	735	Dec. 23, 2016	Dec. 22, 2017
SPEAG	2600MHz System Validation Kit	D2600V2	1058	Jun. 27, 2017	Jun. 26, 2018
SPEAG	5GHz System Validation Kit	D5GHzV2	1171	Jul. 18, 2017	Jul. 17, 2018
SPEAG	5GHz System Validation Kit	D5GHzV2	1040	Jul. 13, 2017	Jul. 12, 2018
SPEAG	Data Acquisition Electronics	DAE4	1424	Feb. 16, 2017	Feb. 15, 2018
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 17, 2016	Nov. 16, 2017
SPEAG	Data Acquisition Electronics	DAE4	778	May. 22, 2017	May. 21, 2018
SPEAG	Data Acquisition Electronics	DAE4	916	Dec. 15, 2016	Dec. 14, 2017
SPEAG	Dosimetric E-Field Probe	EX3DV4	3976	Feb. 21, 2017	Feb. 20, 2018
SPEAG	Dosimetric E-Field Probe	ES3DV3	3071	Dec. 08, 2016	Dec. 07, 2017
SPEAG	Dosimetric E-Field Probe	ES3DV3	3169	May. 11, 2017	May. 10, 2018
SPEAG	Dosimetric E-Field Probe	EX3DV4	3873	Aug. 25, 2017	Aug. 24, 2018
WonDer	Thermometer	WD-5016	TM560-1	Mar. 17, 2017	Mar. 16, 2018
WonDer	Thermometer	WD-5016	TM560-2	Mar. 17, 2017	Mar. 16, 2018
TECPEL	Thermometer	UL-A03	TM225-1	Mar. 21, 2017	Mar. 20, 2018
TECPEL	Thermometer	UL-A03	TM225-2	Mar. 21, 2017	Mar. 20, 2018
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Apr. 20, 2017	Apr. 19, 2018
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 30, 2017	May. 29, 2018
R&S	BT Base Station	CBT32	100522	Mar. 14, 2017	Mar. 13, 2018
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Dec. 09, 2016	Dec. 08, 2017
Agilent	ENA Network Analyzer	E5071C	MY46316648	Jan. 04, 2017	Jan. 03, 2018
SPEAG	Dielectric Probe Kit	DAK-3.5	1146	Jul. 18, 2017	Jul. 17, 2018
Anritsu	Power Meter	ML2495A	1438002	Dec. 06, 2016	Dec. 05, 2017
Anritsu	Power Meter	ML2495A	1419002	May. 15, 2017	May. 14, 2018
Anritsu	Power Sensor	MA2411B	1339195	Dec. 06, 2016	Dec. 05, 2017
Anritsu	Power Sensor	MA2411B	1339124	May. 15, 2017	May. 14, 2018
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 23, 2017	Aug. 22, 2018
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 26, 2017	Jun. 25, 2018
Mini-Circuits	Power Amplifier	ZVE-8G+	D120604	Mar. 09, 2017	Mar. 08, 2018
Mini-Circuits	Power Amplifier	ZHL-42W+	QA1344002	Mar. 09, 2017	Mar. 08, 2018
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

10. System Verification

10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

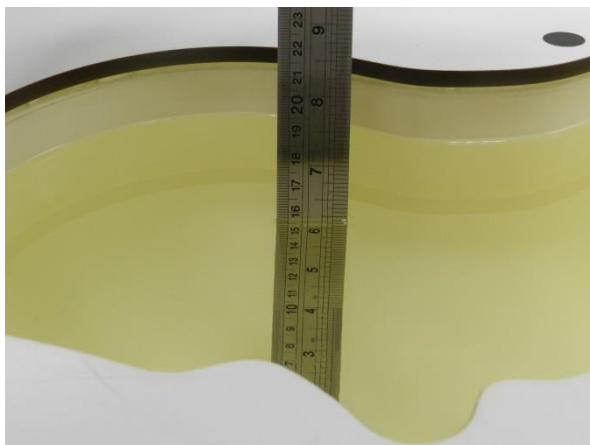


Fig 10.1 Photo of Liquid Height for Head SAR



Fig 10.2 Photo of Liquid Height for Body SAR

10.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
835	HSL	22.1	0.897	42.422	0.90	41.50	-0.33	2.22	±5	2017/9/12
835	HSL	22.5	0.896	41.049	0.90	41.50	-0.44	-1.09	±5	2017/9/29
835	MSL	22.1	0.998	57.300	0.97	55.20	2.89	3.80	±5	2017/9/11
835	MSL	22.5	0.977	57.228	0.97	55.20	0.72	3.67	±5	2017/9/29
1900	HSL	22.7	1.415	39.834	1.40	40.00	1.07	-0.41	±5	2017/9/13
1900	HSL	22.4	1.445	38.731	1.40	40.00	3.21	-3.17	±5	2017/9/29
1900	MSL	22.3	1.574	54.326	1.52	53.30	3.55	1.92	±5	2017/9/15
1900	MSL	22.7	1.559	53.793	1.52	53.30	2.57	0.92	±5	2017/9/16
1900	MSL	22.4	1.560	55.329	1.52	53.30	2.63	3.81	±5	2017/9/29
2450	HSL	22.3	1.773	38.624	1.80	39.20	-1.50	-1.47	±5	2017/9/17
2450	HSL	22.2	1.765	38.501	1.80	39.20	-1.94	-1.78	±5	2017/9/19
2450	HSL	22.4	1.793	39.957	1.80	39.20	-0.39	1.93	±5	2017/9/28
2450	MSL	22.9	1.988	54.052	1.95	52.70	1.95	2.57	±5	2017/9/18
2450	MSL	22.2	1.981	53.928	1.95	52.70	1.59	2.33	±5	2017/9/19
2450	MSL	22.2	1.960	52.965	1.95	52.70	0.51	0.50	±5	2017/9/29
2600	HSL	22.7	1.972	39.583	1.96	39.00	0.61	1.49	±5	2017/9/13
2600	HSL	22.4	1.962	39.363	1.96	39.00	0.10	0.93	±5	2017/9/28
2600	MSL	22.5	2.206	53.304	2.16	52.50	2.13	1.53	±5	2017/9/14
2600	MSL	22.2	2.167	52.469	2.16	52.50	0.32	-0.06	±5	2017/9/29
5250	HSL	22.8	4.508	35.589	4.71	35.95	-4.29	-1.00	±5	2017/9/18
5250	HSL	22.1	4.503	36.847	4.71	35.95	-4.39	2.50	±5	2017/9/29
5250	MSL	22.5	5.305	47.530	5.36	48.95	-1.03	-2.90	±5	2017/9/18
5250	MSL	22.2	5.547	47.196	5.36	48.95	3.49	-3.58	±5	2017/9/29
5600	HSL	22.8	4.847	35.099	5.07	35.50	-4.40	-1.13	±5	2017/9/18
5600	HSL	22.1	4.833	36.384	5.07	35.50	-4.67	2.49	±5	2017/9/29
5600	MSL	22.5	5.757	46.963	5.77	48.50	-0.23	-3.17	±5	2017/9/18
5600	MSL	22.2	6.019	46.602	5.77	48.50	4.32	-3.91	±5	2017/9/29
5750	HSL	22.1	4.982	36.206	5.22	35.35	-4.56	2.42	±5	2017/9/29
5750	MSL	22.2	6.216	46.377	5.94	48.28	4.65	-3.94	±5	2017/9/29
5800	HSL	22.8	5.045	34.842	5.27	35.30	-4.27	-1.30	±5	2017/9/18
5800	MSL	22.5	6.032	46.659	6.00	48.20	0.53	-3.20	±5	2017/9/18

10.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2017/9/12	835	HSL	250	D835V2-499	ES3DV3 - SN3169	DAE4 Sn1399	2.38	9.45	9.52	0.74
2017/9/29	835	HSL	250	D835V2-499	EX3DV4 - SN3976	DAE4 Sn1424	2.31	9.45	9.24	-2.22
2017/9/11	835	MSL	250	D835V2-499	ES3DV3 - SN3169	DAE4 Sn1399	2.56	9.67	10.24	5.89
2017/9/29	835	MSL	250	D835V2-499	EX3DV4 - SN3976	DAE4 Sn1424	2.51	9.67	10.04	3.83
2017/9/13	1900	HSL	250	D1900V2-5d041	ES3DV3 - SN3169	DAE4 Sn1399	9.67	40.50	38.68	-4.49
2017/9/29	1900	HSL	250	D1900V2-5d041	EX3DV4 - SN3976	DAE4 Sn1424	10.10	40.50	40.4	-0.25
2017/9/15	1900	MSL	250	D1900V2-5d041	ES3DV3 - SN3071	DAE4 Sn778	10.40	38.80	41.6	7.22
2017/9/16	1900	MSL	250	D1900V2-5d041	ES3DV3 - SN3169	DAE4 Sn1399	10.10	38.80	40.4	4.12
2017/9/29	1900	MSL	250	D1900V2-5d041	EX3DV4 - SN3976	DAE4 Sn1424	9.88	38.80	39.52	1.86
2017/9/17	2450	HSL	250	D2450V2-735	ES3DV3 - SN3169	DAE4 Sn1399	13.40	50.90	53.6	5.30
2017/9/19	2450	HSL	250	D2450V2-735	ES3DV3 - SN3071	DAE4 Sn778	12.80	50.90	51.2	0.59
2017/9/28	2450	HSL	250	D2450V2-735	EX3DV4 - SN3976	DAE4 Sn1424	12.00	50.90	48	-5.70
2017/9/18	2450	MSL	250	D2450V2-735	ES3DV3 - SN3169	DAE4 Sn1399	12.30	50.60	49.2	-2.77
2017/9/19	2450	MSL	250	D2450V2-735	ES3DV3 - SN3071	DAE4 Sn778	12.80	50.60	51.2	1.19
2017/9/29	2450	MSL	250	D2450V2-735	EX3DV4 - SN3976	DAE4 Sn1424	12.70	50.60	50.8	0.40
2017/9/13	2600	HSL	250	D2600V2-1058	ES3DV3 - SN3169	DAE4 Sn1399	14.40	57.00	57.6	1.05
2017/9/28	2600	HSL	250	D2600V2-1058	EX3DV4 - SN3976	DAE4 Sn1424	14.60	57.00	58.4	2.46
2017/9/14	2600	MSL	250	D2600V2-1058	ES3DV3 - SN3169	DAE4 Sn1399	13.90	54.30	55.6	2.39
2017/9/29	2600	MSL	250	D2600V2-1058	EX3DV4 - SN3976	DAE4 Sn1424	14.90	54.30	59.6	9.76
2017/9/18	5250	HSL	100	D5GHzV2-1171	EX3DV4 - SN3873	DAE4 Sn916	7.49	81.20	74.9	-7.76
2017/9/29	5250	HSL	100	D5GHzV2-1171	EX3DV4 - SN3976	DAE4 Sn1424	8.07	81.20	80.7	-0.62
2017/9/18	5250	MSL	100	D5GHzV2-1171	EX3DV4 - SN3873	DAE4 Sn916	7.34	78.10	73.4	-6.02
2017/9/29	5250	MSL	100	D5GHzV2-1171	EX3DV4 - SN3976	DAE4 Sn1424	8.51	78.10	85.1	8.96
2017/9/18	5600	HSL	100	D5GHzV2-1171	EX3DV4 - SN3873	DAE4 Sn916	7.79	84.90	77.9	-8.24
2017/9/29	5600	HSL	100	D5GHzV2-1171	EX3DV4 - SN3976	DAE4 Sn1424	8.62	84.90	86.2	1.53
2017/9/18	5600	MSL	100	D5GHzV2-1171	EX3DV4 - SN3873	DAE4 Sn916	8.14	81.00	81.4	0.49
2017/9/29	5600	MSL	100	D5GHzV2-1171	EX3DV4 - SN3976	DAE4 Sn1424	8.15	81.00	81.5	0.62
2017/9/29	5750	HSL	100	D5GHzV2-1171	EX3DV4 - SN3976	DAE4 Sn1424	8.25	82.20	82.5	0.36
2017/9/29	5750	MSL	100	D5GHzV2-1171	EX3DV4 - SN3976	DAE4 Sn1424	8.16	78.70	81.6	3.68
2017/9/18	5800	HSL	100	D5GHzV2-1040	EX3DV4 - SN3873	DAE4 Sn916	7.46	82.00	74.6	-9.02
2017/9/18	5800	MSL	100	D5GHzV2-1040	EX3DV4 - SN3873	DAE4 Sn916	7.37	76.90	73.7	-4.16

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2017/9/12	835	HSL	250	D835V2-499	ES3DV3 - SN3169	DAE4 Sn1399	1.57	6.14	6.28	2.28
2017/9/29	835	HSL	250	D835V2-499	EX3DV4 - SN3976	DAE4 Sn1424	1.53	6.14	6.12	-0.33
2017/9/11	835	MSL	250	D835V2-499	ES3DV3 - SN3169	DAE4 Sn1399	1.71	6.35	6.84	7.72
2017/9/29	835	MSL	250	D835V2-499	EX3DV4 - SN3976	DAE4 Sn1424	1.67	6.35	6.68	5.20
2017/9/13	1900	HSL	250	D1900V2-5d041	ES3DV3 - SN3169	DAE4 Sn1399	5.04	21.40	20.16	-5.79
2017/9/29	1900	HSL	250	D1900V2-5d041	EX3DV4 - SN3976	DAE4 Sn1424	5.28	21.40	21.12	-1.31
2017/9/15	1900	MSL	250	D1900V2-5d041	ES3DV3 - SN3071	DAE4 Sn778	5.47	20.60	21.88	6.21
2017/9/16	1900	MSL	250	D1900V2-5d041	ES3DV3 - SN3169	DAE4 Sn1399	5.33	20.60	21.32	3.50
2017/9/29	1900	MSL	250	D1900V2-5d041	EX3DV4 - SN3976	DAE4 Sn1424	5.17	20.60	20.68	0.39
2017/9/17	2450	HSL	250	D2450V2-735	ES3DV3 - SN3169	DAE4 Sn1399	6.17	23.80	24.68	3.70
2017/9/19	2450	HSL	250	D2450V2-735	ES3DV3 - SN3071	DAE4 Sn778	6.00	23.80	24	0.84
2017/9/28	2450	HSL	250	D2450V2-735	EX3DV4 - SN3976	DAE4 Sn1424	5.48	23.80	21.92	-7.90
2017/9/18	2450	MSL	250	D2450V2-735	ES3DV3 - SN3169	DAE4 Sn1399	5.80	23.80	23.2	-2.52
2017/9/19	2450	MSL	250	D2450V2-735	ES3DV3 - SN3071	DAE4 Sn778	5.98	23.80	23.92	0.50
2017/9/29	2450	MSL	250	D2450V2-735	EX3DV4 - SN3976	DAE4 Sn1424	5.91	23.80	23.64	-0.67
2017/9/13	2600	HSL	250	D2600V2-1058	ES3DV3 - SN3169	DAE4 Sn1399	6.46	25.50	25.84	1.33
2017/9/28	2600	HSL	250	D2600V2-1058	EX3DV4 - SN3976	DAE4 Sn1424	6.53	25.50	26.12	2.43
2017/9/14	2600	MSL	250	D2600V2-1058	ES3DV3 - SN3169	DAE4 Sn1399	6.27	24.30	25.08	3.21
2017/9/29	2600	MSL	250	D2600V2-1058	EX3DV4 - SN3976	DAE4 Sn1424	6.62	24.30	26.48	8.97
2017/9/18	5250	HSL	100	D5GHzV2-1171	EX3DV4 - SN3873	DAE4 Sn916	2.17	23.30	21.7	-6.87
2017/9/29	5250	HSL	100	D5GHzV2-1171	EX3DV4 - SN3976	DAE4 Sn1424	2.25	23.30	22.5	-3.43
2017/9/18	5250	MSL	100	D5GHzV2-1171	EX3DV4 - SN3873	DAE4 Sn916	2.03	21.80	20.3	-6.88
2017/9/29	5250	MSL	100	D5GHzV2-1171	EX3DV4 - SN3976	DAE4 Sn1424	2.35	21.80	23.5	7.80
2017/9/18	5600	HSL	100	D5GHzV2-1171	EX3DV4 - SN3873	DAE4 Sn916	2.28	24.40	22.8	-6.56
2017/9/29	5600	HSL	100	D5GHzV2-1171	EX3DV4 - SN3976	DAE4 Sn1424	2.33	24.40	23.3	-4.51
2017/9/18	5600	MSL	100	D5GHzV2-1171	EX3DV4 - SN3873	DAE4 Sn916	2.24	22.80	22.4	-1.75
2017/9/29	5600	MSL	100	D5GHzV2-1171	EX3DV4 - SN3976	DAE4 Sn1424	2.23	22.80	22.3	-2.19
2017/9/29	5750	HSL	100	D5GHzV2-1171	EX3DV4 - SN3976	DAE4 Sn1424	2.27	23.40	22.7	-2.99
2017/9/29	5750	MSL	100	D5GHzV2-1171	EX3DV4 - SN3976	DAE4 Sn1424	2.22	21.90	22.2	1.37
2017/9/18	5800	HSL	100	D5GHzV2-1040	EX3DV4 - SN3873	DAE4 Sn916	2.12	23.20	21.2	-8.62
2017/9/18	5800	MSL	100	D5GHzV2-1040	EX3DV4 - SN3873	DAE4 Sn916	2.04	21.30	20.4	-4.23

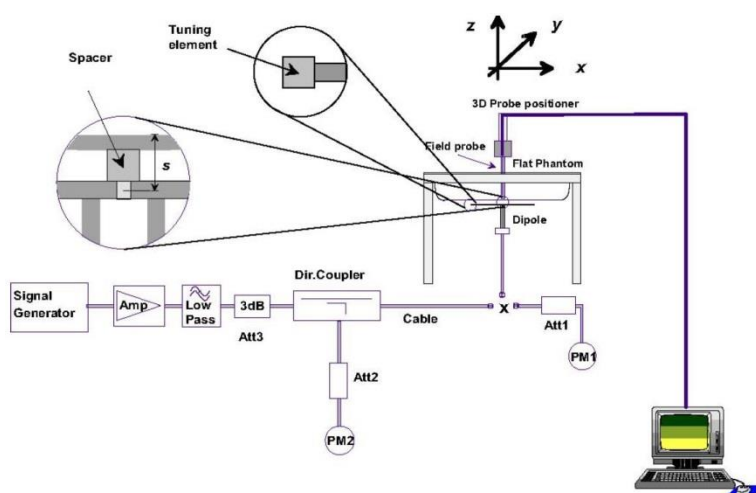


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

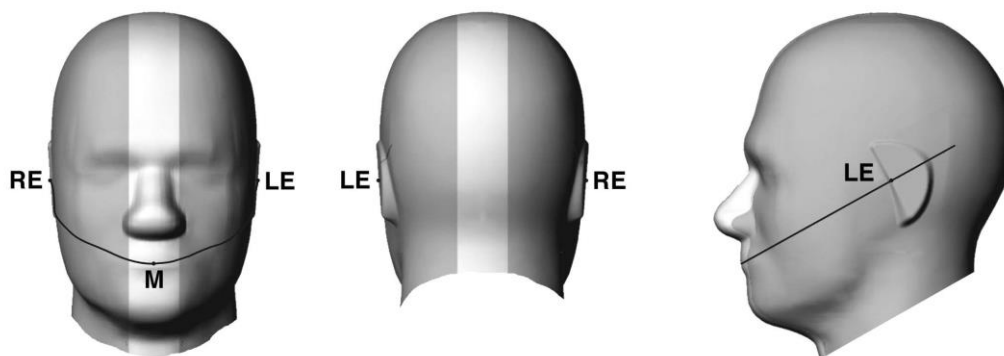


Fig 9.1.1 Front, back, and side views of SAM twin phantom

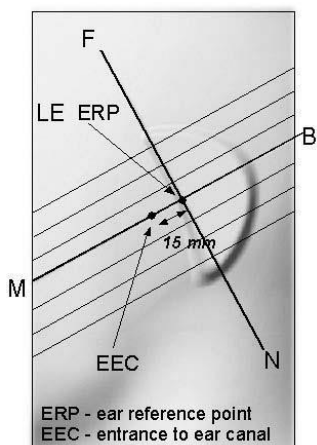


Fig 9.1.2 Close-up side view of phantom showing the ear region.

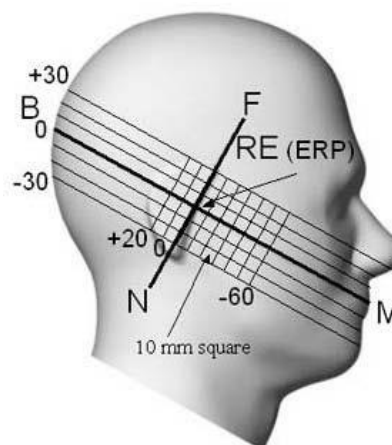


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

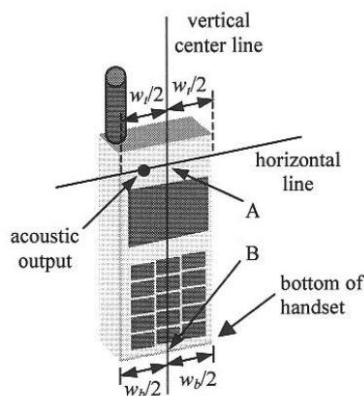


Fig 9.2.1 Handset vertical and horizontal reference lines—"fixed case"

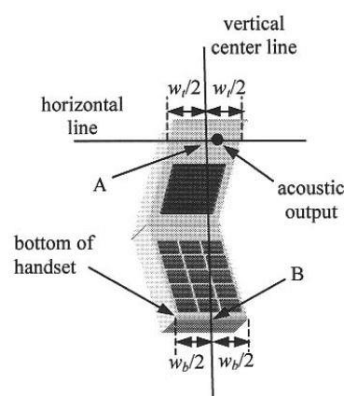


Fig 9.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

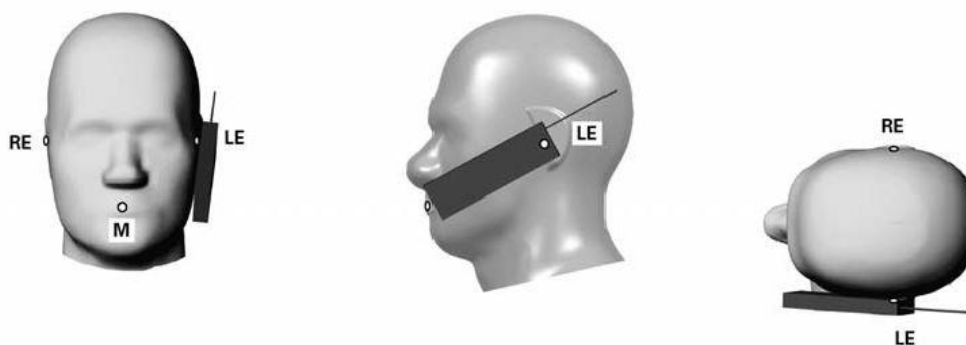


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

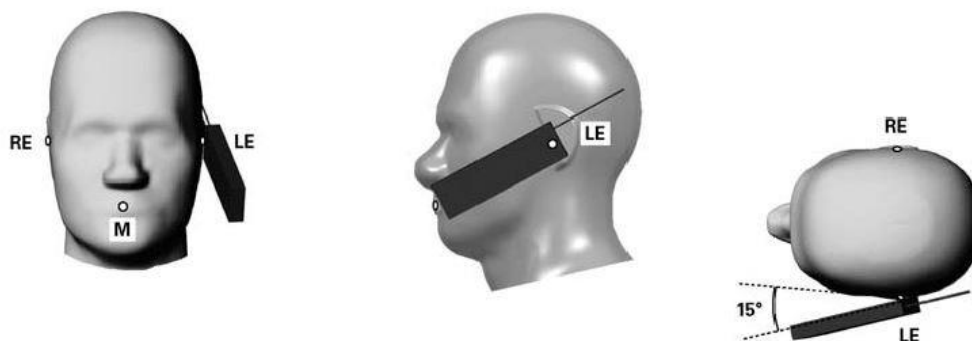


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

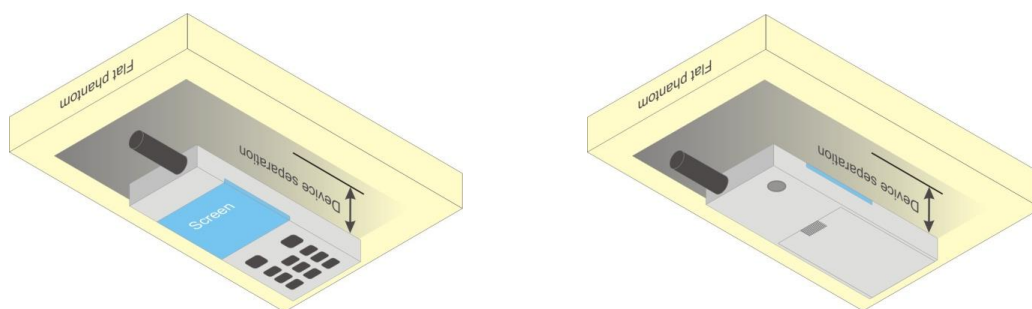


Fig 9.4 Body Worn Position

11.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

12. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

General Note:

- For DTM multi-slot class mode, the device was linked with base station simulator (Agilent E5515C) and transmit maximum power on maximum number of TX slots, i.e. one CS timeslot, and additional PS timeslots (1 for DTM class 5 and 9, 2 for DTM class 11) in one TDMA frame.
- Agilent E5515C was used to setup the device operated under DTM mode for power measurement and SAR testing. For conducted power, the power of the burst for voice and the power of the bursts for data was reported separately in the table above, and the frame-average power is derived below to determine SAR testing.

$$DTM \text{ frame average power (dBm)} = 10 * \log [\sum (\text{power of each slot, in mW}) / 8]$$
- Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
- Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE / DTM modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
- Other configurations of GSM / GPRS / EDGE / DTM are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode
- Power reduction which is triggered by hotspot mode is implemented in GSM1900 band, for hotspot mode SAR testing EUT was set in reduced power mode and GPRS 4 Tx slot due to its highest frame-average power.

<Default Power Mode>

GSM850		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		128	189	251		128	189	251	
Frequency (MHz)		824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot		33.51	33.24	33.28	34.00	24.51	24.24	24.28	25.00
GPRS 1 Tx slot		33.55	33.27	33.28	34.00	24.55	24.27	24.28	25.00
GPRS 2 Tx slots		30.32	30.45	30.50	31.50	24.32	24.45	24.50	25.50
GPRS 3 Tx slots		29.34	29.10	29.11	29.70	25.08	24.84	24.85	25.44
GPRS 4 Tx slots		28.17	27.99	28.01	28.50	25.17	24.99	25.01	25.50
EDGE 1 Tx slot		27.16	27.00	27.00	27.50	18.16	18.00	18.00	18.50
EDGE 2 Tx slots		26.76	26.61	26.97	27.30	20.76	20.61	20.97	21.30
EDGE 3 Tx slots		26.25	26.25	26.24	27.10	21.99	21.99	21.98	22.84
EDGE 4 Tx slots		26.01	25.96	25.99	26.90	23.01	22.96	22.99	23.90
DTM Multi-slot class 5	GSM 1 Tx slot	30.88	31.04	31.06	31.50	24.61	24.77	24.79	25.48
	GPRS 1 Tx slot	30.37	30.53	30.55	31.50				
DTM Multi-slot class 9	GSM 1 Tx slot	30.88	31.01	31.05	31.50	24.61	24.74	24.79	25.48
	GPRS 1 Tx slot	30.37	30.50	30.55	31.50				
DTM Multi-slot class 11	GSM 1 Tx slot	29.37	29.13	29.16	29.70	24.77	24.54	24.57	25.44
	GPRS 2 Tx slots	28.85	28.62	28.65	29.70				
DTM Multi-slot class 5	GSM 1 Tx slot	30.51	30.69	30.71	31.50	22.94	23.04	23.04	23.87
	EDGE 1 Tx slot	26.52	26.44	26.36	27.30				
DTM Multi-slot class 9	GSM 1 Tx slot	30.94	31.12	31.13	31.50	23.20	23.32	23.31	23.87
	EDGE 1 Tx slot	26.33	26.26	26.19	27.30				
DTM Multi-slot class 11	GSM 1 Tx slot	29.07	28.83	28.87	29.70	23.20	23.04	23.01	23.89
	EDGE 2 Tx slots	26.36	26.26	26.18	27.10				

GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		512	661	810		512	661	810	
Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot		30.19	30.01	30.78	31.00	21.19	21.01	21.78	22.00
GPRS 1 Tx slot		30.20	30.00	30.80	31.00	21.20	21.00	21.80	22.00
GPRS 2 Tx slots		27.63	27.29	27.85	28.00	21.63	21.29	21.85	22.00
GPRS 3 Tx slots		26.28	26.15	26.50	26.50	22.02	21.89	22.24	22.24
GPRS 4 Tx slots		24.56	24.37	24.84	25.50	21.56	21.37	21.84	22.50
EDGE 1 Tx slot		25.43	25.24	25.71	26.00	16.43	16.24	16.71	17.00
EDGE 2 Tx slots		25.31	25.08	25.61	26.00	19.31	19.08	19.61	20.00
EDGE 3 Tx slots		25.00	24.72	25.15	25.50	20.74	20.46	20.89	21.24
EDGE 4 Tx slots		24.50	24.35	24.71	25.00	21.50	21.35	21.71	22.00
DTM Multi-slot class 5	GSM 1 Tx slot	27.47	27.23	27.80	28.00	21.18	20.93	21.49	21.98
	GPRS 1 Tx slot	26.92	26.65	27.20	28.00				
DTM Multi-slot class 9	GSM 1 Tx slot	27.50	27.29	27.79	28.00	21.21	20.99	21.48	21.98
	GPRS 1 Tx slot	26.94	26.71	27.18	28.00				
DTM Multi-slot class 11	GSM 1 Tx slot	25.80	25.74	26.08	26.50	21.37	21.30	21.62	22.24
	GPRS 2 Tx slots	25.54	25.46	25.78	26.50				
DTM Multi-slot class 5	GSM 1 Tx slot	26.82	26.81	27.28	28.00	20.12	20.03	20.50	21.09
	EDGE 1 Tx slot	25.33	25.14	25.61	26.00				
DTM Multi-slot class 9	GSM 1 Tx slot	27.51	27.32	27.82	28.00	20.36	20.14	20.63	21.09
	EDGE 1 Tx slot	24.86	24.57	25.04	26.00				
DTM Multi-slot class 11	GSM 1 Tx slot	25.26	25.07	25.59	26.50	20.58	20.39	20.91	21.60
	EDGE 2 Tx slots	24.61	24.43	24.95	25.50				

<Reduced Power Mode>

GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		512	661	810		512	661	810	
Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot		27.31	27.13	27.77	28.00	18.31	18.13	18.77	19.00
GPRS 1 Tx slot		27.50	27.33	27.88	28.00	18.50	18.33	18.88	19.00
GPRS 2 Tx slots		24.19	24.02	24.42	24.50	18.19	18.02	18.42	18.50
GPRS 3 Tx slots		22.55	22.32	22.90	23.00	18.29	18.06	18.64	18.74
GPRS 4 Tx slots		21.49	21.31	21.75	22.00	18.49	18.31	18.75	19.00
EDGE 1 Tx slot		21.03	20.89	21.36	22.50	12.03	11.89	12.36	13.50
EDGE 2 Tx slots		21.47	20.75	21.17	22.50	15.47	14.75	15.17	16.50
EDGE 3 Tx slots		20.52	20.33	20.80	22.00	16.26	16.07	16.54	17.74
EDGE 4 Tx slots		19.91	19.75	20.14	21.50	16.91	16.75	17.14	18.50
DTM Multi-slot class 5	GSM 1 Tx slot	23.81	23.63	24.13	24.50	17.60	17.41	17.90	18.48
	GPRS 1 Tx slot	23.42	23.22	23.71	24.50				
DTM Multi-slot class 9	GSM 1 Tx slot	23.80	23.62	24.13	24.50	17.59	17.40	17.90	18.48
	GPRS 1 Tx slot	23.41	23.22	23.70	24.50				
DTM Multi-slot class 11	GSM 1 Tx slot	22.74	22.47	22.98	23.00	18.24	17.96	18.46	18.74
	GPRS 2 Tx slots	22.38	22.09	22.58	23.00				
DTM Multi-slot class 5	GSM 1 Tx slot	23.27	23.19	23.65	24.50	16.22	16.16	16.62	17.59
	EDGE 1 Tx slot	20.90	20.85	21.32	22.50				
DTM Multi-slot class 9	GSM 1 Tx slot	23.83	23.65	24.14	24.50	16.48	16.34	16.78	17.59
	EDGE 1 Tx slot	20.57	20.51	20.86	22.50				
DTM Multi-slot class 11	GSM 1 Tx slot	22.15	21.93	22.50	23.00	16.74	16.63	17.13	18.10
	EDGE 2 Tx slots	20.29	20.25	20.70	22.00				

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_d/\beta_c = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration


DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Cycle to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12
Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

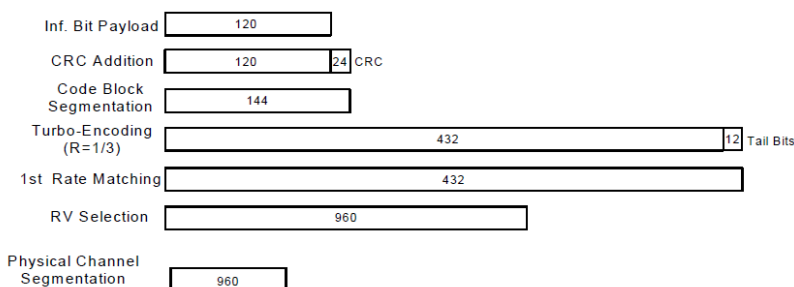
Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)
Setup Configuration

<WCDMA Conducted Power>
General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

<Default Power Mode>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		4132	4182	4233	
Rx Channel		9662	9800	9938		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	23.73	23.64	23.97	24.00	24.83	24.72	24.75	25.00
3GPP Rel 99	RMC 12.2Kbps	23.75	23.65	23.99	24.00	24.85	24.75	24.78	25.00
3GPP Rel 6	HSDPA Subtest-1	22.78	22.69	23.00	23.00	23.80	23.75	23.77	24.00
3GPP Rel 6	HSDPA Subtest-2	22.81	22.72	23.00	23.00	23.83	23.78	23.80	24.00
3GPP Rel 6	HSDPA Subtest-3	22.30	22.21	22.49	22.50	23.39	23.27	22.29	23.50
3GPP Rel 6	HSDPA Subtest-4	22.31	22.20	22.50	22.50	23.38	23.29	23.31	23.50
3GPP Rel 8	DC-HSDPA Subtest-1	22.78	22.59	22.92	23.00	23.69	23.67	23.61	24.00
3GPP Rel 8	DC-HSDPA Subtest-2	22.66	22.71	22.99	23.00	23.67	23.76	23.67	24.00
3GPP Rel 8	DC-HSDPA Subtest-3	22.18	22.17	22.46	22.50	23.21	23.21	22.24	23.50
3GPP Rel 8	DC-HSDPA Subtest-4	22.23	22.14	22.43	22.50	23.27	23.17	23.27	23.50
3GPP Rel 6	HSUPA Subtest-1	22.38	22.26	22.50	22.50	23.50	23.42	23.38	23.50
3GPP Rel 6	HSUPA Subtest-2	20.78	20.65	20.85	21.00	21.90	21.45	21.38	21.50
3GPP Rel 6	HSUPA Subtest-3	20.76	21.66	21.87	22.00	22.49	22.42	22.35	22.50
3GPP Rel 6	HSUPA Subtest-4	20.35	20.28	20.50	20.50	21.50	21.40	21.32	21.50
3GPP Rel 6	HSUPA Subtest-5	22.32	22.28	22.50	22.50	23.49	23.40	23.42	23.50


<Reduced Power Mode>

Band		WCDMA II			Tune-up Limit (dBm)
TX Channel		9262	9400	9538	
Rx Channel		9662	9800	9938	
Frequency (MHz)		1852.4	1880	1907.6	
3GPP Rel 99	AMR 12.2Kbps	18.25	18.12	18.47	19.00
3GPP Rel 99	RMC 12.2Kbps	18.26	18.15	18.50	19.00
3GPP Rel 6	HSDPA Subtest-1	17.29	17.17	17.51	18.00
3GPP Rel 6	HSDPA Subtest-2	17.30	17.18	17.55	18.00
3GPP Rel 6	HSDPA Subtest-3	16.73	16.68	17.05	17.50
3GPP Rel 6	HSDPA Subtest-4	16.70	16.69	17.06	17.50
3GPP Rel 8	DC-HSDPA Subtest-1	17.30	17.17	17.50	18.00
3GPP Rel 8	DC-HSDPA Subtest-2	17.32	17.16	17.51	18.00
3GPP Rel 8	DC-HSDPA Subtest-3	16.70	16.65	17.02	17.50
3GPP Rel 8	DC-HSDPA Subtest-4	16.69	16.62	17.03	17.50
3GPP Rel 6	HSUPA Subtest-1	17.28	17.17	17.51	18.00
3GPP Rel 6	HSUPA Subtest-2	15.30	15.18	15.54	16.00
3GPP Rel 6	HSUPA Subtest-3	16.35	16.22	16.55	17.00
3GPP Rel 6	HSUPA Subtest-4	15.27	15.14	15.52	16.00
3GPP Rel 6	HSUPA Subtest-5	17.29	17.19	17.54	18.00


<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B5 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

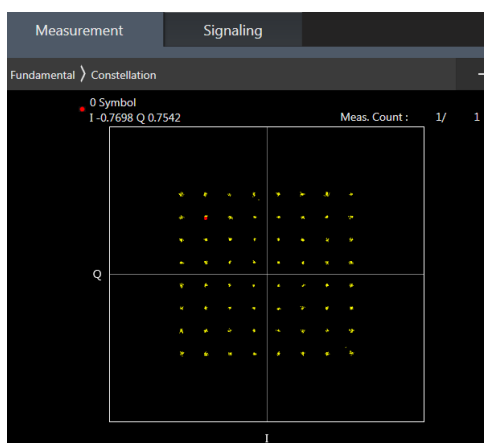

64QAM

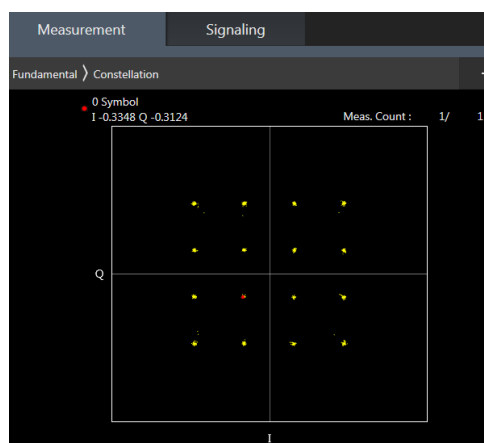

16QAM

Default Power Mode
<LTE Tune-up Limit>

Mode		Average Power (dBm)
LTE	Band 2	24.00
	Band 5	24.50
	Band 7	24.50

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100	24	0
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.16	23.01	23.15	24	0
20	QPSK	1	49	22.97	22.84	23.08		
20	QPSK	1	99	22.79	22.86	23.10		
20	QPSK	50	0	22.17	21.95	22.13	23	1
20	QPSK	50	24	22.13	21.89	22.14		
20	QPSK	50	50	22.11	21.99	22.15		
20	QPSK	100	0	22.16	21.91	22.18	23	1
20	16QAM	1	0	22.42	22.35	22.39		
20	16QAM	1	49	22.33	22.14	22.37		
20	16QAM	1	99	22.19	22.13	22.33	22	2
20	16QAM	50	0	21.23	20.98	21.12		
20	16QAM	50	24	21.14	20.90	21.17		
20	16QAM	50	50	21.06	20.94	21.22	22	2
20	16QAM	100	0	21.15	20.89	21.17		
20	64QAM	1	0	21.54	21.41	21.59	22	2
20	64QAM	1	49	21.38	21.28	21.53		
20	64QAM	1	99	21.26	21.30	21.56		
20	64QAM	50	0	20.30	20.13	20.35	21	3
20	64QAM	50	24	20.27	20.08	20.36		
20	64QAM	50	50	20.17	20.13	20.42		
20	64QAM	100	0	20.23	20.06	20.38	21	3
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5	24	0
15	QPSK	1	0	23.01	22.91	23.00		
15	QPSK	1	37	22.82	22.72	22.92	23	1
15	QPSK	1	74	22.83	22.77	22.97		
15	QPSK	36	0	22.02	21.85	22.09		
15	QPSK	36	20	21.97	21.78	22.08	23	1
15	QPSK	36	39	21.89	21.87	22.10		
15	QPSK	75	0	21.97	21.79	22.05		
15	16QAM	1	0	22.23	22.25	22.30	23	1
15	16QAM	1	37	22.12	22.08	22.29		
15	16QAM	1	74	22.16	22.09	22.25		
15	16QAM	36	0	21.00	20.83	21.10	22	2
15	16QAM	36	20	20.94	20.81	21.03		
15	16QAM	36	39	20.85	20.84	21.09		
15	16QAM	75	0	20.95	20.79	21.02	22	2
15	64QAM	1	0	21.33	21.36	21.36		
15	64QAM	1	37	21.13	21.11	21.38		
15	64QAM	1	74	21.22	21.14	21.32	21	3
15	64QAM	36	0	20.08	19.94	20.19		
15	64QAM	36	20	19.95	19.82	20.06		
15	64QAM	36	39	19.92	19.86	20.18	21	3
15	64QAM	75	0	19.99	19.81	20.09		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	23.09	22.85	23.06	24	0
10	QPSK	1	25	22.97	22.72	23.07		
10	QPSK	1	49	22.90	22.81	23.06		
10	QPSK	25	0	22.10	21.81	22.03	23	1
10	QPSK	25	12	22.07	21.76	22.13		
10	QPSK	25	25	22.00	21.74	22.09		
10	QPSK	50	0	22.06	21.80	22.14	23	1
10	16QAM	1	0	22.22	22.15	22.31		
10	16QAM	1	25	22.18	22.07	22.33		
10	16QAM	1	49	22.17	22.07	22.20	22	2
10	16QAM	25	0	21.06	20.75	21.03		
10	16QAM	25	12	21.06	20.77	21.12		
10	16QAM	25	25	20.98	20.73	21.08	22	2
10	16QAM	50	0	21.06	20.78	21.12		
10	64QAM	1	0	21.33	21.19	21.35		
10	64QAM	1	25	21.22	21.14	21.41	22	2
10	64QAM	1	49	21.19	21.17	21.30		
10	64QAM	25	0	20.12	19.76	20.12		
10	64QAM	25	12	20.15	19.80	20.19	21	3
10	64QAM	25	25	20.00	19.76	20.13		
10	64QAM	50	0	20.15	19.88	20.18		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	23.03	22.78	23.08	24	0
5	QPSK	1	12	23.00	22.71	23.03		
5	QPSK	1	24	23.00	22.71	23.05		
5	QPSK	12	0	22.04	21.75	22.07	23	1
5	QPSK	12	7	22.03	21.76	22.08		
5	QPSK	12	13	22.02	21.74	22.06		
5	QPSK	25	0	22.04	21.76	22.10	23	1
5	16QAM	1	0	22.20	22.14	22.39		
5	16QAM	1	12	22.16	22.03	22.28		
5	16QAM	1	24	22.13	22.03	22.20	22	2
5	16QAM	12	0	21.03	20.76	21.12		
5	16QAM	12	7	21.03	20.79	21.12		
5	16QAM	12	13	21.00	20.76	21.05	22	2
5	16QAM	25	0	21.01	20.75	21.07		
5	64QAM	1	0	21.29	21.15	21.49		
5	64QAM	1	12	21.25	21.14	21.31	22	2
5	64QAM	1	24	21.16	21.06	21.29		
5	64QAM	12	0	20.11	19.86	20.17		
5	64QAM	12	7	20.08	19.83	20.22	21	3
5	64QAM	12	13	20.10	19.79	20.11		
5	64QAM	25	0	20.11	19.76	20.10		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.86	22.73	23.03	24	0
3	QPSK	1	8	22.82	22.71	23.02		
3	QPSK	1	14	22.80	22.67	23.01		
3	QPSK	8	0	21.91	21.74	22.06	23	1
3	QPSK	8	4	21.96	21.75	22.08		
3	QPSK	8	7	21.90	21.71	22.04		
3	QPSK	15	0	22.00	21.75	22.06		
3	16QAM	1	0	22.01	22.05	22.26	23	1
3	16QAM	1	8	22.02	22.06	22.23		
3	16QAM	1	14	21.98	22.00	22.14		
3	16QAM	8	0	20.96	20.80	21.12	22	2
3	16QAM	8	4	20.96	20.82	21.15		
3	16QAM	8	7	20.93	20.76	21.07		
3	16QAM	15	0	20.91	20.73	21.10		
3	64QAM	1	0	21.05	21.06	21.32	22	2
3	64QAM	1	8	21.10	21.13	21.30		
3	64QAM	1	14	21.00	21.11	21.19		
3	64QAM	8	0	19.97	19.82	20.22	21	3
3	64QAM	8	4	20.05	19.87	20.22		
3	64QAM	8	7	19.96	19.86	20.11		
3	64QAM	15	0	19.93	19.81	20.19		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.80	22.67	22.92	24	0
1.4	QPSK	1	3	22.83	22.71	22.94		
1.4	QPSK	1	5	22.79	22.65	22.91		
1.4	QPSK	3	0	22.85	22.69	22.99		
1.4	QPSK	3	1	22.88	22.75	23.03		
1.4	QPSK	3	3	22.85	22.70	22.98		
1.4	QPSK	6	0	21.85	21.65	21.98	23	1
1.4	16QAM	1	0	22.00	22.00	22.15	23	1
1.4	16QAM	1	3	22.09	22.05	22.18		
1.4	16QAM	1	5	22.07	21.95	22.12		
1.4	16QAM	3	0	21.91	21.73	21.98		
1.4	16QAM	3	1	22.00	21.78	22.02		
1.4	16QAM	3	3	21.91	21.71	21.97		
1.4	16QAM	6	0	21.04	20.75	21.06	22	2
1.4	64QAM	1	0	21.05	21.06	21.16	22	2
1.4	64QAM	1	3	21.18	21.14	21.28		
1.4	64QAM	1	5	21.13	21.00	21.22		
1.4	64QAM	3	0	20.97	20.78	21.05		
1.4	64QAM	3	1	21.05	20.85	21.13		
1.4	64QAM	3	3	20.92	20.79	21.03		
1.4	64QAM	6	0	20.05	19.76	20.09	21	3

<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.33	23.35	23.46	24.5	0
10	QPSK	1	25	23.27	23.30	23.37		
10	QPSK	1	49	23.31	23.21	23.32		
10	QPSK	25	0	22.40	22.40	22.43	23.5	1
10	QPSK	25	12	22.39	22.40	22.40		
10	QPSK	25	25	22.39	22.33	22.37		
10	QPSK	50	0	22.35	22.37	22.39	23.5	1
10	16QAM	1	0	22.61	22.65	22.66		
10	16QAM	1	25	22.54	22.56	22.58		
10	16QAM	1	49	22.61	22.44	22.43	22.5	2
10	16QAM	25	0	21.34	21.36	21.40		
10	16QAM	25	12	21.37	21.37	21.39		
10	16QAM	25	25	21.37	21.29	21.33	22.5	2
10	16QAM	50	0	21.34	21.35	21.38		
10	64QAM	1	0	21.61	21.67	21.61		
10	64QAM	1	25	21.59	21.62	21.56	22.5	2
10	64QAM	1	49	21.63	21.54	21.44		
10	64QAM	25	0	20.48	20.50	20.45	21.5	3
10	64QAM	25	12	20.48	20.50	20.45		
10	64QAM	25	25	20.50	20.44	20.39		
10	64QAM	50	0	20.47	20.48	20.44		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.20	23.21	23.27	24.5	0
5	QPSK	1	12	23.17	23.17	23.24		
5	QPSK	1	24	23.20	23.17	23.19		
5	QPSK	12	0	22.26	22.26	22.26	23.5	1
5	QPSK	12	7	22.28	22.26	22.28		
5	QPSK	12	13	22.22	22.23	22.25		
5	QPSK	25	0	22.25	22.23	22.27	23.5	1
5	16QAM	1	0	22.50	22.53	22.48		
5	16QAM	1	12	22.49	22.49	22.46		
5	16QAM	1	24	22.49	22.43	22.36	22.5	2
5	16QAM	12	0	21.25	21.27	21.26		
5	16QAM	12	7	21.28	21.27	21.28		
5	16QAM	12	13	21.24	21.22	21.24	22.5	2
5	16QAM	25	0	21.23	21.21	21.23		
5	64QAM	1	0	21.61	21.55	21.52		
5	64QAM	1	12	21.53	21.60	21.49	22.5	2
5	64QAM	1	24	21.55	21.54	21.38		
5	64QAM	12	0	20.28	20.35	20.36		
5	64QAM	12	7	20.32	20.32	20.30	21.5	3
5	64QAM	12	13	20.35	20.24	20.28		
5	64QAM	25	0	20.27	20.22	20.34		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.21	23.20	23.21	24.5	0
3	QPSK	1	8	23.24	23.21	23.23		
3	QPSK	1	14	23.19	23.15	23.26		
3	QPSK	8	0	22.26	22.25	22.28	23.5	1
3	QPSK	8	4	22.29	22.27	22.27		
3	QPSK	8	7	22.25	22.25	22.25		
3	QPSK	15	0	22.27	22.25	22.22		
3	16QAM	1	0	22.50	22.49	22.42	23.5	1
3	16QAM	1	8	22.50	22.51	22.40		
3	16QAM	1	14	22.48	22.43	22.32		
3	16QAM	8	0	21.32	21.32	21.31	22.5	2
3	16QAM	8	4	21.34	21.29	21.31		
3	16QAM	8	7	21.29	21.26	21.29		
3	16QAM	15	0	21.27	21.26	21.27		
3	64QAM	1	0	21.57	21.57	21.46	22.5	2
3	64QAM	1	8	21.61	21.61	21.46		
3	64QAM	1	14	21.50	21.51	21.36		
3	64QAM	8	0	20.42	20.36	20.38	21.5	3
3	64QAM	8	4	20.40	20.39	20.37		
3	64QAM	8	7	20.39	20.29	20.40		
3	64QAM	15	0	20.38	20.29	20.31		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.07	23.11	23.13	24.5	0
1.4	QPSK	1	3	23.17	23.15	23.15		
1.4	QPSK	1	5	23.09	23.09	23.09		
1.4	QPSK	3	0	23.17	23.17	23.17		
1.4	QPSK	3	1	23.22	23.23	23.24		
1.4	QPSK	3	3	23.20	23.18	23.19		
1.4	QPSK	6	0	22.18	22.16	22.17	23.5	1
1.4	16QAM	1	0	22.40	22.41	22.30	23.5	1
1.4	16QAM	1	3	22.45	22.46	22.35		
1.4	16QAM	1	5	22.42	22.38	22.24		
1.4	16QAM	3	0	22.19	22.18	22.17		
1.4	16QAM	3	1	22.23	22.21	22.20		
1.4	16QAM	3	3	22.17	22.14	22.16		
1.4	16QAM	6	0	21.25	21.23	21.20	22.5	2
1.4	64QAM	1	0	21.47	21.52	21.39	22.5	2
1.4	64QAM	1	3	21.46	21.55	21.43		
1.4	64QAM	1	5	21.46	21.39	21.26		
1.4	64QAM	3	0	21.27	21.29	21.25		
1.4	64QAM	3	1	21.24	21.22	21.24		
1.4	64QAM	3	3	21.27	21.23	21.23		
1.4	64QAM	6	0	20.35	20.32	20.25	21.5	3

<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.93	23.03	23.23	24.5	0
20	QPSK	1	49	23.21	23.36	23.55		
20	QPSK	1	99	23.18	23.35	23.52		
20	QPSK	50	0	22.06	22.27	22.40	23.5	1
20	QPSK	50	24	22.24	22.40	22.57		
20	QPSK	50	50	22.25	22.41	22.59		
20	QPSK	100	0	22.21	22.33	22.52		
20	16QAM	1	0	22.23	22.33	22.55	23.5	1
20	16QAM	1	49	22.49	22.62	22.81		
20	16QAM	1	99	22.45	22.70	22.76		
20	16QAM	50	0	21.07	21.31	21.40	22.5	2
20	16QAM	50	24	21.26	21.39	21.57		
20	16QAM	50	50	21.23	21.37	21.59		
20	16QAM	100	0	21.18	21.32	21.52		
20	64QAM	1	0	21.23	21.35	21.54	22.5	2
20	64QAM	1	49	21.48	21.65	21.82		
20	64QAM	1	99	21.47	21.73	21.79		
20	64QAM	50	0	20.16	20.36	20.49	21.5	3
20	64QAM	50	24	20.33	20.44	20.64		
20	64QAM	50	50	20.32	20.46	20.67		
20	64QAM	100	0	20.31	20.42	20.60		
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.91	23.10	23.21	24.5	0
15	QPSK	1	37	23.00	23.22	23.38		
15	QPSK	1	74	23.08	23.23	23.37		
15	QPSK	36	0	21.99	22.20	22.40	23.5	1
15	QPSK	36	20	22.04	22.27	22.50		
15	QPSK	36	39	22.13	22.27	22.49		
15	QPSK	75	0	22.02	22.22	22.45	23.5	1
15	16QAM	1	0	22.21	22.40	22.50		
15	16QAM	1	37	22.33	22.55	22.71		
15	16QAM	1	74	22.37	22.51	22.67	22.5	2
15	16QAM	36	0	20.99	21.19	21.39		
15	16QAM	36	20	21.06	21.27	21.49		
15	16QAM	36	39	21.14	21.23	21.46	22.5	2
15	16QAM	75	0	21.00	21.23	21.44		
15	64QAM	1	0	21.25	21.44	21.58		
15	64QAM	1	37	21.34	21.61	21.74	21.5	3
15	64QAM	1	74	21.41	21.53	21.74		
15	64QAM	36	0	20.10	20.23	20.41		
15	64QAM	36	20	20.10	20.32	20.56		
15	64QAM	36	39	20.23	20.32	20.53		
15	64QAM	75	0	20.10	20.27	20.55		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.98	23.14	23.38	24.5	0
10	QPSK	1	25	23.06	23.24	23.43		
10	QPSK	1	49	23.11	23.23	23.44		
10	QPSK	25	0	22.02	22.22	22.46	23.5	1
10	QPSK	25	12	22.04	22.30	22.52		
10	QPSK	25	25	22.06	22.30	22.49		
10	QPSK	50	0	22.06	22.27	22.46		
10	16QAM	1	0	22.24	22.46	22.63	23.5	1
10	16QAM	1	25	22.32	22.51	22.70		
10	16QAM	1	49	22.39	22.52	22.67		
10	16QAM	25	0	20.99	21.20	21.42	22.5	2
10	16QAM	25	12	21.05	21.27	21.48		
10	16QAM	25	25	21.04	21.24	21.46		
10	16QAM	50	0	21.04	21.23	21.45		
10	64QAM	1	0	21.31	21.50	21.69	22.5	2
10	64QAM	1	25	21.35	21.62	21.75		
10	64QAM	1	49	21.47	21.63	21.68		
10	64QAM	25	0	20.07	20.27	20.51	21.5	3
10	64QAM	25	12	20.16	20.35	20.57		
10	64QAM	25	25	20.15	20.32	20.52		
10	64QAM	50	0	20.07	20.31	20.50		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	23.02	23.17	23.40	24.5	0
5	QPSK	1	12	23.03	23.23	23.43		
5	QPSK	1	24	23.03	23.22	23.46		
5	QPSK	12	0	22.06	22.24	22.43	23.5	1
5	QPSK	12	7	22.08	22.32	22.49		
5	QPSK	12	13	22.08	22.26	22.47		
5	QPSK	25	0	22.06	22.27	22.47		
5	16QAM	1	0	22.29	22.48	22.66	23.5	1
5	16QAM	1	12	22.33	22.57	22.70		
5	16QAM	1	24	22.32	22.55	22.69		
5	16QAM	12	0	21.05	21.22	21.45	22.5	2
5	16QAM	12	7	21.10	21.30	21.50		
5	16QAM	12	13	21.10	21.30	21.47		
5	16QAM	25	0	21.05	21.24	21.46		
5	64QAM	1	0	21.33	21.52	21.68	22.5	2
5	64QAM	1	12	21.37	21.63	21.77		
5	64QAM	1	24	21.34	21.66	21.74		
5	64QAM	12	0	20.09	20.24	20.50	21.5	3
5	64QAM	12	7	20.12	20.37	20.52		
5	64QAM	12	13	20.20	20.36	20.51		
5	64QAM	25	0	20.13	20.33	20.52		



Reduced Power Mode

Mode		Average Power (dBm)
LTE	Band 2	19.00

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	18.10	17.85	17.97		
20	QPSK	1	49	17.80	17.58	17.82	19	0
20	QPSK	1	99	17.61	17.58	17.85	19	0
20	QPSK	50	0	18.05	17.95	18.00		
20	QPSK	50	24	17.94	17.69	17.95		
20	QPSK	50	50	17.83	17.71	17.95	19	0
20	QPSK	100	0	18.02	17.71	17.91		
20	16QAM	1	0	17.95	17.93	17.95		
20	16QAM	1	49	17.96	17.88	17.92	19	0
20	16QAM	1	99	17.95	17.88	17.95	19	0
20	16QAM	50	0	17.97	17.75	17.88		
20	16QAM	50	24	17.94	17.68	17.92		
20	16QAM	50	50	17.84	17.70	17.98	19	0
20	16QAM	100	0	17.89	17.64	17.92		
20	64QAM	1	0	18.02	18.05	18.00		
20	64QAM	1	49	18.01	17.91	17.98	19	0
20	64QAM	1	99	17.88	17.93	17.92	19	0
20	64QAM	50	0	17.95	17.86	18.04		
20	64QAM	50	24	17.93	17.84	18.09		
20	64QAM	50	50	17.97	17.82	17.92	19	0
20	64QAM	100	0	17.96	17.83	18.00		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	17.99	17.74	17.86		
15	QPSK	1	37	17.80	17.58	17.82	19	0
15	QPSK	1	74	17.79	17.67	17.89	19	0
15	QPSK	36	0	17.95	17.70	17.93		
15	QPSK	36	20	17.92	17.65	17.94		
15	QPSK	36	39	17.86	17.72	17.95	19	0
15	QPSK	75	0	17.94	17.68	17.93		
15	16QAM	1	0	17.95	17.96	17.95		
15	16QAM	1	37	17.92	17.90	17.96	19	0
15	16QAM	1	74	17.98	17.92	17.95	19	0
15	16QAM	36	0	17.90	17.71	17.95		
15	16QAM	36	20	17.87	17.67	17.88		
15	16QAM	36	39	17.73	17.73	17.97	19	0
15	16QAM	75	0	17.83	17.66	17.86		
15	64QAM	1	0	17.90	17.89	17.87		
15	64QAM	1	37	17.89	17.87	17.91	19	0
15	64QAM	1	74	17.93	17.84	17.93	19	0
15	64QAM	36	0	17.83	17.66	17.88		
15	64QAM	36	20	17.86	17.64	17.87		
15	64QAM	36	39	17.68	17.63	17.90	19	0
15	64QAM	75	0	17.76	17.65	17.86		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	17.92	17.66	17.90	19	0
10	QPSK	1	25	17.73	17.58	17.90		
10	QPSK	1	49	17.68	17.62	17.87		
10	QPSK	25	0	17.88	17.67	17.92	19	0
10	QPSK	25	12	17.79	17.63	17.97		
10	QPSK	25	25	17.76	17.62	17.96		
10	QPSK	50	0	17.80	17.66	17.97	19	0
10	16QAM	1	0	17.95	17.96	17.95		
10	16QAM	1	25	17.98	17.90	17.95		
10	16QAM	1	49	17.96	17.93	17.93	19	0
10	16QAM	25	0	17.81	17.65	17.88		
10	16QAM	25	12	17.81	17.66	17.99		
10	16QAM	25	25	17.75	17.60	17.92	19	0
10	16QAM	50	0	17.79	17.65	17.98		
10	64QAM	1	0	17.86	17.88	17.85		
10	64QAM	1	25	17.96	17.89	17.95	19	0
10	64QAM	1	49	17.86	17.83	17.92		
10	64QAM	25	0	17.72	17.60	17.83		
10	64QAM	25	12	17.81	17.58	17.93	19	0
10	64QAM	25	25	17.68	17.57	17.88		
10	64QAM	50	0	17.78	17.55	17.91		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	17.82	17.62	17.95	19	0
5	QPSK	1	12	17.77	17.54	17.87		
5	QPSK	1	24	17.73	17.55	17.90		
5	QPSK	12	0	17.82	17.64	17.94	19	0
5	QPSK	12	7	17.82	17.64	17.97		
5	QPSK	12	13	17.75	17.60	17.93		
5	QPSK	25	0	17.79	17.60	17.94	19	0
5	16QAM	1	0	17.95	17.99	17.95		
5	16QAM	1	12	17.95	17.91	17.95		
5	16QAM	1	24	17.99	17.91	17.96	19	0
5	16QAM	12	0	17.80	17.64	17.94		
5	16QAM	12	7	17.83	17.68	17.99		
5	16QAM	12	13	17.78	17.61	17.94	19	0
5	16QAM	25	0	17.78	17.63	17.92		
5	64QAM	1	0	17.87	17.96	17.94		
5	64QAM	1	12	17.93	17.88	17.92	19	0
5	64QAM	1	24	17.90	17.82	17.91		
5	64QAM	12	0	17.74	17.55	17.88		
5	64QAM	12	7	17.77	17.61	17.93	19	0
5	64QAM	12	13	17.73	17.56	17.92		
5	64QAM	25	0	17.74	17.57	17.89		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	17.74	17.58	17.89	19	0
3	QPSK	1	8	17.75	17.56	17.88		
3	QPSK	1	14	17.74	17.55	17.88		
3	QPSK	8	0	17.82	17.60	17.93	19	0
3	QPSK	8	4	17.83	17.61	17.93		
3	QPSK	8	7	17.77	17.60	17.89		
3	QPSK	15	0	17.78	17.60	17.92		
3	16QAM	1	0	17.95	17.94	17.95	19	0
3	16QAM	1	8	17.95	17.91	17.91		
3	16QAM	1	14	17.96	17.89	17.93		
3	16QAM	8	0	17.85	17.67	17.98	19	0
3	16QAM	8	4	17.87	17.68	17.95		
3	16QAM	8	7	17.81	17.65	17.96		
3	16QAM	15	0	17.82	17.63	17.93		
3	64QAM	1	0	17.86	17.87	17.95	19	0
3	64QAM	1	8	17.86	17.88	17.87		
3	64QAM	1	14	17.95	17.85	17.92		
3	64QAM	8	0	17.83	17.58	17.91	19	0
3	64QAM	8	4	17.82	17.65	17.94		
3	64QAM	8	7	17.75	17.56	17.90		
3	64QAM	15	0	17.77	17.63	17.88		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	17.65	17.51	17.81	19	0
1.4	QPSK	1	3	17.73	17.59	17.89		
1.4	QPSK	1	5	17.65	17.50	17.79		
1.4	QPSK	3	0	17.74	17.56	17.87		
1.4	QPSK	3	1	17.77	17.59	17.89		
1.4	QPSK	3	3	17.71	17.56	17.87		
1.4	QPSK	6	0	17.73	17.55	17.83	19	0
1.4	16QAM	1	0	17.92	17.85	17.90	19	0
1.4	16QAM	1	3	17.85	17.92	17.95		
1.4	16QAM	1	5	17.92	17.84	17.85		
1.4	16QAM	3	0	17.71	17.59	17.90		
1.4	16QAM	3	1	17.77	17.64	17.95		
1.4	16QAM	3	3	17.69	17.56	17.87		
1.4	16QAM	6	0	17.79	17.62	17.93	19	0
1.4	64QAM	1	0	17.83	17.80	17.88	19	0
1.4	64QAM	1	3	17.75	17.83	17.94		
1.4	64QAM	1	5	17.91	17.78	17.76		
1.4	64QAM	3	0	17.64	17.57	17.86		
1.4	64QAM	3	1	17.71	17.62	17.91		
1.4	64QAM	3	3	17.62	17.46	17.78		
1.4	64QAM	6	0	17.71	17.56	17.88	19	0

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

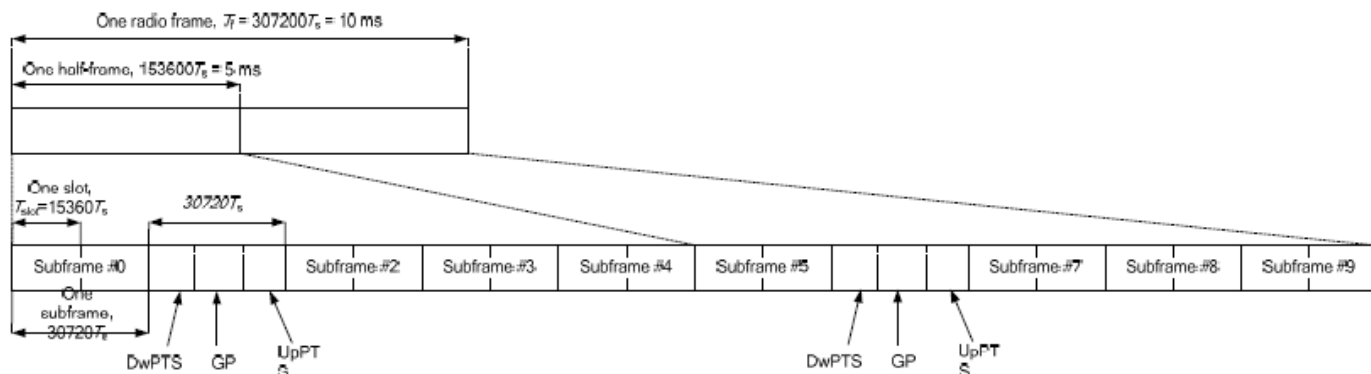


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.



<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Low Ch. / Freq.	Power Middle High Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				40340	40600	40870	41140		
Frequency (MHz)				2565	2591	2618	2645		
20	QPSK	1	0	23.29	23.21	23.27	23.37	24	0
20	QPSK	1	49	23.50	23.47	23.58	23.70		
20	QPSK	1	99	23.44	23.46	23.56	23.67		
20	QPSK	50	0	22.42	22.43	22.49	22.70	23	1
20	QPSK	50	24	22.52	22.47	22.57	22.69		
20	QPSK	50	50	22.52	22.61	22.59	22.72		
20	QPSK	100	0	22.38	22.43	22.51	22.65		
20	16QAM	1	0	22.41	22.61	22.59	22.79	23	1
20	16QAM	1	49	22.57	22.72	22.88	22.94		
20	16QAM	1	99	22.77	22.73	22.97	22.97		
20	16QAM	50	0	21.29	21.42	21.51	21.58	22	2
20	16QAM	50	24	21.39	21.51	21.66	21.75		
20	16QAM	50	50	21.49	21.60	21.66	21.71		
20	16QAM	100	0	21.36	21.43	21.61	21.74		
20	64QAM	1	0	21.47	21.43	21.47	21.57	22	2
20	64QAM	1	49	21.66	21.66	21.72	21.79		
20	64QAM	1	99	21.74	21.63	21.74	21.85		
20	64QAM	50	0	20.46	20.54	20.62	20.70	21	3
20	64QAM	50	24	20.54	20.54	20.68	20.77		
20	64QAM	50	50	20.58	20.68	20.76	20.74		
20	64QAM	100	0	20.47	20.50	20.62	20.72		
Channel				40315	40595	40885	41165		
Frequency (MHz)				2562.5	2590.5	2619.5	2647.5		
15	QPSK	1	0	23.21	23.20	23.25	23.33	24	0
15	QPSK	1	37	23.40	23.43	23.52	23.66		
15	QPSK	1	74	23.41	23.42	23.51	23.61		
15	QPSK	36	0	22.37	22.41	22.44	22.69	23	1
15	QPSK	36	20	22.48	22.43	22.54	22.69		
15	QPSK	36	39	22.50	22.58	22.50	22.69		
15	QPSK	75	0	22.31	22.40	22.41	22.63		
15	16QAM	1	0	22.32	22.52	22.59	22.74	23	1
15	16QAM	1	37	22.56	22.63	22.78	22.87		
15	16QAM	1	74	22.74	22.70	22.96	22.97		
15	16QAM	36	0	21.20	21.38	21.48	21.49	22	2
15	16QAM	36	20	21.39	21.43	21.64	21.71		
15	16QAM	36	39	21.47	21.56	21.56	21.64		
15	16QAM	75	0	21.29	21.36	21.60	21.64		
15	64QAM	1	0	21.37	21.49	21.55	21.73	22	2
15	64QAM	1	37	21.60	21.58	21.83	21.85		
15	64QAM	1	74	21.73	21.71	21.94	22.00		
15	64QAM	36	0	20.24	20.41	20.51	20.51	21	3
15	64QAM	36	20	20.34	20.39	20.68	20.76		
15	64QAM	36	39	20.49	20.56	20.54	20.62		
15	64QAM	75	0	20.27	20.38	20.63	20.64		



FCC SAR Test Report

Report No. : FA760710-01

Channel				40290	40590	40890	41190	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2560	2590	2620	2650		
10	QPSK	1	0	23.19	23.15	23.17	23.34	24	0
10	QPSK	1	25	23.45	23.37	23.48	23.61		
10	QPSK	1	49	23.44	23.41	23.56	23.67		
10	QPSK	25	0	22.38	22.33	22.44	22.64	23	1
10	QPSK	25	12	22.50	22.39	22.57	22.67		
10	QPSK	25	25	22.42	22.55	22.55	22.72		
10	QPSK	50	0	22.38	22.39	22.48	22.58	23	1
10	16QAM	1	0	22.32	22.51	22.59	22.71		
10	16QAM	1	25	22.53	22.70	22.85	22.91		
10	16QAM	1	49	22.74	22.72	22.94	22.92	22	2
10	16QAM	25	0	21.19	21.39	21.49	21.52		
10	16QAM	25	12	21.35	21.42	21.57	21.73		
10	16QAM	25	25	21.46	21.56	21.60	21.70	22	2
10	16QAM	50	0	21.33	21.36	21.57	21.66		
10	64QAM	1	0	21.37	21.46	21.62	21.68		
10	64QAM	1	25	21.49	21.68	21.90	21.96	22	2
10	64QAM	1	49	21.71	21.77	21.90	21.94		
10	64QAM	25	0	20.21	20.41	20.51	20.57		
10	64QAM	25	12	20.31	20.42	20.59	20.76	21	3
10	64QAM	25	25	20.42	20.61	20.55	20.74		
10	64QAM	50	0	20.33	20.39	20.60	20.63		
Channel				40265	40585	40905	41215	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2557.5	2589.5	2621.5	2652.5		
5	QPSK	1	0	23.21	23.18	23.17	23.32	24	0
5	QPSK	1	12	23.48	23.42	23.49	23.62		
5	QPSK	1	24	23.42	23.44	23.56	23.62		
5	QPSK	12	0	22.38	22.37	22.43	22.64	23	1
5	QPSK	12	7	22.45	22.44	22.55	22.67		
5	QPSK	12	13	22.52	22.52	22.50	22.68		
5	QPSK	25	0	22.31	22.43	22.44	22.55	23	1
5	16QAM	1	0	22.37	22.55	22.49	22.73		
5	16QAM	1	12	22.55	22.70	22.78	22.92		
5	16QAM	1	24	22.76	22.72	22.96	22.88	22	2
5	16QAM	12	0	21.24	21.41	21.45	21.53		
5	16QAM	12	7	21.29	21.48	21.58	21.69		
5	16QAM	12	13	21.46	21.60	21.62	21.63	22	2
5	16QAM	25	0	21.29	21.37	21.61	21.66		
5	64QAM	1	0	21.42	21.53	21.44	21.69		
5	64QAM	1	12	21.56	21.73	21.82	21.91	22	2
5	64QAM	1	24	21.72	21.68	21.94	21.85		
5	64QAM	12	0	20.21	20.36	20.44	20.52		
5	64QAM	12	7	20.24	20.50	20.53	20.70	21	3
5	64QAM	12	13	20.51	20.57	20.65	20.58		
5	64QAM	25	0	20.33	20.40	20.58	20.67		

<LTE Carrier Aggregation>

General Note:

- This device supports Carrier Aggregation on downlink only for Intra band and Inter-Band, Uplink CA is not supported. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.

<Intra-Band combinations>

E-UTRA CA configuration	E-UTRA CA configuration / Bandwidth combination set			
	Component carriers in order of increasing carrier frequency		Maximum aggregated bandwidth [MHz]	Bandwidth combination set
	Channel bandwidths for carrier [MHz]	Channel bandwidths for carrier [MHz]		
CA_7B	15	5	20	0
CA_7C	15	15	40	0
	20	20		
	10	20	40	1
	15	15, 20		
	20	10, 15, 20		
	15	10, 15	40	2
	20	15, 20		
CA_7A-7A	5	15	40	0
	10	10, 15		
	15	15, 20		
	20	20		
	5, 10, 15, 20	5, 10, 15, 20	40	1
	5, 10, 15, 20	5, 10	30	2
	10, 15, 20	10, 15, 20	40	3
CA_41C	10	20	40	0
	15	15, 20		
	20	10, 15, 20		
	5, 10	20	40	1
	15	15, 20		
	20	5, 10, 15, 20		
	10	15, 20		
	15	10, 15, 20	40	2
	20	10, 15, 20		
	10	20		
	20	20	40	3

<Inter-Band combinations>

E-UTRA CA configuration / Bandwidth combination set									
E-UTRA CA Configuration	E- UTRA Bands	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	Maximum aggregated bandwidth [MHz]	Bandwidth combination set
CA_5A-7A	5	Yes	Yes	Yes	Yes			30	0
	7				Yes	Yes	Yes		
	5			Yes	Yes			30	1
	7				Yes	Yes	Yes		

LTE Carrier Aggregation Conducted Power

General Note:

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink carrier aggregation only. Uplink carrier aggregation is not supported. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous Intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band. For SCC DL RB size and offset will base on the PCC corresponding RB allocation.
- vi. For Inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band.
- vii. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1 |BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

Configure		PCC						SCC				Power		
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band		5	10	844	20600	QPSK	1	0	7	20	2655	3100	23.44	23.46
		7	20	2560	21350	QPSK	1	49	5	10	881.5	2525	23.52	23.55
Intra-Band	Non-Contiguous	7	20	2560	21350	QPSK	1	49	7	5	2622.5	2775	23.55	23.55
	Contiguous	7	5	2567.5	21425	QPSK	1	24	7	15	2678.20	3332	23.44	23.46
		7	20	2560	21350	QPSK	1	49	7	20	2660.20	3152	23.53	23.55
		41	20	2645	41140	QPSK	1	49	41	20	3916.00	2625.2	23.69	23.70


<WLAN Conducted Power>
General Note:

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.¹⁸ The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	15.98	16.00	98.54
		6	2437	15.81	16.00	
		11	2462	15.92	16.00	
	802.11g 6Mbps	1	2412	13.81	14.00	92.95
		6	2437	13.64	14.00	
		11	2462	13.99	14.00	
	802.11n-HT20 MCS0	1	2412	13.98	14.00	92.65
		6	2437	13.99	14.00	
		11	2462	13.93	14.00	
	802.11ac-VHT20 MCS0	1	2412	13.96	14.00	92.49
		6	2437	13.93	14.00	
		11	2462	13.91	14.00	

<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	16.99	17.00	93.55
		40	5200	16.64	17.00	
		44	5220	16.74	17.00	
		48	5240	16.55	17.00	
	802.11n-HT20 MCS0	36	5180	13.90	14.00	93.60
		40	5200	13.77	14.00	
		44	5220	13.69	14.00	
		48	5240	13.61	14.00	
	802.11n-HT40 MCS0	38	5190	12.96	13.00	88.00
		46	5230	12.91	13.00	
	802.11ac-VHT20 MCS0	36	5180	13.92	14.00	93.17
		40	5200	12.60	14.00	
		44	5220	13.99	14.00	
		48	5240	13.98	14.00	
	802.11ac-VHT40 MCS0	38	5190	12.97	13.00	87.85
		46	5230	12.92	13.00	
	802.11ac-VHT80 MCS0	42	5210	11.77	12.00	87.65

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	16.51	17.00	93.55
		56	5280	16.58	17.00	
		60	5300	16.74	17.00	
		64	5320	16.94	17.00	
	802.11n-HT20 MCS0	52	5260	13.65	14.00	93.60
		56	5280	13.75	14.00	
		60	5300	13.74	14.00	
		64	5320	13.64	14.00	
	802.11n-HT40 MCS0	54	5270	12.87	13.00	88.00
		62	5310	12.66	13.00	
	802.11ac-VHT20 MCS0	52	5260	13.97	14.00	93.17
		56	5280	12.64	14.00	
		60	5300	13.76	14.00	
		64	5320	13.66	14.00	
	802.11ac-VHT40 MCS0	54	5270	12.94	13.00	87.85
		62	5310	12.96	13.00	
	802.11ac-VHT80 MCS0	58	5290	11.74	12.00	87.65

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	16.84	17.00	93.55
		116	5580	16.55	17.00	
		124	5620	16.52	17.00	
		132	5660	16.54	17.00	
		144	5720	16.60	17.00	
	802.11n-HT20 MCS0	100	5500	13.68	14.00	93.60
		116	5580	13.58	14.00	
		124	5620	13.56	14.00	
		132	5660	13.55	14.00	
		144	5720	13.51	14.00	
	802.11n-HT40 MCS0	102	5510	12.64	13.00	88.00
		110	5550	12.61	13.00	
		126	5630	12.68	13.00	
		134	5670	12.61	13.00	
		142	5710	12.66	13.00	
	802.11ac-VHT20 MCS0	100	5500	13.70	14.00	93.17
		116	5580	13.87	14.00	
		124	5620	12.65	14.00	
		132	5660	12.63	14.00	
		144	5720	13.99	14.00	
	802.11ac-VHT40 MCS0	102	5510	12.69	13.00	87.85
		110	5550	12.64	13.00	
		126	5630	12.60	13.00	
		134	5670	12.66	13.00	
		142	5710	12.68	13.00	
	802.11ac-VHT80 MCS0	106	5530	11.79	12.00	87.65
		122	5610	11.58	12.00	
		138	5690	11.56	12.00	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	149	5745	16.69	17.00	93.55
		157	5785	16.80	17.00	
		165	5825	16.82	17.00	
	802.11n-HT20 MCS0	149	5745	13.80	14.00	93.60
		157	5785	13.82	14.00	
		165	5825	13.50	14.00	
	802.11n-HT40 MCS0	151	5755	12.75	13.00	88.00
		159	5795	12.56	13.00	
	802.11ac-VHT20 MCS0	149	5745	13.82	14.00	93.17
		157	5785	14.00	14.00	
		165	5825	13.53	14.00	
	802.11ac-VHT40 MCS0	151	5755	12.77	13.00	87.85
		159	5795	12.58	13.00	
	802.11ac-VHT80 MCS0	155	5775	11.82	12.00	87.65


<2.4GHz Bluetooth>

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	9.69	6.57	6.50
	CH 39	2441	8.94	5.85	5.79
	CH 78	2480	9.16	6.14	6.03
Tune-up Limit			10.50	7.00	7.00

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	0.83	0.68
	CH 19	2440	0.68	0.61
	CH 39	2480	1.16	1.08
Tune-up Limit			1.50	1.50

General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps (BR), due to its highest average power.
- The Bluetooth duty cycle is 77.13 % as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation

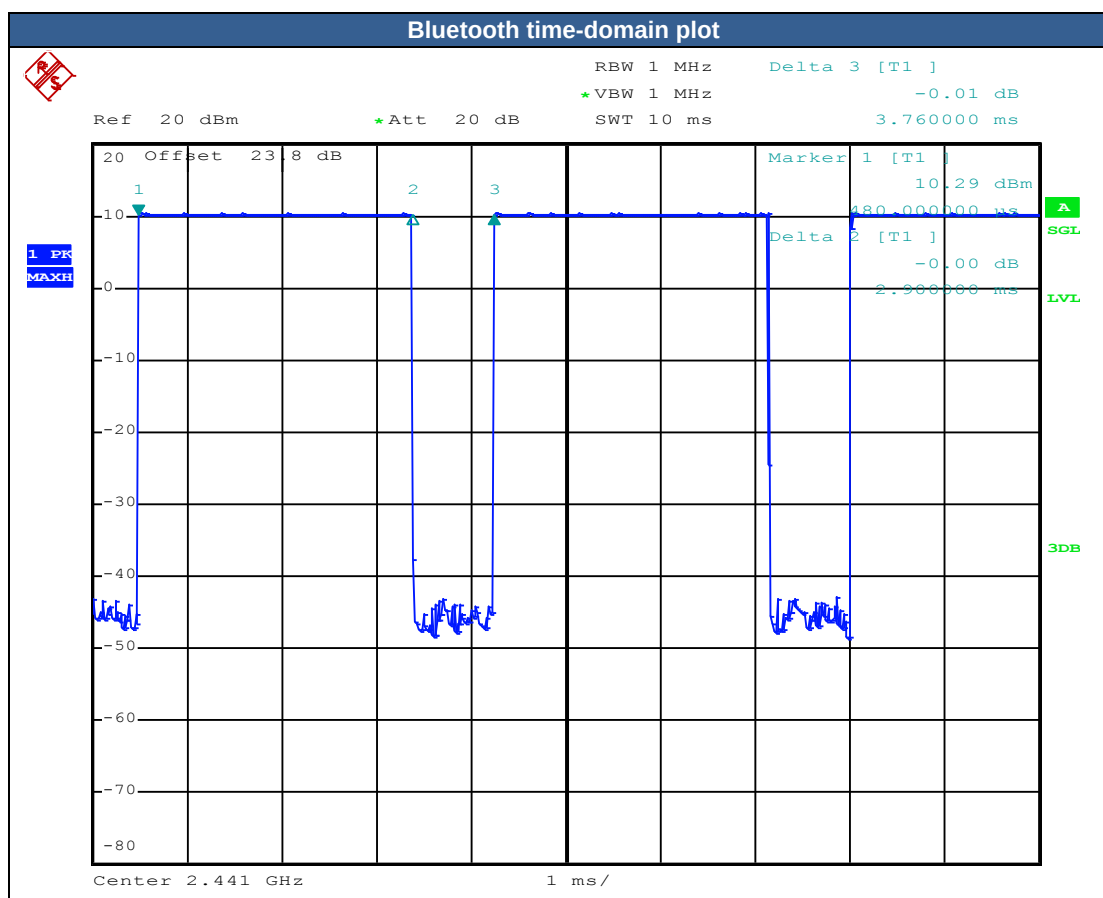

13. RF Exposure Conditions

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN	Yes	Yes	Yes	No	Yes	No

General Note:

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge
- The detail antenna location please refers to Appendix D.

14. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result.
The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900, WCDMA B2 and LTE B2.
5. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
6. In this report, the 10g SAR results which is submitted voluntarily.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE / DTM modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE / DTM are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.
3. Power reduction which is triggered by hotspot mode is implemented in GSM1900 band, for hotspot mode SAR testing EUT was set in reduced power mode and GPRS 4 Tx slots due to its highest frame-average power.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq 1/4$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $1/4$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B5 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



14.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Right Cheek	0mm	Sample 1	128	824.2	28.17	28.50	1.079	0.02	0.260	0.281	0.207	0.223
	GSM850	GPRS (4 Tx slots)	Right Tilted	0mm	Sample 1	128	824.2	28.17	28.50	1.079	0.13	0.133	0.143	0.107	0.115
01	GSM850	GPRS (4 Tx slots)	Left Cheek	0mm	Sample 1	128	824.2	28.17	28.50	1.079	0.04	0.266	0.287	0.208	0.224
	GSM850	GPRS (4 Tx slots)	Left Cheek	0mm	Sample 2	128	824.2	28.17	28.50	1.079	0.16	0.247	0.266	0.185	0.200
	GSM850	GPRS (4 Tx slots)	Left Tilted	0mm	Sample 1	128	824.2	28.17	28.50	1.079	0.02	0.118	0.127	0.094	0.101
	GSM1900	GPRS (4 Tx slots)	Right Cheek	0mm	Sample 1	810	1909.8	24.84	25.50	1.164	0.09	0.131	0.153	0.086	0.100
	GSM1900	GPRS (4 Tx slots)	Right Tilted	0mm	Sample 1	810	1909.8	24.84	25.50	1.164	0.17	0.054	0.063	0.035	0.041
02	GSM1900	GPRS (4 Tx slots)	Left Cheek	0mm	Sample 1	810	1909.8	24.84	25.50	1.164	-0.01	0.256	0.298	0.171	0.199
	GSM1900	GPRS (4 Tx slots)	Left Cheek	0mm	Sample 2	810	1909.8	24.84	25.50	1.164	-0.08	0.230	0.268	0.141	0.164
	GSM1900	GPRS (4 Tx slots)	Left Tilted	0mm	Sample 1	810	1909.8	24.84	25.50	1.164	0.13	0.057	0.066	0.038	0.044

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	Sample 1	9538	1907.6	23.99	24.00	1.002	-0.1	0.335	0.336	0.222	0.223
	WCDMA II	RMC 12.2Kbps	Right Tilted	0mm	Sample 1	9538	1907.6	23.99	24.00	1.002	0.1	0.166	0.166	0.110	0.110
03	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	Sample 1	9538	1907.6	23.99	24.00	1.002	0.12	0.593	0.594	0.399	0.400
	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	Sample 2	9538	1907.6	23.99	24.00	1.002	0.03	0.562	0.563	0.364	0.365
	WCDMA II	RMC 12.2Kbps	Left Tilted	0mm	Sample 1	9538	1907.6	23.99	24.00	1.002	0.08	0.127	0.127	0.085	0.085
	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	Sample 1	4132	826.4	24.85	25.00	1.035	0	0.371	0.384	0.291	0.301
	WCDMA V	RMC 12.2Kbps	Right Tilted	0mm	Sample 1	4132	826.4	24.85	25.00	1.035	0.03	0.199	0.206	0.161	0.167
04	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	Sample 1	4132	826.4	24.85	25.00	1.035	-0.12	0.403	0.417	0.315	0.326
	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	Sample 2	4132	826.4	24.85	25.00	1.035	-0.05	0.379	0.392	0.292	0.302
	WCDMA V	RMC 12.2Kbps	Left Tilted	0mm	Sample 1	4132	826.4	24.85	25.00	1.035	-0.01	0.187	0.194	0.152	0.157



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Right Cheek	0mm	Sample 1	18700	1860	23.16	24.00	1.213	0.04	0.326	0.396	0.220	0.267
	LTE Band 2	20M	QPSK	50	0	Right Cheek	0mm	Sample 1	18700	1860	22.17	23.00	1.211	-0.06	0.263	0.318	0.176	0.213
	LTE Band 2	20M	QPSK	1	0	Right Tilted	0mm	Sample 1	18700	1860	23.16	24.00	1.213	0.11	0.200	0.243	0.133	0.161
	LTE Band 2	20M	QPSK	50	0	Right Tilted	0mm	Sample 1	18700	1860	22.17	23.00	1.211	-0.07	0.163	0.197	0.108	0.131
05	LTE Band 2	20M	QPSK	1	0	Left Cheek	0mm	Sample 1	18700	1860	23.16	24.00	1.213	0.02	0.575	0.698	0.384	0.466
	LTE Band 2	20M	QPSK	1	0	Left Cheek	0mm	Sample 2	18700	1860	23.16	24.00	1.213	0.14	0.552	0.670	0.361	0.438
	LTE Band 2	20M	QPSK	50	0	Left Cheek	0mm	Sample 1	18700	1860	22.17	23.00	1.211	0.06	0.459	0.556	0.306	0.370
	LTE Band 2	20M	QPSK	1	0	Left Tilted	0mm	Sample 1	18700	1860	23.16	24.00	1.213	0.01	0.161	0.195	0.110	0.133
	LTE Band 2	20M	QPSK	50	0	Left Tilted	0mm	Sample 1	18700	1860	22.17	23.00	1.211	0.03	0.127	0.154	0.086	0.104
	LTE Band 5	10M	QPSK	1	0	Right Cheek	0mm	Sample 1	20525	836.5	23.35	24.50	1.303	-0.03	0.278	0.362	0.218	0.284
	LTE Band 5	10M	QPSK	25	0	Right Cheek	0mm	Sample 1	20525	836.5	22.40	23.50	1.288	-0.02	0.226	0.291	0.177	0.228
	LTE Band 5	10M	QPSK	1	0	Right Tilted	0mm	Sample 1	20525	836.5	23.35	24.50	1.303	0.06	0.136	0.177	0.110	0.143
	LTE Band 5	10M	QPSK	25	0	Right Tilted	0mm	Sample 1	20525	836.5	22.40	23.50	1.288	0.01	0.112	0.144	0.090	0.116
06	LTE Band 5	10M	QPSK	1	0	Left Cheek	0mm	Sample 1	20525	836.5	23.35	24.50	1.303	-0.08	0.293	0.382	0.231	0.301
	LTE Band 5	10M	QPSK	1	0	Left Cheek	0mm	Sample 2	20525	836.5	23.35	24.50	1.303	-0.06	0.276	0.360	0.216	0.281
	LTE Band 5	10M	QPSK	25	0	Left Cheek	0mm	Sample 1	20525	836.5	22.40	23.50	1.288	0.01	0.241	0.310	0.190	0.245
	LTE Band 5	10M	QPSK	1	0	Left Tilted	0mm	Sample 1	20525	836.5	23.35	24.50	1.303	-0.02	0.141	0.184	0.113	0.147
	LTE Band 5	10M	QPSK	25	0	Left Tilted	0mm	Sample 1	20525	836.5	22.40	23.50	1.288	-0.04	0.115	0.148	0.093	0.120
07	LTE Band 7	20M	QPSK	1	49	Right Cheek	0mm	Sample 1	21350	2560	23.55	24.50	1.245	0.11	0.346	0.431	0.178	0.222
	LTE Band 7	20M	QPSK	1	49	Right Cheek	0mm	Sample 2	21350	2560	23.55	24.50	1.245	0.1	0.341	0.424	0.167	0.208
	LTE Band 7	20M	QPSK	50	50	Right Cheek	0mm	Sample 1	21350	2560	22.59	23.50	1.233	0.16	0.269	0.332	0.139	0.171
	LTE Band 7	20M	QPSK	1	49	Right Tilted	0mm	Sample 1	21350	2560	23.55	24.50	1.245	0.01	0.055	0.068	0.032	0.040
	LTE Band 7	20M	QPSK	50	50	Right Tilted	0mm	Sample 1	21350	2560	22.59	23.50	1.233	0.1	0.044	0.054	0.025	0.031
	LTE Band 7	20M	QPSK	1	49	Left Cheek	0mm	Sample 1	21350	2560	23.55	24.50	1.245	0.16	0.112	0.139	0.065	0.081
	LTE Band 7	20M	QPSK	50	50	Left Cheek	0mm	Sample 1	21350	2560	22.59	23.50	1.233	-0.1	0.086	0.106	0.049	0.060
	LTE Band 7	20M	QPSK	1	49	Left Tilted	0mm	Sample 1	21350	2560	23.55	24.50	1.245	0.18	0.084	0.105	0.045	0.056
	LTE Band 7	20M	QPSK	50	50	Left Tilted	0mm	Sample 1	21350	2560	22.59	23.50	1.233	0.07	0.065	0.080	0.035	0.043

**<TDD LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
08	LTE Band 41	20M	QPSK	1	49	Right Cheek	0mm	Sample 1	41140	2645	23.70	24.00	1.072	62.9	1.006	0.11	0.103	0.111	0.054	0.058
	LTE Band 41	20M	QPSK	1	49	Right Cheek	0mm	Sample 2	41140	2645	23.70	24.00	1.072	62.9	1.006	-0.18	0.083	0.089	0.038	0.041
	LTE Band 41	20M	QPSK	50	50	Right Cheek	0mm	Sample 1	41140	2645	22.72	23.00	1.067	62.9	1.006	0.15	0.081	0.087	0.042	0.045
	LTE Band 41	20M	QPSK	1	49	Right Tilted	0mm	Sample 1	41140	2645	23.70	24.00	1.072	62.9	1.006	0.17	0.022	0.024	0.011	0.012
	LTE Band 41	20M	QPSK	50	50	Right Tilted	0mm	Sample 1	41140	2645	22.72	23.00	1.067	62.9	1.006	0.11	0.016	0.017	0.007	0.008
	LTE Band 41	20M	QPSK	1	49	Left Cheek	0mm	Sample 1	41140	2645	23.70	24.00	1.072	62.9	1.006	0.02	0.042	0.045	0.024	0.026
	LTE Band 41	20M	QPSK	50	50	Left Cheek	0mm	Sample 1	41140	2645	22.72	23.00	1.067	62.9	1.006	0.02	0.033	0.035	0.019	0.020
	LTE Band 41	20M	QPSK	1	49	Left Tilted	0mm	Sample 1	41140	2645	23.70	24.00	1.072	62.9	1.006	0.1	0.018	0.019	0.009	0.009
	LTE Band 41	20M	QPSK	50	50	Left Tilted	0mm	Sample 1	41140	2645	22.72	23.00	1.067	62.9	1.006	0.08	0.013	0.014	0.006	0.006

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Sample 1	1	2412	15.98	16.00	1.004	98.54	1.015	-0.05	0.215	0.219	0.096	0.098
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Sample 1	1	2412	15.98	16.00	1.004	98.54	1.015	0.02	0.181	0.184	0.081	0.083
09	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Sample 1	1	2412	15.98	16.00	1.004	98.54	1.015	0.11	0.749	0.763	0.367	0.374
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Sample 2	1	2412	15.98	16.00	1.004	98.54	1.015	0.05	0.729	0.743	0.327	0.333
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Sample 1	1	2412	15.98	16.00	1.004	98.54	1.015	0.16	0.660	0.672	0.291	0.296
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	Sample 1	64	5320	16.94	17.00	1.014	93.55	1.069	0.13	0.077	0.083	0.024	0.026
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	Sample 1	64	5320	16.94	17.00	1.014	93.55	1.069	-0.17	0.064	0.069	0.017	0.018
10	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	Sample 1	64	5320	16.94	17.00	1.014	93.55	1.069	0.04	0.377	0.409	0.117	0.127
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	Sample 2	64	5320	16.94	17.00	1.014	93.55	1.069	0.13	0.338	0.366	0.091	0.099
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	Sample 1	64	5320	16.94	17.00	1.014	93.55	1.069	-0.05	0.236	0.256	0.071	0.077
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	Sample 1	100	5500	16.84	17.00	1.038	93.55	1.069	0.02	0.084	0.093	0.026	0.029
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	Sample 1	100	5500	16.84	17.00	1.038	93.55	1.069	-0.03	0.073	0.081	0.021	0.023
11	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	Sample 1	100	5500	16.84	17.00	1.038	93.55	1.069	-0.05	0.464	0.515	0.143	0.159
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	Sample 2	100	5500	16.84	17.00	1.038	93.55	1.069	-0.07	0.414	0.459	0.123	0.136
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	Sample 1	100	5500	16.84	17.00	1.038	93.55	1.069	-0.13	0.309	0.343	0.090	0.100
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	Sample 1	165	5825	16.82	17.00	1.042	93.55	1.069	-0.03	0.172	0.192	0.058	0.065
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	Sample 1	165	5825	16.82	17.00	1.042	93.55	1.069	0.12	0.126	0.140	0.045	0.050
12	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	Sample 1	165	5825	16.82	17.00	1.042	93.55	1.069	-0.04	0.379	0.422	0.128	0.143
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	Sample 2	165	5825	16.82	17.00	1.042	93.55	1.069	-0.11	0.314	0.350	0.104	0.116
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	Sample 1	165	5825	16.82	17.00	1.042	93.55	1.069	0.19	0.247	0.275	0.083	0.092

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	0mm	Sample 1	0	2402	9.69	10.50	1.205	77.13	1.080	0.19	0.052	0.068	0.026	0.034
	Bluetooth	1Mbps	Right Tilted	0mm	Sample 1	0	2402	9.69	10.50	1.205	77.13	1.080	0.12	0.039	0.051	0.019	0.025
13	Bluetooth	1Mbps	Left Cheek	0mm	Sample 1	0	2402	9.69	10.50	1.205	77.13	1.080	0.12	0.145	0.189	0.065	0.085
	Bluetooth	1Mbps	Left Cheek	0mm	Sample 2	0	2402	9.69	10.50	1.205	77.13	1.080	0.01	0.135	0.176	0.058	0.075
	Bluetooth	1Mbps	Left Tilted	0mm	Sample 1	0	2402	9.69	10.50	1.205	77.13	1.080	-0.02	0.106	0.138	0.045	0.059



14.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Sample	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	10mm	Sample 1	OFF	128	824.2	28.17	28.50	1.079	-0.09	0.310	0.334	0.246	0.265
	GSM850	GPRS (4 Tx slots)	Back	10mm	Sample 1	OFF	128	824.2	28.17	28.50	1.079	0.11	0.332	0.358	0.258	0.278
	GSM850	GPRS (4 Tx slots)	Left Side	10mm	Sample 1	OFF	128	824.2	28.17	28.50	1.079	0.03	0.302	0.326	0.209	0.225
14	GSM850	GPRS (4 Tx slots)	Right Side	10mm	Sample 1	OFF	128	824.2	28.17	28.50	1.079	0.07	0.397	0.428	0.275	0.297
	GSM850	GPRS (4 Tx slots)	Right Side	10mm	Sample 2	OFF	128	824.2	28.17	28.50	1.079	0.13	0.361	0.389	0.245	0.264
	GSM850	GPRS (4 Tx slots)	Bottom Side	10mm	Sample 1	OFF	128	824.2	28.17	28.50	1.079	0.18	0.030	0.032	0.017	0.018
	GSM1900	GPRS (4 Tx slots)	Front	10mm	Sample 1	ON	810	1909.8	21.75	22.00	1.059	0.15	0.339	0.359	0.185	0.196
	GSM1900	GPRS (4 Tx slots)	Back	10mm	Sample 1	ON	810	1909.8	21.75	22.00	1.059	0.11	0.333	0.353	0.185	0.196
	GSM1900	GPRS (4 Tx slots)	Left Side	10mm	Sample 1	ON	810	1909.8	21.75	22.00	1.059	0.05	0.142	0.150	0.085	0.090
	GSM1900	GPRS (4 Tx slots)	Right Side	10mm	Sample 1	ON	810	1909.8	21.75	22.00	1.059	0.15	0.012	0.013	0.007	0.008
15	GSM1900	GPRS (4 Tx slots)	Bottom Side	10mm	Sample 1	ON	810	1909.8	21.75	22.00	1.059	-0.17	0.482	0.511	0.262	0.278
	GSM1900	GPRS (4 Tx slots)	Bottom Side	10mm	Sample 2	ON	810	1909.8	21.75	22.00	1.059	-0.03	0.456	0.483	0.246	0.261

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Sample	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	10mm	Sample 1	ON	9538	1907.6	18.50	19.00	1.122	0.11	0.463	0.519	0.252	0.283
	WCDMA II	RMC 12.2Kbps	Back	10mm	Sample 1	ON	9538	1907.6	18.50	19.00	1.122	-0.1	0.476	0.534	0.265	0.297
	WCDMA II	RMC 12.2Kbps	Left Side	10mm	Sample 1	ON	9538	1907.6	18.50	19.00	1.122	-0.06	0.203	0.228	0.119	0.134
	WCDMA II	RMC 12.2Kbps	Right Side	10mm	Sample 1	ON	9538	1907.6	18.50	19.00	1.122	-0.18	0.017	0.019	0.010	0.011
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	Sample 1	ON	9538	1907.6	18.50	19.00	1.122	0.08	0.923	1.036	0.499	0.560
16	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	Sample 1	ON	9262	1852.4	18.26	19.00	1.186	0.08	0.925	1.097	0.501	0.594
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	Sample 2	ON	9262	1852.4	18.26	19.00	1.186	0.08	0.821	0.974	0.448	0.531
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	Sample 1	ON	9400	1880	18.15	19.00	1.216	0.06	0.897	1.091	0.485	0.590
	WCDMA V	RMC 12.2Kbps	Front	10mm	Sample 1	OFF	4132	826.4	24.85	25.00	1.035	-0.11	0.446	0.462	0.350	0.362
	WCDMA V	RMC 12.2Kbps	Back	10mm	Sample 1	OFF	4132	826.4	24.85	25.00	1.035	-0.01	0.492	0.509	0.358	0.371
17	WCDMA V	RMC 12.2Kbps	Left Side	10mm	Sample 1	OFF	4132	826.4	24.85	25.00	1.035	-0.07	0.522	0.540	0.362	0.375
	WCDMA V	RMC 12.2Kbps	Left Side	10mm	Sample 2	OFF	4132	836.5	24.85	25.00	1.035	0.16	0.506	0.524	0.347	0.359
	WCDMA V	RMC 12.2Kbps	Right Side	10mm	Sample 1	OFF	4132	826.4	24.85	25.00	1.035	0.01	0.458	0.474	0.317	0.328
	WCDMA V	RMC 12.2Kbps	Bottom Side	10mm	Sample 1	OFF	4132	826.4	24.85	25.00	1.035	0.16	0.045	0.047	0.026	0.027



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Sample	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	10mm	Sample 1	ON	18700	1860	18.10	19.00	1.230	-0.06	0.425	0.523	0.234	0.288
	LTE Band 2	20M	QPSK	50	0	Front	10mm	Sample 1	ON	18700	1860	18.05	19.00	1.245	-0.03	0.418	0.520	0.230	0.286
	LTE Band 2	20M	QPSK	1	0	Back	10mm	Sample 1	ON	18700	1860	18.10	19.00	1.230	0	0.417	0.513	0.237	0.292
	LTE Band 2	20M	QPSK	50	0	Back	10mm	Sample 1	ON	18700	1860	18.05	19.00	1.245	-0.04	0.407	0.507	0.232	0.289
	LTE Band 2	20M	QPSK	1	0	Left Side	10mm	Sample 1	ON	18700	1860	18.10	19.00	1.230	0.02	0.190	0.234	0.114	0.140
	LTE Band 2	20M	QPSK	50	0	Left Side	10mm	Sample 1	ON	18700	1860	18.05	19.00	1.245	-0.01	0.190	0.236	0.114	0.142
	LTE Band 2	20M	QPSK	1	0	Right Side	10mm	Sample 1	ON	18700	1860	18.10	19.00	1.230	-0.12	0.017	0.021	0.012	0.015
	LTE Band 2	20M	QPSK	50	0	Right Side	10mm	Sample 1	ON	18700	1860	18.05	19.00	1.245	0.07	0.017	0.021	0.012	0.015
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	Sample 1	ON	18700	1860	18.10	19.00	1.230	0.1	0.895	1.101	0.486	0.598
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	Sample 1	ON	18900	1880	17.85	19.00	1.303	0.06	0.844	1.100	0.459	0.598
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	Sample 1	ON	19100	1900	17.97	19.00	1.268	0.02	0.846	1.072	0.459	0.582
18	LTE Band 2	20M	QPSK	50	0	Bottom Side	10mm	Sample 1	ON	18700	1860	18.05	19.00	1.245	0.07	0.896	1.115	0.486	0.605
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10mm	Sample 2	ON	18700	1860	18.05	19.00	1.245	0.02	0.851	1.059	0.437	0.544
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10mm	Sample 1	ON	18900	1880	17.95	19.00	1.274	0.03	0.837	1.066	0.454	0.578
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10mm	Sample 1	ON	19100	1900	18.00	19.00	1.259	-0.03	0.834	1.050	0.452	0.569
	LTE Band 2	20M	QPSK	100	0	Bottom Side	10mm	Sample 1	ON	18700	1860	18.02	19.00	1.253	0.04	0.875	1.096	0.475	0.595
	LTE Band 5	10M	QPSK	1	0	Front	10mm	Sample 1	OFF	20525	836.5	23.35	24.50	1.303	0.01	0.395	0.515	0.307	0.400
	LTE Band 5	10M	QPSK	25	0	Front	10mm	Sample 1	OFF	20525	836.5	22.40	23.50	1.288	0.07	0.329	0.424	0.257	0.331
	LTE Band 5	10M	QPSK	1	0	Back	10mm	Sample 1	OFF	20525	836.5	23.35	24.50	1.303	0.01	0.420	0.547	0.329	0.429
	LTE Band 5	10M	QPSK	25	0	Back	10mm	Sample 1	OFF	20525	836.5	22.40	23.50	1.288	-0.01	0.407	0.524	0.319	0.411
	LTE Band 5	10M	QPSK	1	0	Left Side	10mm	Sample 1	OFF	20525	836.5	23.35	24.50	1.303	0.01	0.396	0.516	0.275	0.358
	LTE Band 5	10M	QPSK	25	0	Left Side	10mm	Sample 1	OFF	20525	836.5	22.40	23.50	1.288	0.01	0.327	0.421	0.225	0.290
19	LTE Band 5	10M	QPSK	1	0	Right Side	10mm	Sample 1	OFF	20525	836.5	23.35	24.50	1.303	0.02	0.425	0.554	0.334	0.435
	LTE Band 5	10M	QPSK	1	0	Right Side	10mm	Sample 2	OFF	20525	836.5	23.35	24.50	1.303	-0.05	0.416	0.542	0.326	0.425
	LTE Band 5	10M	QPSK	25	0	Right Side	10mm	Sample 1	OFF	20525	836.5	22.40	23.50	1.288	-0.02	0.348	0.448	0.268	0.345
	LTE Band 5	10M	QPSK	1	0	Bottom Side	10mm	Sample 1	OFF	20525	836.5	23.35	24.50	1.303	0.07	0.028	0.036	0.016	0.021
	LTE Band 5	10M	QPSK	25	0	Bottom Side	10mm	Sample 1	OFF	20525	836.5	22.40	23.50	1.288	0.08	0.022	0.028	0.013	0.017
	LTE Band 7	20M	QPSK	1	49	Front	10mm	Sample 1	OFF	21350	2560	23.55	24.50	1.245	0	0.426	0.530	0.215	0.268
	LTE Band 7	20M	QPSK	50	50	Front	10mm	Sample 1	OFF	21350	2560	22.59	23.50	1.233	0.05	0.356	0.439	0.179	0.221
	LTE Band 7	20M	QPSK	1	49	Back	10mm	Sample 1	OFF	21350	2560	23.55	24.50	1.245	-0.02	0.800	0.996	0.405	0.504
	LTE Band 7	20M	QPSK	1	49	Back	10mm	Sample 1	OFF	20850	2510	23.21	24.50	1.346	-0.01	0.754	1.015	0.392	0.528
20	LTE Band 7	20M	QPSK	1	49	Back	10mm	Sample 1	OFF	21100	2535	23.36	24.50	1.300	0.15	0.859	1.117	0.445	0.579
	LTE Band 7	20M	QPSK	1	49	Back	10mm	Sample 2	OFF	21100	2535	23.36	24.50	1.300	0.05	0.837	1.088	0.412	0.536
	LTE Band 7	20M	QPSK	50	50	Back	10mm	Sample 1	OFF	21350	2560	22.59	23.50	1.233	0.03	0.687	0.847	0.346	0.427
	LTE Band 7	20M	QPSK	50	50	Back	10mm	Sample 1	OFF	20850	2510	22.25	23.50	1.334	-0.06	0.659	0.879	0.340	0.453
	LTE Band 7	20M	QPSK	50	50	Back	10mm	Sample 1	OFF	21100	2535	22.41	23.50	1.285	0.13	0.677	0.870	0.348	0.447
	LTE Band 7	20M	QPSK	100	0	Back	10mm	Sample 1	OFF	21350	2560	22.52	23.50	1.253	0.11	0.690	0.865	0.350	0.439
	LTE Band 7	20M	QPSK	1	49	Left Side	10mm	Sample 1	OFF	21350	2560	23.55	24.50	1.245	0.01	0.160	0.199	0.086	0.107
	LTE Band 7	20M	QPSK	50	50	Left Side	10mm	Sample 1	OFF	21350	2560	22.59	23.50	1.233	0.02	0.130	0.160	0.070	0.086
	LTE Band 7	20M	QPSK	1	49	Right Side	10mm	Sample 1	OFF	21350	2560	23.55	24.50	1.245	0.08	0.524	0.652	0.275	0.342
	LTE Band 7	20M	QPSK	50	50	Right Side	10mm	Sample 1	OFF	21350	2560	22.59	23.50	1.233	-0.03	0.408	0.503	0.215	0.265
	LTE Band 7	20M	QPSK	1	49	Bottom Side	10mm	Sample 1	OFF	21350	2560	23.55	24.50	1.245	0.03	0.265	0.330	0.136	0.169
	LTE Band 7	20M	QPSK	50	50	Bottom Side	10mm	Sample 1	OFF	21350	2560	22.59	23.50	1.233	0.01	0.214	0.264	0.109	0.134



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Sample	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	49	Front	10mm	Sample 1	OFF	41140	2645	23.70	24.00	1.072	62.9	1.006	0.1	0.407	0.439	0.194	0.209
	LTE Band 41	20M	QPSK	50	50	Front	10mm	Sample 1	OFF	41140	2645	22.72	23.00	1.067	62.9	1.006	0.13	0.338	0.363	0.160	0.172
21	LTE Band 41	20M	QPSK	1	49	Back	10mm	Sample 1	OFF	41140	2645	23.70	24.00	1.072	62.9	1.006	0.01	0.488	0.526	0.235	0.253
	LTE Band 41	20M	QPSK	1	49	Back	10mm	Sample 2	OFF	41140	2645	23.70	24.00	1.072	62.9	1.006	0.01	0.465	0.501	0.212	0.229
	LTE Band 41	20M	QPSK	50	50	Back	10mm	Sample 1	OFF	41140	2645	22.72	23.00	1.067	62.9	1.006	-0.09	0.390	0.418	0.187	0.201
	LTE Band 41	20M	QPSK	1	49	Left Side	10mm	Sample 1	OFF	41140	2645	23.70	24.00	1.072	62.9	1.006	0.1	0.111	0.120	0.060	0.065
	LTE Band 41	20M	QPSK	50	50	Left Side	10mm	Sample 1	OFF	41140	2645	22.72	23.00	1.067	62.9	1.006	0.07	0.090	0.097	0.048	0.052
	LTE Band 41	20M	QPSK	1	49	Right Side	10mm	Sample 1	OFF	41140	2645	23.70	24.00	1.072	62.9	1.006	0.14	0.187	0.202	0.096	0.103
	LTE Band 41	20M	QPSK	50	50	Right Side	10mm	Sample 1	OFF	41140	2645	22.72	23.00	1.067	62.9	1.006	0.12	0.144	0.155	0.074	0.079
	LTE Band 41	20M	QPSK	1	49	Bottom Side	10mm	Sample 1	OFF	41140	2645	23.70	24.00	1.072	62.9	1.006	0.09	0.176	0.190	0.082	0.088
	LTE Band 41	20M	QPSK	50	50	Bottom Side	10mm	Sample 1	OFF	41140	2645	22.72	23.00	1.067	62.9	1.006	0.15	0.141	0.151	0.065	0.070

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Sample 1	1	2412	15.98	16.00	1.004	98.54	1.015	-0.16	0.114	0.116	0.059	0.060
22	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Sample 1	1	2412	15.98	16.00	1.004	98.54	1.015	0.09	0.168	0.171	0.072	0.073
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Sample 2	1	2412	15.98	16.00	1.004	98.54	1.015	0.13	0.141	0.144	0.057	0.058
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Sample 1	1	2412	15.98	16.00	1.004	98.54	1.015	0.11	0.076	0.077	0.042	0.043
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Sample 1	1	2412	15.98	16.00	1.004	98.54	1.015	0.07	0.098	0.100	0.045	0.046

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	Sample 1	0	2402	9.69	10.50	1.205	77.13	1.080	0.07	0.025	0.033	0.013	0.017
23	Bluetooth	1Mbps	Back	10mm	Sample 1	0	2402	9.69	10.50	1.205	77.13	1.080	-0.01	0.027	0.035	0.013	0.017
	Bluetooth	1Mbps	Back	10mm	Sample 2	0	2402	9.69	10.50	1.205	77.13	1.080	-0.01	0.024	0.031	0.011	0.014
	Bluetooth	1Mbps	Right Side	10mm	Sample 1	0	2402	9.69	10.50	1.205	77.13	1.080	0.08	0.015	0.020	0.008	0.010
	Bluetooth	1Mbps	Top Side	10mm	Sample 1	0	2402	9.69	10.50	1.205	77.13	1.080	0.1	0.022	0.029	0.011	0.014

**14.3 Body Worn Accessory SAR****<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
24	GSM850	GPRS (4 Tx slots)	Front	15mm	Sample 1	128	824.2	28.17	28.50	1.079	-0.1	0.282	0.304	0.220	0.237
	GSM850	GPRS (4 Tx slots)	Front	15mm	Sample 2	128	824.2	28.17	28.50	1.079	-0.03	0.266	0.287	0.206	0.222
	GSM850	GPRS (4 Tx slots)	Back	15mm	Sample 1	128	824.2	28.17	28.50	1.079	0.04	0.273	0.295	0.212	0.229
	GSM1900	GPRS (4 Tx slots)	Front	15mm	Sample 1	810	1909.8	24.84	25.50	1.164	0.19	0.331	0.385	0.188	0.219
25	GSM1900	GPRS (4 Tx slots)	Back	15mm	Sample 1	810	1909.8	24.84	25.50	1.164	0.19	0.377	0.439	0.218	0.254
	GSM1900	GPRS (4 Tx slots)	Back	15mm	Sample 2	810	1909.8	24.84	25.50	1.164	0.03	0.341	0.397	0.196	0.228

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	15mm	Sample 1	9538	1907.6	23.99	24.00	1.002	0.05	0.823	0.825	0.473	0.474
26	WCDMA II	RMC 12.2Kbps	Front	15mm	Sample 1	9262	1852.4	23.75	24.00	1.059	0.09	0.828	0.877	0.479	0.507
	WCDMA II	RMC 12.2Kbps	Front	15mm	Sample 2	9262	1852.4	23.75	24.00	1.059	0.17	0.797	0.844	0.463	0.490
	WCDMA II	RMC 12.2Kbps	Front	15mm	Sample 1	9400	1880	23.65	24.00	1.084	0.02	0.807	0.875	0.466	0.505
	WCDMA II	RMC 12.2Kbps	Back	15mm	Sample 1	9538	1907.6	23.99	24.00	1.002	0.1	0.837	0.839	0.491	0.492
	WCDMA II	RMC 12.2Kbps	Back	15mm	Sample 1	9262	1852.4	23.75	24.00	1.059	0.06	0.800	0.847	0.473	0.501
	WCDMA II	RMC 12.2Kbps	Back	15mm	Sample 1	9400	1880	23.65	24.00	1.084	0.06	0.787	0.853	0.464	0.503
	WCDMA V	RMC 12.2Kbps	Front	15mm	Sample 1	4132	826.4	24.85	25.00	1.035	-0.01	0.408	0.422	0.319	0.330
27	WCDMA V	RMC 12.2Kbps	Back	15mm	Sample 1	4132	826.4	24.85	25.00	1.035	0.02	0.431	0.446	0.336	0.348
	WCDMA V	RMC 12.2Kbps	Back	15mm	Sample 2	4132	826.4	24.85	25.00	1.035	0.11	0.397	0.411	0.304	0.315

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	15mm	Sample 1	18700	1860	23.16	24.00	1.213	-0.1	0.705	0.855	0.411	0.499
	LTE Band 2	20M	QPSK	1	0	Front	15mm	Sample 1	18900	1880	23.01	24.00	1.256	0.01	0.671	0.843	0.390	0.490
	LTE Band 2	20M	QPSK	1	0	Front	15mm	Sample 1	19100	1900	23.15	24.00	1.216	0	0.707	0.860	0.409	0.497
	LTE Band 2	20M	QPSK	50	0	Front	15mm	Sample 1	18700	1860	22.17	23.00	1.211	-0.03	0.570	0.690	0.331	0.401
	LTE Band 2	20M	QPSK	100	0	Front	15mm	Sample 1	19100	1900	22.18	23.00	1.208	-0.04	0.561	0.678	0.324	0.391
28	LTE Band 2	20M	QPSK	1	0	Back	15mm	Sample 1	18700	1860	23.16	24.00	1.213	0.15	0.717	0.870	0.425	0.516
	LTE Band 2	20M	QPSK	1	0	Back	15mm	Sample 2	18700	1860	23.16	24.00	1.213	0.03	0.701	0.851	0.412	0.500
	LTE Band 2	20M	QPSK	1	0	Back	15mm	Sample 1	18900	1880	23.01	24.00	1.256	0.12	0.686	0.862	0.405	0.509
	LTE Band 2	20M	QPSK	1	0	Back	15mm	Sample 1	19100	1900	23.15	24.00	1.216	0	0.708	0.861	0.417	0.507
	LTE Band 2	20M	QPSK	50	0	Back	15mm	Sample 1	18700	1860	22.17	23.00	1.211	0.01	0.579	0.701	0.342	0.414
	LTE Band 2	20M	QPSK	100	0	Back	15mm	Sample 1	19100	1900	22.18	23.00	1.208	0.04	0.570	0.688	0.334	0.403
	LTE Band 5	10M	QPSK	1	0	Front	15mm	Sample 1	20525	836.5	23.35	24.50	1.303	0.04	0.369	0.481	0.288	0.375
	LTE Band 5	10M	QPSK	25	0	Front	15mm	Sample 1	20525	836.5	22.40	23.50	1.288	0	0.301	0.388	0.235	0.303
29	LTE Band 5	10M	QPSK	1	0	Back	15mm	Sample 1	20525	836.5	23.35	24.50	1.303	0	0.398	0.519	0.310	0.404
	LTE Band 5	10M	QPSK	1	0	Back	15mm	Sample 2	20525	836.5	23.35	24.50	1.303	0.15	0.362	0.472	0.285	0.371
	LTE Band 5	10M	QPSK	25	0	Back	15mm	Sample 1	20525	836.5	22.40	23.50	1.288	-0.03	0.324	0.417	0.252	0.325
	LTE Band 7	20M	QPSK	1	49	Front	15mm	Sample 1	21350	2560	23.55	24.50	1.245	0.12	0.216	0.269	0.120	0.149
	LTE Band 7	20M	QPSK	50	50	Front	15mm	Sample 1	21350	2560	22.59	23.50	1.233	0.02	0.171	0.211	0.094	0.116
30	LTE Band 7	20M	QPSK	1	49	Back	15mm	Sample 1	21350	2560	23.55	24.50	1.245	-0.01	0.405	0.504	0.216	0.269
	LTE Band 7	20M	QPSK	1	49	Back	15mm	Sample 2	21350	2560	23.55	24.50	1.245	0.06	0.383	0.477	0.192	0.239
	LTE Band 7	20M	QPSK	50	50	Back	15mm	Sample 1	21350	2560	22.59	23.50	1.233	0.01	0.324	0.400	0.172	0.212



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	49	Front	15mm	Sample 1	41140	2645	23.70	24.00	1.072	62.9	1.006	-0.06	0.164	0.177	0.083	0.089
	LTE Band 41	20M	QPSK	50	50	Front	15mm	Sample 1	41140	2645	22.72	23.00	1.067	62.9	1.006	0.02	0.132	0.142	0.067	0.072
31	LTE Band 41	20M	QPSK	1	49	Back	15mm	Sample 1	41140	2645	23.70	24.00	1.072	62.9	1.006	0.04	0.190	0.205	0.098	0.106
	LTE Band 41	20M	QPSK	1	49	Back	15mm	Sample 2	41140	2645	23.70	24.00	1.072	62.9	1.006	0.01	0.176	0.190	0.081	0.087
	LTE Band 41	20M	QPSK	50	50	Back	15mm	Sample 1	41140	2645	22.72	23.00	1.067	62.9	1.006	0.02	0.151	0.162	0.078	0.084

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	15mm	Sample 1	1	2412	15.98	16.00	1.004	98.54	1.015	0.01	0.043	0.044	0.024	0.024
32	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Sample 1	1	2412	15.98	16.00	1.004	98.54	1.015	0.07	0.060	0.061	0.029	0.030
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Sample 2	1	2412	15.98	16.00	1.004	98.54	1.015	0.13	0.052	0.053	0.022	0.022
	WLAN5GHz	802.11a 6Mbps	Front	15mm	Sample 1	64	5320	16.94	17.00	1.014	93.55	1.069	-0.12	0.011	0.012	0.002	0.002
33	WLAN5GHz	802.11a 6Mbps	Back	15mm	Sample 1	64	5320	16.94	17.00	1.014	93.55	1.069	-0.14	0.079	0.086	0.027	0.029
	WLAN5GHz	802.11a 6Mbps	Back	15mm	Sample 2	64	5320	16.94	17.00	1.014	93.55	1.069	-0.03	0.069	0.075	0.024	0.026
	WLAN5GHz	802.11a 6Mbps	Front	15mm	Sample 1	100	5500	16.84	17.00	1.038	93.55	1.069	0.13	0.012	0.013	0.003	0.003
34	WLAN5GHz	802.11a 6Mbps	Back	15mm	Sample 1	100	5500	16.84	17.00	1.038	93.55	1.069	-0.16	0.069	0.077	0.022	0.024
	WLAN5GHz	802.11a 6Mbps	Back	15mm	Sample 2	100	5500	16.84	17.00	1.038	93.55	1.069	-0.03	0.062	0.069	0.019	0.021
	WLAN5GHz	802.11a 6Mbps	Front	15mm	Sample 1	165	5825	16.82	17.00	1.042	93.55	1.069	0.13	0.017	0.019	0.005	0.006
35	WLAN5GHz	802.11a 6Mbps	Back	15mm	Sample 1	165	5825	16.82	17.00	1.042	93.55	1.069	-0.14	0.066	0.074	0.024	0.027
	WLAN5GHz	802.11a 6Mbps	Back	15mm	Sample 2	165	5825	16.82	17.00	1.042	93.55	1.069	-0.06	0.059	0.066	0.021	0.023

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	Bluetooth	1Mbps	Front	15mm	Sample 1	0	2402	9.69	10.50	1.205	77.13	1.080	0.09	0.010	0.013	0.005	0.007
36	Bluetooth	1Mbps	Back	15mm	Sample 1	0	2402	9.69	10.50	1.205	77.13	1.080	0.1	0.012	0.016	0.006	0.008
	Bluetooth	1Mbps	Back	15mm	Sample 2	0	2402	9.69	10.50	1.205	77.13	1.080	0.06	0.009	0.012	0.005	0.006

14.4 Repeated SAR Measurement

Plot No.	Band	Mode	Test Position	Gap (mm)	Sample	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	Sample 1	ON	9262	1852.4	18.26	19.00	1.186	0.08	0.925		1.097
2nd	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	Sample 1	ON	9262	1852.4	18.26	19.00	1.186	-0.08	0.837	1.11	0.992
1st	LTE Band 7	20M_QPSK_1_49	Back	10mm	Sample 1	OFF	21100	2535	23.36	24.50	1.300	0.15	0.859		1.117
2nd	LTE Band 7	20M_QPSK_1_49	Back	10mm	Sample 1	OFF	21100	2535	23.36	24.50	1.300	-0.03	0.858	1.00	1.116

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset		
		Head	Body-worn	Hotspot
1.	GSM Voice + WLAN2.4GHz	Yes	Yes	
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes
4.	LTE + WLAN2.4GHz	Yes	Yes	Yes
5.	GSM Voice + Bluetooth	Yes	Yes	
6.	GPRS/EDGE + Bluetooth	Yes	Yes	Yes
7.	WCDMA+ Bluetooth	Yes	Yes	Yes
8.	LTE + Bluetooth	Yes	Yes	Yes
9.	GSM Voice + WLAN5GHz	Yes	Yes	
10.	GPRS/EDGE + WLAN5GHz	Yes	Yes	
11.	WCDMA + WLAN5GHz	Yes	Yes	
12.	LTE + WLAN5GHz	Yes	Yes	

General Note:

1. In this report, the 10g SAR results which is submitted voluntarily.
2. This device WLAN 2.4GHz supports Hotspot operation and Bluetooth support tethering applications.
3. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
4. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
5. The Scaled SAR summation is calculated based on the same configuration and test position.
6. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation $< 1.6\text{W/kg}$.
 - ii) $\text{SPLSR} = (\text{SAR1} + \text{SAR2})^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where $(x1, y1, z1)$ and $(x2, y2, z2)$ are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR $< 1.6\text{W/kg}$.



15.1 Head Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)			
GSM	GSM850	Right Cheek	0.281	0.219	0.192	0.068	0.50	0.47	0.35
		Right Tilted	0.143	0.184	0.140	0.051	0.33	0.28	0.19
		Left Cheek	0.287	0.763	0.515	0.189	1.05	0.80	0.48
		Left Tilted	0.127	0.672	0.343	0.138	0.80	0.47	0.27
	GSM1900	Right Cheek	0.153	0.219	0.192	0.068	0.37	0.35	0.22
		Right Tilted	0.063	0.184	0.140	0.051	0.25	0.20	0.11
		Left Cheek	0.298	0.763	0.515	0.189	1.06	0.81	0.49
		Left Tilted	0.066	0.672	0.343	0.138	0.74	0.41	0.20
WCDMA	WCDMA II	Right Cheek	0.336	0.219	0.192	0.068	0.56	0.53	0.40
		Right Tilted	0.166	0.184	0.140	0.051	0.35	0.31	0.22
		Left Cheek	0.594	0.763	0.515	0.189	1.36	1.11	0.78
		Left Tilted	0.127	0.672	0.343	0.138	0.80	0.47	0.27
	WCDMA V	Right Cheek	0.384	0.219	0.192	0.068	0.60	0.58	0.45
		Right Tilted	0.206	0.184	0.140	0.051	0.39	0.35	0.26
		Left Cheek	0.417	0.763	0.515	0.189	1.18	0.93	0.61
		Left Tilted	0.194	0.672	0.343	0.138	0.87	0.54	0.33
LTE	LTE Band 2	Right Cheek	0.396	0.219	0.192	0.068	0.62	0.59	0.46
		Right Tilted	0.243	0.184	0.140	0.051	0.43	0.38	0.29
		Left Cheek	0.698	0.763	0.515	0.189	1.46	1.21	0.89
		Left Tilted	0.195	0.672	0.343	0.138	0.87	0.54	0.33
	LTE Band 5	Right Cheek	0.362	0.219	0.192	0.068	0.58	0.55	0.43
		Right Tilted	0.177	0.184	0.140	0.051	0.36	0.32	0.23
		Left Cheek	0.382	0.763	0.515	0.189	1.15	0.90	0.57
		Left Tilted	0.184	0.672	0.343	0.138	0.86	0.53	0.32
	LTE Band 7	Right Cheek	0.431	0.219	0.192	0.068	0.65	0.62	0.50
		Right Tilted	0.068	0.184	0.140	0.051	0.25	0.21	0.12
		Left Cheek	0.139	0.763	0.515	0.189	0.90	0.65	0.33
		Left Tilted	0.105	0.672	0.343	0.138	0.78	0.45	0.24
	LTE Band 41	Right Cheek	0.111	0.219	0.192	0.068	0.33	0.30	0.18
		Right Tilted	0.024	0.184	0.140	0.051	0.21	0.16	0.08
		Left Cheek	0.045	0.763	0.515	0.189	0.81	0.56	0.23
		Left Tilted	0.019	0.672	0.343	0.138	0.69	0.36	0.16

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 10g SAR (W/kg)	1+3 Summed 10g SAR (W/kg)	1+4 Summed 10g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth			
			10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)			
GSM	GSM850	Right Cheek	0.223	0.098	0.065	0.034	0.32	0.29	0.26
		Right Tilted	0.115	0.083	0.050	0.025	0.20	0.17	0.14
		Left Cheek	0.224	0.374	0.159	0.085	0.60	0.38	0.31
		Left Tilted	0.101	0.296	0.100	0.059	0.40	0.20	0.16
	GSM1900	Right Cheek	0.100	0.098	0.065	0.034	0.20	0.17	0.13
		Right Tilted	0.041	0.083	0.050	0.025	0.12	0.09	0.07
		Left Cheek	0.199	0.374	0.159	0.085	0.57	0.36	0.28
		Left Tilted	0.044	0.296	0.100	0.059	0.34	0.14	0.10
WCDMA	WCDMA II	Right Cheek	0.223	0.098	0.065	0.034	0.32	0.29	0.26
		Right Tilted	0.110	0.083	0.050	0.025	0.19	0.16	0.14
		Left Cheek	0.400	0.374	0.159	0.085	0.77	0.56	0.49
		Left Tilted	0.085	0.296	0.100	0.059	0.38	0.19	0.14
	WCDMA V	Right Cheek	0.301	0.098	0.065	0.034	0.40	0.37	0.34
		Right Tilted	0.167	0.083	0.050	0.025	0.25	0.22	0.19
		Left Cheek	0.326	0.374	0.159	0.085	0.70	0.49	0.41
		Left Tilted	0.157	0.296	0.100	0.059	0.45	0.26	0.22
LTE	LTE Band 2	Right Cheek	0.267	0.098	0.065	0.034	0.37	0.33	0.30
		Right Tilted	0.161	0.083	0.050	0.025	0.24	0.21	0.19
		Left Cheek	0.466	0.374	0.159	0.085	0.84	0.63	0.55
		Left Tilted	0.133	0.296	0.100	0.059	0.43	0.23	0.19
	LTE Band 5	Right Cheek	0.284	0.098	0.065	0.034	0.38	0.35	0.32
		Right Tilted	0.143	0.083	0.050	0.025	0.23	0.19	0.17
		Left Cheek	0.301	0.374	0.159	0.085	0.68	0.46	0.39
		Left Tilted	0.147	0.296	0.100	0.059	0.44	0.25	0.21
	LTE Band 7	Right Cheek	0.222	0.098	0.065	0.034	0.32	0.29	0.26
		Right Tilted	0.040	0.083	0.050	0.025	0.12	0.09	0.07
		Left Cheek	0.081	0.374	0.159	0.085	0.46	0.24	0.17
		Left Tilted	0.056	0.296	0.100	0.059	0.35	0.16	0.12
	LTE Band 41	Right Cheek	0.058	0.098	0.065	0.034	0.16	0.12	0.09
		Right Tilted	0.012	0.083	0.050	0.025	0.10	0.06	0.04
		Left Cheek	0.026	0.374	0.159	0.085	0.40	0.19	0.11
		Left Tilted	0.009	0.296	0.100	0.059	0.31	0.11	0.07



15.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)		
GSM	GSM850	Front	0.334	0.116	0.033	0.45	0.37
		Back	0.358	0.171	0.035	0.53	0.39
		Left side	0.326			0.33	0.33
		Right side	0.428	0.077	0.020	0.51	0.45
		Top side		0.100	0.029	0.10	0.03
		Bottom side	0.032			0.03	0.03
	GSM1900	Front	0.359	0.116	0.033	0.48	0.39
		Back	0.353	0.171	0.035	0.52	0.39
		Left side	0.150			0.15	0.15
		Right side	0.013	0.077	0.020	0.09	0.03
		Top side		0.100	0.029	0.10	0.03
		Bottom side	0.511			0.51	0.51
WCDMA	WCDMA II	Front	0.519	0.116	0.033	0.64	0.55
		Back	0.534	0.171	0.035	0.71	0.57
		Left side	0.228			0.23	0.23
		Right side	0.019	0.077	0.020	0.10	0.04
		Top side		0.100	0.029	0.10	0.03
		Bottom side	1.097			1.10	1.10
	WCDMA V	Front	0.462	0.116	0.033	0.58	0.50
		Back	0.509	0.171	0.035	0.68	0.54
		Left side	0.540			0.54	0.54
		Right side	0.474	0.077	0.020	0.55	0.49
		Top side		0.100	0.029	0.10	0.03
		Bottom side	0.047			0.05	0.05
LTE	LTE Band 2	Front	0.523	0.116	0.033	0.64	0.56
		Back	0.513	0.171	0.035	0.68	0.55
		Left side	0.236			0.24	0.24
		Right side	0.021	0.077	0.020	0.10	0.04
		Top side		0.100	0.029	0.10	0.03
		Bottom side	1.115			1.12	1.12
	LTE Band 5	Front	0.515	0.116	0.033	0.63	0.55
		Back	0.547	0.171	0.035	0.72	0.58
		Left side	0.516			0.52	0.52
		Right side	0.554	0.077	0.020	0.63	0.57
		Top side		0.100	0.029	0.10	0.03
		Bottom side	0.036			0.04	0.04
	LTE Band 7	Front	0.530	0.116	0.033	0.65	0.56
		Back	1.117	0.171	0.035	1.29	1.15
		Left side	0.199			0.20	0.20
		Right side	0.652	0.077	0.020	0.73	0.67
		Top side		0.100	0.029	0.10	0.03
		Bottom side	0.330			0.33	0.33
	LTE Band 41	Front	0.439	0.116	0.033	0.56	0.47
		Back	0.526	0.171	0.035	0.70	0.56
		Left side	0.120			0.12	0.12
		Right side	0.202	0.077	0.020	0.28	0.22
		Top side		0.100	0.029	0.10	0.03
		Bottom side	0.190			0.19	0.19



WWAN Band		Exposure Position	1	2	3	1+2 Summed 10g SAR (W/kg)	1+3 Summed 10g SAR (W/kg)
			WWAN 10g SAR (W/kg)	2.4GHz WLAN 10g SAR (W/kg)	Bluetooth 10g SAR (W/kg)		
GSM	GSM850	Front	0.265	0.060	0.017	0.33	0.28
		Back	0.278	0.073	0.017	0.35	0.30
		Left side	0.225			0.23	0.23
		Right side	0.297	0.043	0.010	0.34	0.31
		Top side		0.046	0.014	0.05	0.01
		Bottom side	0.018			0.02	0.02
	GSM1900	Front	0.196	0.060	0.017	0.26	0.21
		Back	0.196	0.073	0.017	0.27	0.21
		Left side	0.090			0.09	0.09
		Right side	0.008	0.043	0.010	0.05	0.02
		Top side		0.046	0.014	0.05	0.01
		Bottom side	0.278			0.28	0.28
WCDMA	WCDMA II	Front	0.283	0.060	0.017	0.34	0.30
		Back	0.297	0.073	0.017	0.37	0.31
		Left side	0.134			0.13	0.13
		Right side	0.011	0.043	0.010	0.05	0.02
		Top side		0.046	0.014	0.05	0.01
		Bottom side	0.594			0.59	0.59
	WCDMA V	Front	0.362	0.060	0.017	0.42	0.38
		Back	0.371	0.073	0.017	0.44	0.39
		Left side	0.375			0.38	0.38
		Right side	0.328	0.043	0.010	0.37	0.34
		Top side		0.046	0.014	0.05	0.01
		Bottom side	0.027			0.03	0.03
LTE	LTE Band 2	Front	0.288	0.060	0.017	0.35	0.31
		Back	0.292	0.073	0.017	0.37	0.31
		Left side	0.142			0.14	0.14
		Right side	0.015	0.043	0.010	0.06	0.03
		Top side		0.046	0.014	0.05	0.01
		Bottom side	0.605			0.61	0.61
	LTE Band 5	Front	0.400	0.060	0.017	0.46	0.42
		Back	0.429	0.073	0.017	0.50	0.45
		Left side	0.358			0.36	0.36
		Right side	0.435	0.043	0.010	0.48	0.45
		Top side		0.046	0.014	0.05	0.01
		Bottom side	0.021			0.02	0.02
	LTE Band 7	Front	0.268	0.060	0.017	0.33	0.29
		Back	0.579	0.073	0.017	0.65	0.60
		Left side	0.107			0.11	0.11
		Right side	0.342	0.043	0.010	0.39	0.35
		Top side		0.046	0.014	0.05	0.01
		Bottom side	0.169			0.17	0.17
	LTE Band 41	Front	0.209	0.060	0.017	0.27	0.23
		Back	0.253	0.073	0.017	0.33	0.27
		Left side	0.065			0.07	0.07
		Right side	0.103	0.043	0.010	0.15	0.11
		Top side		0.046	0.014	0.05	0.01
		Bottom side	0.088			0.09	0.09

15.3 Body-Worn Accessory Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)			
GSM	GSM850	Front	0.304	0.044	0.019	0.013	0.35	0.32	0.32
		Back	0.295	0.061	0.086	0.016	0.36	0.38	0.31
	GSM1900	Front	0.385	0.044	0.019	0.013	0.43	0.40	0.40
		Back	0.439	0.061	0.086	0.016	0.50	0.53	0.46
WCDMA	WCDMA II	Front	0.877	0.044	0.019	0.013	0.92	0.90	0.89
		Back	0.853	0.061	0.086	0.016	0.91	0.94	0.87
	WCDMA V	Front	0.422	0.044	0.019	0.013	0.47	0.44	0.44
		Back	0.446	0.061	0.086	0.016	0.51	0.53	0.46
LTE	LTE Band 2	Front	0.860	0.044	0.019	0.013	0.90	0.88	0.87
		Back	0.870	0.061	0.086	0.016	0.93	0.96	0.89
	LTE Band 5	Front	0.481	0.044	0.019	0.013	0.53	0.50	0.49
		Back	0.519	0.061	0.086	0.016	0.58	0.61	0.54
	LTE Band 7	Front	0.269	0.044	0.019	0.013	0.31	0.29	0.28
		Back	0.504	0.061	0.086	0.016	0.57	0.59	0.52
	LTE Band 41	Front	0.177	0.044	0.019	0.013	0.22	0.20	0.19
		Back	0.205	0.061	0.086	0.016	0.27	0.29	0.22

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 10g SAR (W/kg)	1+3 Summed 10g SAR (W/kg)	1+4 Summed 10g SAR (W/kg)
			WWAN 10g SAR (W/kg)	2.4GHz WLAN 10g SAR (W/kg)	5GHz WLAN 10g SAR (W/kg)	Bluetooth 10g SAR (W/kg)			
GSM	GSM850	Front	0.237	0.024	0.006	0.007	0.26	0.24	0.24
		Back	0.229	0.030	0.029	0.008	0.26	0.26	0.24
	GSM1900	Front	0.219	0.024	0.006	0.007	0.24	0.23	0.23
		Back	0.254	0.030	0.029	0.008	0.28	0.28	0.26
WCDMA	WCDMA II	Front	0.507	0.024	0.006	0.007	0.53	0.51	0.51
		Back	0.503	0.030	0.029	0.008	0.53	0.53	0.51
	WCDMA V	Front	0.330	0.024	0.006	0.007	0.35	0.34	0.34
		Back	0.348	0.030	0.029	0.008	0.38	0.38	0.36
LTE	LTE Band 2	Front	0.499	0.024	0.006	0.007	0.52	0.51	0.51
		Back	0.516	0.030	0.029	0.008	0.55	0.55	0.52
	LTE Band 5	Front	0.375	0.024	0.006	0.007	0.40	0.38	0.38
		Back	0.404	0.030	0.029	0.008	0.43	0.43	0.41
	LTE Band 7	Front	0.149	0.024	0.006	0.007	0.17	0.16	0.16
		Back	0.269	0.030	0.029	0.008	0.30	0.30	0.28
	LTE Band 41	Front	0.089	0.024	0.006	0.007	0.11	0.10	0.10
		Back	0.106	0.030	0.029	0.008	0.14	0.14	0.11

Test Engineer : Tommy Chen Thomas Wang San Lin Wilson Lin Galen Chang and Nick Yu

16. Uncertainty Assessment

Note:

1. The uncertainty assessment of below which is submitted voluntarily.

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) k is the coverage factor

Table 17.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.00	N	1	1	1	6.0	6.0
Axial Isotropy	4.70	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.60	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	1.00	R	1.732	1	1	0.6	0.6
Linearity	4.70	R	1.732	1	1	2.7	2.7
System Detection Limits	1.00	R	1.732	1	1	0.6	0.6
Modulation Response	4.68	R	1.732	1	1	2.7	2.7
Readout Electronics	0.30	N	1	1	1	0.3	0.3
Response Time	0.00	R	1.732	1	1	0.0	0.0
Integration Time	2.60	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.00	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.00	R	1.732	1	1	1.7	1.7
Probe Positioner	0.40	R	1.732	1	1	0.2	0.2
Probe Positioning	2.90	R	1.732	1	1	1.7	1.7
Max. SAR Eval.	2.00	R	1.732	1	1	1.2	1.2
Test Sample Related							
Device Positioning	3.03	N	1	1	1	3.0	3.0
Device Holder	3.60	N	1	1	1	3.6	3.6
Power Drift	5.00	R	1.732	1	1	2.9	2.9
Power Scaling	0.00	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.10	R	1.732	1	1	3.5	3.5
SAR correction	0.00	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.03	N	1	0.78	0.71	0.0	0.0
Liquid Conductivity (target)	5.00	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.50	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.68	R	1.732	0.78	0.71	1.7	1.5
Liquid Permittivity Repeatability	0.02	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.00	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.50	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.84	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						11.6%	11.6%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						23.2%	23.1%

Table 17.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.55	N	1	1	1	6.6	6.6
Axial Isotropy	4.70	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.60	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	2.00	R	1.732	1	1	1.2	1.2
Linearity	4.70	R	1.732	1	1	2.7	2.7
System Detection Limits	1.00	R	1.732	1	1	0.6	0.6
Modulation Response	4.68	R	1.732	1	1	2.7	2.7
Readout Electronics	0.30	N	1	1	1	0.3	0.3
Response Time	0.00	R	1.732	1	1	0.0	0.0
Integration Time	2.60	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.00	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.00	R	1.732	1	1	1.7	1.7
Probe Positioner	0.40	R	1.732	1	1	0.2	0.2
Probe Positioning	6.70	R	1.732	1	1	3.9	3.9
Max. SAR Eval.	4.00	R	1.732	1	1	2.3	2.3
Test Sample Related							
Device Positioning	3.03	N	1	1	1	3.0	3.0
Device Holder	3.60	N	1	1	1	3.6	3.6
Power Drift	5.00	R	1.732	1	1	2.9	2.9
Power Scaling	0.00	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.60	R	1.732	1	1	3.8	3.8
SAR correction	0.00	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.03	N	1	0.78	0.71	0.0	0.0
Liquid Conductivity (target)	5.00	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.50	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.68	R	1.732	0.78	0.71	1.7	1.5
Liquid Permittivity Repeatability	0.02	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.00	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.50	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.84	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						12.7%	12.6%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						25.4%	25.3%

Table 17.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz

17. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [11] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [12] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [13] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.