



SAR EVALUATION REPORT

Applicant Name:

LG Electronics MobileComm U.S.A., Inc.
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

Date of Testing:

04/14/18 - 04/30/18

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Document Serial No.:

1M1803280057-01-R1.ZNF

FCC ID:

ZNFQ710US

APPLICANT:

LG ELECTRONICS MOBILECOMM U.S.A., INC.

DUT Type:

Portable Handset

Application Type:

Certification

FCC Rule Part(s):

CFR §2.1093

Model:

LM-Q710US, LM-Q710ULM

Additional Model(s):

LMQ710US, Q710US, LMQ710ULM, Q710ULM

Equipment Class	Band & Mode	Tx Frequency	SAR			
			1g Head (W/kg)	1g Body-Worn (W/kg)	1g Hotspot (W/kg)	10g Phablet (W/kg)
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	0.13	0.37	0.41	N/A
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	< 0.1	0.37	0.75	N/A
PCE	UMTS 850	826.40 - 846.60 MHz	0.18	0.62	0.74	N/A
PCE	UMTS 1755	1712.4 - 1752.6 MHz	< 0.1	0.47	0.77	3.01
PCE	UMTS 1900	1852.4 - 1907.6 MHz	0.14	0.60	1.28	3.20
PCE	CDMA/EVDO BC0 (S22H)	824.70 - 848.31 MHz	0.19	0.53	0.52	N/A
PCE	CDMA/EVDO BC10 (S90S)	817.90 - 823.10 MHz	0.20	0.61	0.67	N/A
PCE	PCS CDMA/EVDO	1851.25 - 1908.75 MHz	0.13	0.58	1.05	3.19
PCE	LTE Band 12	699.7 - 715.3 MHz	0.21	0.61	0.75	N/A
PCE	LTE Band 17	706.5 - 713.5 MHz	N/A	N/A	N/A	N/A
PCE	LTE Band 13	779.5 - 784.5 MHz	0.20	0.59	0.73	N/A
PCE	LTE Band 26 (Cell)	814.7 - 848.3 MHz	0.18	0.62	0.70	N/A
PCE	LTE Band 5 (Cell)	824.7 - 848.3 MHz	N/A	N/A	N/A	N/A
PCE	LTE Band 66 (AWS)	1710.7 - 1779.3 MHz	0.12	0.60	1.00	3.20
PCE	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	N/A	N/A	N/A	N/A
PCE	LTE Band 25 (PCS)	1850.7 - 1914.3 MHz	0.15	0.72	1.17	3.13
PCE	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	N/A	N/A	N/A	N/A
PCE	LTE Band 41	2498.5 - 2687.5 MHz	< 0.1	0.12	0.21	N/A
DTS	2.4 GHz WLAN	2412 - 2462 MHz	1.02	0.43	0.74	N/A
NII	U-NII-1	5180 - 5240 MHz	N/A	N/A	0.69	N/A
NII	U-NII-2A	5260 - 5320 MHz	0.87	0.77	N/A	2.33
NII	U-NII-2C	5500 - 5700 MHz	0.81	0.90	N/A	2.13
NII	U-NII-3	5745 - 5825 MHz	0.61	0.82	0.82	N/A
DSS/DTSS	Bluetooth	2402 - 2480 MHz	0.16	N/A	N/A	N/A
Simultaneous SAR per KDB 690783 D01v01r03:			1.23	1.52	1.59	3.93

This revised Test Report (1M1803280057-01-R1.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.8 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.


Randy Ortañez
President



The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfai.info.

FCC ID ZNFQ710US		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 1 of 109	

TABLE OF CONTENTS

1	DEVICE UNDER TEST	3
2	LTE INFORMATION	14
3	INTRODUCTION	15
4	DOSIMETRIC ASSESSMENT	16
5	DEFINITION OF REFERENCE POINTS	17
6	TEST CONFIGURATION POSITIONS	18
7	RF EXPOSURE LIMITS	22
8	FCC MEASUREMENT PROCEDURES.....	23
9	RF CONDUCTED POWERS.....	30
10	SYSTEM VERIFICATION.....	61
11	SAR DATA SUMMARY	66
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	86
13	SAR MEASUREMENT VARIABILITY	103
14	EQUIPMENT LIST.....	105
15	MEASUREMENT UNCERTAINTIES.....	106
16	CONCLUSION.....	107
17	REFERENCES	108
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		
APPENDIX G: SENSOR TRIGGERING DATA SUMMARY		
APPENDIX H: DOWNLINK LTE CA RF CONDUCTED POWERS		

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 2 of 109	

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.6 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
CDMA/EVDO BC0 (\$22H)	Voice/Data	824.70 - 848.31 MHz
CDMA/EVDO BC10 (\$90S)	Voice/Data	817.90 - 823.10 MHz
PCS CDMA/EVDO	Voice/Data	1851.25 - 1908.75 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 17	Voice/Data	706.5 - 713.5 MHz
LTE Band 13	Voice/Data	779.5 - 784.5 MHz
LTE Band 26 (Cell)	Voice/Data	814.7 - 848.3 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 66 (AWS)	Voice/Data	1710.7 - 1779.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 25 (PCS)	Voice/Data	1850.7 - 1914.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
LTE Band 41	Voice/Data	2498.5 - 2687.5 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2462 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C	Voice/Data	5500 - 5700 MHz
U-NII-3	Voice/Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 3 of 109

1.2 Power Reduction for SAR

This device uses a power reduction mechanism for SAR compliance. The power reduction mechanism is activated when the device is used in close proximity to the user's body. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device. Detailed descriptions of the power reduction mechanism are included in the operational description.

This device uses an independent fixed level power reduction mechanism for WLAN operations during voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description.

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

1.3.1 Maximum Output Power

Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
GSM/GPRS/EDGE 850	Maximum	33.7	33.7	32.2	30.7	29.2	27.7	27.7	27.2	27.2
	Nominal	33.2	33.2	31.7	30.2	28.7	27.2	27.2	26.7	26.7
GSM/GPRS/EDGE 1900	Maximum	30.7	30.7	29.2	27.2	25.7	26.2	26.2	25.7	25.7
	Nominal	30.2	30.2	28.7	26.7	25.2	25.7	25.7	25.2	25.2

Mode / Band		Modulated Average (dBm)		
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA
UMTS Band 5 (850 MHz)	Maximum	25.2	25.2	25.2
	Nominal	24.7	24.7	24.7
UMTS Band 4 (1750 MHz)	Maximum	24.5	24.5	24.5
	Nominal	24.0	24.0	24.0
UMTS Band 2 (1900 MHz)	Maximum	24.5	24.5	24.5
	Nominal	24.0	24.0	24.0

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 4 of 109

Mode / Band		Modulated Average (dBm)
CDMA/EVDO BC10 (§90S)	Maximum	25.2
	Nominal	24.7
CDMA/EVDO BC0 (§22H)	Maximum	25.2
	Nominal	24.7
PCS CDMA/EVDO	Maximum	25.0
	Nominal	24.5

Mode / Band		Modulated Average (dBm)
LTE Band 12	Maximum	25.5
	Nominal	25.0
LTE Band 17	Maximum	25.5
	Nominal	25.0
LTE Band 13	Maximum	25.5
	Nominal	25.0
LTE Band 26 (Cell)	Maximum	24.7
	Nominal	24.2
LTE Band 5 (Cell)	Maximum	24.7
	Nominal	24.2
LTE Band 66 (AWS)	Maximum	24.5
	Nominal	24.0
LTE Band 4 (AWS)	Maximum	24.5
	Nominal	24.0
LTE Band 25 (PCS)	Maximum	24.5
	Nominal	24.0
LTE Band 2 (PCS)	Maximum	24.5
	Nominal	24.0
LTE Band 41	Maximum	24.0
	Nominal	23.5

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 5 of 109

Mode / Band		Modulated Average (dBm)			
		Ch. 1	Ch. 2, 10	Ch. 3-9	Ch. 11
IEEE 802.11b (2.4 GHz)	Maximum	23.0			
	Nominal	22.0			
IEEE 802.11g (2.4 GHz)	Maximum	19.0	20.0	22.0	18.5
	Nominal	18.0	19.0	21.0	17.5
IEEE 802.11n (2.4 GHz)	Maximum	18.0	19.0	21.0	17.5
	Nominal	17.0	18.0	20.0	16.5
Bluetooth	Maximum	11.5			
	Nominal	10.5			
Bluetooth LE	Maximum	2.5			
	Nominal	1.5			

Mode / Band		Modulated Average (dBm)							
		20 MHz Bandwidth			40 MHz Bandwidth		80 MHz Bandwidth		
		Ch. 36, 64-100	Ch. 40-60, 104-136, 153-161	Ch. 140- 149, 165	Ch. 38, 62-102	Ch. 46- 54, 110, 118- 126, 134, 151-159	Ch. 42, 106	Ch. 58	Ch. 122- 155
IEEE 802.11a (5 GHz)	Maximum	16.0	20.0	18.0					
	Nominal	15.0	19.0	17.0					
IEEE 802.11n (5 GHz)	Maximum	15.0	19.0	17.0	13.0	15.0			
	Nominal	14.0	18.0	16.0	12.0	14.0			
IEEE 802.11ac (5 GHz)	Maximum	12.0	16.0	14.0	11.0	13.0	11.0	12.0	13.0
	Nominal	11.0	15.0	13.0	10.0	12.0	10.0	11.0	12.0

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	
			Page 6 of 109

1.3.2

Reduced Output Power

Mode / Band		Modulated Average (dBm)		
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA
UMTS Band 4 (1750 MHz)	Maximum	23.5	23.5	23.5
	Nominal	23.0	23.0	23.0
UMTS Band 2 (1900 MHz)	Maximum	23.5	23.5	23.5
	Nominal	23.0	23.0	23.0
Mode / Band		Modulated Average (dBm)		
PCS CDMA/EVDO	Maximum	23.5		
	Nominal	23.0		
Mode / Band		Modulated Average (dBm)		
LTE Band 66 (AWS)	Maximum	23.5		
	Nominal	23.0		
LTE Band 4 (AWS)	Maximum	23.5		
	Nominal	23.0		
LTE Band 25 (PCS)	Maximum	23.5		
	Nominal	23.0		
LTE Band 2 (PCS)	Maximum	23.5		
	Nominal	23.0		

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 7 of 109

Mode / Band		Modulated Average (dBm)			
		Ch. 1	Ch. 2, 10	Ch. 3-9	Ch. 11
IEEE 802.11b (2.4 GHz)	Maximum	19.0			
	Nominal	18.0			
IEEE 802.11g (2.4 GHz)	Maximum	16.0	17.0	19.0	15.5
	Nominal	15.0	16.0	18.0	14.5
IEEE 802.11n (2.4 GHz)	Maximum	16.0	17.0	19.0	15.5
	Nominal	15.0	16.0	18.0	14.5

Mode / Band		Modulated Average (dBm)		
		20 MHz Bandwidth		
		Ch. 36, 64-100	Ch. 40-60, 104-136, 153-161	Ch. 140- 149, 165
IEEE 802.11a (5 GHz)	Maximum	14.0	18.0	16.0
	Nominal	13.0	17.0	15.0
IEEE 802.11n (5 GHz)	Maximum	14.0	18.0	16.0
	Nominal	13.0	17.0	15.0

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 8 of 109

1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device antennas can be found in Appendix F. Since the diagonal dimension of this device is > 160 mm and <200 mm, it is considered a “phablet.”

Table 1-1
Device Edges/Sides for SAR Testing

Mode	Back	Front	Top	Bottom	Right	Left
GPRS 850	Yes	Yes	No	Yes	No	Yes
GPRS 1900	Yes	Yes	No	Yes	No	Yes
UMTS 850	Yes	Yes	No	Yes	No	Yes
UMTS 1750	Yes	Yes	No	Yes	No	Yes
UMTS 1900	Yes	Yes	No	Yes	No	Yes
EVDO BC0 (§22H)	Yes	Yes	No	Yes	No	Yes
EVDO BC10 (§90S)	Yes	Yes	No	Yes	No	Yes
PCS EVDO	Yes	Yes	No	Yes	No	Yes
LTE Band 12	Yes	Yes	No	Yes	No	Yes
LTE Band 13	Yes	Yes	No	Yes	No	Yes
LTE Band 26 (Cell)	Yes	Yes	No	Yes	No	Yes
LTE Band 66 (AWS)	Yes	Yes	No	Yes	No	Yes
LTE Band 25 (PCS)	Yes	Yes	No	Yes	No	Yes
LTE Band 41	Yes	Yes	No	Yes	No	Yes
2.4 GHz WLAN	Yes	Yes	Yes	No	No	Yes
5 GHz WLAN	Yes	Yes	Yes	No	No	Yes

Note: Particular DUT edges were not required to be evaluated for wireless router SAR or phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02r01 Section III and FCC KDB Publication 648474 D04v01r03. The distances between the transmit antennas and the edges of the device are included in the filing. When wireless router mode is enabled, U-NII-2A and U-NII-2C operations are disabled.

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 9 of 109

1.5 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

Table 1-2
Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Phablet	Notes
1	1x CDMA voice + 2.4 GHz Wi-Fi	Yes	Yes	N/A	Yes	
2	1x CDMA voice + 5 GHz Wi-Fi	Yes	Yes	N/A	Yes	
3	1x CDMA voice + 2.4 GHz Bluetooth	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
4	GSM voice + 2.4 GHz Wi-Fi	Yes	Yes	N/A	Yes	
5	GSM voice + 5 GHz Wi-Fi	Yes	Yes	N/A	Yes	
6	GSM voice + 2.4 GHz Bluetooth	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
7	UMTS + 2.4 GHz Wi-Fi	Yes	Yes	Yes	Yes	
8	UMTS + 5 GHz Wi-Fi	Yes	Yes	Yes	Yes	
9	UMTS + 2.4 GHz Bluetooth	Yes^	Yes	Yes^	Yes	^ Bluetooth Tethering is considered
10	LTE + 2.4 GHz Wi-Fi	Yes	Yes	Yes	Yes	
11	LTE + 5 GHz Wi-Fi	Yes	Yes	Yes	Yes	
12	LTE + 2.4 GHz Bluetooth	Yes^	Yes	Yes^	Yes	^ Bluetooth Tethering is considered
13	CDMA/EVDO data + 2.4 GHz Wi-Fi	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
14	CDMA/EVDO data + 5 GHz Wi-Fi	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
15	CDMA/EVDO data + 2.4 GHz Bluetooth	Yes*^	Yes*	Yes^	Yes	* Pre-installed VOIP applications are considered ^ Bluetooth Tethering is considered
16	GPRS/EDGE + 2.4 GHz Wi-Fi	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
17	GPRS/EDGE + 5 GHz Wi-Fi	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
18	GPRS/EDGE + 2.4 GHz Bluetooth	Yes*^	Yes*	Yes^	Yes	* Pre-installed VOIP applications are considered ^ Bluetooth Tethering is considered

- 2.4 GHz WLAN, 5 GHz WLAN, and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
- All licensed modes share the same antenna path and cannot transmit simultaneously.
- When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
- Per the manufacturer, WIFI Direct is expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.
- 5 GHz Wireless Router is only supported for the U-NII-1 and U-NII-3 by S/W, therefore U-NII2A, and U-NII2C were not evaluated for wireless router conditions.
- This device supports VOLTE.
- This device supports VoWIFI.

FCC ID ZNFQ710US		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 10 of 109

1.6 Miscellaneous SAR Test Considerations

(A) WIFI/BT

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB Publication 248227 D01v02r02.

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-2A & U-NII-2C WIFI, only 2.4 GHz, U-NII-1, and U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02r01.

Per FCC KDB 447498 D01v06, the 1g SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, body-worn and hotspot Bluetooth SAR was not required; $[(14/10) * \sqrt{2.480}] = 2.2 < 3.0$. Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

Per FCC KDB 447498 D01v06, the 10g SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 7.5$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, phablet Bluetooth SAR was not required; $[(14/5) * \sqrt{2.480}] = 4.4 < 7.5$. Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

This device supports IEEE 802.11ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 1 Tx antenna output
- d) 256 QAM is supported
- e) TDWR channels are supported

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because wireless router operations are not supported for U-NII-2A & U-NII-2C WLAN, phablet SAR tests were performed. Phablet SAR was not evaluated for 2.4 GHz, U-NII-1 and U-NII-3 WLAN operations since wireless router 1g SAR was < 1.2 W/kg.

(B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 11 of 109

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

CDMA 1X Advanced technology was not required for SAR since the maximum allowed output powers for 1x Advanced was not more than 0.25 dB higher than the maximum powers for 1x and the measured SAR in any 1x mode exposure conditions was not greater than 1.2 W/kg per FCC KDB Publication 941225 D01v03r01.

This device supports LTE Carrier Aggregation (CA) in the downlink only. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive. Downlink LTE CA conducted powers are included in Appendix H.

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

This device supports 64QAM on the uplink for LTE Operations. Conducted powers for 64QAM uplink configurations were measured per Section 5.1 of FCC KDB Publication 941225 D05v02r05. SAR was not required for 64QAM since the highest maximum output power for 64 QAM is $\leq \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg, per Section 5.2.4 of FCC KDB Publication 941225 D05v02r05.

1.7 Guidance Applied

- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01, D05v02r04, D05Av01r02, D06v02r01 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 648474 D04v01r03 (Phablet Procedures)
- FCC KDB Publication 616217 D04v01r02 (Proximity Sensor)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)
- April 2018 TCB Workshop Notes (LTE Carrier Aggregation)

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 	Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset
		Page 12 of 109

1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 13 of 109

2 LTE INFORMATION

LTE Information					
FCC ID	ZNFQ710US				
Form Factor	Portable Handset				
Frequency Range of each LTE transmission band	LTE Band 12 (699.7 - 715.3 MHz)				
	LTE Band 17 (706.5 - 713.5 MHz)				
	LTE Band 13 (779.5 - 784.5 MHz)				
	LTE Band 26 (Cell) (814.7 - 848.3 MHz)				
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)				
	LTE Band 66 (AWS) (1710.7 - 1779.3 MHz)				
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)				
	LTE Band 25 (PCS) (1850.7 - 1914.3 MHz)				
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)				
	LTE Band 41 (2498.5 - 2687.5 MHz)				
Channel Bandwidths	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 17: 5 MHz, 10 MHz				
	LTE Band 13: 5 MHz, 10 MHz				
	LTE Band 26 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz				
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 66 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 25 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 12: 1.4 MHz	699.7 (23017)		707.5 (23095)		715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)		707.5 (23095)		714.5 (23165)
LTE Band 12: 5 MHz	701.5 (23035)		707.5 (23095)		713.5 (23155)
LTE Band 12: 10 MHz	704 (23060)		707.5 (23095)		711 (23130)
LTE Band 17: 5 MHz	706.5 (23755)		710 (23790)		713.5 (23825)
LTE Band 17: 10 MHz	709 (23780)		710 (23790)		711 (23800)
LTE Band 13: 5 MHz	779.5 (23205)		782 (23230)		784.5 (23255)
LTE Band 13: 10 MHz	N/A		782 (23230)		N/A
LTE Band 26 (Cell): 1.4 MHz	814.7 (26697)		831.5 (26865)		848.3 (27033)
LTE Band 26 (Cell): 3 MHz	815.5 (26705)		831.5 (26865)		847.5 (27025)
LTE Band 26 (Cell): 5 MHz	816.5 (26715)		831.5 (26865)		846.5 (27015)
LTE Band 26 (Cell): 10 MHz	819 (26740)		831.5 (26865)		844 (26990)
LTE Band 26 (Cell): 15 MHz	821.5 (26765)		831.5 (26865)		841.5 (26965)
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)		836.5 (20525)		848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)		836.5 (20525)		847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)		836.5 (20525)		846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829 (20450)		836.5 (20525)		844 (20600)
LTE Band 66 (AWS): 1.4 MHz	1710.7 (131979)		1745 (132322)		1779.3 (132665)
LTE Band 66 (AWS): 3 MHz	1711.5 (131987)		1745 (132322)		1778.5 (132657)
LTE Band 66 (AWS): 5 MHz	1712.5 (131997)		1745 (132322)		1777.5 (132647)
LTE Band 66 (AWS): 10 MHz	1715 (132022)		1745 (132322)		1775 (132622)
LTE Band 66 (AWS): 15 MHz	1717.5 (132047)		1745 (132322)		1772.5 (132597)
LTE Band 66 (AWS): 20 MHz	1720 (132072)		1745 (132322)		1770 (132572)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)		1732.5 (20175)		1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)		1732.5 (20175)		1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)		1732.5 (20175)		1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715 (20000)		1732.5 (20175)		1750 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)		1732.5 (20175)		1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720 (20050)		1732.5 (20175)		1745 (20300)
LTE Band 25 (PCS): 1.4 MHz	1850.7 (26047)		1882.5 (26365)		1914.3 (26683)
LTE Band 25 (PCS): 3 MHz	1851.5 (26055)		1882.5 (26365)		1913.5 (26675)
LTE Band 25 (PCS): 5 MHz	1852.5 (26065)		1882.5 (26365)		1912.5 (26665)
LTE Band 25 (PCS): 10 MHz	1855 (26090)		1882.5 (26365)		1910 (26640)
LTE Band 25 (PCS): 15 MHz	1857.5 (26115)		1882.5 (26365)		1907.5 (26615)
LTE Band 25 (PCS): 20 MHz	1860 (26140)		1882.5 (26365)		1905 (26590)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)		1880 (18900)		1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)		1880 (18900)		1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)		1880 (18900)		1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855 (18650)		1880 (18900)		1905 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)		1880 (18900)		1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860 (18700)		1880 (18900)		1900 (19100)
LTE Band 41: 5 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 10 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 15 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
UE Category	6				
Modulations Supported in UL	QPSK, 16QAM, 64QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	YES				
A-MPR (Additional MPR) disabled for SAR Testing?	YES				
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations				
LTE Additional Information	This device does not support full CA features on 3GPP Release 10. It supports a maximum of 2 carriers in the downlink. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. The following LTE Release 10 Features are not supported: Relay, HetNet, Enhanced MIMO, eCIC, WIF Offloading, MDH, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

FCC ID ZNFQ710US		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 14 of 109	

3 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 15 of 109

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4-1
Sample SAR Area
Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
				$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 16 of 109	

5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




Figure 5-1
Close-Up Side view
of ERP

5.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 5-2
Front, back and side view of SAM Twin Phantom

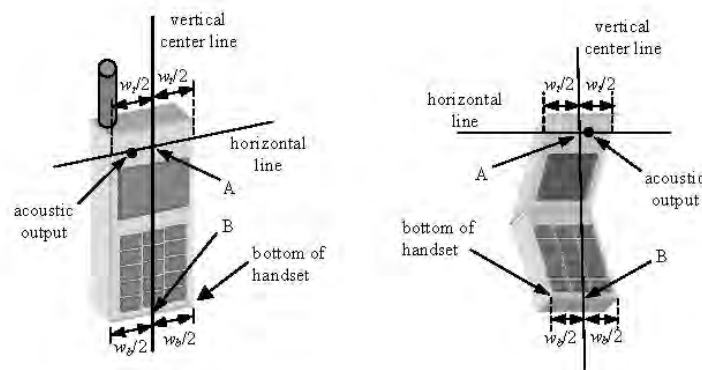


Figure 5-3
Handset Vertical Center & Horizontal Line Reference Points

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 17 of 109

6 TEST CONFIGURATION POSITIONS

6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.



Figure 6-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

6.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 18 of 109

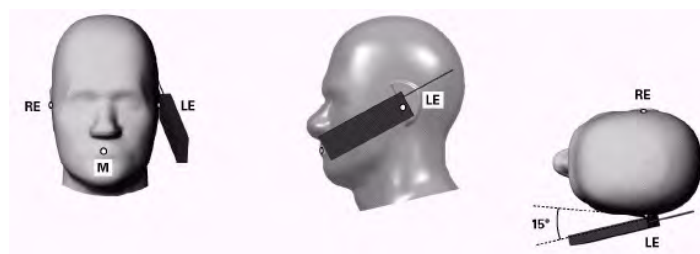


Figure 6-2 Front, Side and Top View of Ear/15° Tilt Position




Figure 6-3 Side view w/ relevant markings

6.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones. Per IEEE 1528-2013, a rotated SAM phantom is necessary to allow probe access to such regions. Both SAM heads of the TwinSAM-Chin20 are rotated 20 degrees around the NF line. Each head can be removed from the table for emptying and cleaning.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR location identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

6.5 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

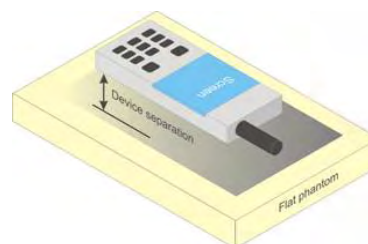


Figure 6-4 Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 19 of 109

contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

6.6 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1g body and 10g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

6.8 Phablet Configurations

For smart phones with a display diagonal dimension > 150 mm or an overall diagonal dimension > 160 mm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 20 of 109

support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna ≤ 25 mm from that surface or edge, in direct contact with the phantom, for 10g SAR. The UMPC mini-tablet 1g SAR at 5 mm is not required. When hotspot mode applies, 10g SAR is required only for the surfaces and edges with hotspot mode 1g SAR > 1.2 W/kg.

6.9 Proximity Sensor Considerations

This device uses a power reduction mechanism to reduce output powers in certain use conditions when the device is used close the user's body.

When the device's antenna is within a certain distance of the user, the sensor activates and reduces the maximum allowed output power. However, the sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, additional evaluation is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional test positions. Sensor triggering distance summary data is included in Appendix G.

The sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the sensor entirely covers the antennas.

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 21 of 109

7 RF EXPOSURE LIMITS

7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 7-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

2

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 22 of 109

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

8.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

8.4 SAR Measurement Conditions for CDMA2000

The following procedures were performed according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

8.4.1 Output Power Verification

See 3GPP2 C.S0011/TIA-98-E as recommended by FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.” Maximum output power is verified on the High, Middle and Low channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E. SO55 tests were measured with power control bits in the “All Up” condition.

FCC ID ZNFQ710US		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 23 of 109

1. If the mobile station (MS) supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC=1/1) with 9600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1, Table 8-1 parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH₀ and demodulation of RC 3,4, or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9600 bps Fundamental Channel and 9600 bps SCH₀ data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2, Table 8-2 was applied.

Table 8-1
Parameters for Max. Power for RC1

Parameter	Units	Value
I_{or}	dBm/1.23 MHz	-104
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

Table 8-2
Parameters for Max. Power for RC3

Parameter	Units	Value
I_{or}	dBm/1.23 MHz	-86
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

5. FCHs were configured at full rate for maximum SAR with “All Up” power control bits.

8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55. The 3G SAR test reduction procedure is applied to RC1 with RC3 as the primary mode; otherwise, SAR is required for the channel with maximum measured output in RC1 using the head exposure configuration that results in the highest reported SAR in RC3.

Head SAR is additionally evaluated using EVDO Rev. A to support compliance for VoIP operations. See Section 8.4.5 for EVDO Rev. A configuration parameters.

8.4.3 Body-worn SAR Measurements

SAR for body-worn exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH_n), with FCH only as the primary mode. Otherwise, SAR is required for multiple code channel configuration (FCH + SCH_n), with FCH at full rate and SCH₀ enabled at 9600 bps, using the highest reported SAR configuration for FCH only. When multiple code channels are enabled, the transmitter output can shift by more than 0.5 dB and may lead to higher SAR drifts and SCH dropouts.

The 3G SAR test reduction procedure is applied to body-worn accessory SAR in RC1 with RC3 as the primary mode. Otherwise, SAR is required for RC1, with SO55 and full rate, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

8.4.4 Body-worn SAR Measurements for EVDO Devices

For handsets with EVDO capabilities, the 3G SAR test reduction procedure is applied to EVDO Rev. 0 with 1x RTT RC3 as the primary mode to determine body-worn accessory test requirements. Otherwise, body-worn accessory SAR is required for Rev. 0, at 153.6 kbps, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

The 3G SAR test reduction procedure is applied to Rev. A, with Rev. 0 as the primary mode to determine body-worn accessory SAR test requirements. When SAR is not required for Rev. 0, the 3G SAR test reduction is applied with 1x RTT RC3 as the primary mode.

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 24 of 109

When SAR is required for EVDO Rev. A, SAR is measured with a Reverse Data Channel payload size of 4096 bits and a Termination Target of 16 slots defined for Subtype 2 Physical Layer configurations, using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0 or 1x RTT RC3, as appropriate.

8.4.5 Body SAR Measurements for EVDO Hotspot

Hotspot Body SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0. The 3G SAR test reduction procedure is applied to Rev. A, Subtype 2 Physical layer configuration, with Rev. 0 as the primary mode; otherwise, SAR is measured for Rev. A using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0. The AT is tested with a Reverse Data Channel rate of 153.6 kbps in Subtype 0/1 Physical Layer configurations; and a Reverse Data Channel payload size of 4096 bits and Termination Target of 16 slots in Subtype 2 Physical Layer configurations.

For EVDO data devices that also support 1x RTT voice and/or data operations, the 3G SAR test reduction procedure is applied to 1x RTT RC3 and RC1 with EVDO Rev. 0 and Rev. A as the respective primary modes. Otherwise, the 'Body-Worn Accessory SAR' procedures in the '3GPP2 CDMA 2000 1x Handsets' section are applied.

8.4.6 CDMA2000 1x Advanced

This device additionally supports 1x Advanced. Conducted powers are measured using SO75 with RC8 on the uplink and RC11 on the downlink per FCC KDB Publication 941225 D01v03r01. Smart blanking is disabled for all measurements. The EUT is configured with forward power control Mode 000 and reverse power control at 400 bps. Conducted powers are measured on an Agilent 8960 Series 10 Wireless Communications Test Set, Model E5515C using the CDMA2000 1x Advanced application, Option E1962B-410.

The 3G SAR test reduction procedure is applied to the 1x-Advanced transmission mode with 1x RTT RC3 as the primary mode. When SAR measurement is required, the 1x-Advanced power measurement configurations are used. The 1x Advanced SAR procedures are applied separately to head, body-worn accessory and other exposure conditions.

8.5 SAR Measurement Conditions for UMTS

8.5.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

8.5.2 Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1s". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 25 of 109

primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

8.5.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH_n, for the highest reported SAR configuration in 12.2 kbps RMC.

8.5.4 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

8.5.5 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

8.6 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

8.6.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

8.6.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

8.6.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 26 of 109

8.6.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

8.6.5 TDD

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05v02r04. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05v02r04. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

8.6.6 Downlink Only Carrier Aggregation

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. For every supported combination of downlink only carrier aggregation, additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

8.7 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 27 of 109

in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

8.7.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

8.7.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.7.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

8.7.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.7.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 28 of 109

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.7.6 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

8.7.7 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 8.7.6). When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.7.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 29 of 109

9 RF CONDUCTED POWERS

9.1 CDMA Conducted Powers

Table 9-1
Maximum Conducted Power

Band	Channel	Rule Part	Frequency	SO55 [dBm]	SO55 [dBm]	SO75 [dBm]	TDSO SO32 [dBm]	TDSO SO32 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. A [dBm]
	F-RC		MHz	RC1	RC3	RC11	FCH+SCH	FCH	(RTAP)	(RETAP)
Cellular	564	90S	820.1	25.03	25.00	25.10	25.20	25.15	25.07	25.13
Cellular	1013	22H	824.7	25.13	25.02	25.11	25.09	25.03	25.15	25.15
	384	22H	836.52	25.03	25.03	25.13	25.13	25.07	25.18	25.14
	777	22H	848.31	25.20	25.15	25.19	25.00	25.08	25.00	25.02
PCS	25	24E	1851.25	24.84	24.98	24.89	24.88	25.00	24.94	24.94
	600	24E	1880	24.86	24.92	24.85	24.80	24.88	24.94	24.98
	1175	24E	1908.75	24.97	24.80	24.91	24.81	24.82	24.87	24.90

Table 9-2
Reduced Conducted Power

Band	Channel	Rule Part	Frequency	SO55 [dBm]	SO55 [dBm]	SO75 [dBm]	TDSO SO32 [dBm]	TDSO SO32 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. A [dBm]
	F-RC		MHz	RC1	RC3	RC11	FCH+SCH	FCH	(RTAP)	(RETAP)
PCS	25	24E	1851.25	23.31	23.33	23.29	23.34	23.20	23.36	23.37
	600	24E	1880	23.32	23.30	23.35	23.33	23.33	23.34	23.38
	1175	24E	1908.75	23.33	23.29	23.38	23.25	23.48	23.36	23.31

Note: RC1 is only applicable for IS-95 compatibility. For FCC Rule Part 90S, Per FCC KDB Publication 447498 D01v06 4.1.g), only one channel is required since the device operates within the transmission range of 817.90 – 823.10 MHz.



Figure 9-1
Power Measurement Setup

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 30 of 109

9.2 GSM Conducted Powers

Table 9-3
Maximum Conducted Power

Maximum Burst-Averaged Output Power										
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	33.52	33.50	32.14	30.67	29.18	27.63	27.54	27.06	27.07
	190	33.64	33.57	32.05	30.51	29.03	27.57	27.53	27.13	27.18
	251	33.55	33.66	32.04	30.69	29.13	27.55	27.56	27.05	27.07
GSM 1900	512	30.50	30.65	29.10	27.14	25.55	26.11	26.09	25.53	25.61
	661	30.55	30.56	29.09	27.12	25.65	26.02	26.19	25.61	25.58
	810	30.65	30.54	29.07	27.20	25.52	26.03	26.06	25.66	25.70

Calculated Maximum Frame-Averaged Output Power										
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	24.49	24.47	26.12	26.41	26.17	18.60	21.52	22.80	24.06
	190	24.61	24.54	26.03	26.25	26.02	18.54	21.51	22.87	24.17
	251	24.52	24.63	26.02	26.43	26.12	18.52	21.54	22.79	24.06
GSM 1900	512	21.47	21.62	23.08	22.88	22.54	17.08	20.07	21.27	22.60
	661	21.52	21.53	23.07	22.86	22.64	16.99	20.17	21.35	22.57
	810	21.62	21.51	23.05	22.94	22.51	17.00	20.04	21.40	22.69

GSM 850	Frame	24.17	24.17	25.68	25.94	25.69	18.17	21.18	22.44	23.69
GSM 1900	Avg.Targets:	21.17	21.17	22.68	22.44	22.19	16.67	19.68	20.94	22.19

FCC ID ZNFQ710US		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 31 of 109

Note:

1. Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
2. GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
3. EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

GSM Class: B
GPRS Multislot class: 12 (Max 4 Tx uplink slots)
EDGE Multislot class: 12 (Max 4 Tx uplink slots)
DTM Multislot Class: N/A



Figure 9-2
Power Measurement Setup

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 32 of 109

9.3 UMTS Conducted Powers

Table 9-4
Maximum Conducted Power

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	25.13	25.03	25.11	24.46	24.43	24.34	24.40	24.32	24.50	-
99		12.2 kbps AMR	25.13	25.06	25.04	24.46	24.37	24.31	24.45	24.39	24.32	-
6	HSDPA	Subtest 1	25.03	25.18	25.13	24.43	24.48	24.31	24.31	24.34	24.30	0
6		Subtest 2	25.09	25.13	25.02	24.37	24.40	24.45	24.31	24.50	24.49	0
6		Subtest 3	24.54	24.55	24.61	23.92	23.88	23.88	23.91	23.88	23.88	0.5
6		Subtest 4	24.65	24.65	24.54	23.92	23.98	23.97	23.80	23.82	23.91	0.5
6	HSUPA	Subtest 1	25.03	25.18	25.06	24.43	24.46	24.33	24.38	24.46	24.47	0
6		Subtest 2	23.19	23.07	23.07	22.32	22.46	22.32	22.42	22.40	22.34	2
6		Subtest 3	24.04	24.12	24.13	23.41	23.34	23.41	23.41	23.49	23.31	1
6		Subtest 4	23.15	23.11	23.18	22.37	22.48	22.48	22.31	22.39	22.37	2
6		Subtest 5	25.00	25.12	25.18	24.40	24.37	24.34	24.40	24.41	24.32	0

Table 9-5
Reduced Conducted Power

3GPP 34.121 Subtest	AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
	1312	1412	1513	9262	9400	9538	
12.2 kbps RMC	23.42	23.42	23.36	23.37	23.49	23.31	-
12.2 kbps AMR	23.41	23.37	23.35	23.42	23.42	23.46	-
Subtest 1	23.30	23.46	23.33	23.39	23.47	23.47	0
Subtest 2	23.41	23.44	23.38	23.44	23.43	23.41	0
Subtest 3	22.80	22.95	22.98	22.94	22.98	22.93	0.5
Subtest 4	22.83	22.98	22.80	22.93	22.90	22.84	0.5
Subtest 1	23.32	23.30	23.30	23.49	23.47	23.49	0
Subtest 2	21.47	21.47	21.49	21.49	21.36	21.44	2
Subtest 3	22.48	22.39	22.45	22.45	22.49	22.47	1
Subtest 4	21.31	21.46	21.39	21.33	21.40	21.34	2
Subtest 5	23.32	23.44	23.46	23.37	23.43	23.39	0

This device does not support DC-HSDPA.



Figure 9-3
Power Measurement Setup

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 33 of 109

9.4 LTE Conducted Powers

9.4.1

LTE Band 12

Table 9-6
LTE Band 12 Conducted Powers - 10 MHz Bandwidth

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	25.39	0	0
	1	25	25.44		0
	1	49	25.38		0
	25	0	24.50	0-1	1
	25	12	24.45		1
	25	25	24.31		1
	50	0	24.36		1
16QAM	1	0	24.39	0-1	1
	1	25	24.48		1
	1	49	24.30		1
	25	0	23.31	0-2	2
	25	12	23.38		2
	25	25	23.31		2
	50	0	23.32		2
64QAM	1	0	23.30	0-2	2
	1	25	23.41		2
	1	49	23.22		2
	25	0	22.27	0-3	3
	25	12	22.32		3
	25	25	22.26		3
	50	0	22.20		3

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 34 of 109

Table 9-7
LTE Band 12 Conducted Powers - 5 MHz Bandwidth

LTE Band 12 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.30	25.50	25.34	0	0
	1	12	25.48	25.46	25.30		0
	1	24	25.39	25.46	25.46		0
	12	0	24.44	24.38	24.50	0-1	1
	12	6	24.49	24.48	24.31		1
	12	13	24.42	24.47	24.35		1
	25	0	24.42	24.46	24.35		1
16QAM	1	0	24.46	24.42	24.39	0-1	1
	1	12	24.42	24.46	24.36		1
	1	24	24.50	24.30	24.45		1
	12	0	23.39	23.31	23.42	0-2	2
	12	6	23.30	23.46	23.39		2
	12	13	23.43	23.31	23.46		2
	25	0	23.50	23.37	23.30		2
64QAM	1	0	23.41	23.42	23.32	0-2	2
	1	12	23.31	23.32	23.38		2
	1	24	23.37	23.40	23.36		2
	12	0	22.26	22.25	22.28	0-3	3
	12	6	22.16	22.26	22.21		3
	12	13	22.29	22.32	22.33		3
	25	0	22.47	22.48	22.39		3

Table 9-8
LTE Band 12 Conducted Powers - 3 MHz Bandwidth

LTE Band 12 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.49	25.44	25.35	0	0
	1	7	25.30	25.30	25.43		0
	1	14	25.46	25.47	25.46		0
	8	0	24.48	24.37	24.35	0-1	1
	8	4	24.34	24.40	24.47		1
	8	7	24.39	24.30	24.35		1
	15	0	24.43	24.50	24.32		1
16QAM	1	0	24.39	24.46	24.34	0-1	1
	1	7	24.34	24.41	24.30		1
	1	14	24.42	24.39	24.38		1
	8	0	23.37	23.43	23.31	0-2	2
	8	4	23.34	23.45	23.40		2
	8	7	23.37	23.50	23.30		2
	15	0	23.44	23.33	23.50		2
64QAM	1	0	23.27	23.28	23.36	0-2	2
	1	7	23.29	23.32	23.22		2
	1	14	23.39	23.39	23.38		2
	8	0	22.31	22.35	22.30	0-3	3
	8	4	22.23	22.30	22.31		3
	8	7	22.23	22.26	22.31		3
	15	0	22.38	22.34	22.43		3

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 35 of 109	

Table 9-9
LTE Band 12 Conducted Powers -1.4 MHz Bandwidth

LTE Band 12 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.39	25.35	25.40	0	0
	1	2	25.37	25.33	25.39		0
	1	5	25.46	25.42	25.32		0
	3	0	25.35	25.36	25.42		0
	3	2	25.31	25.38	25.31		0
	3	3	25.48	25.38	25.32		0
	6	0	24.39	24.32	24.43	0-1	1
16QAM	1	0	24.33	24.47	24.49	0-1	1
	1	2	24.32	24.36	24.44		1
	1	5	24.42	24.35	24.44		1
	3	0	24.39	24.36	24.47		1
	3	2	24.41	24.31	24.34		1
	3	3	24.35	24.41	24.35		1
	6	0	23.39	23.41	23.35	0-2	2
64QAM	1	0	23.20	23.23	23.32	0-2	2
	1	2	23.33	23.29	23.27		2
	1	5	23.37	23.31	23.33		2
	3	0	23.29	23.38	23.33		2
	3	2	23.25	23.27	23.20		2
	3	3	23.37	23.33	23.35		2
	6	0	22.24	22.28	22.24	0-3	3

FCC ID ZNFQ710US		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 36 of 109

9.4.2

LTE Band 13

Table 9-10
LTE Band 13 Conducted Powers - 10 MHz Bandwidth

LTE Band 13 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	25.44	0	0
	1	25	25.34		0
	1	49	25.32		0
	25	0	24.46	0-1	1
	25	12	24.38		1
	25	25	24.30		1
	50	0	24.34		1
16QAM	1	0	24.43	0-1	1
	1	25	24.33		1
	1	49	24.42		1
	25	0	23.31	0-2	2
	25	12	23.33		2
	25	25	23.30		2
	50	0	23.33		2
64QAM	1	0	23.40	0-2	2
	1	25	23.15		2
	1	49	23.22		2
	25	0	22.16	0-3	3
	25	12	22.25		3
	25	25	22.30		3
	50	0	22.15		3

FCC ID ZNFQ710US		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 37 of 109

Table 9-11
LTE Band 13 Conducted Powers - 5 MHz Bandwidth
LTE Band 13
5 MHz Bandwidth

Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	25.42	0	0
	1	12	25.41		0
	1	24	25.48		0
	12	0	24.49	0-1	1
	12	6	24.48		1
	12	13	24.38		1
	25	0	24.37		1
16QAM	1	0	24.40	0-1	1
	1	12	24.33		1
	1	24	24.33		1
	12	0	23.32	0-2	2
	12	6	23.34		2
	12	13	23.46		2
	25	0	23.50		2
64QAM	1	0	23.15	0-2	2
	1	12	23.16		2
	1	24	23.22		2
	12	0	22.20	0-3	3
	12	6	22.06		3
	12	13	22.15		3
	25	0	22.23		3

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 	Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset
Page 38 of 109		

9.4.3

LTE Band 26 (Cell)

Table 9-12
LTE Band 26 (Cell) Conducted Powers - 15 MHz Bandwidth

LTE Band 26 (Cell) 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26865 (831.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.55	0	0
	1	36	24.63		0
	1	74	24.67		0
	36	0	23.59	0-1	1
	36	18	23.51		1
	36	37	23.70		1
	75	0	23.68		1
16QAM	1	0	23.56	0-1	1
	1	36	23.46		1
	1	74	23.44		1
	36	0	22.57	0-2	2
	36	18	22.64		2
	36	37	22.44		2
	75	0	22.48		2
64QAM	1	0	22.28	0-2	2
	1	36	22.50		2
	1	74	22.38		2
	36	0	21.49	0-3	3
	36	18	21.47		3
	36	37	21.40		3
	75	0	21.53		3

Note: LTE Band 26 (Cell) at 15 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 39 of 109

Table 9-13
LTE Band 26 (Cell) Conducted Powers - 10 MHz Bandwidth

LTE Band 26 (Cell) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26740 (819.0 MHz)	26865 (831.5 MHz)	26990 (844.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.55	24.51	24.54	0	0
	1	25	24.50	24.40	24.47		0
	1	49	24.57	24.59	24.50		0
	25	0	23.66	23.55	23.41	0-1	1
	25	12	23.51	23.40	23.51		1
	25	25	23.37	23.67	23.53		1
	50	0	23.63	23.55	23.37		1
16QAM	1	0	23.54	23.51	23.65	0-1	1
	1	25	23.42	23.55	23.57		1
	1	49	23.39	23.62	23.57		1
	25	0	22.64	22.42	22.50	0-2	2
	25	12	22.57	22.54	22.56		2
	25	25	22.59	22.53	22.52		2
	50	0	22.50	22.52	22.58		2
64QAM	1	0	22.38	22.43	22.55	0-2	2
	1	25	22.42	22.61	22.55		2
	1	49	22.38	22.54	22.48		2
	25	0	21.47	21.42	21.34	0-3	3
	25	12	21.44	21.37	21.49		3
	25	25	21.48	21.33	21.54		3
	50	0	21.40	21.58	21.50		3

Table 9-14
LTE Band 26 (Cell) Conducted Powers - 5 MHz Bandwidth

LTE Band 26 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26715 (816.5 MHz)	26865 (831.5 MHz)	27015 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.38	24.47	24.36	0	0
	1	12	24.57	24.61	24.45		0
	1	24	24.55	24.40	24.61		0
	12	0	23.46	23.40	23.39	0-1	1
	12	6	23.38	23.65	23.53		1
	12	13	23.66	23.42	23.53		1
	25	0	23.53	23.56	23.46		1
16QAM	1	0	23.54	23.54	23.53	0-1	1
	1	12	23.48	23.46	23.48		1
	1	24	23.50	23.44	23.50		1
	12	0	22.47	22.52	22.50	0-2	2
	12	6	22.46	22.45	22.44		2
	12	13	22.45	22.49	22.45		2
	25	0	22.62	22.43	22.52		2
64QAM	1	0	22.50	22.37	22.68	0-2	2
	1	12	22.39	22.30	22.52		2
	1	24	22.35	22.32	22.39		2
	12	0	21.49	21.44	21.45	0-3	3
	12	6	21.40	21.56	21.38		3
	12	13	21.35	21.57	21.37		3
	25	0	21.47	21.30	21.44		3

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 40 of 109	

Table 9-15
LTE Band 26 (Cell) Conducted Powers - 3 MHz Bandwidth

LTE Band 26 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26705 (815.5 MHz)	26865 (831.5 MHz)	27025 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.54	24.58	24.48	0	0
	1	7	24.62	24.38	24.66		0
	1	14	24.48	24.67	24.62		0
	8	0	23.46	23.62	23.51	0-1	1
	8	4	23.51	23.48	23.35		1
	8	7	23.63	23.46	23.63		1
16QAM	15	0	23.57	23.50	23.37	0-1	1
	1	0	23.53	23.68	23.48		1
	1	7	23.48	23.60	23.47		1
	1	14	23.43	23.61	23.51	0-2	1
	8	0	22.57	22.52	22.43		2
	8	4	22.61	22.68	22.43		2
64QAM	8	7	22.46	22.47	22.48	0-2	2
	15	0	22.55	22.53	22.52		2
	1	0	22.39	22.51	22.50	0-2	2
	1	7	22.47	22.35	22.32		2
	1	14	22.42	22.38	22.50		2
	8	0	21.56	21.52	21.41	0-3	3
8	4	21.48	21.51	21.39	3		
8	7	21.43	21.39	21.41	3		
	15	0	21.45	21.37	21.34		3

Table 9-16
LTE Band 26 (Cell) Conducted Powers -1.4 MHz Bandwidth

LTE Band 26 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26697 (814.7 MHz)	26865 (831.5 MHz)	27033 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.43	24.58	24.51	0	0
	1	2	24.43	24.37	24.59		0
	1	5	24.51	24.41	24.49		0
	3	0	24.59	24.50	24.42		0
	3	2	24.65	24.65	24.54		0
	3	3	24.57	24.59	24.56		0
	6	0	23.55	23.63	23.40	0-1	1
16QAM	1	0	23.57	23.59	23.41	0-1	1
	1	2	23.36	23.52	23.69		1
	1	5	23.49	23.63	23.64		1
	3	0	23.53	23.46	23.49		1
	3	2	23.48	23.63	23.39		1
	3	3	23.53	23.48	23.41	1	
6	0	22.45	22.63	22.43	0-2	2	
64QAM	1	0	22.47	22.56	22.31	0-2	2
	1	2	22.40	22.40	22.56		2
	1	5	22.38	22.52	22.62		2
	3	0	22.47	22.28	22.40		2
	3	2	22.37	22.58	22.44		2
	3	3	22.39	22.35	22.42		2
	6	0	21.37	21.46	21.35	0-3	3

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 41 of 109	

9.4.4

LTE Band 66 (AWS)

Table 9-17
LTE Band 66 (AWS) Conducted Powers - 20 MHz Bandwidth

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.41	24.36	24.46	0	0
	1	50	24.44	24.30	24.31		0
	1	99	24.40	24.46	24.36		0
	50	0	23.31	23.38	23.31	0-1	1
	50	25	23.41	23.31	23.43		1
	50	50	23.41	23.35	23.49		1
	100	0	23.40	23.38	23.48		1
16QAM	1	0	23.33	23.41	23.45	0-1	1
	1	50	23.40	23.39	23.46		1
	1	99	23.33	23.46	23.44		1
	50	0	22.37	22.41	22.45	0-2	2
	50	25	22.50	22.44	22.39		2
	50	50	22.44	22.34	22.45		2
	100	0	22.38	22.45	22.33		2
64QAM	1	0	22.30	22.33	22.33	0-2	2
	1	50	22.35	22.23	22.36		2
	1	99	22.28	22.41	22.42		2
	50	0	21.29	21.33	21.31	0-3	3
	50	25	21.41	21.43	21.30		3
	50	50	21.43	21.32	21.29		3
	100	0	21.21	21.37	21.21		3

Table 9-18
LTE Band 66 (AWS) Conducted Powers - 15 MHz Bandwidth

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.38	24.39	24.40	0	0
	1	36	24.35	24.30	24.30		0
	1	74	24.36	24.48	24.50		0
	36	0	23.37	23.44	23.39	0-1	1
	36	18	23.44	23.41	23.49		1
	36	37	23.30	23.49	23.35		1
	75	0	23.42	23.40	23.32		1
16QAM	1	0	23.42	23.40	23.38	0-1	1
	1	36	23.38	23.47	23.39		1
	1	74	23.36	23.36	23.45		1
	36	0	22.35	22.38	22.30	0-2	2
	36	18	22.47	22.35	22.48		2
	36	37	22.33	22.33	22.49		2
	75	0	22.37	22.49	22.40		2
64QAM	1	0	22.41	22.27	22.30	0-2	2
	1	36	22.27	22.36	22.33		2
	1	74	22.26	22.25	22.35		2
	36	0	21.29	21.24	21.29	0-3	3
	36	18	21.40	21.33	21.48		3
	36	37	21.29	21.19	21.43		3
	75	0	21.37	21.39	21.28		3

FCC ID ZNFQ710US		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 42 of 109

Table 9-19
LTE Band 66 (AWS) Conducted Powers - 10 MHz Bandwidth

LTE Band 66 (AWS) 10 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	24.50	24.49	24.46	0	0	
	1	25	24.42	24.37	24.31		0	
	1	49	24.35	24.39	24.50		0	
	25	0	23.35	23.48	23.36	0-1	1	
	25	12	23.47	23.34	23.42		1	
	25	25	23.39	23.40	23.49		1	
16QAM	50	0	23.30	23.47	23.35	0-1	1	
	1	0	23.33	23.30	23.33		1	
	1	25	23.49	23.38	23.39		1	
	1	49	23.42	23.35	23.43	0-2	1	
	25	0	22.31	22.39	22.49		2	
	25	12	22.33	22.46	22.45		2	
64QAM	25	25	22.41	22.35	22.38	0-2	2	
	50	0	22.49	22.45	22.42		2	
	64QAM	1	0	22.25	22.29	22.21	0-2	2
		1	25	22.36	22.30	22.26		2
		1	49	22.35	22.32	22.29		2
		25	0	21.16	21.24	21.46	0-3	3
25		12	21.24	21.41	21.29	3		
25		25	21.29	21.27	21.22	3		
50	0	21.36	21.44	21.41		3		

Table 9-20
LTE Band 66 (AWS) Conducted Powers - 5 MHz Bandwidth

LTE Band 66 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.32	24.35	24.36	0	0
	1	12	24.45	24.48	24.32		0
	1	24	24.35	24.38	24.47		0
	12	0	23.36	23.37	23.32	0-1	1
	12	6	23.50	23.37	23.50		1
	12	13	23.40	23.34	23.43		1
16QAM	25	0	23.33	23.44	23.32	0-1	1
	1	0	23.33	23.45	23.38		1
	1	12	23.39	23.44	23.30		1
	1	24	23.49	23.35	23.34	0-2	1
	12	0	22.46	22.49	22.48		2
	12	6	22.38	22.37	22.34		2
64QAM	12	13	22.37	22.45	22.40	0-2	2
	25	0	22.36	22.38	22.41		2
	1	0	22.18	22.38	22.22		0-2
	1	12	22.25	22.39	22.28	2	
	1	24	22.43	22.30	22.21	2	
	64QAM	12	0	21.40	21.44	21.32	0-3
12		6	21.34	21.28	21.27	3	
12		13	21.31	21.38	21.36	3	
25		0	21.30	21.27	21.41		3

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 43 of 109	

Table 9-21
LTE Band 66 (AWS) Conducted Powers - 3 MHz Bandwidth

LTE Band 66 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.30	24.30	24.33	0	0
	1	7	24.34	24.37	24.34		0
	1	14	24.30	24.48	24.30		0
	8	0	23.31	23.49	23.33	0-1	1
	8	4	23.49	23.47	23.42		1
	8	7	23.38	23.30	23.50		1
	15	0	23.33	23.38	23.37		1
16QAM	1	0	23.38	23.41	23.45	0-1	1
	1	7	23.30	23.44	23.44		1
	1	14	23.46	23.36	23.37		1
	8	0	22.41	22.46	22.49	0-2	2
	8	4	22.42	22.39	22.38		2
	8	7	22.50	22.41	22.44		2
	15	0	22.33	22.45	22.49		2
64QAM	1	0	22.26	22.40	22.33	0-2	2
	1	7	22.24	22.33	22.29		2
	1	14	22.34	22.32	22.34		2
	8	0	21.25	21.41	21.46	0-3	3
	8	4	21.41	21.26	21.31		3
	8	7	21.34	21.39	21.40		3
	15	0	21.19	21.28	21.44		3

Table 9-22
LTE Band 66 (AWS) Conducted Powers -1.4 MHz Bandwidth

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.31	24.40	24.47	0	0
	1	2	24.47	24.44	24.45		0
	1	5	24.32	24.45	24.31		0
	3	0	24.32	24.31	24.38		0
	3	2	24.47	24.50	24.49		0
	3	3	24.47	24.33	24.42		0
	6	0	23.42	23.37	23.42	0-1	1
16QAM	1	0	23.44	23.31	23.39	0-1	1
	1	2	23.34	23.34	23.47		1
	1	5	23.39	23.36	23.42		1
	3	0	23.44	23.48	23.48		1
	3	2	23.43	23.39	23.49		1
	3	3	23.50	23.50	23.46		1
	6	0	22.33	22.45	22.30	0-2	2
64QAM	1	0	22.33	22.23	22.31	0-2	2
	1	2	22.21	22.29	22.41		2
	1	5	22.31	22.31	22.33		2
	3	0	22.35	22.34	22.35		2
	3	2	22.31	22.31	22.39		2
	3	3	22.38	22.39	22.45		2
	6	0	21.21	21.31	21.22	0-3	3

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 44 of 109	

Table 9-23
LTE Band 66 (AWS) Reduced Conducted Powers - 20 MHz Bandwidth

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.40	23.43	23.39	0	0
	1	50	23.46	23.36	23.41		0
	1	99	23.31	23.37	23.47		0
	50	0	23.31	23.36	23.37	0-1	0
	50	25	23.38	23.38	23.45		0
	50	50	23.35	23.42	23.43		0
16QAM	100	0	23.37	23.35	23.35	0-1	0
	1	0	23.32	23.43	23.43		0
	1	50	23.34	23.45	23.38		0
	1	99	23.35	23.47	23.42	0-2	0
	50	0	22.46	22.35	22.42		1
	50	25	22.39	22.46	22.38		1
64QAM	50	50	22.37	22.42	22.45	0-2	1
	100	0	22.30	22.39	22.44		1
	1	0	22.17	22.38	22.28	0-2	1
	1	50	22.29	22.44	22.37		1
	1	99	22.31	22.31	22.34		1
	50	0	21.35	21.32	21.39	0-3	2
	50	25	21.23	21.37	21.21		2
	50	50	21.36	21.38	21.42		2
100	0	21.25	21.29	21.42	2		

Table 9-24
LTE Band 66 (AWS) Reduced Conducted Powers - 15 MHz Bandwidth

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.47	23.47	23.35	0	0
	1	36	23.49	23.32	23.50		0
	1	74	23.41	23.44	23.30		0
	36	0	23.34	23.49	23.37	0-1	0
	36	18	23.42	23.34	23.30		0
	36	37	23.48	23.41	23.42		0
16QAM	75	0	23.45	23.38	23.40	0-1	0
	1	0	23.39	23.36	23.49		0
	1	36	23.44	23.47	23.38		0
	1	74	23.30	23.36	23.40	0-2	0
	36	0	22.31	22.47	22.45		1
	36	18	22.38	22.36	22.45		1
64QAM	36	37	22.46	22.49	22.48	0-2	1
	75	0	22.35	22.33	22.40		1
	1	0	22.35	22.22	22.47		0-2
	1	36	22.40	22.37	22.35	1	
	1	74	22.14	22.30	22.31	1	
	36	0	21.29	21.31	21.38	0-3	2
36	18	21.27	21.27	21.29	2		
36	37	21.36	21.48	21.45	2		
64QAM	75	0	21.27	21.20	21.24		2

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 45 of 109	

Table 9-25
LTE Band 66 (AWS) Reduced Conducted Powers - 10 MHz Bandwidth

LTE Band 66 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.47	23.34	23.31	0	0
	1	25	23.34	23.50	23.35		0
	1	49	23.43	23.30	23.43		0
	25	0	23.40	23.32	23.46	0-1	0
	25	12	23.50	23.46	23.44		0
	25	25	23.35	23.45	23.37		0
16QAM	50	0	23.44	23.45	23.40	0-1	0
	1	0	23.39	23.40	23.41		0
	1	25	23.36	23.48	23.42		0
	1	49	23.32	23.31	23.45	0-2	0
	25	0	22.47	22.41	22.31		1
	25	12	22.48	22.42	22.50		1
64QAM	25	25	22.36	22.45	22.31	0-2	1
	50	0	22.33	22.41	22.46		1
	1	0	22.27	22.32	22.38	0-2	1
	1	25	22.24	22.48	22.26		1
	1	49	22.16	22.15	22.40		1
	25	0	21.43	21.39	21.19	0-3	2
	25	12	21.42	21.27	21.38		2
	25	25	21.20	21.39	21.17		2
	50	0	21.31	21.35	21.30		2

Table 9-26
LTE Band 66 (AWS) Reduced Conducted Powers - 5 MHz Bandwidth

LTE Band 66 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.34	23.49	23.35	0	0
	1	12	23.40	23.42	23.50		0
	1	24	23.42	23.38	23.43		0
	12	0	23.35	23.31	23.31	0-1	0
	12	6	23.48	23.44	23.49		0
	12	13	23.45	23.36	23.46		0
16QAM	25	0	23.48	23.34	23.38	0-1	0
	1	0	23.37	23.36	23.39		0
	1	12	23.49	23.39	23.45		0
	1	24	23.33	23.45	23.47	0-2	0
	12	0	22.33	22.44	22.36		1
	12	6	22.38	22.48	22.48		1
64QAM	12	13	22.34	22.38	22.49	0-2	1
	25	0	22.45	22.35	22.34		1
	1	0	22.30	22.28	22.36	0-2	1
	1	12	22.32	22.25	22.44		1
	1	24	22.22	22.36	22.31		1
	12	0	21.31	21.36	21.25	0-3	2
	12	6	21.35	21.39	21.38		2
	12	13	21.32	21.26	21.49		2
	25	0	21.36	21.33	21.20		2

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 46 of 109	

Table 9-27
LTE Band 66 (AWS) Reduced Conducted Powers - 3 MHz Bandwidth

LTE Band 66 (AWS) 3 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	23.46	23.39	23.44	0	0	
	1	7	23.34	23.40	23.33		0	
	1	14	23.41	23.36	23.36		0	
	8	0	23.32	23.36	23.35	0-1	0	
	8	4	23.35	23.32	23.49		0	
	8	7	23.36	23.36	23.50		0	
16QAM	15	0	23.49	23.41	23.46	0-1	0	
	1	0	23.41	23.44	23.36		0	
	1	7	23.35	23.47	23.46		0	
	1	14	23.36	23.40	23.36	0-2	0	
	8	0	22.33	22.48	22.33		1	
	8	4	22.36	22.48	22.50		1	
64QAM	8	7	22.41	22.33	22.38	0-2	1	
	15	0	22.47	22.40	22.41		1	
	64QAM	1	0	22.35	22.41	22.28	0-2	1
		1	7	22.32	22.47	22.31		1
		1	14	22.28	22.24	22.31		1
		8	0	21.21	21.37	21.19	0-3	2
8		4	21.32	21.40	21.41	2		
8		7	21.39	21.27	21.27	2		
	15	0	21.38	21.40	21.32		2	

Table 9-28
LTE Band 66 (AWS) Reduced Conducted Powers -1.4 MHz Bandwidth

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.50	23.46	23.36	0	0
	1	2	23.37	23.50	23.30		0
	1	5	23.30	23.35	23.41		0
	3	0	23.39	23.37	23.37		0
	3	2	23.45	23.49	23.48		0
	3	3	23.40	23.35	23.41		0
	6	0	23.30	23.46	23.39	0-1	0
16QAM	1	0	23.49	23.33	23.47	0-1	0
	1	2	23.43	23.46	23.44		0
	1	5	23.44	23.36	23.44		0
	3	0	23.37	23.45	23.36		0
	3	2	23.33	23.37	23.36		0
	3	3	23.50	23.36	23.31	0	
64QAM	6	0	22.44	22.48	22.42	0-2	1
	1	0	22.43	22.26	22.37	0-2	1
	1	2	22.35	22.33	22.43		1
	1	5	22.34	22.31	22.44		1
	3	0	22.22	22.40	22.26		1
	3	2	22.23	22.22	22.35		1
	3	3	22.42	22.25	22.29	1	
6	0	21.39	21.37	21.39	0-3	2	

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 47 of 109	

9.4.5

LTE Band 25 (PCS)

Table 9-29
LTE Band 25 (PCS) Conducted Powers - 20 MHz Bandwidth

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.34	24.42	24.42	0	0
	1	50	24.35	24.30	24.34		0
	1	99	24.39	24.44	24.48		0
	50	0	23.34	23.32	23.33	0-1	1
	50	25	23.34	23.47	23.36		1
	50	50	23.37	23.31	23.50		1
	100	0	23.49	23.43	23.45		1
16QAM	1	0	23.45	23.36	23.31	0-1	1
	1	50	23.42	23.31	23.42		1
	1	99	23.47	23.45	23.36		1
	50	0	22.49	22.41	22.46	0-2	2
	50	25	22.50	22.48	22.48		2
	50	50	22.31	22.35	22.43		2
	100	0	22.35	22.35	22.41		2
64QAM	1	0	22.41	22.26	22.26	0-2	2
	1	50	22.25	22.30	22.33		2
	1	99	22.33	22.29	22.34		2
	50	0	21.49	21.33	21.40	0-3	3
	50	25	21.44	21.38	21.37		3
	50	50	21.25	21.31	21.35		3
	100	0	21.21	21.19	21.33		3

Table 9-30
LTE Band 25 (PCS) Conducted Powers - 15 MHz Bandwidth

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.50	24.35	24.40	0	0
	1	36	24.40	24.48	24.35		0
	1	74	24.37	24.34	24.42		0
	36	0	23.41	23.33	23.46	0-1	1
	36	18	23.40	23.34	23.34		1
	36	37	23.47	23.40	23.46		1
	75	0	23.32	23.46	23.31		1
16QAM	1	0	23.45	23.35	23.30	0-1	1
	1	36	23.36	23.39	23.35		1
	1	74	23.50	23.43	23.33		1
	36	0	22.48	22.38	22.47	0-2	2
	36	18	22.49	22.36	22.43		2
	36	37	22.40	22.35	22.30		2
	75	0	22.50	22.36	22.37		2
64QAM	1	0	22.33	22.29	22.14	0-2	2
	1	36	22.28	22.34	22.30		2
	1	74	22.36	22.29	22.32		2
	36	0	21.36	21.28	21.38	0-3	3
	36	18	21.44	21.22	21.34		3
	36	37	21.27	21.22	21.19		3
	75	0	21.48	21.26	21.27		3

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 48 of 109

Table 9-31
LTE Band 25 (PCS) Conducted Powers - 10 MHz Bandwidth

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.43	24.42	24.42	0	0
	1	25	24.38	24.49	24.33		0
	1	49	24.41	24.34	24.39		0
	25	0	23.45	23.32	23.46	0-1	1
	25	12	23.40	23.44	23.45		1
	25	25	23.42	23.30	23.35		1
	50	0	23.41	23.36	23.43		1
16QAM	1	0	23.36	23.44	23.45	0-1	1
	1	25	23.48	23.44	23.38		1
	1	49	23.41	23.34	23.30		1
	25	0	22.35	22.36	22.32	0-2	2
	25	12	22.40	22.45	22.34		2
	25	25	22.49	22.45	22.43		2
	50	0	22.49	22.41	22.46		2
64QAM	1	0	22.30	22.35	22.43	0-2	2
	1	25	22.41	22.42	22.27		2
	1	49	22.31	22.26	22.26		2
	25	0	21.33	21.35	21.20	0-3	3
	25	12	21.33	21.44	21.20		3
	25	25	21.44	21.34	21.35		3
	50	0	21.48	21.34	21.46		3

Table 9-32
LTE Band 25 (PCS) Conducted Powers - 5 MHz Bandwidth

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.39	24.42	24.35	0	0
	1	12	24.38	24.37	24.49		0
	1	24	24.44	24.48	24.34		0
	12	0	23.46	23.41	23.33	0-1	1
	12	6	23.30	23.39	23.44		1
	12	13	23.44	23.46	23.33		1
	25	0	23.37	23.43	23.34		1
16QAM	1	0	23.49	23.41	23.43	0-1	1
	1	12	23.32	23.31	23.33		1
	1	24	23.43	23.33	23.50		1
	12	0	22.39	22.44	22.36	0-2	2
	12	6	22.37	22.40	22.44		2
	12	13	22.33	22.42	22.43		2
	25	0	22.35	22.34	22.49		2
64QAM	1	0	22.47	22.39	22.42	0-2	2
	1	12	22.16	22.15	22.28		2
	1	24	22.30	22.23	22.45		2
	12	0	21.25	21.28	21.30	0-3	3
	12	6	21.30	21.25	21.40		3
	12	13	21.27	21.33	21.42		3
	25	0	21.30	21.28	21.39		3

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 49 of 109	

Table 9-33
LTE Band 25 (PCS) Conducted Powers - 3 MHz Bandwidth

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.50	24.30	24.39	0	0
	1	7	24.45	24.41	24.38		0
	1	14	24.45	24.32	24.31		0
	8	0	23.49	23.39	23.47	0-1	1
	8	4	23.42	23.46	23.30		1
	8	7	23.38	23.33	23.39		1
16QAM	15	0	23.31	23.33	23.45	0-1	1
	1	0	23.37	23.30	23.31		1
	1	7	23.32	23.39	23.36		1
	1	14	23.44	23.34	23.44	0-2	1
	8	0	22.43	22.45	22.41		2
	8	4	22.44	22.45	22.36		2
64QAM	8	7	22.35	22.43	22.33	0-2	2
	15	0	22.49	22.40	22.30		2
	1	0	22.26	22.14	22.28		0-2
	1	7	22.24	22.37	22.30	2	
	1	14	22.38	22.29	22.33	0-3	
	8	0	21.34	21.33	21.28		3
8	4	21.35	21.30	21.22	3		
64QAM	8	7	21.33	21.34	21.31	0-3	3
	15	0	21.42	21.25	21.14		3

Table 9-34
LTE Band 25 (PCS) Conducted Powers -1.4 MHz Bandwidth

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.47	24.30	24.34	0	0
	1	2	24.47	24.36	24.32		0
	1	5	24.39	24.43	24.31		0
	3	0	24.40	24.38	24.38		0
	3	2	24.32	24.50	24.50		0
	3	3	24.42	24.39	24.39		0
	6	0	23.40	23.43	23.38	0-1	1
16QAM	1	0	23.45	23.45	23.31	0-1	1
	1	2	23.45	23.33	23.42		1
	1	5	23.38	23.40	23.45		1
	3	0	23.31	23.48	23.35		1
	3	2	23.48	23.47	23.31		1
	3	3	23.32	23.45	23.41	1	
64QAM	6	0	22.48	22.45	22.34	0-2	2
	1	0	22.43	22.42	22.25	0-2	2
	1	2	22.29	22.25	22.30		2
	1	5	22.35	22.33	22.29		2
	3	0	22.16	22.35	22.28		2
	3	2	22.43	22.34	22.28		2
	3	3	22.22	22.42	22.26		2
6	0	21.35	21.34	21.25	0-3	3	

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 50 of 109	

Table 9-35
LTE Band 25 (PCS) Reduced Conducted Powers - 20 MHz Bandwidth

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.41	23.38	23.30	0	0
	1	50	23.32	23.39	23.48		0
	1	99	23.40	23.45	23.32		0
	50	0	23.41	23.44	23.46	0-1	0
	50	25	23.43	23.37	23.34		0
	50	50	23.42	23.44	23.40		0
	100	0	23.32	23.40	23.45		0
16QAM	1	0	23.39	23.37	23.35	0-1	0
	1	50	23.34	23.48	23.44		0
	1	99	23.36	23.31	23.36		0
	50	0	22.40	22.34	22.46	0-2	1
	50	25	22.31	22.42	22.41		1
	50	50	22.45	22.36	22.41		1
	100	0	22.33	22.32	22.35		1
64QAM	1	0	22.25	22.30	22.18	0-2	1
	1	50	22.33	22.32	22.43		1
	1	99	22.24	22.21	22.36		1
	50	0	21.26	21.20	21.35	0-3	2
	50	25	21.17	21.37	21.38		2
	50	50	21.30	21.29	21.34		2
	100	0	21.30	21.26	21.33		2

Table 9-36
LTE Band 25 (PCS) Reduced Conducted Powers - 15 MHz Bandwidth

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.30	23.37	23.42	0	0
	1	36	23.30	23.42	23.43		0
	1	74	23.48	23.35	23.44		0
	36	0	23.40	23.42	23.39	0-1	0
	36	18	23.43	23.49	23.43		0
	36	37	23.31	23.35	23.30		0
	75	0	23.36	23.40	23.42		0
16QAM	1	0	23.40	23.38	23.49	0-1	0
	1	36	23.38	23.45	23.41		0
	1	74	23.30	23.50	23.46		0
	36	0	22.48	22.33	22.38	0-2	1
	36	18	22.31	22.45	22.46		1
	36	37	22.39	22.34	22.47		1
	75	0	22.34	22.31	22.36		1
64QAM	1	0	22.26	22.32	22.47	0-2	1
	1	36	22.33	22.39	22.29		1
	1	74	22.20	22.33	22.29		1
	36	0	21.37	21.25	21.31	0-3	2
	36	18	21.20	21.37	21.43		2
	36	37	21.23	21.18	21.31		2
	75	0	21.19	21.14	21.35		2

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 51 of 109	

Table 9-37
LTE Band 25 (PCS) Reduced Conducted Powers - 10 MHz Bandwidth

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.36	23.49	23.46	0	0
	1	25	23.46	23.32	23.47		0
	1	49	23.50	23.44	23.43		0
	25	0	23.36	23.30	23.49	0-1	0
	25	12	23.48	23.34	23.35		0
	25	25	23.30	23.30	23.45		0
	50	0	23.44	23.35	23.50		0
16QAM	1	0	23.42	23.34	23.50	0-1	0
	1	25	23.31	23.32	23.39		0
	1	49	23.41	23.47	23.30		0
	25	0	22.31	22.38	22.48	0-2	1
	25	12	22.30	22.44	22.36		1
	25	25	22.31	22.37	22.37		1
	50	0	22.34	22.30	22.31		1
64QAM	1	0	22.34	22.18	22.37	0-2	1
	1	25	22.15	22.27	22.24		1
	1	49	22.29	22.35	22.26		1
	25	0	21.30	21.35	21.38	0-3	2
	25	12	21.20	21.28	21.31		2
	25	25	21.16	21.28	21.33		2
	50	0	21.32	21.24	21.23		2

Table 9-38
LTE Band 25 (PCS) Reduced Conducted Powers - 5 MHz Bandwidth

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.40	23.49	23.44	0	0
	1	12	23.32	23.34	23.31		0
	1	24	23.38	23.43	23.37		0
	12	0	23.46	23.45	23.42	0-1	0
	12	6	23.49	23.34	23.33		0
	12	13	23.47	23.45	23.32		0
	25	0	23.32	23.42	23.33		0
16QAM	1	0	23.42	23.38	23.42	0-1	0
	1	12	23.38	23.35	23.34		0
	1	24	23.41	23.47	23.35		0
	12	0	22.38	22.35	22.36	0-2	1
	12	6	22.48	22.33	22.31		1
	12	13	22.38	22.42	22.43		1
	25	0	22.43	22.44	22.50		1
64QAM	1	0	22.40	22.25	22.38	0-2	1
	1	12	22.26	22.33	22.21		1
	1	24	22.28	22.38	22.26		1
	12	0	21.33	21.21	21.26	0-3	2
	12	6	21.39	21.23	21.20		2
	12	13	21.31	21.40	21.34		2
	25	0	21.31	21.28	21.41		2

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 52 of 109	

Table 9-39
LTE Band 25 (PCS) Reduced Conducted Powers - 3 MHz Bandwidth

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.30	23.39	23.37	0	0
	1	7	23.43	23.42	23.42		0
	1	14	23.37	23.49	23.40		0
	8	0	23.49	23.32	23.50	0-1	0
	8	4	23.44	23.43	23.47		0
	8	7	23.42	23.36	23.35		0
	15	0	23.36	23.31	23.30		0
16QAM	1	0	23.46	23.39	23.32	0-1	0
	1	7	23.31	23.31	23.43		0
	1	14	23.41	23.41	23.31		0
	8	0	22.36	22.50	22.38	0-2	1
	8	4	22.49	22.39	22.40		1
	8	7	22.33	22.46	22.33		1
	15	0	22.31	22.50	22.43		1
64QAM	1	0	22.44	22.38	22.23	0-2	1
	1	7	22.28	22.19	22.29		1
	1	14	22.28	22.36	22.26		1
	8	0	21.34	21.44	21.29	0-3	2
	8	4	21.37	21.32	21.38		2
	8	7	21.24	21.42	21.32		2
	15	0	21.28	21.33	21.27		2

Table 9-40
LTE Band 25 (PCS) Reduced Conducted Powers -1.4 MHz Bandwidth

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.30	23.35	23.36	0	0
	1	2	23.32	23.37	23.39		0
	1	5	23.33	23.42	23.46		0
	3	0	23.42	23.41	23.30		0
	3	2	23.38	23.35	23.35		0
	3	3	23.42	23.30	23.41		0
	6	0	23.32	23.34	23.49	0-1	0
16QAM	1	0	23.48	23.41	23.45	0-1	0
	1	2	23.49	23.39	23.30		0
	1	5	23.50	23.40	23.49		0
	3	0	23.50	23.35	23.37		0
	3	2	23.49	23.34	23.35		0
	3	3	23.39	23.47	23.44		0
	6	0	22.37	22.30	22.40	0-2	1
64QAM	1	0	22.37	22.26	22.30	0-2	1
	1	2	22.37	22.38	22.14		1
	1	5	22.46	22.25	22.35		1
	3	0	22.37	22.35	22.33		1
	3	2	22.39	22.20	22.30		1
	3	3	22.32	22.44	22.37		1
	6	0	21.28	21.15	21.36	0-3	2

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 53 of 109	

9.4.6

LTE Band 41

Table 9-41
LTE Band 41 Conducted Powers - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.90	23.98	23.85	23.95	23.90	0	0
	1	50	23.82	23.86	23.84	23.98	23.83		0
	1	99	23.99	23.80	23.91	23.86	23.94		0
	50	0	23.00	22.86	22.95	22.90	22.90	0-1	1
	50	25	22.94	22.88	22.80	22.89	22.92		1
	50	50	22.93	22.97	22.89	22.82	22.95		1
	100	0	22.85	22.93	22.84	22.93	22.92		1
16QAM	1	0	22.94	22.91	22.93	22.92	22.99	0-1	1
	1	50	22.98	22.91	22.94	22.93	22.81		1
	1	99	22.95	22.86	23.00	22.98	22.83		1
	50	0	21.93	21.98	21.93	21.92	21.83	0-2	2
	50	25	21.87	21.85	21.85	21.92	21.80		2
	50	50	21.80	21.82	21.91	21.97	21.87		2
	100	0	21.82	21.83	21.91	21.94	22.00		2
64QAM	1	0	21.89	21.86	21.83	21.86	21.98	0-2	2
	1	50	21.93	21.76	21.78	21.79	21.79		2
	1	99	21.81	21.85	21.87	21.89	21.81		2
	50	0	20.83	20.86	20.82	20.79	20.77	0-3	3
	50	25	20.79	20.78	20.73	20.90	20.69		3
	50	50	20.65	20.74	20.75	20.95	20.79		3
	100	0	20.81	20.74	20.77	20.88	21.00		3

Table 9-42
LTE Band 41 Conducted Powers - 15 MHz Bandwidth

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.95	23.89	23.83	23.98	23.86	0	0
	1	36	23.85	23.89	23.93	23.96	23.82		0
	1	74	23.99	23.98	23.99	23.97	23.91		0
	36	0	22.87	22.83	22.89	22.95	22.82	0-1	1
	36	18	22.82	22.98	22.81	22.93	22.94		1
	36	37	22.92	23.00	23.00	22.88	22.91		1
	75	0	22.96	22.87	22.80	23.00	22.82		1
16QAM	1	0	22.91	22.86	22.92	22.89	22.98	0-1	1
	1	36	22.87	22.90	22.85	22.95	23.00		1
	1	74	22.80	22.80	22.99	22.99	22.88		1
	36	0	21.99	21.84	21.93	21.84	21.85	0-2	2
	36	18	21.83	21.94	21.97	21.84	21.83		2
	36	37	21.94	21.84	21.84	21.85	21.83		2
	75	0	22.00	21.96	21.84	21.90	21.91		2
64QAM	1	0	21.76	21.79	21.87	21.88	21.86	0-2	2
	1	36	21.87	21.79	21.84	21.89	21.88		2
	1	74	21.74	21.72	21.88	21.91	21.80		2
	36	0	20.84	20.69	20.86	20.82	20.72	0-3	3
	36	18	20.71	20.90	20.87	20.75	20.77		3
	36	37	20.78	20.81	20.80	20.68	20.82		3
	75	0	20.95	20.94	20.68	20.84	20.77		3

FCC ID ZNFQ710US		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 54 of 109	

Table 9-43
LTE Band 41 Conducted Powers - 10 MHz Bandwidth

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.83	23.97	23.94	23.93	23.83	0	0
	1	25	23.80	23.91	23.90	23.85	23.88		0
	1	49	23.89	23.84	23.87	23.90	23.93		0
	25	0	22.87	22.81	22.88	22.85	22.90	0-1	1
	25	12	22.98	22.90	22.94	22.94	22.89		1
	25	25	23.00	22.91	22.96	22.90	22.94		1
	50	0	22.84	22.85	22.97	22.95	22.95		1
16QAM	1	0	22.86	22.94	22.84	22.84	22.89	0-1	1
	1	25	22.93	22.85	22.93	22.96	22.93		1
	1	49	22.82	22.81	23.00	22.82	22.91		1
	25	0	21.86	21.96	21.95	21.94	21.99	0-2	2
	25	12	21.91	21.89	21.90	21.99	21.94		2
	25	25	21.87	21.81	21.98	22.00	21.88		2
64QAM	50	0	21.91	21.86	21.94	21.87	22.00	0-2	2
	1	0	21.73	21.80	21.69	21.72	21.75		2
	1	25	21.88	21.72	21.81	21.95	21.82	0-2	2
	1	49	21.72	21.67	21.92	21.68	21.81		2
	25	0	20.78	20.86	20.91	20.93	20.94	0-3	3
	25	12	20.82	20.84	20.74	20.97	20.82		3
	25	25	20.87	20.74	20.91	20.92	20.77		3
50	0	20.84	20.74	20.80	20.74	20.91	3		

Table 9-44
LTE Band 41 Conducted Powers - 5 MHz Bandwidth

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.00	23.82	23.84	23.92	23.81	0	0
	1	12	24.00	23.81	23.97	24.00	24.00		0
	1	24	23.95	23.94	23.95	23.87	23.91		0
	12	0	22.97	22.93	22.86	22.92	22.94	0-1	1
	12	6	22.90	22.81	22.96	22.85	22.86		1
	12	13	22.92	22.83	22.94	22.86	22.90		1
	25	0	22.99	22.81	22.82	22.91	22.94		1
16QAM	1	0	22.89	22.80	22.83	22.89	22.92	0-1	1
	1	12	22.90	22.88	22.84	22.92	22.91		1
	1	24	22.98	22.94	22.86	22.93	22.87		1
	12	0	21.88	21.83	21.81	21.93	21.80	0-2	2
	12	6	21.89	22.00	21.93	21.94	21.89		2
	12	13	21.83	22.00	21.97	22.00	21.96		2
	25	0	21.97	21.80	21.97	21.96	21.94		2
64QAM	1	0	21.84	21.77	21.69	21.73	21.79	0-2	2
	1	12	21.85	21.83	21.80	21.89	21.90		2
	1	24	21.90	21.94	21.71	21.76	21.71		2
	12	0	20.87	20.78	20.68	20.90	20.79	0-3	3
	12	6	20.79	20.97	20.87	20.86	20.80		3
	12	13	20.73	20.91	20.87	20.91	20.84		3
	25	0	20.92	20.76	20.90	20.91	20.88		3

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 55 of 109	

9.5 WLAN Conducted Powers

Table 9-45
2.4 GHz WLAN Maximum Average RF Power

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
2412	1	22.16	18.34	17.35
2422	3	N/A	21.66	20.68
2437	6	22.42	21.61	20.55
2452	9	N/A	21.55	20.58
2462	11	22.33	17.61	16.74

Table 9-46
2.4 GHz WLAN Reduced Average RF Power

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
2412	1	18.78	15.35	15.20
2422	3	N/A	18.57	18.36
2437	6	18.86	18.52	18.53
2452	9	N/A	18.42	18.57
2462	11	18.53	14.61	14.79

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 56 of 109

Table 9-47
5 GHz WLAN Maximum Average RF Power

5GHz (20MHz) Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11a	802.11n	802.11ac
5180	36	15.84	14.31	11.60
5200	40	19.59	18.02	15.75
5220	44	19.30	18.99	15.83
5240	48	19.73	18.96	15.70
5260	52	19.27	18.96	15.96
5280	56	19.31	18.99	15.85
5300	60	19.20	18.93	15.99
5320	64	15.76	14.59	11.95
5500	100	15.70	14.18	11.30
5520	104	19.20	18.41	15.61
5600	120	19.27	18.32	15.52
5680	136	19.10	18.32	15.67
5700	140	17.47	16.33	13.49
5745	149	17.43	16.42	13.57
5765	153	19.50	18.43	15.74
5785	157	19.54	18.28	15.55
5805	161	19.48	18.39	15.71
5825	165	17.73	16.30	13.10

FCC ID ZNFQ710US		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 57 of 109	

Table 9-48
5 GHz WLAN Reduced Average RF Power
5GHz (20MHz) Conducted Power [dBm]

Freq [MHz]	Channel	IEEE Transmission Mode	
		802.11a	802.11n
5180	36	13.15	13.18
5200	40	17.48	17.46
5220	44	17.53	17.61
5240	48	17.12	17.33
5260	52	17.10	17.06
5280	56	17.22	17.23
5300	60	17.17	17.21
5320	64	13.31	13.02
5500	100	13.58	13.63
5520	104	17.32	17.49
5600	120	17.34	17.26
5680	136	17.20	17.47
5700	140	15.42	15.54
5745	149	15.55	15.48
5765	153	17.40	17.28
5785	157	17.46	17.32
5805	161	17.44	17.22
5825	165	15.71	15.73

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The bolded data rate and channel above were tested for SAR.

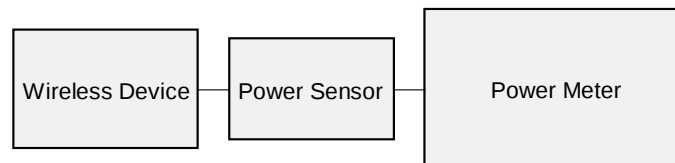


Figure 9-4
Power Measurement Setup

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 	Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset
Page 58 of 109		

9.6 Bluetooth Conducted Powers


Table 9-49
Bluetooth Average RF Power

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
			[dBm]	[mW]
2402	1.0	0	9.53	8.982
2441	1.0	39	10.95	12.457
2480	1.0	78	10.04	10.102
2402	2.0	0	8.81	7.609
2441	2.0	39	10.27	10.629
2480	2.0	78	9.37	8.659
2402	3.0	0	8.81	7.603
2441	3.0	39	10.26	10.624
2480	3.0	78	9.37	8.644

Note: The bolded data rates and channel above were tested for SAR.


FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 59 of 109

Bluetooth Transmission Plot

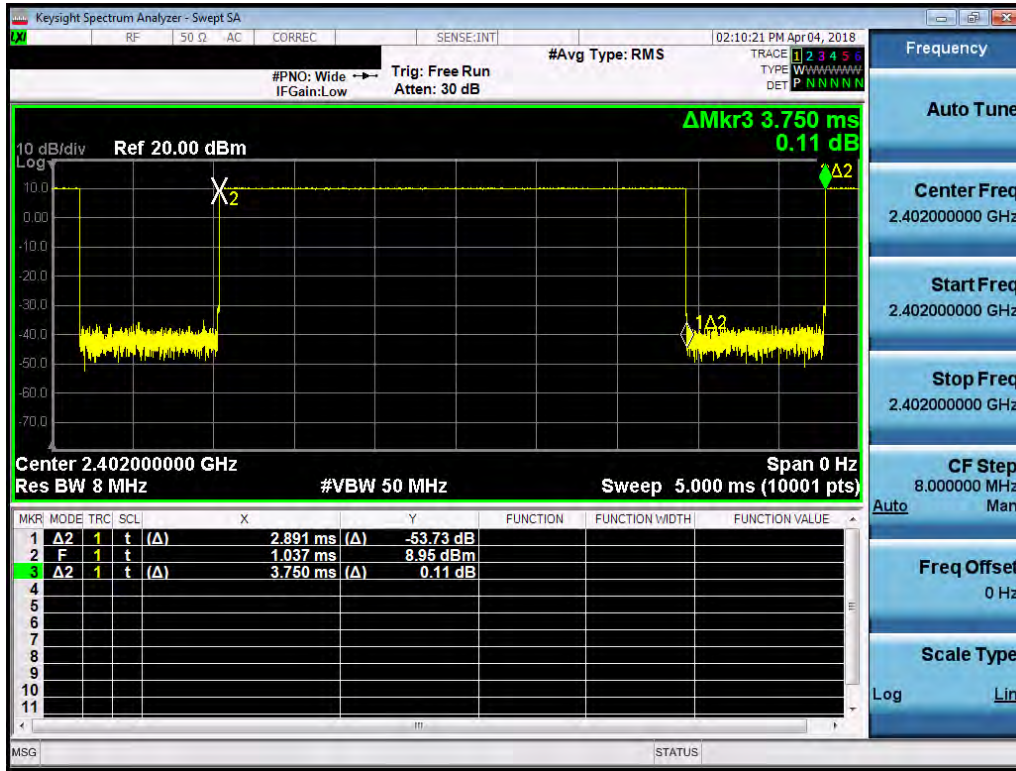

Bluetooth Duty Cycle Calculation

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.891ms}{3.750ms} * 100\% = 77.1\%$$

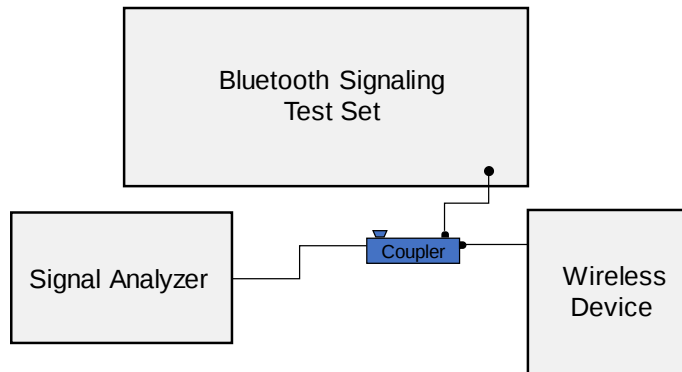

Power Measurement Setup

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 60 of 109

10 SYSTEM VERIFICATION

10.1 Tissue Verification

Table 10-1
Measured Head Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
4/19/2018	750H	21.4	700	0.882	41.928	0.889	42.201	-0.79%	-0.65%
			710	0.883	41.905	0.890	42.149	-0.79%	-0.58%
			740	0.894	41.828	0.893	41.994	0.11%	-0.40%
			755	0.899	41.786	0.894	41.916	0.56%	-0.31%
			770	0.903	41.730	0.895	41.838	0.89%	-0.26%
			785	0.909	41.712	0.896	41.760	1.45%	-0.11%
4/14/2018	835H	20.5	820	0.890	40.717	0.899	41.578	-1.00%	-2.07%
			835	0.905	40.508	0.900	41.500	0.56%	-2.39%
			850	0.920	40.307	0.916	41.500	0.44%	-2.87%
4/17/2018	835H	21.4	820	0.900	42.434	0.899	41.578	0.11%	2.06%
			835	0.915	42.230	0.900	41.500	1.67%	1.76%
			850	0.931	42.029	0.916	41.500	1.64%	1.27%
4/22/2018	1750H	20.8	1710	1.367	40.679	1.348	40.142	1.41%	1.34%
			1750	1.392	40.630	1.371	40.079	1.53%	1.37%
			1790	1.415	40.555	1.394	40.016	1.51%	1.35%
4/20/2018	1900H	21.7	1850	1.399	39.103	1.400	40.000	-0.07%	-2.24%
			1880	1.430	38.971	1.400	40.000	2.14%	-2.57%
			1910	1.464	38.843	1.400	40.000	4.57%	-2.89%
4/15/2018	2450H	22.5	2400	1.801	40.620	1.756	39.289	2.56%	3.39%
			2450	1.858	40.442	1.800	39.200	3.22%	3.17%
			2500	1.915	40.256	1.855	39.136	3.23%	2.86%
			2550	1.974	40.073	1.909	39.073	3.40%	2.56%
			2600	2.030	39.891	1.964	39.009	3.36%	2.26%
4/18/2018	2450H	22.5	2400	1.792	39.339	1.756	39.289	2.05%	0.13%
			2450	1.844	39.162	1.800	39.200	2.44%	-0.10%
			2500	1.903	38.972	1.855	39.136	2.59%	-0.42%
			2550	1.959	38.801	1.909	39.073	2.62%	-0.70%
			2600	2.015	38.608	1.964	39.009	2.60%	-1.03%
4/23/2018	2450H	22.4	2400	1.799	40.437	1.756	39.289	2.45%	2.92%
			2450	1.855	40.232	1.800	39.200	3.06%	2.63%
			2500	1.911	40.032	1.855	39.136	3.02%	2.29%
			2550	1.969	39.857	1.909	39.073	3.14%	2.01%
			2600	2.026	39.642	1.964	39.009	3.16%	1.62%
4/18/2018	5200H-5800H	22.0	5240	4.509	35.746	4.696	35.940	-3.98%	-0.54%
			5260	4.529	35.720	4.717	35.917	-3.99%	-0.55%
			5280	4.542	35.658	4.737	35.894	-4.12%	-0.66%
			5300	4.560	35.658	4.758	35.871	-4.16%	-0.59%
			5600	4.866	35.234	5.065	35.529	-3.93%	-0.83%
			5680	4.955	35.133	5.147	35.437	-3.73%	-0.86%
			5745	5.014	35.064	5.214	35.363	-3.84%	-0.85%
			5765	5.033	35.021	5.234	35.340	-3.84%	-0.90%
			5785	5.061	34.987	5.255	35.317	-3.69%	-0.93%

FCC ID ZNFQ710US		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 61 of 109

Table 10-2
Measured Body Tissue Properties

Calibrated for Tests Performed on:	Tissue Type:	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
4/14/2018	750B	21.2	700	0.959	53.224	0.959	55.726	0.00%	-4.49%
			710	0.963	53.210	0.960	55.687	0.31%	-4.45%
			720	0.967	53.194	0.961	55.648	0.62%	-4.41%
			725	0.969	53.185	0.961	55.629	0.83%	-4.39%
			740	0.974	53.152	0.963	55.570	1.14%	-4.35%
			755	0.979	53.111	0.964	55.512	1.56%	-4.33%
			755	0.979	53.111	0.964	55.512	1.56%	-4.33%
			770	0.985	53.072	0.965	55.453	2.07%	-4.29%
			785	0.990	53.028	0.966	55.395	2.48%	-4.27%
4/19/2018	750B	21.5	700	0.913	54.699	0.959	55.726	-4.80%	-1.84%
			710	0.924	54.547	0.960	55.687	-3.75%	-2.05%
			720	0.930	54.442	0.961	55.648	-3.23%	-2.17%
			725	0.937	54.390	0.961	55.629	-2.50%	-2.23%
			740	0.949	54.229	0.963	55.570	-1.45%	-2.41%
			755	0.963	54.047	0.964	55.512	-0.10%	-2.64%
			755	0.963	54.047	0.964	55.512	-0.10%	-2.64%
			770	0.977	53.883	0.965	55.453	1.24%	-2.83%
			785	0.991	53.816	0.966	55.395	2.59%	-2.85%
4/26/2018	750B	21.5	700	0.936	54.510	0.959	55.726	-2.40%	-2.18%
			710	0.940	54.493	0.960	55.687	-2.08%	-2.14%
			720	0.944	54.468	0.961	55.648	-1.77%	-2.12%
			725	0.949	54.502	0.961	55.629	-1.25%	-2.03%
			740	0.953	54.481	0.963	55.570	-1.04%	-1.96%
			755	0.958	54.444	0.964	55.512	-0.62%	-1.92%
			755	0.958	54.444	0.964	55.512	-0.62%	-1.92%
			770	0.964	54.414	0.965	55.453	-0.10%	-1.87%
			785	0.970	54.375	0.966	55.395	0.41%	-1.84%
4/17/2018	835B	20.6	820	1.002	53.062	0.969	55.258	3.41%	-3.97%
			835	1.007	53.018	0.970	55.200	3.81%	-3.95%
			850	1.015	52.998	0.988	55.154	2.73%	-3.91%
4/15/2018	1750B	22.0	1710	1.463	51.399	1.463	53.537	0.00%	-3.99%
			1750	1.507	51.241	1.488	53.432	1.28%	-4.10%
			1790	1.548	51.054	1.514	53.326	2.25%	-4.26%
4/17/2018	1750B	20.6	1710	1.462	51.614	1.463	53.537	-0.07%	-3.59%
			1750	1.508	51.469	1.488	53.432	1.34%	-3.67%
			1790	1.554	51.337	1.514	53.326	2.64%	-3.73%
4/25/2018	1750B	21.9	1710	1.420	51.667	1.463	53.537	-2.94%	-3.49%
			1750	1.464	51.543	1.488	53.432	-1.61%	-3.54%
			1790	1.507	51.374	1.514	53.326	-0.46%	-3.66%
4/15/2018	1900B	22.4	1850	1.504	54.036	1.520	53.300	-1.05%	1.38%
			1880	1.540	53.934	1.520	53.300	1.32%	1.19%
			1910	1.577	53.811	1.520	53.300	3.75%	0.96%
4/18/2018	1900B	22.1	1850	1.514	54.664	1.520	53.300	-0.39%	2.56%
			1880	1.547	54.577	1.520	53.300	1.78%	2.40%
			1910	1.584	54.470	1.520	53.300	4.21%	2.20%
4/20/2018	1900B	22.4	1850	1.507	53.567	1.520	53.300	-0.86%	0.50%
			1880	1.542	53.460	1.520	53.300	1.45%	0.30%
			1910	1.578	53.366	1.520	53.300	3.82%	0.12%
4/30/2018	1900B	21.8	1850	1.475	53.571	1.520	53.300	-2.96%	0.51%
			1880	1.506	53.482	1.520	53.300	-0.92%	0.34%
			1910	1.540	53.387	1.520	53.300	1.32%	0.16%

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 	Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset
Page 62 of 109		

Table 10-3
Measured Body Tissue Properties (Cont.)

Calibrated for Tests Performed on:	Tissue Type:	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
4/14/2018	2450B	22.5	2400	1.958	52.349	1.902	52.767	2.94%	-0.79%
			2450	2.022	52.188	1.950	52.700	3.69%	-0.97%
			2500	2.095	51.994	2.021	52.636	3.66%	-1.22%
			2500	2.095	51.994	2.021	52.636	3.66%	-1.22%
			2550	2.163	51.825	2.092	52.573	3.39%	-1.42%
			2600	2.235	51.610	2.163	52.509	3.33%	-1.71%
4/17/2018	2450B	22.4	2400	1.960	50.887	1.902	52.767	3.05%	-3.56%
			2450	2.018	50.754	1.950	52.700	3.49%	-3.69%
			2500	2.073	50.605	2.021	52.636	2.57%	-3.86%
			2500	2.073	50.605	2.021	52.636	2.57%	-3.86%
			2550	2.131	50.467	2.092	52.573	1.86%	-4.01%
			2600	2.189	50.334	2.163	52.509	1.20%	-4.14%
4/23/2018	2450B	20.6	2400	1.974	51.853	1.902	52.767	3.79%	-1.73%
			2450	2.040	51.696	1.950	52.700	4.62%	-1.91%
			2500	2.092	51.540	2.021	52.636	3.51%	-2.08%
			2500	2.092	51.540	2.021	52.636	3.51%	-2.08%
			2550	2.155	51.393	2.092	52.573	3.01%	-2.24%
			2600	2.215	51.231	2.163	52.509	2.40%	-2.43%
04/19/2018	5200B-5800B	22.3	5180	5.383	48.131	5.276	49.041	2.03%	-1.86%
			5200	5.409	48.086	5.299	49.014	2.08%	-1.89%
			5220	5.431	48.039	5.323	48.987	2.03%	-1.94%
			5240	5.459	48.022	5.346	48.960	2.11%	-1.92%
			5260	5.478	47.988	5.369	48.933	2.03%	-1.93%
			5280	5.513	47.935	5.393	48.906	2.23%	-1.99%
			5300	5.529	47.930	5.416	48.879	2.09%	-1.94%
			5320	5.559	47.874	5.439	48.851	2.21%	-2.00%
			5500	5.784	47.581	5.650	48.607	2.37%	-2.11%
			5520	5.824	47.539	5.673	48.580	2.66%	-2.14%
			5540	5.853	47.489	5.696	48.553	2.76%	-2.19%
			5560	5.879	47.444	5.720	48.526	2.78%	-2.23%
			5580	5.905	47.437	5.743	48.499	2.82%	-2.19%
			5600	5.934	47.410	5.766	48.471	2.91%	-2.19%
			5620	5.975	47.409	5.790	48.444	3.20%	-2.14%
			5640	5.988	47.347	5.813	48.417	3.01%	-2.21%
			5660	6.019	47.277	5.837	48.390	3.12%	-2.30%
			5680	6.041	47.289	5.860	48.363	3.09%	-2.22%
			5700	6.079	47.258	5.883	48.336	3.33%	-2.23%
			5745	6.141	47.189	5.936	48.275	3.45%	-2.25%
			5765	6.159	47.128	5.959	48.248	3.36%	-2.32%
			5785	6.196	47.080	5.982	48.220	3.58%	-2.36%
			5800	6.222	47.060	6.000	48.200	3.70%	-2.37%
			5805	6.223	47.069	6.006	48.193	3.61%	-2.33%
			5825	6.241	47.043	6.029	48.166	3.52%	-2.33%
04/23/2018	5600B	21.3	5500	5.824	46.832	5.650	48.607	3.08%	-3.65%
			5520	5.871	46.786	5.673	48.580	3.49%	-3.69%
			5540	5.895	46.759	5.696	48.553	3.49%	-3.69%
			5560	5.924	46.739	5.720	48.526	3.57%	-3.68%
			5580	5.943	46.674	5.743	48.499	3.48%	-3.76%
			5600	5.968	46.663	5.766	48.471	3.50%	-3.73%
			5620	6.004	46.584	5.790	48.444	3.70%	-3.84%
			5640	6.030	46.535	5.813	48.417	3.73%	-3.89%
			5660	6.068	46.522	5.837	48.390	3.96%	-3.86%
			5680	6.086	46.523	5.860	48.363	3.86%	-3.80%
			5700	6.113	46.465	5.883	48.336	3.91%	-3.87%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 63 of 109	

10.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

Table 10-4
System Verification Results – 1g

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
E	750	HEAD	04/19/2018	23.6	21.4	0.200	1161	3213	1.600	8.170	8.000	-2.08%
G	835	HEAD	04/14/2018	20.0	19.9	0.200	4d133	3332	1.880	9.520	9.400	-1.26%
G	835	HEAD	04/17/2018	22.7	21.5	0.200	4d133	3332	1.940	9.520	9.700	1.89%
E	1750	HEAD	04/22/2018	21.5	20.8	0.100	1150	3213	3.850	36.100	38.500	6.65%
H	1900	HEAD	04/20/2018	23.0	21.8	0.100	5d080	7410	3.830	39.300	38.300	-2.54%
G	2450	HEAD	04/15/2018	22.8	23.1	0.100	797	3332	5.000	52.700	50.000	-5.12%
G	2450	HEAD	04/18/2018	21.9	22.0	0.100	797	3332	5.470	52.700	54.700	3.80%
G	2450	HEAD	04/23/2018	21.1	21.9	0.100	797	3332	5.230	52.700	52.300	-0.76%
H	5250	HEAD	04/18/2018	22.3	22.0	0.050	1191	3589	3.840	78.900	76.800	-2.66%
H	5600	HEAD	04/18/2018	22.3	22.0	0.050	1191	3589	4.050	83.600	81.000	-3.11%
H	5750	HEAD	04/18/2018	22.3	22.0	0.050	1191	3589	3.740	79.100	74.800	-5.44%
E	750	BODY	04/14/2018	22.0	21.2	0.200	1161	3213	1.750	8.430	8.750	3.80%
I	750	BODY	04/19/2018	22.4	21.5	0.200	1003	3287	1.840	8.580	9.200	7.23%
E	750	BODY	04/26/2018	22.8	21.5	0.200	1161	3213	1.730	8.430	8.650	2.61%
E	835	BODY	04/17/2018	20.0	20.6	0.200	4d132	3213	1.900	9.710	9.500	-2.16%
I	1750	BODY	04/15/2018	22.0	22.0	0.100	1148	3287	3.910	37.000	39.100	5.68%
I	1750	BODY	04/25/2018	22.4	22.0	0.100	1148	3287	3.790	37.000	37.900	2.43%
J	1900	BODY	04/15/2018	22.5	22.4	0.100	5d148	3914	4.140	39.600	41.400	4.55%
J	1900	BODY	04/18/2018	21.8	22.0	0.100	5d148	3914	4.260	39.600	42.600	7.58%
J	1900	BODY	04/20/2018	23.1	21.2	0.100	5d148	3914	4.150	39.600	41.500	4.80%
J	1900	BODY	04/30/2018	21.5	21.8	0.100	5d148	3347	4.050	39.600	40.500	2.27%
K	2450	BODY	04/17/2018	23.5	21.4	0.100	797	3319	4.930	51.100	49.300	-3.52%
K	2450	BODY	04/23/2018	21.9	20.6	0.100	797	3319	5.350	51.100	53.500	4.70%
D	5250	BODY	04/19/2018	22.5	22.3	0.050	1237	7308	3.730	76.900	74.600	-2.99%
D	5600	BODY	04/19/2018	22.5	22.3	0.050	1237	7308	3.780	78.500	75.600	-3.69%
D	5600	BODY	04/23/2018	22.3	21.1	0.050	1237	7308	3.870	78.500	77.400	-1.40%
D	5750	BODY	04/19/2018	22.5	22.3	0.050	1237	7308	3.680	77.100	73.600	-4.54%

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 64 of 109

Table 10-5
System Verification Results – 10g

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR _{10g} (W/kg)	1 W Target SAR _{10g} (W/kg)	1 W Normalized SAR _{10g} (W/kg)	Deviation _{10g} (%)
I	1750	BODY	04/15/2018	22.0	22.0	0.100	1148	3287	2.080	19.800	20.800	5.05%
I	1750	BODY	04/17/2018	21.9	20.1	0.100	1150	3287	2.010	19.500	20.100	3.08%
J	1900	BODY	04/18/2018	21.8	22.0	0.100	5d148	3914	2.200	20.900	22.000	5.26%
J	1900	BODY	04/20/2018	23.1	21.2	0.100	5d148	3914	2.120	20.900	21.200	1.44%
D	5250	BODY	04/19/2018	22.5	22.3	0.050	1237	7308	1.050	21.500	21.000	-2.33%
D	5600	BODY	04/19/2018	22.5	22.3	0.050	1237	7308	1.060	22.100	21.200	-4.07%

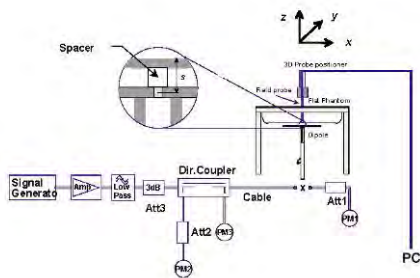


Figure 10-1
System Verification Setup Diagram



Figure 10-2
System Verification Setup Photo

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 65 of 109	

11 SAR DATA SUMMARY

11.1 Standalone Head SAR Data

Table 11-1
GSM 850 Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.7	33.64	-0.04	Right	Cheek	00012	1	1:8.3	0.062	1.014	0.063	
836.60	190	GSM 850	GSM	33.7	33.64	-0.08	Right	Tilt	00012	1	1:8.3	0.035	1.014	0.035	
836.60	190	GSM 850	GSM	33.7	33.64	0.05	Left	Cheek	00012	1	1:8.3	0.114	1.014	0.116	
836.60	190	GSM 850	GSM	33.7	33.64	0.07	Left	Tilt	00012	1	1:8.3	0.047	1.014	0.048	
836.60	190	GSM 850	GPRS	30.7	30.51	0.21	Right	Cheek	00012	3	1:2.76	0.066	1.045	0.069	
836.60	190	GSM 850	GPRS	30.7	30.51	-0.04	Right	Tilt	00012	3	1:2.76	0.039	1.045	0.041	
836.60	190	GSM 850	GPRS	30.7	30.51	-0.03	Left	Cheek	00012	3	1:2.76	0.121	1.045	0.126	A1
836.60	190	GSM 850	GPRS	30.7	30.51	0.19	Left	Tilt	00012	3	1:2.76	0.052	1.045	0.054	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram								

Table 11-2
GSM 1900 Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GSM	30.7	30.55	-0.05	Right	Cheek	00012	1	1:8.3	0.081	1.035	0.084	A2
1880.00	661	GSM 1900	GSM	30.7	30.55	0.07	Right	Tilt	00012	1	1:8.3	0.030	1.035	0.031	
1880.00	661	GSM 1900	GSM	30.7	30.55	0.03	Left	Cheek	00012	1	1:8.3	0.081	1.035	0.084	
1880.00	661	GSM 1900	GSM	30.7	30.55	0.06	Left	Tilt	00012	1	1:8.3	0.045	1.035	0.047	
1880.00	661	GSM 1900	GPRS	27.2	27.12	0.17	Right	Cheek	00012	3	1:2.76	0.080	1.019	0.082	
1880.00	661	GSM 1900	GPRS	27.2	27.12	0.03	Right	Tilt	00012	3	1:2.76	0.025	1.019	0.025	
1880.00	661	GSM 1900	GPRS	27.2	27.12	0.16	Left	Cheek	00012	3	1:2.76	0.073	1.019	0.074	
1880.00	661	GSM 1900	GPRS	27.2	27.12	0.05	Left	Tilt	00012	3	1:2.76	0.040	1.019	0.041	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 66 of 109

Table 11-3
UMTS 850 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	25.2	25.03	0.15	Right	Cheek	00012	1:1	0.118	1.040	0.123	
836.60	4183	UMTS 850	RMC	25.2	25.03	-0.05	Right	Tilt	00012	1:1	0.074	1.040	0.077	
836.60	4183	UMTS 850	RMC	25.2	25.03	-0.04	Left	Cheek	00012	1:1	0.177	1.040	0.184	A3
836.60	4183	UMTS 850	RMC	25.2	25.03	0.03	Left	Tilt	00012	1:1	0.068	1.040	0.071	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-4
UMTS 1750 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1732.40	1412	UMTS 1750	RMC	24.5	24.43	0.03	Right	Cheek	00012	1:1	0.087	1.016	0.088	A4
1732.40	1412	UMTS 1750	RMC	24.5	24.43	0.03	Right	Tilt	00012	1:1	0.049	1.016	0.050	
1732.40	1412	UMTS 1750	RMC	24.5	24.43	0.18	Left	Cheek	00012	1:1	0.068	1.016	0.069	
1732.40	1412	UMTS 1750	RMC	24.5	24.43	0.04	Left	Tilt	00012	1:1	0.055	1.016	0.056	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-5
UMTS 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	9400	UMTS 1900	RMC	24.5	24.32	-0.02	Right	Cheek	00012	1:1	0.123	1.042	0.128	
1880.00	9400	UMTS 1900	RMC	24.5	24.32	0.12	Right	Tilt	00012	1:1	0.049	1.042	0.051	
1880.00	9400	UMTS 1900	RMC	24.5	24.32	0.07	Left	Cheek	00012	1:1	0.133	1.042	0.139	A5
1880.00	9400	UMTS 1900	RMC	24.5	24.32	0.03	Left	Tilt	00012	1:1	0.063	1.042	0.066	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID ZNFQ710US		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 67 of 109

Table 11-6
CDMA BC0 (\$22H) Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.52	384	CDMA BC0 (\$22H)	RC3 / SO55	25.2	25.03	-0.03	Right	Cheek	00012	1:1	0.101	1.040	0.105	
836.52	384	CDMA BC0 (\$22H)	RC3 / SO55	25.2	25.03	0.04	Right	Tilt	00012	1:1	0.059	1.040	0.061	
836.52	384	CDMA BC0 (\$22H)	RC3 / SO55	25.2	25.03	-0.02	Left	Cheek	00012	1:1	0.184	1.040	0.191	A6
836.52	384	CDMA BC0 (\$22H)	RC3 / SO55	25.2	25.03	-0.12	Left	Tilt	00012	1:1	0.077	1.040	0.080	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. A	25.2	25.14	0.08	Right	Cheek	00012	1:1	0.093	1.014	0.094	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. A	25.2	25.14	0.13	Right	Tilt	00012	1:1	0.060	1.014	0.061	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. A	25.2	25.14	0.04	Left	Cheek	00012	1:1	0.139	1.014	0.141	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. A	25.2	25.14	0.05	Left	Tilt	00012	1:1	0.063	1.014	0.064	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-7
CDMA BC10 (\$90S) Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
820.10	564	CDMA BC10 (90S)	RC3 / SO55	25.2	25.00	-0.09	Right	Cheek	00012	1:1	0.133	1.047	0.139	
820.10	564	CDMA BC10 (90S)	RC3 / SO55	25.2	25.00	-0.19	Right	Tilt	00012	1:1	0.088	1.047	0.092	
820.10	564	CDMA BC10 (90S)	RC3 / SO55	25.2	25.00	-0.04	Left	Cheek	00012	1:1	0.192	1.047	0.201	A7
820.10	564	CDMA BC10 (90S)	RC3 / SO55	25.2	25.00	-0.20	Left	Tilt	00012	1:1	0.098	1.047	0.103	
820.10	564	CDMA BC10 (90S)	EVDO Rev. A	25.2	25.13	0.20	Right	Cheek	00012	1:1	0.130	1.016	0.132	
820.10	564	CDMA BC10 (90S)	EVDO Rev. A	25.2	25.13	-0.06	Right	Tilt	00012	1:1	0.087	1.016	0.088	
820.10	564	CDMA BC10 (90S)	EVDO Rev. A	25.2	25.13	0.00	Left	Cheek	00012	1:1	0.158	1.016	0.161	
820.10	564	CDMA BC10 (90S)	EVDO Rev. A	25.2	25.13	0.18	Left	Tilt	00012	1:1	0.084	1.016	0.085	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 	Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset
Page 68 of 109		

Table 11-8
PCS CDMA Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	600	PCS CDMA	RC3 / SO55	25.0	24.92	-0.05	Right	Cheek	00012	1:1	0.123	1.019	0.125	
1880.00	600	PCS CDMA	RC3 / SO55	25.0	24.92	0.11	Right	Tilt	00012	1:1	0.043	1.019	0.044	
1880.00	600	PCS CDMA	RC3 / SO55	25.0	24.92	0.06	Left	Cheek	00012	1:1	0.121	1.019	0.123	
1880.00	600	PCS CDMA	RC3 / SO55	25.0	24.92	-0.02	Left	Tilt	00012	1:1	0.069	1.019	0.070	
1880.00	600	PCS CDMA	EVDO Rev. A	25.0	24.98	-0.01	Right	Cheek	00012	1:1	0.124	1.005	0.125	A8
1880.00	600	PCS CDMA	EVDO Rev. A	25.0	24.98	0.08	Right	Tilt	00012	1:1	0.044	1.005	0.044	
1880.00	600	PCS CDMA	EVDO Rev. A	25.0	24.98	-0.03	Left	Cheek	00012	1:1	0.107	1.005	0.108	
1880.00	600	PCS CDMA	EVDO Rev. A	25.0	24.98	-0.04	Left	Tilt	00012	1:1	0.085	1.005	0.085	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Table 11-9
LTE Band 12 Head SAR

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.	(W/kg)														(W/kg)			
707.50	23095	Mid	LTE Band 12	10	25.5	25.44	-0.06	0	Right	Cheek	QPSK	1	25	00038	1:1	0.128	1.014	0.130	
707.50	23095	Mid	LTE Band 12	10	24.5	24.50	-0.08	1	Right	Cheek	QPSK	25	0	00038	1:1	0.115	1.000	0.115	
707.50	23095	Mid	LTE Band 12	10	25.5	25.44	0.03	0	Right	Tilt	QPSK	1	25	00038	1:1	0.092	1.014	0.093	
707.50	23095	Mid	LTE Band 12	10	24.5	24.50	-0.02	1	Right	Tilt	QPSK	25	0	00038	1:1	0.075	1.000	0.075	
707.50	23095	Mid	LTE Band 12	10	25.5	25.44	-0.03	0	Left	Cheek	QPSK	1	25	00038	1:1	0.207	1.014	0.210	A9
707.50	23095	Mid	LTE Band 12	10	24.5	24.50	-0.02	1	Left	Cheek	QPSK	25	0	00038	1:1	0.161	1.000	0.161	
707.50	23095	Mid	LTE Band 12	10	25.5	25.44	-0.04	0	Left	Tilt	QPSK	1	25	00038	1:1	0.101	1.014	0.102	
707.50	23095	Mid	LTE Band 12	10	24.5	24.50	0.00	1	Left	Tilt	QPSK	25	0	00038	1:1	0.073	1.000	0.073	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID ZNFQ710US		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 69 of 109

Table 11-10
LTE Band 13 Head SAR

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.	(W/kg)														(W/kg)			
782.00	23230	Mid	LTE Band 13	10	25.5	25.44	0.06	0	Right	Cheek	QPSK	1	0	00038	1:1	0.121	1.014	0.123	
782.00	23230	Mid	LTE Band 13	10	24.5	24.46	0.00	1	Right	Cheek	QPSK	25	0	00038	1:1	0.108	1.009	0.109	
782.00	23230	Mid	LTE Band 13	10	25.5	25.44	-0.07	0	Right	Tilt	QPSK	1	0	00038	1:1	0.085	1.014	0.086	
782.00	23230	Mid	LTE Band 13	10	24.5	24.46	0.07	1	Right	Tilt	QPSK	25	0	00038	1:1	0.071	1.009	0.072	
782.00	23230	Mid	LTE Band 13	10	25.5	25.44	0.08	0	Left	Cheek	QPSK	1	0	00038	1:1	0.194	1.014	0.197	A10
782.00	23230	Mid	LTE Band 13	10	24.5	24.46	-0.03	1	Left	Cheek	QPSK	25	0	00038	1:1	0.164	1.009	0.165	
782.00	23230	Mid	LTE Band 13	10	25.5	25.44	0.08	0	Left	Tilt	QPSK	1	0	00038	1:1	0.081	1.014	0.082	
782.00	23230	Mid	LTE Band 13	10	24.5	24.46	0.03	1	Left	Tilt	QPSK	25	0	00038	1:1	0.069	1.009	0.070	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-11
LTE Band 26 (Cell) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.7	24.67	-0.03	0	Right	Cheek	QPSK	1	74	00020	1:1	0.107	1.007	0.108	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.7	23.70	0.09	1	Right	Cheek	QPSK	36	37	00020	1:1	0.078	1.000	0.078	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.7	24.67	0.06	0	Right	Tilt	QPSK	1	74	00020	1:1	0.080	1.007	0.081	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.7	23.70	0.12	1	Right	Tilt	QPSK	36	37	00020	1:1	0.054	1.000	0.054	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.7	24.67	-0.07	0	Left	Cheek	QPSK	1	74	00020	1:1	0.177	1.007	0.178	A11
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.7	23.70	0.04	1	Left	Cheek	QPSK	36	37	00020	1:1	0.131	1.000	0.131	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.7	24.67	0.03	0	Left	Tilt	QPSK	1	74	00020	1:1	0.075	1.007	0.076	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.7	23.70	0.14	1	Left	Tilt	QPSK	36	37	00020	1:1	0.057	1.000	0.057	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-12
LTE Band 66 (AWS) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1770.00	132572	High	LTE Band 66 (AWS)	20	24.5	24.46	0.02	0	Right	Cheek	QPSK	1	0	00038	1:1	0.115	1.009	0.116	A12
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.49	0.04	1	Right	Cheek	QPSK	50	50	00038	1:1	0.092	1.002	0.092	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.5	24.46	0.15	0	Right	Tilt	QPSK	1	0	00038	1:1	0.041	1.009	0.041	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.49	0.16	1	Right	Tilt	QPSK	50	50	00038	1:1	0.035	1.002	0.035	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.5	24.46	-0.07	0	Left	Cheek	QPSK	1	0	00038	1:1	0.090	1.009	0.091	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.49	0.01	1	Left	Cheek	QPSK	50	50	00038	1:1	0.082	1.002	0.082	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.5	24.46	-0.10	0	Left	Tilt	QPSK	1	0	00038	1:1	0.052	1.009	0.052	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.49	0.09	1	Left	Tilt	QPSK	50	50	00038	1:1	0.052	1.002	0.052	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 70 of 109	

Table 11-13
LTE Band 25 (PCS) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.48	-0.03	0	Right	Cheek	QPSK	1	99	00038	1:1	0.130	1.005	0.131	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.50	0.03	1	Right	Cheek	QPSK	50	50	00038	1:1	0.106	1.000	0.106	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.48	0.06	0	Right	Tilt	QPSK	1	99	00038	1:1	0.071	1.005	0.071	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.50	0.06	1	Right	Tilt	QPSK	50	50	00038	1:1	0.061	1.000	0.061	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.48	0.03	0	Left	Cheek	QPSK	1	99	00038	1:1	0.153	1.005	0.154	A13
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.50	0.07	1	Left	Cheek	QPSK	50	50	00038	1:1	0.127	1.000	0.127	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.48	0.08	0	Left	Tilt	QPSK	1	99	00038	1:1	0.068	1.005	0.068	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.50	0.15	1	Left	Tilt	QPSK	50	50	00038	1:1	0.065	1.000	0.065	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-14
LTE Band 41 Head SAR

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
																(W/kg)		(W/kg)	
2506.00	39750	Low	LTE Band 41	20	24.0	23.99	0.06	0	Right	Cheek	QPSK	1	99	00020	1:1.58	0.030	1.002	0.030	
2506.00	39750	Low	LTE Band 41	20	23.0	23.00	0.05	1	Right	Cheek	QPSK	50	0	00020	1:1.58	0.022	1.000	0.022	
2506.00	39750	Low	LTE Band 41	20	24.0	23.99	0.04	0	Right	Tilt	QPSK	1	99	00020	1:1.58	0.021	1.002	0.021	
2506.00	39750	Low	LTE Band 41	20	23.0	23.00	0.03	1	Right	Tilt	QPSK	50	0	00020	1:1.58	0.017	1.000	0.017	
2506.00	39750	Low	LTE Band 41	20	24.0	23.99	0.08	0	Left	Cheek	QPSK	1	99	00020	1:1.58	0.030	1.002	0.030	A14
2506.00	39750	Low	LTE Band 41	20	23.0	23.00	0.06	1	Left	Cheek	QPSK	50	0	00020	1:1.58	0.025	1.000	0.025	
2506.00	39750	Low	LTE Band 41	20	24.0	23.99	0.06	0	Left	Tilt	QPSK	1	99	00020	1:1.58	0.014	1.002	0.014	
2506.00	39750	Low	LTE Band 41	20	23.0	23.00	0.03	1	Left	Tilt	QPSK	50	0	00020	1:1.58	0.011	1.000	0.011	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID ZNFQ710US		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 71 of 109

**Table 11-15
DTS Head SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
2412	1	802.11b	DSSS	22	19.0	18.78	0.21	Right	Cheek	00103	1	99.9	1.086	0.895	1.052	1.001	0.942	A15
2437	6	802.11b	DSSS	22	19.0	18.86	0.11	Right	Cheek	00103	1	99.9	1.238	0.985	1.033	1.001	1.019	
2462	11	802.11b	DSSS	22	19.0	18.53	0.13	Right	Cheek	00103	1	99.9	1.114	0.835	1.114	1.001	0.931	
2412	1	802.11b	DSSS	22	19.0	18.78	-0.13	Right	Tilt	00103	1	99.9	0.606	0.761	1.052	1.001	0.801	
2437	6	802.11b	DSSS	22	19.0	18.86	-0.15	Right	Tilt	00103	1	99.9	1.017	0.847	1.033	1.001	0.876	
2437	6	802.11b	DSSS	22	19.0	18.86	-0.04	Left	Cheek	00103	1	99.9	0.397	-	1.033	1.001	-	
2437	6	802.11b	DSSS	22	19.0	18.86	-0.15	Left	Tilt	00103	1	99.9	0.435	0.360	1.033	1.001	0.372	
2437	6	802.11b	DSSS	22	19.0	18.86	0.03	Right	Cheek	00103	1	99.9	1.088	0.944	1.033	1.001	0.976	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram									

Note: Blue entry represents variability measurement.

**Table 11-16
NII Head SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
5260	52	802.11a	OFDM	20	18.0	17.10	0.07	Right	Cheek	00103	6	99.9	1.542	0.709	1.230	1.001	0.873	A16
5280	56	802.11a	OFDM	20	18.0	17.22	0.04	Right	Cheek	00103	6	99.9	1.488	0.704	1.197	1.001	0.844	
5300	60	802.11a	OFDM	20	18.0	17.17	0.06	Right	Cheek	00103	6	99.9	1.038	0.523	1.211	1.001	0.634	
5280	56	802.11a	OFDM	20	18.0	17.22	0.04	Right	Tilt	00103	6	99.9	0.816	0.358	1.197	1.001	0.429	
5280	56	802.11a	OFDM	20	18.0	17.22	0.20	Left	Cheek	00103	6	99.9	0.418	-	1.197	1.001	-	
5280	56	802.11a	OFDM	20	18.0	17.22	-0.06	Left	Tilt	00103	6	99.9	0.375	-	1.197	1.001	-	
5520	104	802.11a	OFDM	20	18.0	17.32	0.03	Right	Cheek	00103	6	99.9	1.192	0.583	1.169	1.001	0.682	
5600	120	802.11a	OFDM	20	18.0	17.34	0.03	Right	Cheek	00103	6	99.9	1.647	0.697	1.164	1.001	0.812	
5600	120	802.11a	OFDM	20	18.0	17.34	0.16	Right	Tilt	00103	6	99.9	1.119	0.356	1.164	1.001	0.415	
5600	120	802.11a	OFDM	20	18.0	17.34	0.08	Left	Cheek	00103	6	99.9	0.405	-	1.164	1.001	-	
5600	120	802.11a	OFDM	20	18.0	17.34	0.16	Left	Tilt	00103	6	99.9	0.416	-	1.164	1.001	-	
5785	157	802.11a	OFDM	20	18.0	17.46	0.07	Right	Cheek	00103	6	99.9	1.447	0.534	1.132	1.001	0.605	
5785	157	802.11a	OFDM	20	18.0	17.46	0.08	Right	Tilt	00103	6	99.9	0.857	0.300	1.132	1.001	0.340	
5785	157	802.11a	OFDM	20	18.0	17.46	0.16	Left	Cheek	00103	6	99.9	0.424	-	1.132	1.001	-	
5785	157	802.11a	OFDM	20	18.0	17.46	0.02	Left	Tilt	00103	6	99.9	0.365	-	1.132	1.001	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 72 of 109	

**Table 11-17
DSS Head SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle %	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)			(W/kg)	
2441.00	39	Bluetooth	FHSS	11.5	10.95	0.12	Right	Cheek	00103	1	77.1	0.109	1.135	1.297	0.160	A17
2441.00	39	Bluetooth	FHSS	11.5	10.95	0.11	Right	Tilt	00103	1	77.1	0.090	1.135	1.297	0.132	
2441.00	39	Bluetooth	FHSS	11.5	10.95	0.15	Left	Cheek	00103	1	77.1	0.038	1.135	1.297	0.056	
2441.00	39	Bluetooth	FHSS	11.5	10.95	0.06	Left	Tilt	00103	1	77.1	0.038	1.135	1.297	0.056	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram									

11.2 Standalone Body-Worn SAR Data

**Table 11-18
GSM/UMTS/CDMA Body-Worn SAR Data**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of Time Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.7	33.64	0.08	10 mm	00012	1	1:8.3	back	0.325	1.014	0.330	
836.60	190	GSM 850	GPRS	30.7	30.51	-0.03	10 mm	00012	3	1:2.76	back	0.351	1.045	0.367	A18
1880.00	661	GSM 1900	GSM	30.7	30.55	0.03	10 mm	00012	1	1:8.3	back	0.353	1.035	0.365	
1880.00	661	GSM 1900	GPRS	27.2	27.12	-0.14	10 mm	00012	3	1:2.76	back	0.367	1.019	0.374	A20
836.60	4183	UMTS 850	RMC	25.2	25.03	0.02	10 mm	00012	N/A	1:1	back	0.596	1.040	0.620	A22
1732.40	1412	UMTS 1750	RMC	24.5	24.43	-0.05	10 mm	00012	N/A	1:1	back	0.463	1.016	0.470	A24
1880.00	9400	UMTS 1900	RMC	24.5	24.32	-0.02	10 mm	00012	N/A	1:1	back	0.579	1.042	0.603	A26
836.52	384	CDMA BC0 (S22H)	TDSO / SO32	25.2	25.07	-0.04	10 mm	00012	N/A	1:1	back	0.515	1.030	0.530	A28
820.10	564	CDMA BC10 (S90S)	TDSO / SO32	25.2	25.15	-0.02	10 mm	00012	N/A	1:1	back	0.601	1.012	0.608	A30
1880.00	600	PCS CDMA	TDSO / SO32	25.0	24.88	-0.02	10 mm	00012	N/A	1:1	back	0.564	1.028	0.580	A32
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 	Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset
Page 73 of 109		

Table 11-19
LTE Body-Worn SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	25.5	25.44	0.07	0	00020	QPSK	1	25	10 mm	back	1:1	0.602	1.014	0.610	A34
707.50	23095	Mid	LTE Band 12	10	24.5	24.50	0.03	1	00020	QPSK	25	0	10 mm	back	1:1	0.509	1.000	0.509	
782.00	23230	Mid	LTE Band 13	10	25.5	25.44	-0.01	0	00160	QPSK	1	0	10 mm	back	1:1	0.580	1.014	0.588	A36
782.00	23230	Mid	LTE Band 13	10	24.5	24.46	0.01	1	00160	QPSK	25	0	10 mm	back	1:1	0.519	1.009	0.524	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.7	24.67	0.02	0	00012	QPSK	1	74	10 mm	back	1:1	0.616	1.007	0.620	A38
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.7	23.70	0.06	1	00012	QPSK	36	37	10 mm	back	1:1	0.496	1.000	0.496	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.5	24.46	-0.02	0	00038	QPSK	1	0	10 mm	back	1:1	0.595	1.009	0.600	A40
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.49	-0.05	1	00038	QPSK	50	50	10 mm	back	1:1	0.406	1.002	0.407	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.48	-0.16	0	00038	QPSK	1	99	10 mm	back	1:1	0.712	1.005	0.716	A42
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.50	-0.01	1	00038	QPSK	50	50	10 mm	back	1:1	0.576	1.000	0.576	
2506.00	39750	Low	LTE Band 41	20	24.0	23.99	0.01	0	00038	QPSK	1	99	10 mm	back	1:1.58	0.115	1.002	0.115	A44
2506.00	39750	Low	LTE Band 41	20	23.0	23.00	0.18	1	00038	QPSK	50	0	10 mm	back	1:1.58	0.091	1.000	0.091	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT																			
Spatial Peak									Body										
Uncontrolled Exposure/General Population									1.6 W/kg (mW/g)										
									averaged over 1 gram										

Table 11-20
DTS Body-Worn SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	23.0	22.42	0.06	10 mm	00103	1	back	99.9	0.494	0.376	1.143	1.001	0.430	A46
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram									

Table 11-21
NII Body-Worn SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
5280	56	802.11a	OFDM	20	20.0	19.31	-0.05	10 mm	00103	6	back	99.9	1.383	0.652	1.172	1.001	0.765	
5520	104	802.11a	OFDM	20	20.0	19.20	-0.02	10 mm	00103	6	back	99.9	1.602	0.746	1.202	1.001	0.898	A48
5600	120	802.11a	OFDM	20	20.0	19.27	-0.04	10 mm	00103	6	back	99.9	1.576	0.718	1.183	1.001	0.850	
5680	136	802.11a	OFDM	20	20.0	19.10	-0.04	10 mm	00103	6	back	99.9	1.556	0.670	1.230	1.001	0.825	
5765	153	802.11a	OFDM	20	20.0	19.50	0.19	10 mm	00103	6	back	99.9	1.618	0.705	1.122	1.001	0.792	
5785	157	802.11a	OFDM	20	20.0	19.54	0.01	10 mm	00103	6	back	99.9	1.686	0.740	1.112	1.001	0.824	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body										
Spatial Peak								1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population								averaged over 1 gram										

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 74 of 109	

11.3 Standalone Hotspot SAR Data

Table 11-22
GPRS Hotspot SAR Data

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GPRS	30.7	30.51	-0.03	10 mm	00012	3	1:2.76	back	0.351	1.045	0.367	A19
836.60	190	GSM 850	GPRS	30.7	30.51	0.02	10 mm	00012	3	1:2.76	front	0.392	1.045	0.410	
836.60	190	GSM 850	GPRS	30.7	30.51	0.04	10 mm	00012	3	1:2.76	bottom	0.200	1.045	0.209	
836.60	190	GSM 850	GPRS	30.7	30.51	-0.03	10 mm	00012	3	1:2.76	left	0.177	1.045	0.185	
1880.00	661	GSM 1900	GPRS	27.2	27.12	-0.14	10 mm	00012	3	1:2.76	back	0.367	1.019	0.374	
1880.00	661	GSM 1900	GPRS	27.2	27.12	-0.03	10 mm	00012	3	1:2.76	front	0.304	1.019	0.310	
1850.20	512	GSM 1900	GPRS	27.2	27.14	-0.12	10 mm	00012	3	1:2.76	bottom	0.512	1.014	0.519	
1880.00	661	GSM 1900	GPRS	27.2	27.12	0.01	10 mm	00012	3	1:2.76	bottom	0.624	1.019	0.636	
1909.80	810	GSM 1900	GPRS	27.2	27.20	-0.16	10 mm	00012	3	1:2.76	bottom	0.753	1.000	0.753	A21
1880.00	661	GSM 1900	GPRS	27.2	27.12	-0.17	10 mm	00012	3	1:2.76	left	0.168	1.019	0.171	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 75 of 109

Table 11-23
UMTS Hotspot SAR Data

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	25.2	25.03	0.02	10 mm	00012	1:1	back	0.596	1.040	0.620	
826.40	4132	UMTS 850	RMC	25.2	25.13	0.00	10 mm	00012	1:1	front	0.724	1.016	0.736	A23
836.60	4183	UMTS 850	RMC	25.2	25.03	0.03	10 mm	00012	1:1	front	0.679	1.040	0.706	
846.60	4233	UMTS 850	RMC	25.2	25.11	-0.07	10 mm	00012	1:1	front	0.612	1.021	0.625	
836.60	4183	UMTS 850	RMC	25.2	25.03	-0.04	10 mm	00012	1:1	bottom	0.333	1.040	0.346	
836.60	4183	UMTS 850	RMC	25.2	25.03	0.02	10 mm	00012	1:1	left	0.271	1.040	0.282	
1732.40	1412	UMTS 1750	RMC	24.5	24.43	-0.05	10 mm	00012	1:1	back	0.463	1.016	0.470	
1732.40	1412	UMTS 1750	RMC	24.5	24.43	0.01	10 mm	00012	1:1	front	0.428	1.016	0.435	
1712.40	1312	UMTS 1750	RMC	24.5	24.46	-0.02	10 mm	00012	1:1	bottom	0.596	1.009	0.601	
1732.40	1412	UMTS 1750	RMC	24.5	24.43	-0.02	10 mm	00012	1:1	bottom	0.632	1.016	0.642	
1752.60	1513	UMTS 1750	RMC	24.5	24.34	-0.04	10 mm	00012	1:1	bottom	0.737	1.038	0.765	A25
1732.40	1412	UMTS 1750	RMC	24.5	24.43	0.00	10 mm	00012	1:1	left	0.230	1.016	0.234	
1880.00	9400	UMTS 1900	RMC	24.5	24.32	-0.02	10 mm	00012	1:1	back	0.579	1.042	0.603	
1880.00	9400	UMTS 1900	RMC	24.5	24.32	-0.18	10 mm	00012	1:1	front	0.508	1.042	0.529	
1852.40	9262	UMTS 1900	RMC	24.5	24.40	-0.05	10 mm	00012	1:1	bottom	0.918	1.023	0.939	
1880.00	9400	UMTS 1900	RMC	24.5	24.32	0.03	10 mm	00012	1:1	bottom	1.040	1.042	1.084	
1907.60	9538	UMTS 1900	RMC	24.5	24.50	0.05	10 mm	00012	1:1	bottom	1.280	1.000	1.280	A27
1880.00	9400	UMTS 1900	RMC	24.5	24.32	0.02	10 mm	00012	1:1	left	0.274	1.042	0.286	
1907.60	9538	UMTS 1900	RMC	24.5	24.50	0.01	10 mm	00012	1:1	bottom	1.270	1.000	1.270	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note: Blue entry represents variability measurement.

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 76 of 109

Table 11-24
CDMA Hotspot SAR Data

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. 0	25.2	25.18	0.00	10 mm	00012	1:1	back	0.442	1.005	0.444	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. 0	25.2	25.18	0.00	10 mm	00012	1:1	front	0.519	1.005	0.522	A29
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. 0	25.2	25.18	-0.08	10 mm	00012	1:1	bottom	0.252	1.005	0.253	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. 0	25.2	25.18	-0.05	10 mm	00012	1:1	left	0.197	1.005	0.198	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	25.2	25.07	0.01	10 mm	00012	1:1	back	0.584	1.030	0.602	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	25.2	25.07	-0.04	10 mm	00012	1:1	front	0.651	1.030	0.671	A31
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	25.2	25.07	-0.09	10 mm	00012	1:1	bottom	0.340	1.030	0.350	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	25.2	25.07	-0.05	10 mm	00012	1:1	left	0.253	1.030	0.261	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.0	24.94	-0.04	10 mm	00012	1:1	back	0.560	1.014	0.568	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.0	24.94	-0.08	10 mm	00012	1:1	front	0.493	1.014	0.500	
1851.25	25	PCS CDMA	EVDO Rev. 0	25.0	24.94	0.03	10 mm	00012	1:1	bottom	0.742	1.014	0.752	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.0	24.94	0.05	10 mm	00012	1:1	bottom	0.924	1.014	0.937	
1908.75	1175	PCS CDMA	EVDO Rev. 0	25.0	24.87	0.19	10 mm	00012	1:1	bottom	1.020	1.030	1.051	A33
1880.00	600	PCS CDMA	EVDO Rev. 0	25.0	24.94	-0.14	10 mm	00012	1:1	left	0.261	1.014	0.265	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-25
LTE Band 12 Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	25.5	25.44	0.07	0	00020	QPSK	1	25	10 mm	back	1:1	0.602	1.014	0.610	
707.50	23095	Mid	LTE Band 12	10	24.5	24.50	0.03	1	00020	QPSK	25	0	10 mm	back	1:1	0.509	1.000	0.509	
707.50	23095	Mid	LTE Band 12	10	25.5	25.44	-0.09	0	00020	QPSK	1	25	10 mm	front	1:1	0.736	1.014	0.746	A35
707.50	23095	Mid	LTE Band 12	10	24.5	24.50	0.17	1	00020	QPSK	25	0	10 mm	front	1:1	0.639	1.000	0.639	
707.50	23095	Mid	LTE Band 12	10	25.5	25.44	-0.03	0	00020	QPSK	1	25	10 mm	bottom	1:1	0.395	1.014	0.401	
707.50	23095	Mid	LTE Band 12	10	24.5	24.50	-0.09	1	00020	QPSK	25	0	10 mm	bottom	1:1	0.333	1.000	0.333	
707.50	23095	Mid	LTE Band 12	10	25.5	25.44	0.16	0	00020	QPSK	1	25	10 mm	left	1:1	0.399	1.014	0.405	
707.50	23095	Mid	LTE Band 12	10	24.5	24.50	-0.02	1	00020	QPSK	25	0	10 mm	left	1:1	0.379	1.000	0.379	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 77 of 109	

Table 11-26
LTE Band 13 Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	25.5	25.44	-0.01	0	00160	QPSK	1	0	10 mm	back	1:1	0.580	1.014	0.588	
782.00	23230	Mid	LTE Band 13	10	24.5	24.46	0.01	1	00160	QPSK	25	0	10 mm	back	1:1	0.519	1.009	0.524	
782.00	23230	Mid	LTE Band 13	10	25.5	25.44	-0.15	0	00160	QPSK	1	0	10 mm	front	1:1	0.721	1.014	0.731	A37
782.00	23230	Mid	LTE Band 13	10	24.5	24.46	0.06	1	00160	QPSK	25	0	10 mm	front	1:1	0.564	1.009	0.569	
782.00	23230	Mid	LTE Band 13	10	25.5	25.44	0.17	0	00160	QPSK	1	0	10 mm	bottom	1:1	0.454	1.014	0.460	
782.00	23230	Mid	LTE Band 13	10	24.5	24.46	0.18	1	00160	QPSK	25	0	10 mm	bottom	1:1	0.389	1.009	0.393	
782.00	23230	Mid	LTE Band 13	10	25.5	25.44	0.03	0	00160	QPSK	1	0	10 mm	left	1:1	0.317	1.014	0.321	
782.00	23230	Mid	LTE Band 13	10	24.5	24.46	0.16	1	00160	QPSK	25	0	10 mm	left	1:1	0.274	1.009	0.276	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body											
Spatial Peak								1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 1 gram											

Table 11-27
LTE Band 26 (Cell) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.7	24.67	0.02	0	00012	QPSK	1	74	10 mm	back	1:1	0.616	1.007	0.620	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.7	23.70	0.06	1	00012	QPSK	36	37	10 mm	back	1:1	0.496	1.000	0.496	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.7	24.67	-0.10	0	00012	QPSK	1	74	10 mm	front	1:1	0.695	1.007	0.700	A39
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.7	23.70	0.00	1	00012	QPSK	36	37	10 mm	front	1:1	0.584	1.000	0.584	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.7	24.67	0.04	0	00012	QPSK	1	74	10 mm	bottom	1:1	0.319	1.007	0.321	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.7	23.70	0.05	1	00012	QPSK	36	37	10 mm	bottom	1:1	0.261	1.000	0.261	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.7	24.67	0.06	0	00012	QPSK	1	74	10 mm	left	1:1	0.267	1.007	0.269	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.7	23.70	-0.02	1	00012	QPSK	36	37	10 mm	left	1:1	0.217	1.000	0.217	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID ZNFQ710US		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 78 of 109

Table 11-28
LTE Band 66 (AWS) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1770.00	132572	High	LTE Band 66 (AWS)	20	24.5	24.46	-0.02	0	00038	QPSK	1	0	10 mm	back	1:1	0.595	1.009	0.600	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.49	-0.05	1	00038	QPSK	50	50	10 mm	back	1:1	0.406	1.002	0.407	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.5	24.46	-0.02	0	00038	QPSK	1	0	10 mm	front	1:1	0.662	1.009	0.668	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.49	0.01	1	00038	QPSK	50	50	10 mm	front	1:1	0.437	1.002	0.438	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.5	24.44	-0.02	0	00038	QPSK	1	50	10 mm	bottom	1:1	0.812	1.014	0.823	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.5	24.46	-0.06	0	00038	QPSK	1	99	10 mm	bottom	1:1	0.819	1.009	0.826	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.5	24.46	-0.14	0	00038	QPSK	1	0	10 mm	bottom	1:1	0.994	1.009	1.003	A41
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.49	-0.03	1	00038	QPSK	50	50	10 mm	bottom	1:1	0.742	1.002	0.743	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.48	-0.12	1	00038	QPSK	100	0	10 mm	bottom	1:1	0.778	1.005	0.782	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.5	24.46	0.01	0	00038	QPSK	1	0	10 mm	left	1:1	0.327	1.009	0.330	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.49	0.06	1	00038	QPSK	50	50	10 mm	left	1:1	0.221	1.002	0.221	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.5	24.46	-0.01	0	00038	QPSK	1	0	10 mm	bottom	1:1	0.927	1.009	0.935	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Note: Blue entry represents variability measurement.

Table 11-29
LTE Band 25 (PCS) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.48	-0.16	0	00038	QPSK	1	99	10 mm	back	1:1	0.712	1.005	0.716	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.50	-0.01	1	00038	QPSK	50	50	10 mm	back	1:1	0.576	1.000	0.576	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.48	-0.12	0	00038	QPSK	1	99	10 mm	front	1:1	0.656	1.005	0.659	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.50	-0.02	1	00038	QPSK	50	50	10 mm	front	1:1	0.551	1.000	0.551	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	24.39	0.19	0	00038	QPSK	1	99	10 mm	bottom	1:1	0.966	1.026	0.991	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.5	24.44	0.12	0	00038	QPSK	1	99	10 mm	bottom	1:1	1.150	1.014	1.166	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.48	-0.03	0	00038	QPSK	1	99	10 mm	bottom	1:1	1.160	1.005	1.166	A43
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.5	23.37	0.08	1	00038	QPSK	50	50	10 mm	bottom	1:1	0.769	1.030	0.792	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.5	23.47	0.06	1	00038	QPSK	50	25	10 mm	bottom	1:1	0.875	1.007	0.881	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.50	0.06	1	00038	QPSK	50	50	10 mm	bottom	1:1	1.050	1.000	1.050	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.5	23.49	0.07	1	00038	QPSK	100	0	10 mm	bottom	1:1	0.747	1.002	0.748	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.48	-0.10	0	00038	QPSK	1	99	10 mm	left	1:1	0.249	1.005	0.250	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.50	0.00	1	00038	QPSK	50	50	10 mm	left	1:1	0.218	1.000	0.218	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 79 of 109	

Table 11-30
LTE Band 41 Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.	(W/kg)														(W/kg)			
2506.00	39750	Low	LTE Band 41	20	24.0	23.99	0.01	0	00038	QPSK	1	99	10 mm	back	1:1.58	0.115	1.002	0.115	
2506.00	39750	Low	LTE Band 41	20	23.0	23.00	0.18	1	00038	QPSK	50	0	10 mm	back	1:1.58	0.091	1.000	0.091	
2506.00	39750	Low	LTE Band 41	20	24.0	23.99	0.04	0	00038	QPSK	1	99	10 mm	front	1:1.58	0.212	1.002	0.212	A45
2506.00	39750	Low	LTE Band 41	20	23.0	23.00	0.01	1	00038	QPSK	50	0	10 mm	front	1:1.58	0.177	1.000	0.177	
2506.00	39750	Low	LTE Band 41	20	24.0	23.99	-0.17	0	00038	QPSK	1	99	10 mm	bottom	1:1.58	0.122	1.002	0.122	
2506.00	39750	Low	LTE Band 41	20	23.0	23.00	0.06	1	00038	QPSK	50	0	10 mm	bottom	1:1.58	0.088	1.000	0.088	
2506.00	39750	Low	LTE Band 41	20	24.0	23.99	0.11	0	00038	QPSK	1	99	10 mm	left	1:1.58	0.057	1.002	0.057	
2506.00	39750	Low	LTE Band 41	20	23.0	23.00	0.07	1	00038	QPSK	50	0	10 mm	left	1:1.58	0.043	1.000	0.043	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body											
Spatial Peak								1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 1 gram											

Table 11-31
WLAN Hotspot SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	23.0	22.42	0.06	10 mm	00103	1	back	99.9	0.494	-	1.143	1.001	-	
2437	6	802.11b	DSSS	22	23.0	22.42	0.17	10 mm	00103	1	front	99.9	0.450	-	1.143	1.001	-	
2437	6	802.11b	DSSS	22	23.0	22.42	0.16	10 mm	00103	1	top	99.9	0.631	0.487	1.143	1.001	0.557	
2412	1	802.11b	DSSS	22	23.0	22.16	0.02	10 mm	00103	1	left	99.9	0.574	0.494	1.213	1.001	0.600	
2437	6	802.11b	DSSS	22	23.0	22.42	0.15	10 mm	00103	1	left	99.9	0.822	0.646	1.143	1.001	0.739	A47
2462	11	802.11b	DSSS	22	23.0	22.33	0.07	10 mm	00103	1	left	99.9	0.575	0.477	1.167	1.001	0.557	
5240	48	802.11a	OFDM	20	20.0	19.73	0.03	10 mm	00103	6	back	99.9	1.430	0.648	1.064	1.001	0.690	
5240	48	802.11a	OFDM	20	20.0	19.73	0.11	10 mm	00103	6	front	99.9	0.357	-	1.064	1.001	-	
5240	48	802.11a	OFDM	20	20.0	19.73	0.02	10 mm	00103	6	top	99.9	0.136	-	1.064	1.001	-	
5240	48	802.11a	OFDM	20	20.0	19.73	0.05	10 mm	00103	6	left	99.9	1.112	0.493	1.064	1.001	0.525	
5765	153	802.11a	OFDM	20	20.0	19.50	0.19	10 mm	00103	6	back	99.9	1.618	0.705	1.122	1.001	0.792	
5785	157	802.11a	OFDM	20	20.0	19.54	0.01	10 mm	00103	6	back	99.9	1.686	0.740	1.112	1.001	0.824	A49
5805	161	802.11a	OFDM	20	20.0	19.48	-0.03	10 mm	00103	6	back	99.9	1.589	0.707	1.127	1.001	0.798	
5785	157	802.11a	OFDM	20	20.0	19.54	0.03	10 mm	00103	6	front	99.9	0.331	-	1.112	1.001	-	
5785	157	802.11a	OFDM	20	20.0	19.54	0.04	10 mm	00103	6	top	99.9	0.155	-	1.112	1.001	-	
5785	157	802.11a	OFDM	20	20.0	19.54	0.03	10 mm	00103	6	left	99.9	1.021	0.445	1.112	1.001	0.495	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body										
Spatial Peak								1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population								averaged over 1 gram										

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 80 of 109	

11.4 Standalone Phablet SAR Data

Table 11-32
UMTS/CDMA Phablet SAR Data

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Duty Cycle	Side	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1732.40	1412	UMTS 1750	RMC	24.5	24.43	0.03	3 mm	00012	1:1	back	0.864	1.016	0.878	
1732.40	1412	UMTS 1750	RMC	24.5	24.43	0.06	2 mm	00012	1:1	front	0.881	1.016	0.895	
1712.40	1312	UMTS 1750	RMC	24.5	24.46	0.01	0 mm	00012	1:1	bottom	2.760	1.009	2.785	
1732.40	1412	UMTS 1750	RMC	24.5	24.43	0.00	0 mm	00012	1:1	bottom	2.790	1.016	2.835	
1752.60	1513	UMTS 1750	RMC	24.5	24.34	0.00	0 mm	00012	1:1	bottom	2.900	1.038	3.010	A50
1732.40	1412	UMTS 1750	RMC	24.5	24.43	-0.02	0 mm	00012	1:1	left	0.606	1.016	0.616	
1732.40	1412	UMTS 1750	RMC	23.5	23.42	0.00	0 mm	00012	1:1	back	1.390	1.019	1.416	
1732.40	1412	UMTS 1750	RMC	23.5	23.42	-0.02	0 mm	00012	1:1	front	1.610	1.019	1.641	
1880.00	9400	UMTS 1900	RMC	24.5	24.32	0.00	3 mm	00012	1:1	back	1.110	1.042	1.157	
1880.00	9400	UMTS 1900	RMC	24.5	24.32	-0.09	2 mm	00012	1:1	front	1.200	1.042	1.250	
1852.40	9262	UMTS 1900	RMC	24.5	24.40	-0.04	0 mm	00012	1:1	bottom	3.120	1.023	3.192	
1880.00	9400	UMTS 1900	RMC	24.5	24.32	0.03	0 mm	00012	1:1	bottom	2.960	1.042	3.084	
1907.60	9538	UMTS 1900	RMC	24.5	24.50	-0.09	0 mm	00012	1:1	bottom	3.150	1.000	3.150	
1880.00	9400	UMTS 1900	RMC	24.5	24.32	-0.09	0 mm	00012	1:1	left	0.746	1.042	0.777	
1880.00	9400	UMTS 1900	RMC	23.5	23.49	0.04	0 mm	00012	1:1	back	1.590	1.002	1.593	
1852.40	9262	UMTS 1900	RMC	23.5	23.37	-0.03	0 mm	00012	1:1	front	1.960	1.030	2.019	
1880.00	9400	UMTS 1900	RMC	23.5	23.49	-0.04	0 mm	00012	1:1	front	2.020	1.002	2.024	
1907.60	9538	UMTS 1900	RMC	23.5	23.31	-0.03	0 mm	00012	1:1	front	2.220	1.045	2.320	
1907.60	9538	UMTS 1900	RMC	24.5	24.50	-0.06	0 mm	00012	1:1	bottom	3.200	1.000	3.200	A51
1880.00	600	PCS CDMA	EVDO Rev. 0	25.0	24.94	0.01	3 mm	00012	1:1	back	0.995	1.014	1.009	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.0	24.94	-0.04	2 mm	00012	1:1	front	1.290	1.014	1.308	
1851.25	25	PCS CDMA	EVDO Rev. 0	25.0	24.94	-0.03	0 mm	00012	1:1	bottom	2.820	1.014	2.859	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.0	24.94	-0.07	0 mm	00012	1:1	bottom	2.730	1.014	2.768	
1908.75	1175	PCS CDMA	EVDO Rev. 0	25.0	24.87	-0.05	0 mm	00012	1:1	bottom	3.100	1.030	3.193	A52
1880.00	600	PCS CDMA	EVDO Rev. 0	25.0	24.94	-0.02	0 mm	00012	1:1	left	0.685	1.014	0.695	
1880.00	600	PCS CDMA	EVDO Rev. 0	23.5	23.34	-0.13	0 mm	00012	1:1	back	1.620	1.038	1.682	
1880.00	600	PCS CDMA	EVDO Rev. 0	23.5	23.34	-0.10	0 mm	00012	1:1	front	1.340	1.038	1.391	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Phablet 4.0 W/kg (mW/g) averaged over 10 grams							

Note: Blue entry represents variability measurement.

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 81 of 109

Table 11-33
LTE Phablet SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1770.00	132572	High	LTE Band 66 (AWS)	20	24.5	24.46	-0.11	0	00020	QPSK	1	0	3 mm	back	1:1	0.539	1.009	0.544	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.49	0.02	1	00020	QPSK	50	50	3 mm	back	1:1	0.449	1.002	0.450	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.5	24.46	0.06	0	00020	QPSK	1	0	2 mm	front	1:1	1.020	1.009	1.029	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.49	-0.05	1	00020	QPSK	50	50	2 mm	front	1:1	0.828	1.002	0.830	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.5	24.44	0.03	0	00020	QPSK	1	50	0 mm	bottom	1:1	2.590	1.014	2.626	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.5	24.46	0.00	0	00020	QPSK	1	99	0 mm	bottom	1:1	3.160	1.009	3.188	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.5	24.46	-0.01	0	00020	QPSK	1	0	0 mm	bottom	1:1	2.900	1.009	2.926	
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.5	23.41	-0.05	1	00020	QPSK	50	50	0 mm	bottom	1:1	2.160	1.021	2.205	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.5	23.38	-0.03	1	00020	QPSK	50	0	0 mm	bottom	1:1	2.210	1.028	2.272	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.49	0.01	1	00020	QPSK	50	50	0 mm	bottom	1:1	2.420	1.002	2.425	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.48	0.11	1	00020	QPSK	100	0	0 mm	bottom	1:1	2.470	1.005	2.482	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.5	24.46	0.04	0	00020	QPSK	1	0	0 mm	left	1:1	0.490	1.009	0.494	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.49	0.02	1	00020	QPSK	50	50	0 mm	left	1:1	0.397	1.002	0.398	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.47	0.00	0	00038	QPSK	1	99	0 mm	back	1:1	1.530	1.007	1.541	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.45	-0.03	0	00038	QPSK	50	25	0 mm	back	1:1	1.350	1.012	1.366	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.47	0.18	0	00038	QPSK	1	99	0 mm	front	1:1	1.600	1.007	1.611	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.45	-0.12	0	00038	QPSK	50	25	0 mm	front	1:1	1.460	1.012	1.478	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.5	24.46	0.08	0	00020	QPSK	1	99	0 mm	bottom	1:1	3.170	1.009	3.199	A53
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.48	0.06	0	00038	QPSK	1	99	3 mm	back	1:1	1.060	1.005	1.065	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.50	0.01	1	00038	QPSK	50	50	3 mm	back	1:1	0.874	1.000	0.874	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.48	-0.03	0	00038	QPSK	1	99	2 mm	front	1:1	1.520	1.005	1.528	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.50	-0.03	1	00038	QPSK	50	50	2 mm	front	1:1	1.240	1.000	1.240	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	24.39	-0.05	0	00038	QPSK	1	99	0 mm	bottom	1:1	3.000	1.026	3.078	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.5	24.44	-0.09	0	00038	QPSK	1	99	0 mm	bottom	1:1	3.090	1.014	3.133	A54
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.48	-0.03	0	00038	QPSK	1	99	0 mm	bottom	1:1	3.030	1.005	3.045	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.5	23.37	-0.10	1	00038	QPSK	50	50	0 mm	bottom	1:1	2.500	1.030	2.575	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.5	23.47	-0.10	1	00038	QPSK	50	25	0 mm	bottom	1:1	2.580	1.007	2.598	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.50	-0.04	1	00038	QPSK	50	50	0 mm	bottom	1:1	2.580	1.000	2.580	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.5	23.49	0.14	1	00038	QPSK	100	0	0 mm	bottom	1:1	2.500	1.002	2.505	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.48	-0.14	0	00038	QPSK	1	99	0 mm	left	1:1	0.650	1.005	0.653	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.50	0.05	1	00038	QPSK	50	50	0 mm	left	1:1	0.527	1.000	0.527	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.48	-0.13	0	00038	QPSK	1	50	0 mm	back	1:1	1.430	1.005	1.437	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.46	-0.16	0	00038	QPSK	50	0	0 mm	back	1:1	1.440	1.009	1.453	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.48	-0.08	0	00038	QPSK	1	50	0 mm	front	1:1	1.920	1.005	1.930	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.46	-0.17	0	00038	QPSK	50	0	0 mm	front	1:1	1.960	1.009	1.978	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Phablet											
Spatial Peak								4.0 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 10 grams											

Note: Blue entry represents variability measurement.

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 82 of 109	

Table 11-34
WLAN Phablet SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (10g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (10g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
5260	52	802.11a	OFDM	20	20.0	19.27	0.04	0 mm	00103	6	back	99.9	12.815	1.970	1.183	1.001	2.333	A55
5280	56	802.11a	OFDM	20	20.0	19.31	0.11	0 mm	00103	6	back	99.9	14.094	1.980	1.172	1.001	2.323	
5300	60	802.11a	OFDM	20	20.0	19.20	0.02	0 mm	00103	6	back	99.9	10.805	1.620	1.202	1.001	1.949	
5280	56	802.11a	OFDM	20	20.0	19.31	0.02	0 mm	00103	6	front	99.9	5.114	0.614	1.172	1.001	0.720	
5280	56	802.11a	OFDM	20	20.0	19.31	0.19	0 mm	00103	6	top	99.9	3.459	-	1.172	1.001	-	
5280	56	802.11a	OFDM	20	20.0	19.31	0.12	0 mm	00103	6	left	99.9	8.311	0.969	1.172	1.001	1.137	
5520	104	802.11a	OFDM	20	20.0	19.20	-0.07	0 mm	00103	6	back	99.9	10.425	1.670	1.202	1.001	2.009	
5600	120	802.11a	OFDM	20	20.0	19.27	0.16	0 mm	00103	6	back	99.9	13.930	1.800	1.183	1.001	2.132	
5600	120	802.11a	OFDM	20	20.0	19.27	0.09	0 mm	00103	6	front	99.9	7.010	0.724	1.183	1.001	0.857	
5600	120	802.11a	OFDM	20	20.0	19.27	0.03	0 mm	00103	6	top	99.9	3.527	-	1.183	1.001	-	
5600	120	802.11a	OFDM	20	20.0	19.27	0.03	0 mm	00103	6	left	99.9	11.135	1.020	1.183	1.001	1.208	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Phablet 4.0 W/kg (mW/g) averaged over 10 grams										

11.5 SAR Test Notes

General Notes:

- The test data reported are the worst-case SAR values according to test procedures specified in FCC KDB Publication 616217 D04v01r02 and FCC KDB Publication 447498 D01v06.
- Batteries are fully charged at the beginning of the SAR measurements.
- Liquid tissue depth was at least 15.0 cm for all frequencies.
- The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
- SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
- Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 10 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
- Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was ≤ 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were required.
- Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 13 for variability analysis.
- During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).
- Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is > 160 mm and < 200 mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.
- This device utilizes power reduction for some wireless modes and technologies, as outlined in Section 1.3. The maximum output power allowed for each transmitter and exposure condition was evaluated for SAR compliance based on expected use conditions and simultaneous transmission scenarios.
- Unless otherwise noted, when 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds below.

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 83 of 109

- Additional SAR tests for phablet SAR were evaluated per FCC KDB Publication 616217 Section 6 (See Section 6.8 for more information).

GSM Test Notes:

- Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
- Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
- Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.
- GPRS was additionally evaluated for head and body-worn exposure conditions to address possible VoIP scenarios.

CDMA Notes:

- Head SAR for CDMA2000 mode was tested under RC3/SO55 per FCC KDB Publication 941225 D01v03r01.
- Body-Worn SAR was tested with 1x RTT with TDSO / SO32 FCH Only. EVDO Rev0 and RevA and TDSO / SO32 FCH+SCH SAR tests were not required per the 3G SAR Test Reduction Procedure in FCC KDB Publication 941225 D01v03r01.
- CDMA Wireless Router SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0 according to KDB 941225 D01v03r01 procedures for data devices. Wireless Router SAR tests for Subtype 2 of Rev.A and 1x RTT configurations were not required per the 3G SAR Test Reduction Policy in KDB Publication 941225 D01v03r01.
- Head SAR was additionally evaluated using EVDO Rev. A to determine compliance for VoIP operations.
- Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.
- CDMA 1X Advanced technology was not required for SAR since the maximum allowed output powers for 1X Advanced was not more than 0.25 dB higher than the maximum powers for 1X.

UMTS Notes:

- UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
- Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 84 of 109

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 8.6.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 and MCC=001 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per FCC KDB Publication 447498 D01v06, when the reported LTE Band 41 SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg for 1g evaluations, testing at the other channels was required for such test configurations.
5. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r04. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.
6. Per KDB Publication 941225 D05Av01r02, SAR for downlink only LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.

WLAN Notes:

1. For held-to-ear, hotspot, and phablet operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg for 1g evaluations, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 8.7.5 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg for 1g evaluations. See Section 8.7.6 for more information.
4. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg for 1g evaluations or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.
6. When 10-g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

Bluetooth Notes

1. Bluetooth SAR was measured with the device connected to a call box with hopping disabled with DH5 operation and Tx Tests test mode type. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. See Section 9.6 for the time domain plot and calculation for the duty factor of the device.

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 85 of 109

12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore, simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g or 10g SAR.

When standalone SAR is not required to be measured, per FCC KDB 447498 D01v06 4.3.2 b), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$

When standalone SAR is not required to be measured, per FCC KDB 447498 D01v06 4.3.2 b), the following equation must be used to estimate the standalone 10g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{18.75} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$

Table 12-1
Estimated SAR

Mode	Frequency	Maximum Allowed Power	Separation Distance (Body)	Estimated SAR (Body)	Separation Distance (Phablet)	Estimated SAR (Phablet)
	[MHz]	[dBm]	[mm]	[W/kg]	[mm]	[W/kg]
Bluetooth	2480	11.50	10	0.294	5	0.235

Note: Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset			Page 86 of 109

12.3 Head SAR Simultaneous Transmission Analysis

Table 12-2
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM/GPRS 850	0.126	1.019	1.145
	GSM/GPRS 1900	0.084	1.019	1.103
	UMTS 850	0.184	1.019	1.203
	UMTS 1750	0.088	1.019	1.107
	UMTS 1900	0.139	1.019	1.158
	CDMA/EVDO BC0 (§22H)	0.191	1.019	1.210
	CDMA/EVDO BC10 (§90S)	0.201	1.019	1.220
	PCS CDMA/EVDO	0.125	1.019	1.144
	LTE Band 12	0.210	1.019	1.229
	LTE Band 13	0.197	1.019	1.216
	LTE Band 26 (Cell)	0.178	1.019	1.197
	LTE Band 66 (AWS)	0.116	1.019	1.135
	LTE Band 25 (PCS)	0.154	1.019	1.173
	LTE Band 41	0.030	1.019	1.049

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 87 of 109

Table 12-3
Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM/GPRS 850	0.126	0.873	0.999
	GSM/GPRS 1900	0.084	0.873	0.957
	UMTS 850	0.184	0.873	1.057
	UMTS 1750	0.088	0.873	0.961
	UMTS 1900	0.139	0.873	1.012
	CDMA/EVDO BC0 (\$22H)	0.191	0.873	1.064
	CDMA/EVDO BC10 (\$90S)	0.201	0.873	1.074
	PCS CDMA/EVDO	0.125	0.873	0.998
	LTE Band 12	0.210	0.873	1.083
	LTE Band 13	0.197	0.873	1.070
	LTE Band 26 (Cell)	0.178	0.873	1.051
	LTE Band 66 (AWS)	0.116	0.873	0.989
	LTE Band 25 (PCS)	0.154	0.873	1.027
	LTE Band 41	0.030	0.873	0.903

FCC ID ZNFQ710US		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 88 of 109	

Table 12-4
Simultaneous Transmission Scenario with Bluetooth (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM/GPRS 850	0.126	0.160	0.286
	GSM/GPRS 1900	0.084	0.160	0.244
	UMTS 850	0.184	0.160	0.344
	UMTS 1750	0.088	0.160	0.248
	UMTS 1900	0.139	0.160	0.299
	CDMA/EVDO BC0 (\$22H)	0.191	0.160	0.351
	CDMA/EVDO BC10 (\$90S)	0.201	0.160	0.361
	PCS CDMA/EVDO	0.125	0.160	0.285
	LTE Band 12	0.210	0.160	0.370
	LTE Band 13	0.197	0.160	0.357
	LTE Band 26 (Cell)	0.178	0.160	0.338
	LTE Band 66 (AWS)	0.116	0.160	0.276
	LTE Band 25 (PCS)	0.154	0.160	0.314
	LTE Band 41	0.030	0.160	0.190

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 	Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset
Page 89 of 109		

12.4 Body-Worn Simultaneous Transmission Analysis

Table 12-5
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	GSM/GPRS 850	0.367	0.430	0.797
	GSM/GPRS 1900	0.374	0.430	0.804
	UMTS 850	0.620	0.430	1.050
	UMTS 1750	0.470	0.430	0.900
	UMTS 1900	0.603	0.430	1.033
	CDMA BC0 (§22H)	0.530	0.430	0.960
	CDMA BC10 (§90S)	0.608	0.430	1.038
	PCS CDMA	0.580	0.430	1.010
	LTE Band 12	0.610	0.430	1.040
	LTE Band 13	0.588	0.430	1.018
	LTE Band 26 (Cell)	0.620	0.430	1.050
	LTE Band 66 (AWS)	0.600	0.430	1.030
	LTE Band 25 (PCS)	0.716	0.430	1.146
	LTE Band 41	0.115	0.430	0.545

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 90 of 109	

Table 12-6
Simultaneous Transmission Scenario with 5 GHz WLAN (Body-Worn at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Body-Worn	GSM/GPRS 850	0.367	0.898	1.265	N/A
	GSM/GPRS 1900	0.374	0.898	1.272	N/A
	UMTS 850	0.620	0.898	1.518	N/A
	UMTS 1750	0.470	0.898	1.368	N/A
	UMTS 1900	0.603	0.898	1.501	N/A
	CDMA BC0 (§22H)	0.530	0.898	1.428	N/A
	CDMA BC10 (§90S)	0.608	0.898	1.506	N/A
	PCS CDMA	0.580	0.898	1.478	N/A
	LTE Band 12	0.610	0.898	1.508	N/A
	LTE Band 13	0.588	0.898	1.486	N/A
	LTE Band 26 (Cell)	0.620	0.898	1.518	N/A
	LTE Band 66 (AWS)	0.600	0.898	1.498	N/A
	LTE Band 25 (PCS)	0.716	0.898	See Note 1	0.02
	LTE Band 41	0.115	0.898	1.013	N/A

FCC ID ZNFQ710US		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 91 of 109

Table 12-7
Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	GSM/GPRS 850	0.367	0.294	0.661
	GSM/GPRS 1900	0.374	0.294	0.668
	UMTS 850	0.620	0.294	0.914
	UMTS 1750	0.470	0.294	0.764
	UMTS 1900	0.603	0.294	0.897
	CDMA BC0 (\$22H)	0.530	0.294	0.824
	CDMA BC10 (\$90S)	0.608	0.294	0.902
	PCS CDMA	0.580	0.294	0.874
	LTE Band 12	0.610	0.294	0.904
	LTE Band 13	0.588	0.294	0.882
	LTE Band 26 (Cell)	0.620	0.294	0.914
	LTE Band 66 (AWS)	0.600	0.294	0.894
	LTE Band 25 (PCS)	0.716	0.294	1.010
	LTE Band 41	0.115	0.294	0.409

Note:

1. No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.04 per FCC KDB 447498 D01v06. See Section 12.7 for detailed SPLS ratio analysis.
2. Bluetooth SAR was not required to be measured per FCC KDB Publication 447498 D01v06. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

FCC ID ZNFQ710US		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 92 of 109

12.5 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-”).

(*) For test positions that were not required to be evaluated for WLAN SAR per FCC KDB publication 248227, the worst case WLAN SAR result for applicable exposure conditions was used for simultaneous transmission analysis.

Table 12-8
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.410	0.739	1.149
	GPRS 1900	0.753	0.739	1.492
	UMTS 850	0.736	0.739	1.475
	UMTS 1750	0.765	0.739	1.504
	UMTS 1900	1.280	0.739	See Table Below
	EVDO BC0 (\$22H)	0.522	0.739	1.261
	EVDO BC10 (\$90S)	0.671	0.739	1.410
	PCS EVDO	1.051	0.739	See Table Below
	LTE Band 12	0.746	0.739	1.485
	LTE Band 13	0.731	0.739	1.470
	LTE Band 26 (Cell)	0.700	0.739	1.439
	LTE Band 66 (AWS)	1.003	0.739	See Table Below
	LTE Band 25 (PCS)	1.166	0.739	See Table Below
	LTE Band 41	0.212	0.739	0.951

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 93 of 109

Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Back	0.603	0.739*	1.342
	Front	0.529	0.739*	1.268
	Top	-	0.557	0.557
	Bottom	1.280	-	1.280
	Right	-	-	0.000
	Left	0.286	0.739	1.025
Simult Tx	Configuration	PCS EVDO SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Back	0.568	0.739*	1.307
	Front	0.500	0.739*	1.239
	Top	-	0.557	0.557
	Bottom	1.051	-	1.051
	Right	-	-	0.000
	Left	0.265	0.739	1.004
Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Back	0.600	0.739*	1.339
	Front	0.668	0.739*	1.407
	Top	-	0.557	0.557
	Bottom	1.003	-	1.003
	Right	-	-	0.000
	Left	0.330	0.739	1.069
Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Back	0.716	0.739*	1.455
	Front	0.659	0.739*	1.398
	Top	-	0.557	0.557
	Bottom	1.166	-	1.166
	Right	-	-	0.000
	Left	0.250	0.739	0.989

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 94 of 109

Table 12-9
Simultaneous Transmission Scenario with 5 GHz WLAN (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.410	0.824	1.234
	GPRS 1900	0.753	0.824	1.577
	UMTS 850	0.736	0.824	1.560
	UMTS 1750	0.765	0.824	1.589
	UMTS 1900	1.280	0.824	See Table Below
	EVDO BC0 (\$22H)	0.522	0.824	1.346
	EVDO BC10 (\$90S)	0.671	0.824	1.495
	PCS EVDO	1.051	0.824	See Table Below
	LTE Band 12	0.746	0.824	1.570
	LTE Band 13	0.731	0.824	1.555
	LTE Band 26 (Cell)	0.700	0.824	1.524
	LTE Band 66 (AWS)	1.003	0.824	See Table Below
	LTE Band 25 (PCS)	1.166	0.824	See Table Below
	LTE Band 41	0.212	0.824	1.036

Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Back	0.603	0.824	1.427
	Front	0.529	0.824*	1.353
	Top	-	0.824*	0.824
	Bottom	1.280	-	1.280
	Right	-	-	0.000
	Left	0.286	0.525	0.811

FCC ID ZNFQ710US		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 95 of 109	

Simult Tx	Configuration	PCS EVDO SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Back	0.568	0.824	1.392
	Front	0.500	0.824*	1.324
	Top	-	0.824*	0.824
	Bottom	1.051	-	1.051
	Right	-	-	0.000
	Left	0.265	0.525	0.790

Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Back	0.600	0.824	1.424
	Front	0.668	0.824*	1.492
	Top	-	0.824*	0.824
	Bottom	1.003	-	1.003
	Right	-	-	0.000
	Left	0.330	0.525	0.855

Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Back	0.716	0.824	1.540
	Front	0.659	0.824*	1.483
	Top	-	0.824*	0.824
	Bottom	1.166	-	1.166
	Right	-	-	0.000
	Left	0.250	0.525	0.775

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 			Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 96 of 109

Table 12-10
Simultaneous Transmission Scenario with Bluetooth (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.410	0.294	0.704
	GPRS 1900	0.753	0.294	1.047
	UMTS 850	0.736	0.294	1.030
	UMTS 1750	0.765	0.294	1.059
	UMTS 1900	1.280	0.294	1.574
	EVDO BC0 (§22H)	0.522	0.294	0.816
	EVDO BC10 (§90S)	0.671	0.294	0.965
	PCS EVDO	1.051	0.294	1.345
	LTE Band 12	0.746	0.294	1.040
	LTE Band 13	0.731	0.294	1.025
	LTE Band 26 (Cell)	0.700	0.294	0.994
	LTE Band 66 (AWS)	1.003	0.294	1.297
	LTE Band 25 (PCS)	1.166	0.294	1.460
	LTE Band 41	0.212	0.294	0.506

Note: Bluetooth SAR was not required to be measured per FCC KDB Publication 447498 D01v06. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 	Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset
Page 97 of 109		

12.6 Phablet Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-”).

(*) For test positions that were not required to be evaluated for WLAN SAR per FCC KDB publication 248227, the worst case WLAN SAR result for applicable exposure conditions was used for simultaneous transmission analysis.

For Phablet SAR summation the highest reported SAR across all test distances was used as the most conservative evaluation for simultaneous transmission analysis for each device edge.

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required if wireless router 1g SAR (scaled to the maximum output power, including tolerance) < 1.2 W/kg. Therefore, no further analysis beyond the tables included in this section was required to determine that possible simultaneous transmission scenarios would not exceed the SAR limit.

Table 12-11
Simultaneous Transmission Scenario with 5 GHz WLAN (Phablet)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Phablet SAR	UMTS 1750	3.010	2.333	See Table Below
	UMTS 1900	3.200	2.333	See Table Below
	PCS EVDO	3.193	2.333	See Table Below
	LTE Band 66 (AWS)	3.199	2.333	See Table Below
	LTE Band 25 (PCS)	3.133	2.333	See Table Below

Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Phablet SAR	Back	1.416	2.333	3.749
	Front	1.641	0.857	2.498
	Top	-	2.333*	2.333
	Bottom	3.010	-	3.010
	Right	-	-	0.000
	Left	0.616	1.208	1.824

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 98 of 109

Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Phablet SAR	Back	1.593	2.333	3.926
	Front	2.320	0.857	3.177
	Top	-	2.333*	2.333
	Bottom	3.200	-	3.200
	Right	-	-	0.000
	Left	0.777	1.208	1.985

Simult Tx	Configuration	PCS EVDO SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Phablet SAR	Back	1.682	2.333	See Note 1	0.06
	Front	1.391	0.857	2.248	N/A
	Top	-	2.333*	2.333	N/A
	Bottom	3.193	-	3.193	N/A
	Right	-	-	0.000	N/A
	Left	0.695	1.208	1.903	N/A

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 			Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 99 of 109

Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Phablet SAR	Back	1.541	2.333	3.874
	Front	1.611	0.857	2.468
	Top	-	2.333*	2.333
	Bottom	3.199	-	3.199
	Right	-	-	0.000
	Left	0.494	1.208	1.702

Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Phablet SAR	Back	1.453	2.333	3.786
	Front	1.978	0.857	2.835
	Top	-	2.333*	2.333
	Bottom	3.133	-	3.133
	Right	-	-	0.000
	Left	0.653	1.208	1.861

Table 12-12
Simultaneous Transmission Scenario with Bluetooth (Phablet)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Phablet SAR	UMTS 1750	3.010	0.235	3.245
	UMTS 1900	3.200	0.235	3.435
	PCS EVDO	3.193	0.235	3.428
	LTE Band 66 (AWS)	3.199	0.235	3.434
	LTE Band 25 (PCS)	3.133	0.235	3.368

Note:

1. No evaluation was performed to determine the aggregate 10g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.10 per FCC KDB 447498 D01v06. See Section 12.7 for detailed SPLS ratio analysis.
2. Bluetooth SAR was not required to be measured per FCC KDB Publication 447498 D01v06. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 100 of 109

12.7 SPLSR Evaluation and Analysis

Per FCC KDB Publication 447498 D01v06, when the sum of the standalone transmitters is more than 1.6 W/kg for 1g and 4 W/kg for 10g, the SAR sum to peak locations can be analyzed to determine SAR distribution overlaps. When the SAR peak to location ratio (shown below) for each pair of antennas is ≤ 0.04 for 1g and ≤ 0.10 for 10g, simultaneous SAR evaluation is not required. The distance between the transmitters was calculated using the following formula.

$$\text{Distance}_{\text{Tx1} - \text{Tx2}} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2}$$

$$\text{SPLS Ratio} = \frac{(SAR_1 + SAR_2)^{1.5}}{R_i}$$

12.7.1 Body-worn Back Side SPLSR Evaluation and Analysis


Table 12-13
Peak SAR Locations for Body-Worn Back Side

Mode/Band	x (mm)	y (mm)	Reported SAR (W/kg)
5 GHz WLAN	16.00	58.00	0.898
LTE Band 25	-27.50	-70.50	0.716

Table 12-14
Body-Worn Back Side SAR to Peak Location Separation Ratio Calculations

Antenna Pair		Standalone SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	D _{a-b}	(a+b) ^{1.5} /D _{a-b}	
5 GHz WLAN	LTE Band 25	0.898	0.716	1.614	135.66	0.02	1

Table 12-15
Body-Worn Back Side SAR to Peak Location Separation Ratio Plots

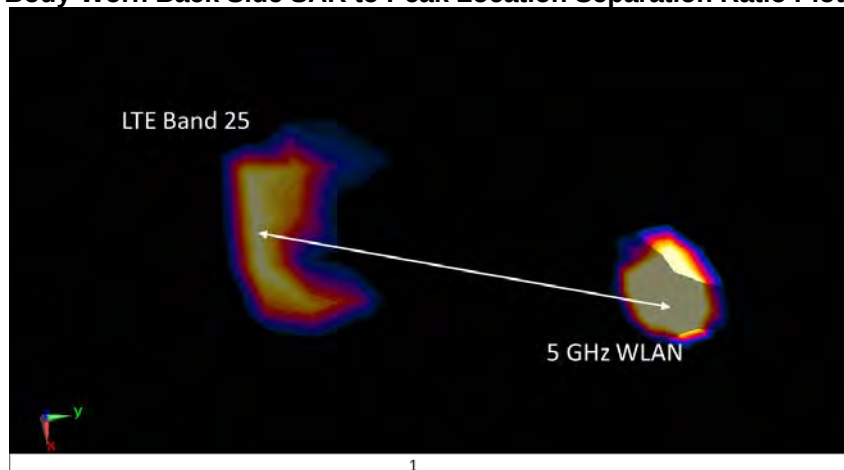

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 101 of 109

12.7.2 Phablet Back Side SPLSR Evaluation and Analysis


Table 12-16
Peak SAR Locations for Phablet Back Side

Mode/Band	x (mm)	y (mm)	Reported SAR (W/kg)
5 GHz WLAN	17.00	56.00	2.333
PCS EVDO	-8.50	-78.50	1.682

Table 12-17
Phablet Back Side SAR to Peak Location Separation Ratio Calculations

Antenna Pair		Standalone SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	D _{a-b}	$(a+b)^{1.5}/D_{a-b}$	
5 GHz WLAN	PCS EVDO	2.333	1.682	4.015	136.90	0.06	2

Table 12-18
Phablet Back Side SAR to Peak Location Separation Ratio Plots

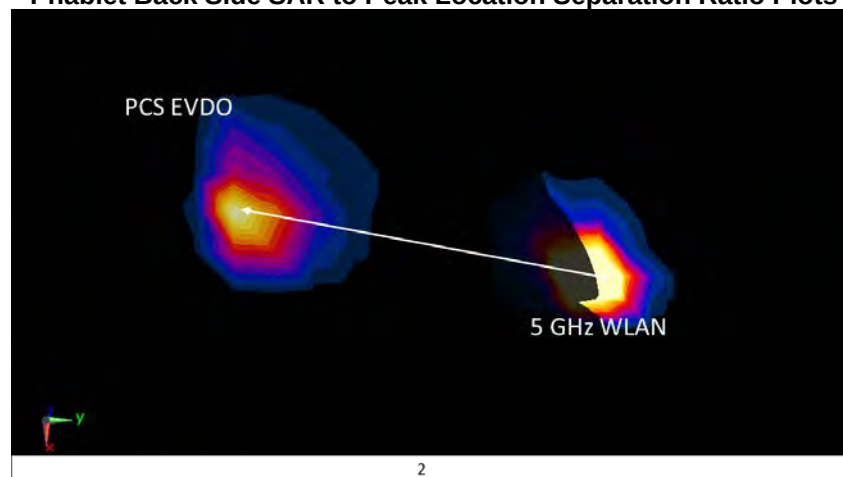

12.8 Simultaneous Transmission Conclusion

The above numerical summed SAR results and SPLSR analysis are sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528- 2013 Section 6.3.4.1.

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 102 of 109

13 SAR MEASUREMENT VARIABILITY

13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg
- 5) When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

Table 13-1
Head SAR Measurement Variability Results

HEAD VARIABILITY RESULTS														
Band	FREQUENCY		Mode/Band	Service	Side	Test Position	Data Rate (Mbps)	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.						(W/kg)	(W/kg)		(W/kg)		(W/kg)	
2450	2437.00	6	802.11b, 22 MHz Bandwidth	DSSS	Right	Cheek	1	0.985	0.944	1.04	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Head 1.6 W/kg (mW/g) averaged over 1 gram								

Table 13-2
Body SAR Measurement Variability Results

BODY VARIABILITY RESULTS													
Band	FREQUENCY		Mode	Service	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1900	1907.60	9538	UMTS 1900	RMC	bottom	10 mm	1.280	1.270	1.01	N/A	N/A	N/A	N/A
1750	1770.00	132572	LTE Band 66 (AWS), 20 MHz Bandwidth	QPSK, 1 RB, 0 RB Offset	bottom	10 mm	0.994	0.927	1.07	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Body 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 103 of 109

Table 13-3
Phablet SAR Measurement Variability Results

PHABLET VARIABILITY RESULTS													
Band	FREQUENCY		Mode	Service	Side	Spacing	Measured SAR (10g)	1st Repeated SAR (10g)	Ratio	2nd Repeated SAR (10g)	Ratio	3rd Repeated SAR (10g)	Ratio
	MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1900	1907.60	9538	UMTS 1900	RMC	bottom	0 mm	3.150	3.200	1.02	N/A	N/A	N/A	N/A
1750	1745.00	132322	LTE Band 66 (AWS), 20 MHz Bandwidth	QPSK, 1 RB, 99 RB Offset	bottom	0 mm	3.160	3.170	1.00	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT						Phablet							
Spatial Peak						4.0 W/kg (mW/g)							
Uncontrolled Exposure/General Population						averaged over 10 grams							

13.2 Measurement Uncertainty

The measured SAR was <1.5 W/kg for 1g and <3.75 W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID ZNFQ710US		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 104 of 109

14 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
Agilent	8648D	(9kHz-4GHz) Signal Generator	N/A	N/A	N/A	3629U00687
Agilent	E5515C	8960 Series 10 Wireless Communications Test Set	11/15/2017	Annual	11/15/2018	GB42230325
Agilent	E4438C	ESG Vector Signal Generator	3/21/2017	Biennial	3/21/2019	MY45090700
Agilent	E4438C	ESG Vector Signal Generator	3/24/2017	Biennial	3/24/2019	MY42082385
Agilent	N9020A	MXA Signal Analyzer	1/24/2018	Annual	1/24/2019	US46470561
Agilent	N5182A	MXG Vector Signal Generator	11/1/2017	Annual	11/1/2018	MY47420603
Agilent	8753ES	S-Parameter Network Analyzer	9/14/2017	Annual	9/14/2018	US39170118
Agilent	8753ES	S-Parameter Vector Network Analyzer	8/17/2017	Annual	8/17/2018	MY4003841
Agilent	E5515C	Wireless Communications Test Set	5/31/2017	Annual	5/31/2018	GB43304278
Agilent	N4010A	Wireless Connectivity Test Set	N/A	N/A	N/A	GB44450273
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433972
Anritsu	ML2495A	Power Meter	10/22/2017	Annual	10/22/2018	941001
Anritsu	MA2411B	Pulse Power Sensor	3/2/2018	Annual	3/2/2019	1207364
Anritsu	MT8820C	Radio Communication Analyzer	5/23/2017	Annual	5/23/2018	6201240328
Anritsu	MT8821C	Radio Communication Analyzer	7/25/2017	Annual	7/25/2018	6201664756
Anritsu	MA24106A	USB Power Sensor	6/7/2017	Annual	6/7/2018	1231538
Anritsu	MA24106A	USB Power Sensor	6/7/2017	Annual	6/7/2018	1231535
COMTECH	AR85729-S/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
Control Company	4040	Therm./ Clock/ Humidity Monitor	3/1/2017	Biennial	3/1/2019	170152009
Control Company	4040	Therm./ Clock/ Humidity Monitor	1/8/2018	Annual	1/8/2019	160473909
Control Company	4352	Ultra Long Stem Thermometer	1/8/2018	Annual	1/8/2019	160508097
Control Company	4352	Ultra Long Stem Thermometer	1/8/2018	Annual	1/8/2019	160508122
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
Mini Circuits	PWR-4GH5	USB Power Sensor	1/20/2018	Annual	1/20/2019	11710030063
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	5/22/2017	Annual	5/22/2018	109892
Rohde & Schwarz	CMW500	Radio Communication Tester	5/4/2017	Annual	5/4/2018	112347
Rohde & Schwarz	CMW500	Radio Communication Tester	5/4/2017	Annual	5/4/2018	101699
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	7/20/2017	Annual	7/20/2018	132885
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	1/19/2018	Annual	1/19/2019	164948
Seekonk	NC-100	Torque Wrench	12/28/2017	Annual	12/28/2018	N/A
Seekonk	NC-100	Torque Wrench (8" lb)	8/30/2016	Biennial	8/30/2018	N/A
Seekonk	NC-100	Torque Wrench (8" lb)	9/1/2016	Biennial	9/1/2018	21053
SPEAG	D1750V2	1750 MHz SAR Dipole	7/14/2016	Biennial	7/14/2018	1150
SPEAG	D1750V2	1750 MHz SAR Dipole	5/9/2017	Annual	5/9/2018	1148
SPEAG	D1900V2	1900 MHz SAR Dipole	7/8/2016	Biennial	7/8/2018	5d080
SPEAG	D1900V2	1900 MHz SAR Dipole	2/7/2018	Annual	2/7/2019	5d148
SPEAG	D2450V2	2450 MHz SAR Dipole	9/11/2017	Annual	9/11/2018	797
SPEAG	D5GH2V2	5 GHz SAR Dipole	9/21/2016	Biennial	9/21/2018	1191
SPEAG	D5GH2V2	5 GHz SAR Dipole	8/15/2017	Annual	8/15/2018	1237
SPEAG	D750V3	750 MHz SAR Dipole	7/13/2016	Biennial	7/13/2018	1161
SPEAG	D750V3	750 MHz SAR Dipole	1/15/2018	Annual	1/15/2019	1003
SPEAG	D835V2	835 MHz SAR Dipole	7/11/2017	Annual	7/11/2018	4d133
SPEAG	D835V2	835 MHz SAR Dipole	1/15/2018	Annual	1/15/2019	4d132
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/14/2017	Annual	6/14/2018	1334
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/21/2017	Annual	6/21/2018	1333
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/13/2017	Annual	7/13/2018	1322
SPEAG	DAE4	Dasy Data Acquisition Electronics	8/9/2017	Annual	8/9/2018	1323
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/9/2018	Annual	2/9/2019	1272
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/15/2018	Annual	2/15/2019	665
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/7/2018	Annual	3/7/2019	1368
SPEAG	DAE4	Dasy Data Acquisition Electronics	11/9/2017	Annual	11/9/2018	1450
SPEAG	DAK-3.5	Dielectric Assessment Kit	9/12/2017	Annual	9/12/2018	1091
SPEAG	EX3DV4	SAR Probe	7/17/2017	Annual	7/17/2018	7410
SPEAG	ES3DV3	SAR Probe	8/14/2017	Annual	8/14/2018	3332
SPEAG	EX3DV4	SAR Probe	8/16/2017	Annual	8/16/2018	7308
SPEAG	ES3DV3	SAR Probe	9/18/2017	Annual	9/18/2018	3287
SPEAG	EX3DV4	SAR Probe	1/16/2018	Annual	1/16/2019	3589
SPEAG	ES3DV3	SAR Probe	2/13/2018	Annual	2/13/2019	3213
SPEAG	EX3DV4	SAR Probe	2/14/2018	Annual	2/14/2019	3914
SPEAG	ES3DV3	SAR Probe	3/13/2018	Annual	3/13/2019	3319
SPEAG	ES3DV3	SAR Probe	3/27/2018	Annual	3/27/2019	3347

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID ZNFQ710US		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 105 of 109

15 MEASUREMENT UNCERTAINTIES

a	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Test Sample Related								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
Phantom & Tissue Parameters								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)						RSS	11.5	11.3
Expanded Uncertainty (95% CONFIDENCE LEVEL)						k=2	23.0	22.6

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 106 of 109

16 CONCLUSION

16.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID ZNFQ710US	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset		Page 107 of 109

17 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 108 of 109

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID ZNFQ710US	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803280057-01-R1.ZNF	Test Dates: 04/14/18 – 04/30/18	DUT Type: Portable Handset	Page 109 of 109

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.917 \text{ S/m}$; $\epsilon_r = 42.209$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-17-2018; Ambient Temp: 22.7°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3332; ConvF(6.64, 6.64, 6.64); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GPRS 850, Left Head, Cheek, Mid.ch, 3 Tx slots


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.26 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.151 W/kg

SAR(1 g) = 0.121 W/kg

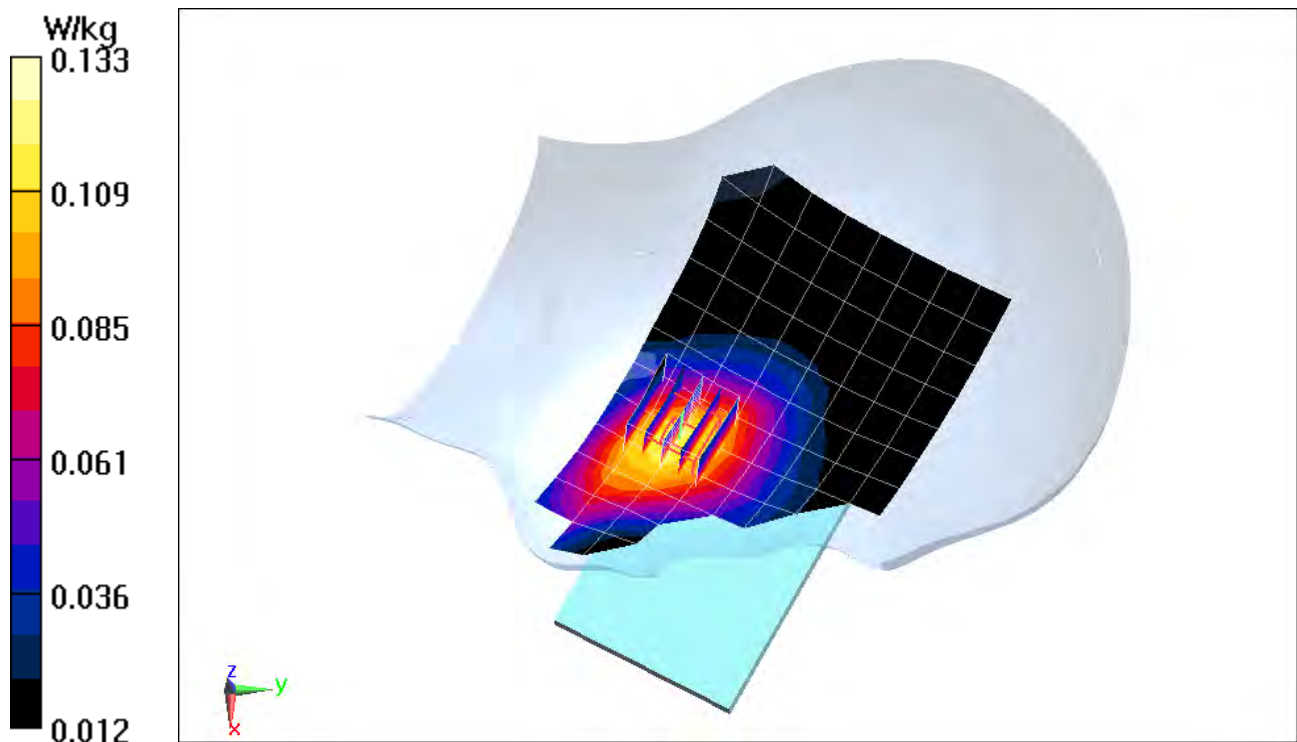

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ S/m}$; $\epsilon_r = 38.971$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-20-2018; Ambient Temp: 23.0°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(8.37, 8.37, 8.37); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GSM 1900, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.953 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.121 W/kg

SAR(1 g) = 0.081 W/kg

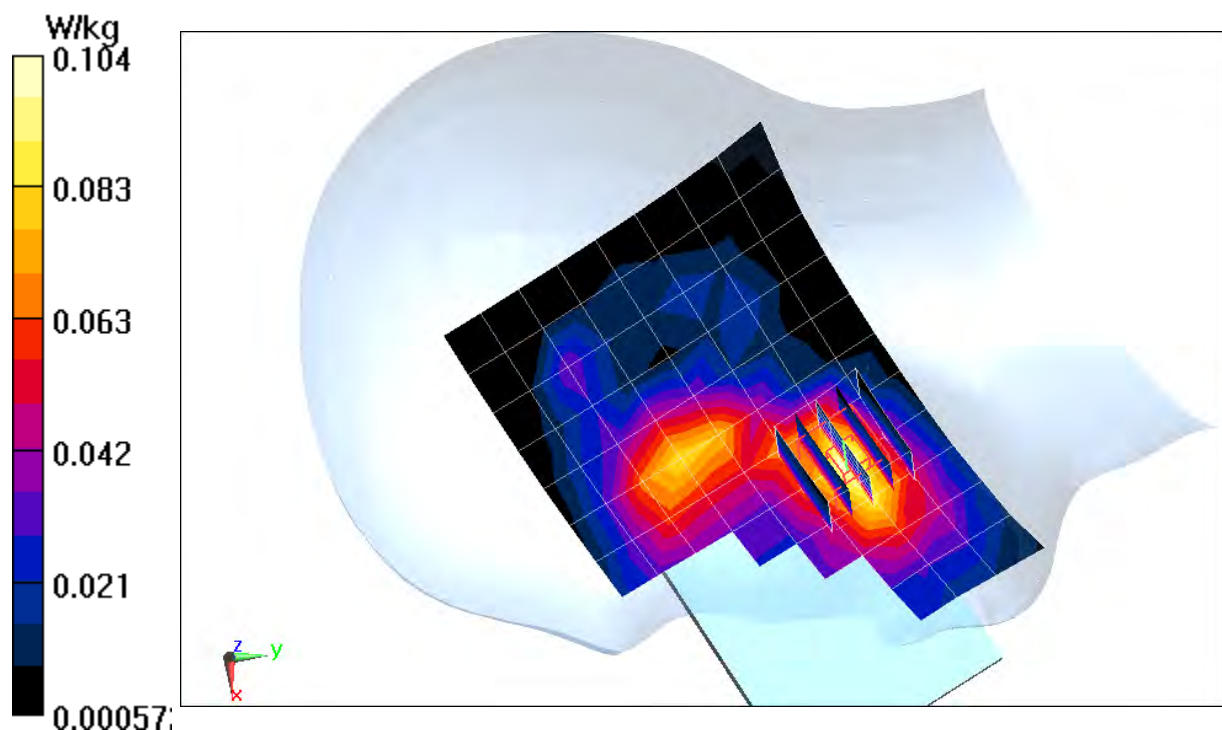

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.917 \text{ S/m}$; $\epsilon_r = 42.209$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-17-2018; Ambient Temp: 22.7°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3332; ConvF(6.64, 6.64, 6.64); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 850, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.35 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.223 W/kg

SAR(1 g) = 0.177 W/kg

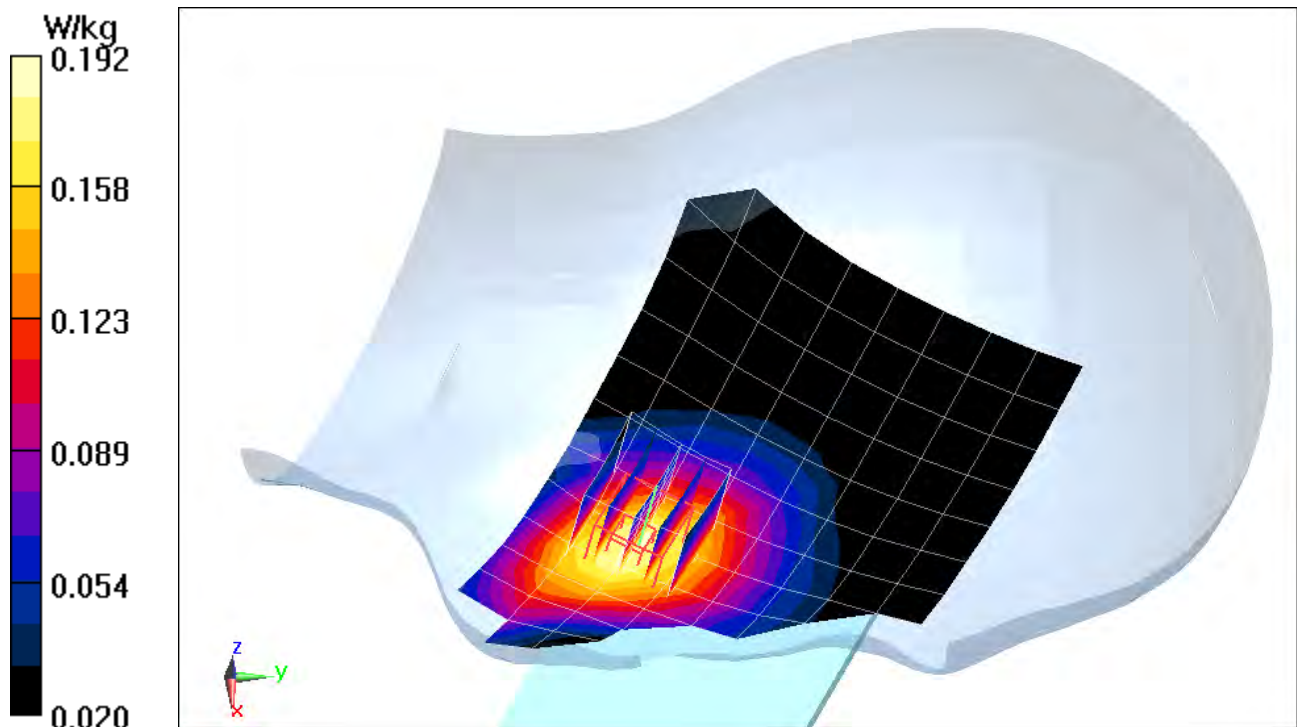

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used (interpolated):

$f = 1732.4 \text{ MHz}$; $\sigma = 1.381 \text{ S/m}$; $\epsilon_r = 40.652$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-22-2018; Ambient Temp: 21.5°C; Tissue Temp: 20.8°C

Probe: ES3DV3 - SN3213; ConvF(5.45, 5.45, 5.45); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 1750, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.394 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.128 W/kg

SAR(1 g) = 0.087 W/kg

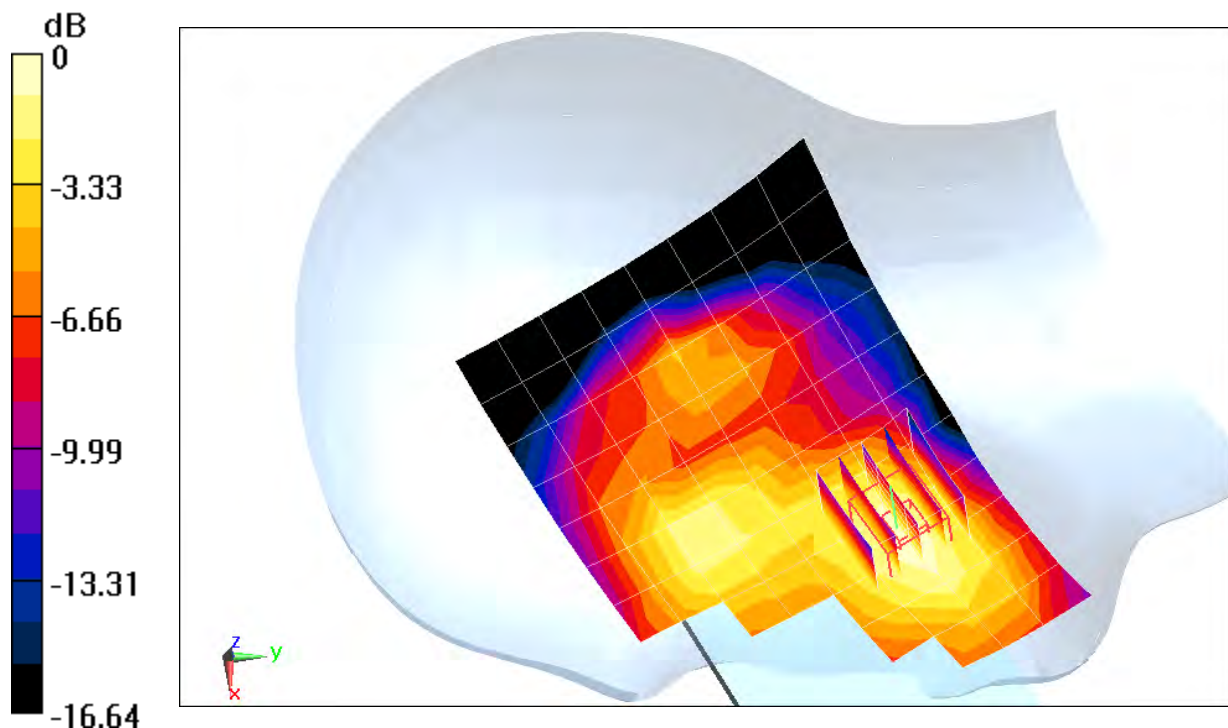

0 dB = 0.100 W/kg = -10.00 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ S/m}$; $\epsilon_r = 38.971$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-20-2018; Ambient Temp: 23.0°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(8.37, 8.37, 8.37); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 1900, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.958 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.223 W/kg

SAR(1 g) = 0.133 W/kg

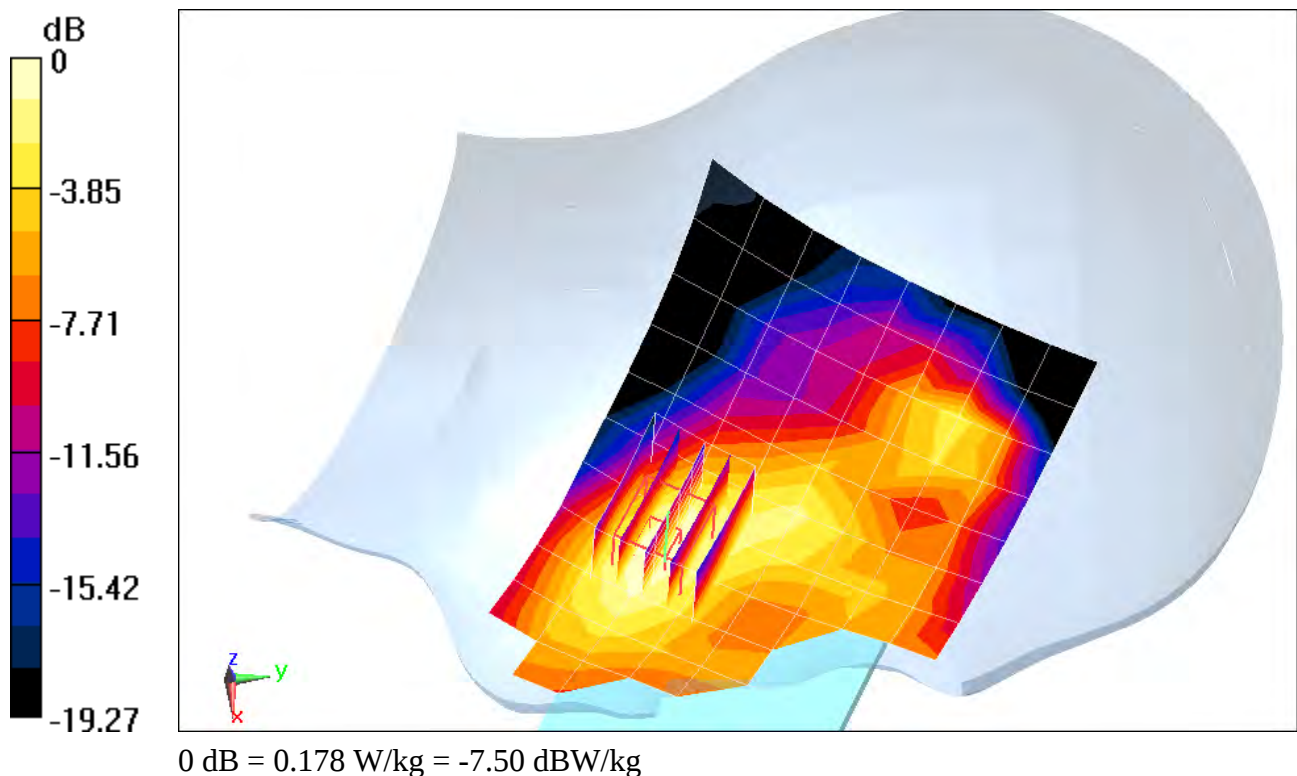

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.52$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 42.21$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 04-17-2018; Ambient Temp: 22.7°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3332; ConvF(6.64, 6.64, 6.64); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: BC0 Cell. CDMA, Rule Part 22H, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.69 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.229 W/kg

SAR(1 g) = 0.184 W/kg

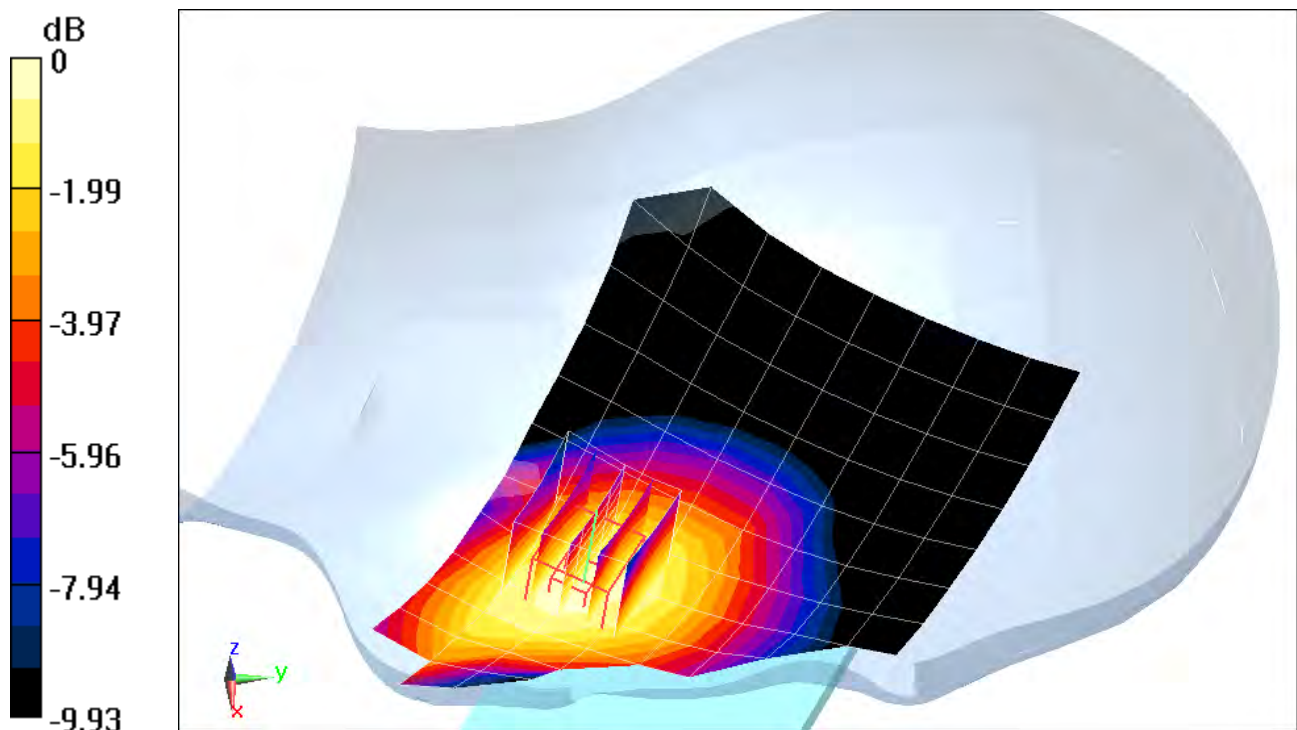

0 dB = 0.202 W/kg = -6.95 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, Cellular CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$; $\sigma = 0.9 \text{ S/m}$; $\epsilon_r = 42.433$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-17-2018; Ambient Temp: 22.7°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3332; ConvF(6.64, 6.64, 6.64); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: BC10 Cell. CDMA, Rule Part 90S, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.08 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.241 W/kg

SAR(1 g) = 0.192 W/kg

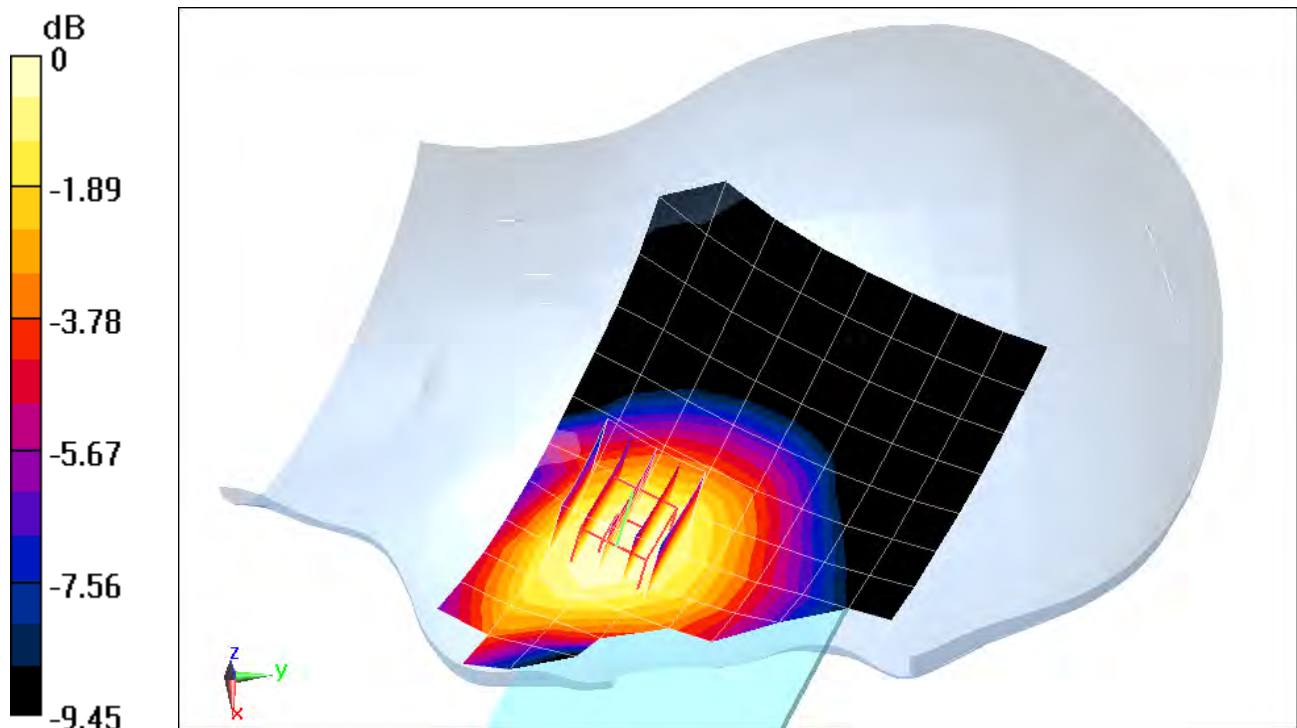

0 dB = 0.205 W/kg = -6.88 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ S/m}$; $\epsilon_r = 38.971$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-20-2018; Ambient Temp: 23.0°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(8.37, 8.37, 8.37); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: PCS EVDO Rev A, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.712 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.124 W/kg

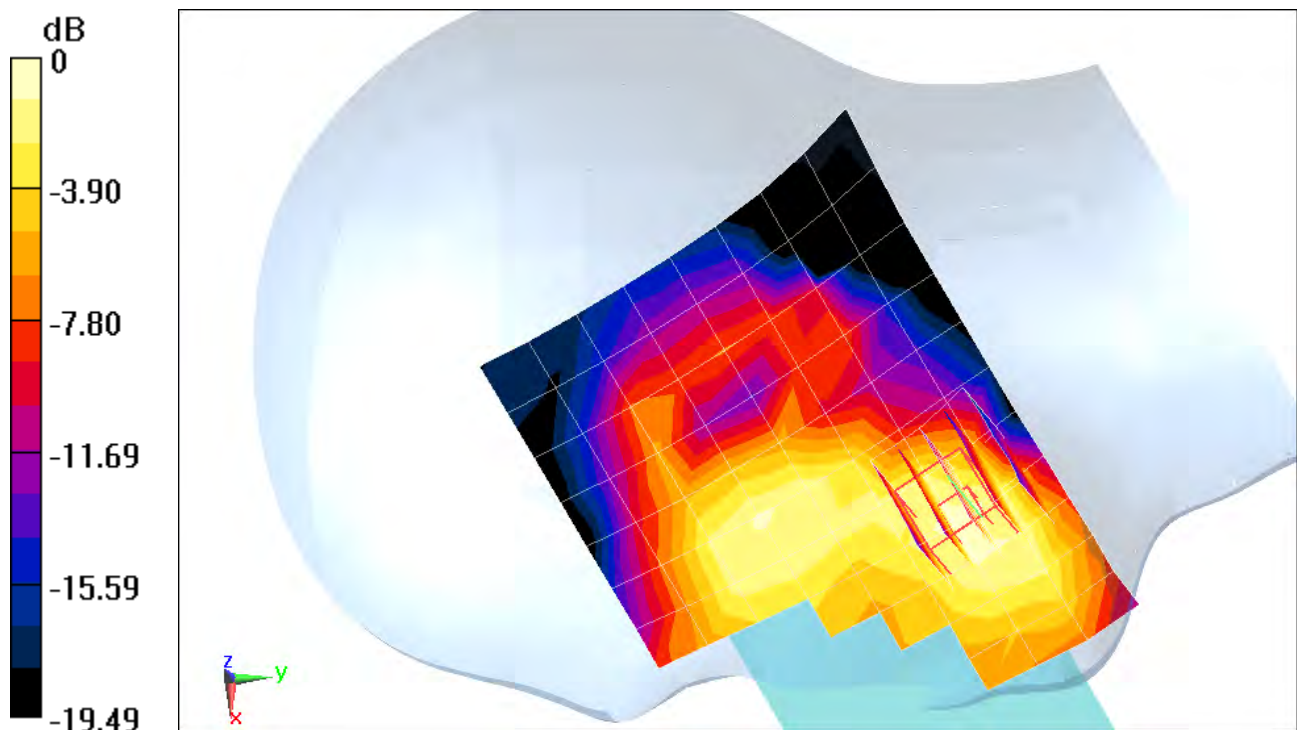

0 dB = 0.159 W/kg = -7.99 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00038

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.883 \text{ S/m}$; $\epsilon_r = 41.911$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-19-2018; Ambient Temp: 23.6°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3213; ConvF(6.75, 6.75, 6.75); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 12, Left Head, Cheek, Mid.ch, QPSK,
10 MHz Bandwidth, 1 RB, 25 RB Offset**


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.12 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.268 W/kg

SAR(1 g) = 0.207 W/kg

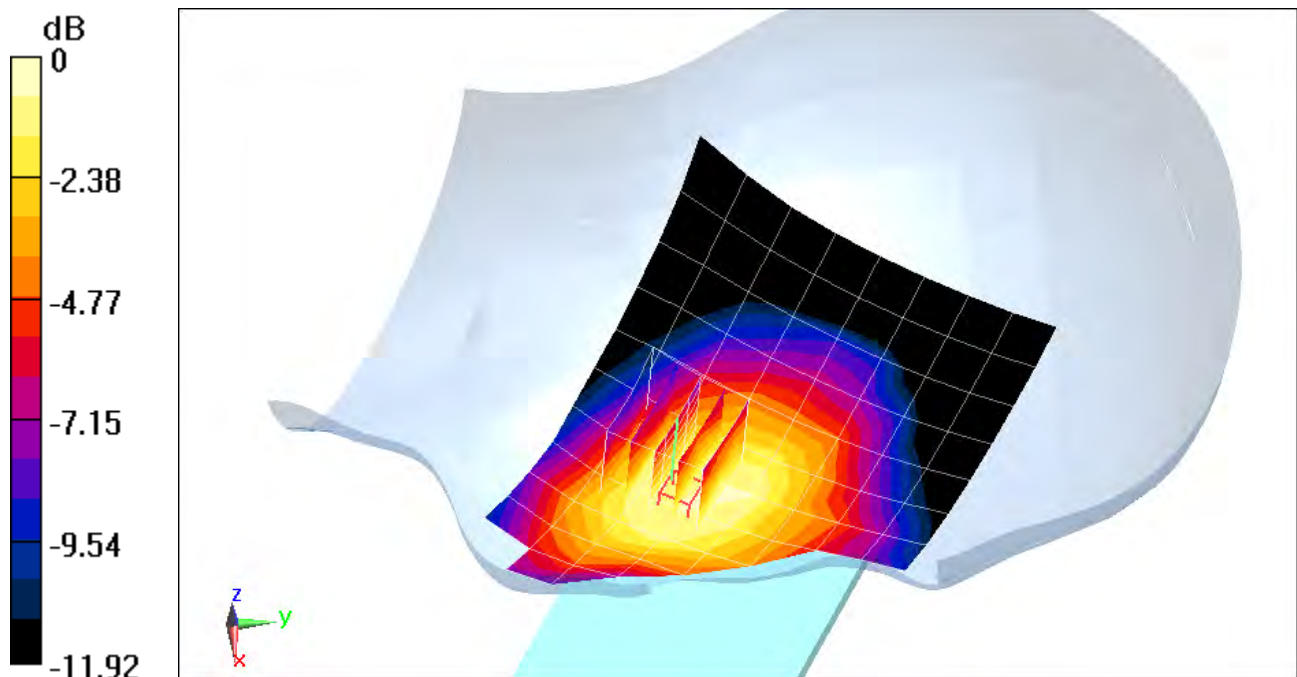

0 dB = 0.235 W/kg = -6.29 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00038

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.908 \text{ S/m}$; $\epsilon_r = 41.716$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-19-2018; Ambient Temp: 23.6°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3213; ConvF(6.75, 6.75, 6.75); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 13, Left Head, Cheek, Mid.ch, QPSK,
10 MHz Bandwidth, 1 RB, 0 RB Offset**


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.74 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.245 W/kg

SAR(1 g) = 0.194 W/kg

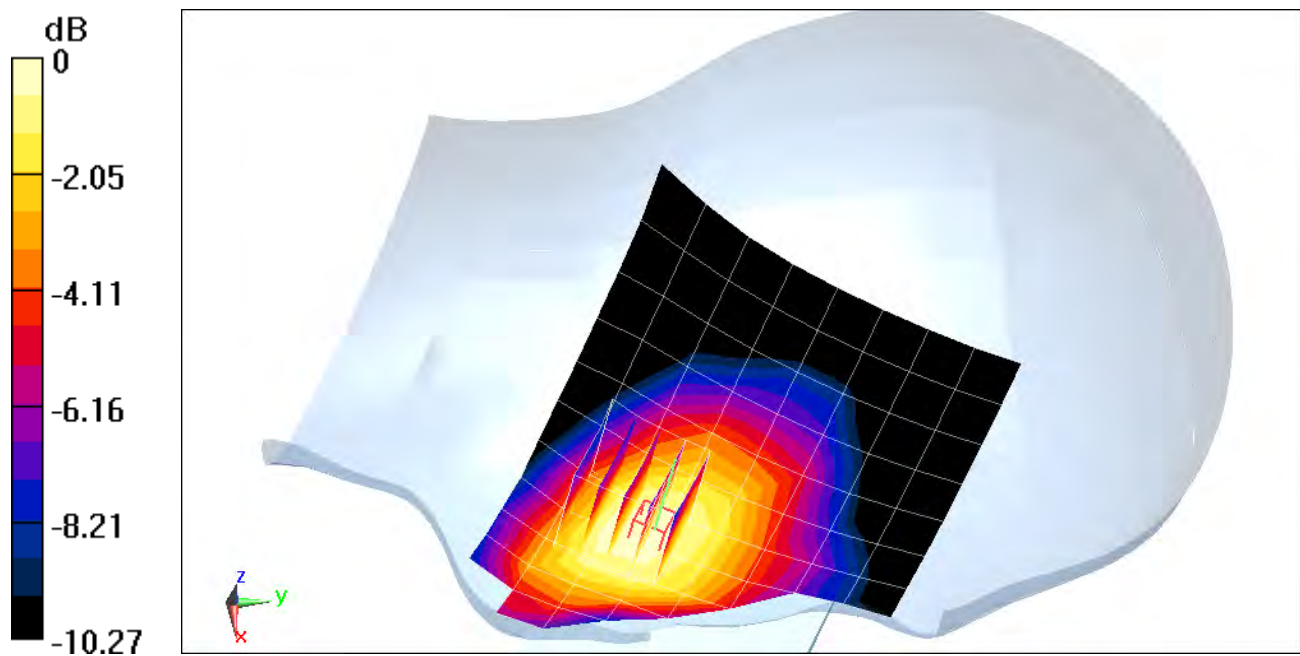

0 dB = 0.217 W/kg = -6.64 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00020

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 831.5$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 40.557$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 04-14-2018; Ambient Temp: 20.0°C; Tissue Temp: 19.9°C

Probe: ES3DV3 - SN3332; ConvF(6.64, 6.64, 6.64); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 26 (Cell.), Left Head, Cheek, Mid.ch,
15 MHz Bandwidth, QPSK, 1 RB, 74 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.50 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.269 W/kg

SAR(1 g) = 0.177 W/kg

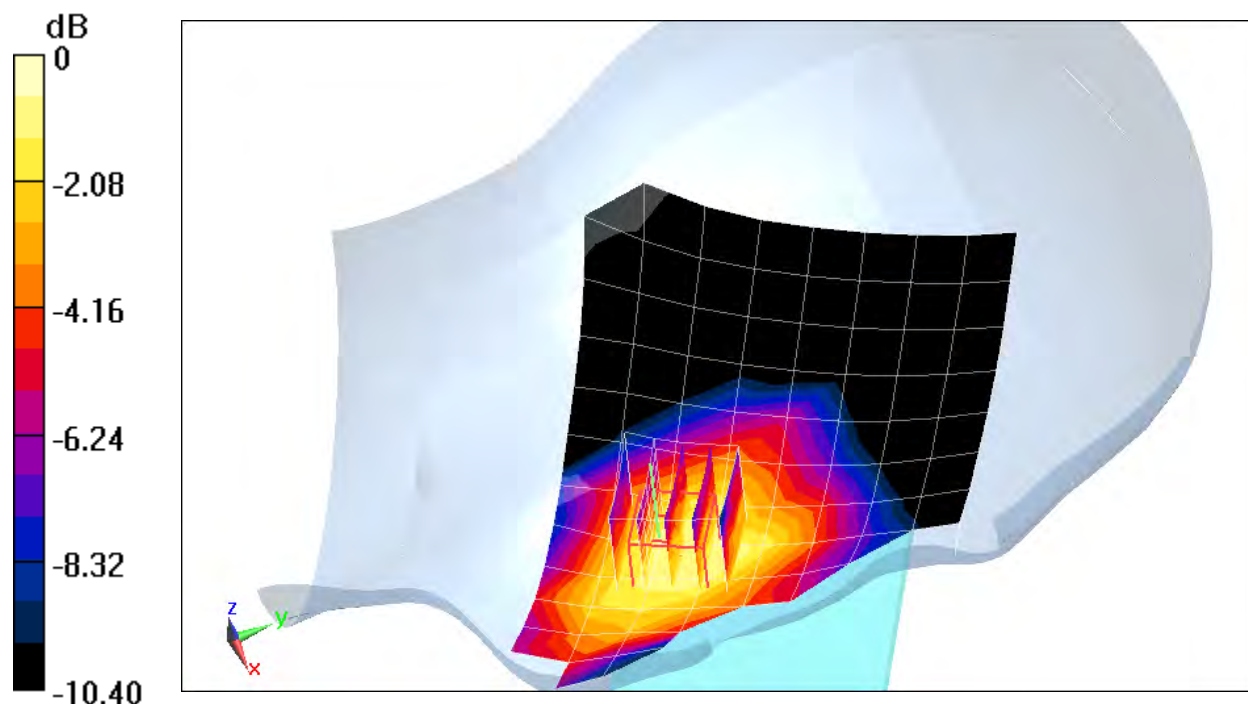

0 dB = 0.225 W/kg = -6.48 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00038

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used (interpolated):

$f = 1770 \text{ MHz}$; $\sigma = 1.404 \text{ S/m}$; $\epsilon_r = 40.593$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-22-2018; Ambient Temp: 21.5°C; Tissue Temp: 20.8°C

Probe: ES3DV3 - SN3213; ConvF(5.45, 5.45, 5.45); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 66 (AWS), Right Head, Cheek, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.945 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.115 W/kg

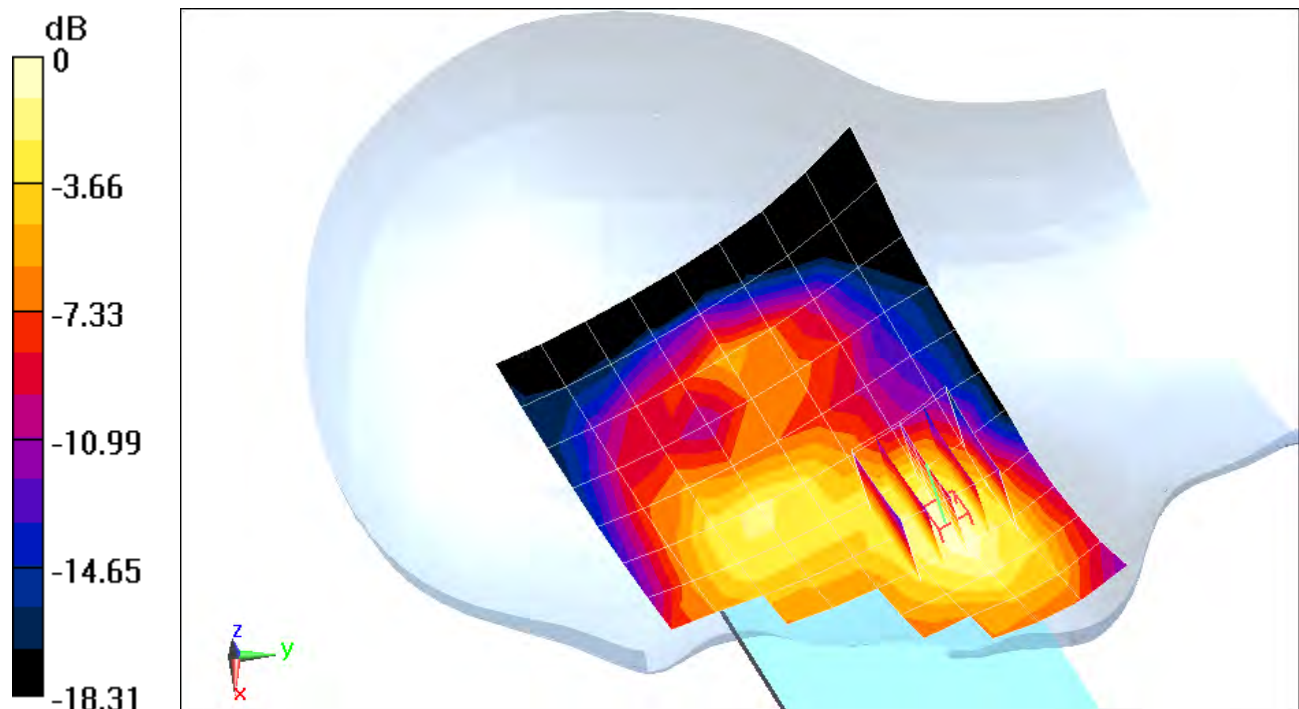

0 dB = 0.134 W/kg = -8.73 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00038

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1905 \text{ MHz}$; $\sigma = 1.458 \text{ S/m}$; $\epsilon_r = 38.864$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-20-2018; Ambient Temp: 23.0°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(8.37, 8.37, 8.37); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 25 (PCS), Left Head, Cheek, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.06 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.153 W/kg

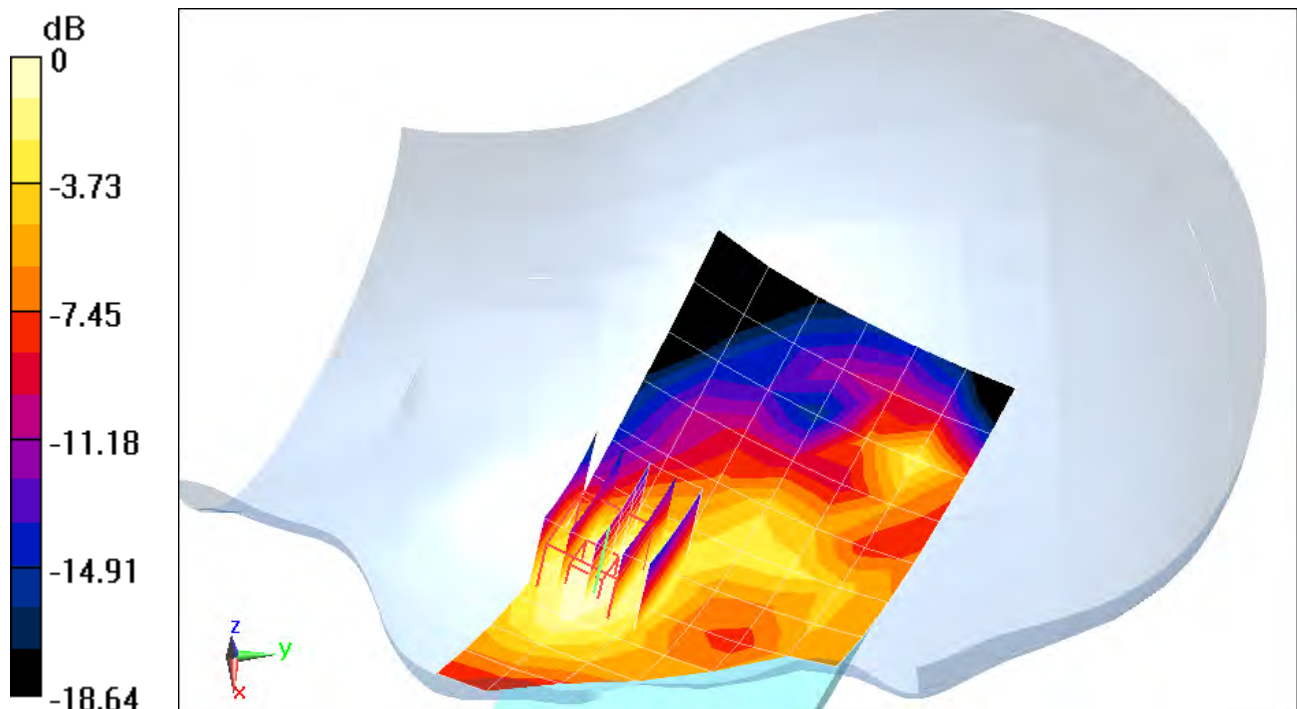

0 dB = 0.203 W/kg = -6.93 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00020

Communication System: UID 0, LTE Band 41; Frequency: 2506 MHz; Duty Cycle: 1:1.58

Medium: 2450 Head Medium parameters used (interpolated):

$f = 2506 \text{ MHz}$; $\sigma = 1.922 \text{ S/m}$; $\epsilon_r = 40.234$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-15-2018; Ambient Temp: 22.8°C; Tissue Temp: 23.1°C

Probe: ES3DV3 - SN3332; ConvF(4.68, 4.68, 4.68); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 41, Left Head, Cheek, Low.ch, QPSK,
20 MHz Bandwidth, 1 RB, 99 RB Offset**


Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (8x9x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.314 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0570 W/kg

SAR(1 g) = 0.030 W/kg

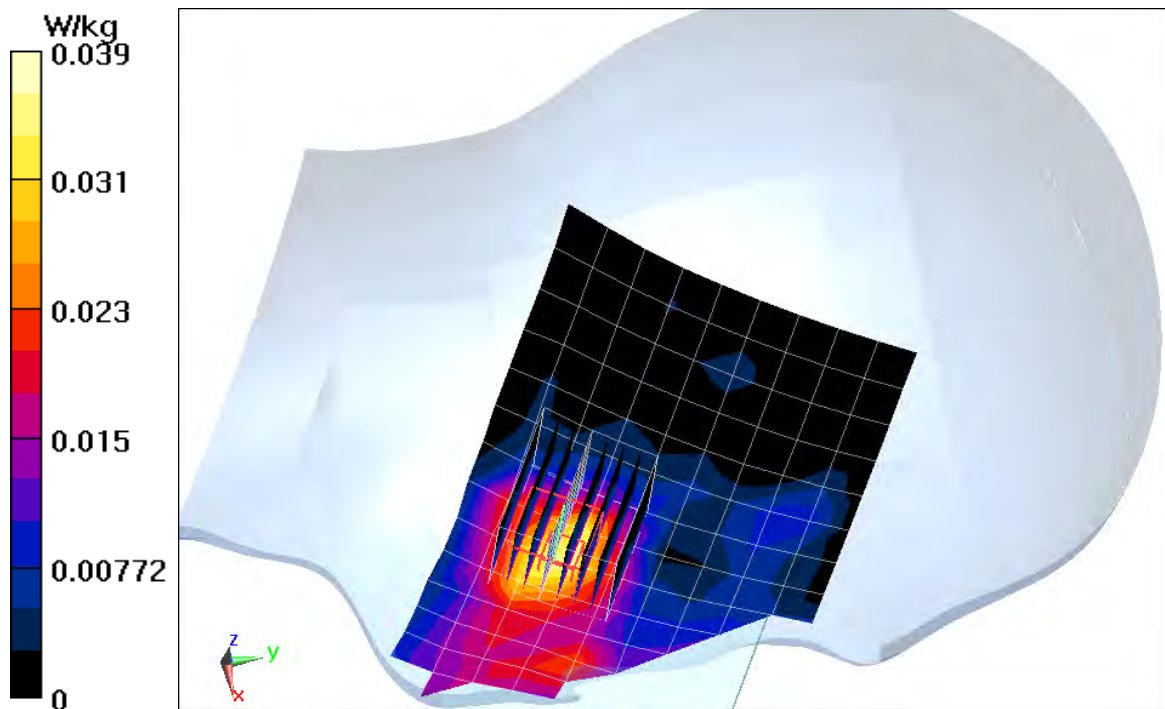

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00103

Communication System: UID 0, _IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 1.83 \text{ S/m}$; $\epsilon_r = 39.208$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-18-2018; Ambient Temp: 21.9°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3332; ConvF(4.68, 4.68, 4.68); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: IEEE 802.11b, 22 MHz Bandwidth, Right Head, Cheek, Ch 6, 1 Mbps


Area Scan (11x18x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (8x9x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.39 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 0.985 W/kg

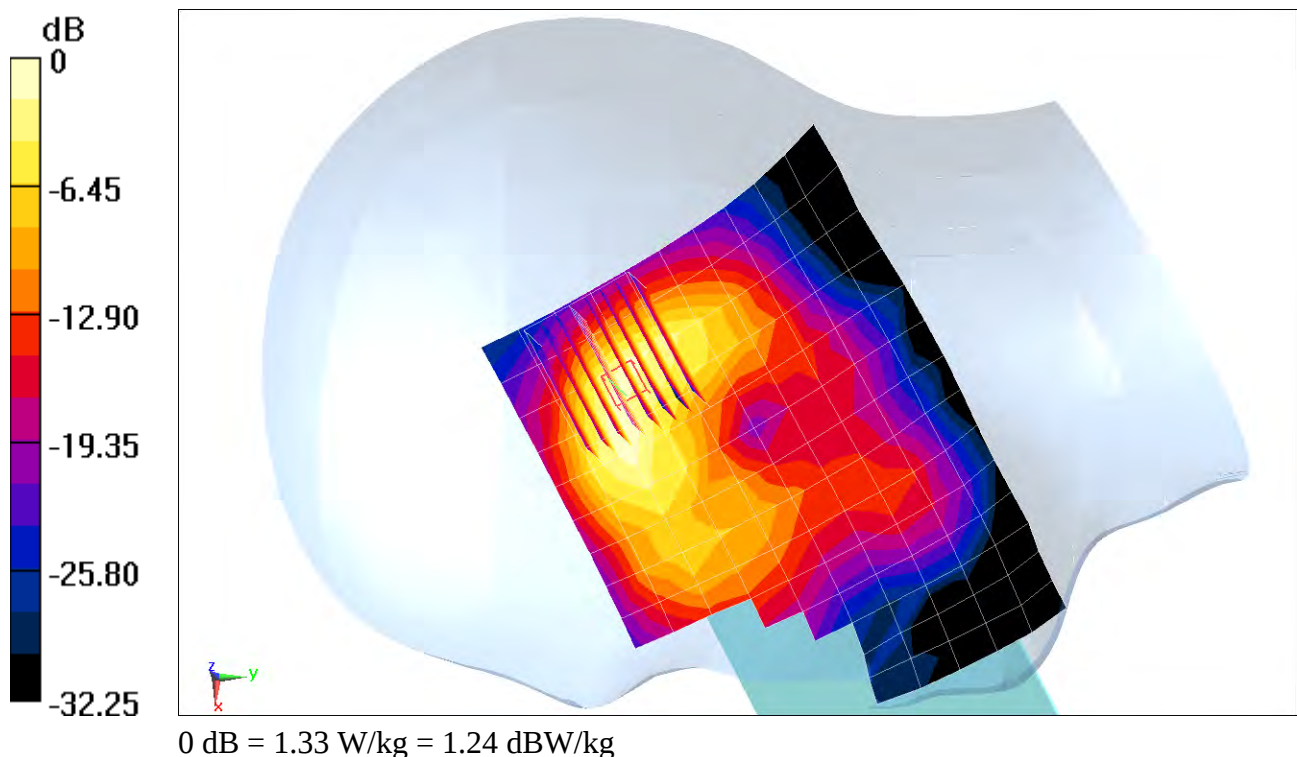

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00103

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head Medium parameters used:

$f = 5260 \text{ MHz}$; $\sigma = 4.529 \text{ S/m}$; $\epsilon_r = 35.72$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-18-2018; Ambient Temp: 22.3°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3589; ConvF(4.69, 4.69, 4.69); Calibrated: 1/16/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: IEEE 802.11a, U-NII-2A, 20 MHz Bandwidth, Right Head, Cheek, Ch 52, 6 Mbps


Area Scan (13x22x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 5.423 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 3.23 W/kg

SAR(1 g) = 0.709 W/kg

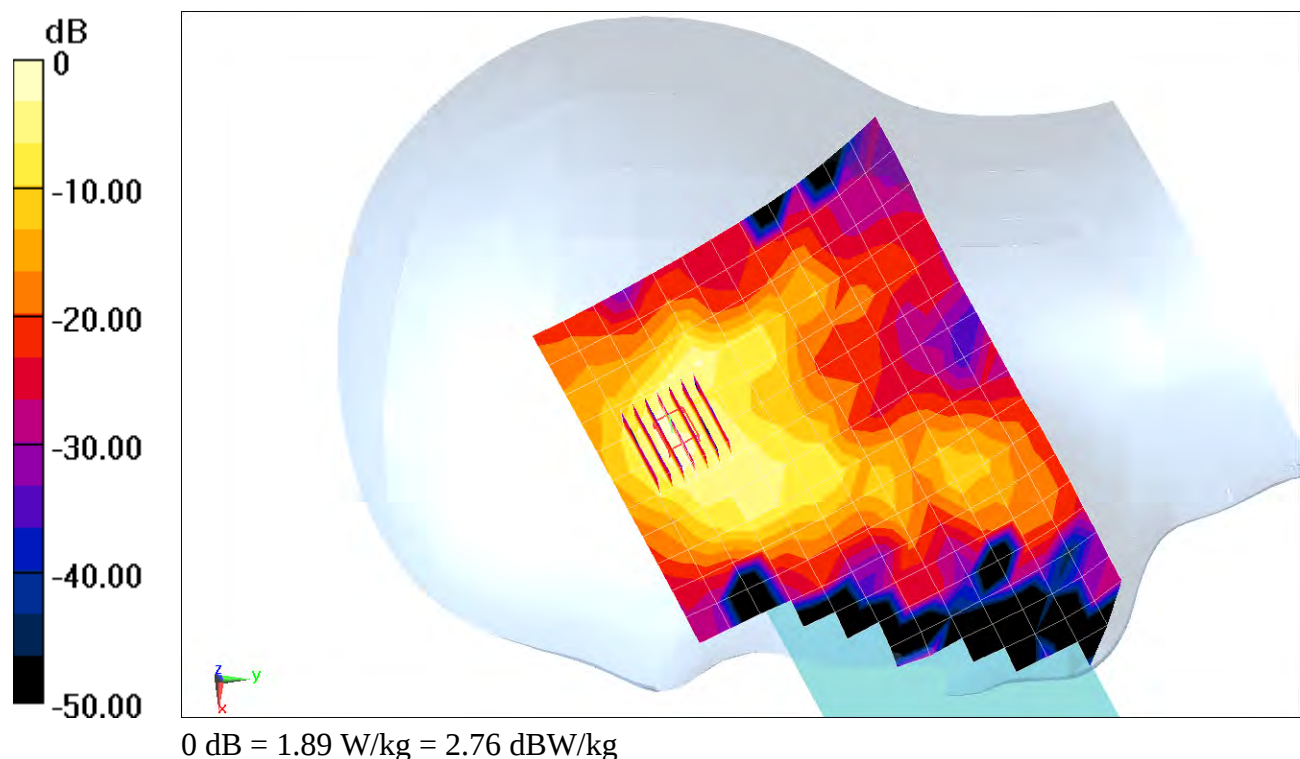

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00103

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.297

Medium: 2450 Head Medium parameters used (interpolated):

$f = 2441 \text{ MHz}$; $\sigma = 1.835 \text{ S/m}$; $\epsilon_r = 39.194$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-18-2018; Ambient Temp: 21.9°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3332; ConvF(4.68, 4.68, 4.68); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: Bluetooth, Right Head, Cheek, Ch 39, 1 Mbps


Area Scan (11x19x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.080 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.109 W/kg

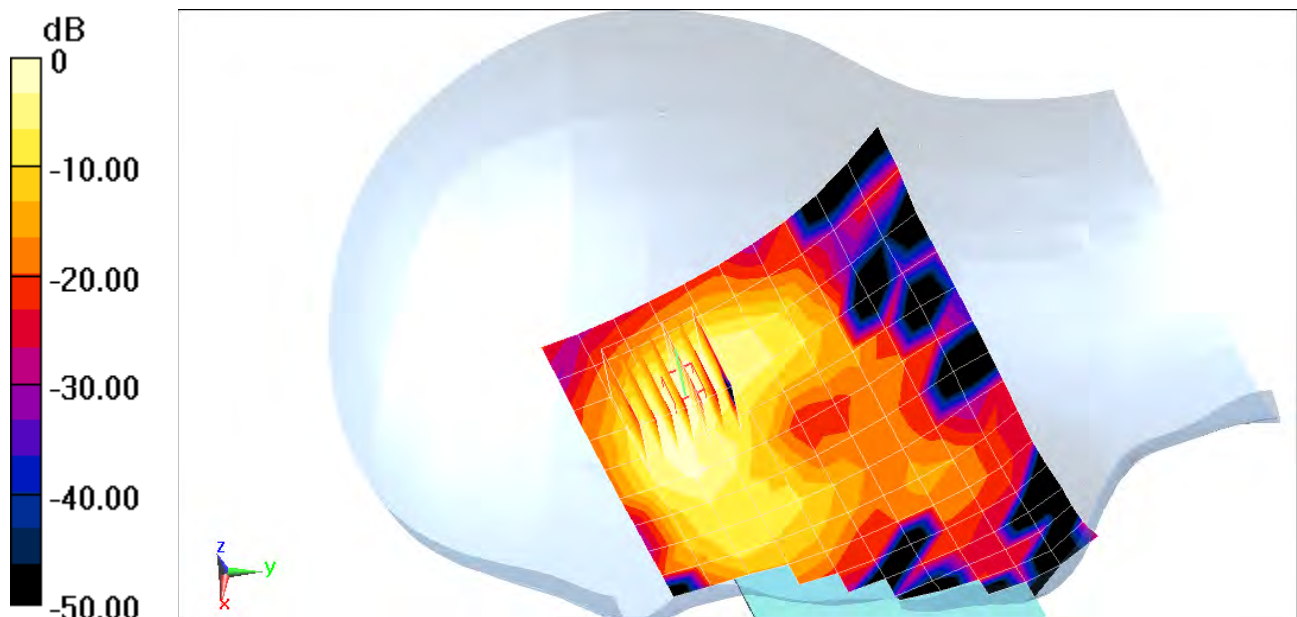

0 dB = 0.152 W/kg = -8.18 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, _GSM GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 1.008 \text{ S/m}$; $\epsilon_r = 53.016$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-17-2018; Ambient Temp: 20.0°C; Tissue Temp: 20.6°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GPRS 850, Body SAR, Back side, Mid.ch, 3 Tx Slots


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.98 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.470 W/kg

SAR(1 g) = 0.351 W/kg

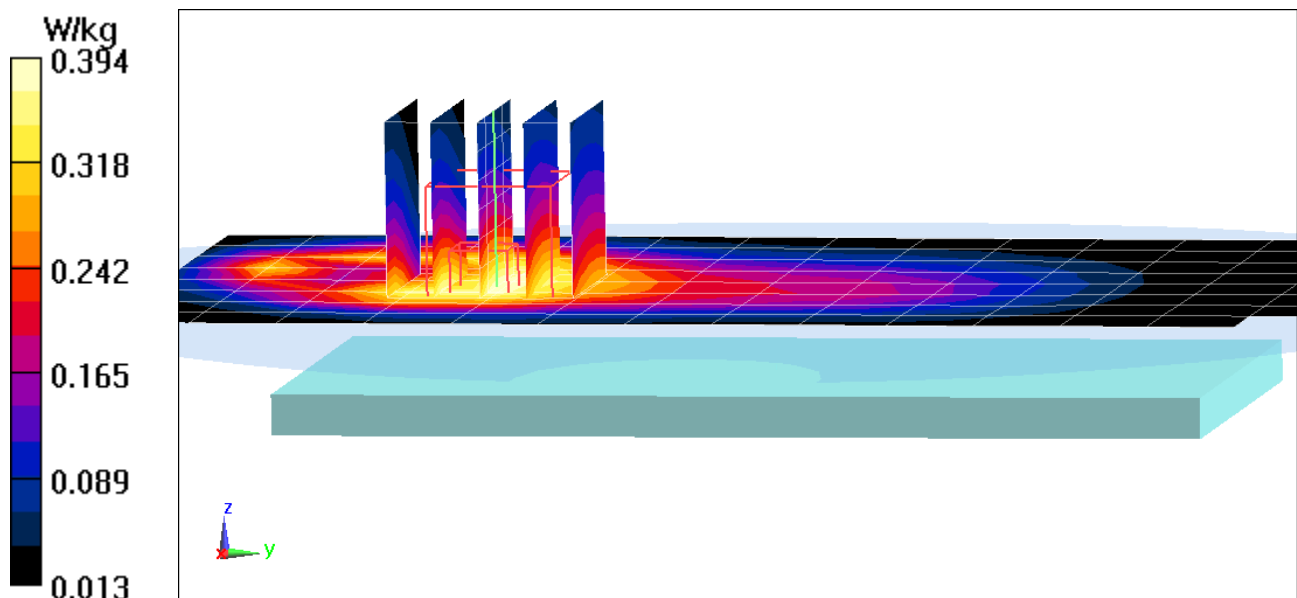

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, _GSM GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 1.008 \text{ S/m}$; $\epsilon_r = 53.016$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-17-2018; Ambient Temp: 20.0°C; Tissue Temp: 20.6°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GPRS 850, Body SAR, Front side, Mid.ch, 3 Tx Slots


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.93 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.644 W/kg

SAR(1 g) = 0.392 W/kg

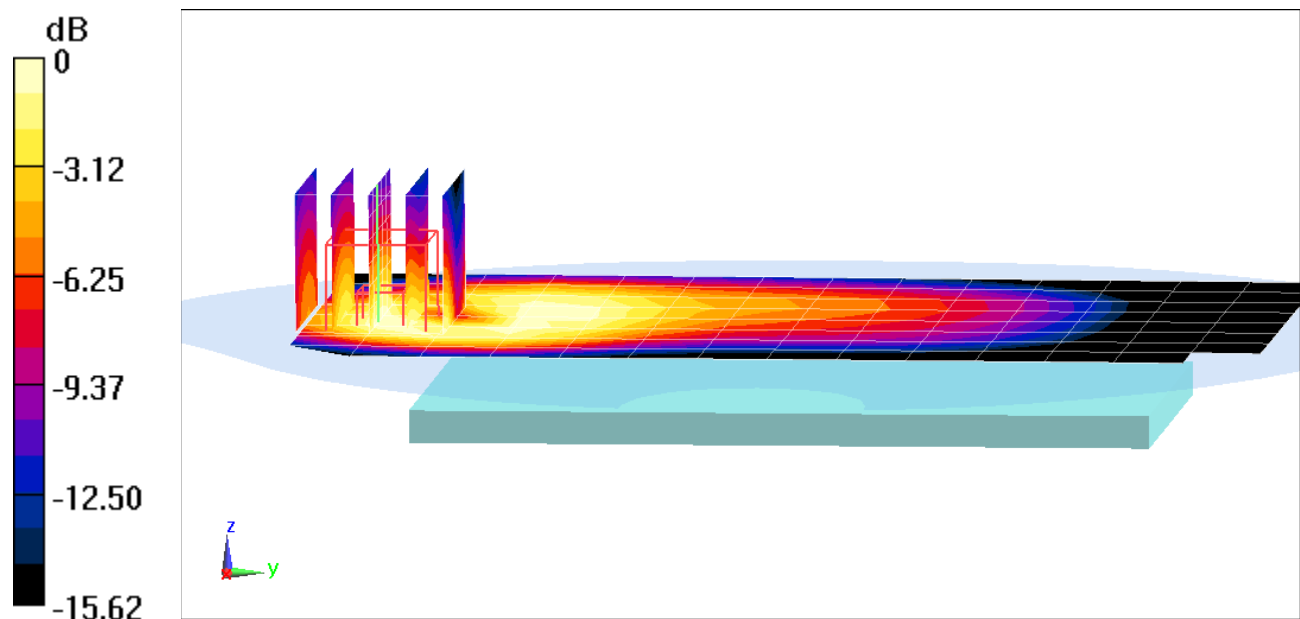

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.76

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.506 \text{ S/m}$; $\epsilon_r = 53.482$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-30-2018; Ambient Temp: 21.5°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3347; ConvF(4.94, 4.94, 4.94); Calibrated: 3/27/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 11/9/2017

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GPRS 1900, Body SAR, Back side, Mid.ch, 3 Tx Slots


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.93 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.589 W/kg

SAR(1 g) = 0.367 W/kg

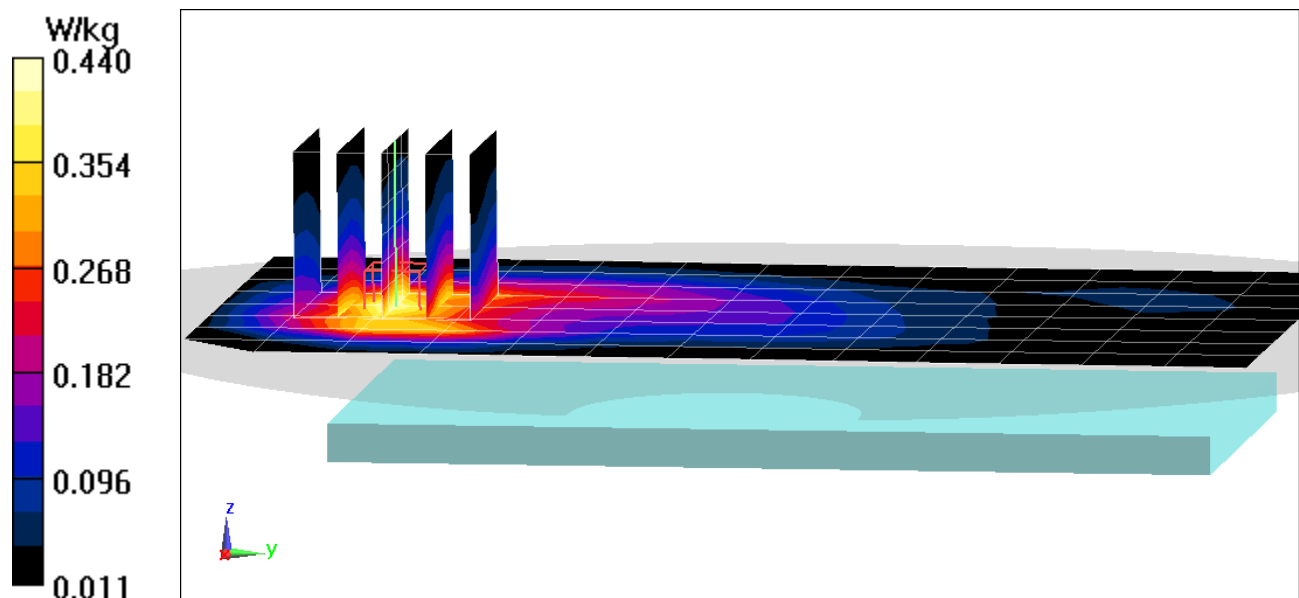

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 1909.8 MHz; Duty Cycle: 1:2.76

Medium: 1900 Body Medium parameters used:

$f = 1910 \text{ MHz}$; $\sigma = 1.584 \text{ S/m}$; $\epsilon_r = 54.47$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2018; Ambient Temp: 21.8°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GPRS 1900, Body SAR, Bottom Edge, High.ch, 3 Tx Slots


Area Scan (10x9x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.01 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.753 W/kg

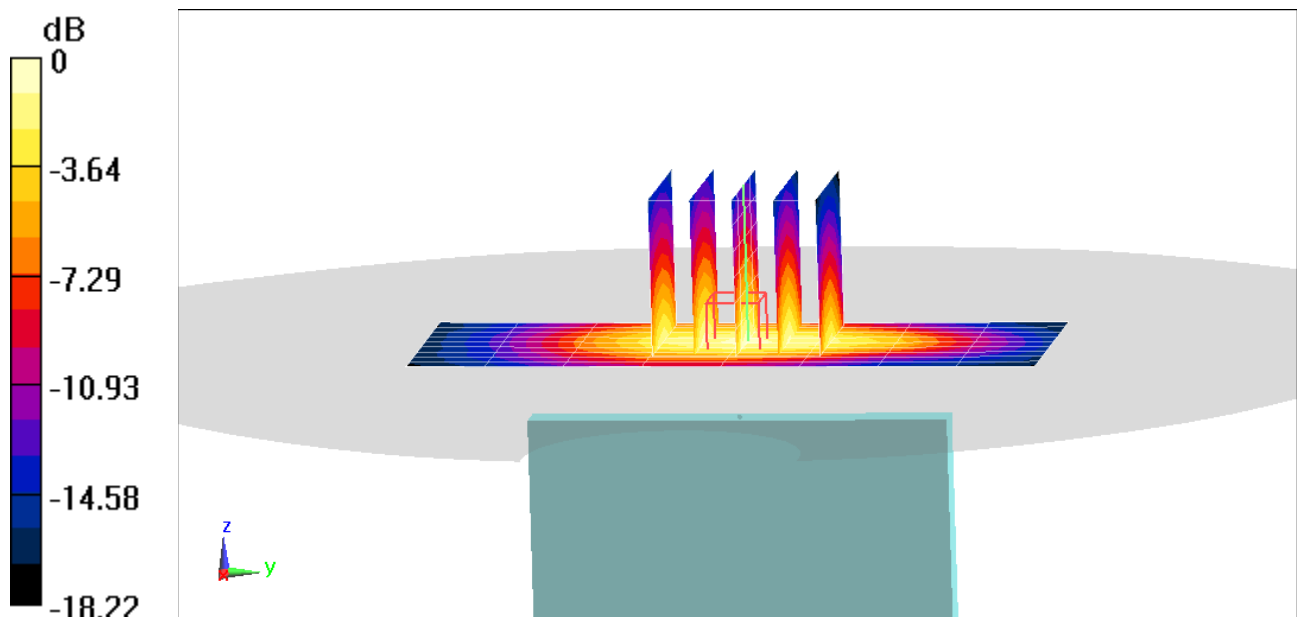

0 dB = 1.09 W/kg = 0.37 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 1.008 \text{ S/m}$; $\epsilon_r = 53.016$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-17-2018; Ambient Temp: 20.0°C; Tissue Temp: 20.6°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 850, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.32 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.794 W/kg

SAR(1 g) = 0.596 W/kg

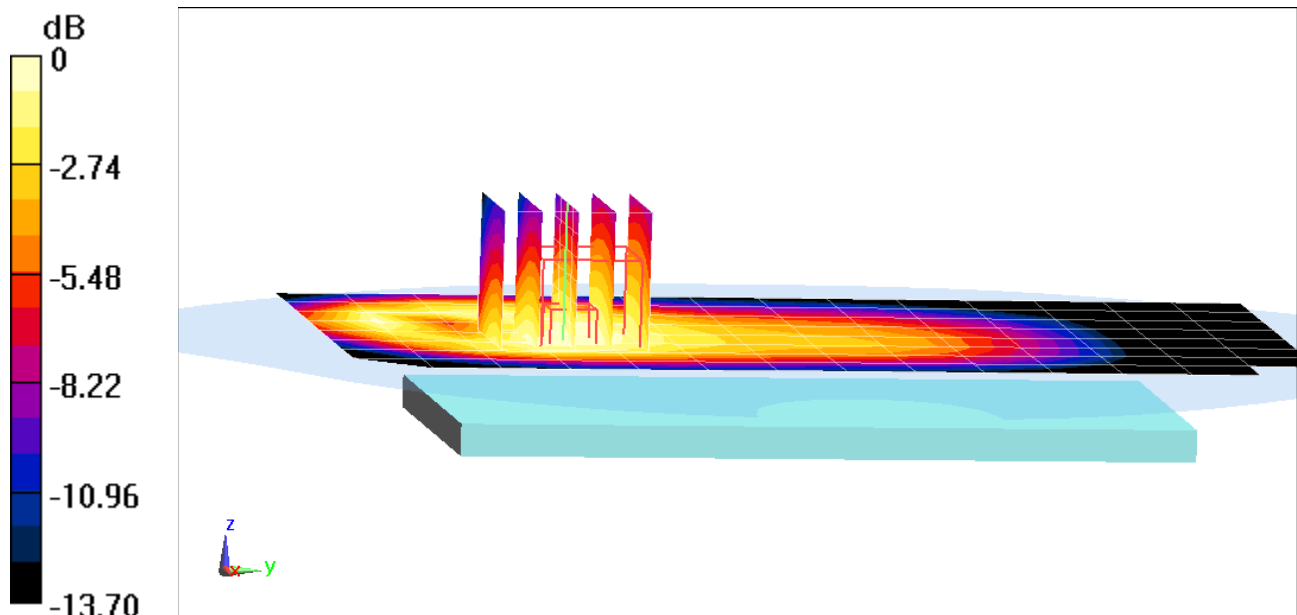

0 dB = 0.670 W/kg = -1.74 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, _UMTS; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: 835 Medium parameters used (interpolated):

$f = 826.4 \text{ MHz}$; $\sigma = 1.004 \text{ S/m}$; $\epsilon_r = 53.043$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-17-2018; Ambient Temp: 20.0°C; Tissue Temp: 20.6°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 850, Body SAR, Front side, Low.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.39 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.724 W/kg

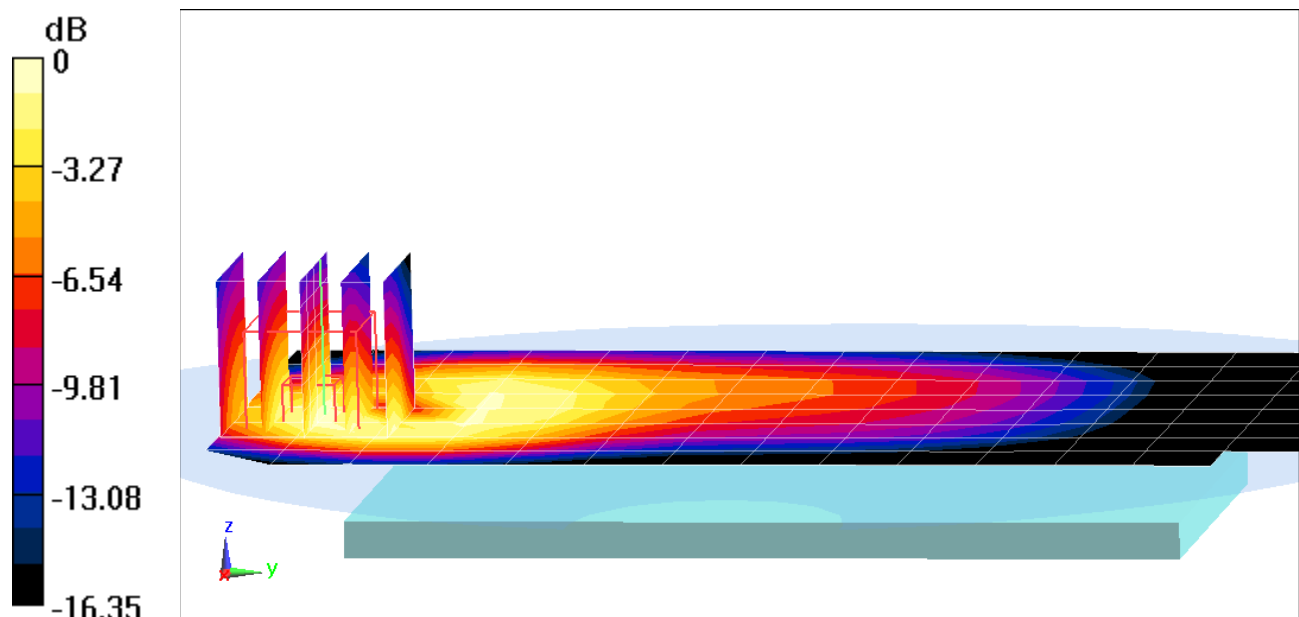

0 dB = 0.899 W/kg = -0.46 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.4 \text{ MHz}$; $\sigma = 1.488 \text{ S/m}$; $\epsilon_r = 51.311$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2018; Ambient Temp: 22.0°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3287; ConvF(5.19, 5.19, 5.19); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 6/21/2017

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1167

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 1750, Body SAR, Back side, Mid.ch


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.69 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.722 W/kg

SAR(1 g) = 0.463 W/kg

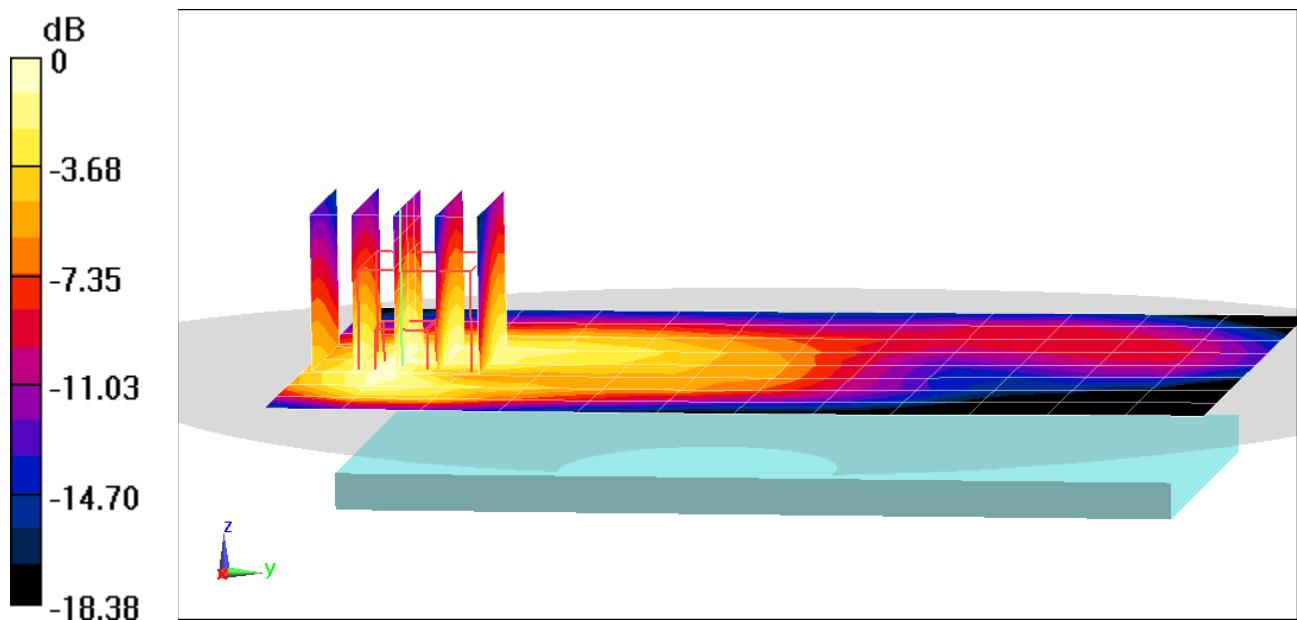

0 dB = 0.549 W/kg = -2.60 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, _UMTS; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1752.6 \text{ MHz}$; $\sigma = 1.51 \text{ S/m}$; $\epsilon_r = 51.229$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2018; Ambient Temp: 22.0°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3287; ConvF(5.19, 5.19, 5.19); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 6/21/2017

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1167

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 1750, Body SAR, Bottom Edge, High.ch


Area Scan (10x7x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.64 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.737 W/kg

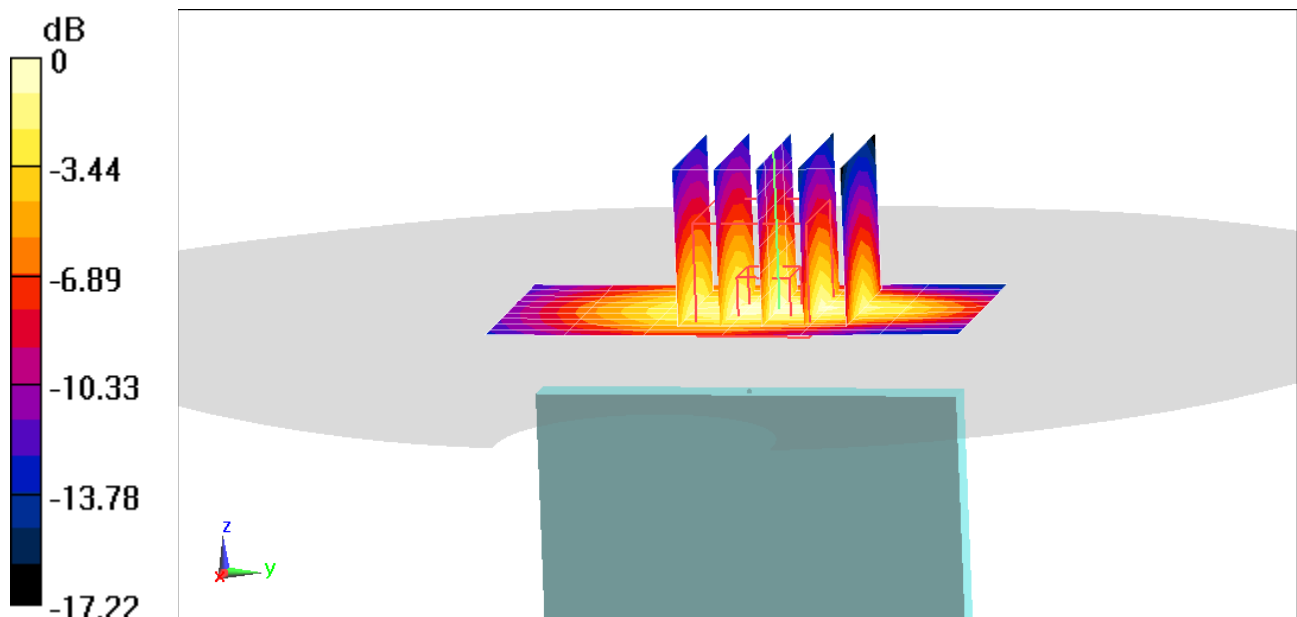

0 dB = 0.893 W/kg = -0.49 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.54 \text{ S/m}$; $\epsilon_r = 53.934$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2018; Ambient Temp: 22.5°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 1900, Body SAR, Back side, Mid.ch


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (8x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.44 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.936 W/kg

SAR(1 g) = 0.579 W/kg

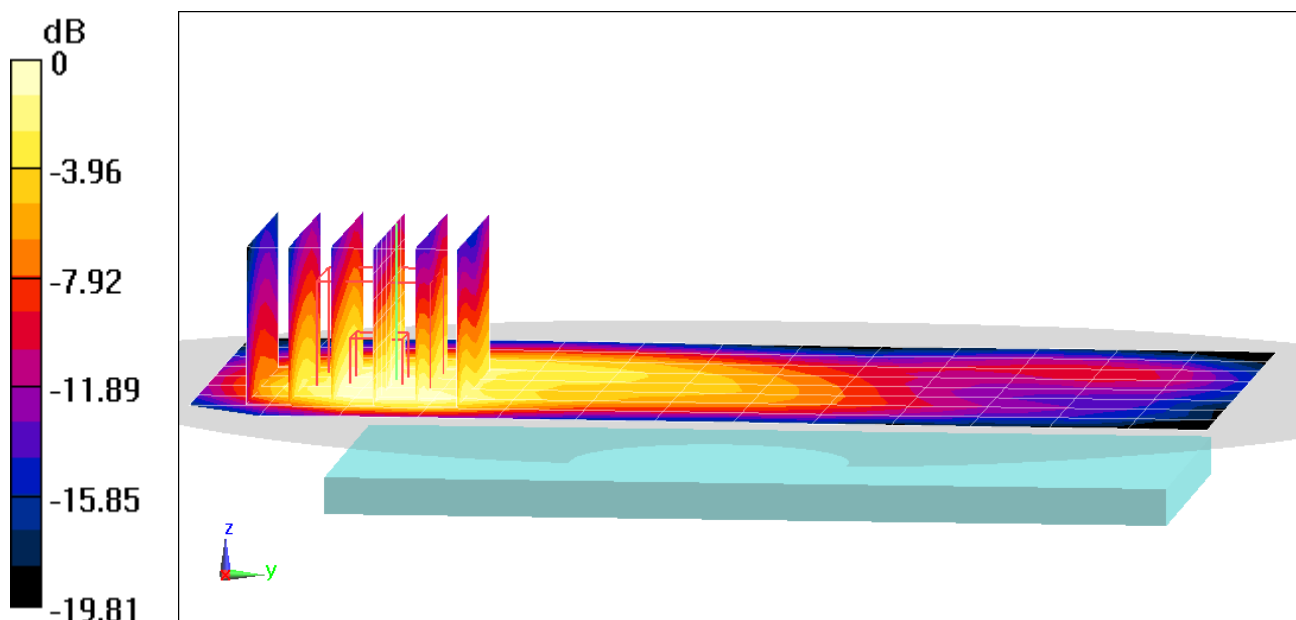

0 dB = 0.774 W/kg = -1.11 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, UMTS; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1907.6 \text{ MHz}$; $\sigma = 1.574 \text{ S/m}$; $\epsilon_r = 53.821$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2018; Ambient Temp: 22.5°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 1900, Body SAR, Bottom Edge, High.ch


Area Scan (10x9x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 29.94 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.22 W/kg

SAR(1 g) = 1.28 W/kg

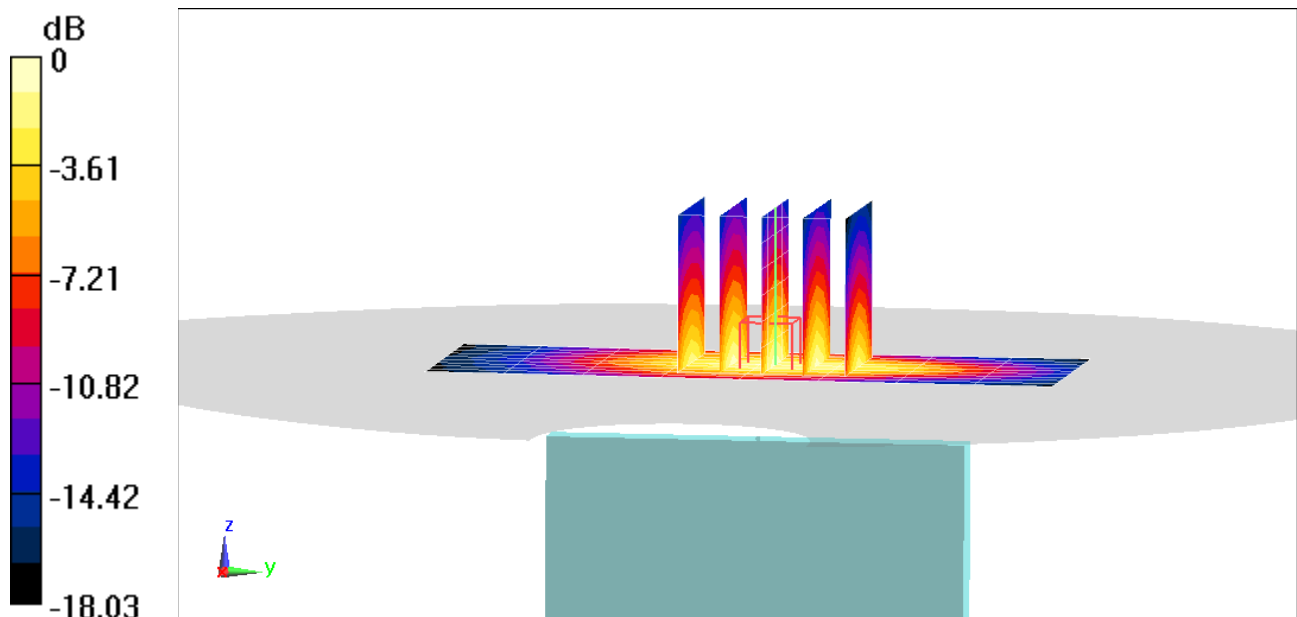

0 dB = 1.89 W/kg = 2.76 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.52 \text{ MHz}$; $\sigma = 1.008 \text{ S/m}$; $\epsilon_r = 53.016$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-17-2018; Ambient Temp: 20.0°C; Tissue Temp: 20.6°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: Cell. CDMA BC0, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.55 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.693 W/kg

SAR(1 g) = 0.515 W/kg

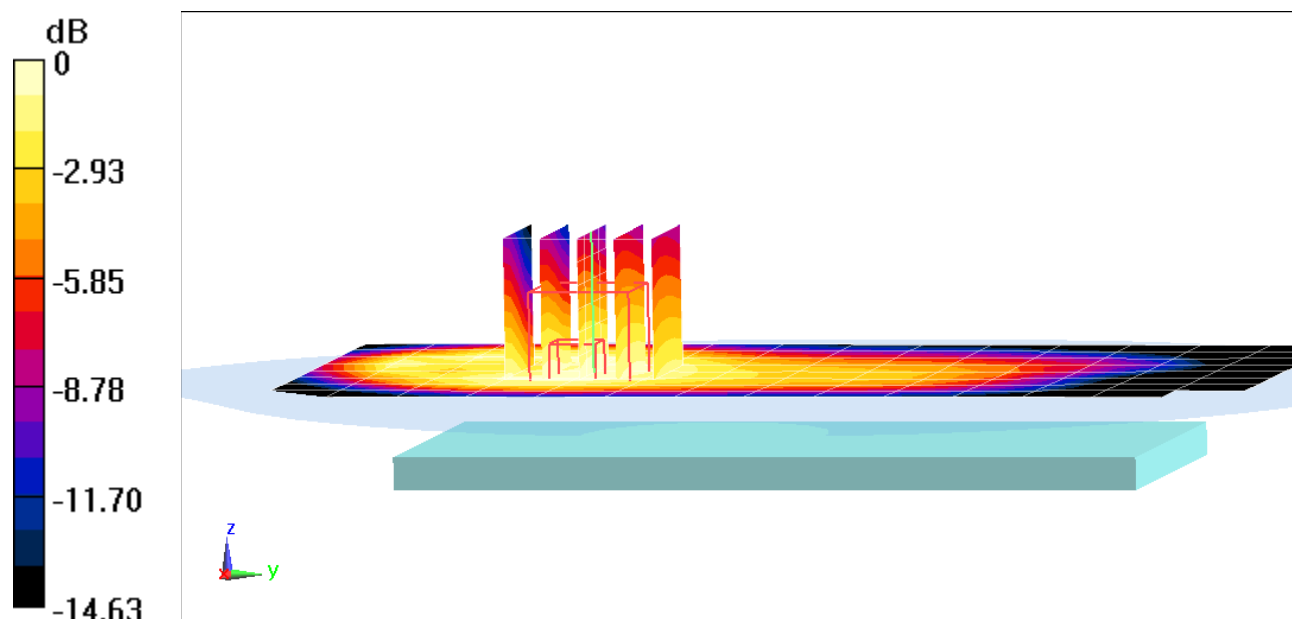

0 dB = 0.573 W/kg = -2.42 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.52 \text{ MHz}$; $\sigma = 1.008 \text{ S/m}$; $\epsilon_r = 53.016$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-17-2018; Ambient Temp: 20.0°C; Tissue Temp: 20.6°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: Cell. EVDO BC0, Body SAR, Front side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (9x7x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.40 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.809 W/kg

SAR(1 g) = 0.519 W/kg

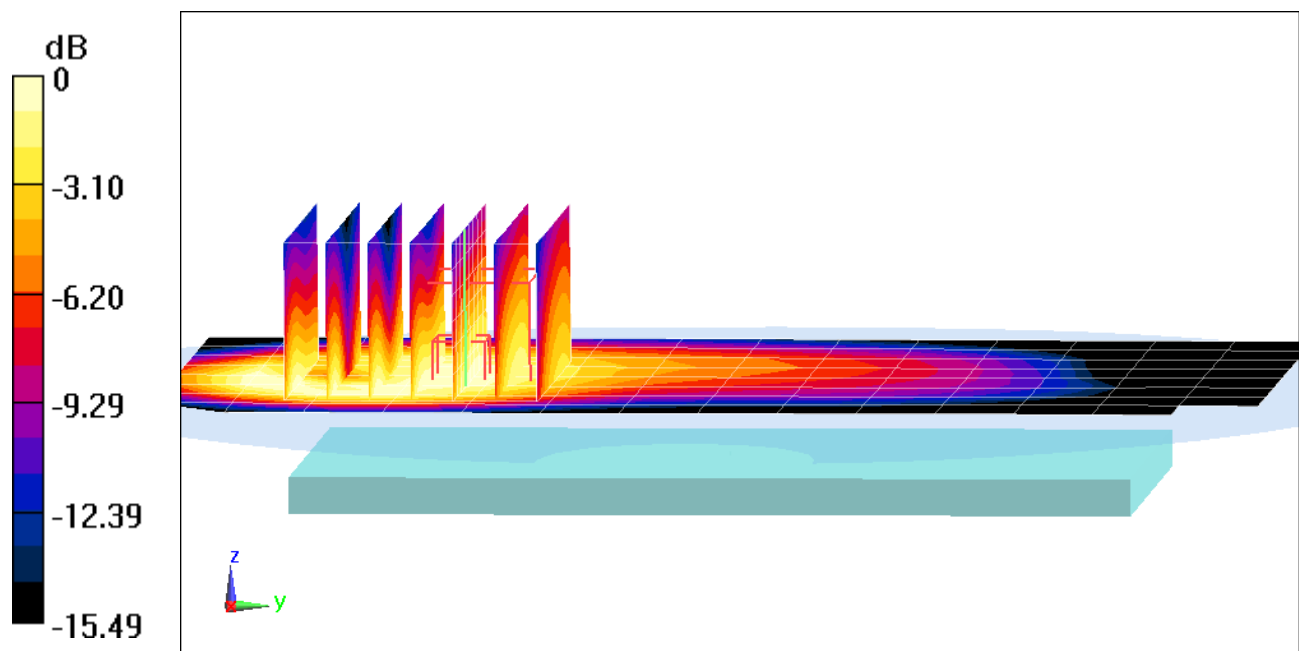

0 dB = 0.592 W/kg = -2.28 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$; $\sigma = 1.002 \text{ S/m}$; $\epsilon_r = 53.062$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-17-2018; Ambient Temp: 20.0°C; Tissue Temp: 20.6°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: Cell. CDMA BC10, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.37 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.814 W/kg

SAR(1 g) = 0.601 W/kg

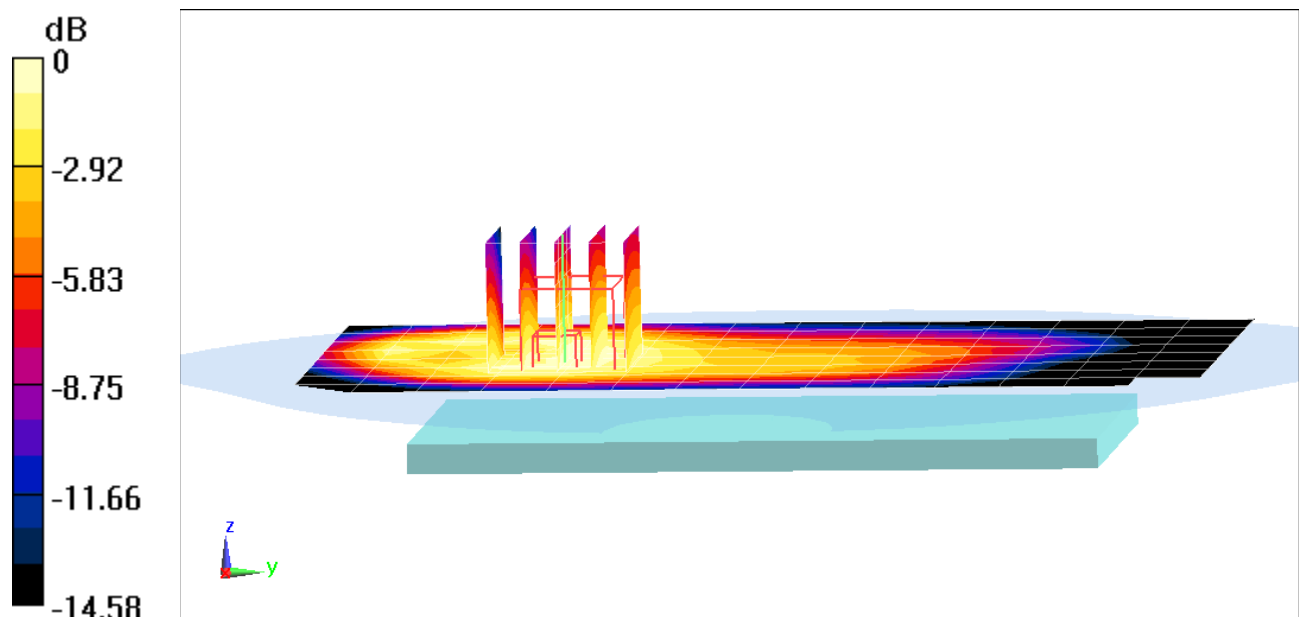

0 dB = 0.675 W/kg = -1.71 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$; $\sigma = 1.002 \text{ S/m}$; $\epsilon_r = 53.062$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-17-2018; Ambient Temp: 20.0°C; Tissue Temp: 20.6°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: Cell. EVDO BC10, Body SAR, Front side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (9x7x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.01 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.651 W/kg

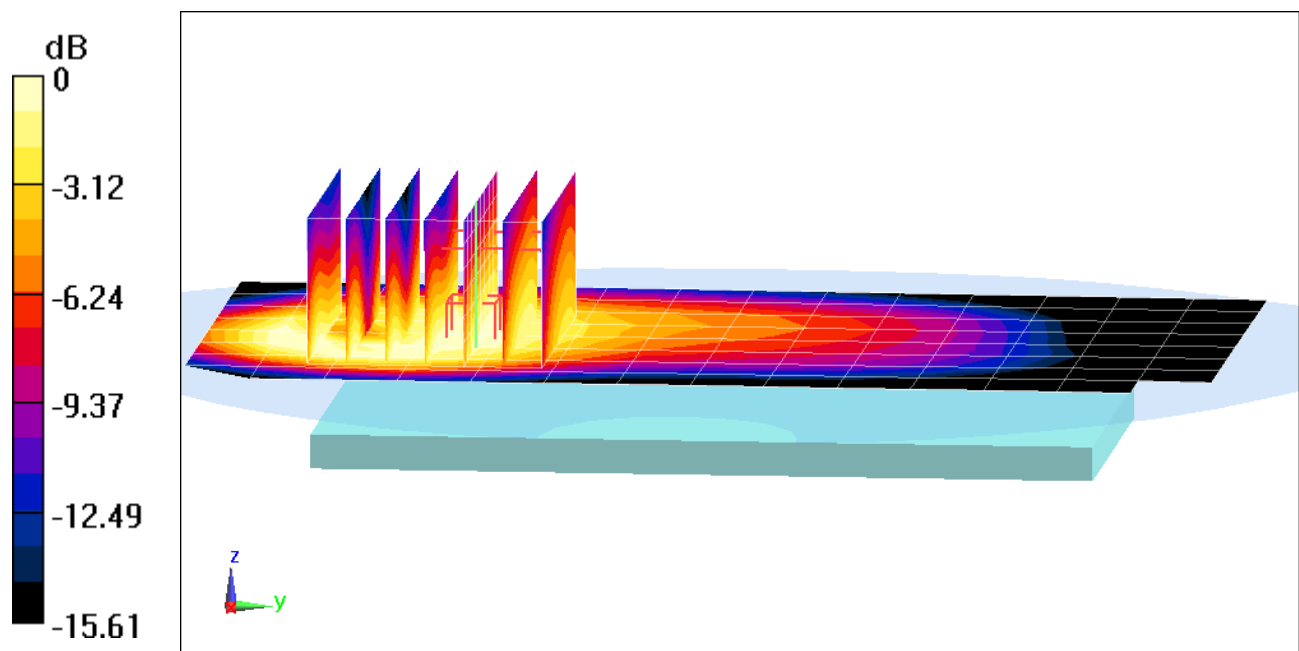

0 dB = 0.736 W/kg = -1.33 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.542 \text{ S/m}$; $\epsilon_r = 53.46$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2018; Ambient Temp: 23.1°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: PCS CDMA, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.58 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.564 W/kg

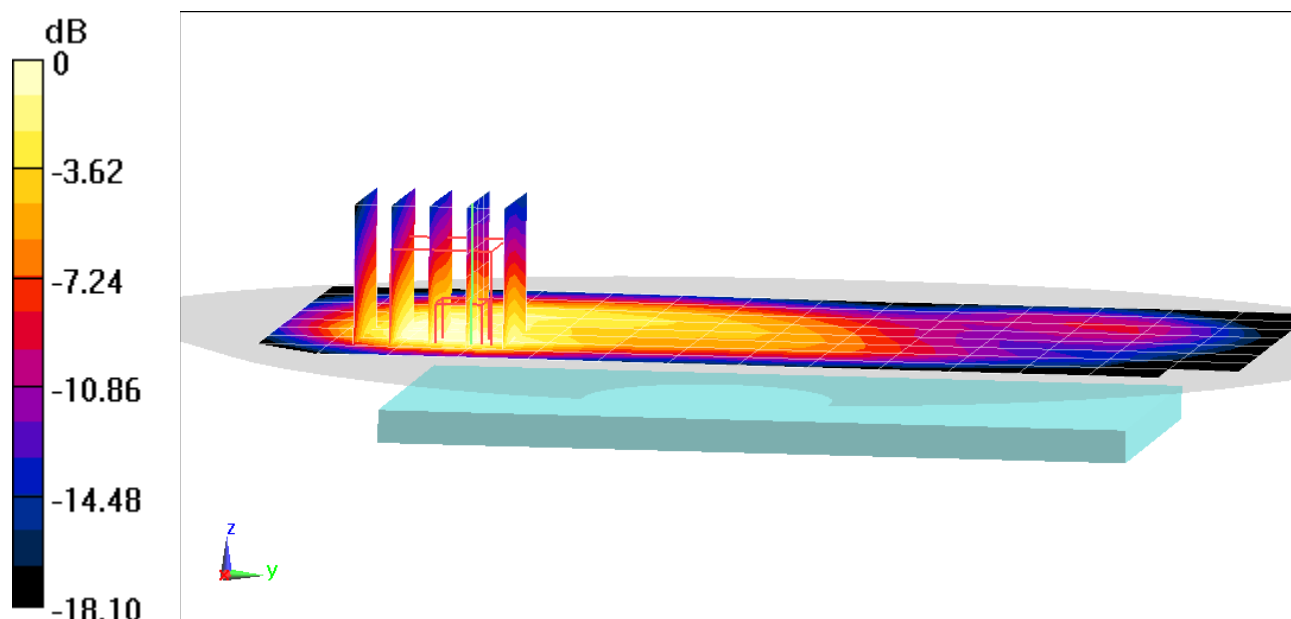

0 dB = 0.794 W/kg = -1.00 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1908.75 \text{ MHz}$; $\sigma = 1.582 \text{ S/m}$; $\epsilon_r = 54.474$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2018; Ambient Temp: 21.8°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: PCS EVDO, Body SAR, Bottom Edge, High.ch


Area Scan (10x9x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.00 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 1.02 W/kg

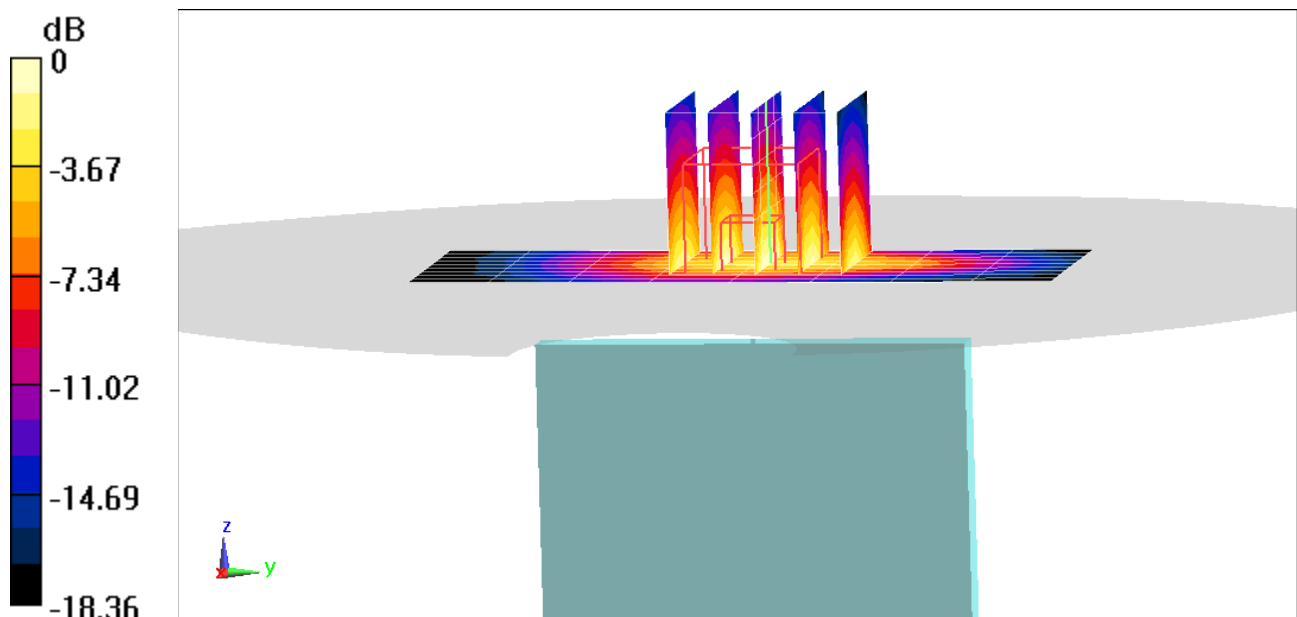

0 dB = 1.43 W/kg = 1.55 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00020

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.962 \text{ S/m}$; $\epsilon_r = 53.213$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2018; Ambient Temp: 22.0°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3213; ConvF(6.3, 6.3, 6.3); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 12, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (8x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.64 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.971 W/kg

SAR(1 g) = 0.602 W/kg

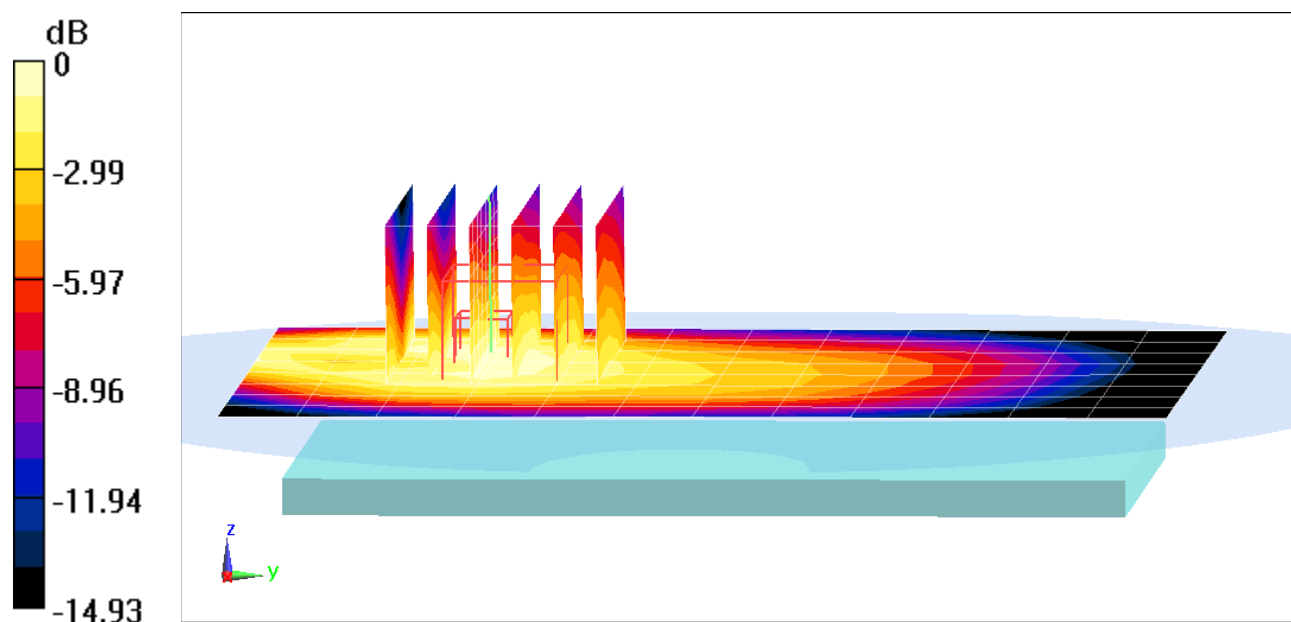

0 dB = 0.714 W/kg = -1.46 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00020

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.962 \text{ S/m}$; $\epsilon_r = 53.213$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2018; Ambient Temp: 22.0°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3213; ConvF(6.3, 6.3, 6.3); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 12, Body SAR, Front side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (8x7x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 29.46 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.736 W/kg

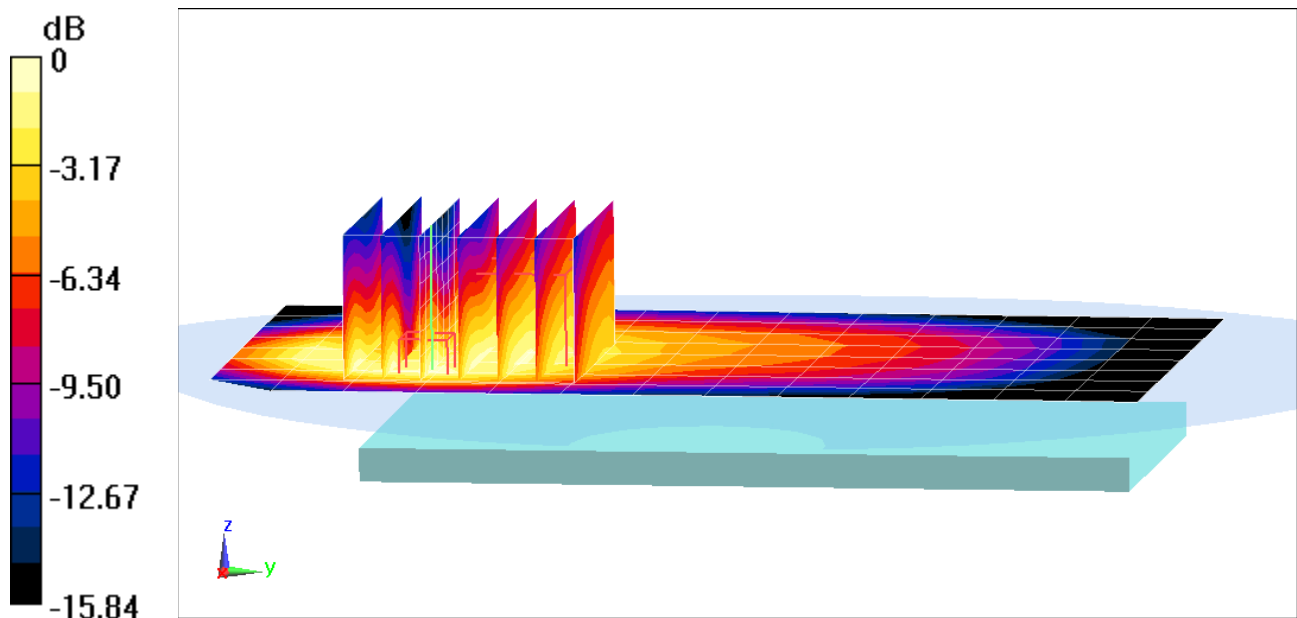

0 dB = 0.896 W/kg = -0.48 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00160

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.988 \text{ S/m}$; $\epsilon_r = 53.829$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-19-2018; Ambient Temp: 22.4°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3287; ConvF(6.71, 6.71, 6.71); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 6/21/2017

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 13, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.72 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.876 W/kg

SAR(1 g) = 0.580 W/kg

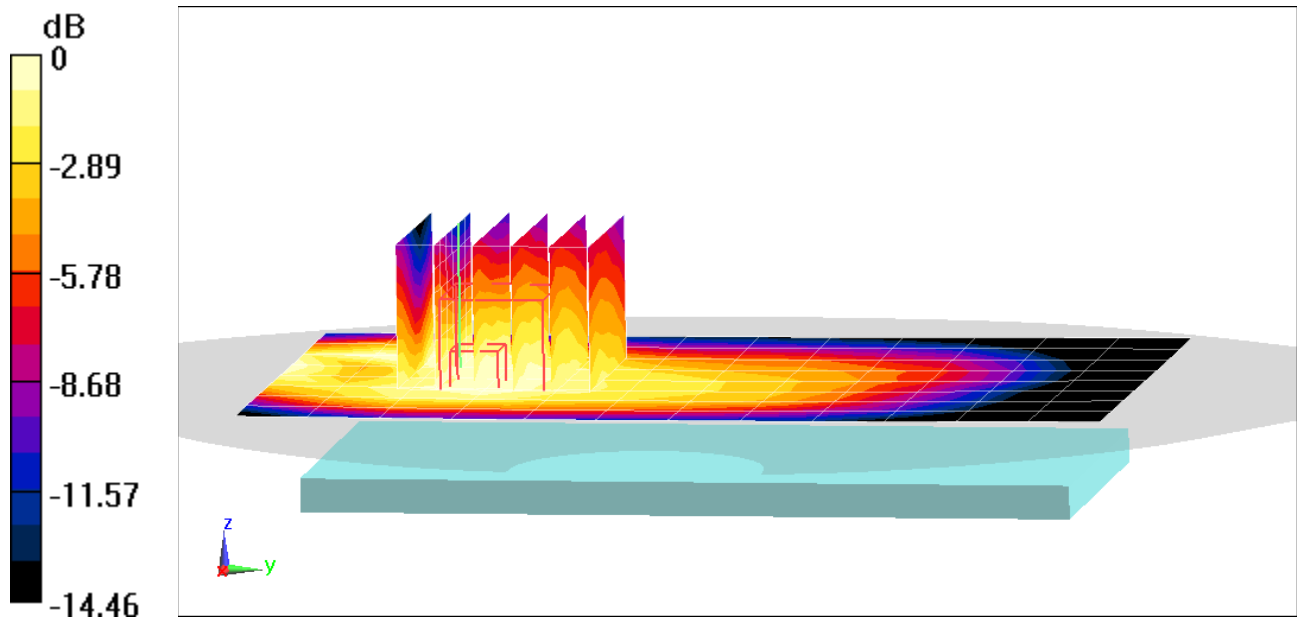

0 dB = 0.652 W/kg = -1.86 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00160

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.969 \text{ S/m}$; $\epsilon_r = 54.383$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-26-2018; Ambient Temp: 22.8°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3213; ConvF(6.3, 6.3, 6.3); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 13, Body SAR, Front side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (9x10x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 28.04 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.721 W/kg

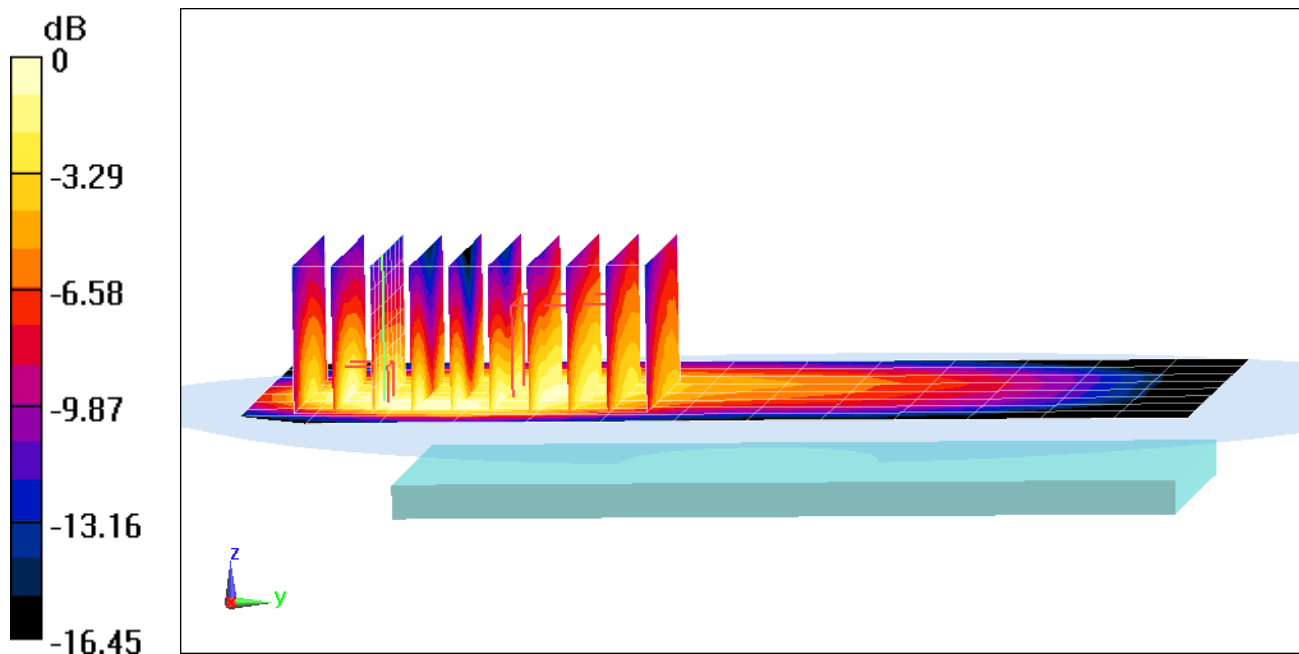

0 dB = 0.852 W/kg = -0.70 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 831.5 \text{ MHz}$; $\sigma = 1.006 \text{ S/m}$; $\epsilon_r = 53.028$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-17-2018; Ambient Temp: 20.0°C; Tissue Temp: 20.6°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 26 (Cell.), Body SAR, Back side, Mid.ch,
15 MHz Bandwidth, QPSK, 1 RB, 74 RB Offset**


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.97 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.913 W/kg

SAR(1 g) = 0.616 W/kg

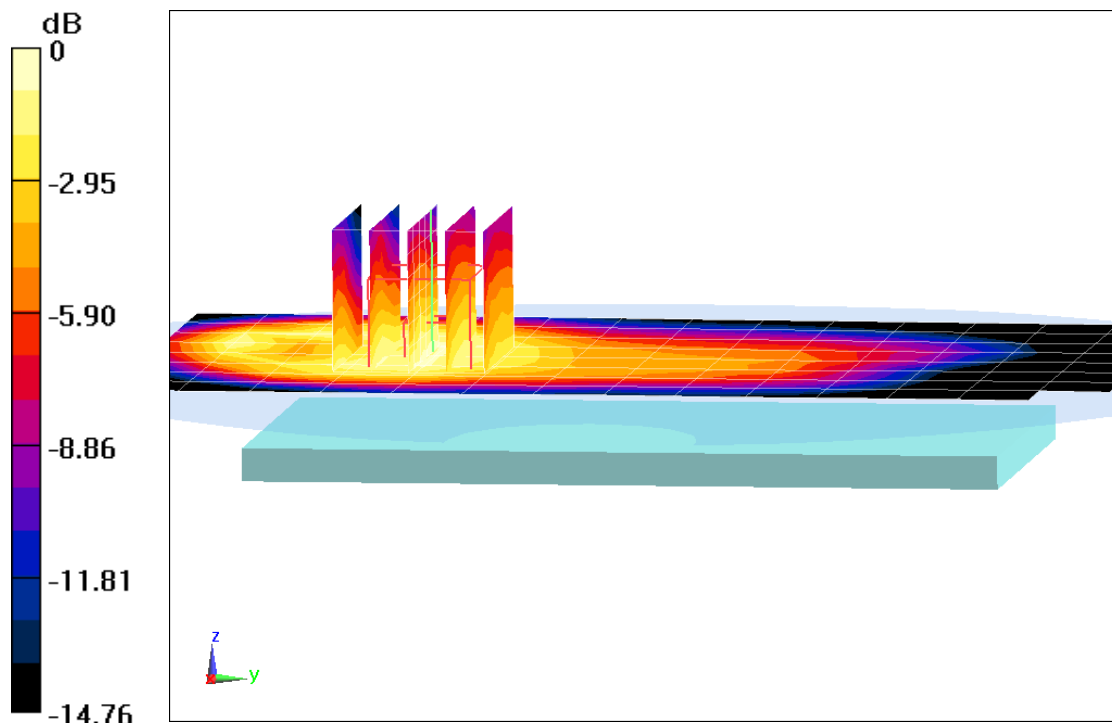

0 dB = 0.769 W/kg = -1.14 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 831.5 \text{ MHz}$; $\sigma = 1.006 \text{ S/m}$; $\epsilon_r = 53.028$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-17-2018; Ambient Temp: 20.0°C; Tissue Temp: 20.6°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 26 (Cell.), Body SAR, Front side, Mid.ch,
15 MHz Bandwidth, QPSK, 1 RB, 74 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (8x10x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.18 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.695 W/kg

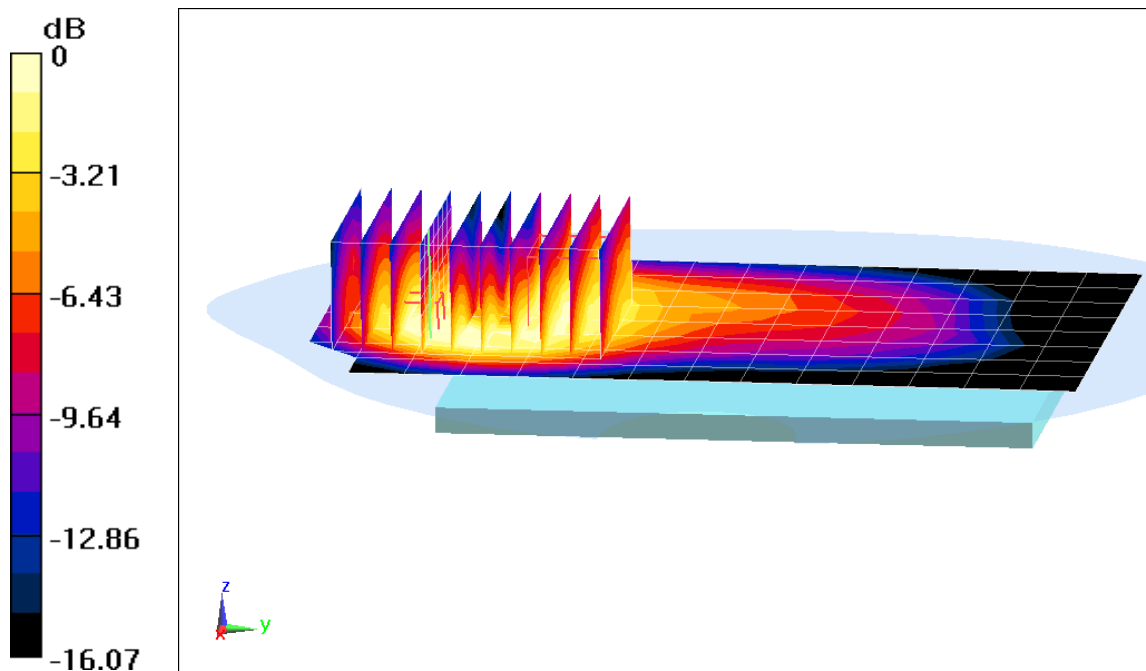

0 dB = 0.821 W/kg = -0.86 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00038

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1770 \text{ MHz}$; $\sigma = 1.527 \text{ S/m}$; $\epsilon_r = 51.148$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2018; Ambient Temp: 22.0°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3287; ConvF(5.19, 5.19, 5.19); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 6/21/2017

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1167

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 66 (AWS), Body SAR, Back side, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.97 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.949 W/kg

SAR(1 g) = 0.595 W/kg

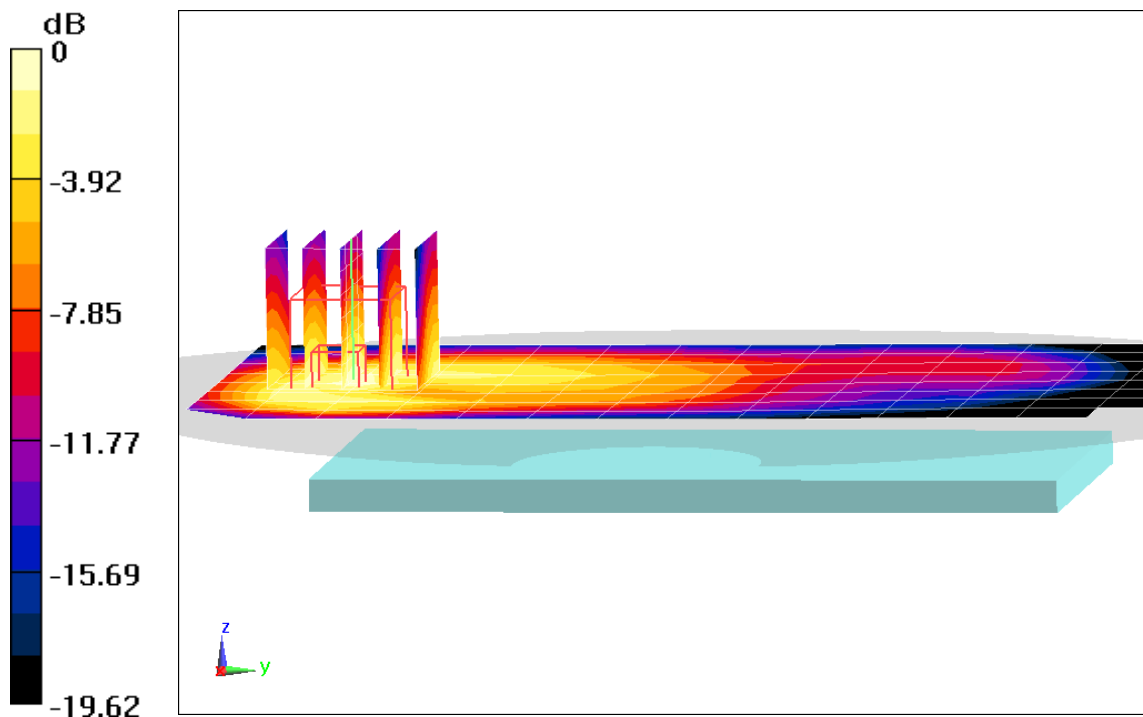

0 dB = 0.703 W/kg = -1.53 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00038

Communication System: UID 0, _LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1770 \text{ MHz}$; $\sigma = 1.527 \text{ S/m}$; $\epsilon_r = 51.148$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section Space: 1.0 cm

Test Date: 04-15-2018; Ambient Temp: 22.0°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3287; ConvF(5.19, 5.19, 5.19); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 6/21/2017

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1167

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 66 (AWS), Body SAR, Bottom Edge, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (11x7x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.03 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.994 W/kg

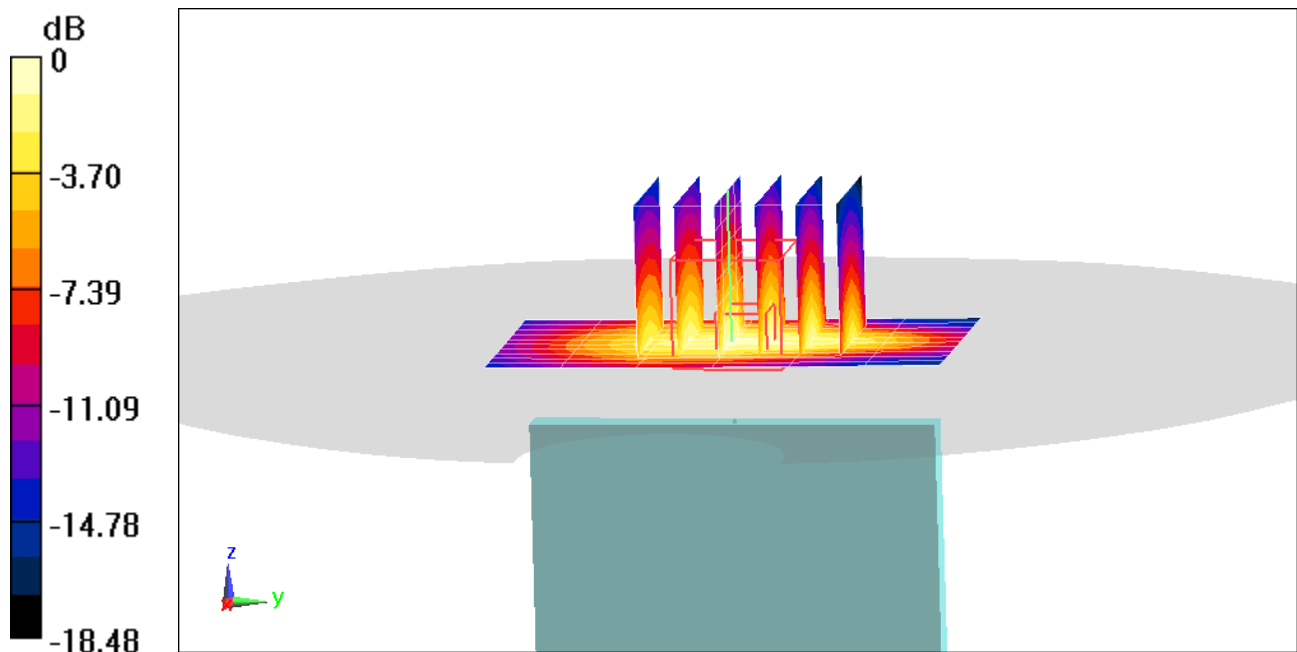

0 dB = 1.20 W/kg = 0.79 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00038

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1905 \text{ MHz}$; $\sigma = 1.578 \text{ S/m}$; $\epsilon_r = 54.488$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2018; Ambient Temp: 21.8°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 25 (PCS), Body SAR, Back side, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.21 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.712 W/kg

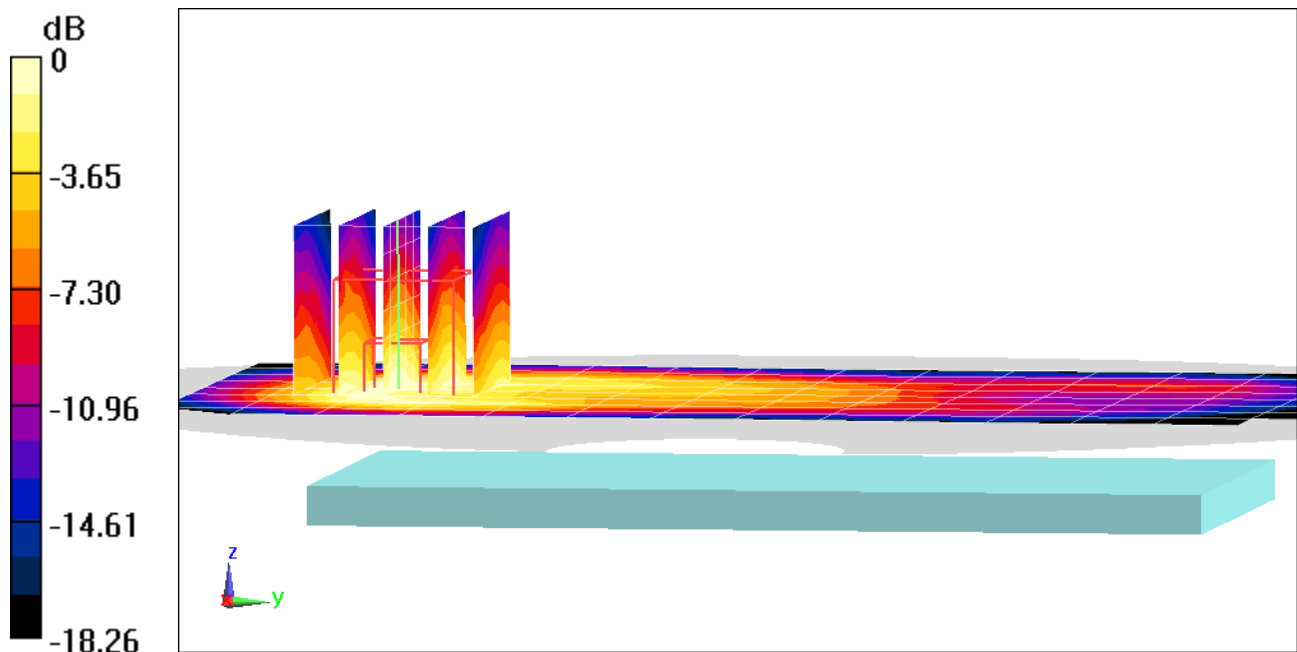

0 dB = 0.940 W/kg = -0.27 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00038

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1905 \text{ MHz}$; $\sigma = 1.572 \text{ S/m}$; $\epsilon_r = 53.382$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2018; Ambient Temp: 23.1°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 25 (PCS), Body SAR, Bottom Edge, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**


Area Scan (9x9x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 30.45 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 1.16 W/kg

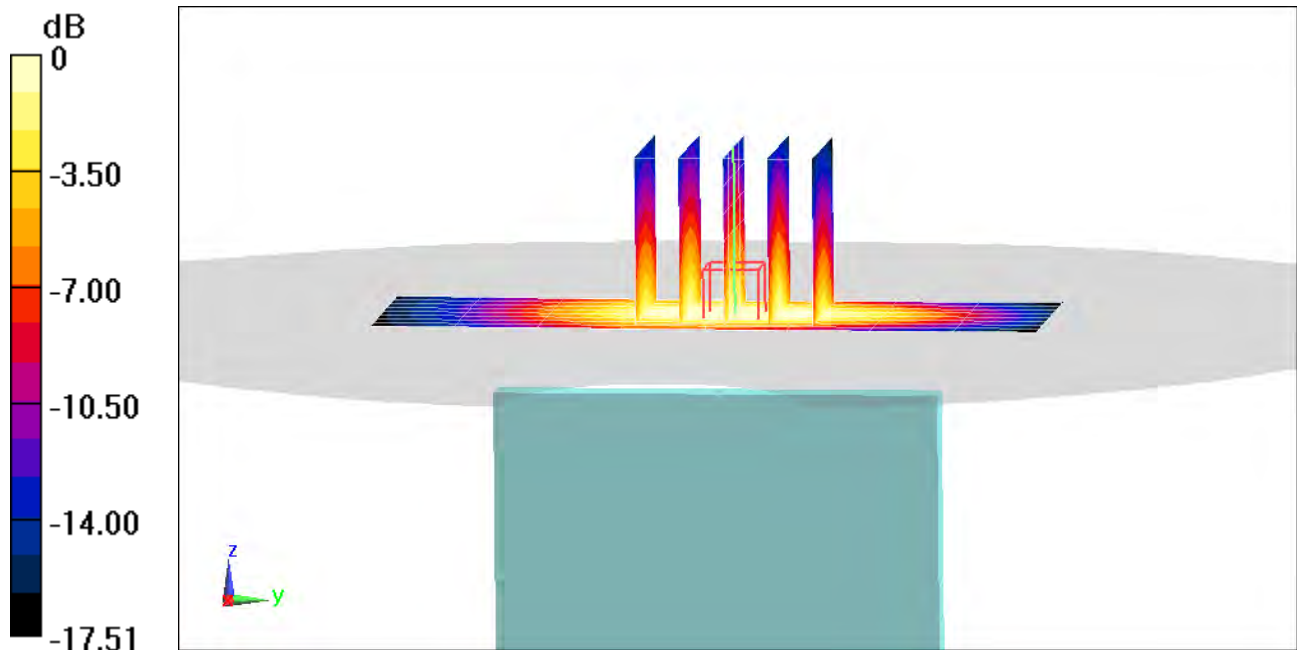

0 dB = 1.67 W/kg = 2.23 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00038

Communication System: UID 0, LTE Band 41 (Class 3); Frequency: 2506 MHz; Duty Cycle: 1:1.58

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2506 \text{ MHz}$; $\sigma = 2.08 \text{ S/m}$; $\epsilon_r = 50.588$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-17-2018; Ambient Temp: 23.5°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3319; ConvF(4.51, 4.51, 4.51); Calibrated: 3/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 41, Body SAR, Back side, Low.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**


Area Scan (11x18x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.873 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.235 W/kg

SAR(1 g) = 0.115 W/kg

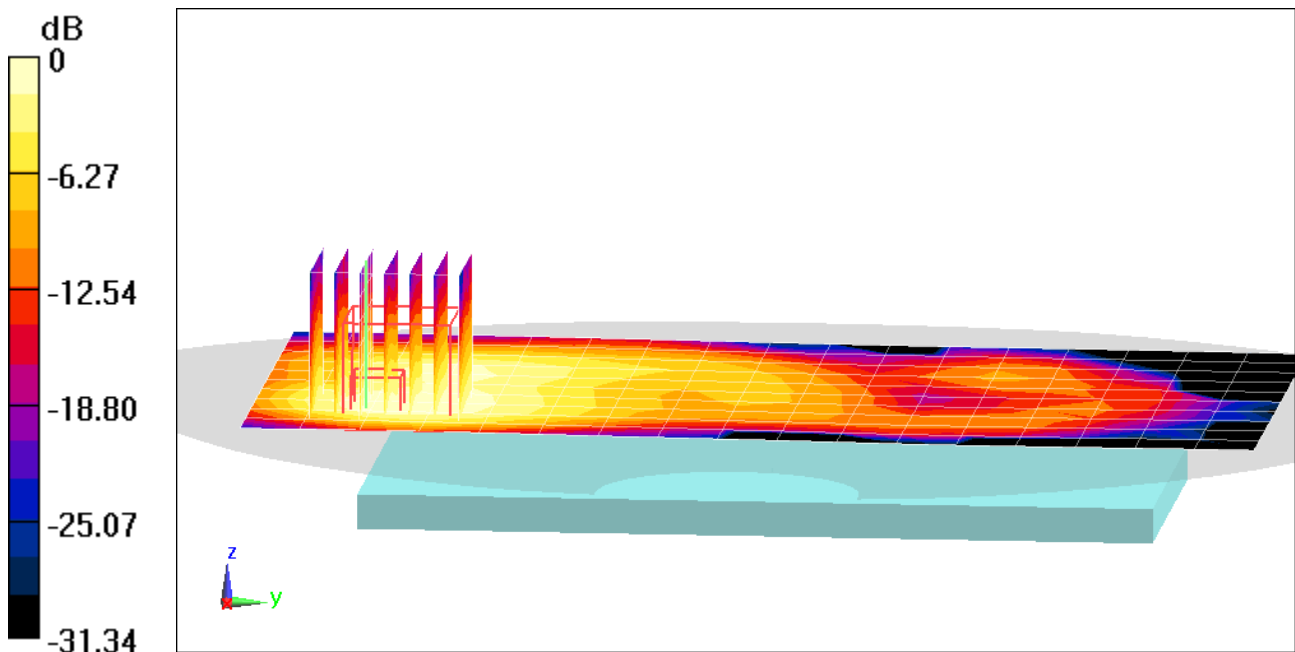

0 dB = 0.144 W/kg = -8.42 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00038

Communication System: UID 0, _LTE Band 41; Frequency: 2506 MHz; Duty Cycle: 1:1.58

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2506 \text{ MHz}$; $\sigma = 2.08 \text{ S/m}$; $\epsilon_r = 50.588$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-17-2018; Ambient Temp: 23.5°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3319; ConvF(4.51, 4.51, 4.51); Calibrated: 3/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 41, Body SAR, Front side, Low.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**


Area Scan (11x18x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.81 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.403 W/kg

SAR(1 g) = 0.212 W/kg

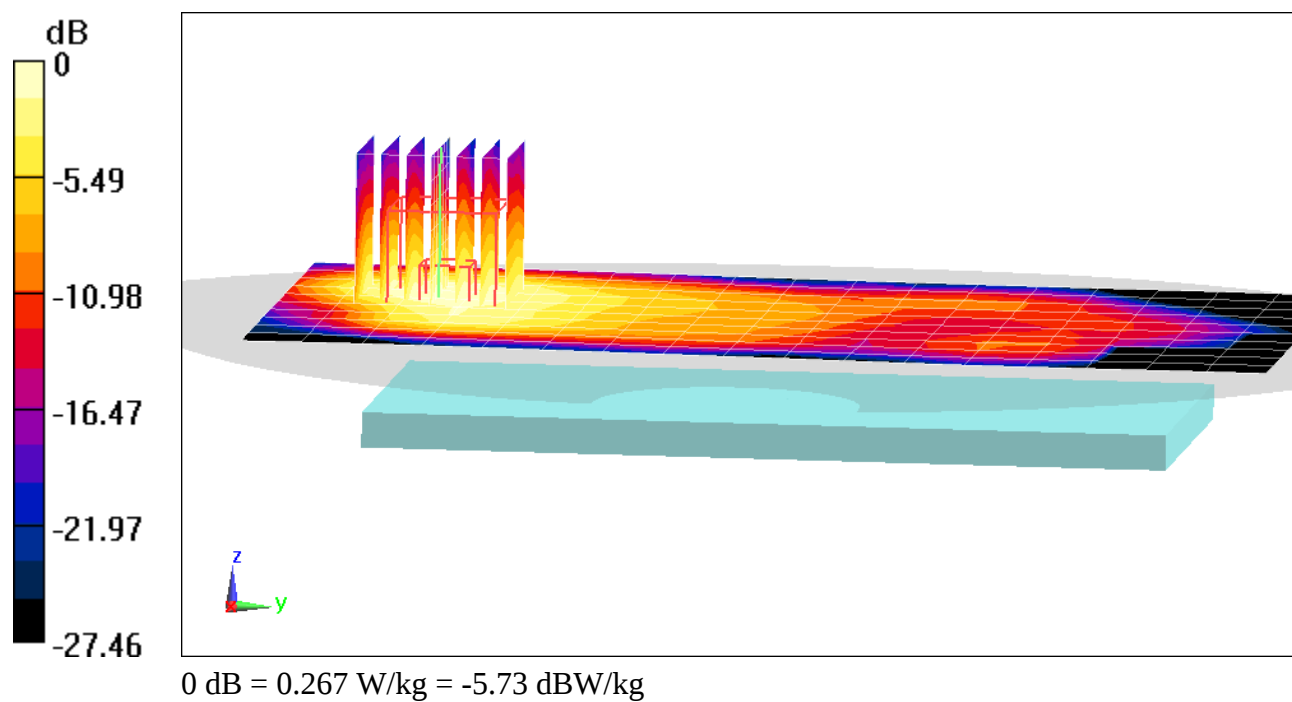

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00103

Communication System: UID 0, _IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 2.023 \text{ S/m}$; $\epsilon_r = 51.737$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-23-2018; Ambient Temp: 21.9°C; Tissue Temp: 20.6°C

Probe: ES3DV3 - SN3319; ConvF(4.51, 4.51, 4.51); Calibrated: 3/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: IEEE 802.11b, 22 MHz Bandwidth, Body SAR, Ch 6, 1 Mbps, Back Side


Area Scan (11x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.86 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.799 W/kg

SAR(1 g) = 0.376 W/kg

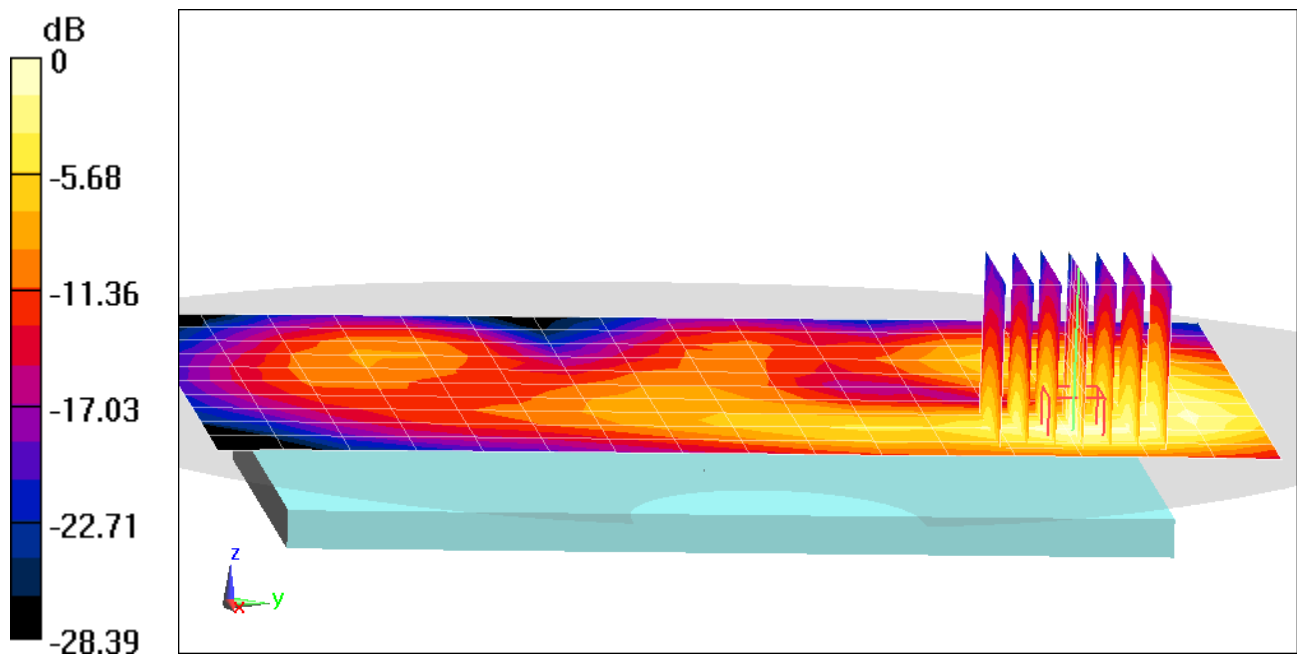

0 dB = 0.500 W/kg = -3.01 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00103

Communication System: UID 0, _IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 2.023 \text{ S/m}$; $\epsilon_r = 51.737$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-23-2018; Ambient Temp: 21.9°C; Tissue Temp: 20.6°C

Probe: ES3DV3 - SN3319; ConvF(4.51, 4.51, 4.51); Calibrated: 3/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: IEEE 802.11b, 22 MHz Bandwidth, Body SAR, Ch 6, 1 Mbps, Left Side


Area Scan (10x17x1): Measurement grid: dx=5mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.47 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.646 W/kg

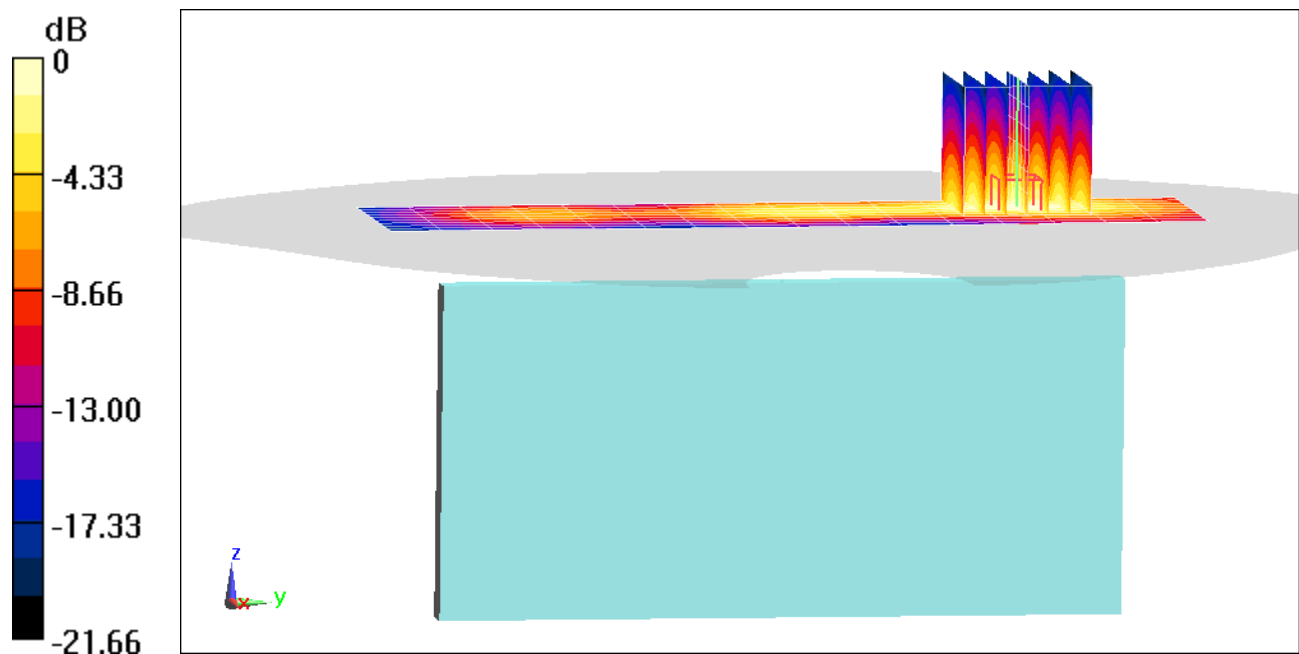

0 dB = 0.839 W/kg = -0.76 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00103

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5520 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5520 \text{ MHz}$; $\sigma = 5.871 \text{ S/m}$; $\epsilon_r = 46.786$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-23-2018; Ambient Temp: 22.3°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7308; ConvF(4.23, 4.23, 4.23); Calibrated: 8/16/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

Mode: IEEE 802.11a, UNII-2C, 20 MHz Bandwidth, Body SAR, Ch 104, 6 Mbps, Back Side


Area Scan (13x21x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 11.58 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.16 W/kg

SAR(1 g) = 0.746 W/kg

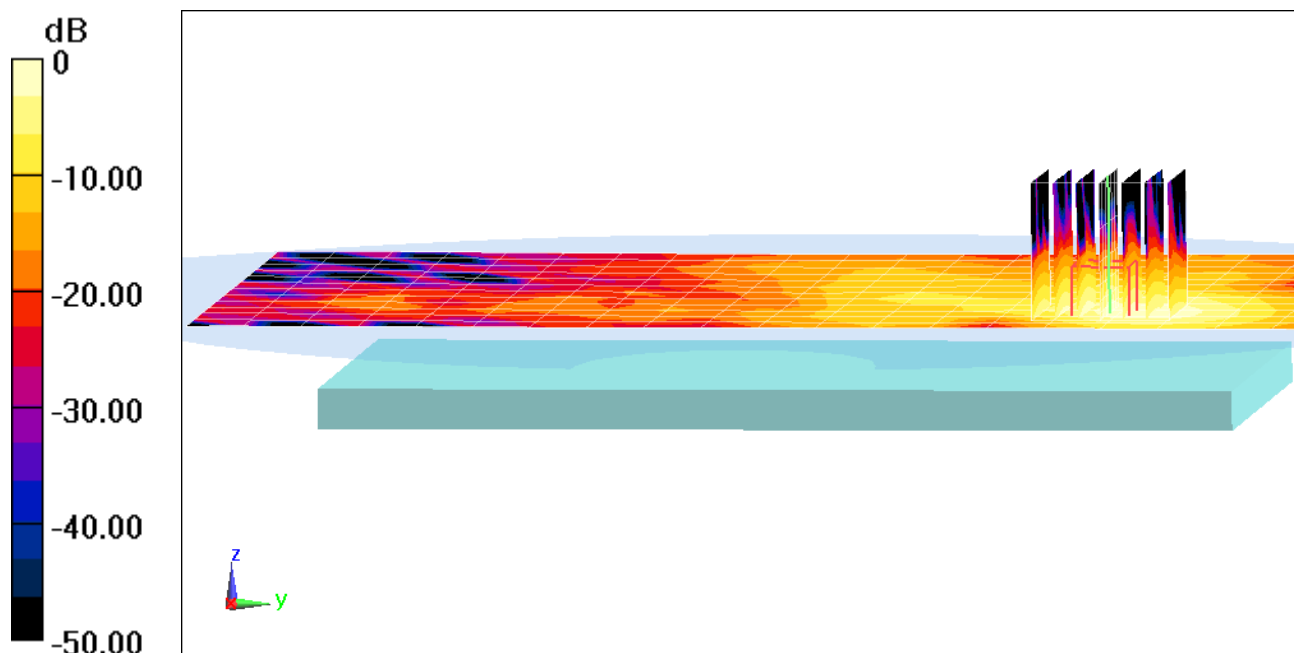

0 dB = 1.78 W/kg = 2.50 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00103

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5785 \text{ MHz}$; $\sigma = 6.196 \text{ S/m}$; $\epsilon_r = 47.08$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-19-2018; Ambient Temp: 22.5°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7308; ConvF(4.5, 4.5, 4.5); Calibrated: 8/16/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: IEEE 802.11a, UNII-3, 20 MHz Bandwidth, Body SAR, Ch 157, 6 Mbps, Back Side


Area Scan (13x21x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 11.05 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.40 W/kg

SAR(1 g) = 0.740 W/kg

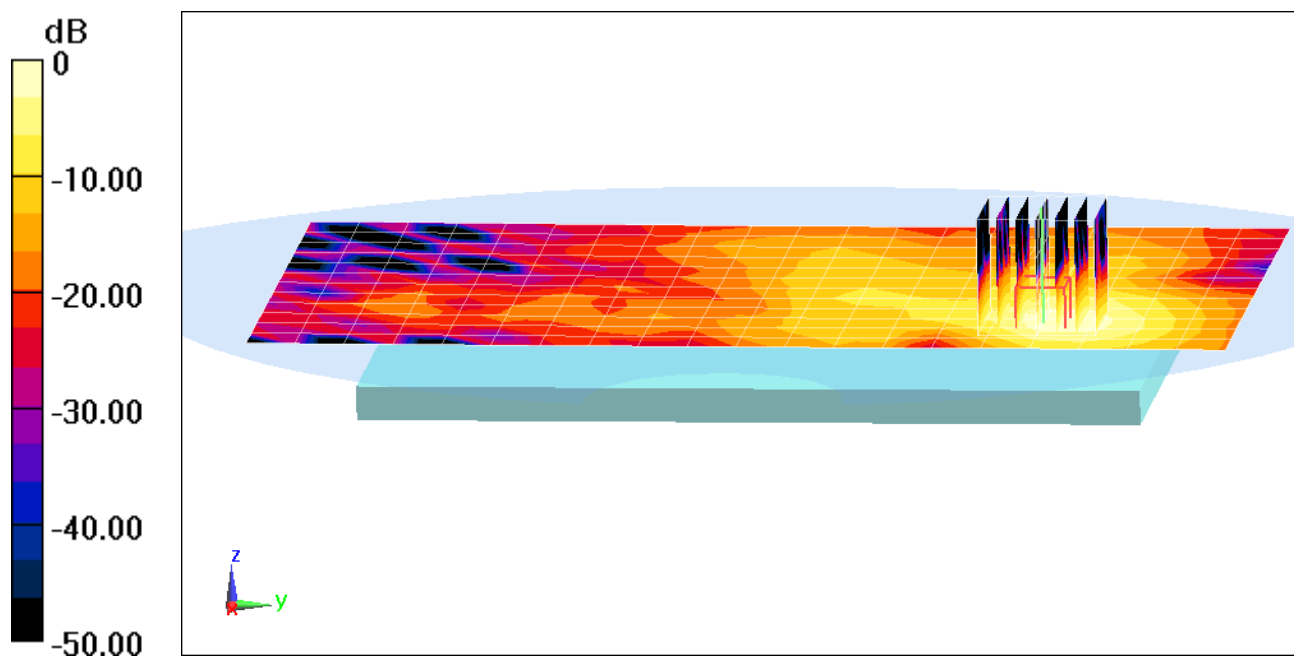

0 dB = 1.83 W/kg = 2.62 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, _UMTS; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1752.6 \text{ MHz}$; $\sigma = 1.51 \text{ S/m}$; $\epsilon_r = 51.229$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 04-15-2018; Ambient Temp: 22.0°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3287; ConvF(5.19, 5.19, 5.19); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 6/21/2017

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1167

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 1750, Phablet SAR, Bottom Edge, High.ch


Area Scan (10x9x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 68.49 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 14.3 W/kg

SAR(10 g) = 2.9 W/kg

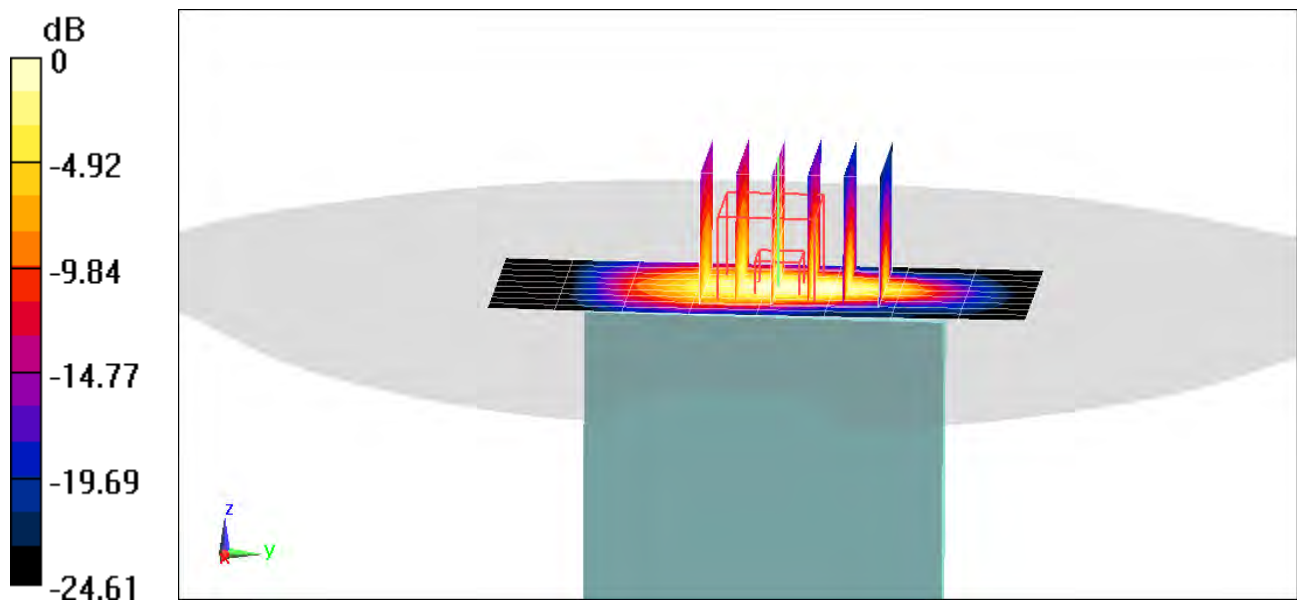

0 dB = 8.38 W/kg = 9.23 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, UMTS; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1907.6 \text{ MHz}$; $\sigma = 1.575 \text{ S/m}$; $\epsilon_r = 53.374$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 04-20-2018; Ambient Temp: 23.1°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 1900, Phablet SAR, Bottom Edge, High.ch


Area Scan (11x9x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 70.72 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 17.4 W/kg

SAR(10 g) = 3.2 W/kg

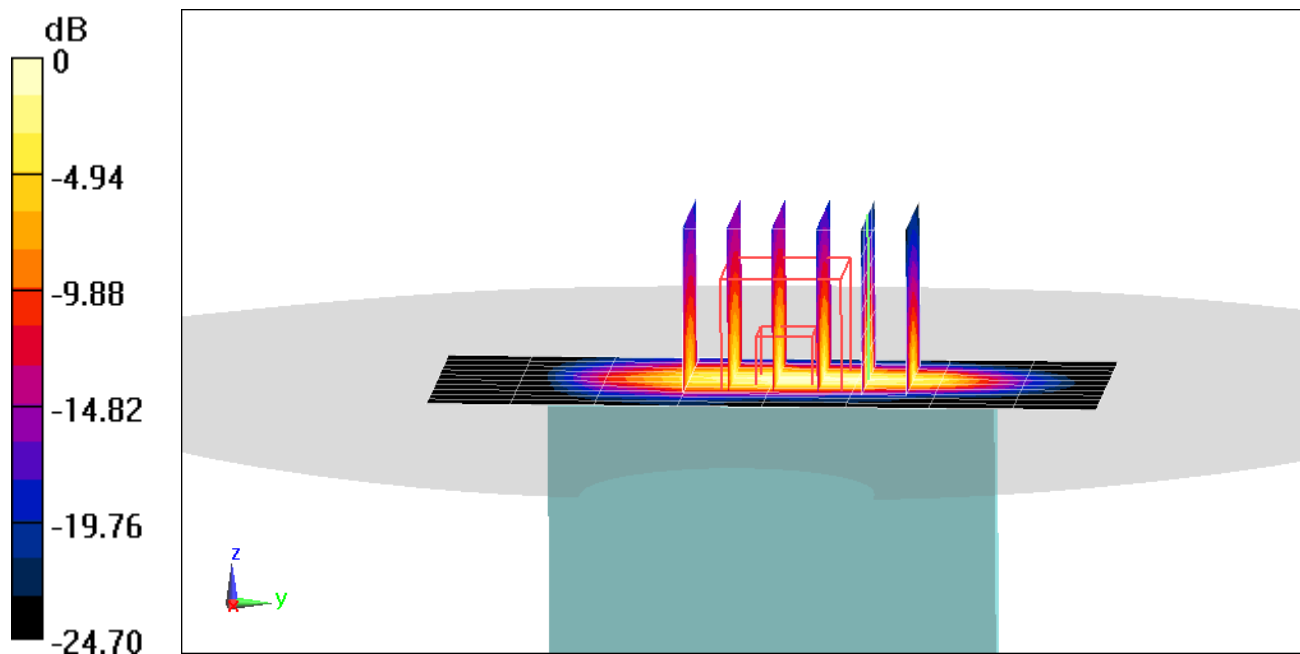

0 dB = 14.2 W/kg = 11.52 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00012

Communication System: UID 0, CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1908.75 \text{ MHz}$; $\sigma = 1.582 \text{ S/m}$; $\epsilon_r = 54.474$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 04-18-2018; Ambient Temp: 21.8°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: PCS EVDO, Phablet SAR, Bottom Edge, High.ch


Area Scan (10x9x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 70.74 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 15.8 W/kg

SAR(10 g) = 3.1 W/kg

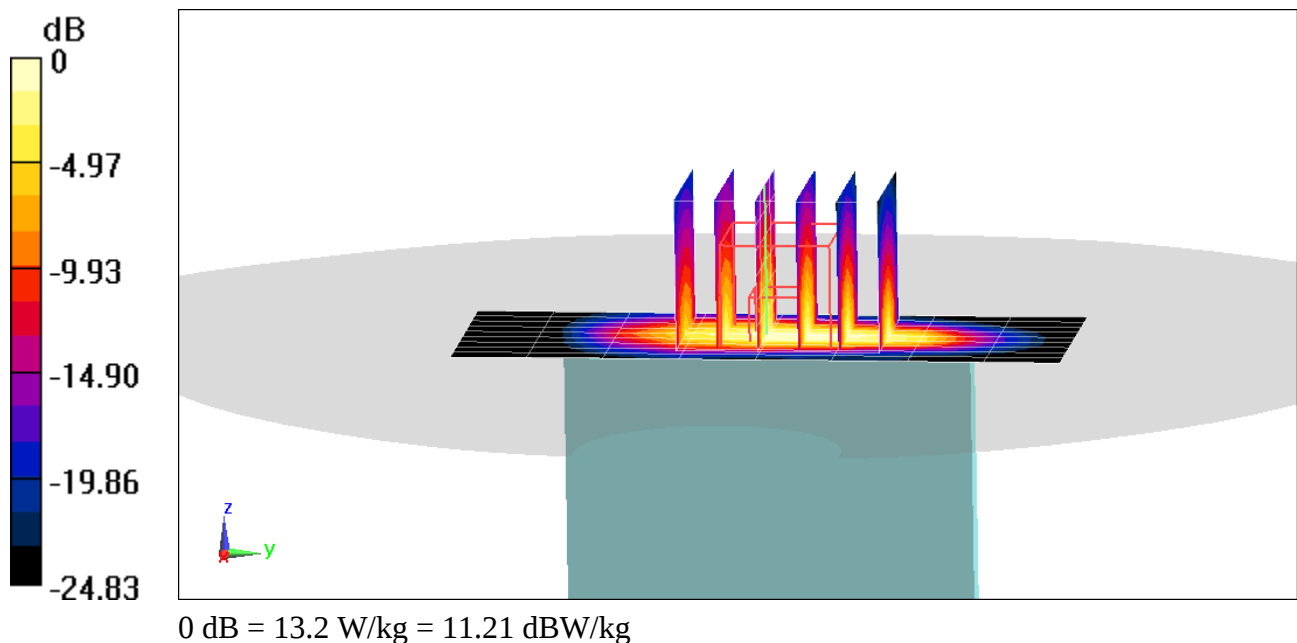

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00020

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1745 \text{ MHz}$; $\sigma = 1.502 \text{ S/m}$; $\epsilon_r = 51.487$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 04-17-2018; Ambient Temp: 21.9°C; Tissue Temp: 20.1°C

Probe: ES3DV3 - SN3287; ConvF(5.19, 5.19, 5.19); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 6/21/2017

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1167

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 66 (AWS), Phablet SAR, Bottom Edge, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**


Area Scan (10x9x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 71.77 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 15.6 W/kg

SAR(10 g) = 3.17 W/kg

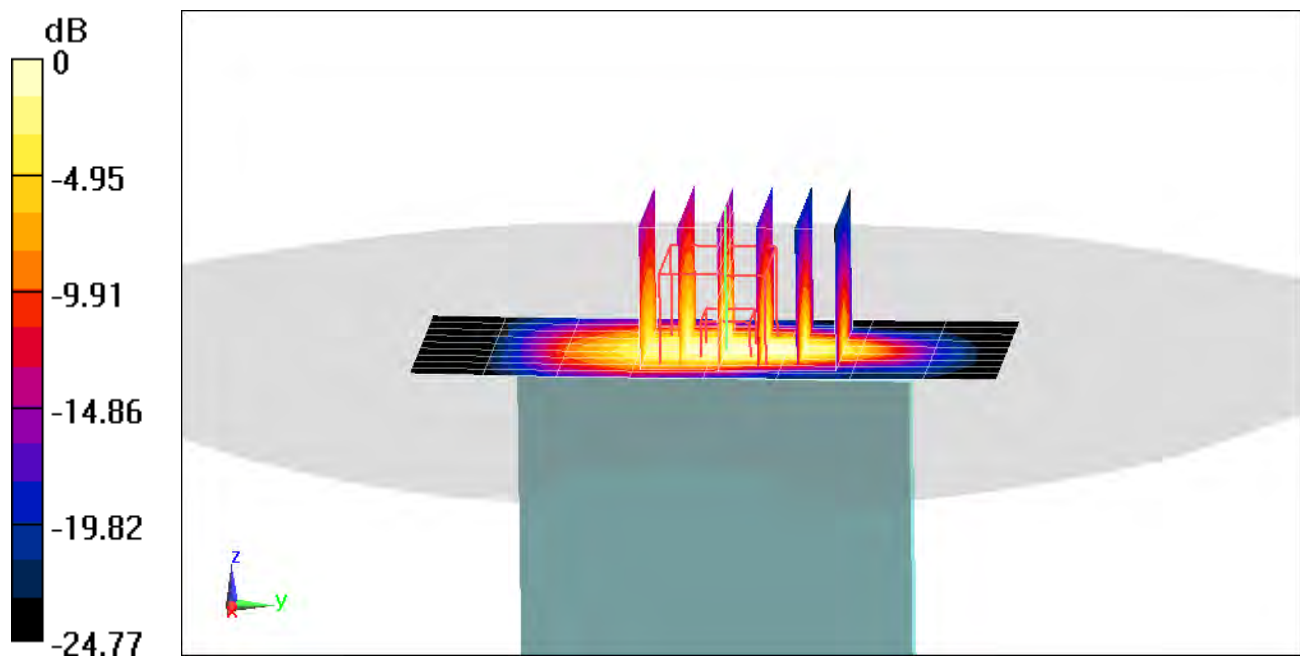

0 dB = 8.94 W/kg = 9.51 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00038

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1882.5 \text{ MHz}$; $\sigma = 1.55 \text{ S/m}$; $\epsilon_r = 54.568$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 04-18-2018; Ambient Temp: 21.8°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 25 (PCS), Phablet SAR, Bottom Edge, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**


Area Scan (10x9x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 70.88 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 16.4 W/kg

SAR(10 g) = 3.09 W/kg

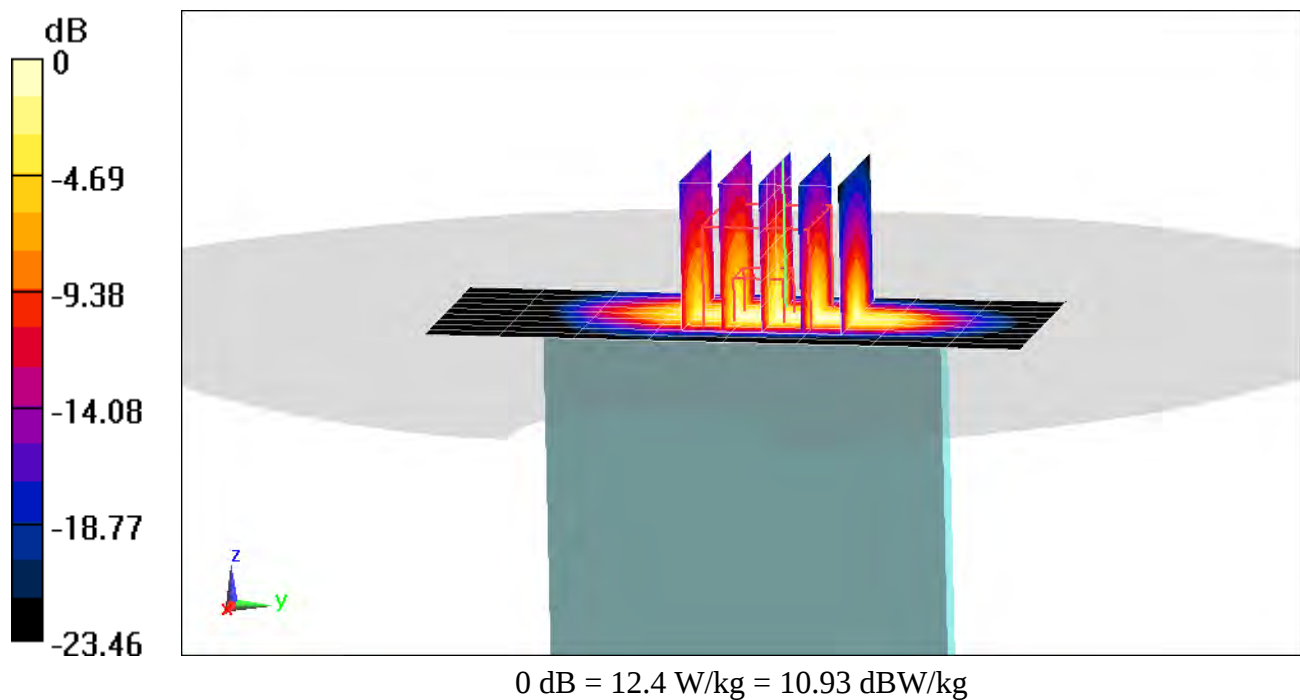

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710US; Type: Portable Handset; Serial: 00103

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5280 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5280 \text{ MHz}$; $\sigma = 5.513 \text{ S/m}$; $\epsilon_r = 47.935$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 04-19-2018; Ambient Temp: 22.5°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7308; ConvF(4.84, 4.84, 4.84); Calibrated: 8/16/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11a, U-NII-2A, 20 MHz Bandwidth,
Phablet SAR, Ch 56, 6 Mbps, Back Side**


Area Scan (13x21x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 1.390 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 36.0 W/kg

SAR(10 g) = 1.98 W/kg

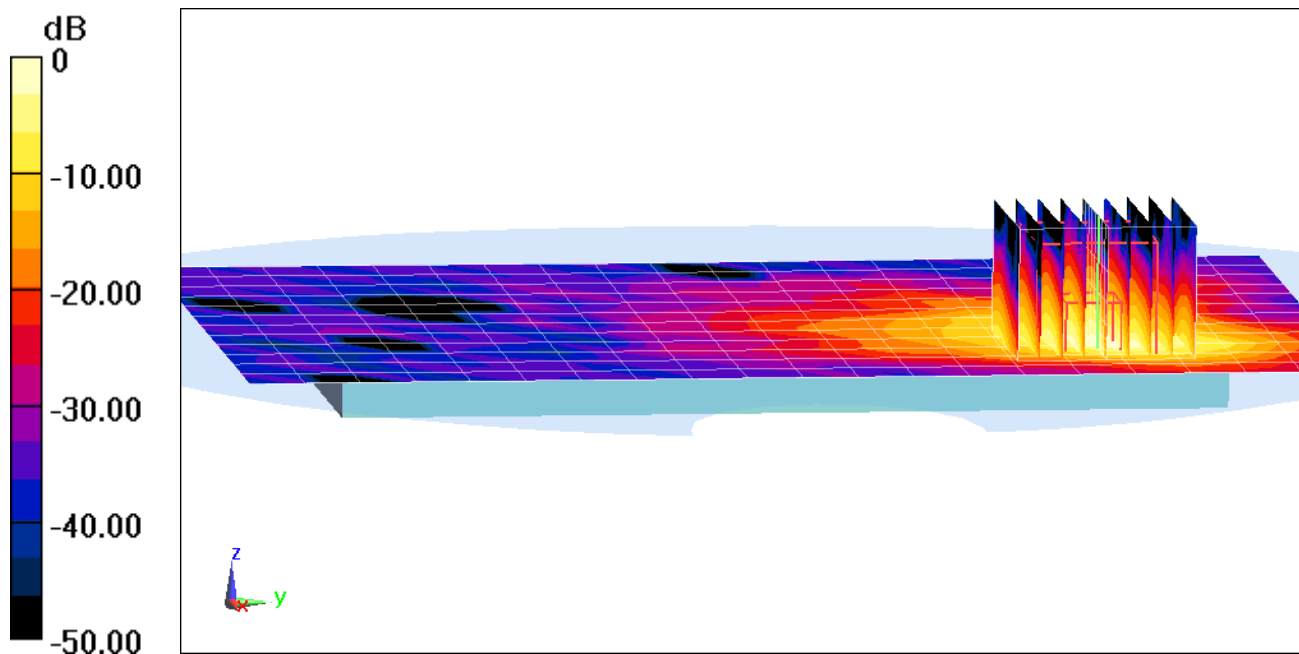

APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1161

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 41.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-19-2018; Ambient Temp: 23.6°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3213; ConvF(6.75, 6.75, 6.75); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.41 W/kg

SAR(1 g) = 1.6 W/kg

Deviation(1 g) = -2.08%

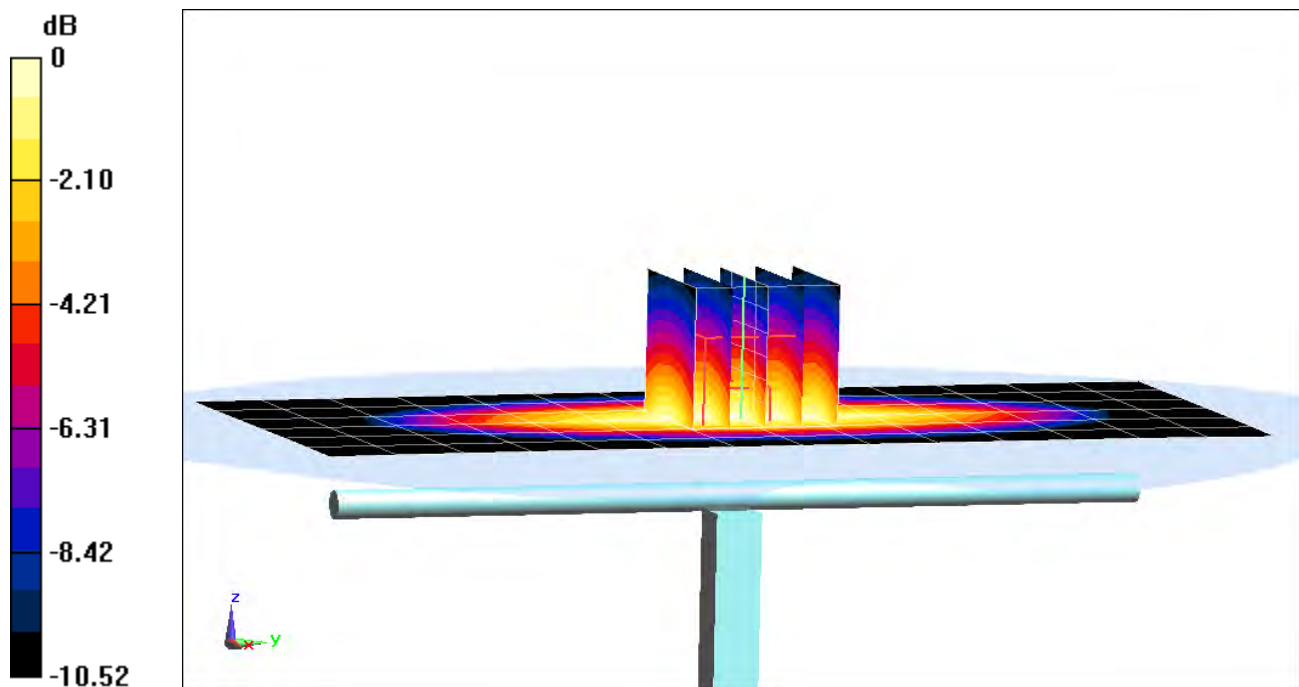

0 dB = 1.87 W/kg = 2.72 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.915 \text{ S/m}$; $\epsilon_r = 42.23$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-17-2018; Ambient Temp: 22.7°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3332; ConvF(6.64, 6.64, 6.64); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.82 W/kg

SAR(1 g) = 1.94 W/kg

Deviation(1 g) = 1.89%

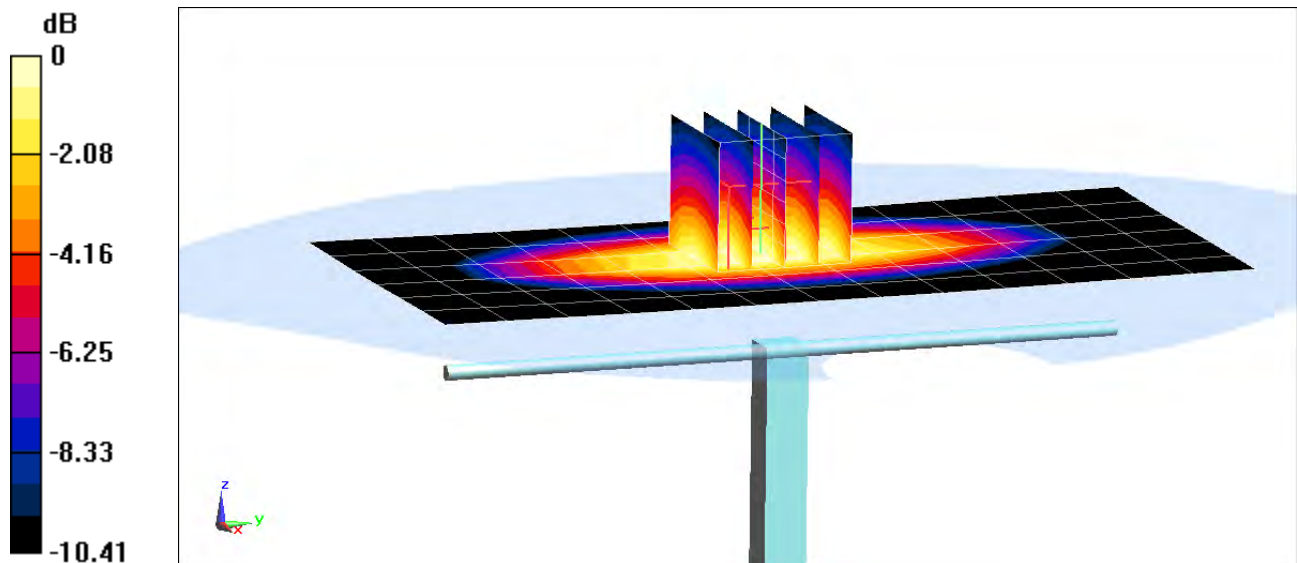

0 dB = 2.27 W/kg = 3.56 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1150

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.392 \text{ S/m}$; $\epsilon_r = 40.63$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-22-2018; Ambient Temp: 21.5°C; Tissue Temp: 20.8°C

Probe: ES3DV3 - SN3213; ConvF(5.45, 5.45, 5.45); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 6.89 W/kg

SAR(1 g) = 3.85 W/kg

Deviation(1 g) = 6.65%

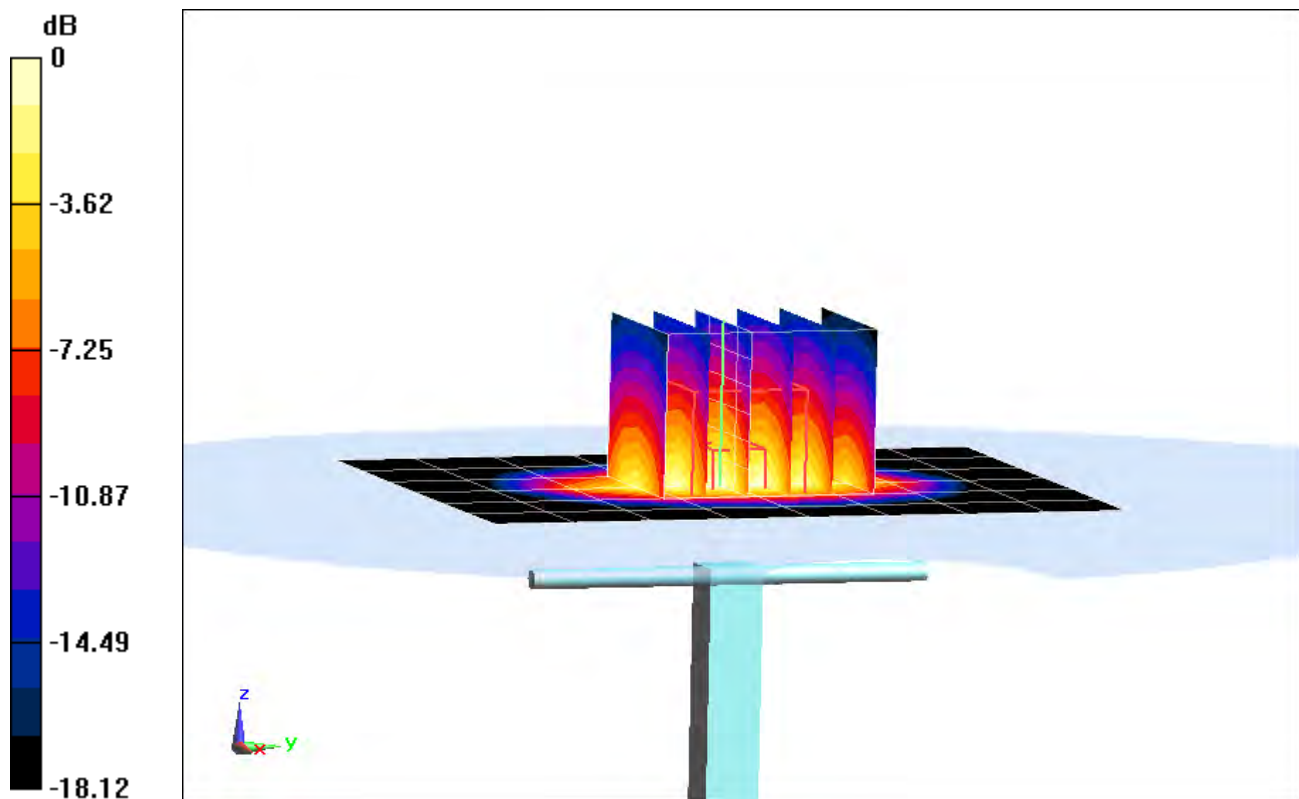

0 dB = 4.81 W/kg = 6.82 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.453 \text{ S/m}$; $\epsilon_r = 38.886$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2018; Ambient Temp: 23.0°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(8.37, 8.37, 8.37); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.04 W/kg

SAR(1 g) = 3.83 W/kg

Deviation(1 g) = -2.54%

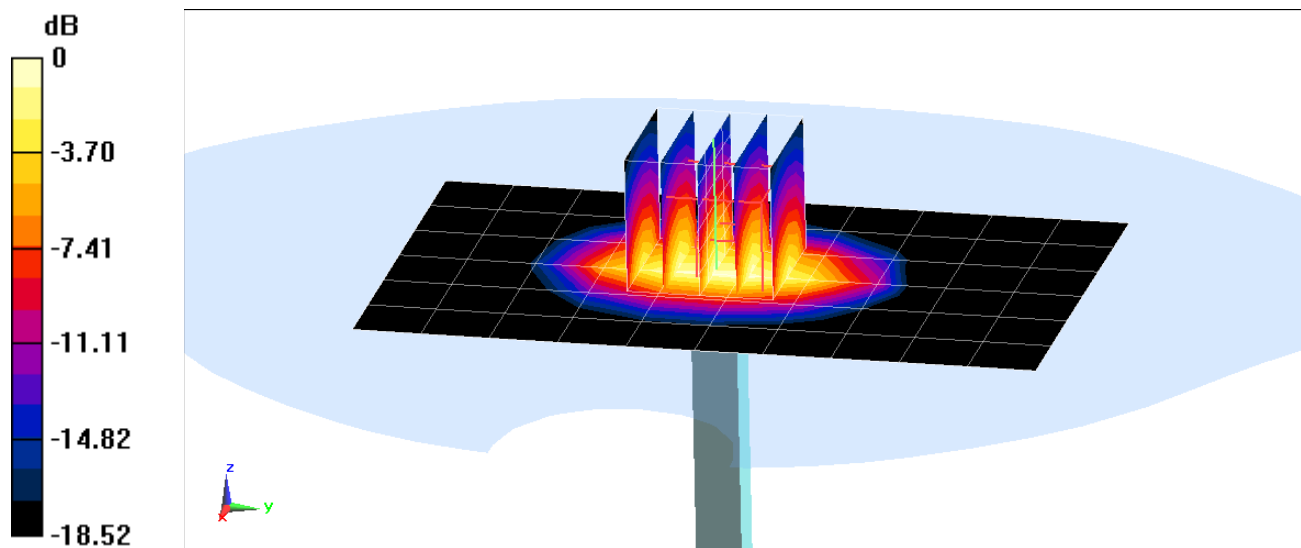

0 dB = 5.97 W/kg = 7.76 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.858 \text{ S/m}$; $\epsilon_r = 40.442$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2018; Ambient Temp: 22.8°C; Tissue Temp: 23.1°C

Probe: ES3DV3 - SN3332; ConvF(4.68, 4.68, 4.68); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 10.0 W/kg

SAR(1 g) = 5 W/kg

Deviation(1 g) = -5.12%

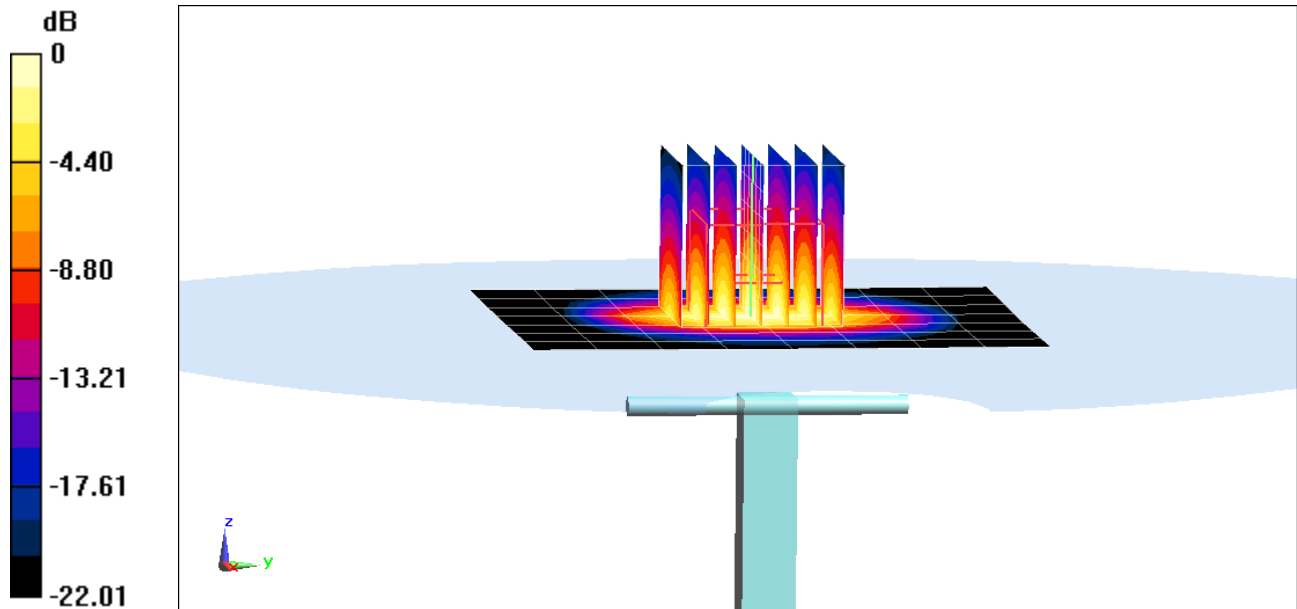

0 dB = 6.60 W/kg = 8.20 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head Medium parameters used (interpolated):

$f = 5250 \text{ MHz}$; $\sigma = 4.519 \text{ S/m}$; $\epsilon_r = 35.733$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2018; Ambient Temp: 22.3°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3589; ConvF(4.69, 4.69, 4.69); Calibrated: 1/16/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

5250 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.5 W/kg

SAR(1 g) = 3.84 W/kg

Deviation(1 g) = -2.66%

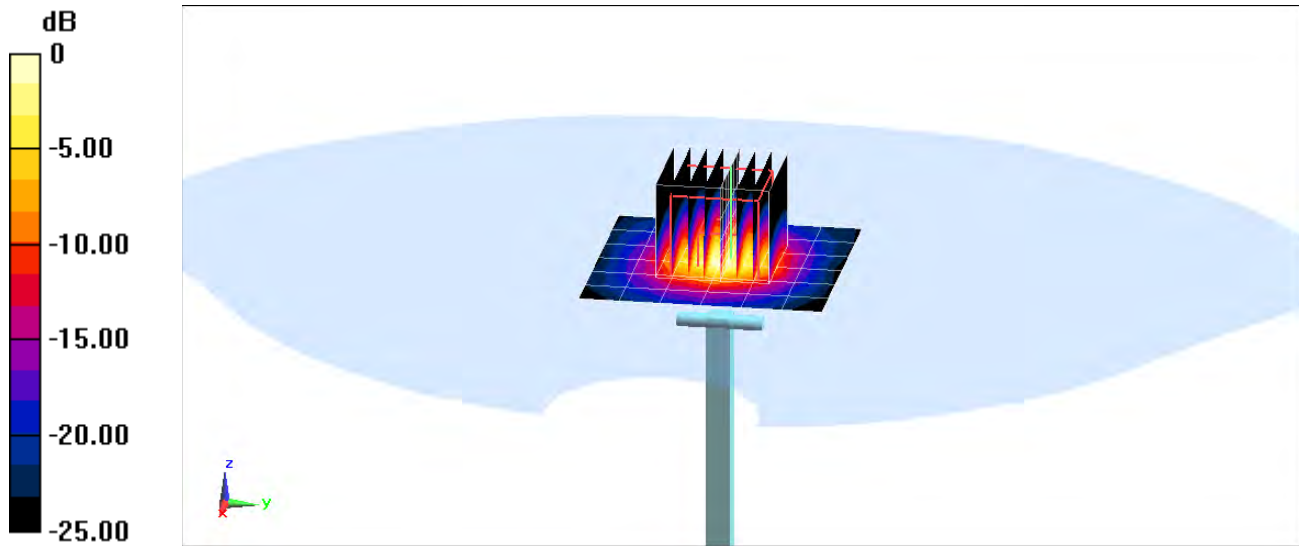

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head Medium parameters used:

$f = 5600 \text{ MHz}$; $\sigma = 4.866 \text{ S/m}$; $\epsilon_r = 35.234$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2018; Ambient Temp: 22.3°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3589; ConvF(4.17, 4.17, 4.17); Calibrated: 1/16/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

5600 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.5 W/kg

SAR(1 g) = 4.05 W/kg

Deviation(1 g) = -3.11%

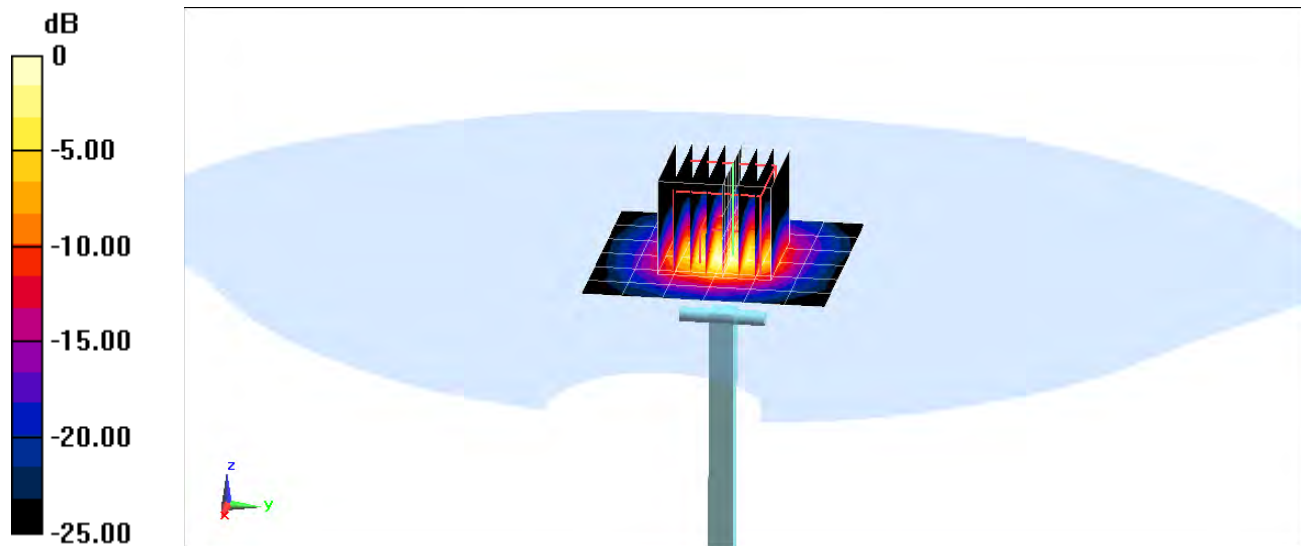

0 dB = 9.83 W/kg = 9.93 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head Medium parameters used (interpolated):

$f = 5750 \text{ MHz}$; $\sigma = 5.019 \text{ S/m}$; $\epsilon_r = 35.053$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2018; Ambient Temp: 22.3°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3589; ConvF(4.42, 4.42, 4.42); Calibrated: 1/16/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

5750 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.5 W/kg

SAR(1 g) = 3.74 W/kg

Deviation(1 g) = -5.44%

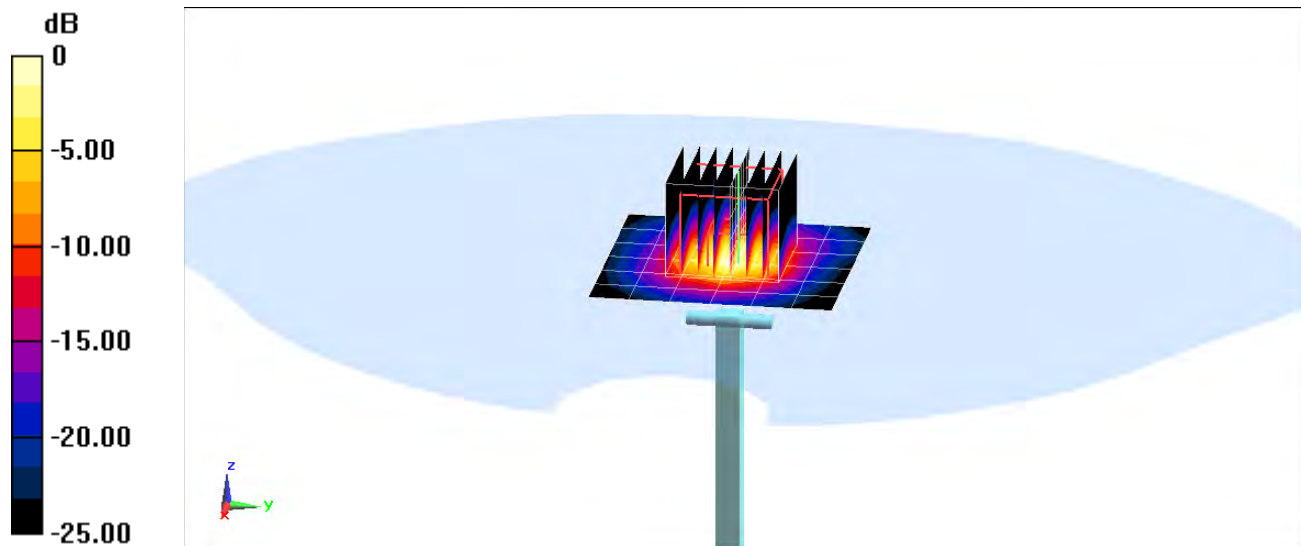

0 dB = 8.98 W/kg = 9.53 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1161

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.977 \text{ S/m}$; $\epsilon_r = 53.125$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-14-2018; Ambient Temp: 22.0°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3213; ConvF(6.3, 6.3, 6.3); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.60 W/kg

SAR(1 g) = 1.75 W/kg

Deviation(1 g) = 3.80%

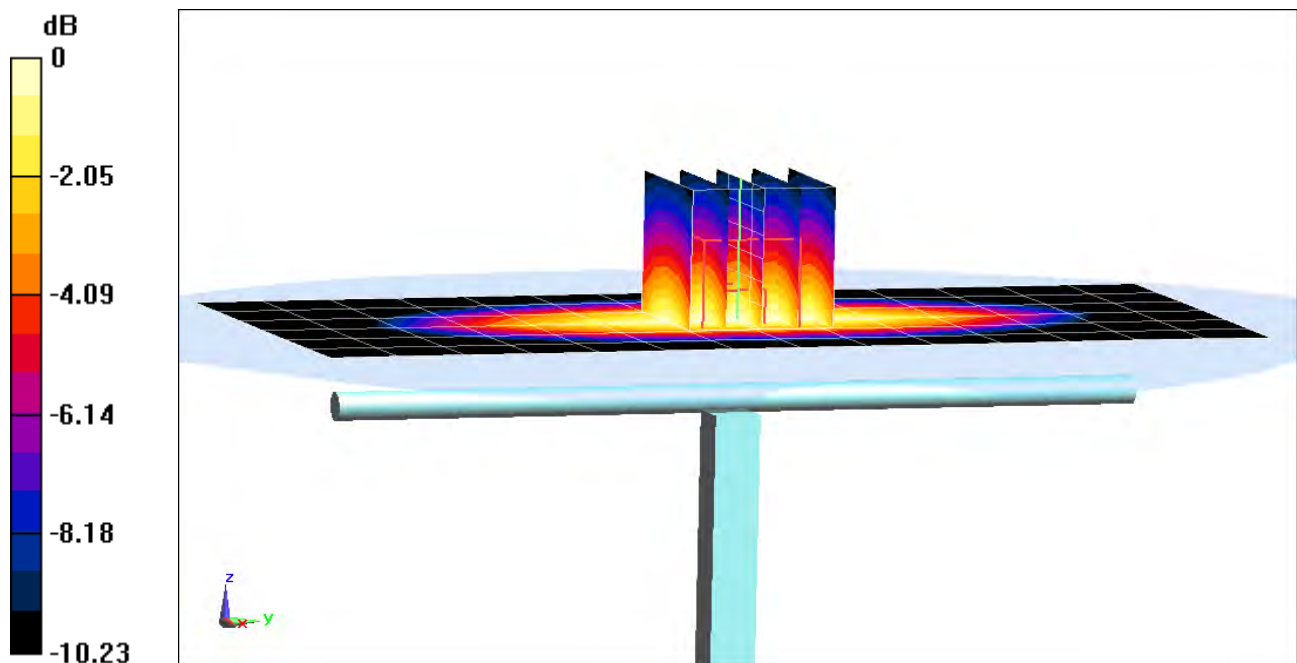

0 dB = 2.04 W/kg = 3.10 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1003

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.958 \text{ S/m}$; $\epsilon_r = 54.108$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-19-2018; Ambient Temp: 22.4°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3287; ConvF(6.71, 6.71, 6.71); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 6/21/2017

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.75 W/kg

SAR(1 g) = 1.84 W/kg

Deviation(1 g) = 7.23%

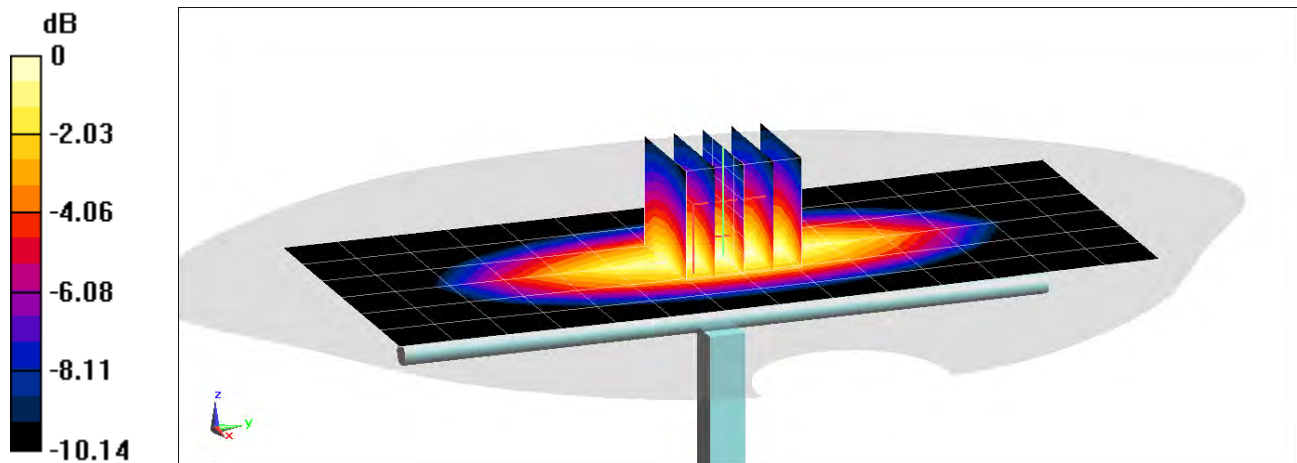

0 dB = 2.15 W/kg = 3.32 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 1.007 \text{ S/m}$; $\epsilon_r = 53.018$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-17-2018; Ambient Temp: 20.0°C; Tissue Temp: 20.6°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.78 W/kg

SAR(1 g) = 1.9 W/kg

Deviation(1 g) = -2.16%

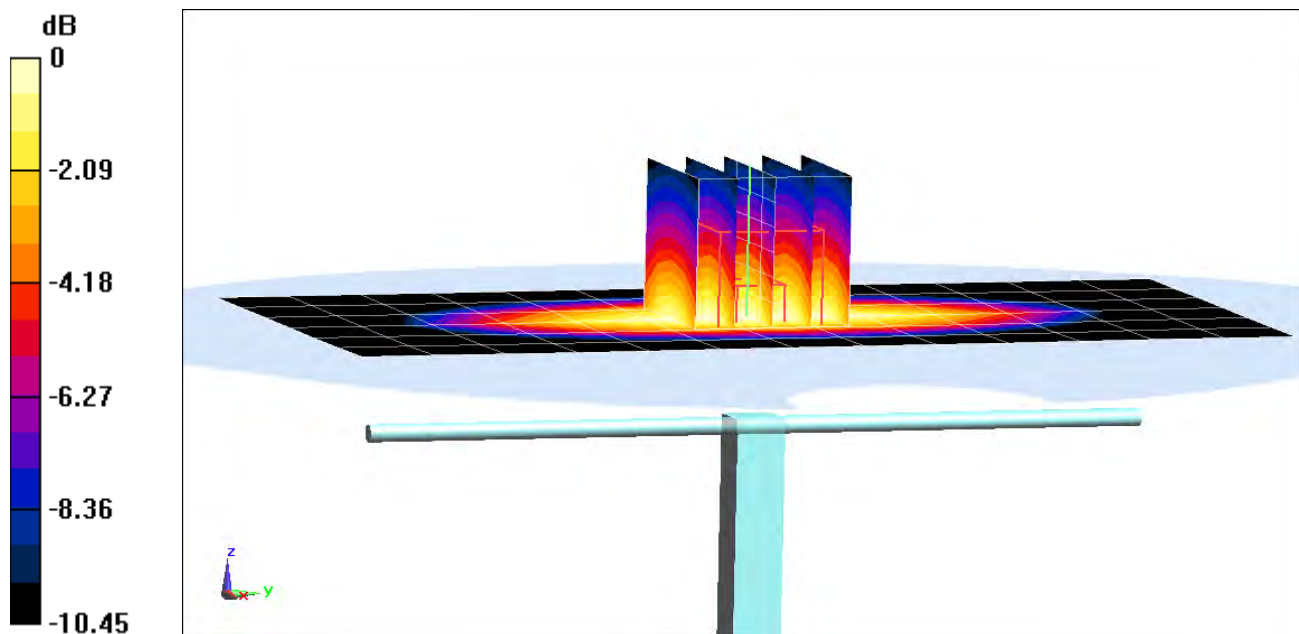

0 dB = 2.22 W/kg = 3.46 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.507 \text{ S/m}$; $\epsilon_r = 51.241$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2018; Ambient Temp: 22.0°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3287; ConvF(5.19, 5.19, 5.19); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 6/21/2017

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1167

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.88 W/kg

SAR(1 g) = 3.91 W/kg; SAR(10 g) = 2.08 W/kg

Deviation(1 g) = 5.68%; Deviation(10 g) = 5.05%

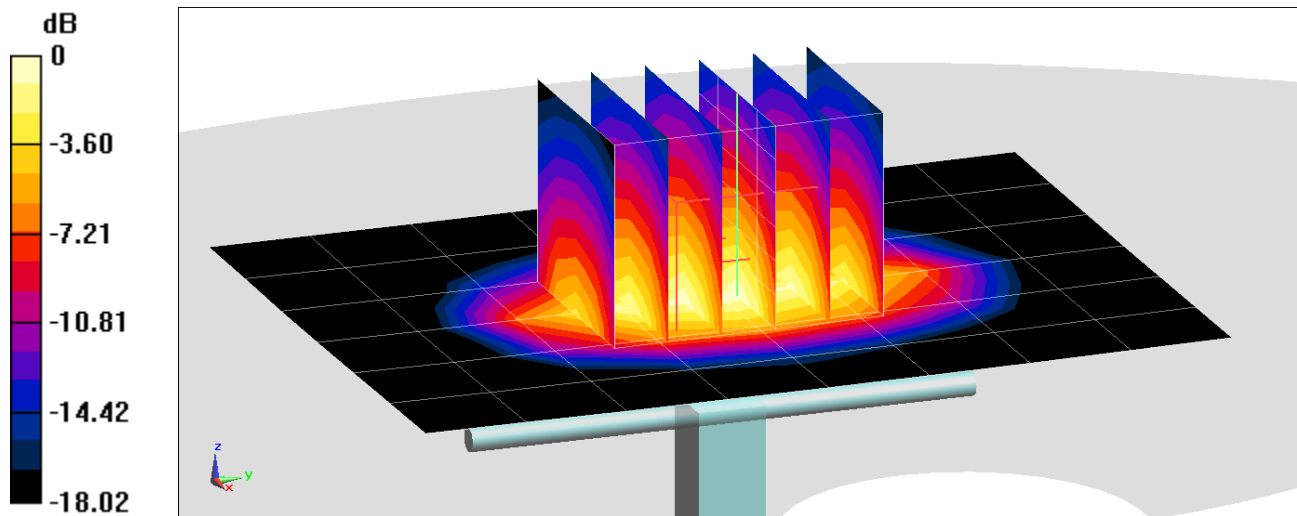

0 dB = 4.90 W/kg = 6.90 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1150

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.508 \text{ S/m}$; $\epsilon_r = 51.469$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-17-2018; Ambient Temp: 21.9°C; Tissue Temp: 20.1°C

Probe: ES3DV3 - SN3287; ConvF(5.19, 5.19, 5.19); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 6/21/2017

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1167

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.77 W/kg

SAR(10 g) = 2.01 W/kg

Deviation(10 g) = 3.08%

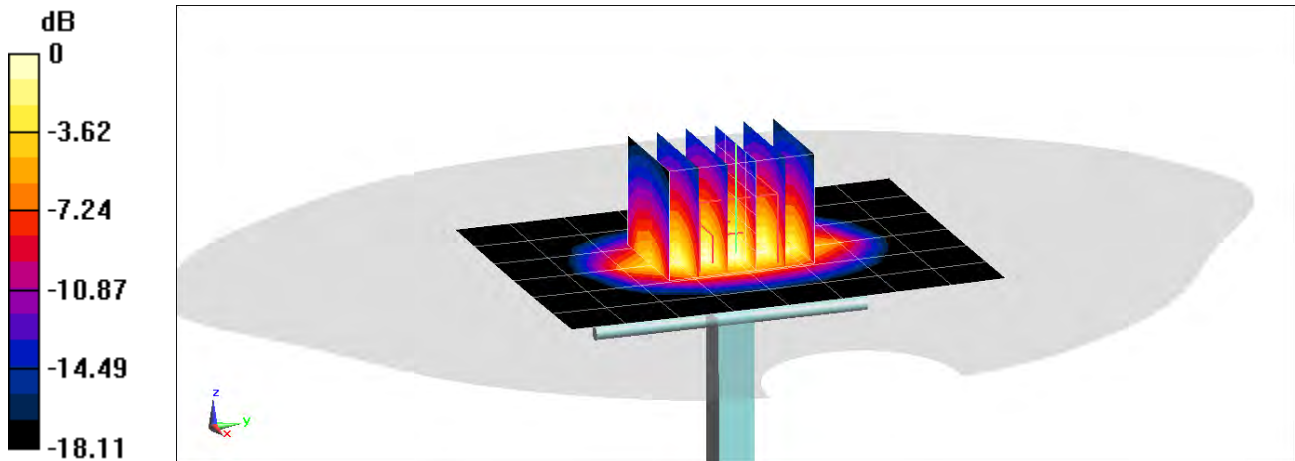

0 dB = 4.78 W/kg = 6.79 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.572 \text{ S/m}$; $\epsilon_r = 54.506$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2018; Ambient Temp: 21.8°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.84 W/kg

SAR(1 g) = 4.26 W/kg; SAR(10 g) = 2.2 W/kg

Deviation(1 g) = 7.58%; Deviation(10 g) = 5.26%

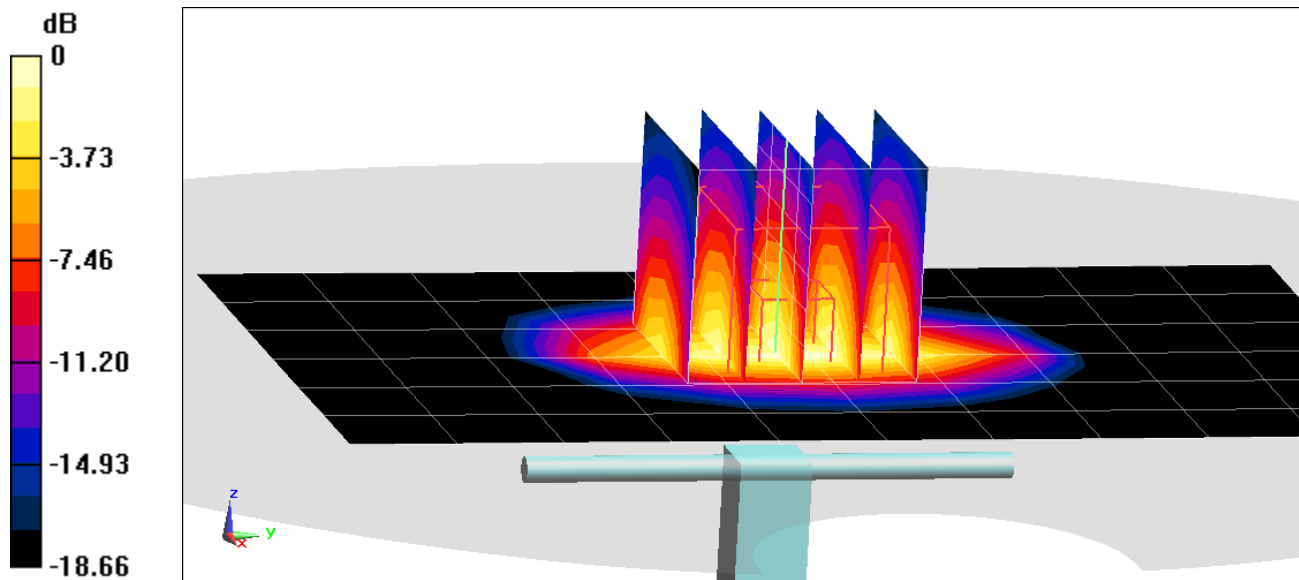

0 dB = 6.54 W/kg = 8.16 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.529 \text{ S/m}$; $\epsilon_r = 53.419$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-30-2018; Ambient Temp: 21.5°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3347; ConvF(4.94, 4.94, 4.94); Calibrated: 3/27/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 11/9/2017

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.33 W/kg

SAR(1 g) = 4.05 W/kg

Deviation(1 g) = 2.27%

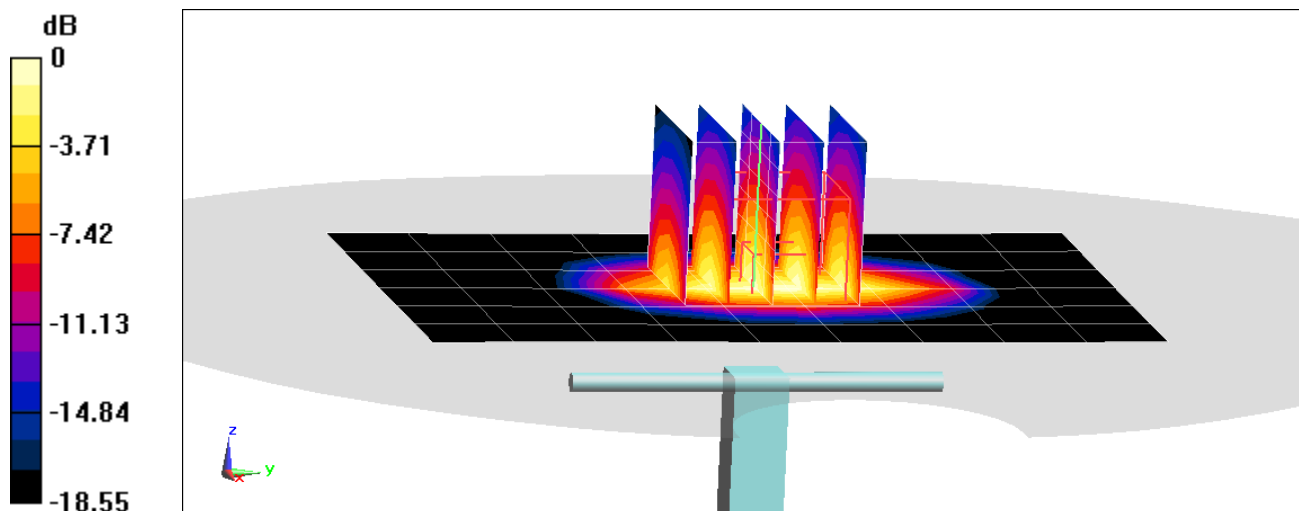

0 dB = 5.04 W/kg = 7.02 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.04 \text{ S/m}$; $\epsilon_r = 51.696$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-23-2018; Ambient Temp: 21.9°C; Tissue Temp: 20.6°C

Probe: ES3DV3 - SN3319; ConvF(4.51, 4.51, 4.51); Calibrated: 3/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: Left Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

2450 MHz System Verification at 20.0 dBm (100 mW)



Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 11.2 W/kg

SAR(1 g) = 5.35 W/kg

Deviation(1 g) = 4.70%

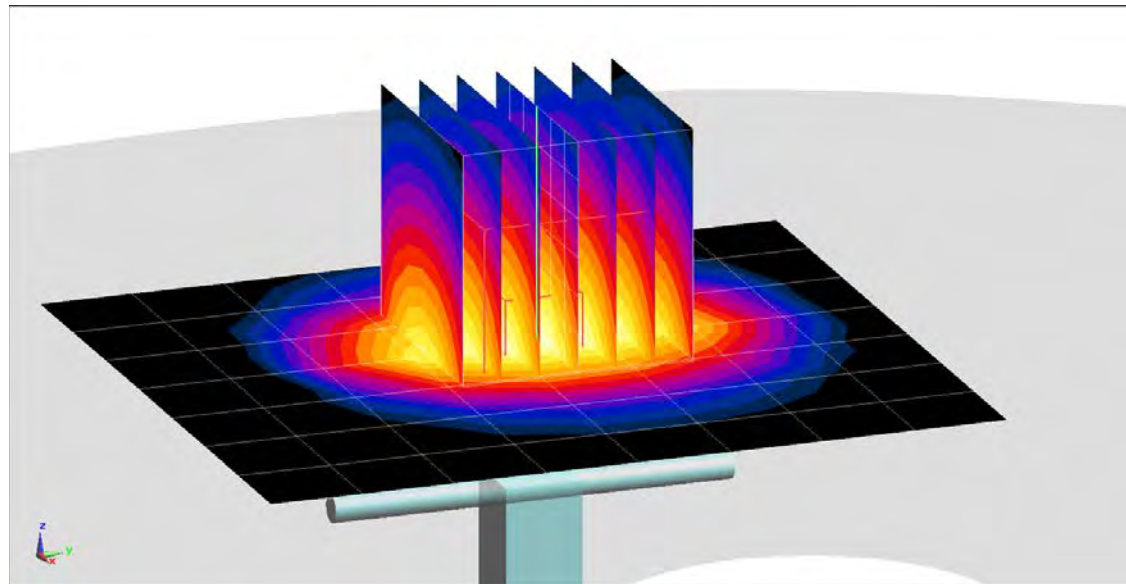

0 dB = 7.13 W/kg = 8.53 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used (interpolated):

$f = 5250 \text{ MHz}$; $\sigma = 5.469 \text{ S/m}$; $\epsilon_r = 48.005$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-19-2018; Ambient Temp: 22.5°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7308; ConvF(4.84, 4.84, 4.84); Calibrated: 8/16/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

5250 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 3.73 W/kg; SAR(10 g) = 1.05 W/kg

Deviation(1 g) = -2.99%; Deviation(10 g) = -2.33%

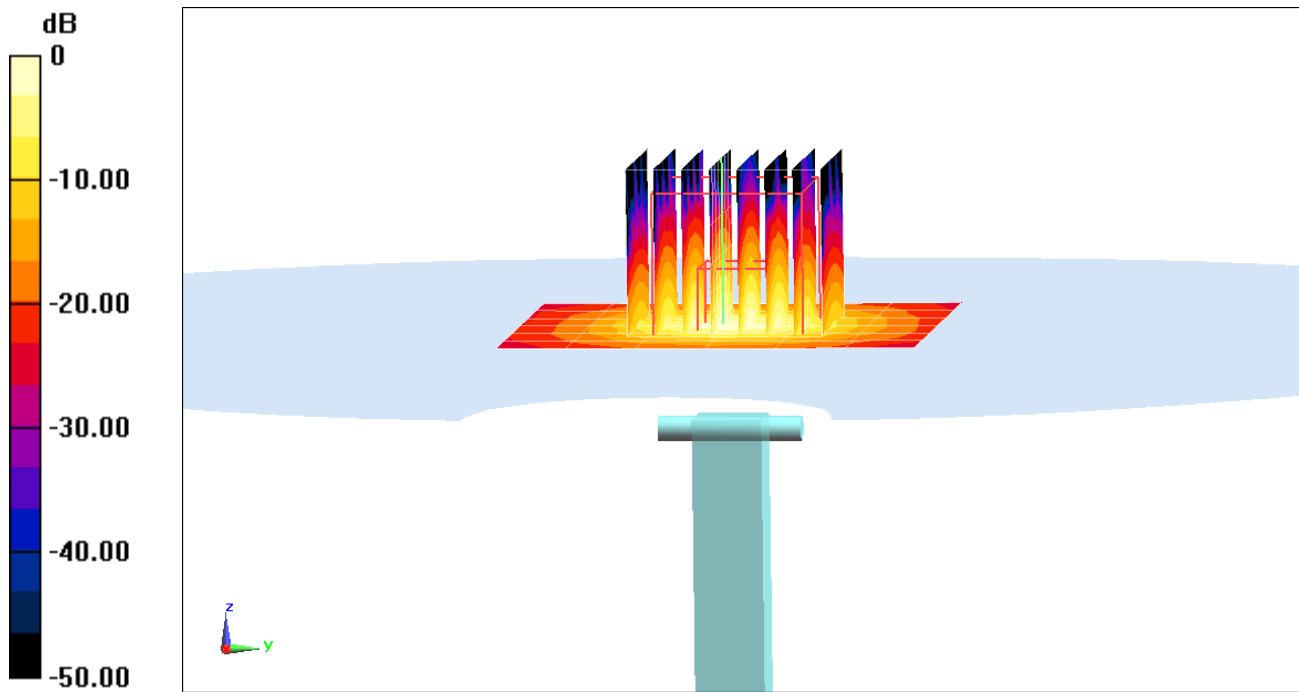

0 dB = 8.89 W/kg = 9.49 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5600 \text{ MHz}$; $\sigma = 5.934 \text{ S/m}$; $\epsilon_r = 47.41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-19-2018; Ambient Temp: 22.5°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7308; ConvF(4.23, 4.23, 4.23); Calibrated: 8/16/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

5600 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Peak SAR (extrapolated) = 18.1 W/kg

SAR(1 g) = 3.78 W/kg; SAR(10 g) = 1.06 W/kg

Deviation(1 g) = -3.69%; Deviation(10 g) = -4.07%

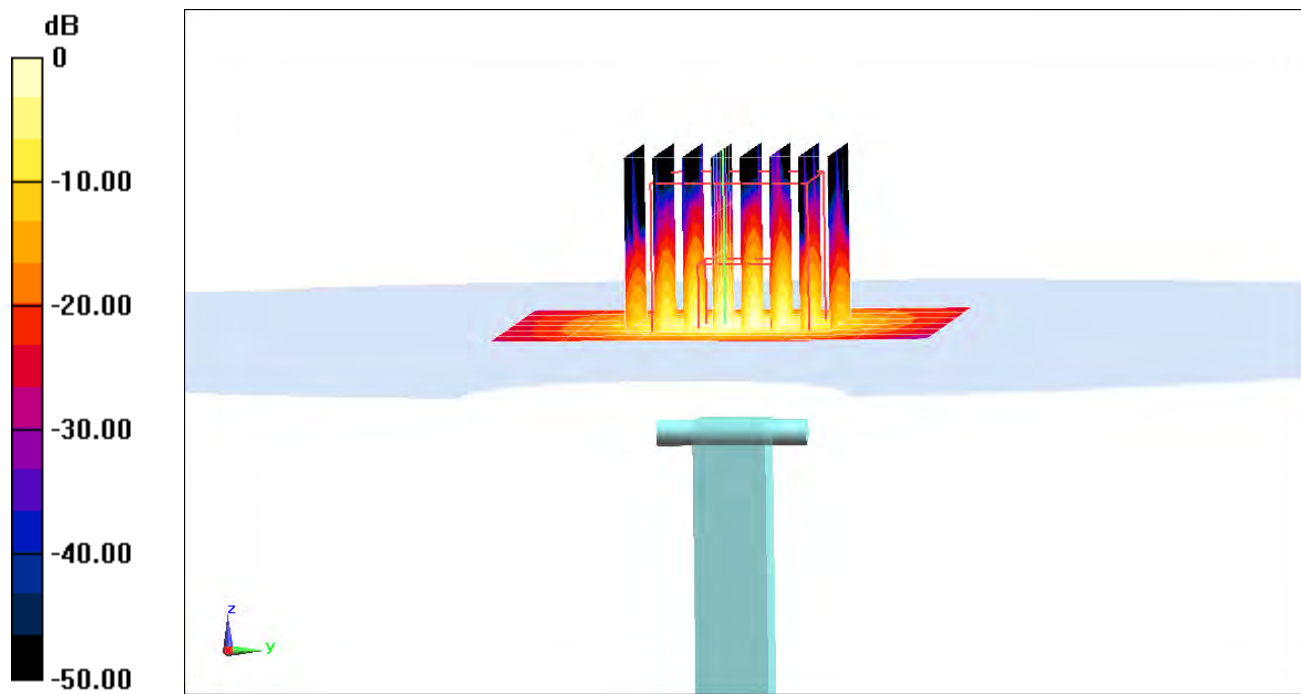

0 dB = 9.46 W/kg = 9.76 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used (interpolated):

$f = 5750 \text{ MHz}$; $\sigma = 6.145 \text{ S/m}$; $\epsilon_r = 47.174$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-19-2018; Ambient Temp: 22.5°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7308; ConvF(4.5, 4.5, 4.5); Calibrated: 8/16/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

5750 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 18.6 W/kg

SAR(1 g) = 3.68 W/kg

Deviation(1 g) = -4.54%

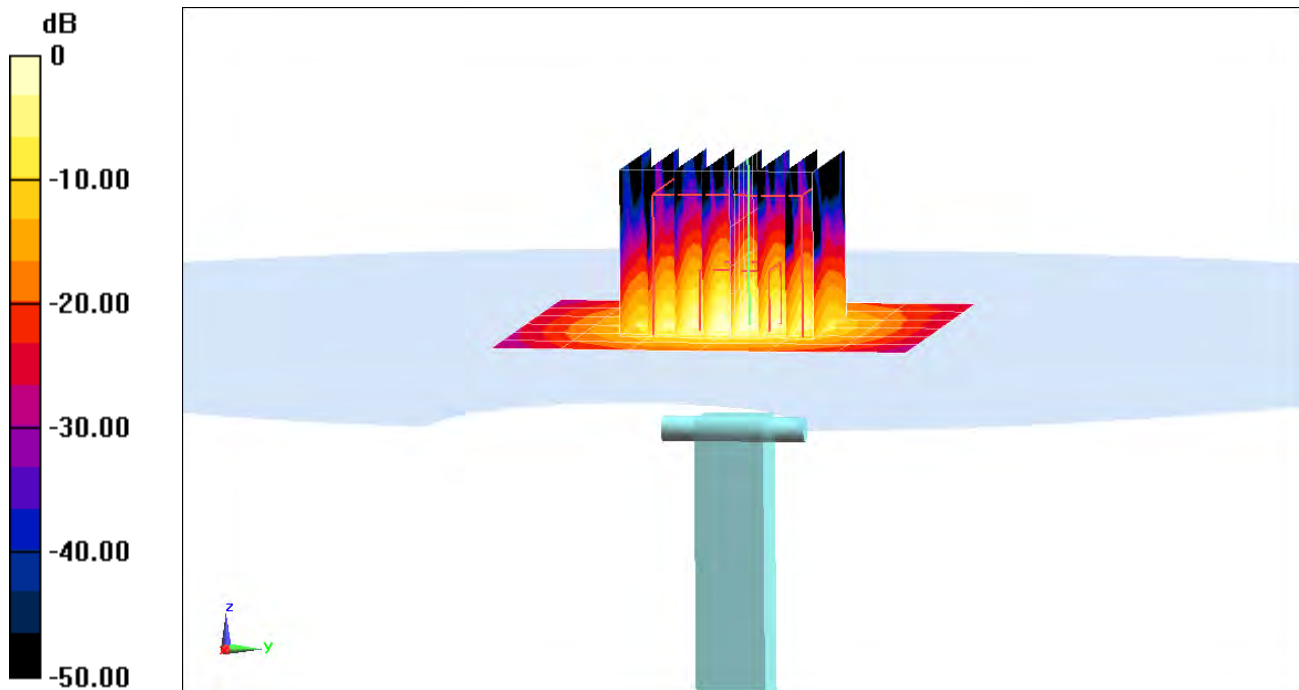

0 dB = 9.34 W/kg = 9.70 dBW/kg

APPENDIX C: PROBE CALIBRATION



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D1750V2-1150_Jul16**

CALIBRATION CERTIFICATE

Object **D1750V2 - SN:1150**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **July 14, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 7349	15-Jun-16 (No. EX3-7349_Jun16)	Jun-17
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (No. 217-02223)	In house check: Oct-16
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Jun-15)	In house check: Oct-16
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by: **Name** Jeton Kastrati **Function** Laboratory Technician

Approved by: **Name** Katja Pokovic **Technical Manager**

Signature

Issued: July 14, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	38.8 $\pm$ 6 %	1.36 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.06 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	36.1 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.80 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.2 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.4	1.49 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	53.4 $\pm$ 6 %	1.48 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.09 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	36.5 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	4.85 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	19.5 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$50.9 \Omega + 0.4 j\Omega$
Return Loss	- 40.2 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$46.4 \Omega - 0.5 j\Omega$
Return Loss	- 28.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.218 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	April 10, 2015

DASY5 Validation Report for Head TSL

Date: 14.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1150

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.46, 8.46, 8.46); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.4 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 9.06 W/kg; SAR(10 g) = 4.8 W/kg

Maximum value of SAR (measured) = 13.9 W/kg

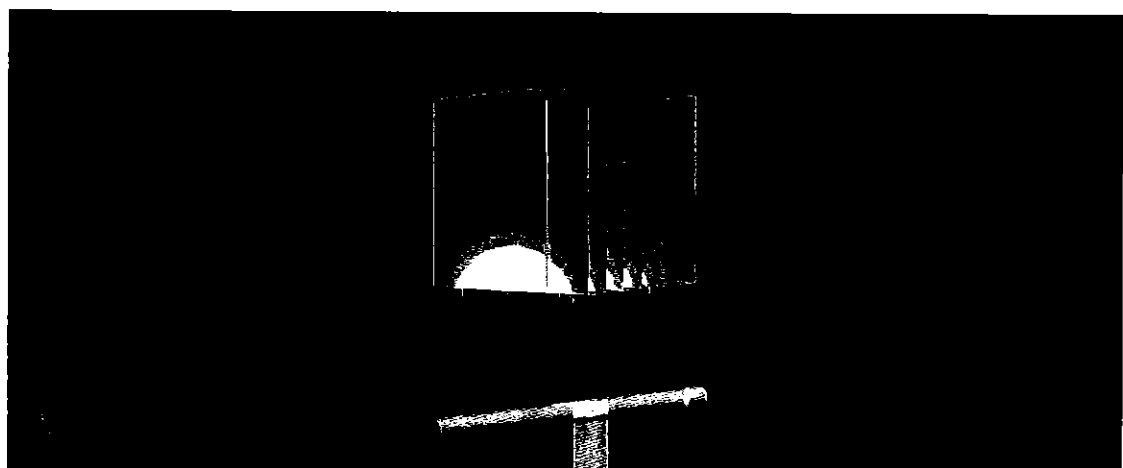


0 dB = 13.9 W/kg = 11.43 dBW/kg

Impedance Measurement Plot for Head TSL


14 Jul 2016 13:09:21
[CH1] S11 1 U FS 2: 50.889 Ω 0.4121 Ω 37.479 pF 1 750.000 000 MHz

*
De1
CA
Avg
16
H1d

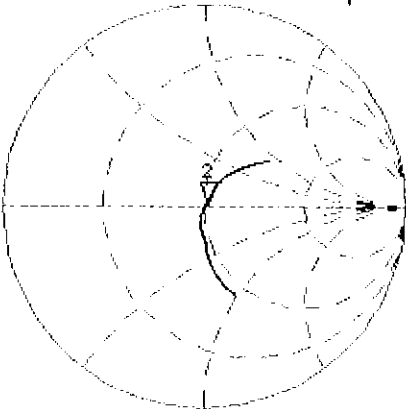

CH2 S11 LOG 5 dB/REF -20 dB 2:-40.230 dB 1 750.000 000 MHz

CA
Avg
16
H1d

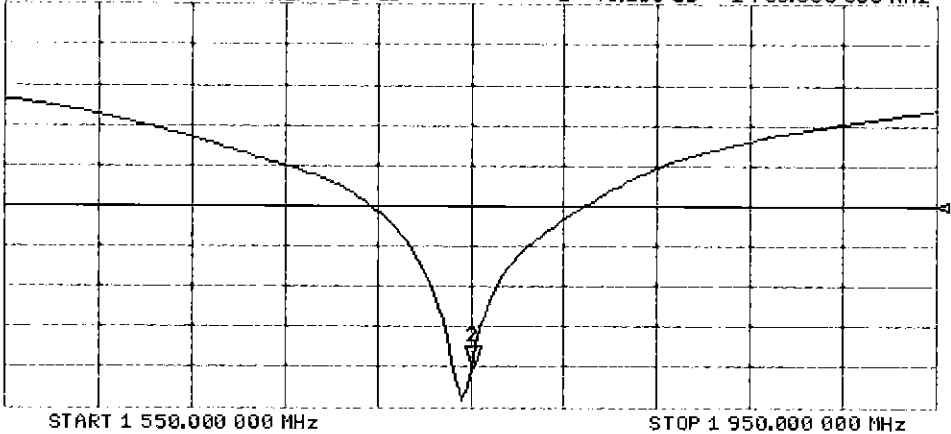

DASY5 Validation Report for Body TSL

Date: 14.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1150

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.48$ S/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.25, 8.25, 8.25); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 100.4 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 16.0 W/kg

SAR(1 g) = 9.09 W/kg; SAR(10 g) = 4.85 W/kg

Maximum value of SAR (measured) = 13.7 W/kg

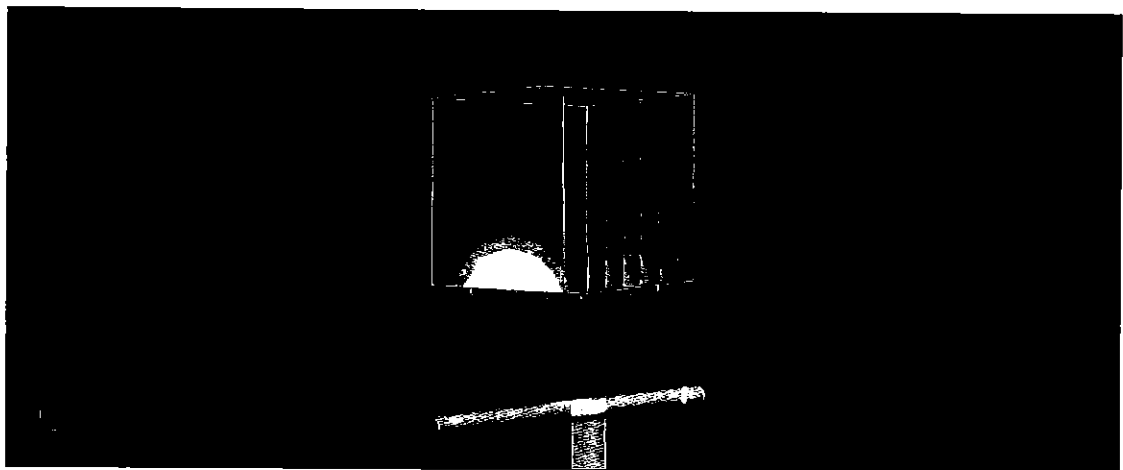


0 dB = 13.7 W/kg = 11.37 dBW/kg

Impedance Measurement Plot for Body TSL


14 Jul 2016 13:08:43
 CH1 S11 1 U FS 2: 46.404 Ω -466.80 m Ω 194.83 pF 1 750.000 000 MHz

*
 De l
 CA
 Avg
 16
 H1 d

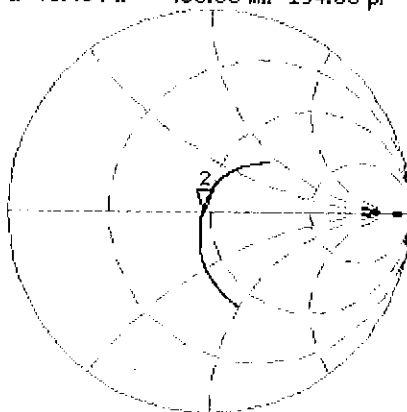

CH2 S11 LOG 5 dB/REF -20 dB 2:-28.487 dB 1 750.000 000 MHz

CA
 Avg
 16
 H1 d

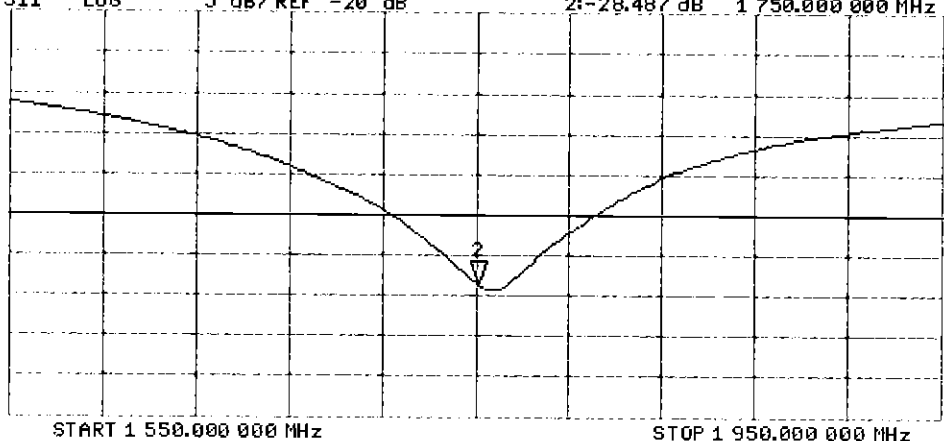

Certification of Calibration

Object D1750V2 – SN: 1150

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.

Calibration date: July 07, 2017

Description: SAR Validation Dipole at 1750 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Control Company	4040	Therm./Clock/Humidity Monitor	3/31/2017	Biennial	3/31/2019	170232394
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330156
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433971
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/1/2017	Annual	6/1/2018	MY53401181
Agilent	8753ES	S-Parameter Network Analyzer	10/26/2016	Annual	10/26/2017	US39170118
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/8/2017	Annual	3/8/2018	1368
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/13/2017	Annual	3/13/2018	1415
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/10/2017	Annual	5/10/2018	1070
SPEAG	ES3DV3	SAR Probe	3/14/2017	Annual	3/14/2018	3209
SPEAG	ES3DV3	SAR Probe	3/14/2017	Annual	3/14/2018	3319
Anritsu	MA2411B	Pulse Power Sensor	2/10/2017	Annual	2/10/2018	1207364
Anritsu	MA2411B	Pulse Power Sensor	2/10/2017	Annual	2/10/2018	1339018
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	941001
Agilent	N5182A	MXG Vector Signal Generator	2/28/2017	Annual	2/28/2018	MY47420800
Seekonk	NC-100	Torque Wrench	11/6/2015	Biennial	11/6/2017	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Brodie Halfoster	Test Engineer	<i>BRODIE HALFOSTER</i>
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	<i>KOK</i>

DIPOLE CALIBRATION EXTENSION



Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.


The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 20.0 dBm	Measured Head SAR (1g) W/kg @ 20.0 dBm	Deviation 1g (%)	Certificate SAR Target Head (10g) W/kg @ 20.0 dBm	Measured Head SAR (10g) W/kg @ 20.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
7/14/2016	7/7/2017	1.218	3.61	3.57	-1.11%	1.92	1.88	-2.08%	50.9	48.9	1	0.4	-1.5	2.1	-40.2	-33.4	16.90%	PASS
Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 20.0 dBm	Measured Body SAR (1g) W/kg @ 20.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 20.0 dBm	Measured Body SAR (10g) W/kg @ 20.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
7/14/2016	7/7/2017	1.218	3.65	3.68	0.82%	1.95	1.97	1.03%	46.4	45.5	0.9	-0.5	0.7	1.2	-28.5	-23.6	17.20%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

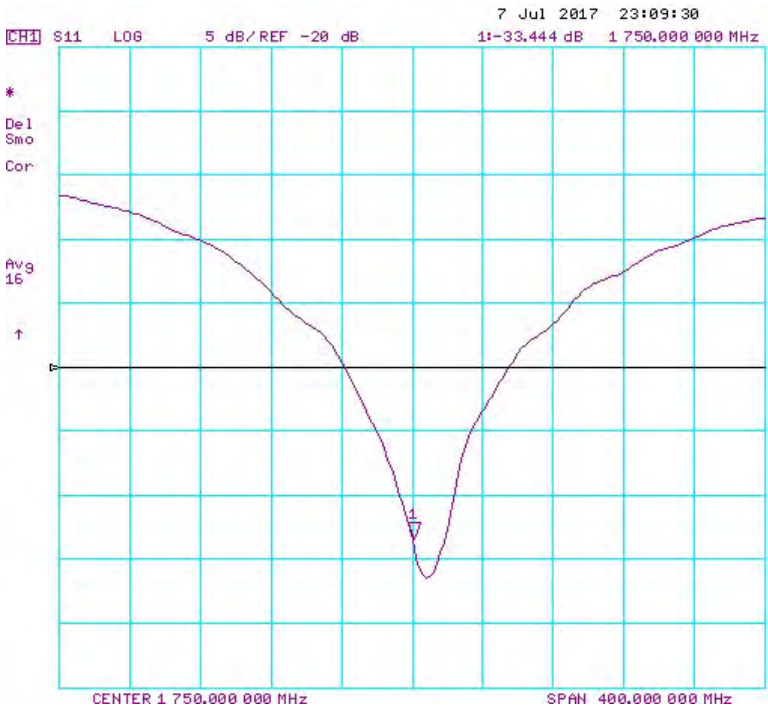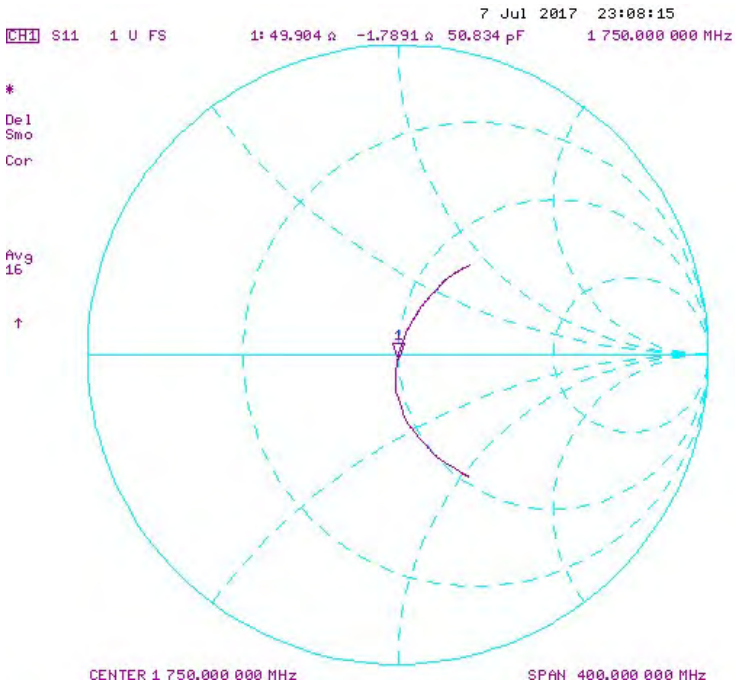

Impedance & Return-Loss Measurement Plot for Body TSL

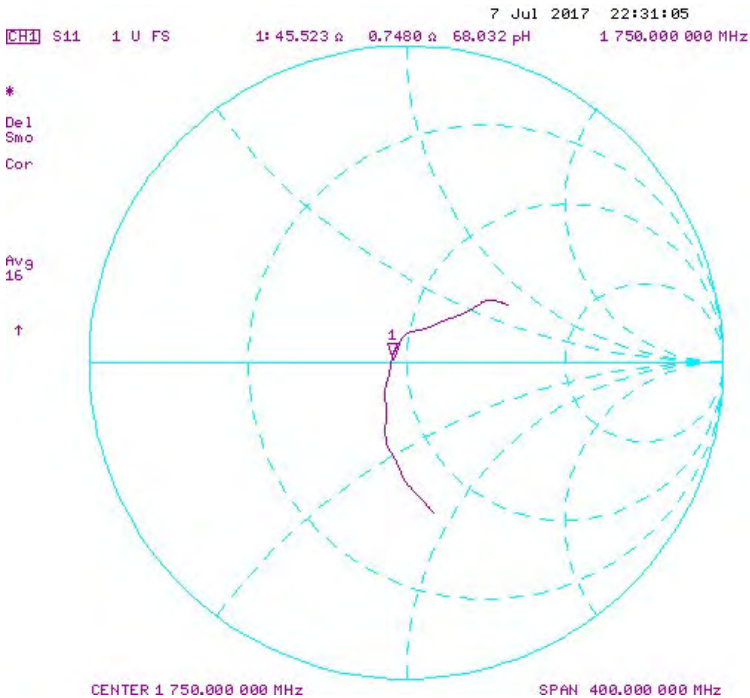



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **D1750V2-1148_May17**

CALIBRATION CERTIFICATE

Object **D1750V2 - SN:1148**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **May 09, 2017**

BN ✓
05-23-2017

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-Dec-16 (No. EX3-7349_Dec16)	Dec-17
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Claudio Leubler** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Technical Manager

Signature

Issued: May 11, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.0 $\pm$ 6 %	1.36 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.11 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	36.4 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.83 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.3 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.4	1.49 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	53.7 $\pm$ 6 %	1.47 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.17 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	37.0 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	4.93 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	19.8 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.8 Ω - 0.7 j Ω
Return Loss	- 42.9 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	45.7 Ω - 0.5 j Ω
Return Loss	- 26.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.223 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 30, 2014

DASY5 Validation Report for Head TSL

Date: 09.05.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1148

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.46, 8.46, 8.46); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.10.0(1442); SEMCAD X 14.6.10(7413)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 105.4 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 16.5 W/kg

SAR(1 g) = 9.11 W/kg; SAR(10 g) = 4.83 W/kg

Maximum value of SAR (measured) = 13.9 W/kg

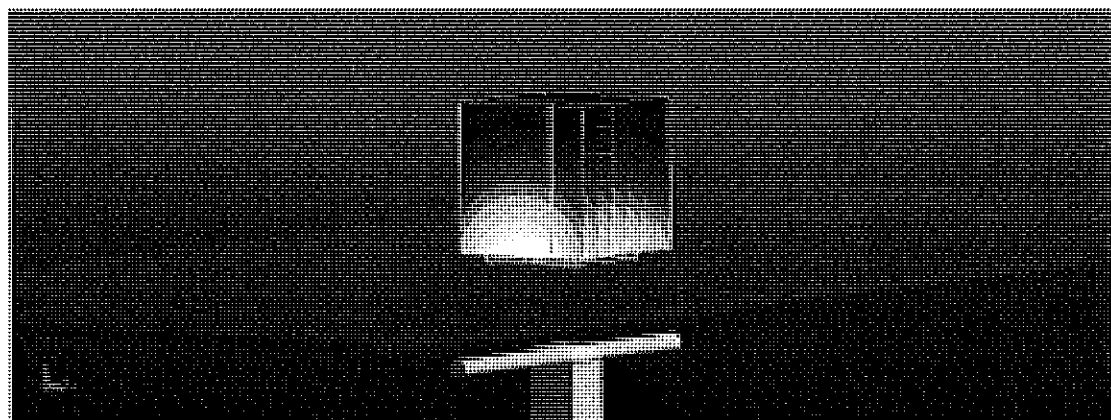

0 dB = 13.9 W/kg = 11.43 dBW/kg

Impedance Measurement Plot for Head TSL


9 May 2017 14:43:11
[CH1] S11 1 U FS 1: 49.777 Ω -683.59 m Ω 133.04 pF 1 750.000 000 MHz

*
De1

CA

AVG
16

H1d

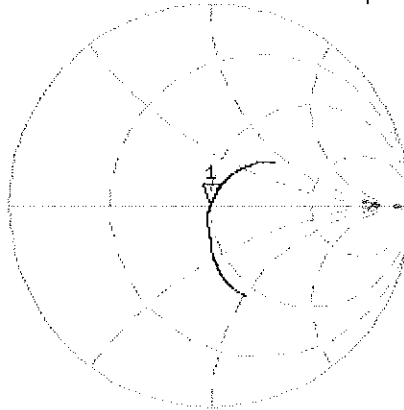


CH2 S11 LOG 5 dB/REF -20 dB 1: -42.893 dB 1 750.000 000 MHz

CA

AVG
16

H1d

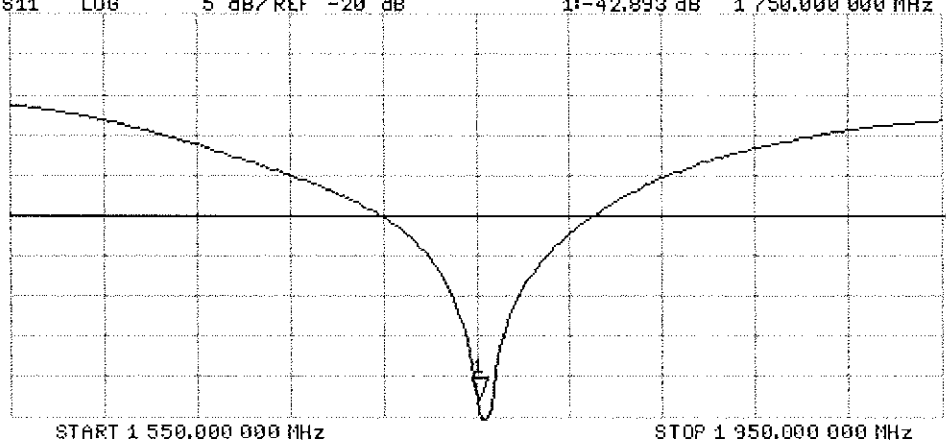

DASY5 Validation Report for Body TSL

Date: 09.05.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1148

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.47$ S/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.25, 8.25, 8.25); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1442); SEMCAD X 14.6.10(7413)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.49 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 15.9 W/kg

SAR(1 g) = 9.17 W/kg; SAR(10 g) = 4.93 W/kg

Maximum value of SAR (measured) = 13.1 W/kg


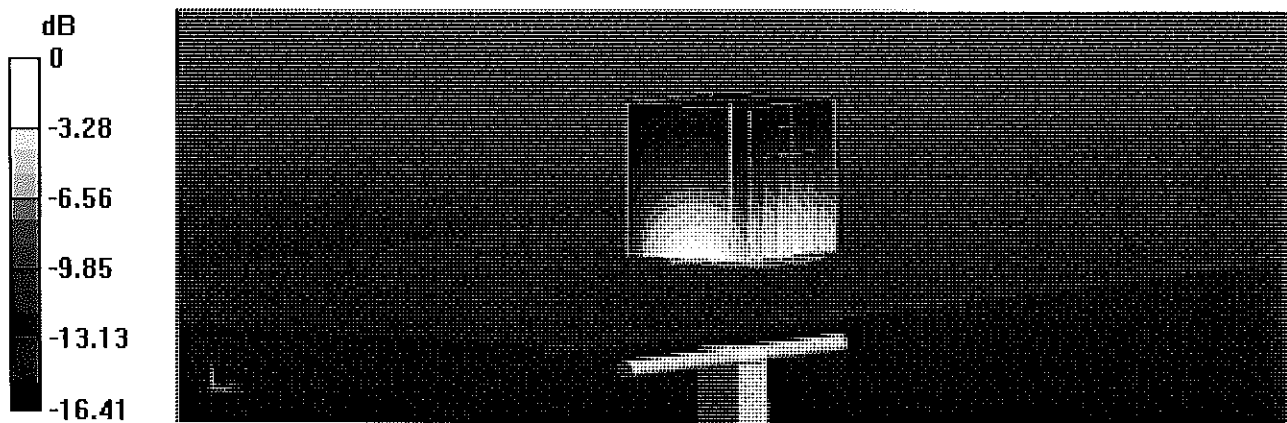


0 dB = 13.1 W/kg = 11.17 dBW/kg

Impedance Measurement Plot for Body TSL

9 May 2017 14:42:25
[CH1] S11 1 U FS 1: 45.707 Ω -513.67 $m\Omega$ 177.05 pF 1 750.000 000 MHz

*
De1
CA
Avg
16
H1d

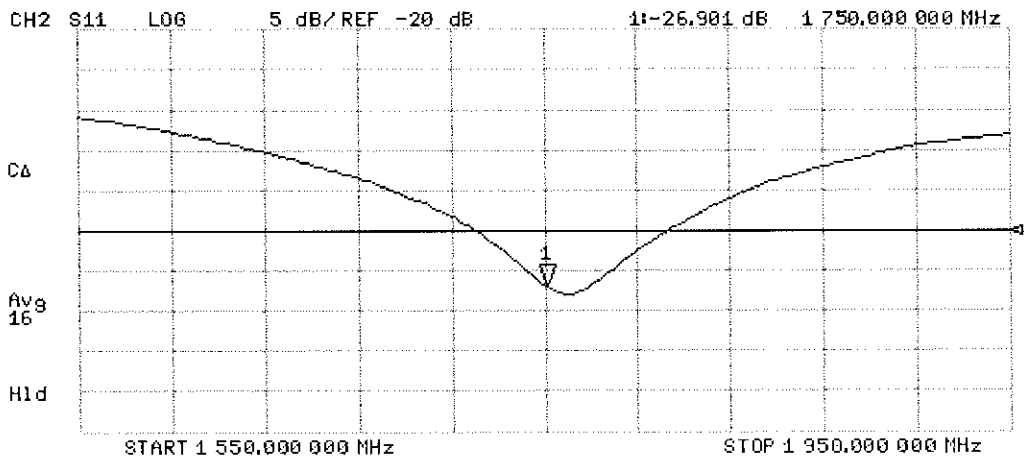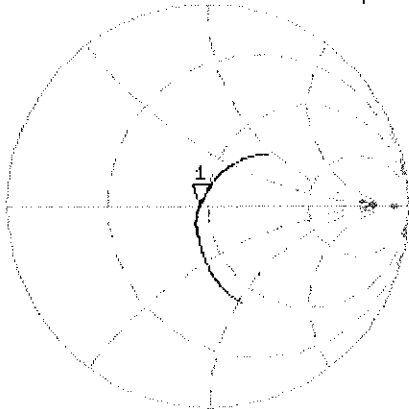



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D1900V2-5d080_Jul16**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN:5d080**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **July 08, 2016**

BN ✓
 7/16/2016
 Extended
 7/20/17
 SC ✓

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 7349	15-Jun-16 (No. EX3-7349_Jun16)	Jun-17
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (No. 217-02223)	In house check: Oct-16
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Jun-15)	In house check: Oct-16
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by: **Jeton Kastrati** Name: **Jeton Kastrati** Function: **Laboratory Technician** Signature:

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Function: **Technical Manager** Signature:

Issued: July 13, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.8 $\pm$ 6 %	1.38 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.76 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	39.3 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.10 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	20.5 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	52.7 $\pm$ 6 %	1.51 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.75 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	39.1 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.17 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.7 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$52.1 \Omega + 5.3 j\Omega$
Return Loss	- 25.1 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$47.4 \Omega + 6.8 j\Omega$
Return Loss	- 22.6 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.192 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	June 28, 2006

DASY5 Validation Report for Head TSL

Date: 08.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d080

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.99, 7.99, 7.99); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 106.6 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 18.4 W/kg

SAR(1 g) = 9.76 W/kg; SAR(10 g) = 5.1 W/kg

Maximum value of SAR (measured) = 15.0 W/kg

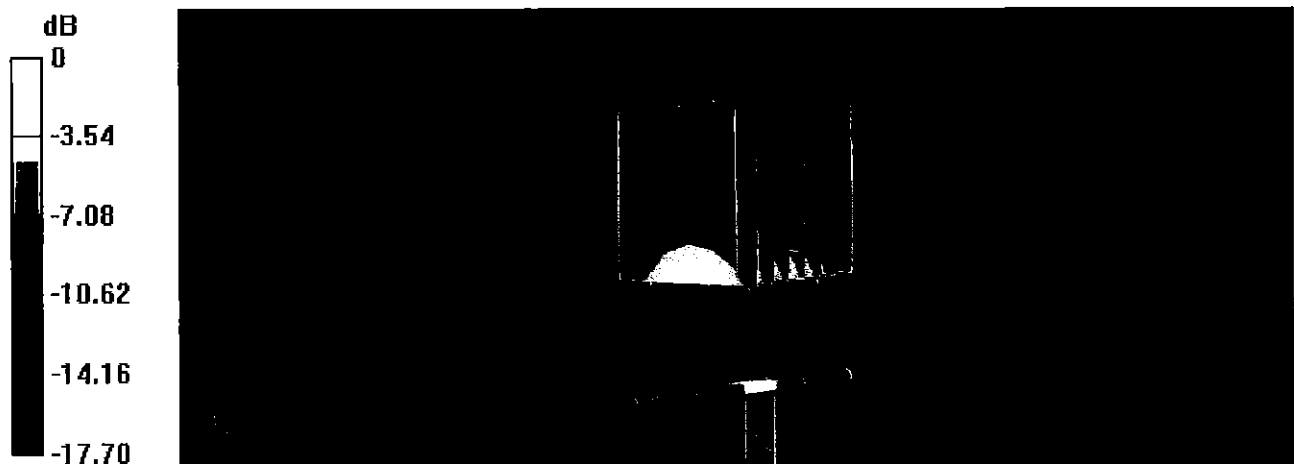


0 dB = 15.0 W/kg = 11.76 dBW/kg

Impedance Measurement Plot for Head TSL

8 Jul 2016 16:18:04
 CH1 S11 1 U FS 1: 52.143 Ω 5.2500 Ω 439.78 μH 1 900.000 000 MHz

*
 Del
 Cor

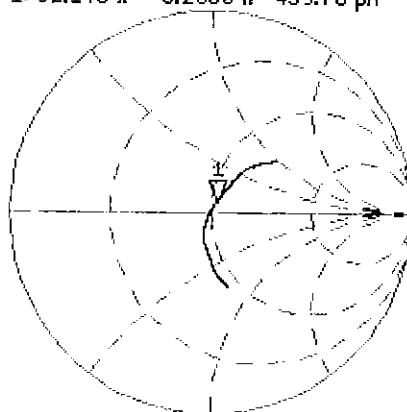

Avg
 16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-25.118 dB 1 900.000 000 MHz

Cor

Avg
 16

H1d

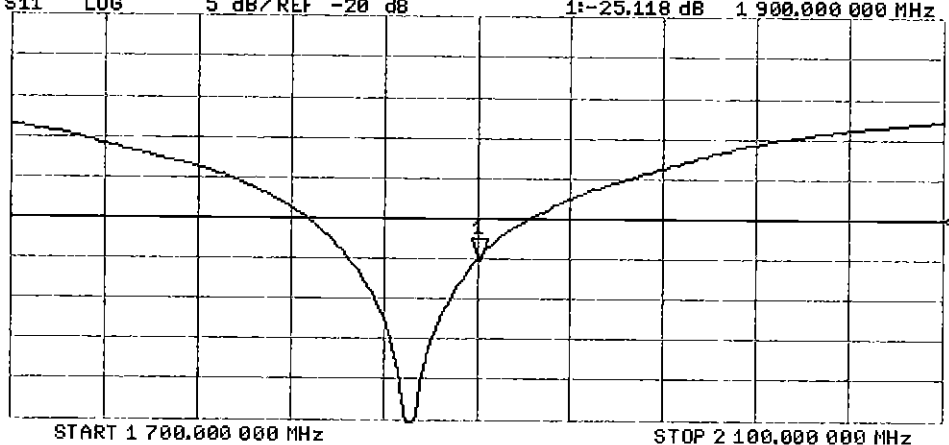

DASY5 Validation Report for Body TSL

Date: 08.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d080

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.03, 8.03, 8.03); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.1 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 17.1 W/kg

SAR(1 g) = 9.75 W/kg; SAR(10 g) = 5.17 W/kg

Maximum value of SAR (measured) = 14.7 W/kg




0 dB = 14.7 W/kg = 11.67 dBW/kg

Impedance Measurement Plot for Body TSL

8 Jul 2016 16:16:56
 CH1 S11 1 U FS 1: 47.412 Ω 6.7422 Ω 564.78 μH 1 900.000 000 MHz

*
 Del
 Cor

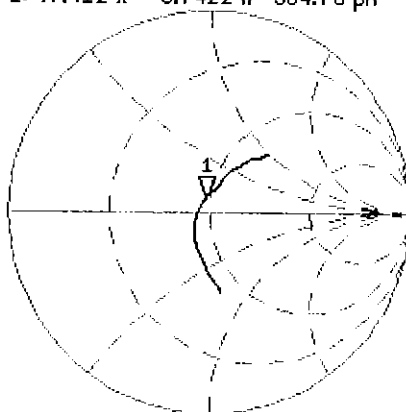

Avg
 16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-22.620 dB 1 900.000 000 MHz

Cor

Avg
 16

H1d

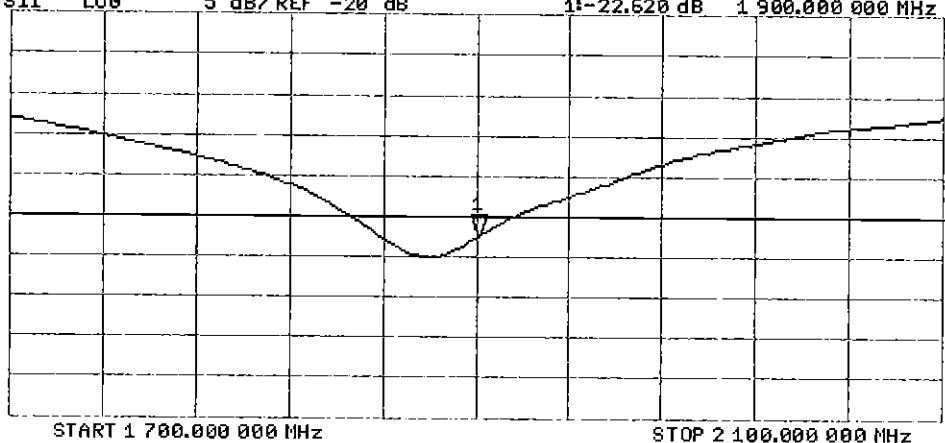

Certification of Calibration

Object D1900V2 – SN: 5d080

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.

Calibration date: July 06, 2017

Description: SAR Validation Dipole at 1900 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Control Company	4040	Therm./Clock/Humidity Monitor	3/31/2017	Biennial	3/31/2019	170232394
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330156
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433971
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/1/2017	Annual	6/1/2018	MY53401181
Agilent	8753ES	S-Parameter Network Analyzer	10/26/2016	Annual	10/26/2017	US39170118
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/13/2017	Annual	3/13/2018	1415
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/10/2017	Annual	5/10/2018	1070
SPEAG	ES3DV3	SAR Probe	3/14/2017	Annual	3/14/2018	3209
Anritsu	MA2411B	Pulse Power Sensor	2/10/2017	Annual	2/10/2018	1207364
Anritsu	MA2411B	Pulse Power Sensor	2/10/2017	Annual	2/10/2018	1339018
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	941001
Agilent	N5182A	MXG Vector Signal Generator	2/28/2017	Annual	2/28/2018	MY47420800
Seekonk	NC-100	Torque Wrench	11/6/2015	Biennial	11/6/2017	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Brodie Halfoster	Test Engineer	<i>BRODIE HALFOSTER</i>
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	<i>KOK</i>

DIPOLE CALIBRATION EXTENSION


Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.



The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 20.0 dBm	Measured Head SAR (1g) W/kg @ 20.0 dBm	Deviation 1g (%)	Certificate SAR Target Head (10g) W/kg @ 20.0 dBm	Measured Head SAR (10g) W/kg @ 20.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
7/8/2016	7/6/2017	1.192	3.93	3.86	-1.78%	2.05	2	-2.44%	52.1	52.9	0.8	5.3	4.7	0.6	-25.1	-25.6	-2.00%	PASS
Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 20.0 dBm	Measured Body SAR (1g) W/kg @ 20.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 20.0 dBm	Measured Body SAR (10g) W/kg @ 20.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
7/8/2016	7/6/2017	1.192	3.91	4.05	3.58%	2.07	2.11	1.93%	47.4	48.5	1.1	6.8	5.1	1.7	-22.6	-25.5	-12.80%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

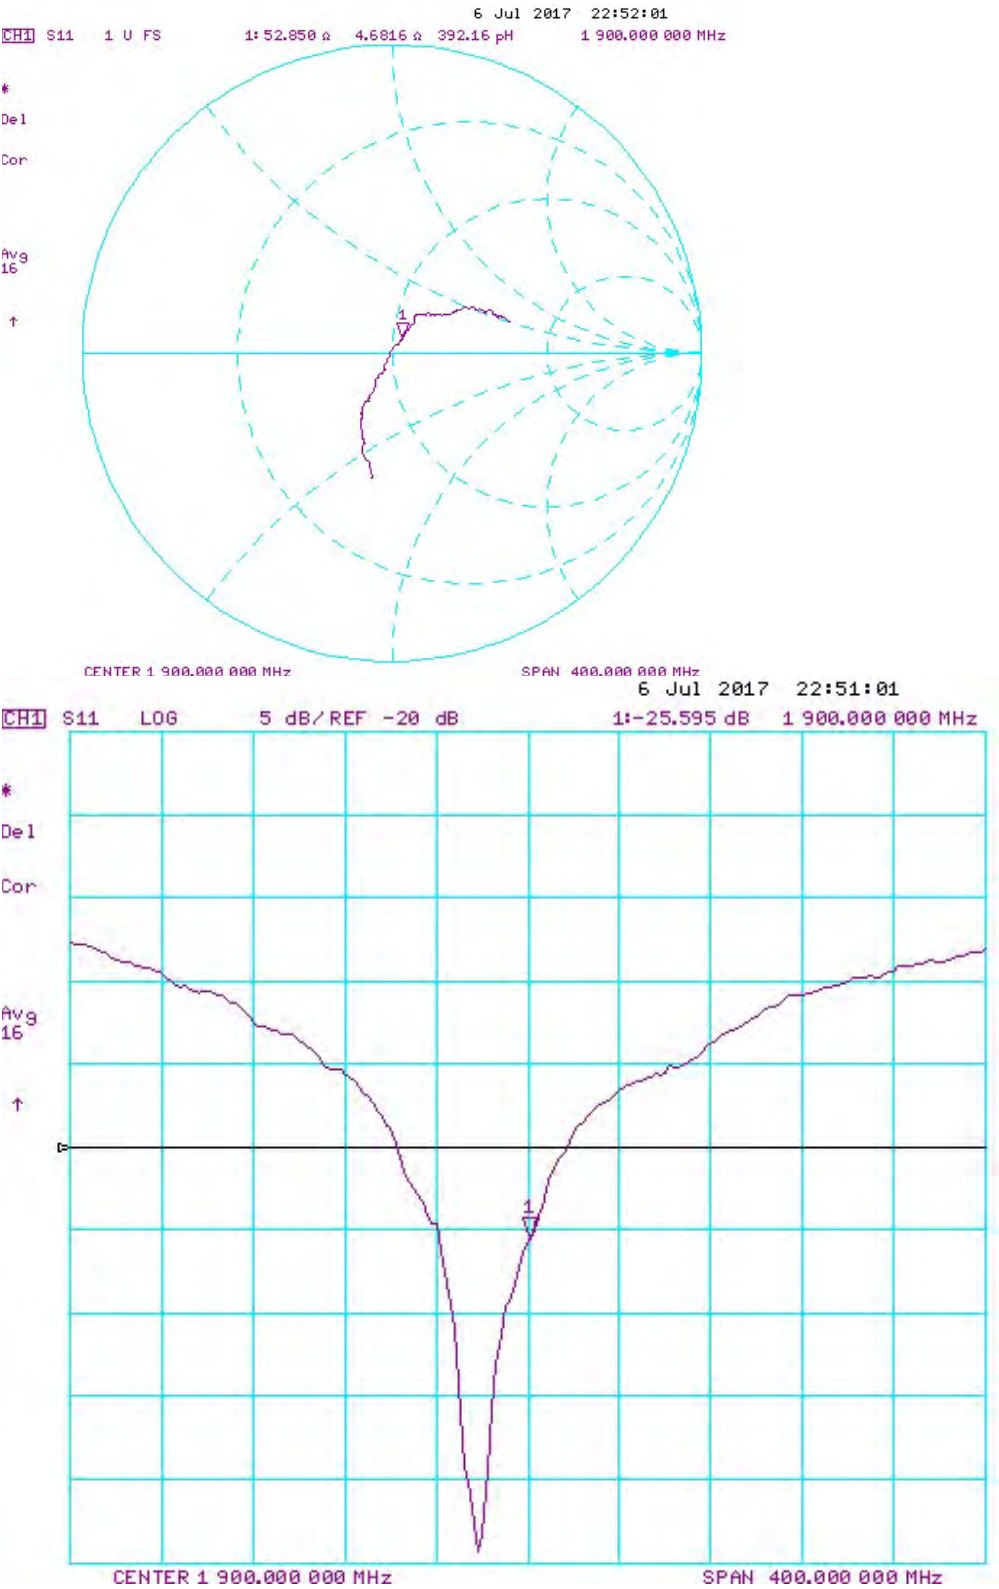

Impedance & Return-Loss Measurement Plot for Body TSL

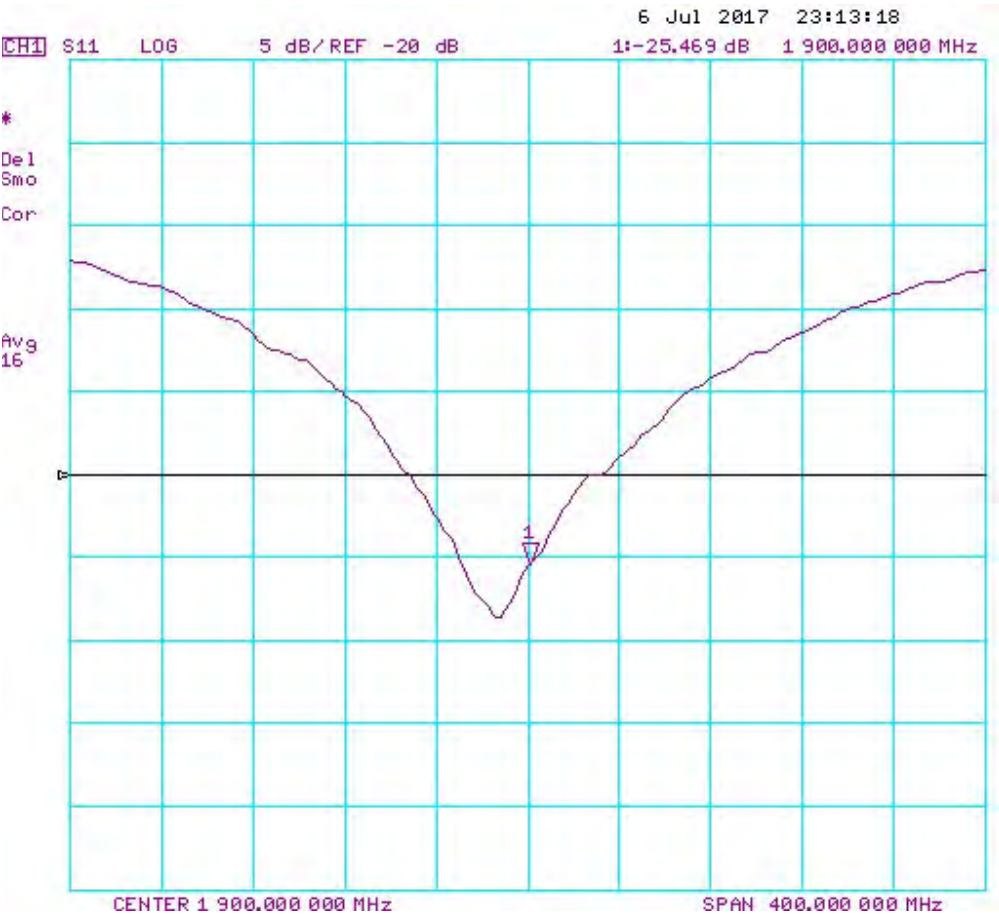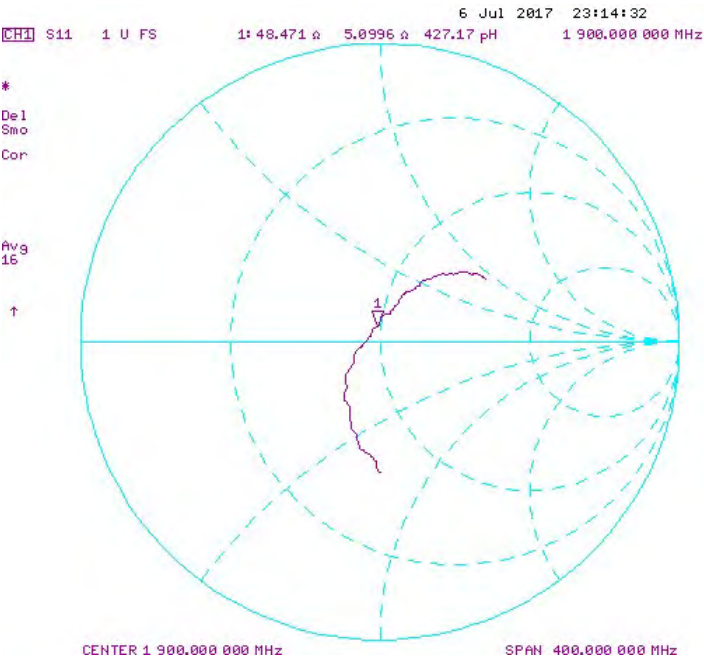



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D2450V2-797_Sep17**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN:797**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

SC ✓
 10/03/2017

Calibration date: **September 11, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-May-17 (No. EX3-7349_May17)	May-18
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Michael Weber** **Function**
Laboratory Technician

Approved by: **Katja Pokovic** **Technical Manager**

Signature

Issued: September 11, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	37.8 $\pm$ 6 %	1.86 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.5 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.7 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.8 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	51.9 $\pm$ 6 %	2.04 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.1 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	51.1 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.14 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.2 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$53.8 \Omega + 7.4 j\Omega$
Return Loss	- 21.9 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$49.7 \Omega + 9.1 j\Omega$
Return Loss	- 20.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.152 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 24, 2006

DASY5 Validation Report for Head TSL

Date: 11.09.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 797

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 37.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.12, 8.12, 8.12); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 113.5 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 26.9 W/kg

SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.28 W/kg

Maximum value of SAR (measured) = 21.6 W/kg

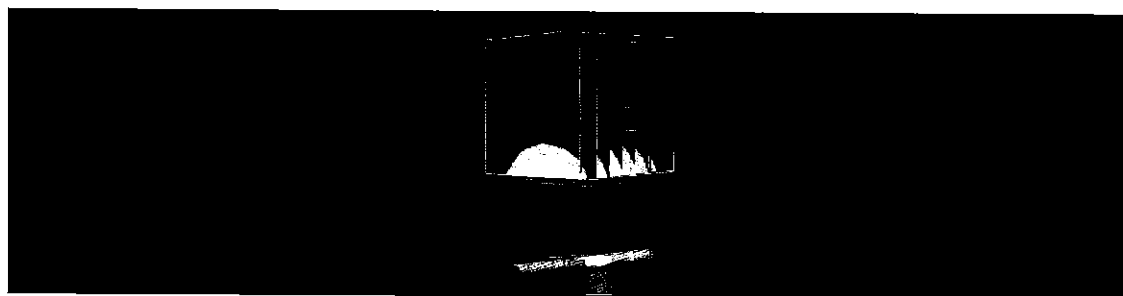


0 dB = 21.6 W/kg = 13.34 dBW/kg

Impedance Measurement Plot for Head TSL

11 Sep 2017 11:52:57
 CH1 S11 1 U FS 1: 53.777 Ω 7.4395 Ω 483.28 μH 2 450.000 000 MHz

*
 De1
 CA

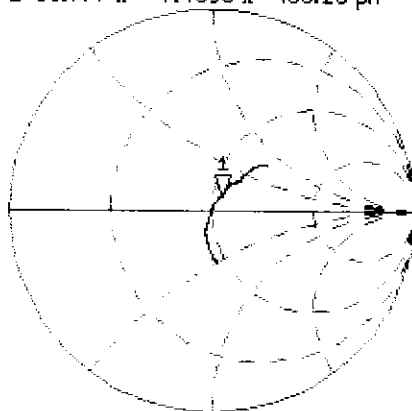

Avg
 16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -21.911 dB 2 450.000 000 MHz

CA

Avg
 16

H1d

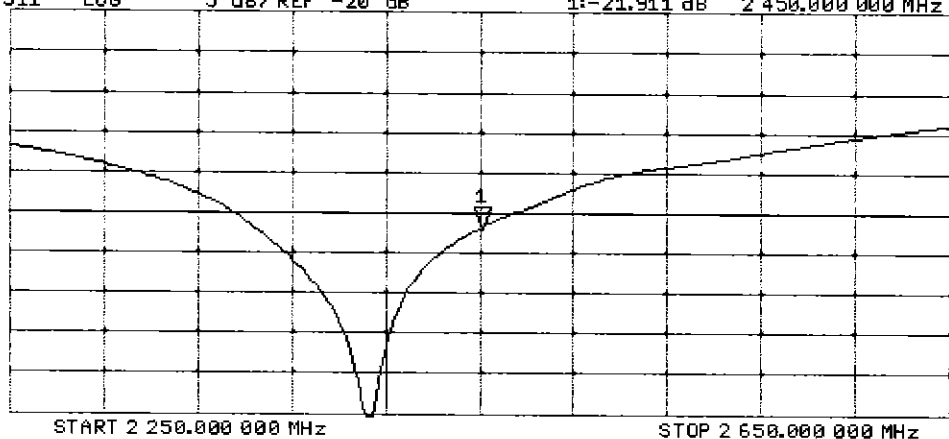

DASY5 Validation Report for Body TSL

Date: 11.09.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 797

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.04$ S/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.1, 8.1, 8.1); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 105.4 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 25.6 W/kg

SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.14 W/kg

Maximum value of SAR (measured) = 20.3 W/kg

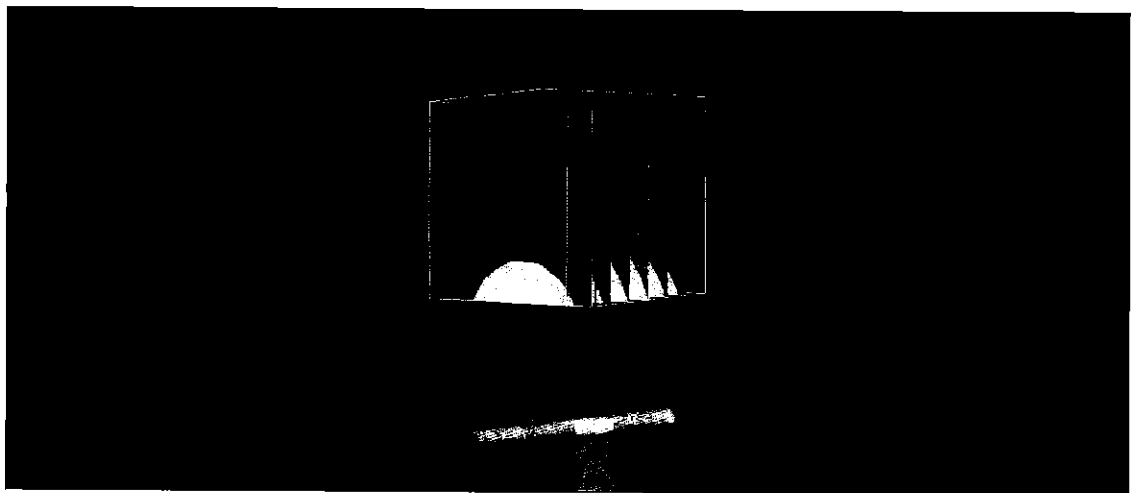


0 dB = 20.3 W/kg = 13.07 dBW/kg

Impedance Measurement Plot for Body TSL

11 Sep 2017 11:52:10
CH1 S11 1 U FS 1: 49.725 Ω 9.0703 Ω 589.22 pF 2 450.000 000 MHz

*
Del
CA

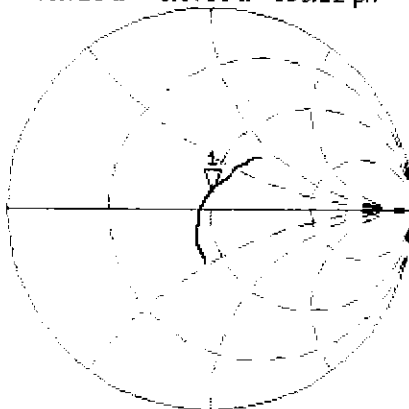

Avg
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -20.854 dB 2 450.000 000 MHz

CA

Avg
16

H1d

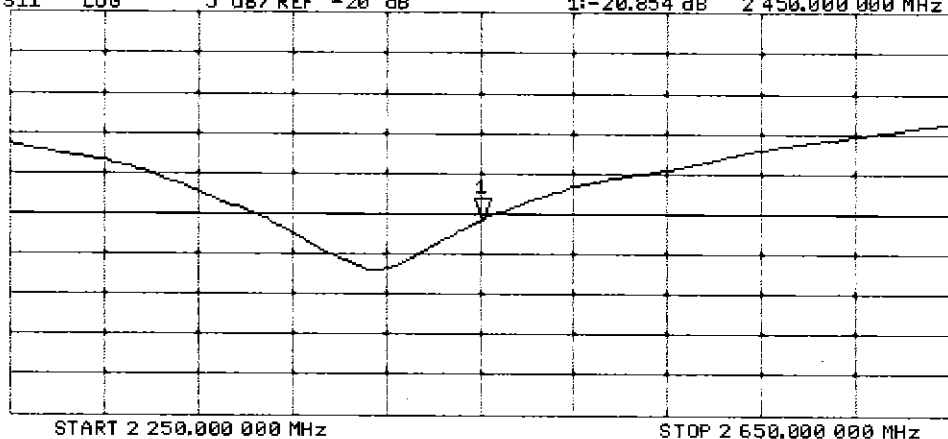



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **D1900V2-5d148_Feb18**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN:5d148**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

BN ✓
03-02-2018

Calibration date: **February 07, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Claudio Leubler** **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** **Technical Manager**

Issued: February 7, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.7 $\pm$ 6 %	1.39 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.95 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	40.1 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.22 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.0 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	55.2 $\pm$ 6 %	1.48 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.68 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	39.6 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.14 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.9 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$52.1 \Omega + 5.8 j\Omega$
Return Loss	- 24.3 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$47.8 \Omega + 6.5 j\Omega$
Return Loss	- 23.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.199 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 11, 2011

DASY5 Validation Report for Head TSL

Date: 07.02.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d148

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.18, 8.18, 8.18); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 109.6 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 9.95 W/kg; SAR(10 g) = 5.22 W/kg


Maximum value of SAR (measured) = 15.3 W/kg

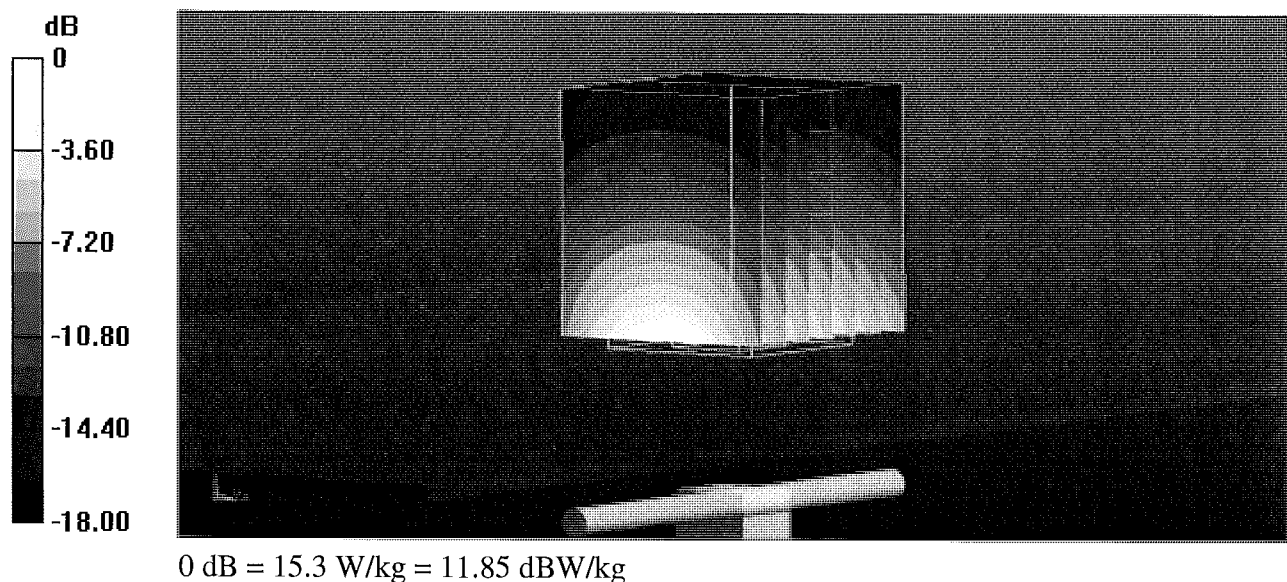

Impedance Measurement Plot for Head TSL

7 Feb 2018 15:15:06
CH1 S11 1 U FS 1: 52.148 Ω 5.8281 Ω 488.20 μ H 1 900.000 000 MHz


*
Del
CA

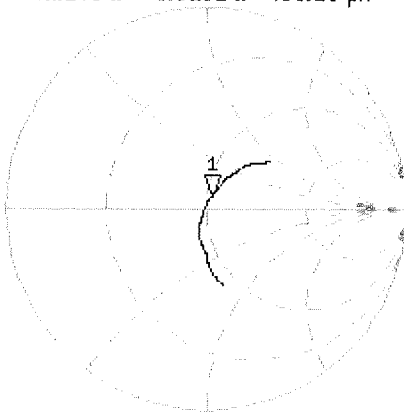

Avg
16
H1d

CH2 S11 LOG 5 dB/ REF -20 dB 1:-24.331 dB 1 900.000 000 MHz

CA
Avg
16
H1d

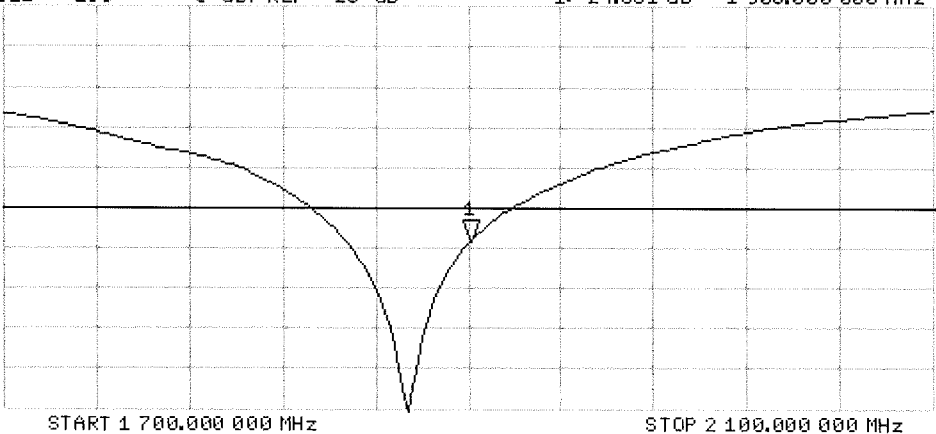

DASY5 Validation Report for Body TSL

Date: 07.02.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d148

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.48$ S/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.15, 8.15, 8.15); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.0 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 17.2 W/kg

SAR(1 g) = 9.68 W/kg; SAR(10 g) = 5.14 W/kg

Maximum value of SAR (measured) = 14.4 W/kg

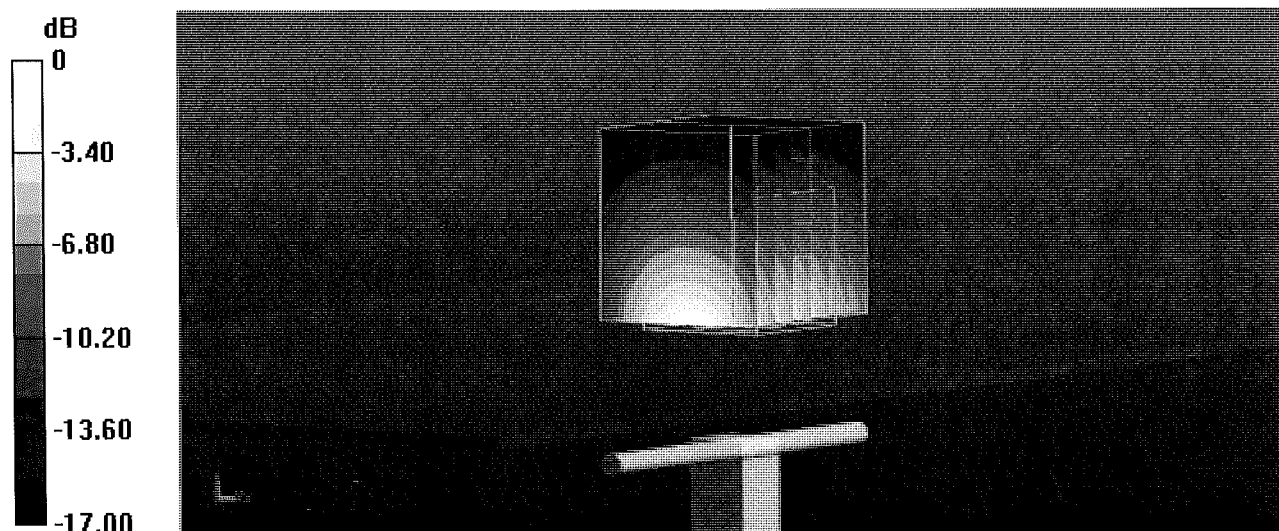


0 dB = 14.4 W/kg = 11.58 dBW/kg

Impedance Measurement Plot for Body TSL


7 Feb 2018 15:14:31
[CH1] S11 1 U FS 1: 47.787 Ω 6.4551 Ω 540.71 μ H 1 900.000 000 MHz

*
Del
CA
Avg
16
H1d

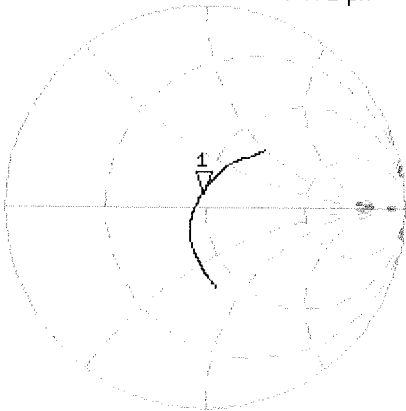

CH2 S11 LOG 5 dB/REF -20 dB 1:-23.146 dB 1 900.000 000 MHz

CA
Avg
16
H1d

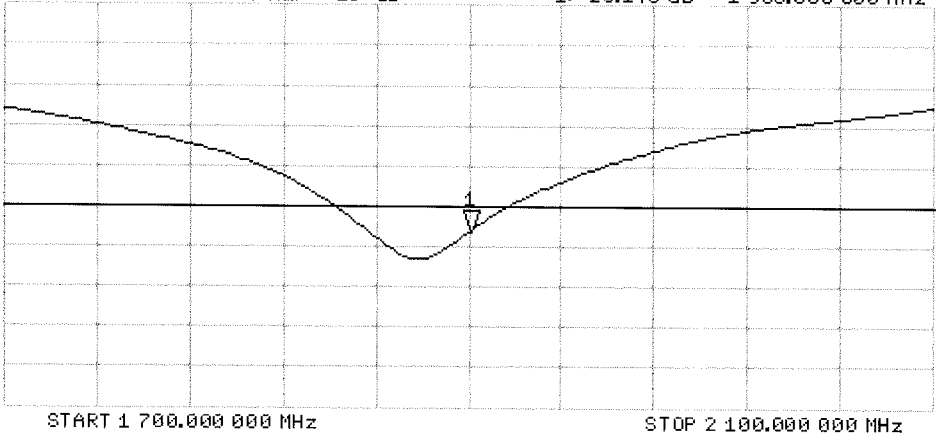



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D5GHzV2-1191_Sep16**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1191**

Calibration procedure(s) **QA CAL-22.v2**
Calibration procedure for dipole validation kits between 3-6 GHz

BNV
09-28-2016

Calibration date: **September 21, 2016**

Extended
09/2017
SC

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 3503	30-Jun-16 (No. EX3-3503_Jun16)	Jun-17
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (No. 217-02223)	In house check: Oct-16
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Jun-15)	In house check: Oct-16
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by: **Leif Klysner** *Leif Klysner*
 Name: **Leif Klysner** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** *Katja Pokovic*
 Name: **Katja Pokovic** Technical Manager

Signature

Issued: September 22, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5250 MHz $\pm$ 1 MHz 5600 MHz $\pm$ 1 MHz 5750 MHz $\pm$ 1 MHz	

Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.71 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	34.5 $\pm$ 6 %	4.59 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5250 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.96 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	78.9 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.29 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.6 W/kg $\pm$ 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.0 ± 6 %	4.93 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.45 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	83.6 W / kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.41 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.8 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.4	5.22 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	33.8 ± 6 %	5.08 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5750 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.99 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	79.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.27 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.4 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.36 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.4 ± 6 %	5.52 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5250 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.74 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	77.0 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.17 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.6 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.8 ± 6 %	6.00 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.96 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	79.2 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.24 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.2 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.3	5.94 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.5 ± 6 %	6.21 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5750 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.65 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	76.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.14 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.2 W/kg ± 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 5250 MHz

Impedance, transformed to feed point	55.7 Ω - 4.3 j Ω
Return Loss	- 23.4 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	58.3 Ω - 3.2 j Ω
Return Loss	- 21.8 dB

Antenna Parameters with Head TSL at 5750 MHz

Impedance, transformed to feed point	58.1 Ω + 4.8 j Ω
Return Loss	- 21.2 dB

Antenna Parameters with Body TSL at 5250 MHz

Impedance, transformed to feed point	56.1 Ω - 3.7 j Ω
Return Loss	- 23.4 dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	58.9 Ω - 1.7 j Ω
Return Loss	- 21.7 dB

Antenna Parameters with Body TSL at 5750 MHz

Impedance, transformed to feed point	59.5 Ω + 6.9 j Ω
Return Loss	- 19.4 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.204 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	August 28, 2003

DASY5 Validation Report for Head TSL

Date: 21.09.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1191

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz
Medium parameters used: $f = 5250$ MHz; $\sigma = 4.59$ S/m; $\epsilon_r = 34.5$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 4.93$ S/m; $\epsilon_r = 34$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5750$ MHz; $\sigma = 5.08$ S/m; $\epsilon_r = 33.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.42, 5.42, 5.42); Calibrated: 30.06.2016, ConvF(4.89, 4.89, 4.89); Calibrated: 30.06.2016, ConvF(4.85, 4.85, 4.85); Calibrated: 30.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 68.49 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 28.6 W/kg

SAR(1 g) = 7.96 W/kg; SAR(10 g) = 2.29 W/kg

Maximum value of SAR (measured) = 18.2 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 69.34 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 32.9 W/kg

SAR(1 g) = 8.45 W/kg; SAR(10 g) = 2.41 W/kg

Maximum value of SAR (measured) = 20.0 W/kg


Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.15 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 32.3 W/kg


SAR(1 g) = 7.99 W/kg; SAR(10 g) = 2.27 W/kg

Maximum value of SAR (measured) = 19.3 W/kg

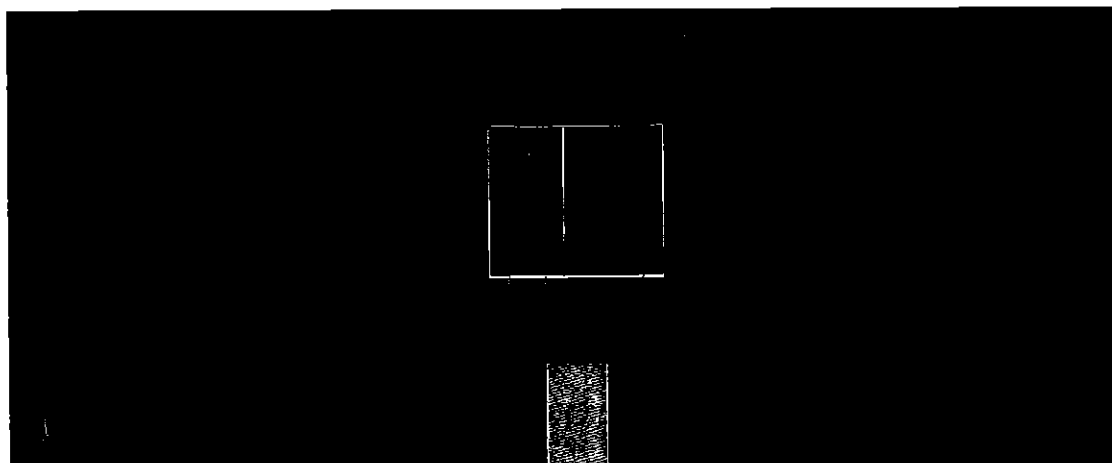

0 dB = 18.2 W/kg = 12.60 dBW/kg

Impedance Measurement Plot for Head TSL

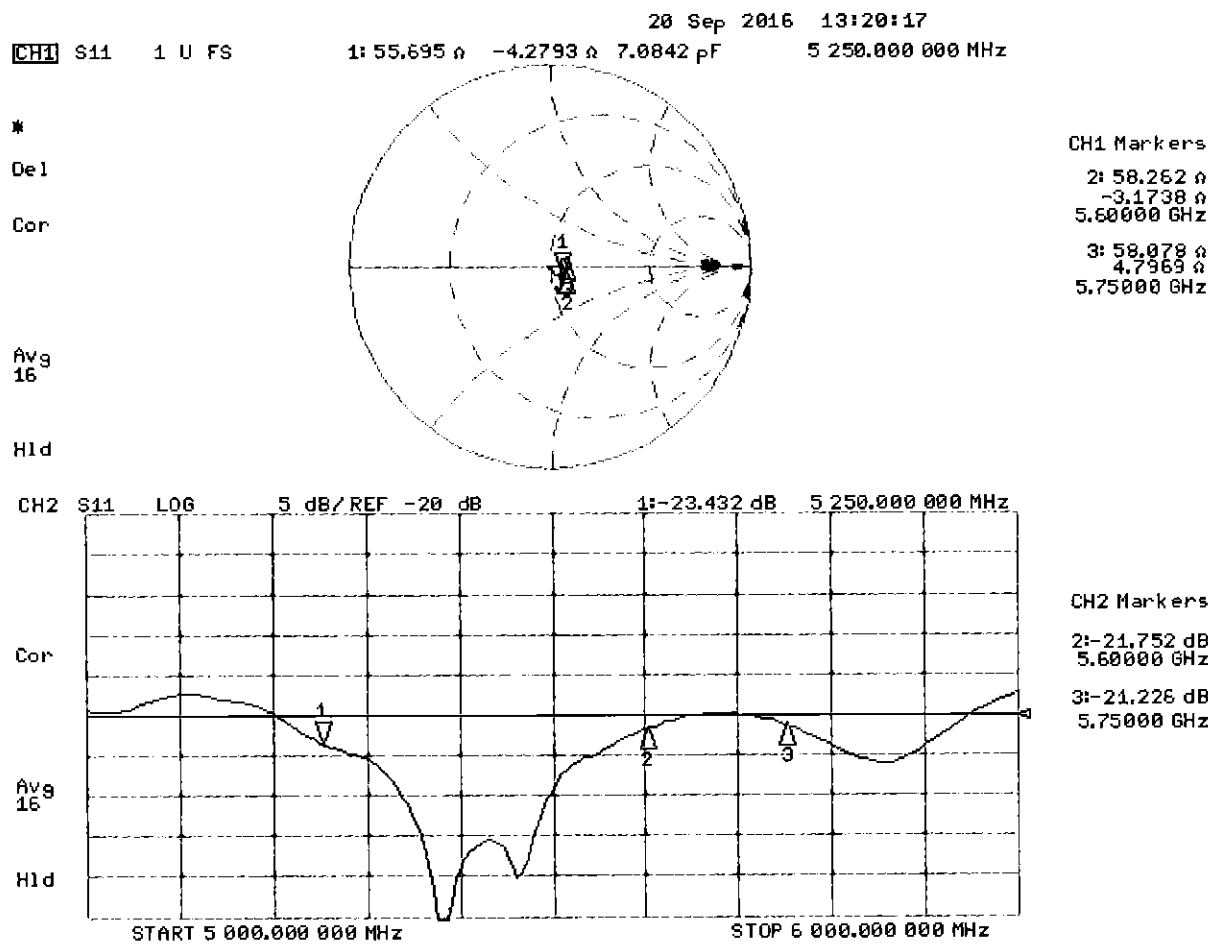

DASY5 Validation Report for Body TSL

Date: 20.09.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1191

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz
Medium parameters used: $f = 5250$ MHz; $\sigma = 5.52$ S/m; $\epsilon_r = 47.4$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 6$ S/m; $\epsilon_r = 46.8$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5750$ MHz; $\sigma = 6.21$ S/m; $\epsilon_r = 46.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.85, 4.85, 4.85); Calibrated: 30.06.2016, ConvF(4.35, 4.35, 4.35); Calibrated: 30.06.2016, ConvF(4.3, 4.3, 4.3); Calibrated: 30.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5250MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.49 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 29.1 W/kg

SAR(1 g) = 7.74 W/kg; SAR(10 g) = 2.17 W/kg

Maximum value of SAR (measured) = 17.7 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.85 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 32.5 W/kg

SAR(1 g) = 7.96 W/kg; SAR(10 g) = 2.24 W/kg

Maximum value of SAR (measured) = 18.8 W/kg



Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.21 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 32.7 W/kg

SAR(1 g) = 7.65 W/kg; SAR(10 g) = 2.14 W/kg

Maximum value of SAR (measured) = 18.5 W/kg

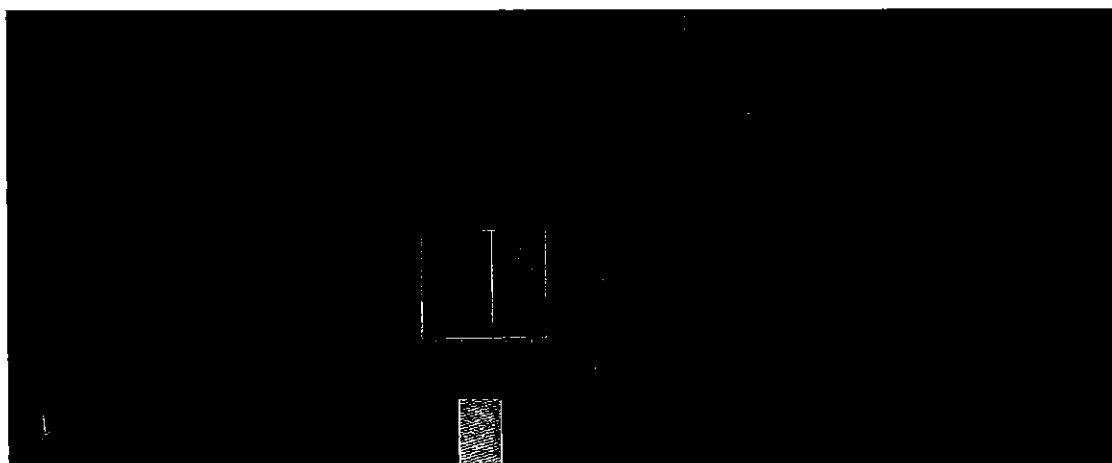


0 dB = 17.7 W/kg = 12.48 dBW/kg

Impedance Measurement Plot for Body TSL

20 Sep 2016 13:19:13
 CH1 S11 1 U FS 1: 56.143 Ω -3.6992 Ω 8.1950 pF 5 250.000 000 MHz


*
 Del
 Cor
 Avg
 16
 H1d

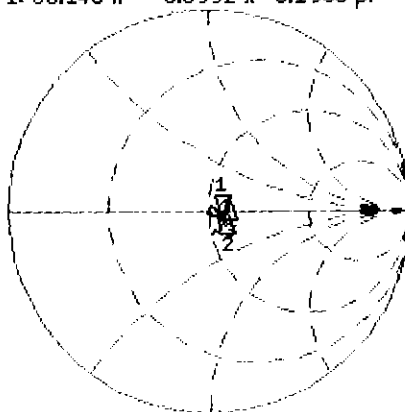

CH1 Markers
 2: 58.887 Ω
 -1.6504 Ω
 5.60000 GHz
 3: 59.510 Ω
 6.9121 Ω
 5.75000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1: -23.406 dB 5 250.000 000 MHz

Cor
 Avg
 16
 H1d

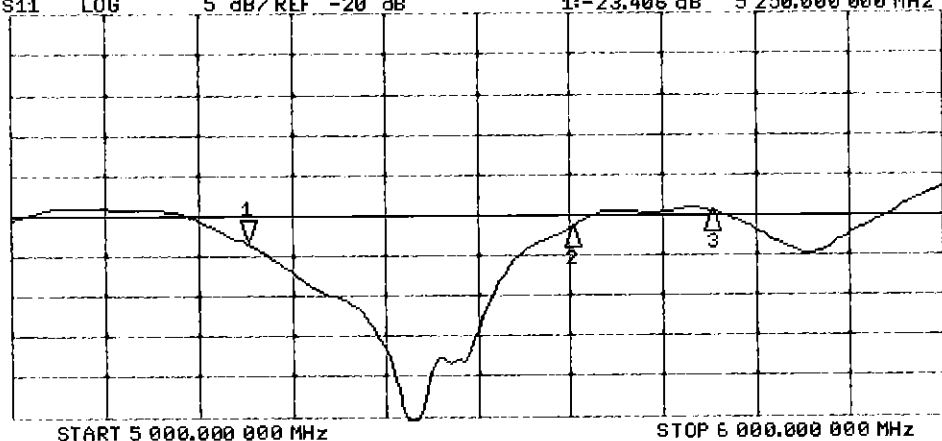

CH2 Markers
 2: -21.616 dB
 5.60000 GHz
 3: -19.400 dB
 5.75000 GHz

Certification of Calibration

Object D5GHzV2 – SN: 1191

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.


Extension Calibration date: 9/19/2017

Description: SAR Validation Dipole at 5250, 5600, and 5750 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Control Company	4040	Therm./Clock/Humidity Monitor	3/31/2017	Biennial	3/31/2019	170232394
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330156
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433971
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/1/2017	Annual	6/1/2018	MY53401181
Agilent	8753ES	S-Parameter Network Analyzer	10/26/2016	Annual	10/26/2017	US39170118
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/10/2017	Annual	5/10/2018	1070
SPEAG	EX3DV4	SAR Probe	1/13/2017	Annual	1/13/2018	3589
SPEAG	EX3DV4	SAR Probe	2/13/2017	Annual	2/13/2018	3914
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/16/2017	Annual	1/16/2018	1466
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/9/2017	Annual	2/9/2018	665
Anritsu	MA2411B	Pulse Power Sensor	2/10/2017	Annual	2/10/2018	1207364
Anritsu	MA2411B	Pulse Power Sensor	2/10/2017	Annual	2/10/2018	1339018
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	941001
Agilent	N5182A	MXG Vector Signal Generator	2/28/2017	Annual	2/28/2018	MY47420800
Seekonk	NC-100	Torque Wrench	11/6/2015	Biennial	11/6/2017	N/A
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Brodie Halfoster	Test Engineer	
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	

DIPOLE CALIBRATION EXTENSION

Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:


1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.

The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:


Frequency (MHz)	Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g W/kg @ 17.0 dBm)	Measured Head SAR (1g W/kg @ 17.0 dBm)	Deviation 1g (%)	Certificate SAR Target Head (10g W/kg @ 17.0 dBm)	Measured Head SAR (10g W/kg @ 17.0 dBm)	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
6250	9/21/2016	9/19/2017	1.204	3.95	3.70	-6.21%	1.13	1.05	-7.08%	55.7	53.4	2.3	-4.3	-6.4	2.1	-23.4	-26.9	-15.00%	PASS
5600	9/21/2016	9/19/2017	1.204	4.18	4.03	-3.59%	1.19	1.13	-5.04%	58.3	55.6	2.7	-3.2	-1.2	2.0	-21.8	-26.1	-19.80%	PASS
8750	9/21/2016	9/19/2017	1.204	3.96	3.94	-0.38%	1.12	1.10	-1.79%	58.1	57.4	0.7	4.8	3.2	1.6	-21.2	-21.0	0.90%	PASS

Frequency (MHz)	Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g W/kg @ 17.0 dBm)	Measured Body SAR (1g W/kg @ 17.0 dBm)	Deviation 1g (%)	Certificate SAR Target Body (10g W/kg @ 17.0 dBm)	Measured Body SAR (10g W/kg @ 17.0 dBm)	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
6250	9/21/2016	9/19/2017	1.204	3.85	3.80	-1.30%	1.08	1.06	-1.85%	55.1	54.0	2.1	-3.7	-3.3	0.4	-23.4	-26.0	-11.10%	PASS
5600	9/21/2016	9/19/2017	1.204	3.96	4.06	2.53%	1.11	1.13	1.80%	58.9	56.5	2.4	-1.7	0.5	2.2	-21.7	-24.5	-12.80%	PASS
8750	9/21/2016	9/19/2017	1.204	3.81	3.66	-3.81%	1.06	1.02	-3.77%	59.5	58.0	1.5	6.9	5.2	1.7	-19.4	-21.1	-8.70%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

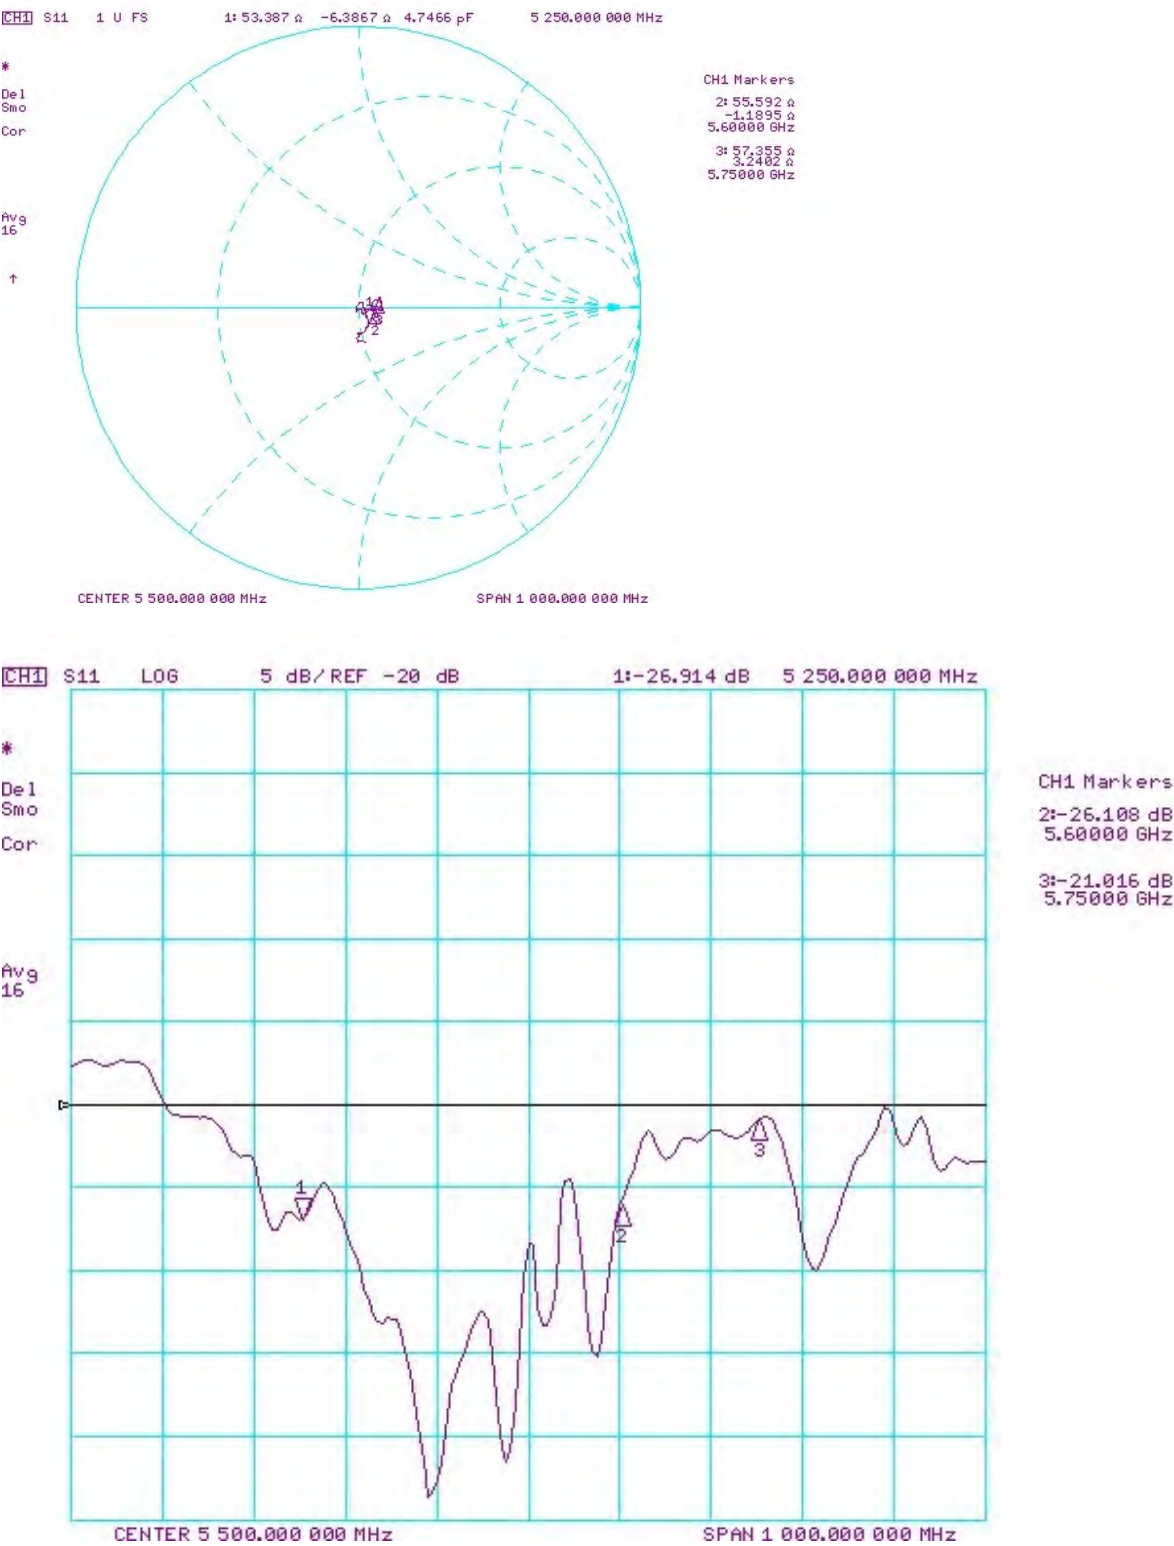

Impedance & Return-Loss Measurement Plot for Body TSL

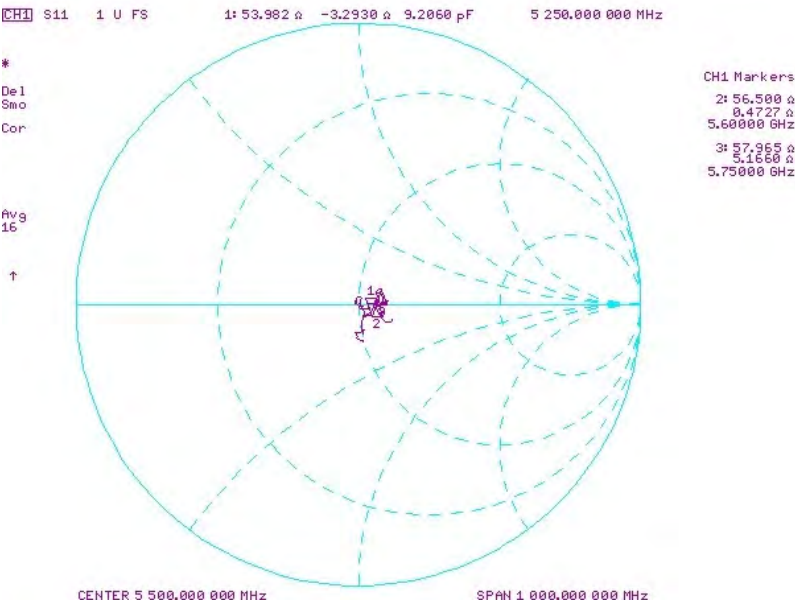



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D5GHzV2-1237_Aug17**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1237**

Calibration procedure(s) **QA CAL-22.v2**
Calibration procedure for dipole validation kits between 3-6 GHz

PMV
 8/27/17

Calibration date: **August 15, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 3503	31-Dec-16 (No. EX3-3503_Dec16)	Dec-17
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Johannes Kurikka** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Technical Manager

Signature

[Handwritten signatures]

Issued: August 16, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5250 MHz $\pm$ 1 MHz 5600 MHz $\pm$ 1 MHz 5750 MHz $\pm$ 1 MHz	

Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.71 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	34.7 $\pm$ 6 %	4.49 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5250 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.14 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.7 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.0 W/kg $\pm$ 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.2 ± 6 %	4.84 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	82.5 W / kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.5 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.4	5.22 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.0 ± 6 %	4.99 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5750 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.10 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.2 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.31 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.8 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.36 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.0 ± 6 %	5.46 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5250 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.75 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	76.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.17 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.5 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.4 ± 6 %	5.93 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.91 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	78.5 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.23 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.1 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.3	5.94 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.2 ± 6 %	6.13 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5750 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.77 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	77.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.16 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.4 W/kg ± 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 5250 MHz

Impedance, transformed to feed point	49.9 Ω - 5.3 j Ω
Return Loss	- 25.5 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	51.9 Ω + 2.3 j Ω
Return Loss	- 30.7 dB

Antenna Parameters with Head TSL at 5750 MHz

Impedance, transformed to feed point	55.6 Ω - 0.5 j Ω
Return Loss	- 25.5 dB

Antenna Parameters with Body TSL at 5250 MHz

Impedance, transformed to feed point	46.9 Ω - 4.2 j Ω
Return Loss	- 25.4 dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	50.2 Ω + 3.0 j Ω
Return Loss	- 30.4 dB

Antenna Parameters with Body TSL at 5750 MHz

Impedance, transformed to feed point	53.4 Ω + 0.2 j Ω
Return Loss	- 29.7 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.194 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	May 04, 2015

DASY5 Validation Report for Head TSL

Date: 15.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1237

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz
Medium parameters used: $f = 5250$ MHz; $\sigma = 4.49$ S/m; $\epsilon_r = 34.7$; $\rho = 1000$ kg/m³,
Medium parameters used: $f = 5600$ MHz; $\sigma = 4.84$ S/m; $\epsilon_r = 34.2$; $\rho = 1000$ kg/m³,
Medium parameters used: $f = 5750$ MHz; $\sigma = 4.99$ S/m; $\epsilon_r = 34$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.58, 5.58, 5.58); Calibrated: 31.12.2016, ConvF(5.09, 5.09, 5.09); Calibrated: 31.12.2016, ConvF(5.02, 5.02, 5.02); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.08 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 30.6 W/kg

SAR(1 g) = 8.14 W/kg; SAR(10 g) = 2.33 W/kg

Maximum value of SAR (measured) = 19.2 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.04 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 32.7 W/kg

SAR(1 g) = 8.33 W/kg; SAR(10 g) = 2.38 W/kg

Maximum value of SAR (measured) = 19.8 W/kg



Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 69.11 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 32.4 W/kg

SAR(1 g) = 8.1 W/kg; SAR(10 g) = 2.31 W/kg

Maximum value of SAR (measured) = 19.6 W/kg

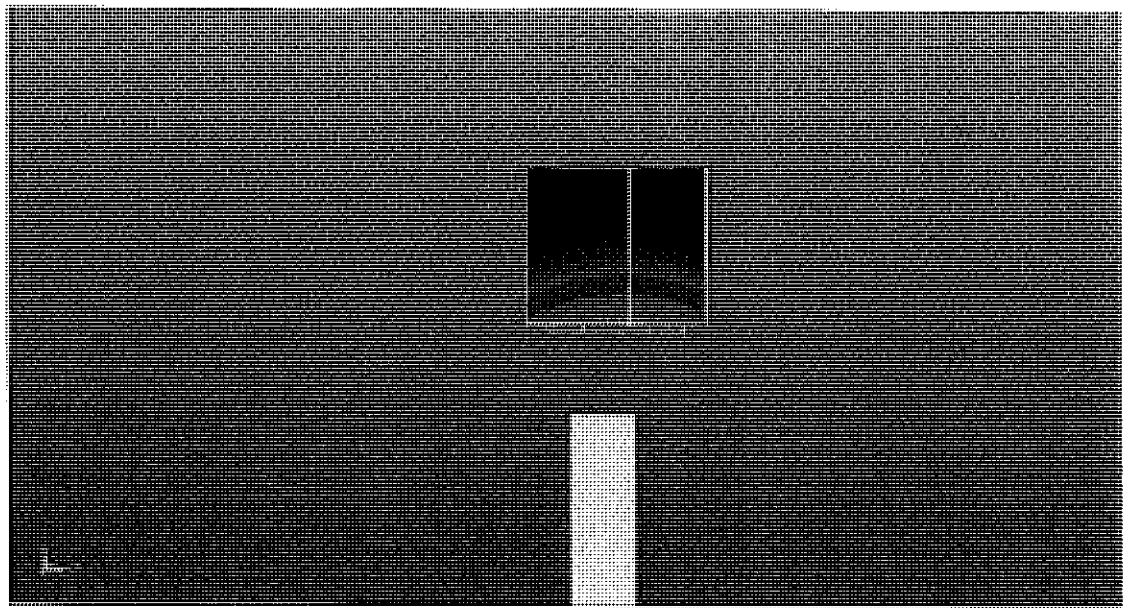


0 dB = 19.2 W/kg = 12.83 dBW/kg

Impedance Measurement Plot for Head TSL

9 Aug 2017 12:04:29
 CH1 S11 1 U FS 1: 49.920 Ω -5.3223 Ω 5.6959 pF 5 250.000 000 MHz


*
 Del
 Cor
 Avg
 16
 H1d

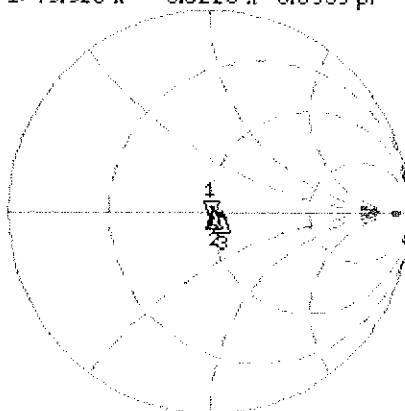

CH1 Markers
 2: 51.904 Ω
 2.3008 Ω
 5.60000 GHz
 3: 55.609 Ω
 -492.19 m Ω
 5.75000 GHz

CH2 S11 LOG 5 dB/ REF -20 dB 1: -25.482 dB 5 250.000 000 MHz

Cor
 Avg
 16
 H1d

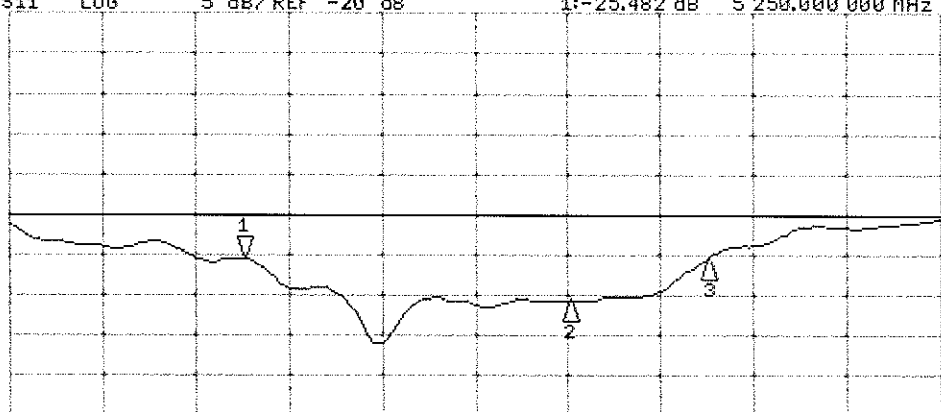

CH2 Markers
 2: -30.654 dB
 5.60000 GHz
 3: -25.460 dB
 5.75000 GHz

START 5 000.000 000 MHz

STOP 6 000.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 08.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1237

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz
Medium parameters used: $f = 5250 \text{ MHz}$; $\sigma = 5.46 \text{ S/m}$; $\epsilon_r = 47$; $\rho = 1000 \text{ kg/m}^3$,
Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = 5.93 \text{ S/m}$; $\epsilon_r = 46.4$; $\rho = 1000 \text{ kg/m}^3$,
Medium parameters used: $f = 5750 \text{ MHz}$; $\sigma = 6.13 \text{ S/m}$; $\epsilon_r = 46.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.14, 5.14, 5.14); Calibrated: 31.12.2016, ConvF(4.57, 4.57, 4.57); Calibrated: 31.12.2016, ConvF(4.51, 4.51, 4.51); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5250MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.87 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 29.9 W/kg

SAR(1 g) = 7.75 W/kg; SAR(10 g) = 2.17 W/kg

Maximum value of SAR (measured) = 18.4 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.11 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 33.0 W/kg

SAR(1 g) = 7.91 W/kg; SAR(10 g) = 2.23 W/kg

Maximum value of SAR (measured) = 19.3 W/kg



Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.64 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 33.8 W/kg

SAR(1 g) = 7.77 W/kg; SAR(10 g) = 2.16 W/kg

Maximum value of SAR (measured) = 19.1 W/kg

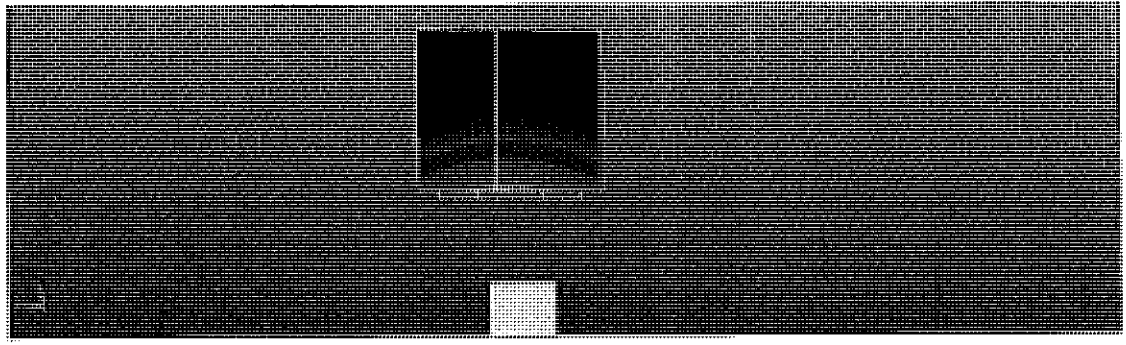


0 dB = 18.4 W/kg = 12.65 dBW/kg

Impedance Measurement Plot for Body TSL

8 Aug 2017 15:23:50
 CH1 S11 1 U FS 1: 46.885 Ω -4.1973 Ω 7.2226 pF 5 250.000 000 MHz


*
 De1
 Cor
 Avg
 16
 H1d

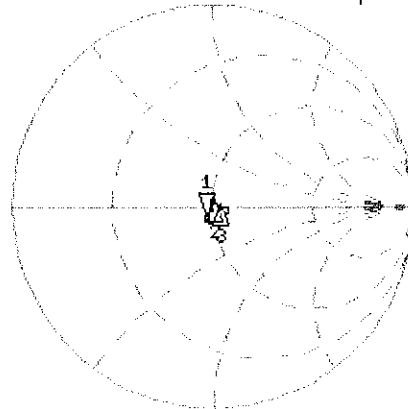

CH1 Markers
 2: 50.184 Ω
 3: 0.215 Ω
 5.60000 GHz
 3: 53.363 Ω
 0.1719 Ω
 5.75000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1: -25.364 dB 5 250.000 000 MHz

Cor
 Avg
 16
 H1d

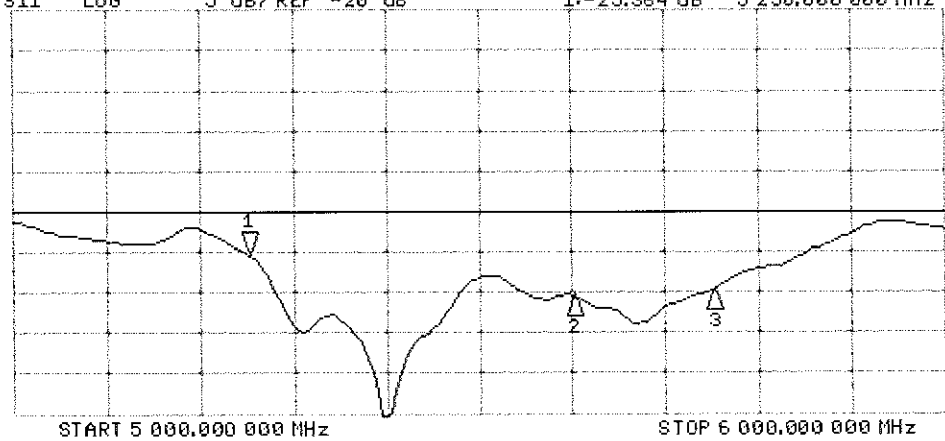

CH2 Markers
 2: -30.389 dB
 5.60000 GHz
 3: -29.742 dB
 5.75000 GHz



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D750V3-1161_Jul16**

CALIBRATION CERTIFICATE

Object **D750V3 - SN:1161**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **July 13, 2016**

✓ PM
 8/9/16
 Extended
 7/20/17
 SC ✓

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 7349	15-Jun-16 (No. EX3-7349_Jun16)	Jun-17
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (No. 217-02223)	In house check: Oct-16
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Jun-15)	In house check: Oct-16
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by: **Claudio Leubler** Name: **Claudio Leubler** Function: **Laboratory Technician** Signature:

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Function: **Technical Manager** Signature:

Issued: July 13, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.9 $\pm$ 6 %	0.91 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.09 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.17 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.39 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	55.1 $\pm$ 6 %	0.99 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.16 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.43 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.41 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.53 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	55.6 Ω - 0.9 j Ω
Return Loss	- 25.4 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	50.2 Ω - 4.0 j Ω
Return Loss	- 28.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.033 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 19, 2015

DASY5 Validation Report for Head TSL

Date: 13.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1161

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.07, 10.07, 10.07); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 58.07 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.13 W/kg

SAR(1 g) = 2.09 W/kg; SAR(10 g) = 1.37 W/kg

Maximum value of SAR (measured) = 2.80 W/kg




0 dB = 2.80 W/kg = 4.47 dBW/kg

Impedance Measurement Plot for Head TSL

13 Jul 2016 09:55:53
 CH1 S11 1 U FS 1: 55.615 Ω -949.22 m Ω 223.56 pF 750.000 000 MHz

*
 Del
 CA

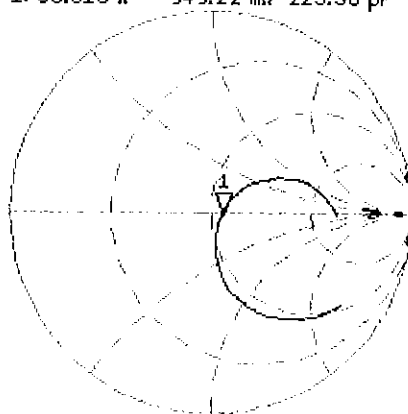

Avg
 16


H1 d

CH2 S11 LOG 5 dB/REF -20 dB 1:-25.361 dB 750.000 000 MHz

CA

Avg
 16

H1 d

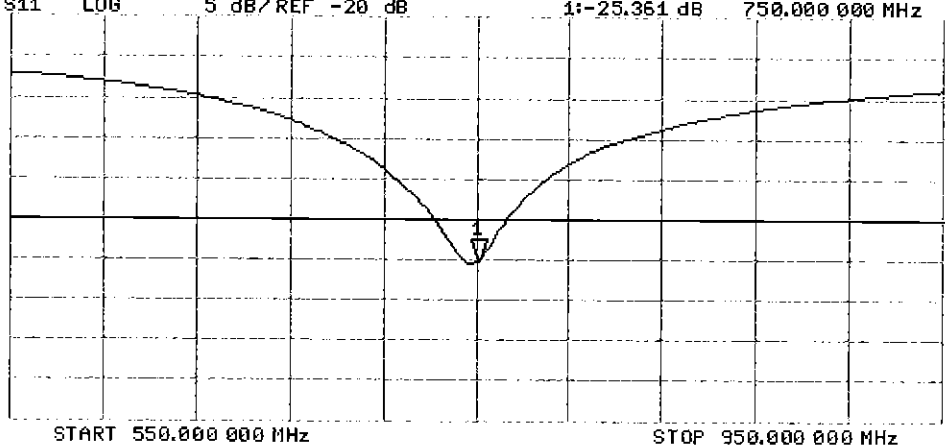

DASY5 Validation Report for Body TSL

Date: 13.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1161

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.99 \text{ S/m}$; $\epsilon_r = 55.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.99, 9.99, 9.99); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.33 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.22 W/kg

SAR(1 g) = 2.16 W/kg; SAR(10 g) = 1.41 W/kg

Maximum value of SAR (measured) = 2.87 W/kg




0 dB = 2.87 W/kg = 4.58 dBW/kg

Impedance Measurement Plot for Body TSL

13 Jul 2016 13:16:34
 [CH1] S11 1 U FS 1: 50.244 Ω -3.9707 Ω 53.443 pF 750.000 000 MHz

*
 Del
 CA

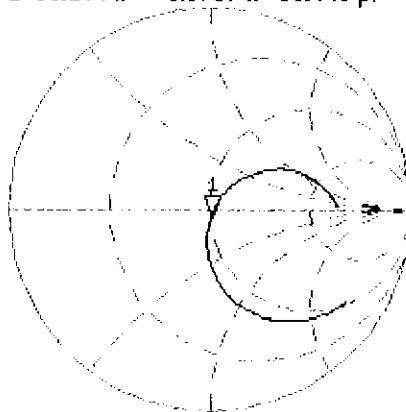


Avg
 16

H1d

CH2 S11 L06 5 dB/REF -20 dB 1:-27.995 dB 750.000 000 MHz

CA

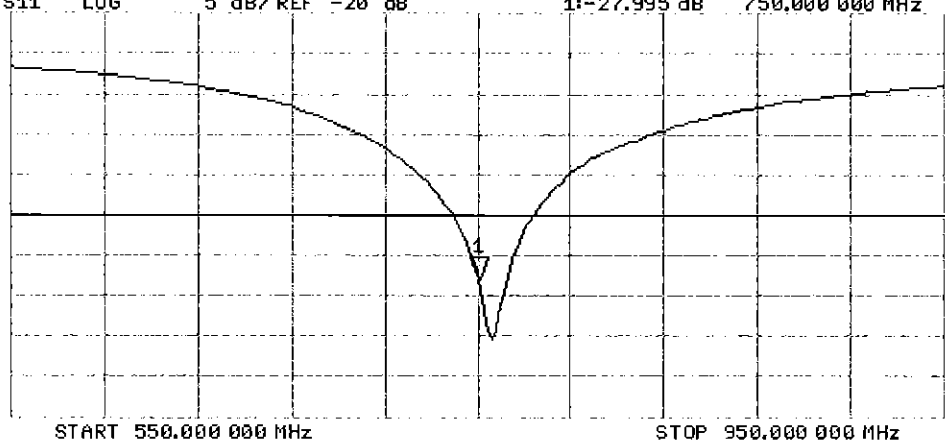

H1d

Certification of Calibration

Object D750V3 – SN: 1161

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.

Calibration date: July 12, 2017

Description: SAR Validation Dipole at 750 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Control Company	4040	Therm./Clock/Humidity Monitor	3/31/2017	Biennial	3/31/2019	170232394
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330156
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433971
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/1/2017	Annual	6/1/2018	MY53401181
Agilent	8753ES	S-Parameter Network Analyzer	10/26/2016	Annual	10/26/2017	US39170118
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/8/2017	Annual	3/8/2018	1368
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/14/2017	Annual	6/14/2018	1334
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/10/2017	Annual	5/10/2018	1070
SPEAG	ES3DV3	SAR Probe	11/15/2016	Annual	11/15/2017	3334
SPEAG	ES3DV3	SAR Probe	3/14/2017	Annual	3/14/2018	3319
Anritsu	MA2411B	Pulse Power Sensor	2/10/2017	Annual	2/10/2018	1207364
Anritsu	MA2411B	Pulse Power Sensor	2/10/2017	Annual	2/10/2018	1339018
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	941001
Agilent	N5182A	MXG Vector Signal Generator	2/28/2017	Annual	2/28/2018	MY47420800
Seekonk	NC-100	Torque Wrench	11/6/2015	Biennial	11/6/2017	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Brodie Halfoster	Test Engineer	<i>BRODIE HALFOSTER</i>
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	<i>KOK</i>

DIPOLE CALIBRATION EXTENSION



Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.



The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 23.0 dBm	Measured Head SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Head (10g) W/kg @ 23.0 dBm	Measured Head SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
7/13/2016	7/12/2017	1.033	1.63	1.65	0.98%	1.08	1.09	1.11%	55.6	54.5	1.1	-0.9	-4.0	3.1	-25.4	-24.8	2.40%	PASS
Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 23.0 dBm	Measured Body SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 23.0 dBm	Measured Body SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
7/13/2016	7/12/2017	1.033	1.69	1.75	3.80%	1.11	1.17	5.79%	50.2	48.0	2.2	-4.0	-6.9	2.9	-28.0	-23.9	14.60%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

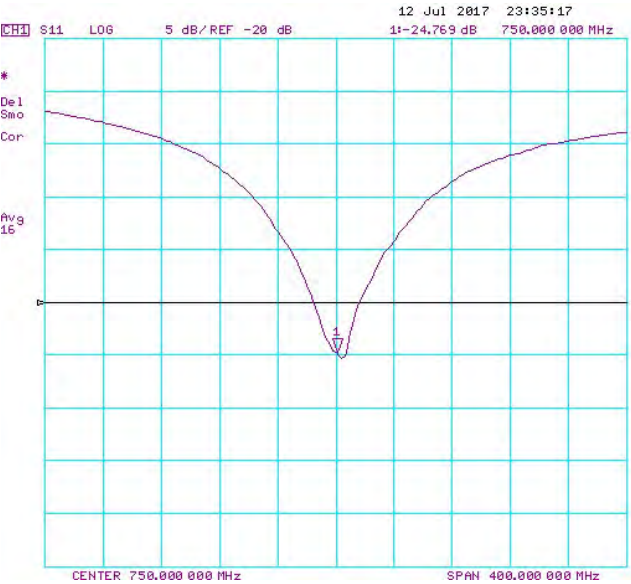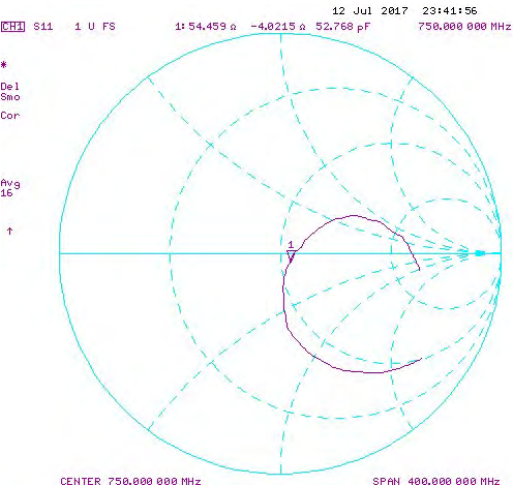

Impedance & Return-Loss Measurement Plot for Body TSL

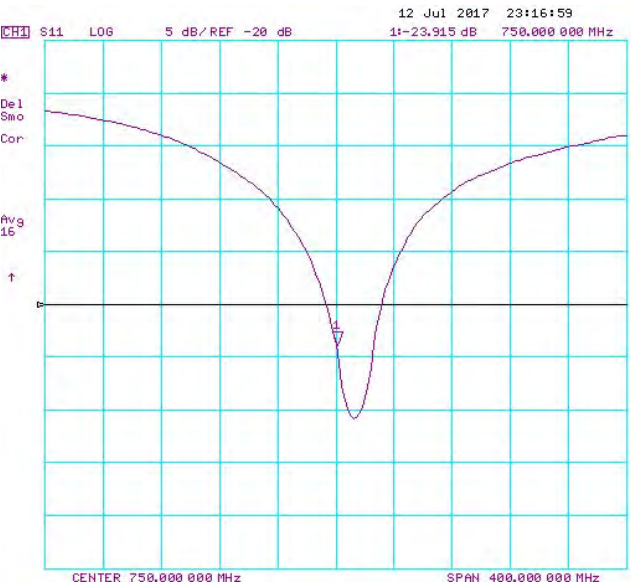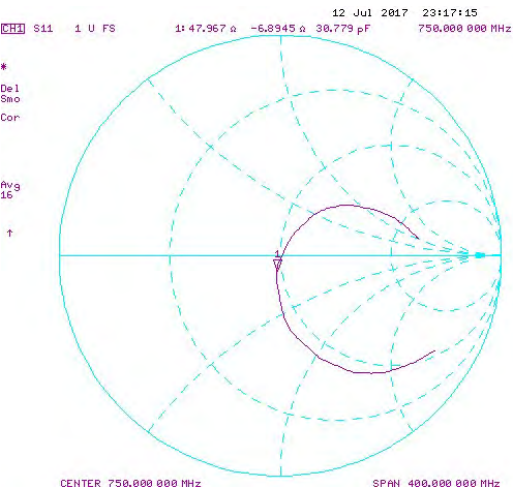



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D750V3-1003_Jan18**

CALIBRATION CERTIFICATE

Object **D750V3 - SN:1003**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **January 15, 2018**

BN
01-25-2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Leif Klysner** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Technical Manager

Signature

Leif Klysner

Katja Pokovic

Issued: January 15, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of

Schmid & Partner

Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5.0 mm	
Frequency	750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.9 $\pm$ 6 %	0.90 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.10 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.28 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.42 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	55.0 $\pm$ 6 %	0.96 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.15 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.58 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.43 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.71 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.8 Ω - 2.1 j Ω
Return Loss	- 27.6 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.2 Ω - 6.2 j Ω
Return Loss	- 24.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.043 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 21, 2009

Appendix (Additional assessments outside the scope of SCS 0108)

Measurement Conditions

DASY system configuration, as far as not given on page 1 and 3.

Phantom	SAM Head Phantom	For usage with cSAR3DV2-R/L
---------	------------------	-----------------------------

SAR result with SAM Head (Top)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.98 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	7.94 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.32 W/kg ± 16.9 % (k=2)

SAR result with SAM Head (Mouth)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.05 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.22 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.52 W/kg ± 16.9 % (k=2)

SAR result with SAM Head (Neck)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.01 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.06 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.52 W/kg ± 16.9 % (k=2)

SAR result with SAM Head (Ear)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.67 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.70 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.15 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	4.60 W/kg ± 16.9 % (k=2)

DASY5 Validation Report for Head TSL

Date: 12.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1003

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.22, 10.22, 10.22); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.11 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.15 W/kg

SAR(1 g) = 2.1 W/kg; SAR(10 g) = 1.37 W/kg

Maximum value of SAR (measured) = 2.80 W/kg

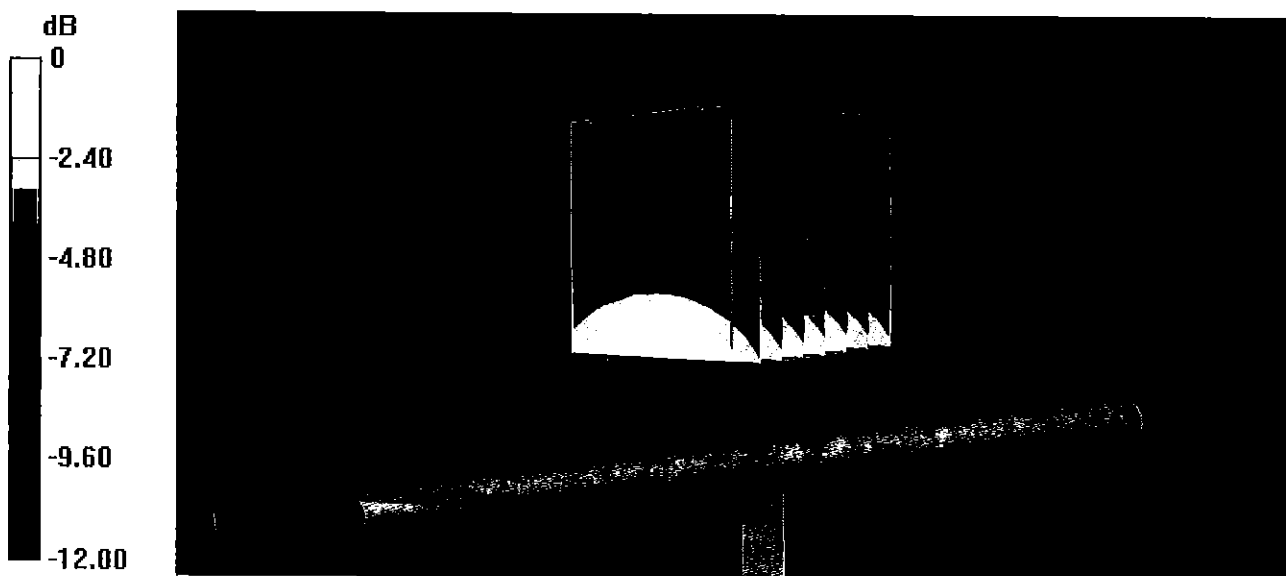


0 dB = 2.80 W/kg = 4.47 dBW/kg

Impedance Measurement Plot for Head TSL

12 Jan 2018 13:14:07
CH1 S11 1 U FS 1: 53.754 Ω -2.0996 Ω 101.07 pF 750.000 000 MHz

*
Del
CA

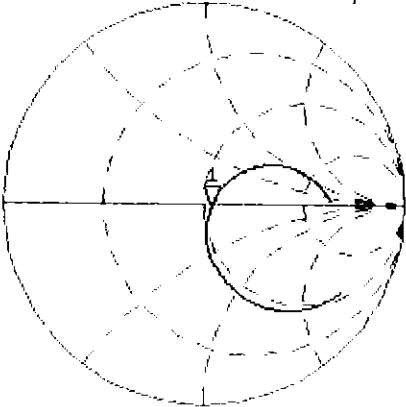


Avg
16
H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-27.643 dB 750.000 000 MHz

CA

Avg
16
H1d

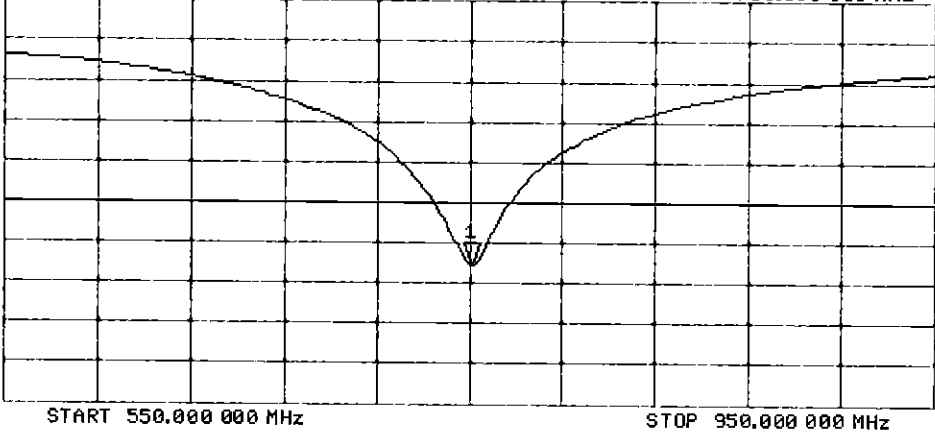

DASY5 Validation Report for Body TSL

Date: 12.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1003

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.96 \text{ S/m}$; $\epsilon_r = 55$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.19, 10.19, 10.19); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x8x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 57.31 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 3.17 W/kg

SAR(1 g) = 2.15 W/kg; SAR(10 g) = 1.43 W/kg

Maximum value of SAR (measured) = 2.83 W/kg

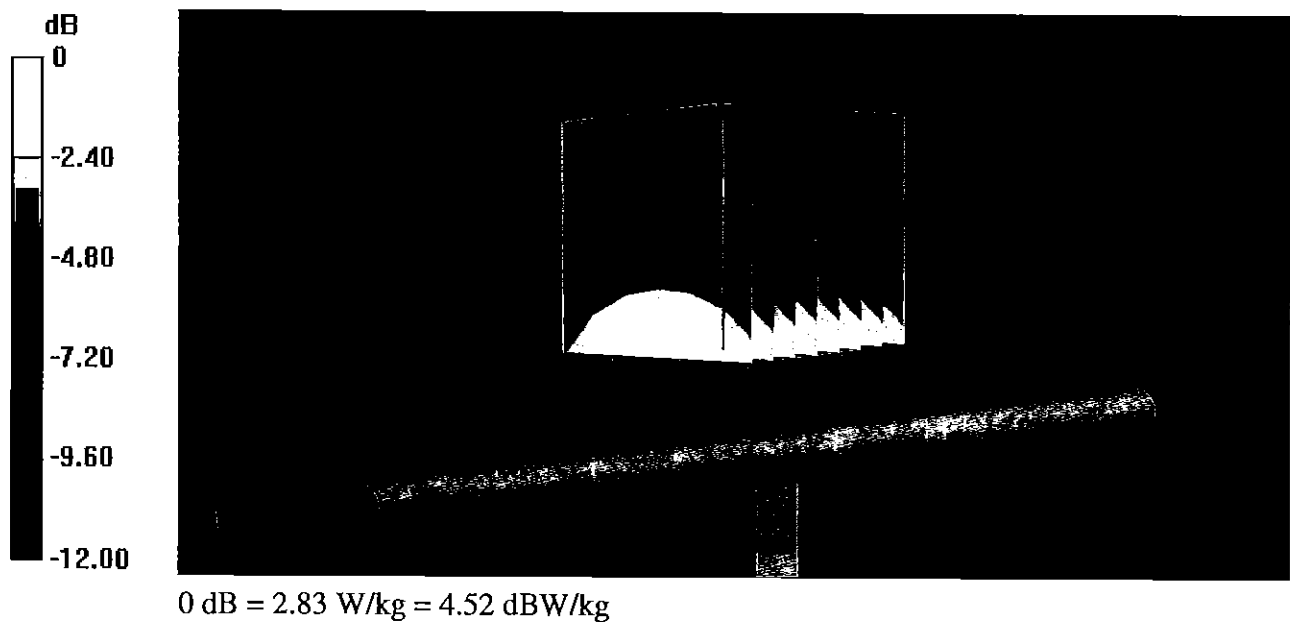

Impedance Measurement Plot for Body TSL

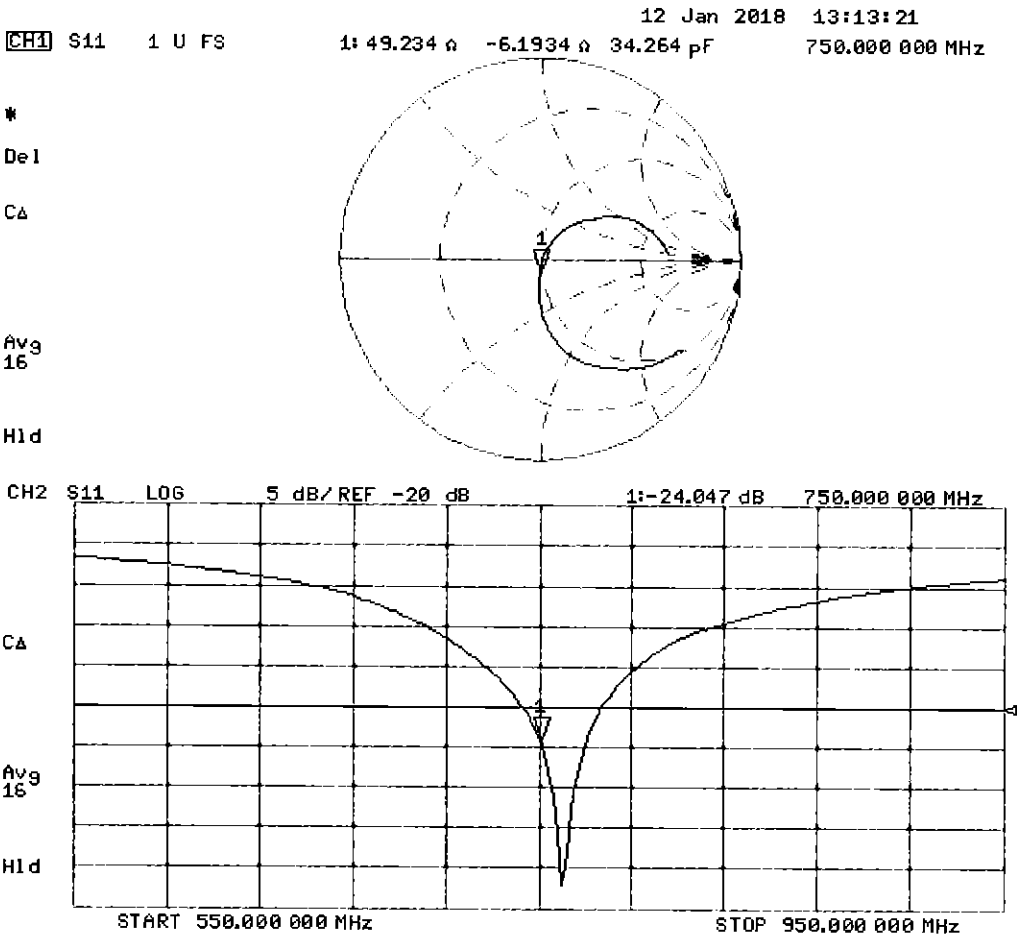

DASY5 Validation Report for SAM Head

Date: 15.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1003

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.9 \text{ S/m}$; $\epsilon_r = 44.2$; $\rho = 1000 \text{ kg/m}^3$

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.22, 10.22, 10.22); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: SAM Head
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

SAM Head/Top/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.79 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.89 W/kg

SAR(1 g) = 1.98 W/kg; SAR(10 g) = 1.33 W/kg

Maximum value of SAR (measured) = 2.58 W/kg

SAM Head/Mouth/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.85 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.94 W/kg

SAR(1 g) = 2.05 W/kg; SAR(10 g) = 1.38 W/kg

Maximum value of SAR (measured) = 2.62 W/kg

SAM Head/Neck/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.29 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.78 W/kg

SAR(1 g) = 2.01 W/kg; SAR(10 g) = 1.38 W/kg

Maximum value of SAR (measured) = 2.56 W/kg


SAM Head/Ear/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 51.01 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 g) = 1.67 W/kg; SAR(10 g) = 1.15 W/kg

Maximum value of SAR (measured) = 2.11 W/kg

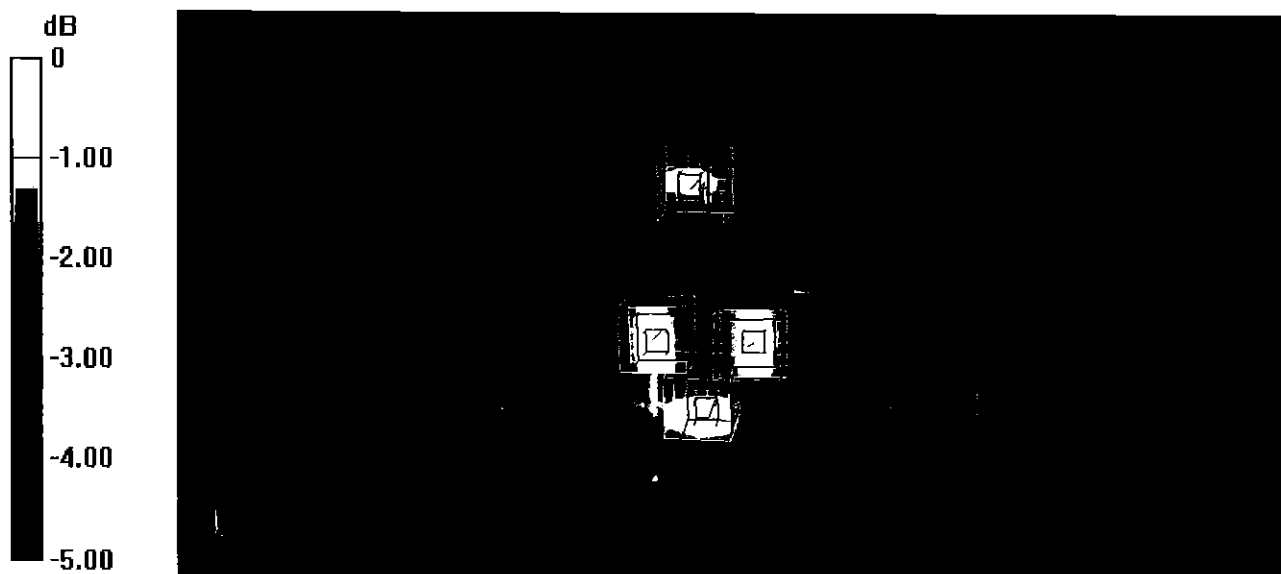

0 dB = 2.58 W/kg = 4.12 dBW/kg



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **D835V2-4d133_Jul17**

CALIBRATION CERTIFICATE

Object **D835V2 - SN:4d133**

*PN ✓
8/3/2017*

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **July 11, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-May-17 (No. EX3-7349_May17)	May-18
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Johannes Kurikka** Function: **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** Technical Manager

[Signature]

Issued: July 12, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.8 $\pm$ 6 %	0.91 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.41 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.52 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.54 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.10 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	54.8 $\pm$ 6 %	1.01 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.43 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.41 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.58 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.16 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.0 Ω - 2.9 j Ω
Return Loss	- 30.4 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.7 Ω - 6.8 j Ω
Return Loss	- 22.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.196 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 22, 2011

DASY5 Validation Report for Head TSL

Date: 11.07.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d133

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.07, 10.07, 10.07); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 62.84 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.74 W/kg

SAR(1 g) = 2.41 W/kg; SAR(10 g) = 1.54 W/kg

Maximum value of SAR (measured) = 3.28 W/kg



0 dB = 3.28 W/kg = 5.16 dBW/kg

Impedance Measurement Plot for Head TSL

11 Jul 2017 13:58:45

CH1 S11 1 U FS

1: 50.998 Ω -2.8750 Ω 66.297 pF

835.000 000 MHz


✻

De l

C_Δ

Av 9
16

PH

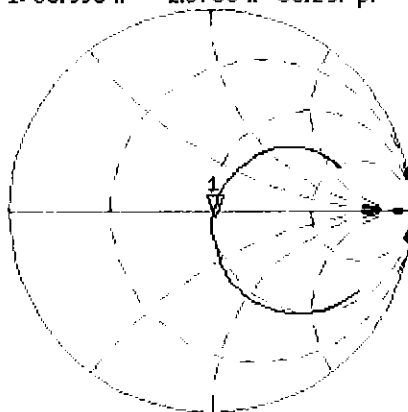

CH2 S11 LOG

LOG

5 dB/REF -20 dB


1:-30.411 dB.

835.000 000 MHz

C_Δ

Aug
16

H1d

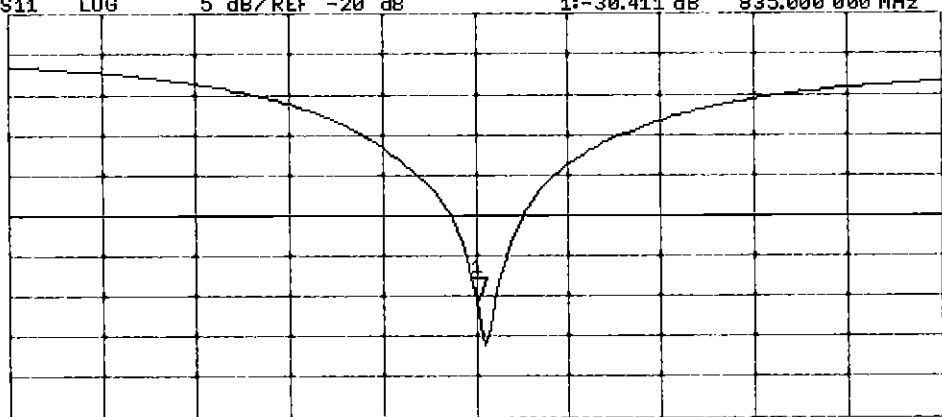

START 635.000 000 MHz

STOP 1 035.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 11.07.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d133

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 1.01$ S/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.2, 10.2, 10.2); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.25 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.67 W/kg

SAR(1 g) = 2.43 W/kg; SAR(10 g) = 1.58 W/kg

Maximum value of SAR (measured) = 3.21 W/kg

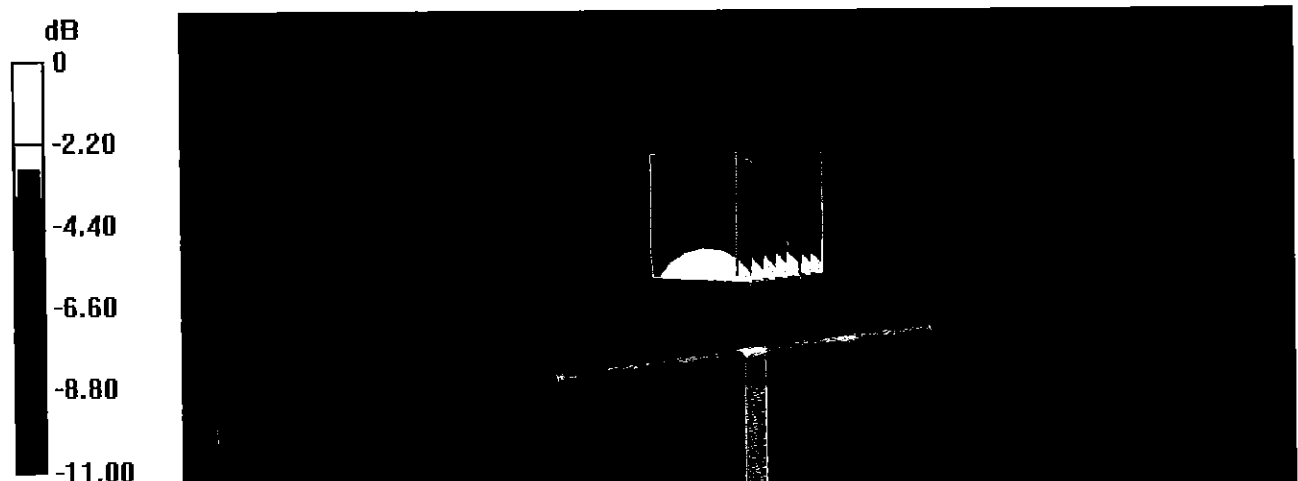

0 dB = 3.21 W/kg = 5.07 dBW/kg

Impedance Measurement Plot for Body TSL

11 Jul 2017 13:57:15
 [CH1] S11 1 U FS 1: 46.736 Ω -6.7871 Ω 28.083 pF 835.000 000 MHz


*

De1

CA

Avg
16

H1d

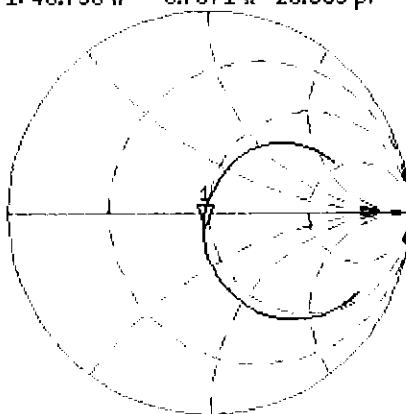


CH2 S11 LOG 5 dB/REF -20 dB 1:-22.199 dB 835.000 000 MHz

CA

Avg
16

H1d

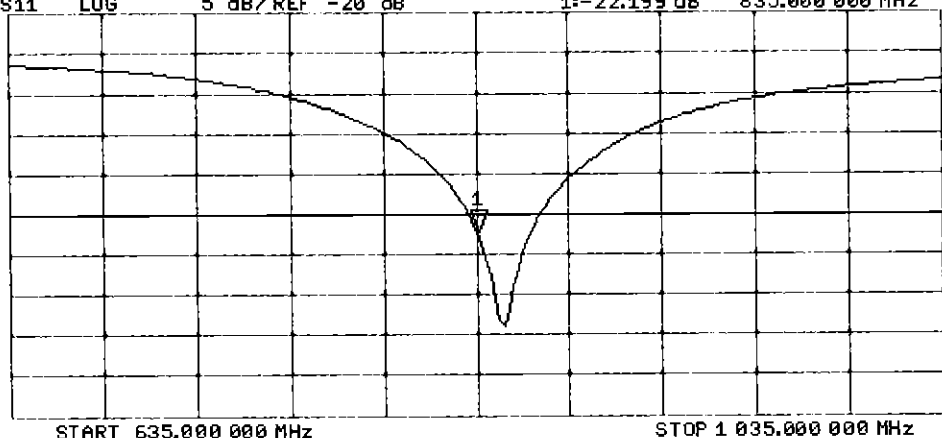



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D835V2-4d132_Jan18**

CALIBRATION CERTIFICATE

Object **D835V2 - SN:4d132**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **January 15, 2018**

BNV
01-25-2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Leif Klysner** Name: **Leif Klysner** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Function: **Technical Manager**

Signature
Leif Klysner
Katja Pokovic

Issued: January 15, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5.0 mm	
Frequency	835 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.7 $\pm$ 6 %	0.92 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.39 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.36 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.55 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.10 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	54.8 $\pm$ 6 %	0.99 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.47 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.71 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.62 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.39 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.8 Ω - 2.9 j Ω
Return Loss	- 29.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.4 Ω - 5.7 j Ω
Return Loss	- 23.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.386 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 22, 2011

Appendix (Additional assessments outside the scope of SCS 0108)

Measurement Conditions

DASY system configuration, as far as not given on page 1 and 3.

Phantom	SAM Head Phantom	For usage with cSAR3DV2-R/L
---------	------------------	-----------------------------

SAR result with SAM Head (Top)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.41 W/kg $\pm$ 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.58 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.21 W/kg $\pm$ 16.9 % (k=2)

SAR result with SAM Head (Mouth)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.47 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.69 W/kg $\pm$ 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.64 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.45 W/kg $\pm$ 16.9 % (k=2)

SAR result with SAM Head (Neck)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.35 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.22 W/kg $\pm$ 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.59 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.25 W/kg $\pm$ 16.9 % (k=2)

SAR result with SAM Head (Ear)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.03 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	7.96 W/kg $\pm$ 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.39 W/kg $\pm$ 16.9 % (k=2)

DASY5 Validation Report for Head TSL

Date: 08.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d132

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.9, 9.9, 9.9); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 63.23 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.64 W/kg

SAR(1 g) = 2.39 W/kg; SAR(10 g) = 1.55 W/kg

Maximum value of SAR (measured) = 3.22 W/kg




0 dB = 3.22 W/kg = 5.08 dBW/kg

Impedance Measurement Plot for Head TSL

8 Jan 2018 16:29:07
 [CH1] S11 1 U FS 1: 51.768 Ω -2.8984 Ω 65.761 pF 835.000 000 MHz

*
 Del
 Cor

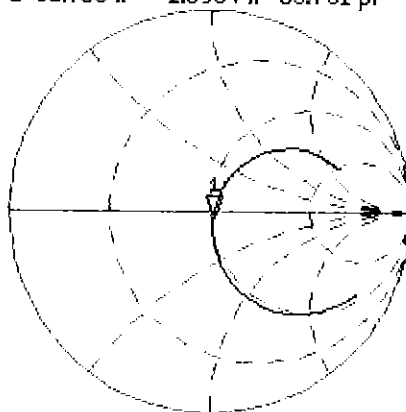

Avg
 16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-29.535 dB 835.000 000 MHz

Cor

Avg
 16

H1d

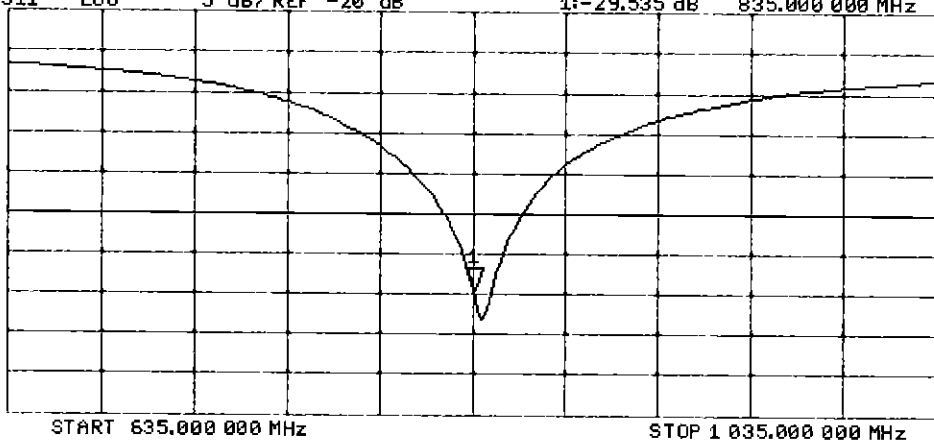

DASY5 Validation Report for Body TSL

Date: 08.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d132

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.05, 10.05, 10.05); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 60.55 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.66 W/kg

SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.62 W/kg

Maximum value of SAR (measured) = 3.24 W/kg

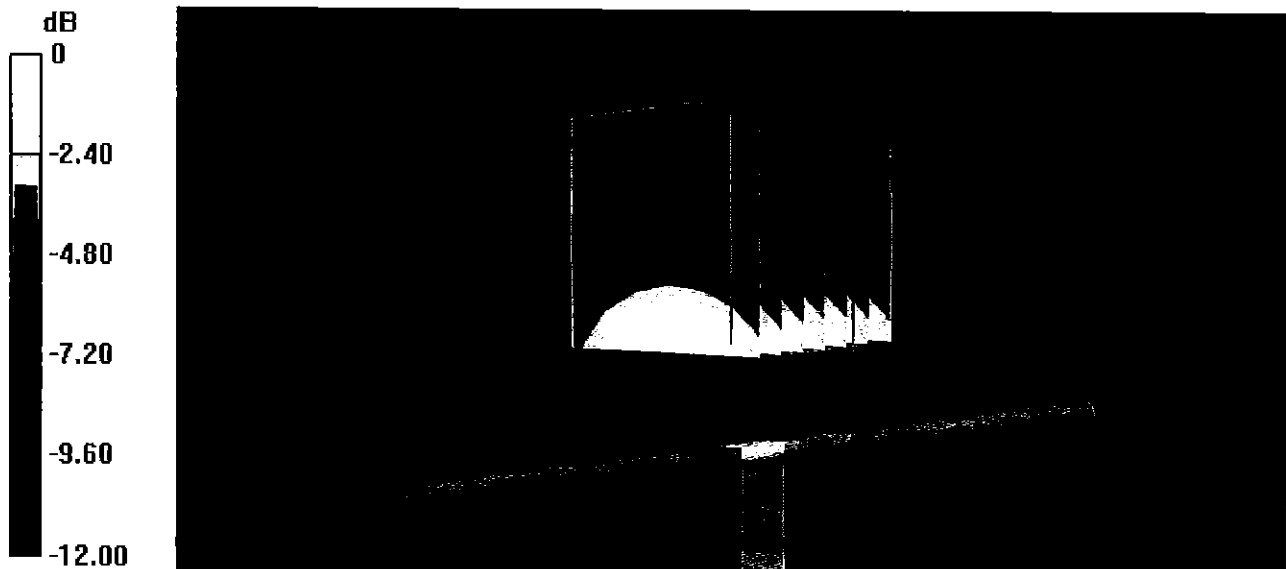


0 dB = 3.24 W/kg = 5.11 dBW/kg


Impedance Measurement Plot for Body TSL

8 Jan 2018 16:27:09
[CH1] S11 1 U FS 1: 47.447 Ω -5.6680 Ω 33.628 pF 835.000 000 MHz

*
De1
Cor

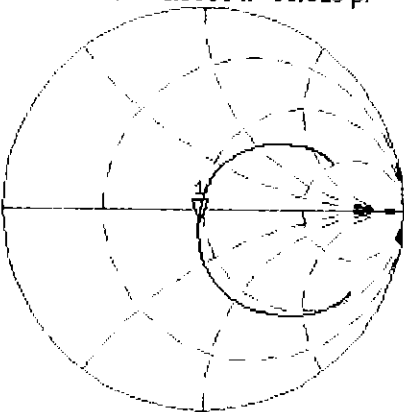

Avg
16
H1d

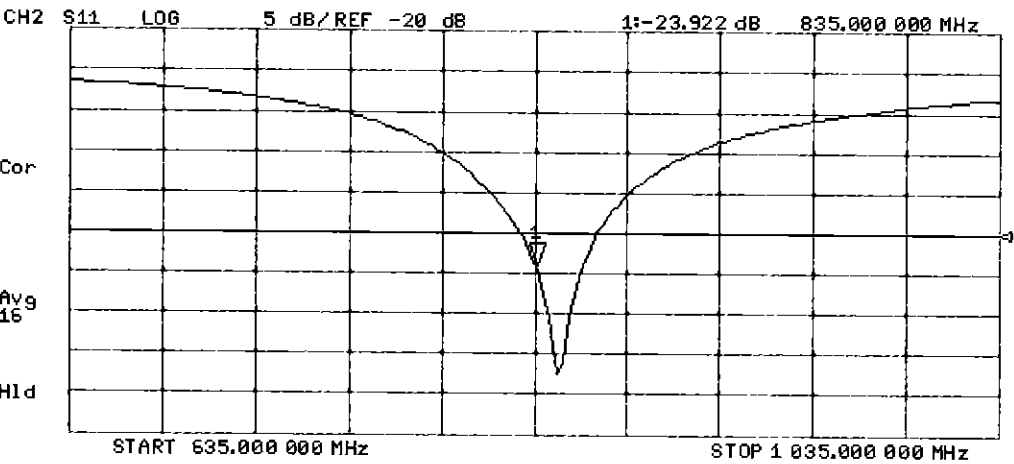

DASY5 Validation Report for SAM Head

Date: 15.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d132

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.94 \text{ S/m}$; $\epsilon_r = 44.1$; $\rho = 1000 \text{ kg/m}^3$

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.9, 9.9, 9.9); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: SAM Head
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

SAM Head/Top/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 61.00 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.56 W/kg

SAR(1 g) = 2.4 W/kg; SAR(10 g) = 1.58 W/kg

Maximum value of SAR (measured) = 3.16 W/kg

SAM Head/Mouth/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 60.99 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.65 W/kg

SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.64 W/kg

Maximum value of SAR (measured) = 3.19 W/kg

SAM Head/Neck/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 59.20 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.33 W/kg

SAR(1 g) = 2.35 W/kg; SAR(10 g) = 1.59 W/kg

Maximum value of SAR (measured) = 3.04 W/kg


SAM Head/Ear/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 55.03 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.90 W/kg

SAR(1 g) = 2.03 W/kg; SAR(10 g) = 1.37 W/kg

Maximum value of SAR (measured) = 2.61 W/kg

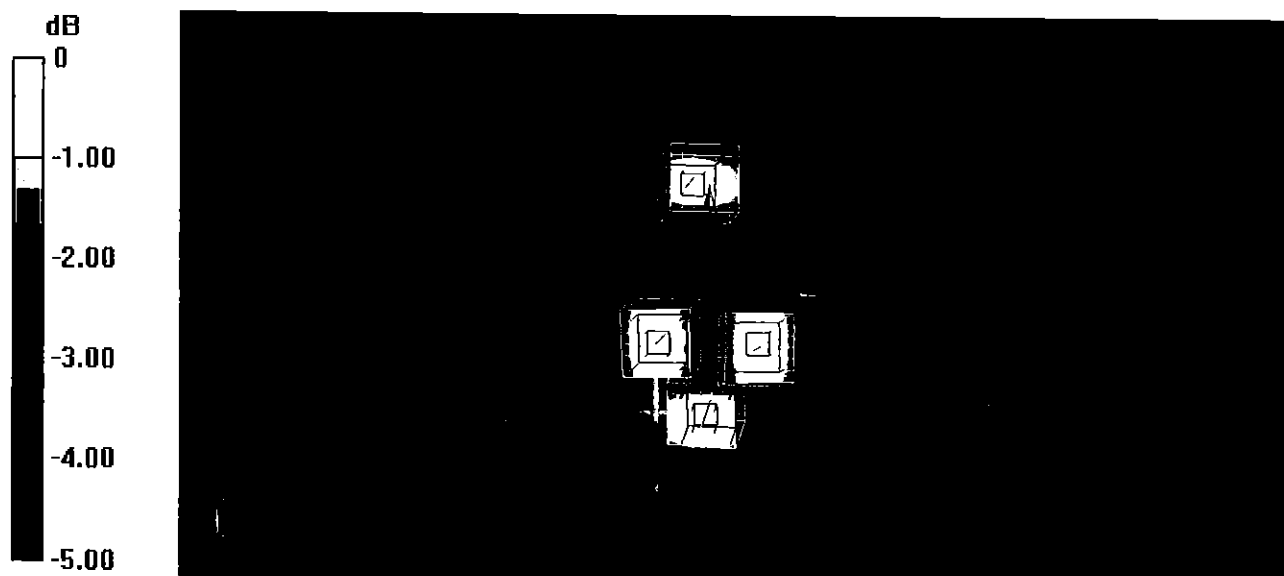

0 dB = 2.61 W/kg = 4.17 dBW/kg