






Test Report No.:
FCCSZ2024-0055-RF4

RF Test Report

FCC ID : 2AYHY-EM410
EUT : Radar Distance/Level Sensor
MODEL : EM410-RDL-868M/915M
BRAND NAME : Milesight
APPLICANT : Xiamen Milesight IoT Co., Ltd.
Classification of Test : N/A

CVC Testing Technology (Shenzhen) Co., Ltd.



Applicant		Name: Xiamen Milesight IoT Co., Ltd.	
		Address: Building C09, Software Park Phase III, Xiamen 361024, Fujian, China	
Manufacturer		Name: Xiamen Milesight IoT Co., Ltd.	
		Address: Building C09, Software Park Phase III, Xiamen 361024, Fujian, China	
Equipment Under Test		Name: Radar Distance/Level Sensor	
		Model/Type: EM410-RDL-868M/915M	
		Additional Model: NB410-RDL-868M/915M, EM410-RDL-868M, NB410-RDL-868M, EM410-RDL-915M, NB410-RDL-915M, EM410, NB410	
		Serial NO.: N/A	
		Sample NO.: N/A	
Date of Receipt.	2024.07.18	Date of Testing	2024.07.18-2025.01.08
Test Specification		Test Result	
FCC Part 15, Subpart C, Section 15.247		PASS	
Evaluation of Test Result	The equipment under test was found to comply with the requirements of the standards applied.		
	Seal of CVC		
	Issue Date: 2025.01.08		
Compiled by:  Liang Jiatong	Reviewed by:  Mo Xianbiao	Approved by:  Dong Sanbi	
Name Signature	Name Signature	Name Signature	
Other Aspects: NONE.			
Abbreviations: OK, Pass= passed Fail = failed N/A= not applicable EUT= equipment, sample(s) under tested			

This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST LOCATION	8
2 GENERAL INFORMATION	9
2.1 GENERAL PRODUCT INFORMATION	9
2.2 OTHER INFORMATION	10
2.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	13
2.5 DESCRIPTION OF SUPPORT UNITS	13
3 TEST TYPES AND RESULTS	14
3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	14
3.2 6dB BANDWIDTH MEASUREMENT	27
3.3 CONDUCTED OUTPUT POWER	29
3.4 POWER SPECTRAL DENSITY MEASUREMENT	31
3.5 OUT OF BAND EMISSION MEASUREMENT	33
4 PHOTOGRAPHS OF TEST SETUP	36



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FCCSZ2024-0055-RF4	Original release	2025.01.08



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Meet the requirement of limit.



1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial Number	Cal. interval	Cal. Due
Antenna Port Conducted Test					
Signal&Spectrum Analyzer	Rohde&Schwarz	FSV 30	104408	1 year	2025.5.22
#4Shielding room	MORI	443	N/A	3 year	2026.5.16
Wideband radio communication tester	Rohde&Schwarz	CMW 500	168588	1 year	2025.5.24
Analog signal Generator(100kHz~12.75GHz)	Rohde&Schwarz	SMB 100A	181882	1 year	2025.4.27
Vector signal Generator(8kHz~6GHz)	Rohde&Schwarz	SMBV 100B	101846	1 year	2025.4.28
DC power supply	Rohde&Schwarz	HMC8041-G	101203	1 year	2025.4.29
RF control unit(2/3/4/5G)	Tonscend	JS0806-1	CS0300027	1 year	2025.4.28
Automatic filter bank(2/3/4G)	Tonscend	JS0806-F	CS0300028	1 year	2025.4.28
Automatic filter bank(5G)	Tonscend	JS0806-F-5G NR	N/A	1 year	2025.4.28
Temperature and humidity meter	UNI-T	A10T	C193561464	1 year	2025.4.27
Radio Communication Analyzer	Anritsu	MT8821C	6272374548	1 year	2025.1.09
Constant temperature humidity chamber	TEELONG	TL-HW-225B	20220518-01	1 year	2025.5.24
Radio Communication Test Station	Anritsu	MT8000A	6272354169	1 year	2025.1.09
Radiation Spurious					/
Signal&Spectrum Analyzer	Rohde&Schwarz	FSV 40	101898	1 year	2025.4.28
EMI Test Receiver	Rohde&Schwarz	ESR3	102693	1 year	2025.5.24
Antenna(30MHz~1001MHz)	SCHWARZBECK	VULB 9168	1133	1 year	2025.2.21
Horn antenna(1GHz-18GHz)	ETS	3117	227611	1 year	2025.3.24
Horn antenna(18GHz-40GHz)	QMS	QMS-00880	22051	1 year	2025.3.24
3m anechoic chamber	MORI	966	CS0300011	3 year	2026.5.18
Filter group(RSE-BT/WiFi)	Rohde&Schwarz	WiFi /BT Variant 1	100820	1 year	2025.4.28
Filter group(RSE-Cellular)	Rohde&Schwarz	Cellular Variant 1	100768	1 year	2025.4.28
Preamplifier(1GHz-18GHz)	Rohde&Schwarz	SCU-18F	100799	1 year	2025.4.28
Preamplifier(1GHz-18GHz)	Rohde&Schwarz	SCU-18F	100801	1 year	2025.4.28
Preamplifier(18Gz-40GHz)	Rohde&Schwarz	SCU-40A	101209	1 year	2025.4.28
#2 control room	MORI	433	CS0200059	3 year	2026.5.16
Temperature and humidity meter	/	C193561517	C193561517	1 year	2025.4.27
Conducted emission					
EMI Test Receiver	Rohde&Schwarz	ESR3	102693	1 year	2025/5/24
limiter (10 dB)	Rohde&Schwarz	ESH3-Z2	102824	1 year	2025/5/15
Voltage probe	Rohde&Schwarz	CVP9222C	28	1 year	2025/4/27
Current probe	Rohde&Schwarz	EZ-17	101442	1 year	2025/4/28
ISN network	Rohde&Schwarz	ENV 81	100401	1 year	2025/4/28
ISN network	Rohde&Schwarz	ENV 81 Cat6	101896	1 year	2025/4/28
#1Shielding room	MORI	854	N/A	3 year	2026/5/16
LISN	SCHWARZBECK	NSLK 8129	5021	1 year	2025/4/27
Temperature and humidity meter	/	C193561430	C193561430	1 year	2025/4/27



1.2 MEASUREMENT UNCERTAINTY


Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

No.	Item	Measurement Uncertainty
2	Radiated emission 9kHz-30MHz	+/-5.6 dB
3	Radiated emission 30MHz-1GHz	+/-4.6 dB
4	Radiated emission 1GHz-18GHz	+/-4.4 dB
5	Radiated emission 18GHz-40GHz	+/-5.1 dB
6	RF power	+/-0.9 dB
7	Power Spectral Density	+/-0.8 dB
8	Conducted spurious emissions	+/-2.7 dB
9	Transmission Time	+/-0.27%
10	Occupied Bandwidth	+/-1.86%

Remark: 95% Confidence Levels, k=2.

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed.

The measurement uncertainty is mentioned in this test report, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong.

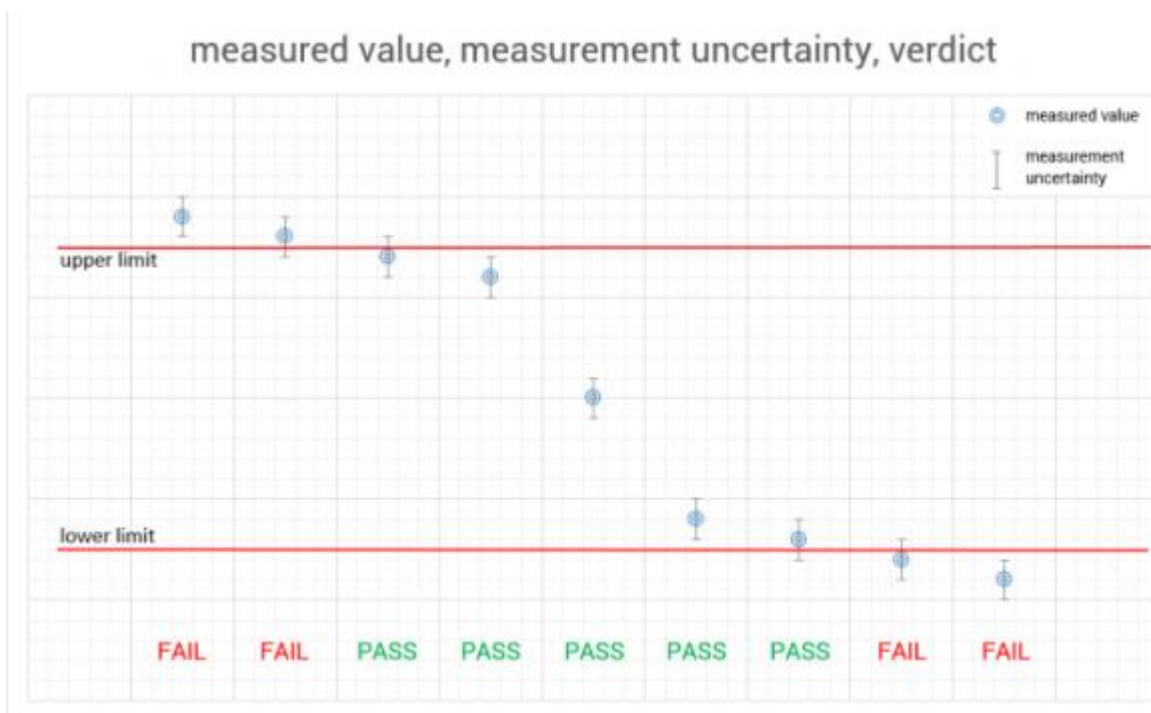



1.3 TEST LOCATION

The tests and measurements refer to this report were performed by EMC testing Lab. of CVC Testing Technology (Shenzhen) Co., Ltd.

Lab Address: No. 1301-14&16, Guanguang Road, Xinlan Community, Guanlan Subdistrict, Longhua District, Shenzhen, Guangdong, China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

FCC(Test firm designation number: CN1363)

IC(Test firm CAB identifier number: CN0137)

CNAS(Test firm designation number: L16091)



2 GENERAL INFORMATION

2.1 GENERAL PRODUCT INFORMATION

PRODUCT	Radar Distance/Level Sensor
BRAND	Milesight
MODEL	EM410-RDL-868M/915M
ADDITIONAL MODEL	NB410-RDL-868M/915M, EM410-RDL-868M,NB410-RDL-868M,EM410-RDL-915M,NB410-RDL-915M,EM410,NB410
POWER SUPPLY	DC 3.6V(3.6V*1*lithium battery D*ER34615) from battery
MODULATION TYPE	DTS
OPERATING FREQUENCY	903MHz~926.9MHz
NUMBER OF CHANNEL	15
PEAK OUTPUT POWER	-5.7dBm (Max. Measured)
ANTENNA TYPE (Remark 3)	-3.24dBi gain(Internal PCB antenna) 0.83dBi gain(External antenna)
I/O PORTS	refer to the User's Manual
CABLE SUPPLIED	N/A
Remark: 1. For more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report. 3. Since the above data and/or information is provided by the client, CVC is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion. 4. EUT photo refer to the report (Report NO.: FCCSZ2024-0055-EUT).	



2.2 OTHER INFORMATION

Operating frequency of each channel

LORA DR8					
CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	903	6	912.6	12	925.7
1	904.6	7	914.2	13	926.3
2	906.2	8	923.3	14	926.9
3	907.8	9	923.9	--	--
4	909.4	10	924.5	--	--
5	911.0	11	925.1	--	--

Note: The channels which were indicated in bold type of the above channel list were selected as representative test channel. Therefor only the data of the test channels were recorded in this report.



2.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, xyz axis and antenna ports

EUT CONFIGURE MODE	APPLICABLE TEST ITEMS				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	√	√	LORA link

Where **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission

RE≥1G: Radiated Emission above 1GHz
APCM: Antenna Port Conducted Measurement

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ The worst case was found when positioned on x axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE
A	0 to 14	0	FHSS	DR8

For the test results, only the worst case was shown in test report.

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ The worst case was found when positioned on x axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE
A	0 to 14	0,7,14	FHSS	DR8



ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE
A	0 to 14	0,7,14	FHSS	DR8

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE (SYSTEM)	TESTED BY
RE<1G	24.5deg. C, 54%RH	AC 120V/60Hz	Wang Zhiming
RE≥1G	24.5deg. C, 54%RH	AC 120V/60Hz	Wang Zhiming
PLC	25.2deg. C, 55%RH	AC 120V/60Hz	Zhou Ye
APCM	25.2deg. C, 55%RH	AC 120V/60Hz	Cai Jianyu



2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product, according to the specifications of the manufacturers. It must comply with the requirements of the following standards:

FCC PART 15, Subpart C. Section 15.247
KDB 558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10-2020

All test items have been performed and recorded as per the above standards

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support Equipment							
NO	Description	Brand	Model No.	Serial Number	Supplied by		
1	N/A	N/A	N/A	N/A	N/A		
Support Cable							
NO	Description	Quantity (Number)	Length (cm)	Detachable (Yes/ No)	Shielded (Yes/ No)	Cores (Number)	Supplied by
1	N/A	N/A	N/A	N/A	N/A	N/A	N/A



3 TEST TYPES AND RESULTS

3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

3.1.1 Limit

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (Microvolts/Meter)	MEASUREMENT DISTANCE (Meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE: 1. The lower limit shall apply at the transition frequencies.
NOTE: 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
NOTE: 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

3.1.2 Measurement procedure


- The EUT was placed on the top of a rotating table 1.5 meters(above 1GHz) and 0.8 meters(below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

3.1.3 Test setup


Below 30MHz Test Setup:

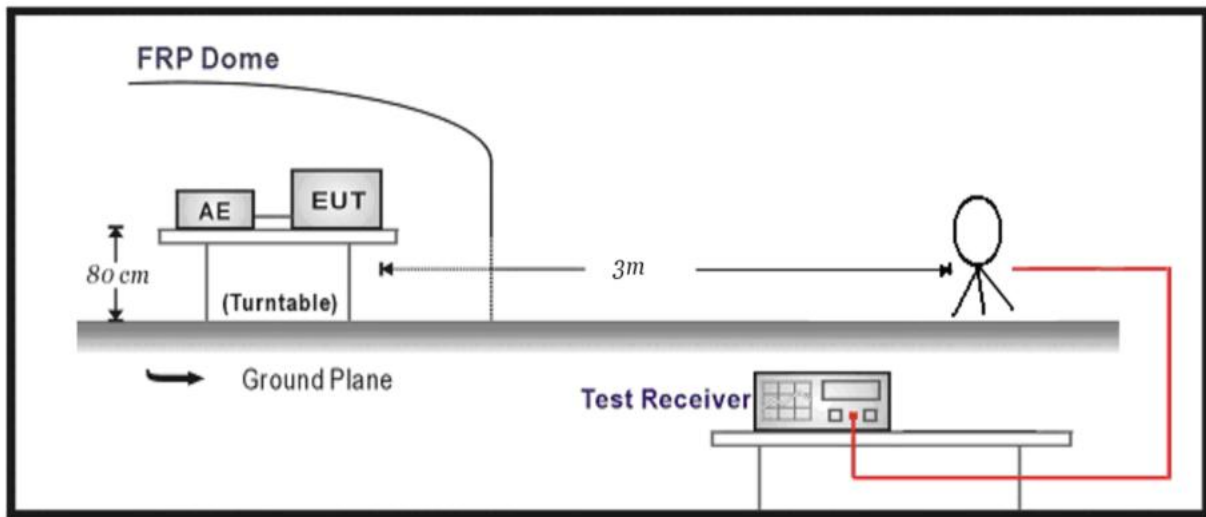

Below 1GHz Test Setup:

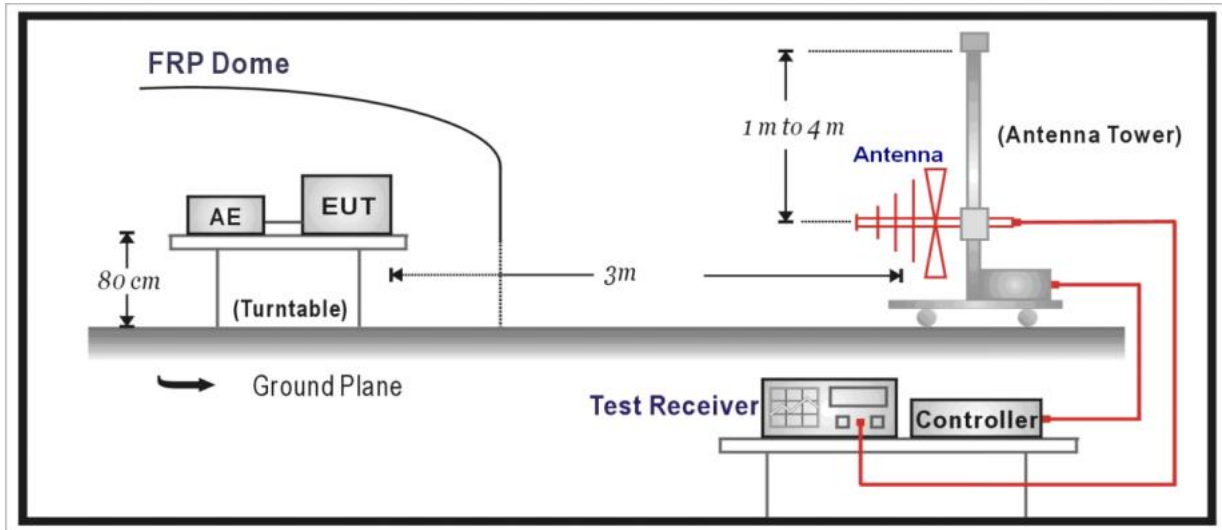

Above 1GHz Test Setup:

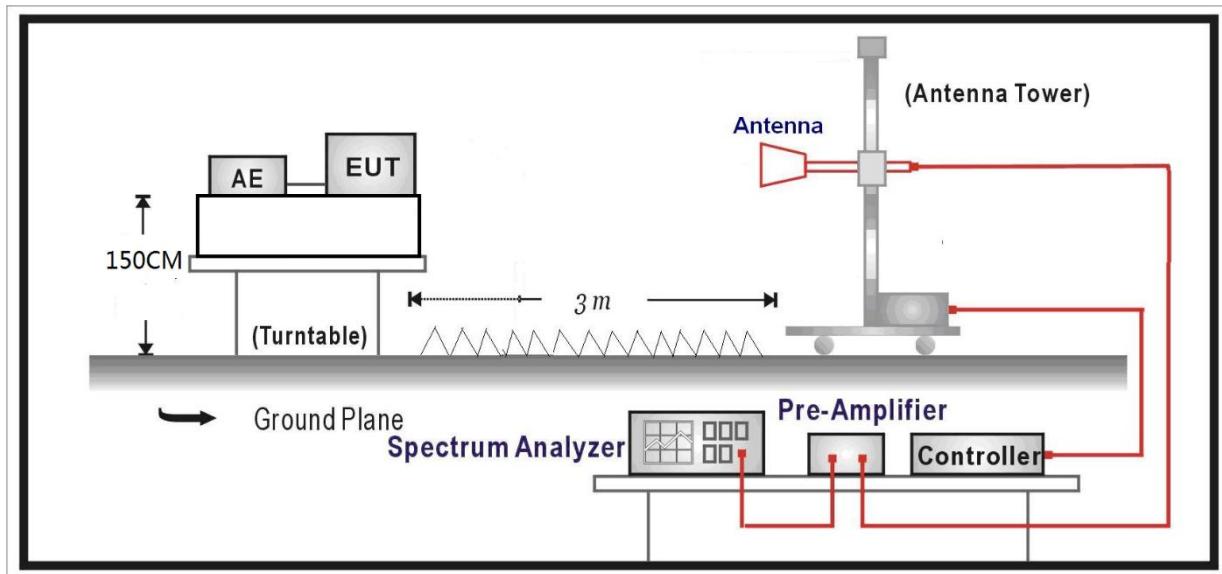




3.1.4 Test results

Internal PCB antenna:

Worst Test Mode	LORA Link	Channel	CH 0
Frequency Range	9KHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Horizontal

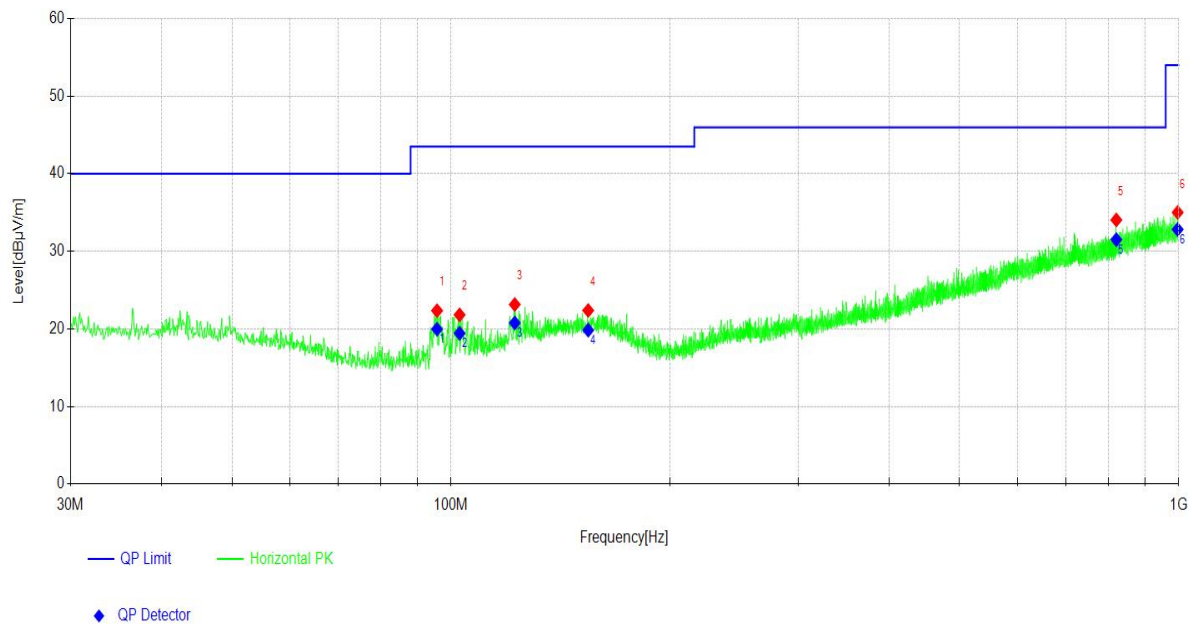


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]
1	95.676	5.96	16.39	22.35	43.50	21.15	300	279
2	102.757	4.79	17.03	21.82	43.50	21.68	100	277
3	122.353	4.19	18.96	23.15	43.50	20.35	100	121
4	154.366	1.73	20.65	22.38	43.50	21.12	100	202
5	821.114	5.39	28.66	34.05	46.00	11.95	300	140
6	996.896	4.78	30.24	35.02	54.00	18.98	200	268

Remark: 1. 9KHz~30MHz have been test and test data more than 20dB margin.
2. The emission levels of other frequencies were greater than 20dB margin.
3. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB).
4. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
5. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Worst Test Mode	LORA Link	Channel	CH 0
Frequency Range	9KHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Vertical

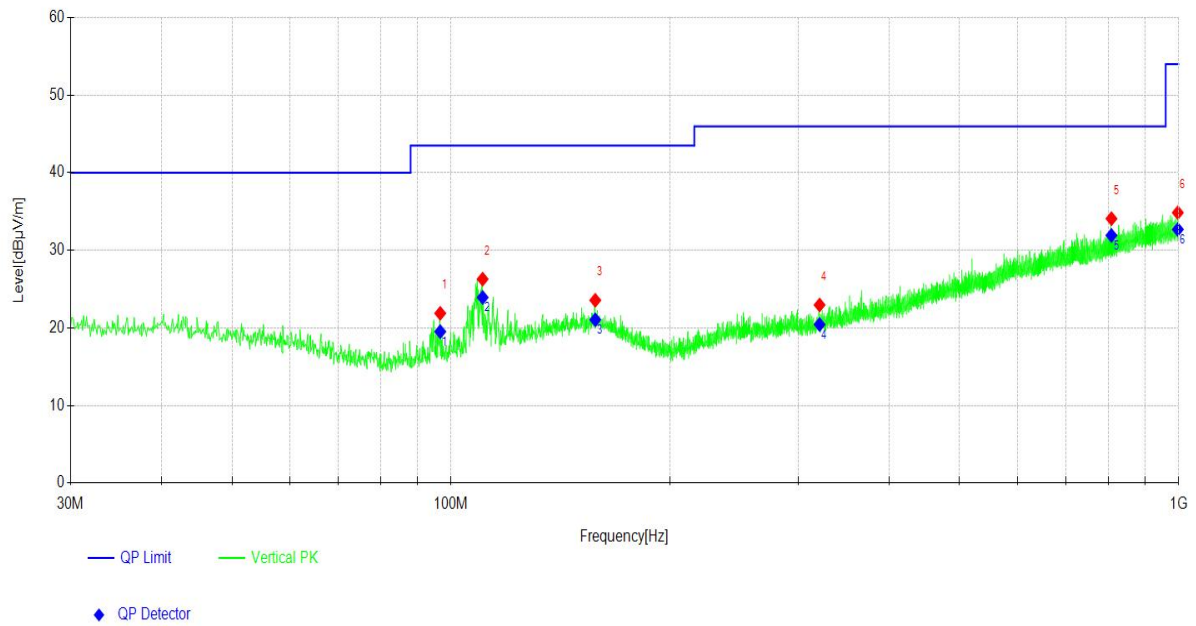

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]
1	96.646	5.41	16.47	21.88	43.50	21.62	300	334
2	110.518	8.54	17.75	26.29	43.50	17.21	300	105
3	157.859	2.85	20.72	23.57	43.50	19.93	200	241
4	321.029	2.71	20.25	22.96	46.00	23.04	300	70
5	808.503	5.54	28.55	34.09	46.00	11.91	100	358
6	997.478	4.62	30.24	34.86	54.00	19.14	100	168


Remark: 1. 9KHz~30MHz have been test and test data more than 20dB margin.
2. The emission levels of other frequencies were greater than 20dB margin.
3. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB).
4. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
5. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



External antenna:

Worst Test Mode	LORA Link	Channel	CH 0
Frequency Range	9KHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Horizontal

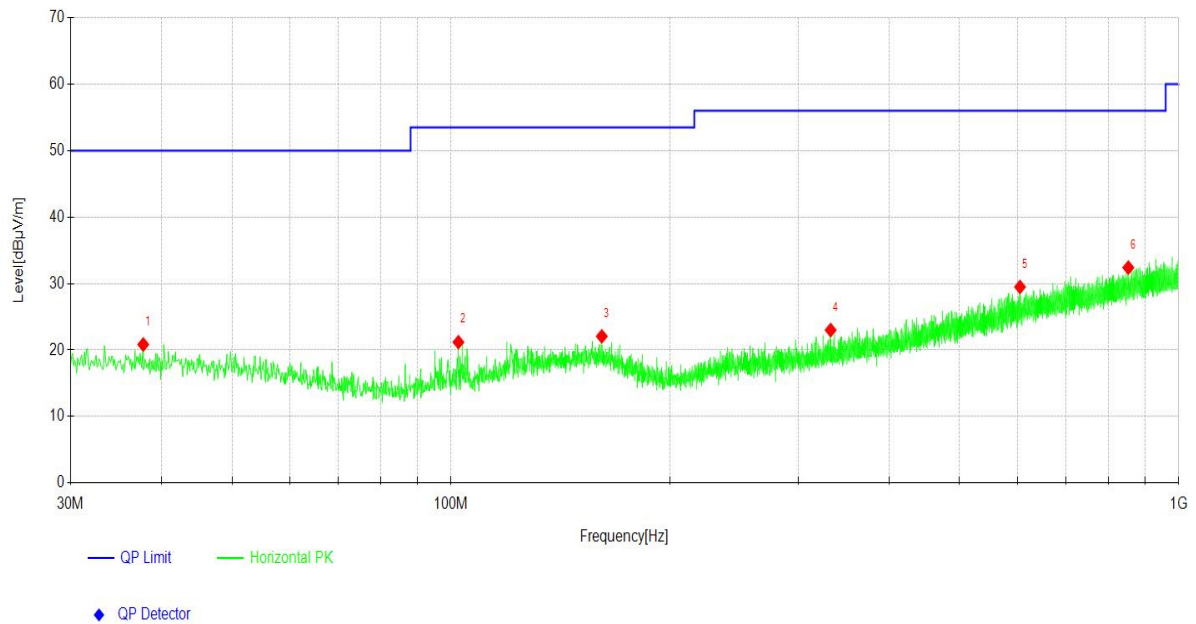


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]
1	37.761	1.08	19.76	20.84	50.00	29.16	200	200
2	102.369	4.21	16.99	21.20	53.50	32.30	200	170
3	161.157	1.48	20.59	22.07	53.50	31.43	200	140
4	332.476	2.48	20.53	23.01	56.00	32.99	200	210
5	605.365	3.47	26.03	29.50	56.00	26.50	200	100
6	852.836	3.54	28.87	32.41	56.00	23.59	200	260

Remark: 1. 9KHz~30MHz have been test and test data more than 20dB margin.
2. The emission levels of other frequencies were greater than 20dB margin.
3. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB).
4. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
5. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Worst Test Mode	LORA Link	Channel	CH 0
Frequency Range	9KHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Vertical

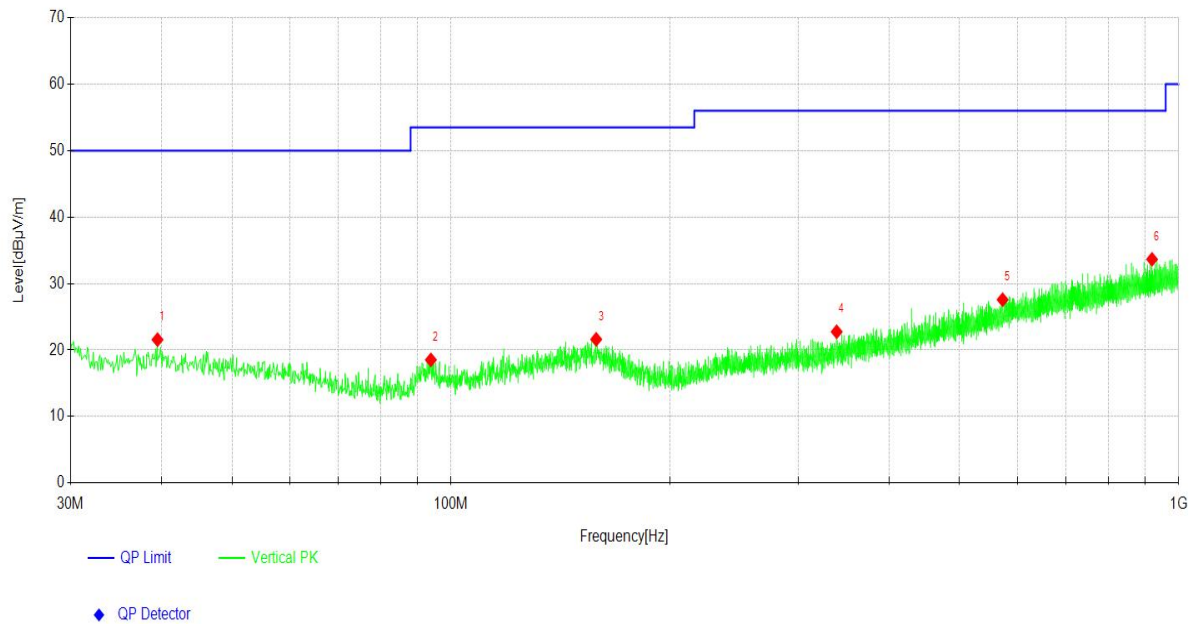

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]
1	39.507	1.72	19.85	21.57	50.00	28.43	100	70
2	93.832	2.29	16.24	18.53	53.50	34.97	100	160
3	158.344	0.90	20.72	21.62	53.50	31.88	100	110
4	338.879	2.10	20.66	22.76	56.00	33.24	100	230
5	572.963	2.37	25.21	27.58	56.00	28.42	100	320
6	919.288	3.74	29.92	33.66	56.00	22.34	100	20

Remark: 1. 9KHz~30MHz have been test and test data more than 20dB margin.
2. The emission levels of other frequencies were greater than 20dB margin.
3. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB).
4. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
5. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



(Internal PCB antenna) ABOVE 1GHz DATA

Channel		CH 0		Frequency		903MHz	
Frequency Range		1GHz~9.3G		Detector Function		PK/AV	
Horizontal							
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector
1	1441.84	47.05	3.38	50.43	74.00	23.57	PK
2	1481.25	37.72	3.50	41.22	54.00	12.78	AV
3	3135.97	36.18	4.65	40.83	54.00	13.17	AV
4	3169.64	45.36	4.46	49.82	74.00	24.18	PK
5	5376.90	44.21	13.03	57.24	74.00	16.76	PK
6	5469.97	34.83	13.22	48.05	54.00	5.95	AV
Vertical							
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector
1	1896.49	46.37	6.43	52.80	74.00	21.20	PK
2	1908.89	37.43	6.56	43.99	54.00	10.01	AV
3	3596.04	36.18	6.42	42.60	54.00	11.40	AV
4	3619.80	44.88	6.99	51.87	74.00	22.13	PK
5	6009.24	34.54	14.36	48.90	54.00	5.10	AV
6	6146.20	43.98	14.04	58.02	74.00	15.98	PK
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dBuV/m] - Level [dBuV/m]							



Channel		CH 7		Frequency		914.2MHz	
Frequency Range		1GHz~9.3G		Detector Function		PK/AV	
Horizontal							
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector
1	1458.85	37.78	3.44	41.22	54.00	12.78	AV
2	1476.85	47.71	3.49	51.20	74.00	22.80	PK
3	3147.52	36.01	4.75	40.76	54.00	13.24	AV
4	3185.81	45.30	4.90	50.20	74.00	23.80	PK
5	5937.29	34.73	14.30	49.03	54.00	4.97	AV
6	6040.26	43.73	14.43	58.16	74.00	15.84	PK
Vertical							
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector
1	1734.27	47.38	5.02	52.40	74.00	21.60	PK
2	1751.68	37.08	5.14	42.22	54.00	11.78	AV
3	3264.36	44.77	5.09	49.86	74.00	24.14	PK
4	3278.88	36.02	5.06	41.08	54.00	12.92	AV
5	5407.59	34.80	13.37	48.17	54.00	5.83	AV
6	5437.95	44.67	12.76	57.43	74.00	16.57	PK
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]							



Channel		CH 14		Frequency		926.9MHz	
Frequency Range		1GHz~9.3G		Detector Function		PK/AV	
Horizontal							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector
1	1748.47	47.03	5.12	52.15	74.00	21.85	PK
2	1755.68	37.35	5.16	42.51	54.00	11.49	AV
3	3425.74	45.02	5.49	50.51	74.00	23.49	PK
4	3432.01	36.38	5.52	41.90	54.00	12.10	AV
5	5986.14	43.79	14.09	57.88	74.00	16.12	PK
6	6172.28	34.84	14.27	49.11	54.00	4.89	AV
Vertical							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector
1	1946.69	46.77	6.97	53.74	74.00	20.26	PK
2	1948.49	37.52	6.98	44.50	54.00	9.50	AV
3	3545.21	44.77	6.08	50.85	74.00	23.15	PK
4	3584.82	36.17	6.46	42.63	54.00	11.37	AV
5	6171.95	34.67	14.27	48.94	54.00	5.06	AV
6	6226.40	43.91	14.52	58.43	74.00	15.57	PK
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]							



(External antenna) ABOVE 1GHz DATA

Channel		CH 0		Frequency		903MHz	
Frequency Range		1GHz~9.3G		Detector Function		PK/AV	
Horizontal							
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector
1	1805.88	48.23	5.48	53.71	74.00	20.29	PK
2	1806.08	44.01	5.48	49.49	54.00	4.51	AV
3	3446.20	45.20	5.63	50.83	74.00	23.17	PK
4	3547.85	35.74	6.08	41.82	54.00	12.18	AV
5	6227.72	44.22	14.62	58.84	74.00	15.16	PK
6	6289.77	34.34	15.54	49.88	54.00	4.12	AV
Vertical							
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector
1	1805.88	40.91	5.48	46.39	54.00	7.61	AV
2	1860.49	46.16	6.07	52.23	74.00	21.77	PK
3	3622.77	45.04	6.85	51.89	74.00	22.11	PK
4	3709.57	36.03	6.90	42.93	54.00	11.07	AV
5	6291.75	43.76	15.38	59.14	74.00	14.86	PK
6	6294.39	34.38	15.11	49.49	54.00	4.51	AV
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]							



Channel	CH 7		Frequency		914.2MHz		
Frequency Range	1GHz~9.3G		Detector Function		PK/AV		
Horizontal							
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector
1	1828.28	44.47	5.72	50.19	54.00	3.81	AV
2	1828.48	48.08	5.72	53.80	74.00	20.20	PK
3	3430.69	44.91	5.48	50.39	74.00	23.61	PK
4	3498.02	36.32	5.58	41.90	54.00	12.10	AV
5	6204.29	44.55	14.44	58.99	74.00	15.01	PK
6	6238.28	34.09	15.25	49.34	54.00	4.66	AV
Vertical							
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector
1	1828.28	43.25	5.72	48.97	54.00	5.03	AV
2	1828.68	47.21	5.72	52.93	74.00	21.07	PK
3	3345.54	35.90	4.99	40.89	54.00	13.11	AV
4	3367.99	45.07	5.12	50.19	74.00	23.81	PK
5	5987.13	45.19	14.18	59.37	74.00	14.63	PK
6	6003.30	34.41	14.37	48.78	54.00	5.22	AV
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]							



Channel		CH 14		Frequency		926.9MHz	
Frequency Range		1GHz~9.3G		Detector Function		PK/AV	
Horizontal							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector
1	1853.69	43.77	5.99	49.76	54.00	4.24	AV
2	1853.89	48.82	5.99	54.81	74.00	19.19	PK
3	3403.63	44.84	5.25	50.09	74.00	23.91	PK
4	3426.40	35.89	5.49	41.38	54.00	12.62	AV
5	5335.31	35.37	12.62	47.99	54.00	6.01	AV
6	5456.77	43.77	13.10	56.87	74.00	17.13	PK
Vertical							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector
1	1853.69	47.16	5.99	53.15	74.00	20.85	PK
2	1853.89	40.82	5.99	46.81	54.00	7.19	AV
3	3596.70	36.61	6.43	43.04	54.00	10.96	AV
4	3605.94	45.20	6.47	51.67	74.00	22.33	PK
5	6755.52	31.05	10.93	41.98	74.00	32.02	PK
6	6798.81	21.63	11.14	32.77	54.00	21.23	AV
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dBuV/m] - Level [dBuV/m]							



3.2 6dB BANDWIDTH MEASUREMENT


3.2.1 Limits

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

3.2.2 Measurement procedure

- Set resolution bandwidth (RBW) = 100KHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


3.2.3 Test setup

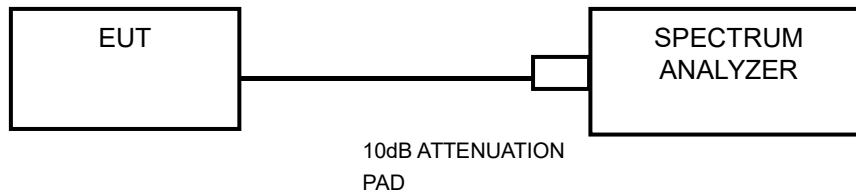



3.2.4 Test result

Mode	Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)
DR8	0	903.0	627	≥ 500
	7	914.2	625	≥ 500
	14	926.9	625	≥ 500

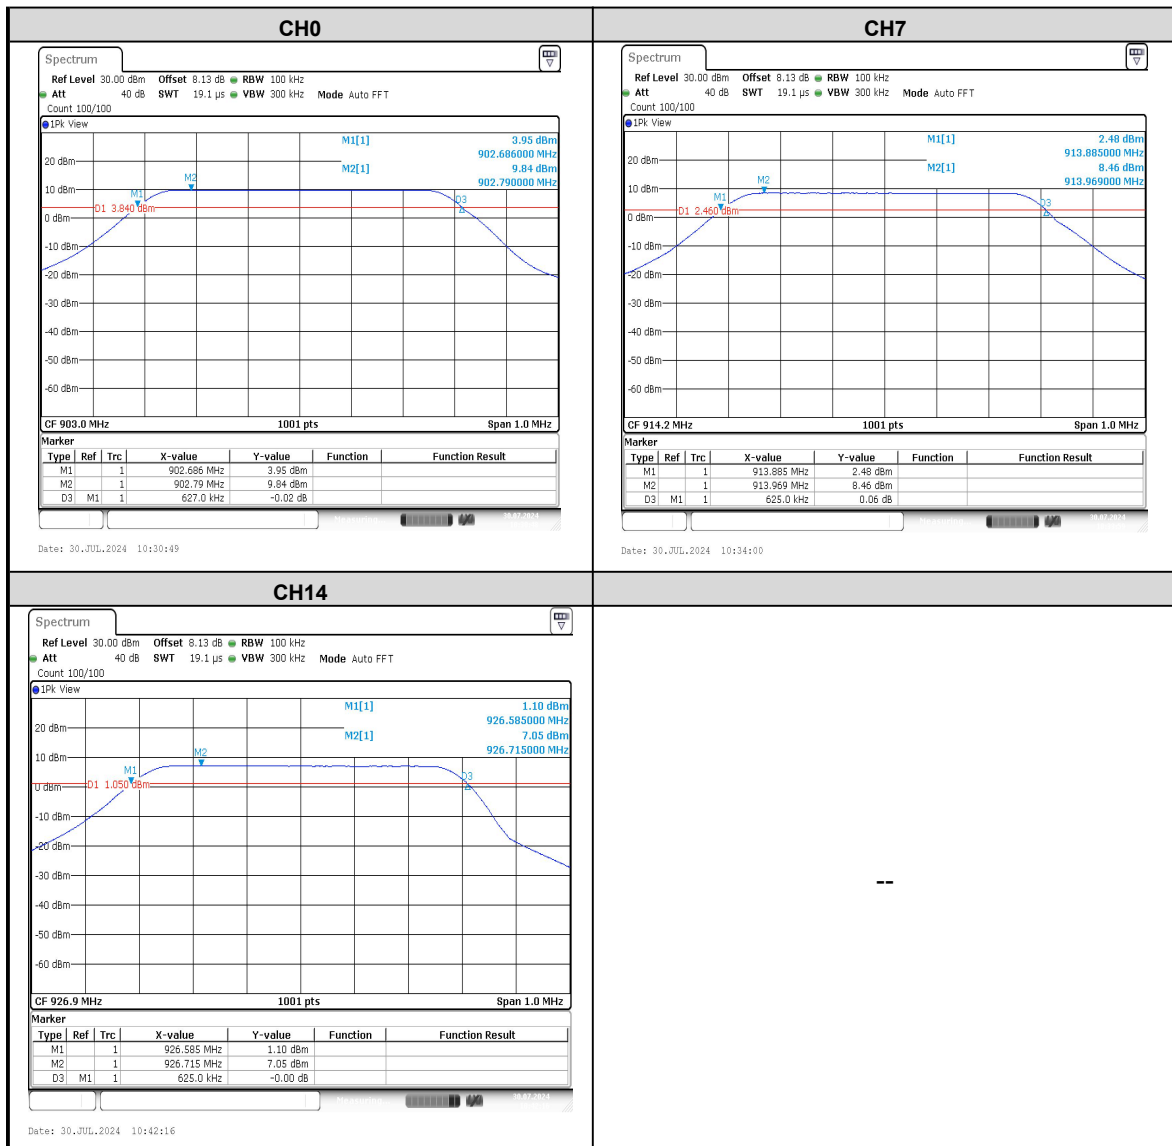



3.3 CONDUCTED OUTPUT POWER


3.3.1 Limits

Forsystems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm).

3.3.2 Measurement procedure

- A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor and set the detector to PEAK. Record the power level.
- An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor and set the detector to AVERAGE. Record the power level.

3.3.3 Test setup

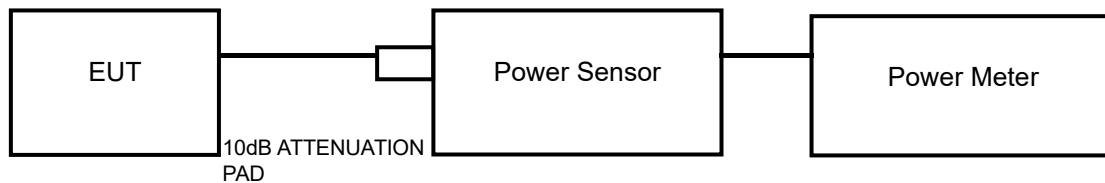



3.3.4 Test result

PEAK OUTPUT POWER

GFSK

CHANNEL	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power (mW)	Peak Power Limit (mW)	Verdict
0	903.0	-5.7	0.22	1000	PASS
7	914.2	-6.97	0.16	1000	PASS
14	926.9	-8.32	0.12	1000	PASS



3.4 POWER SPECTRAL DENSITY MEASUREMENT


3.4.1 Limits

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

3.4.2 Measurement procedure

- Set instrument center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set RBW to: 3KHz
- Set VBW $\geq 3 \times$ RBW.
- Detector = peak
- Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
- Sweep time = auto couple.
- Use the peak marker function to determine the maximum amplitude level.

3.4.3 Test setup

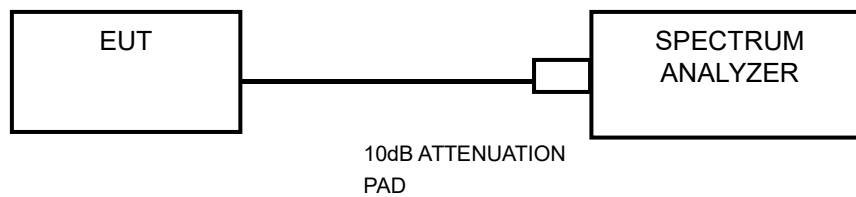




3.4.4 Test result

CHANNEL	CHANNEL FREQUENCY (MHz)	PSD(dBm/3kHz)	Limit (dBm/3kHz)	PASS / FAIL
0	903	-13.09	8	PASS
7	914.2	-14.31	8	PASS
14	926.9	-16.6	8	PASS

Test Plot:

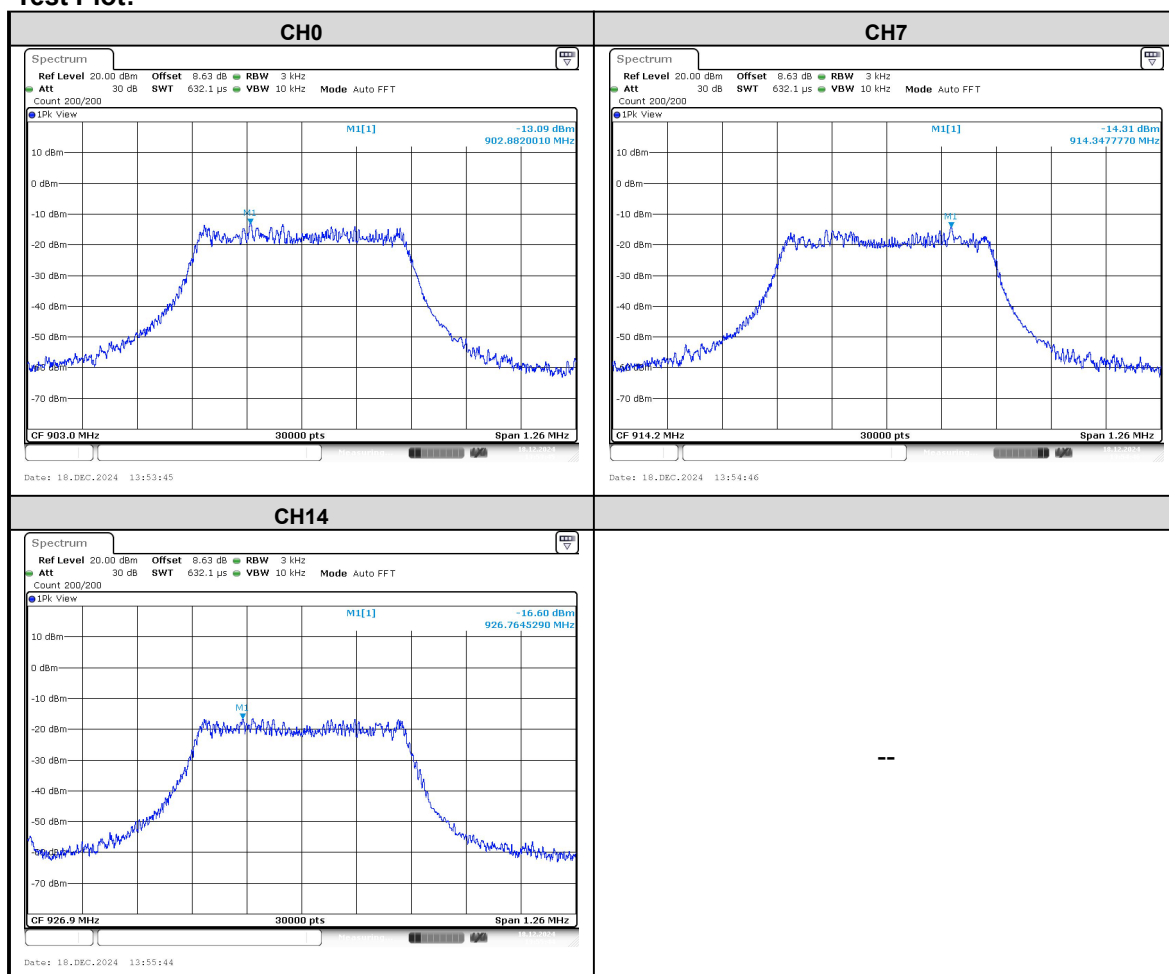



3.5 OUT OF BAND EMISSION MEASUREMENT

3.5.1 Limits

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

3.5.2 Measurement procedure


Measurement Procedure -Reference Level

- Set the RBW = 100 kHz.
- Set the VBW \geq 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHzband segment within the fundamental EBW.

Measurement Procedure –Unwanted Emission Level

- Set RBW = 100 kHz.
- Set VBW \geq 300 kHz.
- Set span to encompass the spectrum to be examined
- Detector = peak.
- Trace Mode = max hold.
- Sweep = auto couple.


3.5.3 Test setup

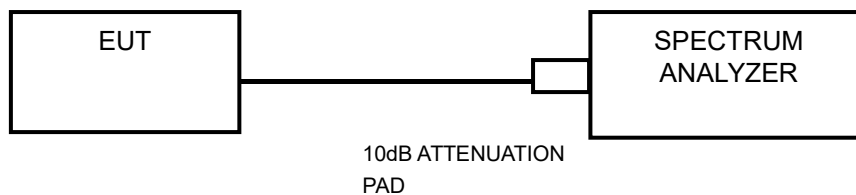




3.5.4 Test result

The spectrum plots are attached on the following images.

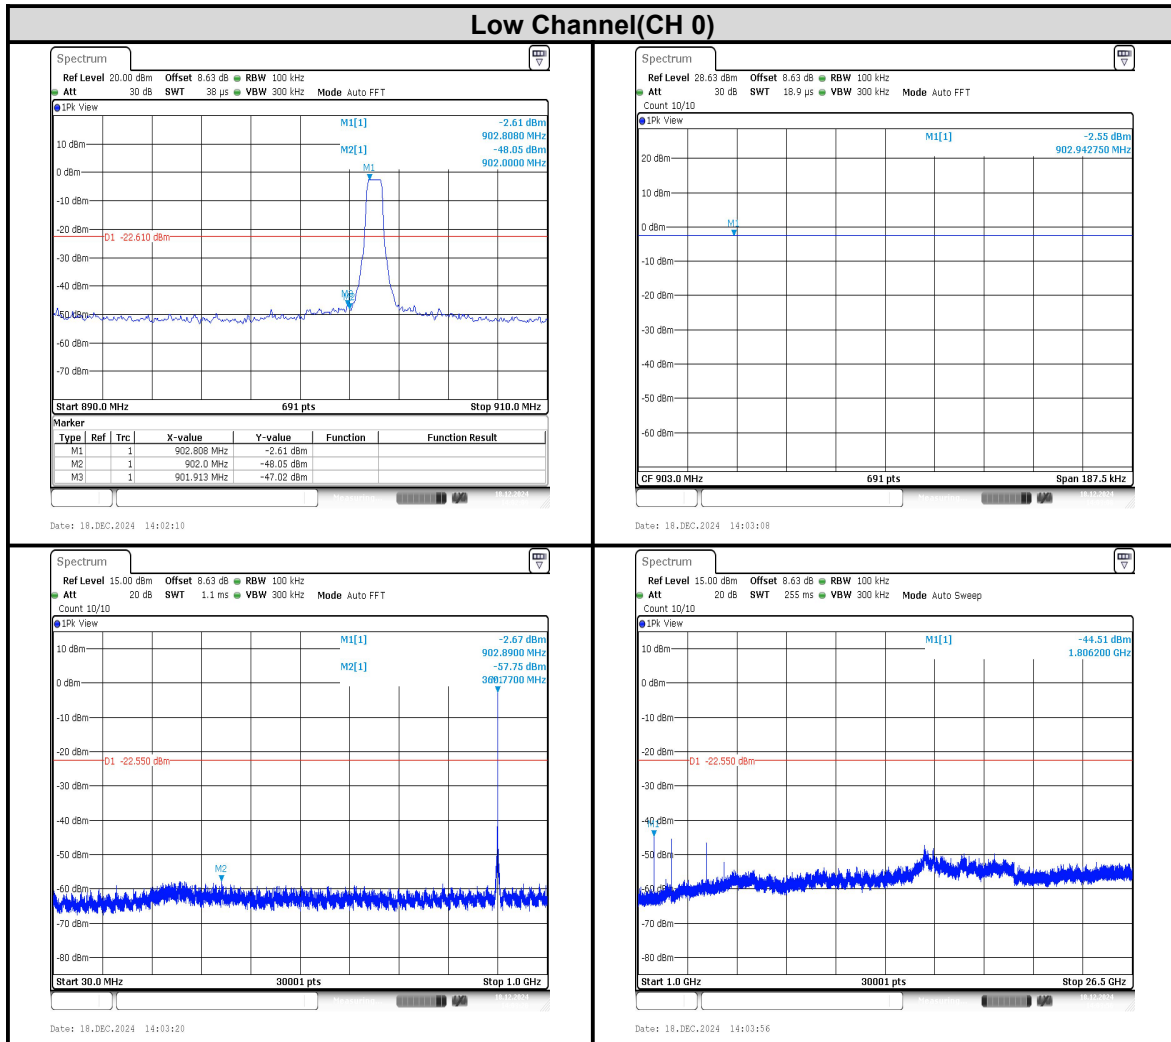

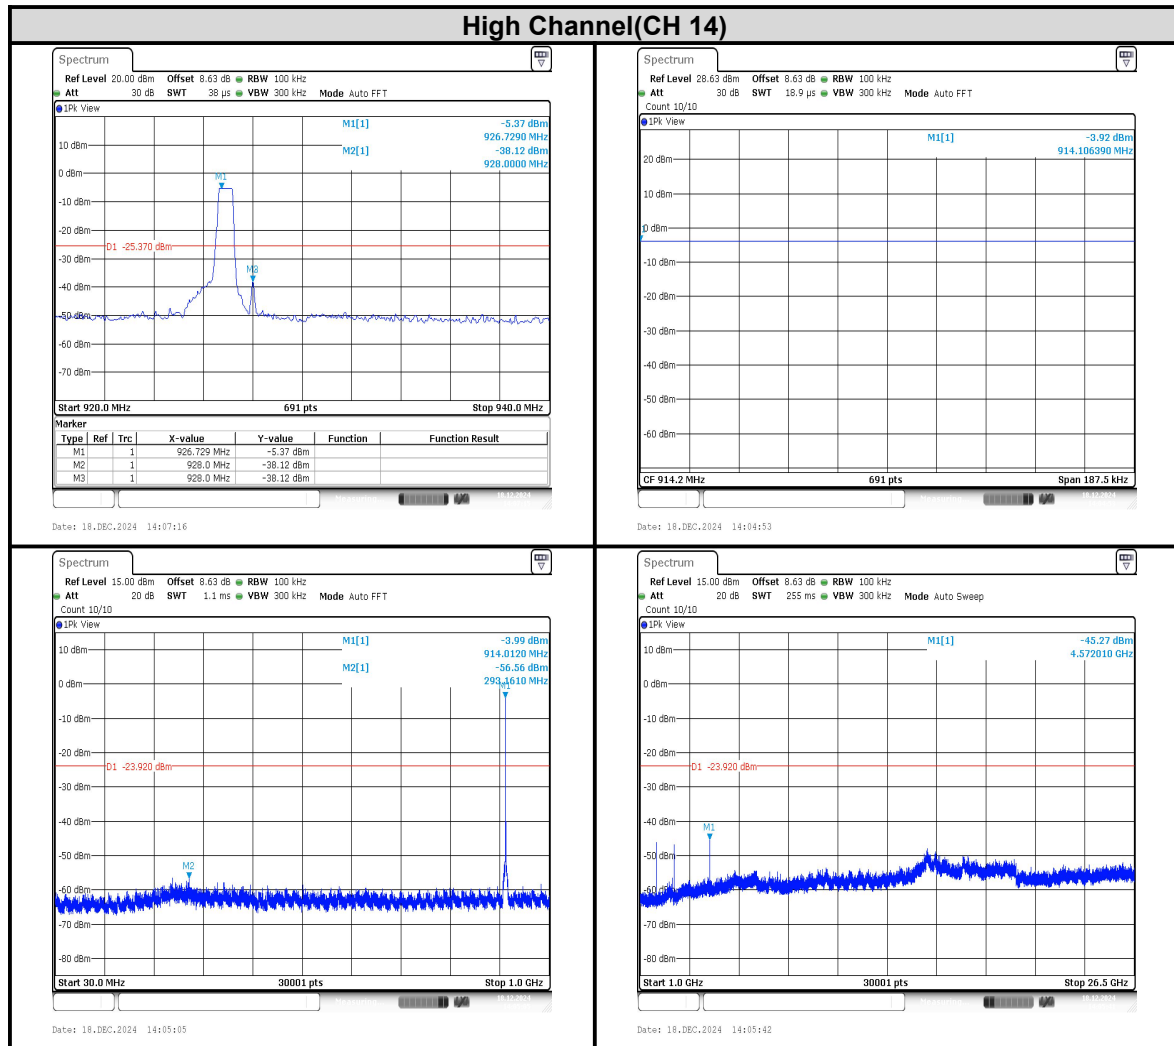



4 PHOTOGRAPHS OF TEST SETUP

Please refer to the attached file (Test Setup Photo).

----- End of the Report -----



Important

- (1) The test report is invalid without the official stamp of CVC;
- (2) Any part photocopies of the test report are forbidden without the written permission from CVC;
- (3) The test report is invalid without the signatures of Approval and Reviewer;
- (4) The test report is invalid if altered;
- (5) Objections to the test report must be submitted to CVC within 15 days.
- (6) Generally, commission test is responsible for the tested samples only.
- (7) As for the test result “-” or “N” means “not applicable”, “/” means “not test”, “P” means “pass” and “F” means “fail”

Address: No. 1301-14&16, Guanguang Road, Xinlan Community, Guanlan Subdistrict, Longhua District, Shenzhen, Guangdong, China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

<http://www.cvc.org.cn>