

FCC SAR TEST REPORT

Applicant: SPECTRA Technologies Holdings Co. Ltd.

Address: Unit 1301-09, 19-20, Tower II, Grand Century Place, Kowloon,
Hong Kong

Product Name: Android POS

FCC ID: VWZS1

Standard(s): 47 CFR Part 2(2.1093)

Report Number: KS1240221-08647E-20B

Report Date: 2024/07/11

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).

Mark Dong

Reviewed By: Mark Dong
Title: SAR Engineer

Brave Lu

Approved By: Brave Lu
Title: SAR Engineer

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

SAR TEST RESULTS SUMMARY

MODE		Max. 10g SAR Level(s) Reported(W/kg)		Limit (W/kg)
Body Supported Mode	GSM 850	1g Body SAR	0.12	1.6
	PCS 1900	1g Body SAR	0.65	
	WCDMA Band 2	1g Body SAR	0.11	
	WCDMA Band 5	1g Body SAR	0.03	
	LTE Band 7	1g Body SAR	0.14	
	LTE Band 12&17	1g Body SAR	0.01	
	LTE Band 13	1g Body SAR	0.01	
	LTE Band 25&2	1g Body SAR	0.08	
	LTE Band 26&5	1g Body SAR	0.02	
	LTE Band 41&38	1g Body SAR	0.09	
	LTE Band 66&4	1g Body SAR	0.69	
	LTE Band 71	1g Body SAR	0.01	
	WLAN 2.4G	1g Body SAR	0.01	
	WLAN 5.2G	1g Body SAR	0.03	
	WLAN 5.3G	1g Body SAR	0.01	
	WLAN 5.8G	1g Body SAR	0.08	
	Simultaneous	1g Body SAR	1.02	
Handheld Mode	GSM 850	10g Extremity SAR	0.38	4.0
	PCS 1900	10g Extremity SAR	1.59	
	WCDMA Band 2	10g Extremity SAR	1.04	
	WCDMA Band 5	10g Extremity SAR	0.14	
	LTE Band 7	10g Extremity SAR	0.59	
	LTE Band 12&17	10g Extremity SAR	0.01	
	LTE Band 13	10g Extremity SAR	0.03	
	LTE Band 25&2	10g Extremity SAR	0.56	
	LTE Band 26&5	10g Extremity SAR	0.08	
	LTE Band 41&38	10g Extremity SAR	0.27	
	LTE Band 66&4	10g Extremity SAR	0.74	
	LTE Band 71	10g Extremity SAR	0.02	
	WLAN 2.4G	10g Extremity SAR	0.13	
	WLAN 5.2G	10g Extremity SAR	0.56	
	WLAN 5.3G	10g Extremity SAR	0.60	
	WLAN 5.8G	10g Extremity SAR	0.19	
	Simultaneous	10g Extremity SAR	2.19	

Applicable Standards	FCC 47 CFR part 2.1093 Radiofrequency radiation exposure evaluation: portable devices
	IEEE1528:2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
	IEC 62209-2:2010+AMD1:2019 Amendment 1 - Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)
	KDB procedures KDB 447498 D01 General RF Exposure Guidance v06 KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04 KDB 865664 D02 RF Exposure Reporting v01r02 KDB 941225 D01 3G SAR Procedures v03r01 KDB 941225 D05 SAR for LTE Devices v02r05 KDB 248227 D01 802.11 Wi-Fi SAR v02r02
Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in FCC 47 CFR part 2.1093 and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures. The results and statements contained in this report pertain only to the device(s) evaluated.	

CONTENTS

SAR TEST RESULTS SUMMARY	2
DOCUMENT REVISION HISTORY	6
1. GENERAL INFORMATION	7
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	7
2. REFERENCE, STANDARDS, AND GUIDELINES	9
2.1 SAR LIMITS.....	9
2.2 TEST FACILITY	10
3. DESCRIPTION OF TEST SYSTEM.....	11
4. EQUIPMENT LIST AND CALIBRATION	16
4.1 EQUIPMENTS LIST & CALIBRATION INFORMATION	16
5. SAR MEASUREMENT SYSTEM VERIFICATION	17
5.1 LIQUID VERIFICATION.....	17
5.2 LIQUID VERIFICATION RESULTS	17
5.3 SYSTEM ACCURACY VERIFICATION	22
5.4 SYSTEM ACCURACY CHECK RESULTS.....	22
5.5 SAR SYSTEM VALIDATION DATA	24
6. EUT TEST STRATEGY AND METHODOLOGY	32
6.1 TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS	32
6.2 TEST DISTANCE FOR SAR EVALUATION	32
6.3 SAR EVALUATION PROCEDURE	33
7. CONDUCTED OUTPUT POWER MEASUREMENT.....	34
7.1 TEST PROCEDURE	34
7.2 RADIO CONFIGURATION	34
7.3 MAXIMUM TARGET OUTPUT POWER.....	39
7.4 TEST RESULTS:.....	41
8. STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	73
8.1 ANTENNAS LOCATION:	73
8.2 ANTENNA DISTANCE TO EDGE.....	73
8.3 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	74
8.4 STANDALONE SAR ESTIMATION:	75
8.5 SAR TEST EXCLUSION FOR THE EUT EDGE CONSIDERATIONS RESULT	75
9. SAR MEASUREMENT RESULTS.....	76
9.1 SAR TEST DATA	76

10. MEASUREMENT VARIABILITY	96
11. SAR SIMULTANEOUS TRANSMISSION DESCRIPTION	97
11.1 SIMULTANEOUS TRANSMISSION:.....	97
11.2 SIMULTANEOUS SAR TEST EXCLUSION CONSIDERATIONS:.....	97
APPENDIX A - MEASUREMENT UNCERTAINTY	98
APPENDIX B - SAR PLOTS	100
APPENDIX C - EUT TEST POSITION PHOTOS.....	101
APPENDIX D - PROBE CALIBRATION CERTIFICATES	102
APPENDIX E - DIPOLE CALIBRATION CERTIFICATES	103

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	KS1240221-08647E-20B	Original Report	2024/07/11

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Android POS
EUT Model:	S1 PLUS
Device Type:	Portable
Exposure Category:	Population / Uncontrolled
Antenna Type(s):	Internal Antenna
Body-Worn Accessories:	None
Proximity Sensor:	None
Carrier Aggregation:	None
Operation Modes:	GPRS/EDGE Data, WCDMA(R99 (Voice+Data), HSUPA/HSDPA), FDD-LTE, TDD-LTE,WLAN, Bluetooth and NFC
Operation Frequency:	GSM 850: 824-849 MHz(TX); 869-894 MHz(RX) PCS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 5: 824-849 MHz(TX); 869-894 MHz(RX) LTE Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) LTE Band 4: 1710-1755MHz(TX) ; 2110-2155 MHz(RX) LTE Band 5: 824-849 MHz(TX); 869-894 MHz(RX) LTE Band 7: 2500-2570 MHz(TX); 2620-2690 MHz(RX) LTE Band 12: 699-716 MHz(TX); 729-746 MHz(RX) LTE Band 13:777-787 MHz(TX); 746-756 MHz(RX) LTE Band 17: 704-716 MHz(TX); 734-746 MHz(RX) LTE Band 25: 1850-1915 MHz(TX); 1930-1995MHz(RX) LTE Band 26: 814-849 MHz(TX); 859-894MHz(RX) LTE Band 38: 2570-2620 MHz(TX); 2570-2620 MHz(RX) LTE Band 41: 2535-2655 MHz(TX/RX) LTE Band 66: 1710-1780 MHz(TX) ; 2110-2180 MHz(RX) LTE Band 71: 663-698 MHz(TX); 617-652 MHz(RX) WLAN 2.4G: 2412-2462 MHz/2422MHz-2452 MHz(TX/RX) WLAN 5.2G: 5150 -5250 MHz(TX/RX) WLAN 5.3G: 5250-5350 MHz MHz(TX/RX) WLAN 5.6G: 5470-5725 MHz(TX/RX) WLAN 5.8G: 5725-5850 MHz(TX/RX) Bluetooth: 2402-2480MHz(TX/RX) NFC: 13.56MHz
Maximum Output Power (Conducted):	GSM 850: 25.93dBm; PCS 1900: 21.62dBm WCDMA Band 2: 23.32dBm;WCDMA Band 5: 24.12dBm LTE Band 2: 22.43dBm; LTE Band 4: 23.17dBm LTE Band 5: 23.45dBm;LTE Band 7: 22.46 dBm LTE Band 12: 23.93dBm; LTE Band 13: 23.57dBm LTE Band 17: 23.83dBm; LTE Band 25: 22.43dBm LTE Band 26: 23.48dBm; LTE Band 38: 23.22dBm LTE Band 41: 23.2 dBm; LTE Band 66: 23.18dBm LTE Band 71: 23.76dBm WLAN 2.4G: 13.48dBm; WLAN 5.2G: 14.51dBm;WLAN 5.3G: 14.18dBm WLAN 5.6G: 7.17dBm;WLAN 5.8G: 8.66dBm Bluetooth(BDR/EDR): 1.34dBm, BLE: -5.84dBm
Dimensions (L*W*H):	185mm (L) *73mm (W) *60mm (H)
Rated Input Voltage:	DC3.8V from Rechargeable Battery
Serial Number:	2HV8-2
Normal Operation:	Body Supported and Handheld
EUT Received Date:	2024/02/22
Test Date:	2024/06/20 ~ 2024/07/09

EUT Received Status:	Good
-----------------------------	------

2. REFERENCE, STANDARDS, AND GUIDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

2.1 SAR Limits

FCC Limit

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg (FCC) applied to the EUT.

2.2 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.


3. DESCRIPTION OF TEST SYSTEM

These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:



DASY5 System Description

The DASY5 system for performing compliance tests consists of the following items:

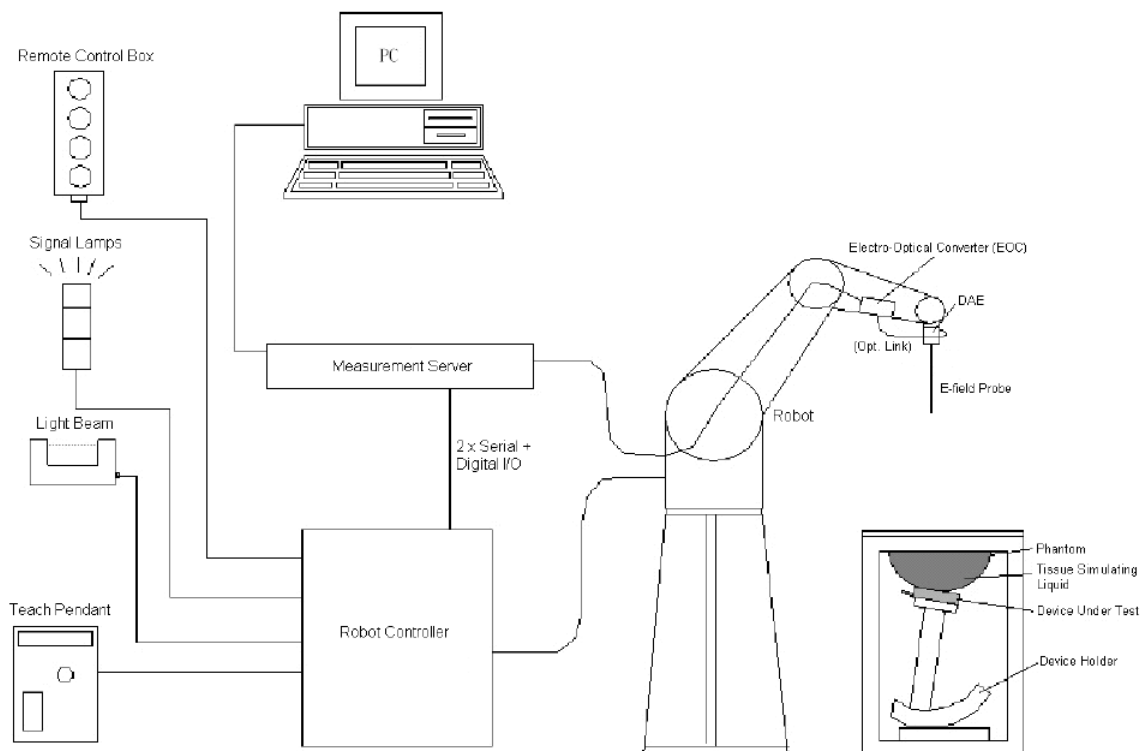

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

DASY5 Measurement Server

The DASY5 measurement server is based on a PC/104 CPU board with a 400MHz Intel ULV Celeron, 128MB chip-disk and 128MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16 bit AD-converter system for optical detection and digital I/O interface are contained on the DASY5 I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized point out, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.



Data Acquisition Electronics

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

EX3DV4 E-Field Probes

Frequency	4 MHz – 10 GHz Linearity: ± 0.2 dB (30 MHz – 10 GHz)
Directivity(typical)	± 0.1 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g – > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Applications	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52, DASY6, DASY8, EASY6, EASY4/MRI

SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness

increases to 6 mm). The phantom has three measurement areas:

- _ Left Head
- _ Right Head
- _ Flat phantom

The phantom table for the DASY systems based on the robots have the size of 100 x 50 x 85 cm (L x W x H). For easy dislocation these tables have fork lift cut outs at the bottom.

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different liquids)



A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.

Robots

The DASY5 system uses the high precision industrial robot. The robot offers the same features important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchrony motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

The above mentioned robots are controlled by the Staubli CS7MB robot controllers. All information regarding the use and maintenance of the robot arm and the robot controller is contained on the CDs delivered along with the robot. Paper manuals are available upon request direct from Staubli.

Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 15mm 2 step integral, with 1.5mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the DASY5 software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m^3 is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 10mm, with the side length of the 10g cube is 21.5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 7 x7 x 7 (5mmx5mmx5mm) providing a volume of 30 mm in the X & Y & Z axis.

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEC 62209-1:2016

Recommended Tissue Dielectric Parameters for Head liquid

Table A.3 – Dielectric properties of the head tissue-equivalent liquid

Frequency MHz	Relative permittivity ϵ_r	Conductivity (σ) S/m
300	45,3	0,87
450	43,5	0,87
750	41,9	0,89
835	41,5	0,90
900	41,5	0,97
1 450	40,5	1,20
1 500	40,4	1,23
1 640	40,2	1,31
1 750	40,1	1,37
1 800	40,0	1,40
1 900	40,0	1,40
2 000	40,0	1,40
2 100	39,8	1,49
2 300	39,5	1,67
2 450	39,2	1,80
2 600	39,0	1,96
3 000	38,5	2,40
3 500	37,9	2,91
4 000	37,4	3,43
4 500	36,8	3,94
5 000	36,2	4,45
5 200	36,0	4,66
5 400	35,8	4,86
5 600	35,5	5,07
5 800	35,3	5,27
6 000	35,1	5,48

NOTE For convenience, permittivity and conductivity values at those frequencies which are not part of the original data provided by Drossos et al. [33] or the extension to 5 800 MHz are provided (i.e. the values shown *in italics*). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6 000 MHz that were linearly extrapolated from the values at 3 000 MHz and 5 800 MHz.


4. EQUIPMENT LIST AND CALIBRATION

4.1 Equipments List & Calibration Information

Equipment	Model	S/N	Calibration Date	Calibration Due Date
DASY5 Test Software	DASY52.10	N/A	NCR	NCR
DASY5 Measurement Server	DASY5 4.5.12	1470	NCR	NCR
Data Acquisition Electronics	DAE4	772	2024/1/23	2025/1/22
E-Field Probe	EX3DV4	7839	2023/9/21	2024/9/20
Mounting Device	MD4HHTV5	SD 000 H01 KA	NCR	NCR
Twin SAM	Twin SAM V5.0	1874	NCR	NCR
Dipole, 750 MHz	D750V3	1167	2022/10/31	2025/10/30
Dipole, 835 MHz	D835V2	453	2021/8/31	2024/8/30
Dipole, 1750 MHz	D1750V2	1141	2021/6/29	2024/6/28
Dipole, 1900 MHz	D1900V2	543	2022/11/2	2025/11/1
Dipole, 2450 MHz	D2450V2	971	2021/6/28	2024/6/27
Dipole, 2600 MHz	D2600V2	1132	2022/11/1	2025/10/31
Dipole, 5 GHz	D5GHzV2	1246	2022/11/1	2025/10/31
Simulated Tissue Liquid Head	HBBL600-10000V6	SL AAH U16 BC (Batch:220809-1)	Each Time	/
Network Analyzer	8753C	3033A02857	2023/11/18	2024/11/17
Dielectric assessment kit	1253	SM DAK 040 CA	NCR	NCR
synthesized signal generator	8665B	3438a00584	2023/10/18	2024/10/17
EPM Series Power Meter	E4419B	MY45103907	2023/10/18	2024/10/17
USB Wideband Power Sensor	U2022XA	MY54170006	2023/10/18	2024/10/17
Power Amplifier	ZHL-5W-202-S+	416402204	NCR	NCR
Power Amplifier	ZVE-6W-83+	637202210	NCR	NCR
Directional Coupler	441493	520Z	NCR	NCR
Attenuator	20dB, 100W	LN749	NCR	NCR
Attenuator	6dB, 150W	2754	NCR	NCR
Thermometer	DTM3000	3635	2023/8/11	2024/8/10
Hygrothermograph	HTC-2	EM072	2023/11/6	2024/11/5
Wireless communication tester	8960	MY50266471	2023/10/18	2024/10/17
Wideband Radio Communication Tester	CMW500	147473	2023/10/18	2024/10/17

5. SAR MEASUREMENT SYSTEM VERIFICATION

5.1 Liquid Verification

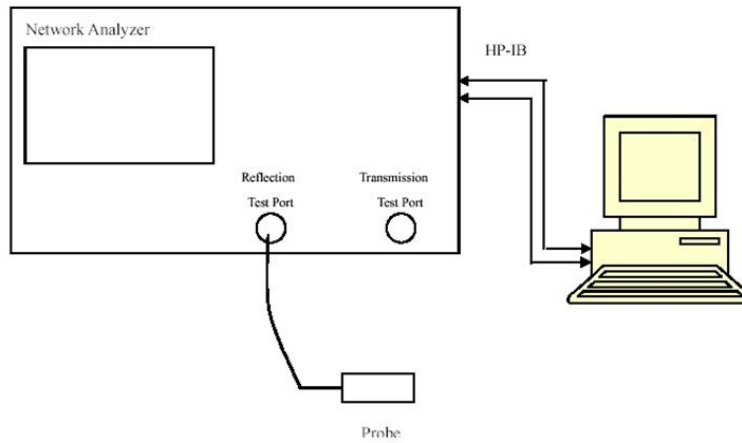

5.2 Liquid Verification Results

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
650	Simulated Tissue Liquid Head	43.775	0.848	42.43	0.88	3.17	-3.64	± 5
660	Simulated Tissue Liquid Head	43.635	0.859	42.38	0.88	2.96	-2.39	± 5
670	Simulated Tissue Liquid Head	43.089	0.865	42.33	0.88	1.79	-1.70	± 5
680	Simulated Tissue Liquid Head	42.924	0.873	42.27	0.89	1.55	-1.91	± 5
690	Simulated Tissue Liquid Head	42.790	0.880	42.22	0.89	1.35	-1.12	± 5
700	Simulated Tissue Liquid Head	42.707	0.886	42.17	0.89	1.27	-0.45	± 5
710	Simulated Tissue Liquid Head	42.482	0.893	42.11	0.89	0.88	0.34	± 5
720	Simulated Tissue Liquid Head	42.472	0.896	42.06	0.89	0.98	0.67	± 5
730	Simulated Tissue Liquid Head	42.274	0.903	42.01	0.89	0.63	1.46	± 5
740	Simulated Tissue Liquid Head	42.196	0.910	41.95	0.89	0.59	2.25	± 5
750	Simulated Tissue Liquid Head	41.996	0.917	41.90	0.89	0.23	3.03	± 5
760	Simulated Tissue Liquid Head	41.931	0.920	41.85	0.89	0.19	3.37	± 5
770	Simulated Tissue Liquid Head	41.806	0.927	41.81	0.89	-0.01	4.16	± 5
780	Simulated Tissue Liquid Head	41.679	0.932	41.76	0.89	-0.19	4.72	± 5
790	Simulated Tissue Liquid Head	41.565	0.933	41.71	0.89	-0.35	4.83	± 5

*Liquid Verification above was performed on 2024/07/06.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
800	Simulated Tissue Liquid Head	41.484	0.932	41.66	0.90	-0.42	3.56	± 5
810	Simulated Tissue Liquid Head	41.398	0.941	41.62	0.90	-0.53	4.56	± 5
820	Simulated Tissue Liquid Head	41.194	0.943	41.57	0.90	-0.90	4.78	± 5
830	Simulated Tissue Liquid Head	41.114	0.939	41.52	0.90	-0.98	4.33	± 5
835	Simulated Tissue Liquid Head	41.050	0.943	41.50	0.90	-1.08	4.78	± 5
840	Simulated Tissue Liquid Head	40.985	0.947	41.50	0.91	-1.24	4.07	± 5
850	Simulated Tissue Liquid Head	40.807	0.957	41.50	0.92	-1.67	4.02	± 5

*Liquid Verification above was performed on 2024/07/07.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
1650	Simulated Tissue Liquid Head	39.489	1.316	40.19	1.32	-1.74	-0.30	± 5
1660	Simulated Tissue Liquid Head	39.127	1.308	40.18	1.32	-2.62	-0.91	± 5
1670	Simulated Tissue Liquid Head	39.066	1.300	40.17	1.33	-2.75	-2.26	± 5
1680	Simulated Tissue Liquid Head	39.007	1.301	40.16	1.33	-2.87	-2.18	± 5
1690	Simulated Tissue Liquid Head	38.952	1.305	40.15	1.34	-2.98	-2.61	± 5
1700	Simulated Tissue Liquid Head	38.896	1.312	40.15	1.34	-3.12	-2.09	± 5
1710	Simulated Tissue Liquid Head	38.846	1.312	40.14	1.35	-3.22	-2.81	± 5
1720	Simulated Tissue Liquid Head	38.794	1.321	40.13	1.35	-3.33	-2.15	± 5
1730	Simulated Tissue Liquid Head	38.758	1.331	40.12	1.36	-3.39	-2.13	± 5
1740	Simulated Tissue Liquid Head	38.714	1.341	40.11	1.36	-3.48	-1.40	± 5
1750	Simulated Tissue Liquid Head	38.675	1.351	40.10	1.37	-3.55	-1.39	± 5
1760	Simulated Tissue Liquid Head	38.634	1.361	40.08	1.38	-3.61	-1.38	± 5
1770	Simulated Tissue Liquid Head	38.588	1.371	40.06	1.38	-3.67	-0.65	± 5
1780	Simulated Tissue Liquid Head	38.544	1.380	40.04	1.39	-3.74	-0.72	± 5
1790	Simulated Tissue Liquid Head	38.499	1.390	40.02	1.39	-3.80	0.00	± 5
1800	Simulated Tissue Liquid Head	38.445	1.399	40.00	1.40	-3.89	-0.07	± 5
1810	Simulated Tissue Liquid Head	38.420	1.408	40.00	1.40	-3.95	0.57	± 5
1820	Simulated Tissue Liquid Head	38.364	1.412	40.00	1.40	-4.09	0.86	± 5
1830	Simulated Tissue Liquid Head	38.325	1.416	40.00	1.40	-4.19	1.14	± 5
1840	Simulated Tissue Liquid Head	38.274	1.420	40.00	1.40	-4.32	1.43	± 5
1850	Simulated Tissue Liquid Head	39.231	1.424	40.00	1.40	-1.92	1.71	± 5

*Liquid Verification above was performed on 2024/06/20.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
1850	Simulated Tissue Liquid Head	40.368	1.441	40.00	1.40	0.92	2.93	± 5
1860	Simulated Tissue Liquid Head	40.204	1.444	40.00	1.40	0.51	3.14	± 5
1870	Simulated Tissue Liquid Head	40.141	1.448	40.00	1.40	0.35	3.43	± 5
1880	Simulated Tissue Liquid Head	40.106	1.448	40.00	1.40	0.27	3.43	± 5
1890	Simulated Tissue Liquid Head	40.123	1.445	40.00	1.40	0.31	3.21	± 5
1900	Simulated Tissue Liquid Head	40.076	1.446	40.00	1.40	0.19	3.29	± 5
1910	Simulated Tissue Liquid Head	39.963	1.445	40.00	1.40	-0.09	3.21	± 5
1920	Simulated Tissue Liquid Head	39.863	1.450	40.00	1.40	-0.34	3.57	± 5
1930	Simulated Tissue Liquid Head	39.895	1.452	40.00	1.40	-0.26	3.71	± 5
1940	Simulated Tissue Liquid Head	39.771	1.456	40.00	1.40	-0.57	4.00	± 5
1950	Simulated Tissue Liquid Head	39.781	1.457	40.00	1.40	-0.55	4.07	± 5
1960	Simulated Tissue Liquid Head	39.644	1.458	40.00	1.40	-0.89	4.14	± 5
1970	Simulated Tissue Liquid Head	39.677	1.455	40.00	1.40	-0.81	3.93	± 5
1980	Simulated Tissue Liquid Head	39.604	1.458	40.00	1.40	-0.99	4.14	± 5
1990	Simulated Tissue Liquid Head	39.568	1.462	40.00	1.40	-1.08	4.43	± 5
2000	Simulated Tissue Liquid Head	39.481	1.458	40.00	1.40	-1.30	4.14	± 5

*Liquid Verification above was performed on 2024/07/08.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
2400	Simulated Tissue Liquid Head	40.858	1.713	39.30	1.76	3.96	-2.67	± 5
2410	Simulated Tissue Liquid Head	40.827	1.725	39.28	1.77	3.94	-2.54	± 5
2420	Simulated Tissue Liquid Head	40.799	1.736	39.26	1.77	3.92	-1.92	± 5
2430	Simulated Tissue Liquid Head	40.769	1.747	39.24	1.78	3.90	-1.85	± 5
2440	Simulated Tissue Liquid Head	40.739	1.758	39.22	1.79	3.87	-1.79	± 5
2450	Simulated Tissue Liquid Head	40.696	1.768	39.20	1.80	3.82	-1.78	± 5
2460	Simulated Tissue Liquid Head	40.668	1.778	39.19	1.81	3.77	-1.77	± 5
2470	Simulated Tissue Liquid Head	40.636	1.790	39.17	1.82	3.74	-1.65	± 5
2480	Simulated Tissue Liquid Head	40.601	1.801	39.16	1.83	3.68	-1.58	± 5
2490	Simulated Tissue Liquid Head	40.563	1.812	39.15	1.84	3.61	-1.52	± 5
2500	Simulated Tissue Liquid Head	40.518	1.824	39.13	1.85	3.55	-1.41	± 5

*Liquid Verification above was performed on 2024/06/20.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta(%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta \epsilon_r$	$\Delta \sigma$	
2510	Simulated Tissue Liquid Head	40.618	1.880	39.13	1.85	3.80	1.62	± 5
2520	Simulated Tissue Liquid Head	40.552	1.895	39.12	1.86	3.66	1.88	± 5
2530	Simulated Tissue Liquid Head	40.486	1.909	39.11	1.87	3.52	2.09	± 5
2540	Simulated Tissue Liquid Head	40.420	1.923	39.09	1.89	3.40	1.75	± 5
2550	Simulated Tissue Liquid Head	40.353	1.938	39.08	1.90	3.26	2.00	± 5
2560	Simulated Tissue Liquid Head	40.303	1.951	39.07	1.91	3.16	2.15	± 5
2570	Simulated Tissue Liquid Head	40.189	1.971	39.05	1.92	2.92	2.66	± 5
2580	Simulated Tissue Liquid Head	40.170	1.980	39.04	1.93	2.89	2.59	± 5
2590	Simulated Tissue Liquid Head	40.217	1.984	39.03	1.94	3.04	2.27	± 5
2600	Simulated Tissue Liquid Head	40.096	2.003	39.01	1.95	2.78	2.72	± 5
2610	Simulated Tissue Liquid Head	40.096	2.014	39.00	1.96	2.81	2.76	± 5
2620	Simulated Tissue Liquid Head	40.066	2.021	38.99	1.97	2.76	2.59	± 5
2630	Simulated Tissue Liquid Head	40.035	2.044	38.98	1.98	2.71	3.23	± 5
2640	Simulated Tissue Liquid Head	39.954	2.055	38.96	1.99	2.55	3.27	± 5
2650	Simulated Tissue Liquid Head	39.930	2.055	38.95	2.00	2.52	2.75	± 5
2660	Simulated Tissue Liquid Head	39.935	2.074	38.94	2.02	2.56	2.67	± 5
2670	Simulated Tissue Liquid Head	39.900	2.073	38.93	2.03	2.49	2.12	± 5
2680	Simulated Tissue Liquid Head	39.949	2.095	38.91	2.04	2.67	2.70	± 5
2690	Simulated Tissue Liquid Head	39.862	2.094	38.90	2.05	2.47	2.15	± 5
2700	Simulated Tissue Liquid Head	39.803	2.105	38.89	2.06	2.35	2.18	± 5

*Liquid Verification above was performed on 2024/07/09.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta(%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta \epsilon_r$	$\Delta \sigma$	
5150	Simulated Tissue Liquid Head	36.557	4.534	36.05	4.61	1.41	-1.65	± 5
5160	Simulated Tissue Liquid Head	36.540	4.552	36.04	4.62	1.39	-1.47	± 5
5170	Simulated Tissue Liquid Head	36.630	4.551	36.03	4.63	1.67	-1.71	± 5
5180	Simulated Tissue Liquid Head	36.657	4.574	36.02	4.64	1.77	-1.42	± 5
5190	Simulated Tissue Liquid Head	36.665	4.589	36.01	4.65	1.82	-1.31	± 5
5200	Simulated Tissue Liquid Head	36.688	4.577	36.00	4.66	1.91	-1.78	± 5
5210	Simulated Tissue Liquid Head	36.712	4.600	35.99	4.67	2.01	-1.50	± 5
5220	Simulated Tissue Liquid Head	36.708	4.606	35.98	4.68	2.02	-1.58	± 5
5230	Simulated Tissue Liquid Head	36.614	4.626	35.97	4.69	1.79	-1.36	± 5
5240	Simulated Tissue Liquid Head	36.628	4.647	35.96	4.70	1.86	-1.13	± 5
5250	Simulated Tissue Liquid Head	36.542	4.650	35.95	4.71	1.65	-1.27	± 5
5260	Simulated Tissue Liquid Head	36.488	4.644	35.94	4.72	1.52	-1.61	± 5
5270	Simulated Tissue Liquid Head	36.436	4.681	35.93	4.73	1.41	-1.04	± 5
5280	Simulated Tissue Liquid Head	36.429	4.672	35.92	4.74	1.42	-1.43	± 5
5290	Simulated Tissue Liquid Head	36.414	4.670	35.91	4.75	1.40	-1.68	± 5
5300	Simulated Tissue Liquid Head	36.361	4.699	35.90	4.76	1.28	-1.28	± 5
5310	Simulated Tissue Liquid Head	36.311	4.719	35.89	4.77	1.17	-1.07	± 5
5320	Simulated Tissue Liquid Head	36.298	4.710	35.88	4.78	1.16	-1.46	± 5
5330	Simulated Tissue Liquid Head	36.267	4.719	35.87	4.79	1.11	-1.48	± 5

5340	Simulated Tissue Liquid Head	36.277	4.738	35.86	4.80	1.16	-1.29	±5
5350	Simulated Tissue Liquid Head	36.214	4.743	35.85	4.81	1.02	-1.39	±5
5360	Simulated Tissue Liquid Head	36.234	4.756	35.84	4.82	1.10	-1.33	±5
5370	Simulated Tissue Liquid Head	36.185	4.778	35.83	4.83	0.99	-1.08	±5
5380	Simulated Tissue Liquid Head	36.207	4.808	35.82	4.84	1.08	-0.66	±5
5390	Simulated Tissue Liquid Head	36.160	4.822	35.81	4.85	0.98	-0.58	±5
5400	Simulated Tissue Liquid Head	36.129	4.830	35.80	4.86	0.92	-0.62	±5
5410	Simulated Tissue Liquid Head	36.101	4.846	35.79	4.87	0.88	-0.51	±5
5420	Simulated Tissue Liquid Head	36.144	4.834	35.77	4.88	1.05	-0.96	±5
5430	Simulated Tissue Liquid Head	36.097	4.873	35.76	4.89	0.96	-0.39	±5
5440	Simulated Tissue Liquid Head	36.069	4.879	35.74	4.90	0.92	-0.47	±5
5450	Simulated Tissue Liquid Head	36.045	4.889	35.73	4.91	0.90	-0.49	±5
5460	Simulated Tissue Liquid Head	35.992	4.880	35.71	4.92	0.79	-0.87	±5
5470	Simulated Tissue Liquid Head	35.997	4.910	35.70	4.93	0.85	-0.49	±5
5480	Simulated Tissue Liquid Head	36.019	4.914	35.68	4.94	0.95	-0.61	±5

*Liquid Verification above was performed on 2024/07/07.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta(%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta \epsilon_r$	$\Delta \sigma$	
5670	Simulated Tissue Liquid Head	35.508	5.152	35.43	5.14	0.22	0.23	±5
5680	Simulated Tissue Liquid Head	35.492	5.156	35.42	5.15	0.20	0.12	±5
5690	Simulated Tissue Liquid Head	35.544	5.153	35.41	5.16	0.38	-0.14	±5
5700	Simulated Tissue Liquid Head	35.481	5.169	35.40	5.17	0.23	-0.02	±5
5710	Simulated Tissue Liquid Head	35.471	5.191	35.39	5.18	0.23	0.21	±5
5720	Simulated Tissue Liquid Head	35.461	5.179	35.38	5.19	0.23	-0.21	±5
5730	Simulated Tissue Liquid Head	35.410	5.202	35.37	5.20	0.11	0.04	±5
5740	Simulated Tissue Liquid Head	35.452	5.214	35.36	5.21	0.26	0.08	±5
5750	Simulated Tissue Liquid Head	35.396	5.229	35.35	5.22	0.13	0.17	±5
5760	Simulated Tissue Liquid Head	35.362	5.235	35.34	5.23	0.06	0.10	±5
5770	Simulated Tissue Liquid Head	35.314	5.247	35.33	5.24	-0.05	0.13	±5
5780	Simulated Tissue Liquid Head	35.258	5.271	35.32	5.25	-0.18	0.40	±5
5790	Simulated Tissue Liquid Head	35.302	5.274	35.31	5.26	-0.02	0.27	±5
5800	Simulated Tissue Liquid Head	35.227	5.290	35.30	5.27	-0.21	0.38	±5
5810	Simulated Tissue Liquid Head	35.243	5.338	35.29	5.28	-0.13	1.10	±5
5820	Simulated Tissue Liquid Head	35.311	5.338	35.28	5.29	0.09	0.91	±5
5830	Simulated Tissue Liquid Head	35.334	5.361	35.27	5.30	0.18	1.15	±5
5840	Simulated Tissue Liquid Head	35.341	5.392	35.26	5.31	0.23	1.54	±5
5850	Simulated Tissue Liquid Head	35.270	5.400	35.25	5.32	0.06	1.50	±5

*Liquid Verification above was performed on 2024/07/07.


5.3 System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The spacing distances in the **System Verification Setup Block Diagram** is given by the following:

- $s = 15 \text{ mm} \pm 0,2 \text{ mm}$ for $300 \text{ MHz} \leq f \leq 1\,000 \text{ MHz}$;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $1\,000 \text{ MHz} < f \leq 3\,000 \text{ MHz}$;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $3\,000 \text{ MHz} < f \leq 6\,000 \text{ MHz}$.

System Verification Setup Block Diagram

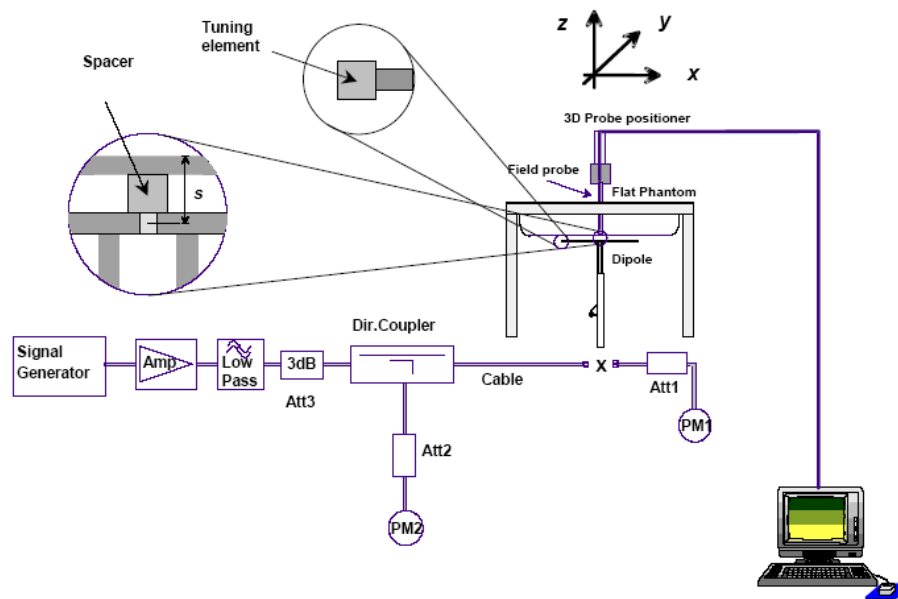

5.4 System Accuracy Check Results

Date	Frequency Band	Liquid Type	Input Power (mW)	Measured SAR (W/kg)		Normalized to 1W (W/kg)	Target Value (W/kg)	Delta (%)	Tolerance (%)
2024/07/06	750 MHz	Simulated Tissue Liquid Head	100	1g	0.843	8.43	8.48	-0.59	± 10
				10g	0.561	5.61	5.63	-0.36	± 10
2024/07/07	835 MHz	Simulated Tissue Liquid Head	100	1g	0.955	9.55	9.33	2.36	± 10
				10g	0.602	6.02	6.03	-0.17	± 10
2024/06/20	1750 MHz	Simulated Tissue Liquid Head	100	1g	3.43	34.3	36.1	-4.99	± 10
				10g	1.78	17.8	18.7	-4.81	± 10
2024/07/08	1900 MHz	Simulated Tissue Liquid Head	100	1g	3.76	37.6	40.2	-6.47	± 10
				10g	2.22	22.2	20.9	6.22	± 10
2024/06/20	2450 MHz	Simulated Tissue Liquid Head	100	1g	5.57	55.7	53.5	4.11	± 10
				10g	2.52	25.2	24.2	4.13	± 10
2024/07/09	2600 MHz	Simulated Tissue Liquid Head	100	1g	6.02	60.2	55.8	7.89	± 10
				10g	2.57	25.7	25.4	1.18	± 10

*The SAR values above are normalized to 1 Watt forward power.

Date	Frequency Band	Liquid Type	Input Power (mW)	Measured SAR (W/kg)		Normalized to 1W (W/kg)	Target Value (W/kg)	Delta (%)	Tolerance (%)
2024/07/07	5250 MHz	Simulated Tissue Liquid Head	100	1g	7.12	71.2	77.5	-8.13	±10
				10g	2.02	20.2	22	-8.18	±10
2024/07/07	5750 MHz	Simulated Tissue Liquid Head	100	1g	7.23	72.3	78.4	-7.78	±10
				10g	2.14	21.4	22	-2.73	±10

*The SAR values above are normalized to 1 Watt forward power.

5.5 SAR SYSTEM VALIDATION DATA

System Performance 750 MHz Head

DUT: D750V3; Type: 750 MHz; Serial: 1167

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 41.996$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.95, 8.96, 8.82) @ 750 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.07 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.24 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.843 W/kg; SAR(10 g) = 0.561 W/kg

Maximum value of SAR (measured) = 0.985 W/kg

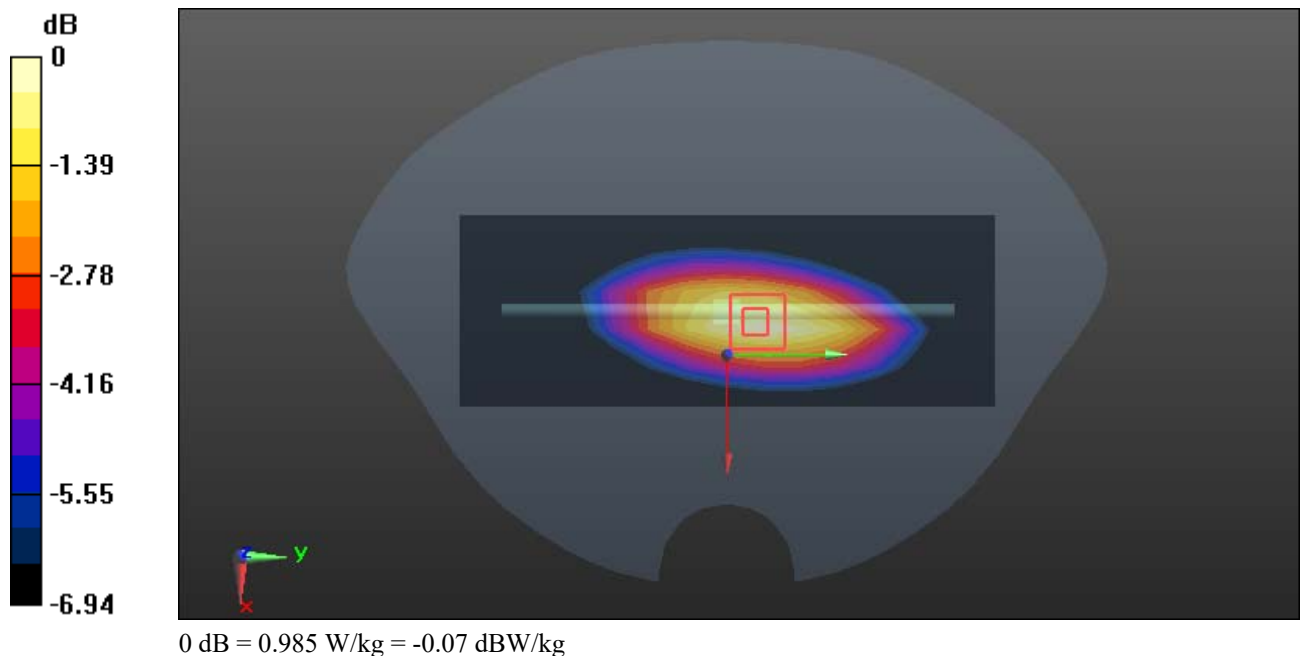

System Performance 835 MHz Head**DUT: D835V2; Type: 835 MHz; Serial: 453**


Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.943 \text{ S/m}$; $\epsilon_r = 41.05$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 835 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

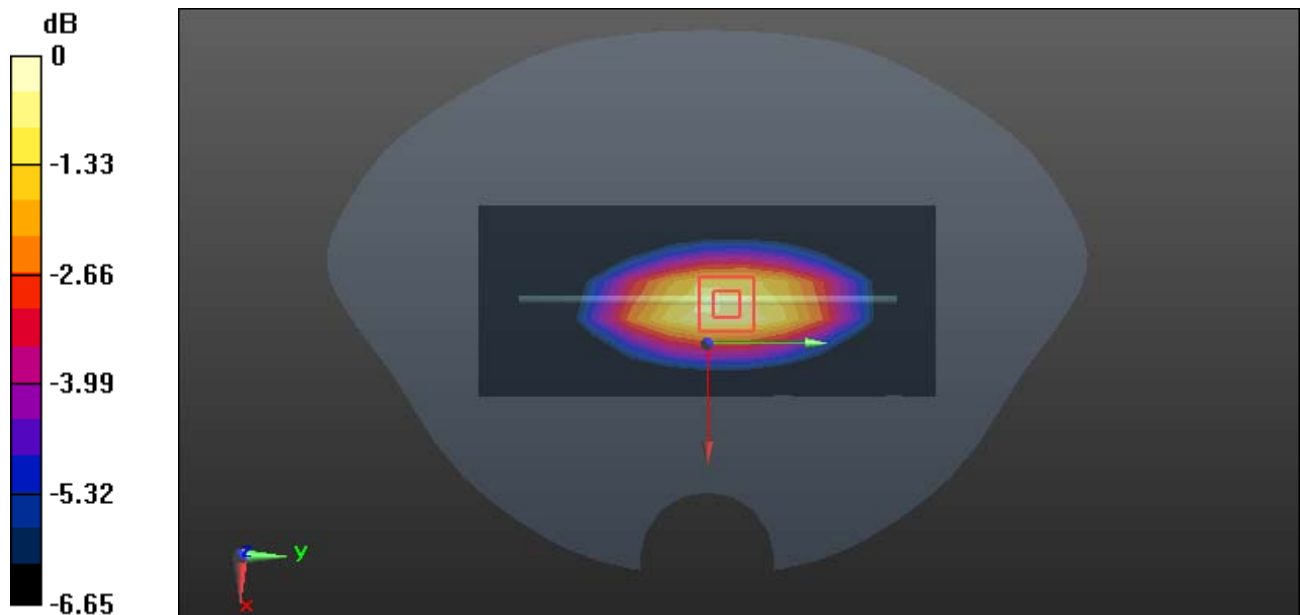Area Scan (6x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.985 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 27.51 V/m ; Power Drift = -0.07 dB Peak SAR (extrapolated) = 1.42 W/kg **SAR(1 g) = 0.955 W/kg ; SAR(10 g) = 0.602 W/kg** Maximum value of SAR (measured) = 0.978 W/kg 0 dB = 0.978 W/kg = -0.10 dBW/kg

System Performance 1750MHz Head**DUT: D1750V2; Type: 1750 MHz; Serial: 1141**

Communication System: CW ; Frequency: 1750 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.351$ S/m; $\epsilon_r = 38.675$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1750 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 4.14 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.72 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 5.43 W/kg

SAR(1 g) = 3.43 W/kg; SAR(10 g) = 1.78 W/kg

Maximum value of SAR (measured) = 4.35 W/kg

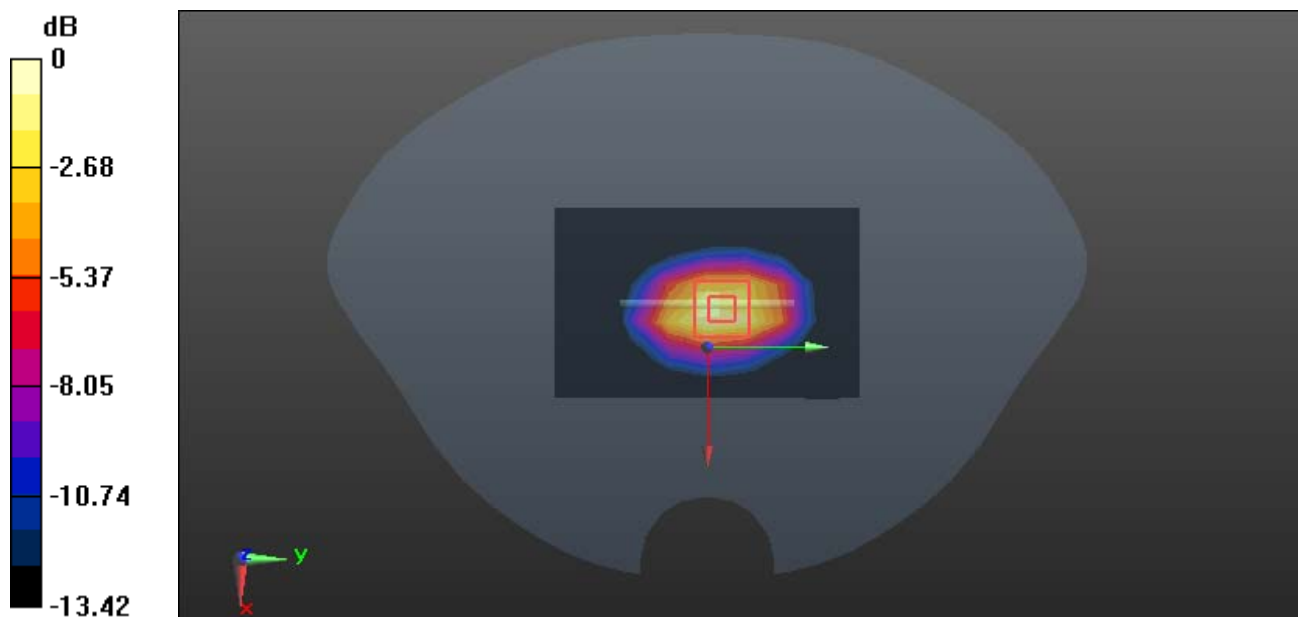

System Performance 1900MHz Head**DUT: D1900V2; Type: 1900 MHz; Serial: 543**

Communication System: CW ; Frequency: 1900 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.446$ S/m; $\epsilon_r = 40.076$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1900 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 4.56 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 51.37 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 5.85 W/kg

SAR(1 g) = 3.76 W/kg; SAR(10 g) = 2.22 W/kg

Maximum value of SAR (measured) = 4.75 W/kg

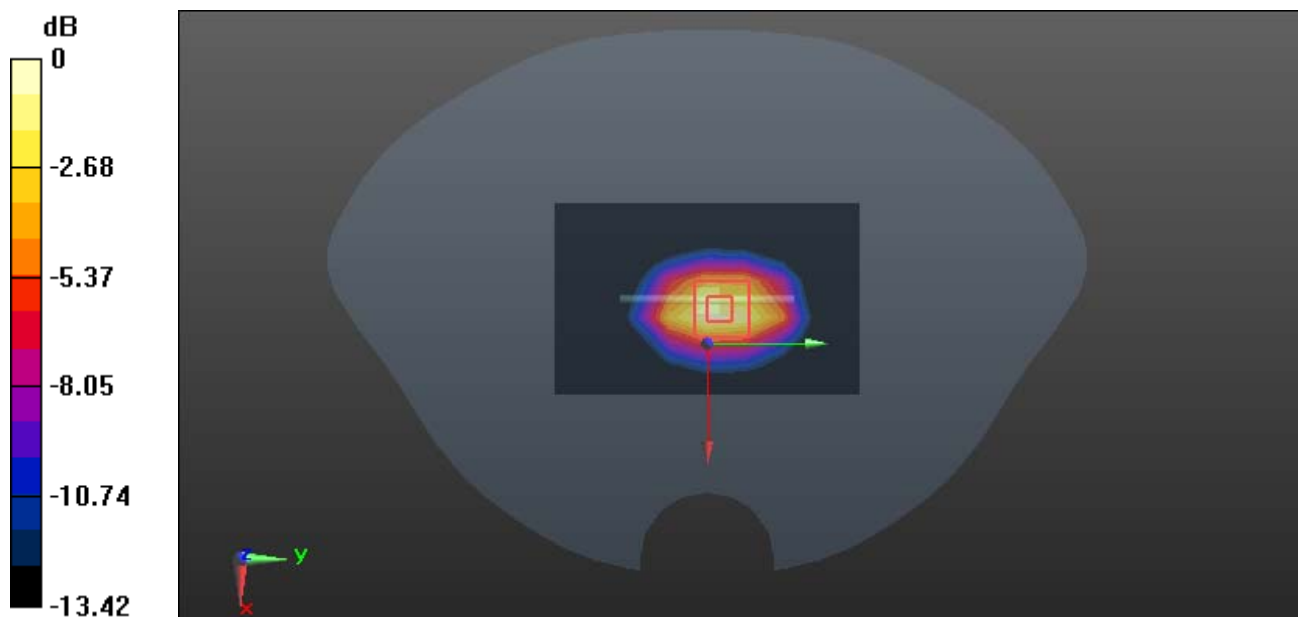

0 dB = 4.75 W/kg = 6.77 dBW/kg

System Performance 2450MHz Head**DUT: D2450V2; Type: 2450 MHz; Serial: 971**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 2450$ MHz; $\sigma = 1.768$ S/m; $\epsilon_r = 40.696$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.49, 6.81, 6.61) @ 2450 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 7.71 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 63.37 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 12.8 W/kg

SAR(1 g) = 5.57 W/kg; SAR(10 g) = 2.52 W/kg

Maximum value of SAR (measured) = 8.27 W/kg

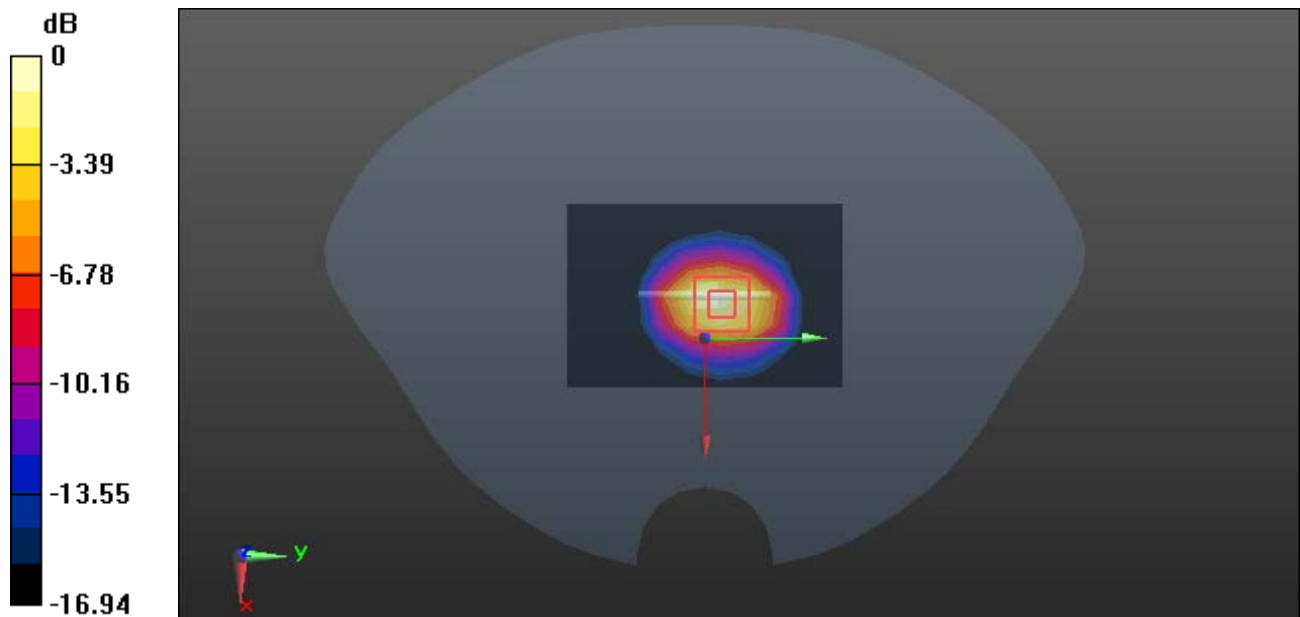

0 dB = 8.27 W/kg = 9.18 dBW/kg

System Performance 2600MHz Head**DUT: D2600V2; Type: 2600 MHz; Serial: 1132**

Communication System: CW ; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.003$ S/m; $\epsilon_r = 40.096$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2600 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 6.40 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 60.59 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 12.2 W/kg

SAR(1 g) = 6.02 W/kg; SAR(10 g) = 2.57 W/kg

Maximum value of SAR (measured) = 8.25 W/kg

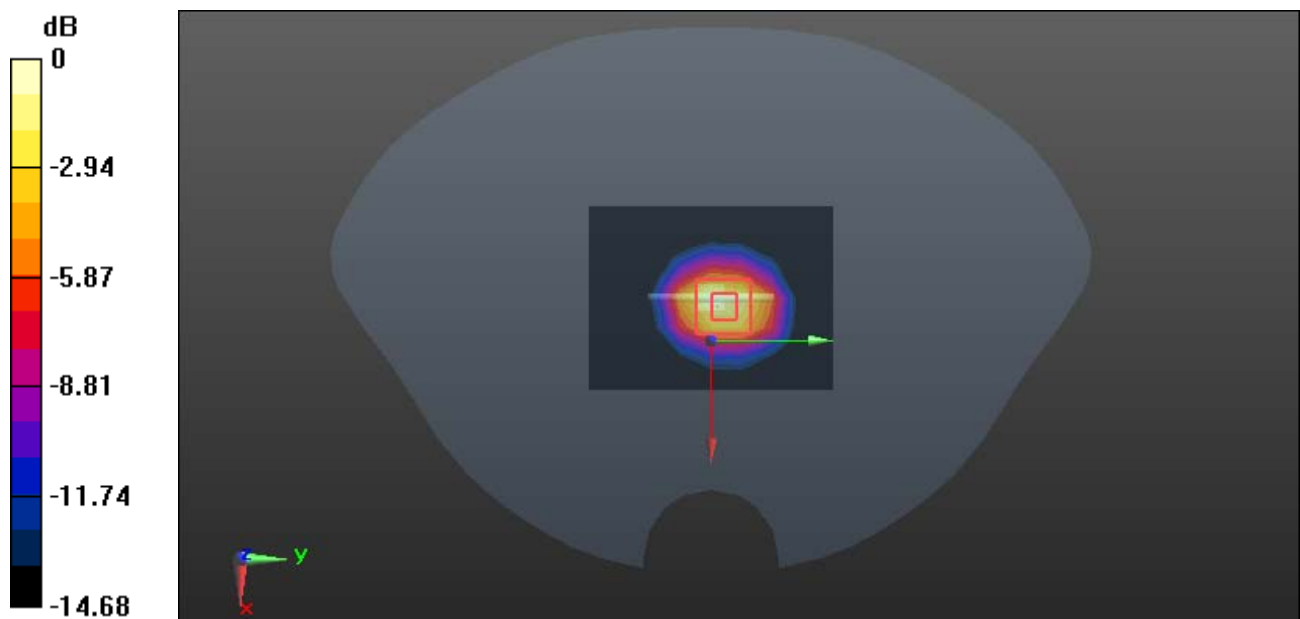

0 dB = 8.25 W/kg = 9.16 dBW/kg

System Performance 5250 MHz Head**DUT: D5GHzV2; Type: 5250 MHz; Serial: 1246**

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.65$ S/m; $\epsilon_r = 36.542$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5250 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 17.4 W/kg


Zoom Scan (7x7x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 42.57 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 25.2 W/kg

SAR(1 g) = 7.12 W/kg; SAR(10 g) = 2.02 W/kg

Maximum value of SAR (measured) = 17.6 W/kg

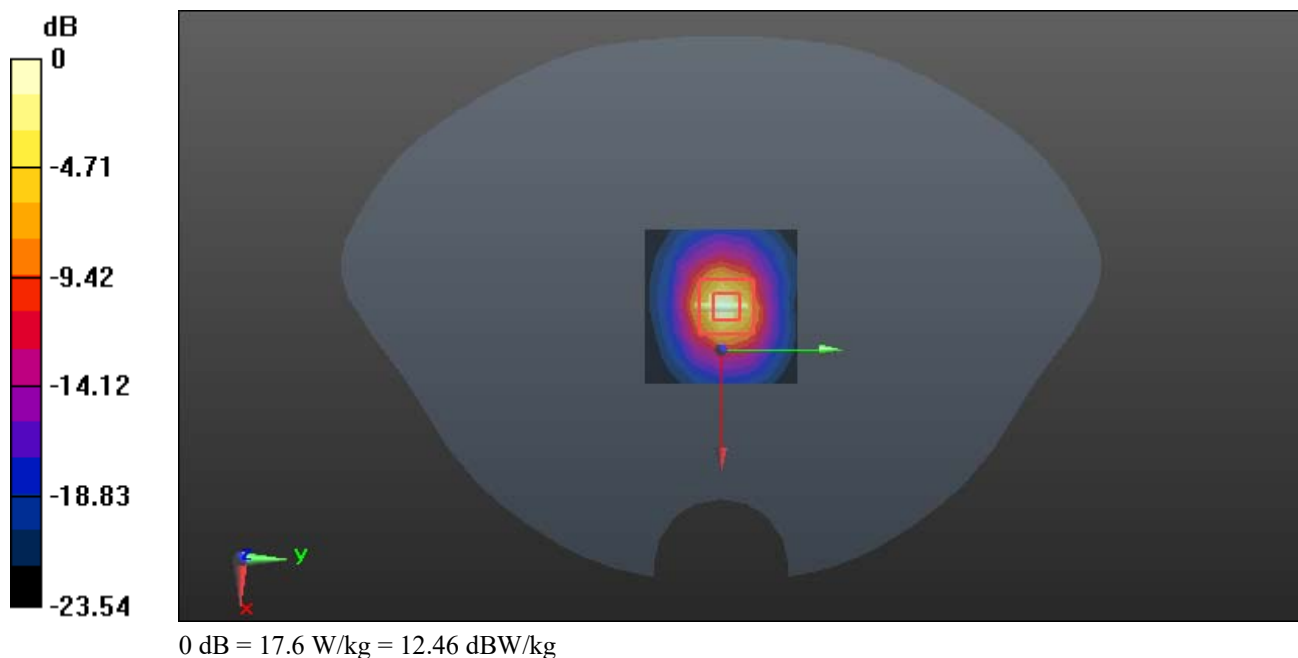

System Performance 5750 MHz Head**DUT: D5GHzV2; Type: 5750 MHz; Serial: 1246**

Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.229$ S/m; $\epsilon_r = 35.396$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.04, 4.65, 4.62) @ 5750 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 18.6 W/kg


Zoom Scan (7x7x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 38.47 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 29.4 W/kg

SAR(1 g) = 7.23 W/kg; SAR(10 g) = 2.14 W/kg

Maximum value of SAR (measured) = 16.4 W/kg

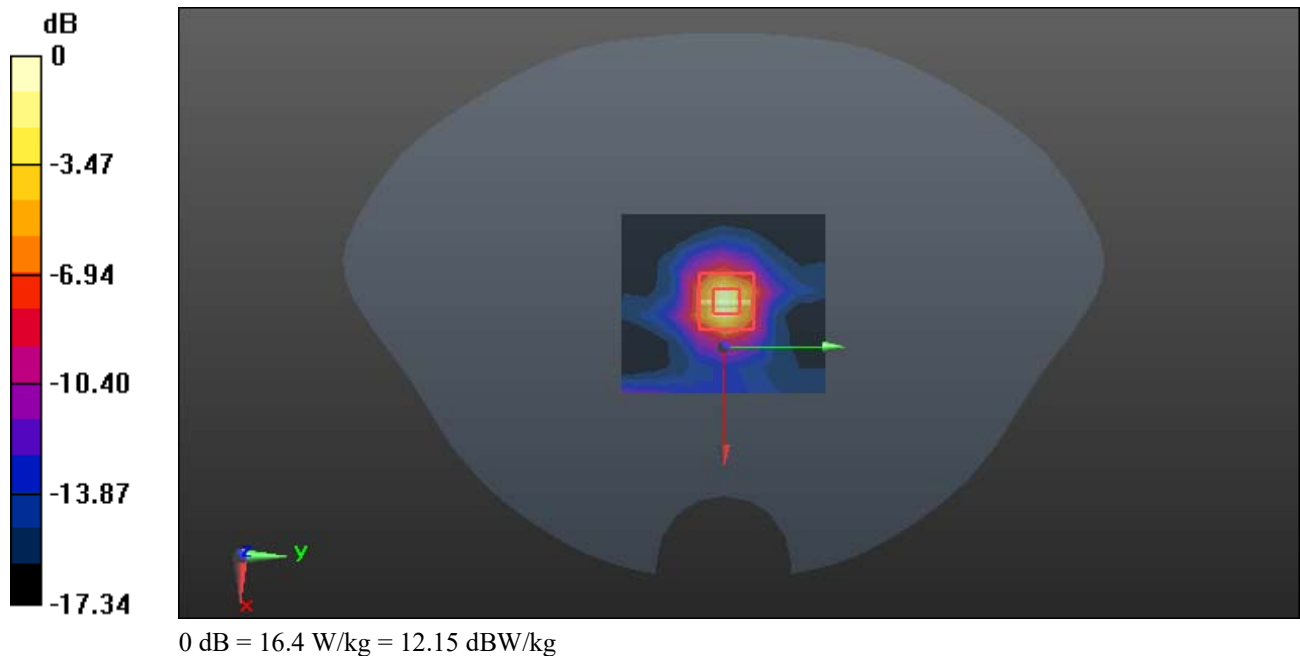

6. EUT TEST STRATEGY AND METHODOLOGY

6.1 Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

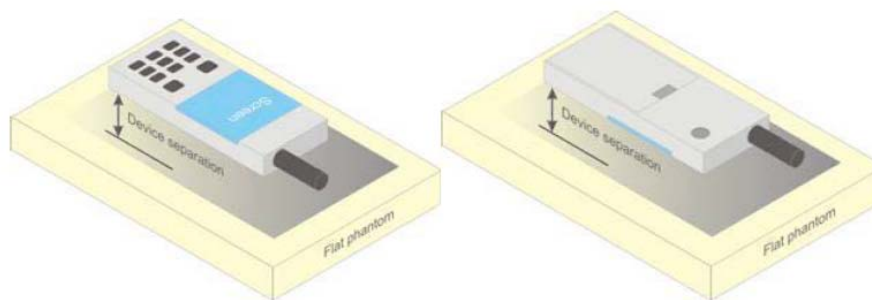


Figure 5 – Test positions for body-worn devices

6.2 Test Distance for SAR Evaluation

For Handheld mode(10g Extremity SAR) the EUT(Equipment Under Test) is set directly against the phantom, the test distance is 0mm;

For Body Supported mode(10g Body SAR) the EUT is set 5mm away from the phantom, the test distance is 5mm.

6.3 SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.


All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.


7. CONDUCTED OUTPUT POWER MEASUREMENT

7.1 Test Procedure

The RF output of the transmitter was connected to the input of the Wireless Communication Test Set through Connector.

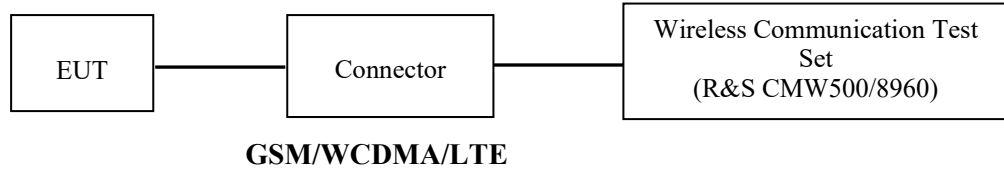

The RF output of the transmitter was connected to the input port of the USB Wideband Power Sensor through Connector.

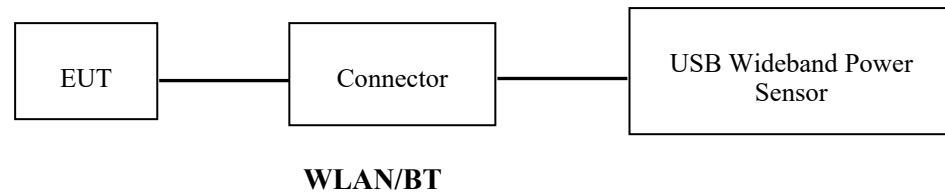

7.2 Radio Configuration

The power measurement was configured by the Wireless Communication Test Set.

GSM/GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

> 27 dBm for EGPRS 850

> 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desired test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

WCDMA Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP

TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP

TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	$\beta_d(\text{SF})$	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c / β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs} = \beta_{hs} / \beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI's	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27

FDD-LTE

For UE Power Class 1 and 3, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2-1 due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

For UE Power Class 1 and 3 the specific requirements and identified sub clauses are specified in Table 6.2.4-1 along with the allowed A-MPR values that may be used to meet these requirements. The allowed A-MPR values specified below in Table 6.2.4.-1 to 6.2.4-15 are in addition to the allowed MPR requirements specified in sub clause 6.2.3.

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
NS_05	6.6.3.3.1	1	10, 15, 20	Table 6.2.4-4	
NS_06	6.6.2.2.3	12, 13, 14, 17	10, 15, 20	≥ 50	≤ 1
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	
NS_08	6.6.3.3.2			Table 6.2.4-2	
NS_09	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_10	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_11	6.6.2.2.1	20	15, 20	Table 6.2.4-3	
NS_12	6.6.2.2.1	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_13	6.6.3.3.5	26	1.4, 3, 5	Table 6.2.4-6	
NS_14	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_15	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_16	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9 Table 6.2.4-10	
NS_17	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_18	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_19	6.6.3.3.11	28	5	≥ 2	≤ 1
			10, 15, 20	≥ 1	≤ 4
NS_20	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_21	6.2.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_22	6.6.2.2.1				
NS_23	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_24	6.6.3.2				
NS_25	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_26	6.6.3.2				
NS_27	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_28	6.6.3.2				
NS_29	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_30	6.6.3.2				
NS_31	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_32	6.6.3.2				
NS_33	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_34	6.6.3.2				
NS_35	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_36	6.6.3.2				
NS_37	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_38	6.6.3.2				
NS_39	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_40	6.6.3.2				
NS_41	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_42	6.6.3.2				
NS_43	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_44	6.6.3.2				
NS_45	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_46	6.6.3.2				
NS_47	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_48	6.6.3.2				
NS_49	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_50	6.6.3.2				
NS_51	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_52	6.6.3.2				
NS_53	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_54	6.6.3.2				
NS_55	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_56	6.6.3.2				
NS_57	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_58	6.6.3.2				
NS_59	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_60	6.6.3.2				
NS_61	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_62	6.6.3.2				
NS_63	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_64	6.6.3.2				
NS_65	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_66	6.6.3.2				
NS_67	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_68	6.6.3.2				
NS_69	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_70	6.6.3.2				
NS_71	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_72	6.6.3.2				
NS_73	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_74	6.6.3.2				
NS_75	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_76	6.6.3.2				
NS_77	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_78	6.6.3.2				
NS_79	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_80	6.6.3.2				
NS_81	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_82	6.6.3.2				
NS_83	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_84	6.6.3.2				
NS_85	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_86	6.6.3.2				
NS_87	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_88	6.6.3.2				
NS_89	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_90	6.6.3.2				
NS_91	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_92	6.6.3.2				
NS_93	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_94	6.6.3.2				
NS_95	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_96	6.6.3.2				
NS_97	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_98	6.6.3.2				
NS_99	6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_100	6.6.3.2				

TDD-LTE

P TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

We used configuration 0 for LTE Band 41 SAR test, that is 63.33%(1:1.58) for duty cycle.

7.3 Maximum Target Output Power

Mode/Band	Max Target Power(dBm)		
	Channel		
	Low	Middle	High
GSM 850 GPRS 1 TX Slot	26	26	26
GSM 850 GPRS 2 TX Slot	25	25	25
GSM 850 GPRS 3 TX Slot	23	23	23
GSM 850 GPRS 4 TX Slot	21	21	21
GSM 850 EDGE 1 TX Slot	25.5	25.5	25.5
GSM 850 EDGE 2 TX Slot	24.5	24.5	24.5
GSM 850 EDGE 3 TX Slot	22.5	22.5	22.5
GSM 850 EDGE 4 TX Slot	20.5	20.5	20.5
PCS 1900 GPRS 1 TX Slot	22	22	22
PCS 1900 GPRS 2 TX Slot	21	21	21
PCS 1900 GPRS 3 TX Slot	19	19	19
PCS 1900 GPRS 4 TX Slot	17	17	17
PCS 1900 EDGE 1 TX Slot	21.5	21.5	21.5
PCS 1900 EDGE 2 TX Slot	20.5	20.5	20.5
PCS 1900 EDGE 3 TX Slot	18.5	18.5	18.5
PCS 1900 EDGE 4 TX Slot	16	16	16
WCDMA Band 2	23.5	23.5	23.5
HSDPA	21.2	21.2	21.2
HSUPA	20.8	20.8	20.8
WCDMA Band 5	24.3	24.3	24.3
HSDPA	22	22	22
HSUPA	22	22	22
LTE Band 2(20M)	22.5	22.5	22.5
LTE Band 4(20M)	23.2	23.2	23.2
LTE Band 5(10M)	23.6	23.6	23.6
LTE Band 7(20M)	22.5	22.5	22.5
LTE Band 12(10M)	24	24	24
LTE Band 13(10M)	23.7	23.7	23.7
LTE Band 17(10M)	24	24	24
LTE Band 25(20M)	22.5	22.5	22.5
LTE Band 26(15M)	23.6	23.6	23.6
LTE Band 38(20M)	23.3	23.3	23.3
LTE Band 41(20M)	23.3	23.3	23.3
LTE Band 66(20M)	23.2	23.2	23.2
LTE Band 71(20M)	23.8	23.8	23.8
Wi-Fi 2.4G(802.11b)	9.2	9.2	9.2
Wi-Fi 2.4G (802.11g)	13.5	13.5	13.5
Wi-Fi 2.4G (802.11n ht20)	12	12	12
Wi-Fi 2.4G (802.11n ht40)	11.3	11.3	11.3

Max Target Power(dBm)			
Mode/Band	Channel		
	Low	Middle	High
Wi-Fi 5.2G(802.11a)	14.6	14.6	14.6
Wi-Fi 5.2G (802.11n20)	14	14	14
Wi-Fi 5.2G (802.11n40)	12.1	/	12.1
Wi-Fi 5.2G (802.11ac20)	14	14	14
Wi-Fi 5.2G (802.11ac40)	12.1	/	12.1
Wi-Fi 5.2G (802.11ac80)	/	9	/
Wi-Fi 5.3G(802.11a)	13.8	13.8	13.8
Wi-Fi 5.3G (802.11n20)	14.2	14.2	14.2
Wi-Fi 5.3G (802.11n40)	14	/	14
Wi-Fi 5.3G (802.11ac20)	14.2	14.2	14.2
Wi-Fi 5.3G (802.11ac40)	14	/	14
Wi-Fi 5.3G (802.11ac80)	/	9.1	/
Wi-Fi 5.6G(802.11a)	6	6	6
Wi-Fi 5.6G (802.11n20)	7	7	7
Wi-Fi 5.6G (802.11n40)	7.2	7.2	7.2
Wi-Fi 5.6G (802.11ac20)	7	7	7
Wi-Fi 5.6G (802.11ac40)	7.2	7.2	7.2
Wi-Fi 5.6G (802.11ac80)	7	7	7
Wi-Fi 5.8G(802.11a)	7	7	7
Wi-Fi 5.8G (802.11n20)	7.8	7.8	7.8
Wi-Fi 5.8G (802.11n40)	8.8	/	8.8
Wi-Fi 5.8G (802.11ac20)	7.8	7.8	7.8
Wi-Fi 5.8G (802.11ac40)	8.8	/	8.8
Wi-Fi 5.8G (802.11ac80)	/	8.5	/
Bluetooth BDR	0.5	1.5	-2
Bluetooth EDR	0.5	1.5	-2
BLE 1M	-6	-5	-9

7.4 Test Results:**GPRS:**

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	25.86	24.76	22.72	20.72
	190	836.6	25.93	24.71	22.65	20.55
	251	848.8	25.91	24.65	22.67	20.64
PCS 1900	512	1850.2	21.62	20.52	18.43	16.62
	661	1880	21.56	20.67	18.65	16.68
	810	1909.8	21.42	20.29	18.29	16.27

EDGE:

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	25.36	24.08	22.26	20.23
	190	836.6	25.39	24.33	22.43	20.27
	251	848.8	25.37	24.26	22.19	20.26
PCS 1900	512	1850.2	21.12	19.77	17.88	15.99
	661	1880	21.19	20.06	18.16	15.97
	810	1909.8	21.12	19.97	17.97	15.99

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB
Crest Factor	8	4	2.66	2

The time based average power for GPRS

Band	Channel No.	Frequency (MHz)	Time based average Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GSM 850	128	824.2	16.86	18.76	18.47	17.72
	190	836.6	16.93	18.71	18.4	17.55
	251	848.8	16.91	18.65	18.42	17.64
PCS 1900	512	1850.2	12.62	14.52	14.18	13.62
	661	1880	12.56	14.67	14.4	13.68
	810	1909.8	12.42	14.29	14.04	13.27

The time based average power for EDGE

Band	Channel No.	Frequency (MHz)	Time based average Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GSM 850	128	824.2	16.36	18.08	18.01	17.23
	190	836.6	16.39	18.33	18.18	17.27
	251	848.8	16.37	18.26	17.94	17.26
PCS 1900	512	1850.2	12.12	13.77	13.63	12.99
	661	1880	12.19	14.06	13.91	12.97
	810	1909.8	12.12	13.97	13.72	12.99

Note:

1. Agilent Technologies Communication Tester (8960) was used for the measurement of GSM peak and average output power for active timeslots.
2. For GSM voice, 1 timeslot has been activated with power level 5 (850 MHz band) and 0 (1900 MHz band).
3. For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).
4. According to KDB941225D01-SAR for EGPRS mode are not required when the source-based time-averaged output power for data mode is lower than that in the normal GPRS mode.

WCDMA:
Results (12.2kbps RMC)

Band	Frequency (MHz)	RF Output Power (dBm)
WCDMA Band 2	1852.4	23.32
	1880	23.27
	1907.6	23.01
WCDMA Band 5	826.4	23.8
	836.6	24.12
	846.6	23.81

Results (HSDPA)

Band	Frequency (MHz)	RF Output Power (dBm)			
		Subset 1	Subset 2	Subset 3	Subset 4
WCDMA Band 2	1852.4	20.74	21.08	20.73	20.78
	1880	20.9	20.97	20.92	20.93
	1907.6	20.93	20.94	21.03	20.87
WCDMA Band 5	826.4	21.62	21.53	21.73	21.82
	836.6	21.79	21.6	21.73	21.64
	846.6	21.81	21.86	21.83	21.73

Results (HSUPA)

Band	Frequency (MHz)	RF Output Power (dBm)				
		Subset 1	Subset 2	Subset 3	Subset 4	Subset 5
WCDMA Band 2	1852.4	20.49	20.47	20.31	20.62	20.39
	1880	20.56	20.49	20.58	20.36	20.66
	1907.6	20.47	20.48	20.62	20.68	20.42
WCDMA Band 5	826.4	21.86	21.87	21.6	21.55	21.73
	836.6	21.82	21.89	21.85	21.73	21.84
	846.6	21.84	21.74	21.79	21.88	21.57

Note:

1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1.
2. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/DC-HSDPA/HSPA+ when the maximum average output of each RF channel is less than ¼ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

LTE Band 2:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	0	0	22.38	22.4	22.26
		RB1#3	0	0	22.43	22.39	22.36
		RB1#5	0	0	22.42	22.28	22.27
		RB3#0	1	1	21.77	21.9	21.82
		RB3#3	1	1	21.9	21.81	21.9
		RB6#0	1	1	21.87	21.77	21.87
	16-QAM	RB1#0	1	1	21.47	21.41	21.4
		RB1#3	1	1	21.42	21.43	21.49
		RB1#5	2	2	21.34	21.43	21.38
		RB3#0	2	2	20.93	20.97	20.99
		RB3#3	2	2	20.97	20.94	20.81
		RB6#0	2	2	20.97	20.97	20.97
3M	QPSK	RB1#0	0	0	21.73	21.82	21.76
		RB1#8	0	0	21.83	21.84	21.7
		RB1#14	0	0	21.76	21.72	21.7
		RB6#0	1	1	21.18	21.18	21.23
		RB6#9	1	1	21.2	21.35	21.21
		RB15#0	1	1	21.23	21.27	21.18
	16-QAM	RB1#0	1	1	21.51	21.51	21.59
		RB1#8	1	1	21.65	21.54	21.57
		RB1#14	1	1	21.53	21.6	21.65
		RB6#0	2	2	21.1	21.17	21.16
		RB6#9	2	2	21.01	21.14	21.01
		RB15#0	2	2	21.12	21.11	21.16
5M	QPSK	RB1#0	0	0	22.19	22.1	22.19
		RB1#13	0	0	22.1	22.27	22.16
		RB1#24	0	0	22.24	22.28	22.19
		RB15#0	1	1	21.65	21.61	21.68
		RB15#10	1	1	21.73	21.76	21.79
		RB25#0	1	1	21.72	21.68	21.79
	16-QAM	RB1#0	1	1	21.1	21.06	21.08
		RB1#13	1	1	21.1	21.15	21.05
		RB1#24	1	1	21.22	21.09	21.18
		RB15#0	2	2	20.78	20.72	20.7
		RB15#10	2	2	20.78	20.72	20.7
		RB25#0	2	2	20.78	20.6	20.74

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	RB1#0	0	0	22.12	22.21	22.24
		RB1#25	0	0	22.24	22.13	22.15
		RB1#49	1	1	22.15	22.2	22.28
		RB25#0	1	1	21.59	21.67	21.62
		RB25#25	1	1	21.61	21.7	21.6
		RB50#0	1	1	21.7	21.58	21.71
	16-QAM	RB1#0	1	1	21.79	21.74	21.7
		RB1#25	1	1	21.82	21.78	21.66
		RB1#49	1	1	21.77	21.8	21.67
		RB25#0	2	2	21.29	21.13	21.09
		RB25#25	2	2	21.17	21.14	21.15
		RB50#0	2	2	21.29	21.25	21.28
15M	QPSK	RB1#0	0	0	22.02	22.17	22.16
		RB1#38	0	0	21.99	22.05	21.92
		RB1#74	1	1	22.01	22.09	22.04
		RB36#0	1	1	21.49	21.59	21.49
		RB36#39	1	1	21.51	21.59	21.52
		RB75#0	1	1	21.49	21.48	21.48
	16-QAM	RB1#0	1	1	21.75	21.54	21.59
		RB1#38	1	1	21.64	21.75	21.56
		RB1#74	2	2	21.74	21.56	21.71
		RB36#0	2	2	21.04	21.14	21.12
		RB36#39	2	2	21.12	21.02	21.06
		RB75#0	2	2	21.04	21.11	21.03
20M	QPSK	RB1#0	0	0	22.1	22.2	22.23
		RB1#50	0	0	22.22	22.16	22.09
		RB1#99	0	0	22.13	22.25	22.25
		RB50#0	1	1	21.58	21.78	21.73
		RB50#50	1	1	21.7	21.66	21.69
		RB100#0	1	1	21.71	21.71	21.73
	16-QAM	RB1#0	1	1	21.51	21.5	21.62
		RB1#50	1	1	21.57	21.61	21.55
		RB1#99	2	2	21.46	21.42	21.43
		RB50#0	2	2	21.01	21.11	21.16
		RB50#50	2	2	21.01	21.04	21.07
		RB100#0	2	2	21.05	20.98	21.05

LTE Band 4:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	0	0	23.09	23.02	23.06
		RB1#3	0	0	23.13	23.17	23.15
		RB1#5	0	0	23.16	23.15	23.17
		RB3#0	1	1	22.62	22.66	22.53
		RB3#3	1	1	22.61	22.57	22.58
		RB6#0	1	1	22.6	22.53	22.66
	16-QAM	RB1#0	1	1	21.85	21.79	21.68
		RB1#3	1	1	21.83	21.73	21.75
		RB1#5	2	2	21.76	21.74	21.82
		RB3#0	2	2	21.29	21.26	21.31
		RB3#3	2	2	21.22	21.21	21.28
		RB6#0	2	2	21.27	21.25	21.19
3M	QPSK	RB1#0	0	0	22.96	23.09	22.97
		RB1#8	0	0	22.95	23.08	22.93
		RB1#14	0	0	22.92	23.02	23.03
		RB6#0	1	1	22.44	22.41	22.53
		RB6#9	1	1	22.57	22.48	22.5
		RB15#0	1	1	22.55	22.56	22.49
	16-QAM	RB1#0	1	1	21.91	21.76	21.87
		RB1#8	1	1	21.89	21.85	21.9
		RB1#14	1	1	21.75	21.83	21.76
		RB6#0	2	2	21.39	21.24	21.41
		RB6#9	2	2	21.35	21.39	21.25
		RB15#0	2	2	21.4	21.31	21.42
5M	QPSK	RB1#0	0	0	22.84	22.93	22.92
		RB1#13	0	0	22.85	22.83	22.93
		RB1#24	0	0	22.97	22.82	22.87
		RB15#0	1	1	22.46	22.42	22.35
		RB15#10	1	1	22.48	22.36	22.43
		RB25#0	1	1	22.45	22.43	22.45
	16-QAM	RB1#0	1	1	21.62	21.81	21.69
		RB1#13	1	1	21.64	21.62	21.74
		RB1#24	1	1	21.8	21.75	21.68
		RB15#0	2	2	21.33	21.28	21.23
		RB15#10	2	2	21.29	21.25	21.32
		RB25#0	2	2	21.27	21.35	21.27

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	RB1#0	0	0	23.13	23.17	23.06
		RB1#25	0	0	23.17	23.09	23.06
		RB1#49	1	1	23.06	22.97	23.06
		RB25#0	1	1	22.65	22.47	22.57
		RB25#25	1	1	22.46	22.51	22.52
		RB50#0	1	1	22.58	22.47	22.46
	16-QAM	RB1#0	1	1	22.15	22.15	22.11
		RB1#25	1	1	22.04	22.15	21.98
		RB1#49	1	1	22.05	22.09	22.18
		RB25#0	2	2	21.54	21.49	21.54
		RB25#25	2	2	21.57	21.63	21.55
		RB50#0	2	2	21.67	21.58	21.63
15M	QPSK	RB1#0	0	0	22.81	22.81	22.84
		RB1#38	0	0	22.84	22.8	22.86
		RB1#74	1	1	22.75	22.86	22.76
		RB36#0	1	1	22.24	22.22	22.35
		RB36#39	1	1	22.28	22.3	22.29
		RB75#0	1	1	22.29	22.33	22.27
	16-QAM	RB1#0	1	1	22.32	22.28	22.26
		RB1#38	1	1	22.3	22.45	22.46
		RB1#74	2	2	22.36	22.4	22.47
		RB36#0	2	2	21.79	21.78	21.85
		RB36#39	2	2	21.77	21.8	21.76
		RB75#0	2	2	21.79	21.88	21.92
20M	QPSK	RB1#0	0	0	22.81	23	22.93
		RB1#50	0	0	22.91	22.88	22.84
		RB1#99	0	0	22.82	22.85	22.87
		RB50#0	1	1	22.35	22.42	22.41
		RB50#50	1	1	22.38	22.39	22.27
		RB100#0	1	1	22.38	22.45	22.46
	16-QAM	RB1#0	1	1	22.14	22.13	22.09
		RB1#50	1	1	21.96	22.13	22.12
		RB1#99	2	2	22.14	22.06	22.03
		RB50#0	2	2	21.63	21.66	21.68
		RB50#50	2	2	21.63	21.57	21.64
		RB100#0	2	2	21.57	21.51	21.5

LTE Band 5:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	0	0	23.28	23.38	23.45
		RB1#3	0	0	23.33	23.42	23.29
		RB1#5	0	0	23.36	23.37	23.3
		RB3#0	1	1	22.93	22.79	22.82
		RB3#3	1	1	22.89	22.88	22.92
		RB6#0	1	1	22.93	22.91	22.83
	16-QAM	RB1#0	1	1	22.44	22.49	22.42
		RB1#3	1	1	22.45	22.48	22.3
		RB1#5	2	2	22.43	22.42	22.37
		RB3#0	2	2	21.81	21.83	21.98
		RB3#3	2	2	21.84	21.95	21.95
		RB6#0	2	2	21.9	21.95	21.85
3M	QPSK	RB1#0	0	0	23.28	23.37	23.3
		RB1#8	0	0	23.28	23.29	23.23
		RB1#14	1	1	23.19	23.17	23.33
		RB6#0	1	1	22.72	22.85	22.69
		RB6#9	1	1	22.7	22.76	22.8
		RB15#0	1	1	22.86	22.76	22.78
	16-QAM	RB1#0	1	1	22.87	22.94	22.84
		RB1#8	1	1	22.93	22.79	22.79
		RB1#14	2	2	22.88	22.88	22.89
		RB6#0	2	2	22.33	22.39	22.31
		RB6#9	2	2	22.4	22.36	22.4
		RB15#0	2	2	22.36	22.39	22.38
5M	QPSK	RB1#0	0	0	23.25	23.35	23.38
		RB1#13	0	0	23.28	23.24	23.31
		RB1#24	0	0	23.26	23.23	23.32
		RB15#0	1	1	22.8	22.76	22.78
		RB15#10	1	1	22.83	22.7	22.74
		RB25#0	1	1	22.73	22.76	22.75
	16-QAM	RB1#0	1	1	22.46	22.61	22.54
		RB1#13	1	1	22.57	22.52	22.54
		RB1#24	1	1	22.51	22.5	22.53
		RB15#0	2	2	22.02	22.15	22.16
		RB15#10	2	2	22.14	22.18	22.03
		RB25#0	2	2	22.1	22.14	22.12

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	RB1#0	0	0	23.35	23.38	23.44
		RB1#25	0	0	23.3	23.36	23.39
		RB1#49	1	1	23.38	23.44	23.45
		RB25#0	1	1	22.9	22.84	22.93
		RB25#25	1	1	22.91	22.82	22.88
		RB50#0	1	1	22.81	22.88	22.94
	16-QAM	RB1#0	1	1	22.7	22.72	22.77
		RB1#25	1	1	22.75	22.69	22.73
		RB1#49	2	2	22.71	22.71	22.83
		RB25#0	2	2	22.3	22.25	22.2
		RB25#25	2	2	22.16	22.14	22.29
		RB50#0	2	2	22.19	22.29	22.26

LTE Band 7:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	0	0	22.18	22.27	22.32
		RB1#13	0	0	22.18	22.3	22.25
		RB1#24	0	0	22.28	22.28	22.27
		RB15#0	1	1	21.72	21.65	21.79
		RB15#10	1	1	21.79	21.76	21.64
		RB25#0	1	1	21.72	21.74	21.83
	16-QAM	RB1#0	1	1	21.07	21.09	21.11
		RB1#13	1	1	21.07	21.06	21.01
		RB1#24	1	1	21.01	20.98	21.15
		RB15#0	2	2	20.62	20.53	20.5
		RB15#10	2	2	20.5	20.6	20.49
		RB25#0	2	2	20.63	20.54	20.52
10M	QPSK	RB1#0	0	0	22.32	22.46	22.34
		RB1#25	0	0	22.41	22.36	22.32
		RB1#49	0	0	22.41	22.41	22.31
		RB25#0	1	1	21.8	21.93	21.9
		RB25#25	1	1	21.94	21.84	21.88
		RB50#0	1	1	21.78	21.91	21.83
	16-QAM	RB1#0	1	1	21.26	21.23	21.2
		RB1#25	1	1	21.24	21.24	21.36
		RB1#49	1	1	21.28	21.32	21.35
		RB25#0	2	2	20.81	20.73	20.87
		RB25#25	2	2	20.68	20.82	20.76
		RB50#0	2	2	20.87	20.86	20.79
15M	QPSK	RB1#0	0	0	22.25	22.23	22.17
		RB1#38	0	0	22.26	22.14	22.29
		RB1#74	0	0	22.23	22.33	22.17
		RB36#0	1	1	21.72	21.73	21.8
		RB36#39	1	1	21.77	21.78	21.66
		RB75#0	1	1	21.8	21.76	21.83
	16-QAM	RB1#0	1	1	21.28	21.34	21.24
		RB1#38	1	1	21.36	21.33	21.33
		RB1#74	1	1	21.4	21.32	21.32
		RB36#0	2	2	20.9	20.82	20.92
		RB36#39	2	2	20.94	20.91	20.85
		RB75#0	2	2	20.81	20.94	20.83

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
20M	QPSK	RB1#0	0	0	22.23	22.21	22.25
		RB1#50	0	0	22.23	22.24	22.19
		RB1#99	0	0	22.17	22.12	22.31
		RB50#0	1	1	21.66	21.65	21.65
		RB50#50	1	1	21.65	21.8	21.67
		RB100#0	1	1	21.78	21.69	21.73
	16-QAM	RB1#0	1	1	21.75	21.63	21.76
		RB1#50	1	1	21.68	21.69	21.63
		RB1#99	1	1	21.82	21.86	21.73
		RB50#0	2	2	21.24	21.24	21.28
		RB50#50	2	2	21.16	21.18	21.18
		RB100#0	2	2	21.3	21.19	21.12

LTE Band 12:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	0	0	23.76	23.77	23.83
		RB1#3	0	0	23.74	23.8	23.79
		RB1#5	0	0	23.8	23.78	23.67
		RB3#0	1	1	23.14	23.16	23.21
		RB3#3	1	1	23.22	23.32	23.22
		RB6#0	1	1	23.25	23.17	23.26
	16-QAM	RB1#0	1	1	22.8	22.68	22.72
		RB1#3	1	1	22.8	22.62	22.79
		RB1#5	1	1	22.78	22.75	22.82
		RB3#0	2	2	22.23	22.21	22.3
		RB3#3	2	2	22.13	22.25	22.16
		RB6#0	2	2	22.25	22.2	22.14
3M	QPSK	RB1#0	0	0	23.66	23.65	23.63
		RB1#8	0	0	23.69	23.73	23.7
		RB1#14	0	0	23.58	23.68	23.54
		RB6#0	1	1	23.14	23.17	23.24
		RB6#9	1	1	23.13	23.07	23.06
		RB15#0	1	1	23.23	23.21	23.15
	16-QAM	RB1#0	1	1	22.54	22.65	22.59
		RB1#8	1	1	22.54	22.7	22.54
		RB1#14	1	1	22.66	22.63	22.51
		RB6#0	2	2	22.19	22.11	22.05
		RB6#9	2	2	22.03	22.1	22.02
		RB15#0	2	2	22.09	22.1	22.19
5M	QPSK	RB1#0	0	0	23.72	23.72	23.7
		RB1#13	0	0	23.7	23.68	23.75
		RB1#24	0	0	23.84	23.76	23.82
		RB15#0	1	1	23.33	23.31	23.19
		RB15#10	1	1	23.34	23.23	23.19
		RB25#0	1	1	23.28	23.18	23.29
	16-QAM	RB1#0	1	1	23.02	22.96	22.95
		RB1#13	1	1	22.97	22.87	22.87
		RB1#24	1	1	22.87	22.93	22.86
		RB15#0	2	2	22.49	22.47	22.51
		RB15#10	2	2	22.54	22.44	22.58
		RB25#0	2	2	22.45	22.48	22.59

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	RB1#0	0	0	23.73	23.88	23.9
		RB1#25	0	0	23.87	23.73	23.77
		RB1#49	0	0	23.93	23.73	23.86
		RB25#0	1	1	23.35	23.38	23.4
		RB25#25	1	1	23.27	23.35	23.33
		RB50#0	1	1	23.27	23.31	23.22
	16-QAM	RB1#0	1	1	23.45	23.26	23.45
		RB1#25	1	1	23.36	23.29	23.31
		RB1#49	1	1	23.3	23.44	23.35
		RB25#0	2	2	22.76	22.79	22.9
		RB25#25	2	2	22.76	22.81	22.9
		RB50#0	2	2	22.88	22.76	22.82

LTE Band 13:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	0	0	23.52	/	23.41
		RB1#13	0	0	23.41	/	23.5
		RB1#24	0	0	23.46	/	23.57
		RB15#0	1	1	23.02	/	23.01
		RB15#10	1	1	23.08	/	23.01
		RB25#0	1	1	22.92	/	23.05
	16-QAM	RB1#0	1	1	22.71	/	22.73
		RB1#13	1	1	22.61	/	22.74
		RB1#24	1	1	22.73	/	22.65
		RB15#0	2	2	22.23	/	22.22
		RB15#10	2	2	22.15	/	22.1
		RB25#0	2	2	22.18	/	22.25
10M	QPSK	RB1#0	0	0	/	23.65	/
		RB1#25	0	0	/	23.62	/
		RB1#49	1	1	/	23.56	/
		RB25#0	1	1	/	23.14	/
		RB25#25	1	1	/	23.03	/
		RB50#0	1	1	/	23.14	/
	16-QAM	RB1#0	1	1	/	22.62	/
		RB1#25	1	1	/	22.48	/
		RB1#49	1	1	/	22.47	/
		RB25#0	2	2	/	22.11	/
		RB25#25	2	2	/	22.03	/
		RB50#0	2	2	/	22.03	/

LTE Band 17:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	0	0	23.72	23.71	23.75
		RB1#13	0	0	23.81	23.73	23.73
		RB1#24	0	0	23.74	23.8	23.83
		RB15#0	1	1	23.21	23.19	23.14
		RB15#10	1	1	23.2	23.19	23.16
		RB25#0	1	1	23.23	23.3	23.2
	16-QAM	RB1#0	1	1	22.77	22.74	22.71
		RB1#13	1	1	22.75	22.71	22.74
		RB1#24	1	1	22.63	22.63	22.69
		RB15#0	2	2	22.25	22.21	22.13
		RB15#10	2	2	22.15	22.16	22.21
		RB25#0	2	2	22.27	22.15	22.27
10M	QPSK	RB1#0	0	0	23.69	23.68	23.63
		RB1#25	0	0	23.64	23.69	23.59
		RB1#49	1	1	23.66	23.61	23.64
		RB25#0	1	1	23.18	23.2	23.15
		RB25#25	1	1	23.22	23.23	23.11
		RB50#0	1	1	23.14	23.21	23.14
	16-QAM	RB1#0	1	1	22.61	22.58	22.63
		RB1#25	1	1	22.64	22.67	22.66
		RB1#49	1	1	22.51	22.53	22.53
		RB25#0	2	2	22.03	22.15	22.02
		RB25#25	2	2	22.12	22.07	22.03
		RB50#0	2	2	22.07	22.05	22.1

LTE Band 25:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	0	0	22.39	22.4	22.34
		RB1#3	0	0	22.42	22.4	22.43
		RB1#5	0	0	22.26	22.31	22.29
		RB3#0	1	1	21.82	21.92	21.94
		RB3#3	1	1	21.83	21.93	21.78
		RB6#0	1	1	21.9	21.93	21.92
	16-QAM	RB1#0	1	1	21.39	21.4	21.5
		RB1#3	1	1	21.43	21.33	21.43
		RB1#5	2	2	21.38	21.37	21.38
		RB3#0	2	2	20.91	20.97	20.9
		RB3#3	2	2	21.01	20.82	20.87
		RB6#0	2	2	20.9	20.92	20.87
3M	QPSK	RB1#0	0	0	21.76	21.69	21.84
		RB1#8	0	0	21.7	21.7	21.84
		RB1#14	0	0	21.85	21.86	21.77
		RB6#0	1	1	21.21	21.29	21.19
		RB6#9	1	1	21.26	21.23	21.27
		RB15#0	1	1	21.21	21.26	21.31
	16-QAM	RB1#0	1	1	21.49	21.54	21.62
		RB1#8	1	1	21.58	21.53	21.6
		RB1#14	1	1	21.49	21.54	21.54
		RB6#0	2	2	21.08	21.18	21.09
		RB6#9	2	2	21.02	21	21.01
		RB15#0	2	2	21.17	21.15	21.04
5M	QPSK	RB1#0	0	0	22.23	22.12	22.1
		RB1#13	0	0	22.26	22.15	22.13
		RB1#24	0	0	22.18	22.17	22.23
		RB15#0	1	1	21.76	21.64	21.69
		RB15#10	1	1	21.65	21.73	21.79
		RB25#0	1	1	21.68	21.72	21.76
	16-QAM	RB1#0	1	1	21.12	21.24	21.2
		RB1#13	1	1	21.22	21.23	21.23
		RB1#24	1	1	21.21	21.22	21.15
		RB15#0	2	2	20.63	20.66	20.59
		RB15#10	2	2	20.66	20.69	20.77
		RB25#0	2	2	20.74	20.77	20.64

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	RB1#0	0	0	22.19	22.13	22.23
		RB1#25	0	0	22.18	22.11	22.19
		RB1#49	1	1	22.3	22.18	22.3
		RB25#0	1	1	21.77	21.76	21.6
		RB25#25	1	1	21.73	21.7	21.67
		RB50#0	1	1	21.76	21.7	21.63
	16-QAM	RB1#0	1	1	21.79	21.75	21.73
		RB1#25	1	1	21.69	21.73	21.76
		RB1#49	1	1	21.72	21.77	21.72
		RB25#0	2	2	21.12	21.14	21.18
		RB25#25	2	2	21.21	21.13	21.19
		RB50#0	2	2	21.12	21.13	21.27
15M	QPSK	RB1#0	0	0	22.05	22.02	22.1
		RB1#38	0	0	22.06	22.01	22.07
		RB1#74	1	1	22.09	22.08	22
		RB36#0	1	1	21.53	21.57	21.54
		RB36#39	1	1	21.61	21.51	21.61
		RB75#0	1	1	21.44	21.48	21.49
	16-QAM	RB1#0	1	1	21.58	21.53	21.65
		RB1#38	1	1	21.58	21.74	21.72
		RB1#74	2	2	21.76	21.75	21.63
		RB36#0	2	2	21.1	21.06	21.02
		RB36#39	2	2	21.18	21.15	21.16
		RB75#0	2	2	21.13	21.04	21.11
20M	QPSK	RB1#0	0	0	22.15	22.14	22.27
		RB1#50	0	0	22.27	22.08	22.25
		RB1#99	0	0	22.25	22.33	22.29
		RB50#0	1	1	21.71	21.67	21.76
		RB50#50	1	1	21.64	21.66	21.76
		RB100#0	1	1	21.65	21.72	21.76
	16-QAM	RB1#0	1	1	21.62	21.64	21.5
		RB1#50	1	1	21.59	21.44	21.59
		RB1#99	2	2	21.6	21.48	21.57
		RB50#0	2	2	20.99	21.07	20.98
		RB50#50	2	2	21.01	21.06	21.06
		RB100#0	2	2	21.04	21.01	21.12

LTE Band 26:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	0	0	23.37	23.34	23.3
		RB1#3	0	0	23.35	23.4	23.28
		RB1#5	0	0	23.29	23.41	23.36
		RB3#0	1	1	22.78	22.83	22.92
		RB3#3	1	1	22.88	22.95	22.94
		RB6#0	1	1	22.8	22.93	22.9
	16-QAM	RB1#0	1	1	22.46	22.43	22.36
		RB1#3	1	1	22.47	22.41	22.39
		RB1#5	2	2	22.43	22.42	22.36
		RB3#0	2	2	21.92	21.88	21.82
		RB3#3	2	2	21.87	21.83	21.95
		RB6#0	2	2	21.96	21.84	21.87
3M	QPSK	RB1#0	0	0	23.33	23.35	23.19
		RB1#8	0	0	23.31	23.34	23.22
		RB1#14	0	0	23.33	23.28	23.24
		RB6#0	1	1	22.8	22.86	22.77
		RB6#9	1	1	22.77	22.85	22.8
		RB15#0	1	1	22.81	22.76	22.7
	16-QAM	RB1#0	1	1	22.88	22.9	22.82
		RB1#8	1	1	22.86	22.85	22.79
		RB1#14	1	1	22.96	22.93	22.82
		RB6#0	2	2	22.35	22.38	22.4
		RB6#9	2	2	22.33	22.38	22.41
		RB15#0	2	2	22.34	22.35	22.38
5M	QPSK	RB1#0	0	0	23.36	23.19	23.31
		RB1#13	0	0	23.35	23.35	23.22
		RB1#24	0	0	23.33	23.2	23.34
		RB15#0	1	1	22.71	22.73	22.69
		RB15#10	1	1	22.73	22.73	22.84
		RB25#0	1	1	22.73	22.78	22.74
	16-QAM	RB1#0	1	1	22.52	22.58	22.63
		RB1#13	1	1	22.57	22.63	22.63
		RB1#24	1	1	22.48	22.57	22.61
		RB15#0	2	2	22.06	22.1	22.13
		RB15#10	2	2	22	22.02	22.03
		RB25#0	2	2	22.03	22.13	22.15

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	RB1#0	0	0	23.37	23.42	23.34
		RB1#25	0	0	23.48	23.35	23.41
		RB1#49	1	1	23.32	23.43	23.39
		RB25#0	1	1	22.93	22.83	22.89
		RB25#25	1	1	22.87	22.77	22.8
		RB50#0	1	1	22.92	22.78	22.9
	16-QAM	RB1#0	1	1	22.71	22.69	22.87
		RB1#25	1	1	22.69	22.63	22.72
		RB1#49	1	1	22.66	22.78	22.81
		RB25#0	2	2	22.13	22.25	22.22
		RB25#25	2	2	22.23	22.31	22.26
		RB50#0	2	2	22.25	22.23	22.23
15M	QPSK	RB1#0	0	0	23.16	23.19	23.18
		RB1#38	0	0	23.25	23.22	23.07
		RB1#74	1	1	23.18	23.07	23.21
		RB36#0	1	1	22.61	22.66	22.73
		RB36#39	1	1	22.67	22.66	22.61
		RB75#0	1	1	22.69	22.67	22.55
	16-QAM	RB1#0	1	1	22.76	22.63	22.74
		RB1#38	1	1	22.75	22.71	22.67
		RB1#74	2	2	22.72	22.69	22.73
		RB36#0	2	2	22.21	22.23	22.29
		RB36#39	2	2	22.13	22.1	22.22
		RB75#0	2	2	22.09	22.23	22.2

LTE Band 38:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	0	0	22.76	22.75	22.83
		RB1#13	0	0	22.88	22.87	22.79
		RB1#24	0	0	22.8	22.84	22.82
		RB15#0	1	1	22.25	22.26	22.26
		RB15#10	1	1	22.36	22.39	22.44
		RB25#0	1	1	22.27	22.28	22.26
	16-QAM	RB1#0	1	1	21.93	21.92	21.85
		RB1#13	1	1	21.84	21.81	21.95
		RB1#24	1	1	21.9	21.85	21.9
		RB15#0	2	2	21.41	21.42	21.32
		RB15#10	2	2	21.47	21.34	21.32
		RB25#0	2	2	21.3	21.29	21.32
10M	QPSK	RB1#0	0	0	23.15	23.16	23.18
		RB1#25	0	0	23.14	23.22	23.2
		RB1#49	0	0	23.18	23.13	23.2
		RB25#0	1	1	22.57	22.72	22.71
		RB25#25	1	1	22.66	22.66	22.63
		RB50#0	1	1	22.63	22.58	22.71
	16-QAM	RB1#0	1	1	22.13	22.16	22.2
		RB1#25	1	1	22.26	22.1	22.17
		RB1#49	1	1	22.18	22.18	22.17
		RB25#0	2	2	21.6	21.78	21.76
		RB25#25	2	2	21.76	21.79	21.64
		RB50#0	2	2	21.65	21.75	21.6
15M	QPSK	RB1#0	0	0	22.88	23.01	22.97
		RB1#38	0	0	22.93	22.9	22.93
		RB1#74	0	0	22.92	22.86	22.87
		RB36#0	1	1	22.43	22.44	22.49
		RB36#39	1	1	22.46	22.46	22.35
		RB75#0	1	1	22.43	22.49	22.35
	16-QAM	RB1#0	1	1	22.11	22.14	22.03
		RB1#38	1	1	22.11	22.14	22.06
		RB1#74	1	1	22.06	22.06	21.99
		RB36#0	2	2	21.64	21.53	21.56
		RB36#39	2	2	21.67	21.65	21.55
		RB75#0	2	2	21.65	21.58	21.63

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
20M	QPSK	RB1#0	0	0	22.92	23.08	23
		RB1#50	0	0	22.91	22.86	22.97
		RB1#99	0	0	23.02	22.93	22.97
		RB50#0	1	1	22.43	22.46	22.38
		RB50#50	1	1	22.53	22.35	22.53
		RB100#0	1	1	22.45	22.53	22.37
	16-QAM	RB1#0	1	1	21.94	21.98	21.9
		RB1#50	1	1	21.89	21.96	21.96
		RB1#99	1	1	21.84	21.99	22.05
		RB50#0	2	2	21.35	21.34	21.31
		RB50#50	2	2	21.31	21.47	21.5
		RB100#0	2	2	21.36	21.43	21.36

LTE Band 41:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	2570 MHz (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	0	0	22.9	22.77	22.93	22.76
		RB1#13	0	0	22.89	22.75	22.83	22.93
		RB1#24	1	1	22.9	22.81	22.85	22.87
		RB15#0	1	1	22.42	22.29	22.25	22.38
		RB15#10	1	1	22.37	22.26	22.4	22.4
		RB25#0	1	1	22.29	22.37	22.37	22.38
	16-QAM	RB1#0	1	1	21.98	21.8	21.95	21.95
		RB1#13	1	1	21.84	21.8	21.88	21.94
		RB1#24	1	1	21.8	21.85	21.81	21.9
		RB15#0	2	2	21.28	21.38	21.35	21.44
		RB15#10	2	2	21.47	21.42	21.32	21.43
		RB25#0	2	2	21.44	21.44	21.39	21.46
10M	QPSK	RB1#0	0	0	23.19	23.2	23.17	23.14
		RB1#25	0	0	23.12	23.15	23.12	23.18
		RB1#49	1	1	23.14	23.07	23.14	23.11
		RB25#0	1	1	22.56	22.62	22.56	22.61
		RB25#25	1	1	22.67	22.72	22.71	22.65
		RB50#0	1	1	22.6	22.57	22.57	22.66
	16-QAM	RB1#0	1	1	22.16	22.12	22.2	22.15
		RB1#25	1	1	22.17	22.2	22.21	22.23
		RB1#49	2	2	22.21	22.22	22.18	22.16
		RB25#0	2	2	21.65	21.78	21.71	21.73
		RB25#25	2	2	21.75	21.62	21.72	21.66
		RB50#0	2	2	21.72	21.7	21.76	21.62
15M	QPSK	RB1#0	0	0	22.96	22.83	23	22.87
		RB1#38	0	0	22.9	22.98	23	23.02
		RB1#74	1	1	22.94	22.97	22.87	23.01
		RB36#0	1	1	22.45	22.5	22.42	22.46
		RB36#39	1	1	22.34	22.39	22.53	22.52
		RB75#0	1	1	22.51	22.41	22.52	22.47
	16-QAM	RB1#0	1	1	22.02	22.13	22.05	22
		RB1#38	1	1	22	22.07	22.13	22.13
		RB1#74	1	1	22.1	22.09	22.13	22.17
		RB36#0	2	2	21.68	21.54	21.55	21.52
		RB36#39	2	2	21.56	21.54	21.55	21.56
		RB75#0	2	2	21.53	21.56	21.55	21.63

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	2570 MHz (dBm)	Middle Channel (dBm)	High Channel (dBm)
20M	QPSK	RB1#0	0	0	22.89	23.03	22.97	22.9
		RB1#50	0	0	22.95	22.99	22.97	23.08
		RB1#99	1	1	23.07	23	23.03	23.01
		RB50#0	1	1	22.34	22.39	22.48	22.49
		RB50#50	1	1	22.37	22.53	22.44	22.45
		RB100#0	1	1	22.41	22.35	22.52	22.4
	16-QAM	RB1#0	1	1	21.87	21.92	21.99	21.93
		RB1#50	1	1	22.01	21.85	21.92	21.96
		RB1#99	2	2	21.92	21.91	22.04	21.86
		RB50#0	2	2	21.49	21.41	21.44	21.46
		RB50#50	2	2	21.4	21.45	21.48	21.5
		RB100#0	2	2	21.5	21.5	21.49	21.47

LTE Band 66:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	0	0	23.18	23.15	23.1
		RB1#3	0	0	23.05	23.18	23
		RB1#5	0	0	23.17	23	23.01
		RB3#0	1	1	22.59	22.55	22.55
		RB3#3	1	1	22.5	22.51	22.66
		RB6#0	1	1	22.69	22.66	22.57
	16-QAM	RB1#0	1	1	21.78	21.8	21.69
		RB1#3	1	1	21.66	21.69	21.75
		RB1#5	1	1	21.74	21.79	21.8
		RB3#0	2	2	21.18	21.32	21.22
		RB3#3	2	2	21.27	21.17	21.25
		RB6#0	2	2	21.27	21.27	21.28
3M	QPSK	RB1#0	0	0	23.02	23.03	23.03
		RB1#8	0	0	23.01	23.01	23.06
		RB1#14	0	0	22.94	22.97	22.97
		RB6#0	1	1	22.55	22.43	22.58
		RB6#9	1	1	22.55	22.47	22.53
		RB15#0	1	1	22.41	22.45	22.44
	16-QAM	RB1#0	1	1	21.86	21.93	21.84
		RB1#8	1	1	21.78	21.89	21.89
		RB1#14	1	1	21.84	21.87	21.79
		RB6#0	2	2	21.27	21.32	21.26
		RB6#9	2	2	21.38	21.42	21.31
		RB15#0	2	2	21.36	21.38	21.38
5M	QPSK	RB1#0	0	0	22.99	22.9	22.82
		RB1#13	0	0	22.97	22.89	22.93
		RB1#24	0	0	22.92	22.87	22.88
		RB15#0	1	1	22.43	22.31	22.44
		RB15#10	1	1	22.39	22.36	22.48
		RB25#0	1	1	22.42	22.46	22.49
	16-QAM	RB1#0	1	1	21.71	21.71	21.63
		RB1#13	1	1	21.75	21.65	21.72
		RB1#24	1	1	21.66	21.66	21.8
		RB15#0	2	2	21.25	21.33	21.37
		RB15#10	2	2	21.33	21.17	21.34
		RB25#0	2	2	21.19	21.22	21.3

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	RB1#0	0	0	23	23.07	23.05
		RB1#25	0	0	23.03	23.01	23.06
		RB1#49	0	0	23.01	23	23.09
		RB25#0	1	1	22.54	22.5	22.52
		RB25#25	1	1	22.63	22.46	22.5
		RB50#0	1	1	22.6	22.51	22.52
	16-QAM	RB1#0	1	1	22.18	22.16	22.12
		RB1#25	1	1	22.13	22.09	22.01
		RB1#49	1	1	22.05	22.1	22.12
		RB25#0	2	2	21.54	21.67	21.57
		RB25#25	2	2	21.65	21.53	21.51
		RB50#0	2	2	21.53	21.52	21.56
15M	QPSK	RB1#0	0	0	22.69	22.8	22.83
		RB1#38	0	0	22.77	22.68	22.77
		RB1#74	0	0	22.86	22.85	22.87
		RB36#0	1	1	22.26	22.27	22.23
		RB36#39	1	1	22.34	22.31	22.34
		RB75#0	1	1	22.22	22.36	22.19
	16-QAM	RB1#0	1	1	22.43	22.33	22.41
		RB1#38	1	1	22.34	22.47	22.46
		RB1#74	1	1	22.4	22.44	22.45
		RB36#0	2	2	21.79	21.88	21.89
		RB36#39	2	2	21.79	21.83	21.82
		RB75#0	2	2	21.85	21.82	21.9
20M	QPSK	RB1#0	0	0	22.97	23	23
		RB1#50	0	0	22.86	22.93	22.83
		RB1#99	0	0	22.84	22.89	22.93
		RB50#0	1	1	22.39	22.29	22.29
		RB50#50	1	1	22.45	22.39	22.33
		RB100#0	1	1	22.38	22.42	22.41
	16-QAM	RB1#0	1	1	22.18	22.17	22.08
		RB1#50	1	1	21.96	22.09	22.05
		RB1#99	1	1	22.02	22.06	22.02
		RB50#0	2	2	21.61	21.62	21.58
		RB50#50	2	2	21.56	21.66	21.57
		RB100#0	2	2	21.51	21.61	21.63

LTE Band 71:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	0	0	23.6	23.71	23.57
		RB1#13	0	0	23.67	23.56	23.66
		RB1#24	1	1	23.63	23.55	23.67
		RB15#0	1	1	23.14	23.17	23.13
		RB15#10	1	1	23.12	23.05	23.09
		RB25#0	1	1	23.23	23.06	23.05
	16-QAM	RB1#0	1	1	22.83	22.87	22.91
		RB1#13	1	1	22.98	22.82	22.97
		RB1#24	1	1	22.94	22.87	22.85
		RB15#0	2	2	22.45	22.43	22.31
		RB15#10	2	2	22.45	22.42	22.36
		RB25#0	2	2	22.45	22.33	22.43
10M	QPSK	RB1#0	0	0	23.49	23.68	23.62
		RB1#25	0	0	23.6	23.56	23.61
		RB1#49	1	1	23.5	23.58	23.6
		RB25#0	1	1	23.13	23.04	23.05
		RB25#25	1	1	23.06	23.14	23.02
		RB50#0	1	1	23.15	23.14	23
	16-QAM	RB1#0	1	1	23.15	23.06	23.15
		RB1#25	1	1	23.07	23.17	23.08
		RB1#49	2	2	23.14	23.11	23.02
		RB25#0	2	2	22.54	22.61	22.6
		RB25#25	2	2	22.66	22.69	22.54
		RB50#0	2	2	22.6	22.61	22.66
15M	QPSK	RB1#0	0	0	23.61	23.63	23.54
		RB1#38	0	0	23.68	23.67	23.62
		RB1#74	1	1	23.58	23.55	23.68
		RB36#0	1	1	23.02	23.02	23.1
		RB36#39	1	1	23.12	23.12	23.09
		RB75#0	1	1	23.12	23.09	23.14
	16-QAM	RB1#0	1	1	23.09	23.06	23.09
		RB1#38	1	1	23.03	23.05	23.12
		RB1#74	1	1	23.01	23.01	22.95
		RB36#0	2	2	22.5	22.54	22.68
		RB36#39	2	2	22.52	22.69	22.64
		RB75#0	2	2	22.57	22.57	22.69

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
20M	QPSK	RB1#0	0	0	23.65	23.72	23.76
		RB1#50	0	0	23.65	23.67	23.59
		RB1#99	1	1	23.7	23.73	23.63
		RB50#0	1	1	23.22	23.2	23.05
		RB50#50	1	1	23.21	23.1	23.08
		RB100#0	1	1	23.15	23.17	23.13
	16-QAM	RB1#0	1	1	23.15	23.1	23.12
		RB1#50	1	1	23.23	23.17	23.22
		RB1#99	2	2	23.21	23.18	23.25
		RB50#0	2	2	22.64	22.68	22.74
		RB50#50	2	2	22.6	22.61	22.59
		RB100#0	2	2	22.7	22.75	22.69

WLAN 2.4G:

Mode	Channel frequency (MHz)	Data Rate	Duty Cycle (%)	Conducted Average Output Power(dBm)
802.11b	2412	1Mbps	99.45	9.09
	2437			9.07
	2462			9.01
802.11g	2412	6Mbps	96.87	13.48
	2437			13.29
	2462			13.39
802.11n ht20	2412	MCS0	96.58	11.77
	2437			11.87
	2462			11.58
802.11n ht40	2422	MCS0	93.50	11.03
	2437			11.22
	2452			11.09

Note: The duty cycle plots, please refer to the radio report: KS1240221-08647E-RF-00C.

Wi-Fi 5.2G:

Mode	Channel frequency (MHz)	Data Rate	Duty Cycle (%)	Max Average Output Power(dBm)
802.11a	5180	6Mbps	100	14.24
	5200			14.51
	5240			14.39
802.11n20	5180	MCS0	100	13.7
	5200			13.99
	5240			13.64
802.11n40	5190	MCS0	100	11.93
	5230			11.92
802.11ac20	5180	MCS0	100	13.41
	5200			13.28
	5240			13.32
802.11ac40	5190	MCS0	100	11.62
	5230			11.51
802.11ac80	5210	MCS0	100	8.88

Note: The duty cycle plots, please refer to the radio report: KS1240221-08647E-RF-00D.

Wi-Fi 5.3G:

Mode	Channel frequency (MHz)	Data Rate	Duty Cycle (%)	Max Average Output Power(dBm)
802.11a	5260	6Mbps	100	13.69
	5280			13.67
	5320			13.44
802.11n20	5260	MCS0	100	14.18
	5280			13.99
	5320			13.9
802.11n40	5270	MCS0	100	13.72
	5310			13.56
802.11ac20	5260	MCS0	100	13.61
	5280			13.53
	5320			13.79
802.11ac40	5270	MCS0	100	13.55
	5310			13.34
802.11ac80	5290	MCS0	100	9.03

Note: The duty cycle plots, please refer to the radio report: KS1240221-08647E-RF-00D.

Wi-Fi 5.6G:

Mode	Channel frequency (MHz)	Data Rate	Duty Cycle (%)	Max Average Output Power(dBm)
802.11a	5500	6Mbps	100	5.87
	5580			5.72
	5700			5.66
	5720			5.04
802.11n20	5500	MCS0	100	6.58
	5580			6.56
	5700			6.72
	5720			6.88
802.11n40	5510	MCS0	100	7.17
	5590			6.93
	5670			7.07
	5710			6.76
802.11ac20	5500	MCS0	100	6.27
	5580			6.12
	5700			6.08
	5720			6.11
802.11ac40	5510	MCS0	100	6.75
	5590			6.55
	5670			6.71
	5710			6.65
802.11ac80	5530	MCS0	100	6.76
	5610			6.93
	5690			6.92

Note: The duty cycle plots, please refer to the radio report: KS1240221-08647E-RF-00D.

Wi-Fi 5.8G:

Mode	Channel frequency (MHz)	Data Rate	Duty Cycle (%)	Max Average Output Power(dBm)
802.11a	5745	6Mbps	100	6.97
	5785			6.87
	5825			6.71
802.11n20	5745	MCS0	100	7.64
	5785			7.57
	5825			7.4
802.11n40	5755	MCS0	100	8.66
	5795			8.54
802.11ac20	5745	MCS0	100	7.41
	5785			7.22
	5825			7.31
802.11ac40	5755	MCS0	100	8.43
	5795			8.19
802.11ac80	5775	MCS0	100	8.46


Note: The duty cycle plots, please refer to the radio report: KS1240221-08647E-RF-00D.

Bluetooth:

Mode	Channel frequency (MHz)	RF Output Power (dBm)
BDR(GFSK)	2402	0.42
	2441	1.34
	2480	-2.85
EDR($\pi/4$ -DQPSK)	2402	-0.41
	2441	0.59
	2480	-3.44
EDR(8DPSK)	2402	-0.49
	2441	0.52
	2480	-3.43
Bluetooth LE	2402	-6.65
	2440	-5.84
	2480	-9.6

8. STANDALONE SAR TEST EXCLUSION CONSIDERATIONS

8.1 Antennas Location:

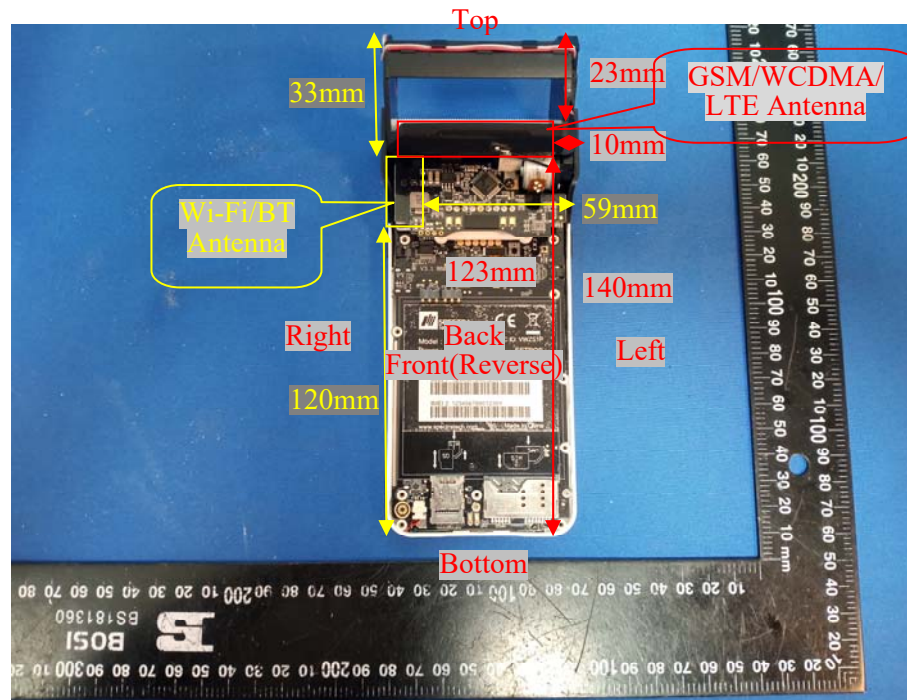

8.2 Antenna Distance To Edge

Antenna Distance To Edge(mm)						
Antenna	Back	Front	Left	Right	Top	Bottom
WWAN (GSM/WCDMA/LTE) Antenna	< 5	< 5	10	< 5	23	140
Wi-Fi/BT Antenna	< 5	< 5	59	< 5	33	120

8.3 Standalone SAR test exclusion considerations

Mode	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
WLAN 2.4G	2462	13.5	22.39	0	7.0	3	NO
Wi-Fi 5.2G	5240	14.6	28.84	0	13.2	3	NO
Wi-Fi 5.3G	5320	14.2	26.3	0	12.1	3	NO
Wi-Fi 5.6G	5720	7.2	5.25	0	2.5	3	YES
Wi-Fi 5.8G	5825	8.8	7.59	0	3.7	3	NO
Bluetooth	2480	1.5	1.41	0	0.4	3	YES

Note: The WLAN based average power for calculation. and bluetooth based peak output power for calculation. The Bluetooth SAR was seleted to test.

NOTE:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

According to KDB447498 D01 General RF Exposure Guidance v06: 4.3. General SAR test exclusion guidance
c) For frequencies below 100 MHz, the following may be considered for SAR test exclusion (also illustrated in Appendix C):

1) For test separation distances > 50 mm and < 200 mm, the power threshold at the corresponding test separation distance at 100 MHz in step b) is multiplied by $[1 + \log(100/f(\text{MHz}))]$

2) For test separation distances ≤ 50 mm, the power threshold determined by the equation in c) 1) for 50 mm and 100 MHz is multiplied by $\frac{1}{2}$

3) SAR measurement procedures are not established below 100 MHz

Measurement Result:

For NFC, the power of EUT: E Field@3m is 75.33 dBuV/m = -19.87dBm (0.01mW)

Note: $E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2$ for $d = 3$ m.

SAR test exclusion threshold for NFC(13.56MHz) separation distance < 50 mm

$$=[474 \cdot (1 + \log(100/f(\text{MHz})))]/2$$

$$= 443\text{mW}$$

$$> 0.01\text{mW}$$

Conclusion:

The NFC SAR evaluation can be exempted.

8.4 Standalone SAR estimation:

Mode	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Distance (mm)	Estimated SAR (W/kg)
BT Body	2480	1.5	1.41	5	0.06 (1g)
BT Extremity	2480	1.5	1.41	0	0.02 (10g)
Wi-Fi 5.6G Body	5720	7.2	5.25	5	0.33 (1g)
Wi-Fi 5.6G Extremity	5720	7.2	5.25	0	0.13 (10g)

Note: The bluetooth based peak power for calculation, and the Wi-Fi based average power for calculation.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})} / x]$$

W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion

8.5 SAR test exclusion for the EUT edge considerations Result

Mode	Back	Front	Left	Right	Top	Bottom
WLAN	Required	Required	Exclusion	Required	Exclusion	Exclusion
WWAN(GSM/WCDMA/LTE)	Required	Required	Required	Required	Required	Exclusion

Note:

Required: The distance to Edge is less than 25mm, testing is required.

Exclusion: The distance to Edge is more than 25 mm, testing is not required.

9. SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

9.1 SAR Test Data

Environmental Conditions

Temperature:	22.5-23.6 °C	22.5-23.2 °C	22.2-22.7 °C	22.7-23.4 °C	22.7-23.4 °C
Relative Humidity:	35 %	41%	48 %	45 %	45 %
ATM Pressure:	100.6 kPa	100.1 kPa	100.3 kPa	100.2 kPa	100.9 kPa
Test Date:	2024/06/20	2024/07/06	2024/07/07	2024/07/08	2024/07/09

Testing was performed by Rain Yu, Wen Wang, Mark Dong.

GSM 850:**Body Supported Mode**

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (5mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	24.71	25	1.069	0.11	0.12	1#
	848.8	GPRS	/	/	/	/	/	/

Handheld Mode

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	10g SAR (W/kg), Limit=4.0W/kg			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Handheld Back (0mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	24.71	25	1.069	0.357	0.38	2#
	848.8	GPRS	/	/	/	/	/	/
Handheld Front (0mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	24.71	25	1.069	0.021	0.02	/
	848.8	GPRS	/	/	/	/	/	/
Handheld Left (0mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	24.71	25	1.069	0.221	0.24	/
	848.8	GPRS	/	/	/	/	/	/
Handheld Right (0mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	24.71	25	1.069	0.219	0.23	/
	848.8	GPRS	/	/	/	/	/	/
Handheld Top (0mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	24.71	25	1.069	0.014	0.01	/
	848.8	GPRS	/	/	/	/	/	/

Note:

1. When the SAR value is less than half of the limit, testing for low and high channel is optional.
2. The EUT transmit and receive through the same GSM antenna while testing SAR.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
4. When the maximum output power variation across the required test channels is > 0.5 dB, instead of the middle channel, the highest output power channel must be used.
5. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 3DL+2UL is the worst case.

PCS 1900:**Body Supported Mode**

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (5mm)	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	20.67	21	1.079	0.603	0.65	3#
	1909.8	GPRS	/	/	/	/	/	/

Handheld Mode

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	10g SAR (W/kg), Limit=4.0W/kg			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Handheld Back (0mm)	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	20.67	21	1.079	1.47	1.59	4#
	1909.8	GPRS	/	/	/	/	/	/
Handheld Front (0mm)	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	20.67	21	1.079	0.032	0.03	/
	1909.8	GPRS	/	/	/	/	/	/
Handheld Left (0mm)	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	20.67	21	1.079	0.481	0.52	/
	1909.8	GPRS	/	/	/	/	/	/
Handheld Right (0mm)	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	20.67	21	1.079	0.326	0.35	/
	1909.8	GPRS	/	/	/	/	/	/
Handheld Top (0mm)	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	20.67	21	1.079	0.021	0.02	/
	1909.8	GPRS	/	/	/	/	/	/

Note:

1. When the SAR value is less than half of the limit, testing for low and high channel is optional.
2. The EUT transmit and receive through the same GSM antenna while testing SAR.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
4. When the maximum output power variation across the required test channels is > 0.5 dB, instead of the middle channel, the highest output power channel must be used.
5. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 3DL+2UL is the worst case.

WCDMA Band 2:**Body Supported Mode**

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (5mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	23.27	23.50	1.054	0.105	0.11	5#
	1907.6	RMC	/	/	/	/	/	/

Handheld Mode

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	10g SAR (W/kg), Limit=4.0W/kg			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Handheld Back (0mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	23.27	23.50	1.054	0.991	1.04	6#
	1907.6	RMC	/	/	/	/	/	/
Handheld Front (0mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	23.27	23.50	1.054	0.023	0.02	/
	1907.6	RMC	/	/	/	/	/	/
Handheld Left (0mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	23.27	23.50	1.054	0.115	0.12	/
	1907.6	RMC	/	/	/	/	/	/
Handheld Right (0mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	23.27	23.50	1.054	0.021	0.02	/
	1907.6	RMC	/	/	/	/	/	/
Handheld Top (0mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	23.27	23.50	1.054	0.01	0.01	/
	1907.6	RMC	/	/	/	/	/	/

WCDMA Band 5:**Body Supported Mode**

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (5mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	24.12	24.30	1.042	0.025	0.03	7#
	846.6	RMC	/	/	/	/	/	/

Handheld Mode

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	10g SAR (W/kg), Limit=4.0W/kg			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Handheld Back (0mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	24.12	24.30	1.042	0.13	0.14	8#
	846.6	RMC	/	/	/	/	/	/
Handheld Front (0mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	24.12	24.30	1.042	0.00399	0.01	/
	846.6	RMC	/	/	/	/	/	/
Handheld Left (0mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	24.12	24.30	1.042	0.055	0.06	/
	846.6	RMC	/	/	/	/	/	/
Handheld Right (0mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	24.12	24.30	1.042	0.063	0.07	/
	846.6	RMC	/	/	/	/	/	/
Handheld Top (0mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	24.12	24.30	1.042	0.00724	0.01	/
	846.6	RMC	/	/	/	/	/	/

Note:

1. When the SAR value is less than half of the limit, testing for low and high channel is optional.
2. The EUT transmit and receive through the same antenna while testing SAR.
3. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model.
4. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA when the maximum average output of each RF channel is less than ¼ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.
5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

LTE Band 7:**Body Supported Mode**

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (5mm)	2510	20	1RB	/	/	/	/	/	/
	2535	20	1RB	22.24	22.5	1.062	0.127	0.13	/
	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	21.8	22.5	1.175	0.115	0.14	9#

Handheld Mode

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	10g SAR (W/kg), Limit=4.0W/kg			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Handheld Back (0mm)	2510	20	1RB	/	/	/	/	/	/
	2535	20	1RB	22.24	22.5	1.062	0.517	0.55	/
	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	21.8	22.5	1.175	0.436	0.51	/
Handheld Front (0mm)	2510	20	1RB	/	/	/	/	/	/
	2535	20	1RB	22.24	22.5	1.062	0.16	0.17	/
	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	21.8	22.5	1.175	0.13	0.15	/
Handheld Left (0mm)	2510	20	1RB	/	/	/	/	/	/
	2535	20	1RB	22.24	22.5	1.062	0.552	0.59	10#
	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	21.8	22.5	1.175	0.465	0.55	/
Handheld Right (0mm)	2510	20	1RB	/	/	/	/	/	/
	2535	20	1RB	22.24	22.5	1.062	0.057	0.06	/
	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	21.8	22.5	1.175	0.048	0.06	/
Handheld Top (0mm)	2510	20	1RB	/	/	/	/	/	/
	2535	20	1RB	22.24	22.5	1.062	0.063	0.07	/
	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	21.8	22.5	1.175	0.052	0.06	/

LTE Band 12&17:**Body Supported Mode**

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (5mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.88	24	1.028	0.00358	0.01	11#
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	23.38	24	1.153	0.00246	0.01	/

Handheld Mode

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	10g SAR (W/kg), Limit=4.0W/kg			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Handheld Back (0mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.88	24	1.028	0.011	0.01	/
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	23.38	24	1.153	0.012	0.01	12#
Handheld Front (0mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.88	24	1.028	0.00248	0.01	/
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	23.38	24	1.153	0.00125	0.01	/
Handheld Left (0mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.88	24	1.028	0.00435	0.01	/
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	23.38	24	1.153	0.00321	0.01	/
Handheld Right (0mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.88	24	1.028	0.00202	0.01	/
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	23.38	24	1.153	0.00148	0.01	/
Handheld Top (0mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	23.88	24	1.028	0.000511	0.01	/
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	23.38	24	1.153	0.000429	0.01	/

Note: The E-UTRA Operating Band 17 is a subset of band 12, and they are same in modulation type and rated output power, therefore, they were considered as one frequency band during SAR measurement.

LTE Band 13:**Body Supported Mode**

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (5mm)	782	10	1RB	23.65	23.7	1.012	0.00431	0.01	/
	782	10	50%RB	23.14	23.7	1.138	0.00461	0.01	13#

Handheld Mode

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	10g SAR (W/kg), Limit=4.0W/kg			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Handheld Back (0mm)	782	10	1RB	23.65	23.7	1.012	0.022	0.02	/
	782	10	50%RB	23.14	23.7	1.138	0.024	0.03	14#
Handheld Front (0mm)	782	10	1RB	23.65	23.7	1.012	0.00151	0.01	/
	782	10	50%RB	23.14	23.7	1.138	0.00359	0.01	/
Handheld Left (0mm)	782	10	1RB	23.65	23.7	1.012	0.00533	0.01	/
	782	10	50%RB	23.14	23.7	1.138	0.0028	0.01	/
Handheld Right (0mm)	782	10	1RB	23.65	23.7	1.012	0.00989	0.01	/
	782	10	50%RB	23.14	23.7	1.138	0.00908	0.01	/
Handheld Top (0mm)	782	10	1RB	23.65	23.7	1.012	0.00106	0.01	/
	782	10	50%RB	23.14	23.7	1.138	0.000821	0.01	/

LTE Band 25&2:**Body Supported Mode**

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (5mm)	1860	20	1RB	/	/	/	/	/	/
	1882.5	20	1RB	22.33	22.5	1.04	0.062	0.06	/
	1905	20	1RB	/	/	/	/	/	/
	1882.5	20	50%RB	21.67	22.5	1.211	0.066	0.08	15#

Handheld Mode

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	10g SAR (W/kg), Limit=4.0W/kg			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Handheld Back (0mm)	1860	20	1RB	/	/	/	/	/	/
	1882.5	20	1RB	22.33	22.5	1.04	0.52	0.54	/
	1905	20	1RB	/	/	/	/	/	/
	1882.5	20	50%RB	21.67	22.5	1.211	0.464	0.56	16#
Handheld Front (0mm)	1860	20	1RB	/	/	/	/	/	/
	1882.5	20	1RB	22.33	22.5	1.04	0.00988	0.01	/
	1905	20	1RB	/	/	/	/	/	/
	1882.5	20	50%RB	21.67	22.5	1.211	0.01	0.01	/
Handheld Left (0mm)	1860	20	1RB	/	/	/	/	/	/
	1882.5	20	1RB	22.33	22.5	1.04	0.124	0.13	/
	1905	20	1RB	/	/	/	/	/	/
	1882.5	20	50%RB	21.67	22.5	1.211	0.122	0.15	/
Handheld Right (0mm)	1860	20	1RB	/	/	/	/	/	/
	1882.5	20	1RB	22.33	22.5	1.04	0.02	0.02	/
	1905	20	1RB	/	/	/	/	/	/
	1882.5	20	50%RB	21.67	22.5	1.211	0.026	0.03	/
Handheld Top (0mm)	1860	20	1RB	/	/	/	/	/	/
	1882.5	20	1RB	22.33	22.5	1.04	0.00764	0.01	/
	1905	20	1RB	/	/	/	/	/	/
	1882.5	20	50%RB	21.67	22.5	1.211	0.012	0.01	/

Note: The E-UTRA Operating Band 2 is a subset of band 25, and they are same in modulation type and rated output power, therefore, they were considered as one frequency band during SAR measurement.

LTE Band 26&5:**Body Supported Mode**

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (5mm)	821.5	15	1RB	/	/	/	/	/	/
	831.5	15	1RB	23.22	23.6	1.091	0.02	0.02	17#
	841.5	15	1RB	/	/	/	/	/	/
	831.5	15	50%RB	22.66	23.6	1.242	0.017	0.02	/

Handheld Mode

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	10g SAR (W/kg), Limit=4.0W/kg			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Handheld Back (0mm)	821.5	15	1RB	/	/	/	/	/	/
	831.5	15	1RB	23.22	23.6	1.091	0.073	0.08	18#
	841.5	15	1RB	/	/	/	/	/	/
	831.5	15	50%RB	22.66	23.6	1.242	0.068	0.08	/
Handheld Front (0mm)	821.5	15	1RB	/	/	/	/	/	/
	831.5	15	1RB	23.22	23.6	1.091	0.00392	0.01	/
	841.5	15	1RB	/	/	/	/	/	/
	831.5	15	50%RB	22.66	23.6	1.242	0.00264	0.01	/
Handheld Left (0mm)	821.5	15	1RB	/	/	/	/	/	/
	831.5	15	1RB	23.22	23.6	1.091	0.043	0.05	/
	841.5	15	1RB	/	/	/	/	/	/
	831.5	15	50%RB	22.66	23.6	1.242	0.029	0.04	/
Handheld Right (0mm)	821.5	15	1RB	/	/	/	/	/	/
	831.5	15	1RB	23.22	23.6	1.091	0.053	0.06	/
	841.5	15	1RB	/	/	/	/	/	/
	831.5	15	50%RB	22.66	23.6	1.242	0.04	0.05	/
Handheld Top (0mm)	821.5	15	1RB	/	/	/	/	/	/
	831.5	15	1RB	23.22	23.6	1.091	0.00512	0.01	/
	841.5	15	1RB	/	/	/	/	/	/
	831.5	15	50%RB	22.66	23.6	1.242	0.00378	0.01	/

Note: The E-UTRA Operating Band 5 is a subset of band 26, and they are same in modulation type and rated output power, therefore, they were considered as one frequency band during SAR measurement.

LTE Band 41&38:**Body Supported Mode**

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (5mm)	2545	20	1RB	/	/	/	/	/	/
	2570	20	1RB	/	/	/	/	/	/
	2595	20	1RB	23.03	23.3	1.064	0.083	0.09	19#
	2645	20	1RB	/	/	/	/	/	/
	2595	20	50%RB	22.48	23.3	1.208	0.057	0.07	/

Handheld Mode

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	10g SAR (W/kg), Limit=4.0W/kg			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Handheld Back (0mm)	2545	20	1RB	/	/	/	/	/	/
	2570	20	1RB	/	/	/	/	/	/
	2595	20	1RB	23.03	23.3	1.064	0.226	0.24	/
	2645	20	1RB	/	/	/	/	/	/
	2595	20	50%RB	22.48	23.3	1.208	0.195	0.24	/
Handheld Front (0mm)	2545	20	1RB	/	/	/	/	/	/
	2570	20	1RB	/	/	/	/	/	/
	2595	20	1RB	23.03	23.3	1.064	0.069	0.07	/
	2645	20	1RB	/	/	/	/	/	/
	2595	20	50%RB	22.48	23.3	1.208	0.058	0.07	/
Handheld Left (0mm)	2545	20	1RB	/	/	/	/	/	/
	2570	20	1RB	/	/	/	/	/	/
	2595	20	1RB	23.03	23.3	1.064	0.225	0.24	/
	2645	20	1RB	/	/	/	/	/	/
	2595	20	50%RB	22.48	23.3	1.208	0.222	0.27	20#
Handheld Right (0mm)	2545	20	1RB	/	/	/	/	/	/
	2570	20	1RB	/	/	/	/	/	/
	2595	20	1RB	23.03	23.3	1.064	0.028	0.03	/
	2645	20	1RB	/	/	/	/	/	/
	2595	20	50%RB	22.48	23.3	1.208	0.024	0.03	/
Handheld Top (0mm)	2545	20	1RB	/	/	/	/	/	/
	2570	20	1RB	/	/	/	/	/	/
	2595	20	1RB	23.03	23.3	1.064	0.021	0.02	/
	2645	20	1RB	/	/	/	/	/	/
	2595	20	50%RB	22.48	23.3	1.208	0.019	0.02	/

Note:

1. The frequency range of LTE Band 41 is 2535~ 2655MHz. Per KDB 447498 D01, according to the following formula Calculate N_c is 4.

KDB procedures, the following should be applied to determine the number of required test channels. The test channels should be evenly spread across the transmission frequency band of each wireless mode.¹⁴

$$N_c = \text{Round} \left\{ \left[100(f_{\text{high}} - f_{\text{low}}) / f_c \right]^{0.5} \times (f_c / 100)^{0.2} \right\},$$

where

- N_c is the number of test channels, rounded to the nearest integer,
- f_{high} and f_{low} are the highest and lowest channel frequencies within the transmission band,
- f_c is the mid-band channel frequency,
- all frequencies are in MHz.

2. The power class 3 used for LTE Band 41 SAR testing.

3. The E-UTRA Operating Band 38 is a subset of band 41, and they are same in modulation type and rated output power, therefore, they were considered as one frequency band during SAR measurement.

LTE Band 66&4:**Body Supported Mode**

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (5mm)	1720	20	1RB	/	/	/	/	/	/
	1745	20	1RB	23	23.2	1.047	0.651	0.68	/
	1770	20	1RB	/	/	/	/	/	/
	1745	20	50%RB	22.39	23.2	1.205	0.573	0.69	21#

Handheld Mode

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	10g SAR (W/kg), Limit=4.0W/kg			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Handheld Back (0mm)	1720	20	1RB	/	/	/	/	/	/
	1745	20	1RB	23	23.2	1.047	0.69	0.72	/
	1770	20	1RB	/	/	/	/	/	/
	1745	20	50%RB	22.39	23.2	1.205	0.618	0.74	22#
Handheld Front (0mm)	1720	20	1RB	/	/	/	/	/	/
	1745	20	1RB	23	23.2	1.047	0.059	0.06	/
	1770	20	1RB	/	/	/	/	/	/
	1745	20	50%RB	22.39	23.2	1.205	0.05	0.06	/
Handheld Left (0mm)	1720	20	1RB	/	/	/	/	/	/
	1745	20	1RB	23	23.2	1.047	0.059	0.06	/
	1770	20	1RB	/	/	/	/	/	/
	1745	20	50%RB	22.39	23.2	1.205	0.055	0.07	/
Handheld Right (0mm)	1720	20	1RB	/	/	/	/	/	/
	1745	20	1RB	23	23.2	1.047	0.345	0.36	/
	1770	20	1RB	/	/	/	/	/	/
	1745	20	50%RB	22.39	23.2	1.205	0.299	0.36	/
Handheld Top (0mm)	1720	20	1RB	/	/	/	/	/	/
	1745	20	1RB	23	23.2	1.047	0.017	0.02	/
	1770	20	1RB	/	/	/	/	/	/
	1745	20	50%RB	22.39	23.2	1.205	0.015	0.02	/

Note: The E-UTRA Operating Band 4 is a subset of band 66, and they are same in modulation type and rated output power, therefore, they were considered as one frequency band during SAR measurement.

LTE Band 71:**Body Supported Mode**

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (5mm)	673	10	1RB	/	/	/	/	/	/
	680.5	10	1RB	23.73	23.8	1.016	0.00668	0.01	23#
	688	10	1RB	/	/	/	/	/	/
	680.5	10	50%RB	23.2	23.8	1.148	0.0057	0.01	/

Handheld Mode

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	10g SAR (W/kg), Limit=4.0W/kg			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Handheld Back (0mm)	673	10	1RB	/	/	/	/	/	/
	680.5	10	1RB	23.73	23.8	1.016	0.023	0.02	24#
	688	10	1RB	/	/	/	/	/	/
	680.5	10	50%RB	23.2	23.8	1.148	0.017	0.02	/
Handheld Front (0mm)	673	10	1RB	/	/	/	/	/	/
	680.5	10	1RB	23.73	23.8	1.016	0.00131	0.01	/
	688	10	1RB	/	/	/	/	/	/
	680.5	10	50%RB	23.2	23.8	1.148	0.000578	0.01	/
Handheld Left (0mm)	673	10	1RB	/	/	/	/	/	/
	680.5	10	1RB	23.73	23.8	1.016	0.0068	0.01	/
	688	10	1RB	/	/	/	/	/	/
	680.5	10	50%RB	23.2	23.8	1.148	0.0059	0.01	/
Handheld Right (0mm)	673	10	1RB	/	/	/	/	/	/
	680.5	10	1RB	23.73	23.8	1.016	0.000564	0.01	/
	688	10	1RB	/	/	/	/	/	/
	680.5	10	50%RB	23.2	23.8	1.148	0.000611	0.01	/
Handheld Top (0mm)	673	10	1RB	/	/	/	/	/	/
	680.5	10	1RB	23.73	23.8	1.016	0.000347	0.01	/
	688	10	1RB	/	/	/	/	/	/
	680.5	10	50%RB	23.2	23.8	1.148	0.000243	0.01	/

Note:

1. When the SAR value is less than half of the limit, testing for low and high channel is optional.
2. SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02.
3. KDB941225D05-SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is > 0.5 dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg
4. KDB941225D05-For QPSK with 100% RB allocation, when the reported SAR measured for the Highest output power channel is < 1.45 W/kg, tests for the remaining required test channels are optional.
5. KDB941225D05- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg.
6. KDB941225D05- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offset the upper edge, middle and lower edge of each required test channel.
7. KDB941225D05- other channel bandwidths SAR test is required when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > 0.5 dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.
8. Worst case SAR for 50% RB allocation is selected to be tested.

WLAN 2.4G:**Body Supported Mode**

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Scaled Factor	Duty cycle Factor	Meas. SAR	Scaled SAR	Plot
Body Back (5mm)	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	9.07	9.20	1.03	1.006	0.0067	0.01	25#
	2462	802.11b	/	/	/	/	/	/	/

Handheld Mode

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	10g SAR (W/kg)				
					Scaled Factor	Duty cycle Factor	Meas. SAR	Scaled SAR	Plot
Handheld Back (0mm)	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	9.07	9.20	1.03	1.006	0.09	0.09	/
	2462	802.11b	/	/	/	/	/	/	/
Handheld Front (0mm)	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	9.07	9.20	1.03	1.006	0.013	0.01	/
	2462	802.11b	/	/	/	/	/	/	/
Handheld Right (0mm)	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	9.07	9.20	1.03	1.006	0.13	0.13	26#
	2462	802.11b	/	/	/	/	/	/	/

Note:

1. When the SAR value is less than half of the limit, testing for low and high channel is optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements**Body Supported Mode**

Mode	Target Output Power (dBm)	Target Output Power (mW)	Reported SAR(W/kg)	Adjusted SAR(W/kg)	Limit(W/kg)	SAR Test Exclusion
802.11b(DSSS)	9.2	8.32	0.01	/	/	/
802.11g(OFDM)	13.5	22.39	/	0.03	1.2	Yes
802.11n ht20(OFDM)	12	15.85	/	0.02	1.2	Yes
802.11n ht40(OFDM)	11.3	13.49	/	0.02	1.2	Yes

Handheld Mode

Mode	Target Output Power (dBm)	Target Output Power (mW)	Reported SAR(W/kg)	Adjusted SAR(W/kg)	Limit(W/kg)	SAR Test Exclusion
802.11b(DSSS)	9.2	8.32	0.13	/	/	/
802.11g(OFDM)	13.5	22.39	/	0.35	1.2	Yes
802.11n ht20(OFDM)	12	15.85	/	0.25	1.2	Yes
802.11n ht40(OFDM)	11.3	13.49	/	0.21	1.2	Yes

Per KDB 248227 D01, When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (see 5.3, including subclauses). SAR is not required for the following 2.4 GHz OFDM conditions.

- When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.
- When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

WLAN 5.2G:**Body Supported Mode**

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Scaled Factor	Duty cycle Factor	Meas. SAR	Scaled SAR	Plot
Body Back (5mm)	5180	802.11a	/	/	/	/	/	/	/
	5200	802.11a	14.51	14.60	1.021	1	0.028	0.03	27#
	5240	802.11a	/	/	/	/	/	/	/

Handheld Mode

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	10g SAR (W/kg)				
					Scaled Factor	Duty cycle Factor	Meas. SAR	Scaled SAR	Plot
Handheld Back (0mm)	5180	802.11a	/	/	/	/	/	/	/
	5200	802.11a	14.51	14.60	1.021	1	0.098	0.1	/
	5240	802.11a	/	/	/	/	/	/	/
Handheld Front (0mm)	5180	802.11a	/	/	/	/	/	/	/
	5200	802.11a	14.51	14.60	1.021	1	0.039	0.04	/
	5240	802.11a	/	/	/	/	/	/	/
Handheld Right (0mm)	5180	802.11a	/	/	/	/	/	/	/
	5200	802.11a	14.51	14.60	1.021	1	0.547	0.56	28#
	5240	802.11a	/	/	/	/	/	/	/

Note:

1. When the SAR value is less than half of the limit, testing for low and high channel is optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. For 802.11a mode power is the largest among 802.11a/n/ac, 802.11 a mode as initial test configuration is selected to test.
4. According 2016 Oct. TCB, for SAR testing of 5G WIFI 802.11a signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".

WLAN 5.3G:**Body Supported Mode**

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Scaled Factor	Duty cycle Factor	Meas. SAR	Scaled SAR	Plot
Body Back (5mm)	5260	802.11n20	/	/	/	/	/	/	/
	5280	802.11n20	13.99	14.20	1.05	1	0.013	0.01	29#
	5320	802.11n20	/	/	/	/	/	/	/

Handheld Mode

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	10g SAR (W/kg)				
					Scaled Factor	Duty cycle Factor	Meas. SAR	Scaled SAR	Plot
Handheld Back (0mm)	5260	802.11n20	/	/	/	/	/	/	/
	5280	802.11n20	13.99	14.20	1.05	1	0.077	0.08	/
	5320	802.11n20	/	/	/	/	/	/	/
Handheld Front (0mm)	5260	802.11n20	/	/	/	/	/	/	/
	5280	802.11n20	13.99	14.20	1.05	1	0.033	0.03	/
	5320	802.11n20	/	/	/	/	/	/	/
Handheld Right (0mm)	5260	802.11n20	/	/	/	/	/	/	/
	5280	802.11n20	13.99	14.20	1.05	1	0.574	0.60	30#
	5320	802.11n20	/	/	/	/	/	/	/

Note:

1. When the SAR value is less than half of the limit, testing for low and high channel is optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. For 802.11n20 mode power is the largest among 802.11a/n/ac, 802.11 n20 mode as initial test configuration is selected to test.
4. According 2016 Oct. TCB, for SAR testing of 5G WIFI 802.11a signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".

WLAN 5.8G:**Body Supported Mode**

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Scaled Factor	Duty cycle Factor	Meas. SAR	Scaled SAR	Plot
Body Back (5mm)	5755	802.11n40	8.66	8.80	1.033	1	0.075	0.08	31#
	5795	802.11n40	/	/	/	/	/	/	/

Handheld Mode

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	10g SAR (W/kg)				
					Scaled Factor	Duty cycle Factor	Meas. SAR	Scaled SAR	Plot
Handheld Back (0mm)	5755	802.11n40	8.66	8.80	1.033	1	0.049	0.05	/
	5795	802.11n40	/	/	/	/	/	/	/
Handheld Front (0mm)	5755	802.11n40	8.66	8.80	1.033	1	0.017	0.02	/
	5795	802.11n40	/	/	/	/	/	/	/
Handheld Right (0mm)	5755	802.11n40	8.66	8.80	1.033	1	0.183	0.19	32#
	5795	802.11n40	/	/	/	/	/	/	/

Note:

1. When the SAR value is less than half of the limit, testing for low and high channel is optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. For 802.11n40 mode power is the largest among 802.11a/n/ac, 802.11 n40 mode as initial test configuration is selected to test.
4. According 2016 Oct. TCB, for SAR testing of 5G WIFI 802.11a signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".

10. MEASUREMENT VARIABILITY

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Note: The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The Highest Measured SAR Configuration in Each Frequency Band

Body

SAR probe calibration point	Frequency Band	Freq.(MHz)	EUT Position	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
				Original	Repeated	
/	/	/	/	/	/	/

Handheld

SAR probe calibration point	Frequency Band	Freq.(MHz)	EUT Position	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
				Original	Repeated	
/	/	/	/	/	/	/

Note:

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .
2. The measured SAR results **do not** have to be scaled to the maximum tune-up tolerance to determine if repeated measurements are required.
3. SAR measurement variability must be assessed for each frequency band, which is determined by the **SAR probe calibration point and tissue-equivalent medium** used for the device measurements.

11. SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

11.1 Simultaneous Transmission:

Description of Simultaneous Transmit Capabilities	
Transmitter Combination	Simultaneous?
WWAN(GSM/WCDMA/LTE)Antenna + WLAN 2.4G/5G + NFC	√
WWAN(GSM/WCDMA/LTE) Antenna + Bluetooth + NFC	√
2.4G WLAN + BT	×
2.4G WLAN + 5G WLAN	×
5G WLAN + BT	×

11.2 Simultaneous SAR test exclusion considerations:

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 1.6W/kg
		SAR1	SAR2	
MAX.WWAN(GSM/WCDMA/LTE)+Bluetooth	Body	0.69	0.06	0.75
MAX.WWAN(GSM/WCDMA/LTE)+ WLAN 2.4G	Body	0.69	0.01	0.70
MAX.WWAN(GSM/WCDMA/LTE)+ WLAN 5G	Body	0.69	0.33	1.02

Conclusion:

Sum of SAR: Σ SAR ≤ 1.6 W/kg therefore simultaneous transmission SAR with Volume Scans is **not required**.

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 4.0W/kg
		SAR1	SAR2	
MAX.WWAN(GSM/WCDMA/LTE)+Bluetooth	Handheld	1.59	0.02	1.61
MAX.WWAN(GSM/WCDMA/LTE)+ WLAN 2.4G	Handheld	1.59	0.13	1.72
MAX.WWAN(GSM/WCDMA/LTE)+ WLAN 5G	Handheld	1.59	0.60	2.19

Note:

For the EIRP of NFC is 0.01mW, per KDB447498 D01 clause 4.3, the estimated SAR is so lower, so the NFC almost have no influence on the results of simultaneous transmission.

Conclusion:

Sum of SAR: Σ SAR ≤ 4.0 W/kg therefore simultaneous transmission SAR with Volume Scans is **not required**.

APPENDIX A - MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

Measurement uncertainty evaluation for IEEE1528-2013 SAR test

Uncertainty component	Tolerance/uncertainty $\pm$ %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty $\pm$ %, (1 g)	Standard uncertainty $\pm$ %, (10 g)
Measurement system							
Probe calibration(k=1)	6.55	N	1	1	1	6.6	6.6
Axial isotropy	4.7	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	1.9	1.9
Hemispherical isotropy	9.6	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	3.9	3.9
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Modulation response	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
Integration time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
RF ambient conditions-noise	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
RF ambient conditions-reflections	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Probe positioner mech. tolerance	0.8	R	$\sqrt{3}$	1	1	0.5	0.5
Probe positioning with respect to phantom shell	6.7	R	$\sqrt{3}$	1	1	3.9	3.9
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	2.0	R	$\sqrt{3}$	1	1	1.2	1.2
Test sample related							
Test sample positioning	3.3	N	1	1	1	3.3	3.3
Device holder uncertainty	4.7	N	1	1	1	4.7	4.7
Output power variation – SAR draft measurement	5.0	R	$\sqrt{3}$	1	1	2.9	2.9
SAR scaling	2.8	R	$\sqrt{3}$	1	1	1.6	1.6
Phantom and tissue parameters							
Phantom shell uncertainty – shape, thickness and permittivity	4.0	R	$\sqrt{3}$	1	1	2.3	2.3
Uncertainty in SAR correction for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.9	1.6
Liquid conductivity meas.	2.5	N	1	0.78	0.71	2.0	1.8
Liquid permittivity meas.	2.5	N	1	0.23	0.26	0.6	0.7
Liquid conductivity – temperature uncertainty	1.7	R	$\sqrt{3}$	0.78	0.71	0.8	0.7
Liquid permittivity – temperature uncertainty	0.3	R	$\sqrt{3}$	0.23	0.26	0.0	0.0
Combined standard uncertainty		RSS				12.1	12.0
Expanded uncertainty (95 % confidence interval)		k=2				24.2	24.0

Measurement uncertainty evaluation for IEC62209-2 SAR test

Source of uncertainty	Tolerance/ Uncertainty value ± %	Probability Distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty ± %, (1 g)	Standard uncertainty ± %, (10 g)
Measurement system							
Probe calibration	6.55	N	1	1	1	6.6	6.6
Isotropy	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Probe modulation response	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
Detection limits	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
Integration time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
RF ambient conditions – noise	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
RF ambient conditions – reflections	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Probe positioner mech. restrictions	0.8	R	$\sqrt{3}$	1	1	0.5	0.5
Probe positioning with respect to phantom shell	6.7	R	$\sqrt{3}$	1	1	3.9	3.9
Post-processing	2.0	R	$\sqrt{3}$	1	1	1.2	1.2
Test sample related							
Device holder uncertainty	4.7	N	1	1	1	4.7	4.7
Test sample positioning	3.3	N	1	1	1	3.3	3.3
Power scaling	4.5	R	$\sqrt{3}$	1	1	2.6	2.6
Drift of output power (measured SAR drift)	5.0	R	$\sqrt{3}$	1	1	2.9	2.9
Phantom and set-up							
Phantom uncertainty (shape and thickness tolerances)	4.0	R	$\sqrt{3}$	1	1	2.3	2.3
Algorithm for correcting SAR for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.9	1.6
Liquid conductivity (meas.)	2.5	N	1	0.78	0.71	2.0	1.8
Liquid permittivity (meas.)	2.5	N	1	0.23	0.26	0.6	0.7
Liquid conductivity – temperature uncertainty	1.7	R	$\sqrt{3}$	0.78	0.71	0.8	0.7
Liquid permittivity – temperature uncertainty	0.3	R	$\sqrt{3}$	0.23	0.26	0.0	0.0
Combined standard uncertainty		RSS				11.8	11.7
Expanded uncertainty (95 % confidence interval)						23.6	23.4

APPENDIX B - SAR PLOTS

Please refer to the attachment.

APPENDIX C - EUT TEST POSITION PHOTOS

Please refer to the attachment.

APPENDIX D - PROBE CALIBRATION CERTIFICATES

Please refer to the attachment.

APPENDIX E - DIPOLE CALIBRATION CERTIFICATES

Please refer to the attachment.

===== END OF REPORT =====