

FCC RADIO TEST REPORT

FCC ID: 2AXDW-PD9

Product: PuduBot

Trade Mark: PUDU

Model No.: PD9

Family Model: PDH

Report No.: S21101800608003

Issue Date: Dec 16, 2021

Prepared for

SHENZHEN PUDU TECHNOLOGY CO., LTD.

Room 501, Building A, Block 1, Phase 1, Shenzhen International
Inno Valley, Dashi 1st Road, Nanshan District, Shenzhen, China
518057

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China

Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090

Website: <http://www.ntek.org.cn>

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	4
2	SUMMARY OF TEST RESULTS.....	5
3	FACILITIES AND ACCREDITATIONS	6
3.1	FACILITIES.....	6
3.2	LABORATORY ACCREDITATIONS AND LISTINGS	6
3.3	MEASUREMENT UNCERTAINTY	6
4	GENERAL DESCRIPTION OF EUT	7
5	DESCRIPTION OF TEST MODES	11
6	SETUP OF EQUIPMENT UNDER TEST	13
6.1	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	13
6.2	SUPPORT EQUIPMENT.....	14
6.3	EQUIPMENTS LIST FOR ALL TEST ITEMS.....	15
7	TEST REQUIREMENTS.....	17
7.1	CONDUCTED EMISSIONS TEST	17
7.1.1	Applicable Standard	17
7.1.2	Conformance Limit	17
7.1.3	Measuring Instruments.....	17
7.1.4	Test Configuration	17
7.1.5	Test Procedure	17
7.1.6	Test Results	18
7.2	RADIATED SPURIOUS EMISSION	22
7.2.1	Applicable Standard	22
7.2.2	Conformance Limit	22
7.2.3	Measuring Instruments.....	23
7.2.4	Test Configuration	23
7.2.5	Test Procedure	24
7.2.6	Test Results	25
7.3	6DB BANDWIDTH.....	37
7.3.1	Applicable Standard	37
7.3.2	Conformance Limit	37
7.3.3	Measuring Instruments.....	37
7.3.4	Test Setup	37
7.3.5	Test Procedure	37
7.3.6	Test Results	38
7.4	DUTY CYCLE.....	39
7.4.1	Applicable Standard	39
7.4.2	Conformance Limit	39
7.4.3	Measuring Instruments.....	39
7.4.4	Test Setup	39
7.4.5	Test Procedure	39
7.4.6	Test Results	40
7.5	MAXIMUM OUTPUT POWER.....	41
7.5.1	Applicable Standard	41
7.5.2	Conformance Limit	41
7.5.3	Measuring Instruments.....	41
7.5.4	Test Setup	41
7.5.5	Test Procedure	41
7.5.6	EUT operation during Test.....	41
7.5.7	Test Results	42
7.6	POWER SPECTRAL DENSITY	43

7.6.1	Applicable Standard	43
7.6.2	Conformance Limit	43
7.6.3	Measuring Instruments	43
7.6.4	Test Setup	43
7.6.5	Test Procedure	43
7.6.6	Test Results	44
7.7	CONDUCTED BAND EDGE MEASUREMENT.....	45
7.7.1	Applicable Standard	45
7.7.2	Conformance Limit	45
7.7.3	Measuring Instruments	45
7.7.4	Test Setup	45
7.7.5	Test Procedure	45
7.7.6	Test Results	46
7.8	SPURIOUS RF CONDUCTED EMISSIONS.....	47
7.8.1	Conformance Limit	47
7.8.2	Measuring Instruments	47
7.8.3	Test Setup	47
7.8.4	Test Procedure	47
7.8.5	Test Results	47
7.9	ANTENNA APPLICATION	48
7.9.1	Antenna Requirement	48
7.9.2	Result	48
8	TEST RESULTS.....	49
	MODULE 2(2.4G WIFI):	49
8.1.1	DUTY CYCLE.....	49
8.1.2	MAXIMUM CONDUCTED OUTPUT POWER	62
8.1.3	OCCUPIED CHANNEL BANDWIDTH	63
8.1.4	MAXIMUM POWER SPECTRAL DENSITY LEVEL	88
8.1.5	BAND EDGE	101
8.1.6	CONDUCTED RF SPURIOUS EMISSION	118
	MODULE 2(2.4G WIFI MIMO):	143
8.1.7	MAXIMUM CONDUCTED OUTPUT POWER	143
8.1.8	MAXIMUM POWER SPECTRAL DENSITY LEVEL	144
8.1.9	BAND EDGE	151
8.1.10	CONDUCTED RF SPURIOUS EMISSION	160
	MODULE 1:	173
8.1.11	DUTY CYCLE.....	173
8.1.12	MAXIMUM CONDUCTED OUTPUT POWER.....	180
8.1.13	OCCUPIED CHANNEL BANDWIDTH.....	181
8.1.14	MAXIMUM POWER SPECTRAL DENSITY LEVEL.....	194
8.1.15	BAND EDGE	201
8.1.16	CONDUCTED RF SPURIOUS EMISSION	210

1 TEST RESULT CERTIFICATION

Applicant's name	SHENZHEN PUDU TECHNOLOGY CO., LTD.
Address	Room 501, Building A, Block 1, Phase 1, Shenzhen International Inno Valley, Dashi 1st Road, Nanshan District, Shenzhen, China 518057
Manufacturer's Name	SHENZHEN PUDU TECHNOLOGY CO., LTD.
Address	Room 501, Building A, Block 1, Phase 1, Shenzhen International Inno Valley, Dashi 1st Road, Nanshan District, Shenzhen, China 518057
Product description	
Product name	PuduBot
Model and/or type reference	PD9
Family Model	PDH

Measurement Procedure Used:

APPLICABLE STANDARDS	
APPLICABLE STANDARD/ TEST PROCEDURE	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C FCC KDB 662911 D01 Multiple Transmitter Output v02r01 ANSI C63.10-2013 FCC KDB 558074 D01 15.247 Meas Guidance v05r02	Complied

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : Oct 25, 2021 ~ Dec 16, 2021

Testing Engineer : 
(Allen Liu)

Authorized Signatory : 
(Alex Li)

2 SUMMARY OF TEST RESULTS

FCC Part15 (15.247), Subpart C

Standard Section	Test Item	Verdict	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Maximum Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (e)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

Remark:

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.

3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at
1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District
Shenzhen, Guangdong, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab. : The Certificate Registration Number is L5516.

Accredited by Industry Canada, August 29, 2012
The Certificate Registration Number is 9270A-1.

Accredited by FCC, September 6, 2013
The Certificate Registration Number is 238937.

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd

Site Location : 1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District
Shenzhen, Guangdong, China

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
5	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
6	All emissions, radiated(>6GHz)	$\pm 2.52\text{dB}$
7	Temperature	$\pm 0.5^{\circ}\text{C}$
8	Humidity	$\pm 2\%$

4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification	
Equipment	PuduBot
Trade Mark	PUDU
FCC ID	2AXDW-PD9
Model No.	PD9
Family Model	PDH
Model Difference	All models are the same circuit and RF module, except the model name.
Operating Frequency	module 1:2412-2462MHz for 802.11b/g/11n(HT20/HT40); module 2: 2412-2462MHz for 802.11b/g/11n(HT20/HT40);
Modulation	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Number of Channels	11 channels for 802.11b/g/11n(HT20); 9 channels for 802.11n(HT40);
Antenna Type	module 2: Main Antenna 1: FPCB antenna;AUX Antenna 2: FPCB antenna module 1: Antenna 1: FPCB antenna
Smart system	☒ SISO for 802.11b/g/n ☒ MIMO for 802.11n20/n40
Antenna Gain	5.41dBi(Module 2-AUX ANT) 3.98dBi(Module 2-MAIN ANT) 5.56dBi(Module 1)
Power supply	☒ DC supply: Battery 1#: Model: 7S6P SDI 18650 26J DC 25.41V, 15.6Ah Battery 2#: Model: Pudu 7S5P 71NR19/66-5 DC 25.2V, 15.5Ah
	☒ Adapter supply: Adapter 1# : Model: HK120A-CF Input: 100-240V~50/60Hz 3.0A Max Output: 29.4V---8.0A Adapter 2# : Model: FY2903500 Input: 100-240V~50/60Hz 1.5A 150VA Output: 29.0V---3.5A 101.5W

Hardware Version	B03
Software Version	9.1.0.6

Note: 1. Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.

2.

Table for Filed Antenna

Antenna	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	FPCB antenna	IPEX	5.41	Wifi Antenna
2	N/A	N/A	FPCB antenna	IPEX	3.98	Wifi Antenna
3	N/A	N/A	FPCB antenna	IPEX	5.56	Wifi Antenna

This EUT has three modules, module 2 supports Bluetooth, WIFI2.4G / 5G, module 2 has two antennas, Antenna 1 supports Bluetooth, WIFI2.4G / 5G, Antenna 2 supports WIFI2.4G / 5G. The module 1 only supports Bluetooth , WIFI 2.4G. The module 1 has only one antenna. module 3 only supports WCDMA/LTE. The module 3 has only one antenna. Antenna 4 supports WCDMA/LTE.

The module 2 for 2.4G WIFI has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
802.11b/g	1TX, 1RX
802.11n(20MHz,40MHz)	1TX, 1RX/2TX, 2RX

For 2.4GHz mode, Antenna 1,2 are transmitting, each with the same directional gain.
For MIMO mode, Directional gain= $10\log[(10^{G_0/20} + 10^{G_1/20})^2 / N_{ANT}]$ dBi =7.73dbi in 2.4GHz
802.11n(20/40) 2.4GHz has MIMO mode.

Note: G1 means antenna gain for ANT 1 in dBi.
G2 means antenna gain for ANT 2 in dBi.
 N_{ANT} means the number of Antennas.

Revision History

Report No.	Version	Description	Issued Date
S21101800608003	Rev.01	Initial issue of report	Dec 16, 2021

5 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0; 802.11n (HT40): MCS0); were used for all test.

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The Y-plane results were found as the worst case and were shown in this report.

Frequency and Channel list for 802.11b/g/n (HT20/HT40):

Channel	Frequency(MHz)
1	2412
2	2417
...	...
5	2432
6	2437
...	...
10	2457
11	2462

Note: $f_c = 2412\text{MHz} + (k-1) \times 5\text{MHz}$ $k=1$ to 11

AC power line Conducted Emission was tested under maximum output power.


Test Mode:

Test Items	Mode	Data Rate	Channel	Ant
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11b/CCK	1 Mbps	1/6/11	1/2/3
	11g/BPSK	6 Mbps	1/6/11	1/2/3
	11n HT20	MCS0	1/6/11	1/2/3
	11n HT40	MCS7	3/6/9	1/2/3
Power Spectral Density	11b/CCK	1 Mbps	1/6/11	1/2/3
	11g/BPSK	6 Mbps	1/6/11	1/2/3
	11n HT20	MCS0	1/6/11	1/2/3
	11n HT40	MCS7	3/6/9	1/2/3
6dB Spectrum Bandwidth	11b/CCK	1 Mbps	1/6/11	1/2/3
	11g/BPSK	6 Mbps	1/6/11	1/2/3
	11n HT20	MCS0	1/6/11	1/2/3
	11n HT40	MCS7	3/6/9	1/2/3
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11b/CCK	1 Mbps	1/6/11	1/2/3
	11g/BPSK	6 Mbps	1/6/11	1/2/3
	11n HT20	MCS0	1/6/11	1/2/3
	11n HT40	MCS7	3/6/9	1/2/3
Band Edge Emissions	11b/CCK	1 Mbps	1/6/11	1/2/3
	11g/BPSK	6 Mbps	1/6/11	1/2/3
	11n HT20	MCS0	1/6/11	1/2/3
	11n HT40	MCS7	3/6/9	1/2/3


6 SETUP OF EQUIPMENT UNDER TEST

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM


For AC Conducted Emission Mode

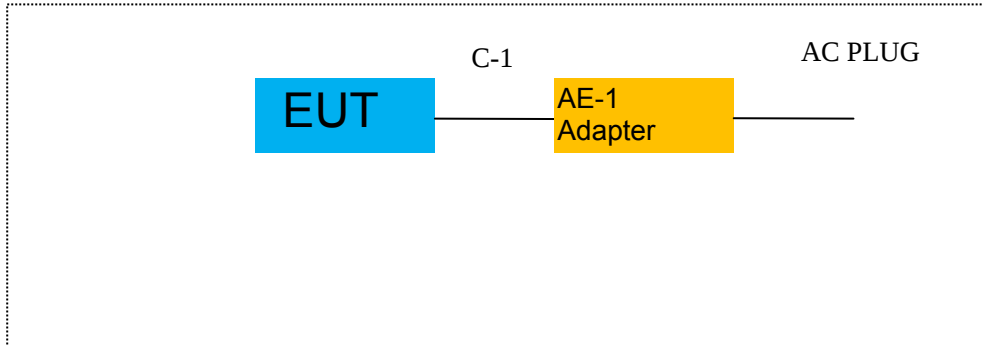

For Radiated Test Cases

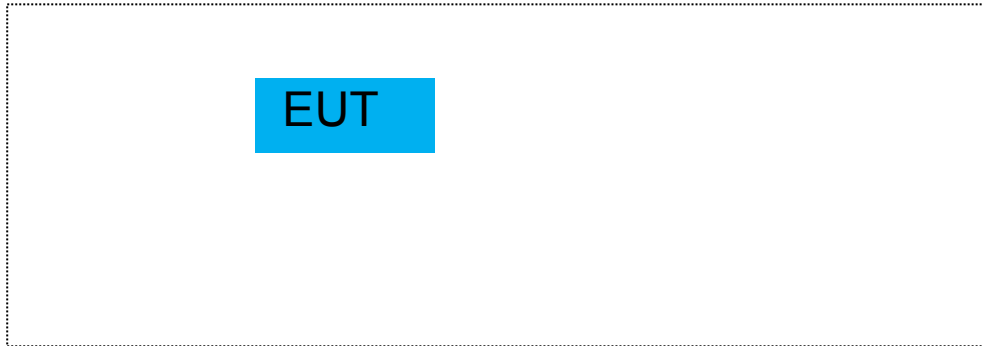

For Conducted Test Cases

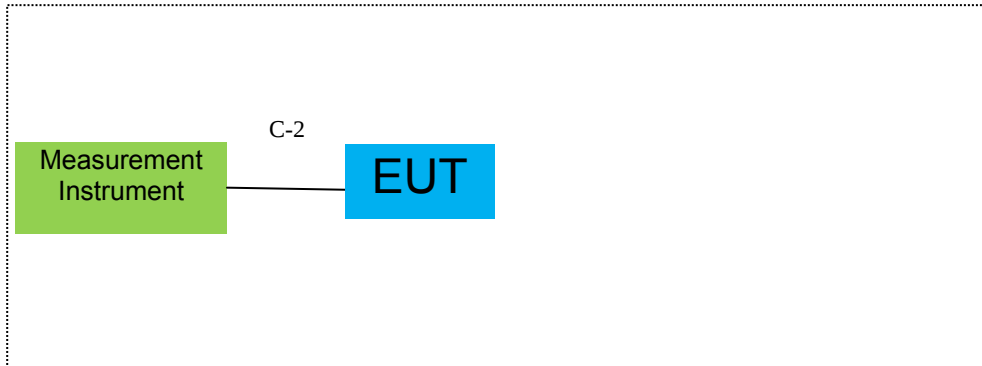

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
AE-1	Adapter	N/A	HK120A-CF	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	Power Cable	NO	NO	1.2m
C-2	RF Cable	YES	NO	0.1m

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.
- (4) During the battery power test, the battery is fully charged.

6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2021.04.27	2022.04.26	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2021.07.01	2022.06.30	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2021.07.01	2022.06.30	1 year
4	Test Receiver	R&S	ESPI7	101318	2021.04.27	2022.04.26	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2021.03.29	2022.03.28	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2021.03.29	2022.03.28	1 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2021.11.07	2022.11.06	1 year
9	Amplifier	EMC	EMC051835SE	980246	2021.07.01	2022.06.30	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2021.11.07	2022.11.06	1 year
11	Power Meter	DARE	RPR3006W	15I00041SN084	2021.07.01	2022.06.30	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2019.08.06	2022.08.05	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2019.08.06	2022.08.05	3 year
14	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
15	High Test Cable(1G-40G Hz)	N/A	R-04	N/A	2019.08.06	2022.08.05	3 year
16	Filter	TRILTHIC	2400MHz	29	2021.07.01	2022.06.30	1 year
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2021.04.27	2022.04.26	1 year
2	LISN	R&S	ENV216	101313	2021.04.27	2022.04.26	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2021.04.27	2022.04.26	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2020.05.11	2023.05.10	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2020.05.11	2023.05.10	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable which is scheduled for calibration every 3 years.

7 TEST REQUIREMENTS

7.1 CONDUCTED EMISSIONS TEST

7.1.1 Applicable Standard

According to FCC Part 15.207(a)

7.1.2 Conformance Limit


Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
2. The lower limit shall apply at the transition frequencies
3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.1.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.1.4 Test Configuration

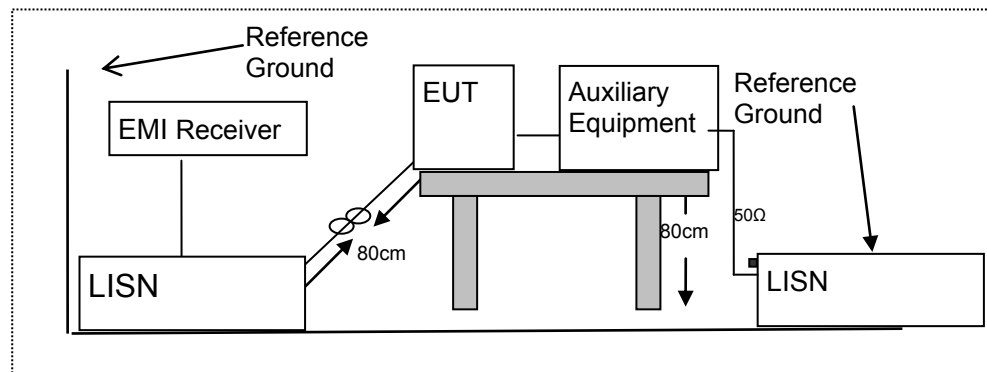

7.1.5 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.


7.1.6 Test Results

EUT:	PuduBot	Model Name :	PD9
Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 29.4V from Adapter AC 120V/60Hz	Test Mode:	Normal Link(module 2)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1539	47.44	9.72	57.16	65.78	-8.62	QP
0.1547	37.53	9.72	47.25	55.74	-8.49	AVG
0.2058	42.11	9.63	51.74	63.37	-11.63	QP
0.2058	31.63	9.63	41.26	53.37	-12.11	AVG
0.2700	37.12	9.63	46.75	61.12	-14.37	QP
0.2700	27.02	9.63	36.65	51.12	-14.47	AVG
5.6736	37.10	9.68	46.78	60.00	-13.22	QP
5.6736	26.68	9.68	36.36	50.00	-13.64	AVG
14.0579	36.63	9.81	46.44	60.00	-13.56	QP
14.0579	27.54	9.81	37.35	50.00	-12.65	AVG
17.8899	34.99	9.84	44.83	60.00	-15.17	QP
17.8899	24.52	9.84	34.36	50.00	-15.64	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

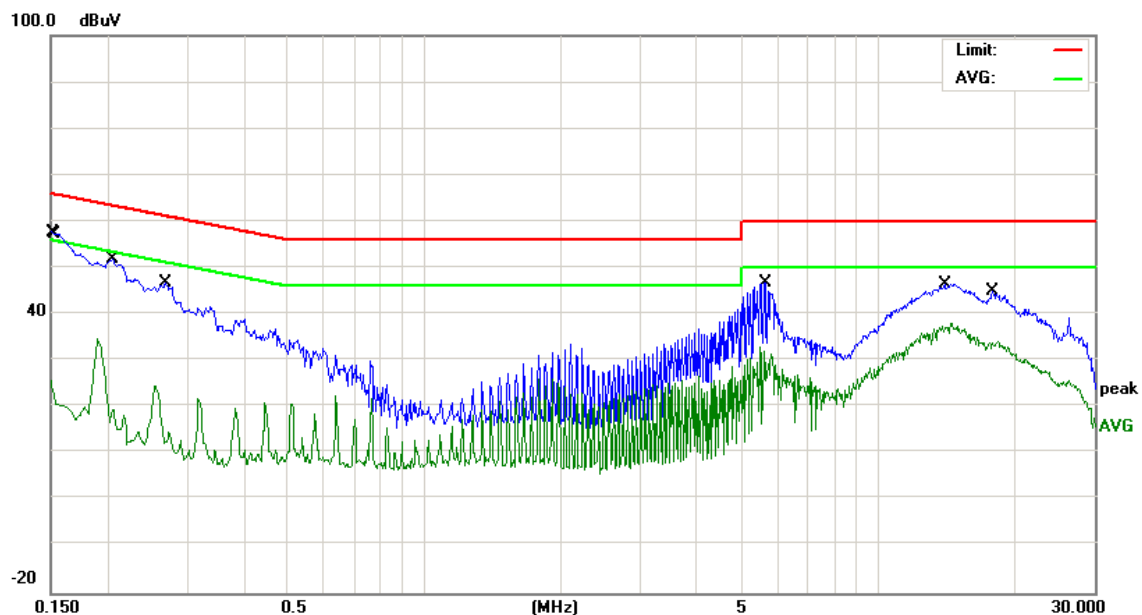


EUT:	PuduBot	Model Name :	PD9
Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 29.4V from Adapter AC 120V/60Hz	Test Mode:	Normal Link(module 2)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1737	44.98	9.63	54.61	64.78	-10.17	QP
0.1737	34.98	9.63	44.61	54.78	-10.17	AVG
0.2300	39.50	9.64	49.14	62.45	-13.31	QP
0.2300	29.61	9.64	39.25	52.45	-13.20	AVG
2.2339	23.74	9.67	33.41	56.00	-22.59	QP
2.2339	13.98	9.67	23.65	46.00	-22.35	AVG
5.6097	38.34	9.78	48.12	60.00	-11.88	QP
5.6097	28.87	9.78	38.65	50.00	-11.35	AVG
13.4539	35.64	9.75	45.39	60.00	-14.61	QP
13.4539	25.90	9.75	35.65	50.00	-14.35	AVG
18.4618	34.21	9.74	43.95	60.00	-16.05	QP
18.4618	23.62	9.74	33.36	50.00	-16.64	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

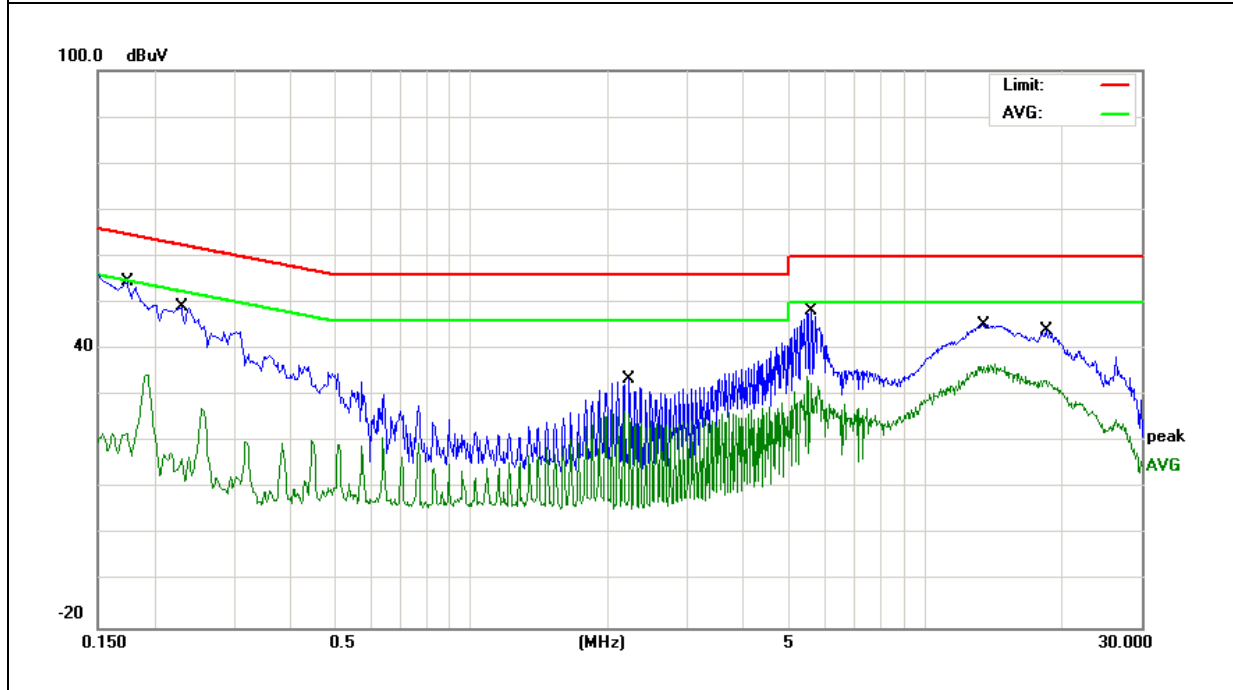


EUT:	PuduBot	Model Name :	PD9
Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 29.4V from Adapter AC 120V/60Hz	Test Mode:	Normal Link(module 1)

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1620	45.81	9.71	55.52	65.36	-9.84	QP
0.1620	35.65	9.71	45.36	55.36	-10.00	AVG
0.2300	38.65	9.63	48.28	62.45	-14.17	QP
0.2300	28.93	9.63	38.56	52.45	-13.89	AVG
0.3059	32.17	9.63	41.80	60.08	-18.28	QP
0.3059	22.39	9.63	32.02	50.08	-18.06	AVG
2.1099	22.48	9.75	32.23	56.00	-23.77	QP
2.1099	12.50	9.75	22.25	46.00	-23.75	AVG
5.8818	37.60	9.69	47.29	60.00	-12.71	QP
5.8818	27.87	9.69	37.56	50.00	-12.44	AVG
14.5777	34.91	9.82	44.73	60.00	-15.27	QP
14.5777	25.64	9.82	35.46	50.00	-14.54	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

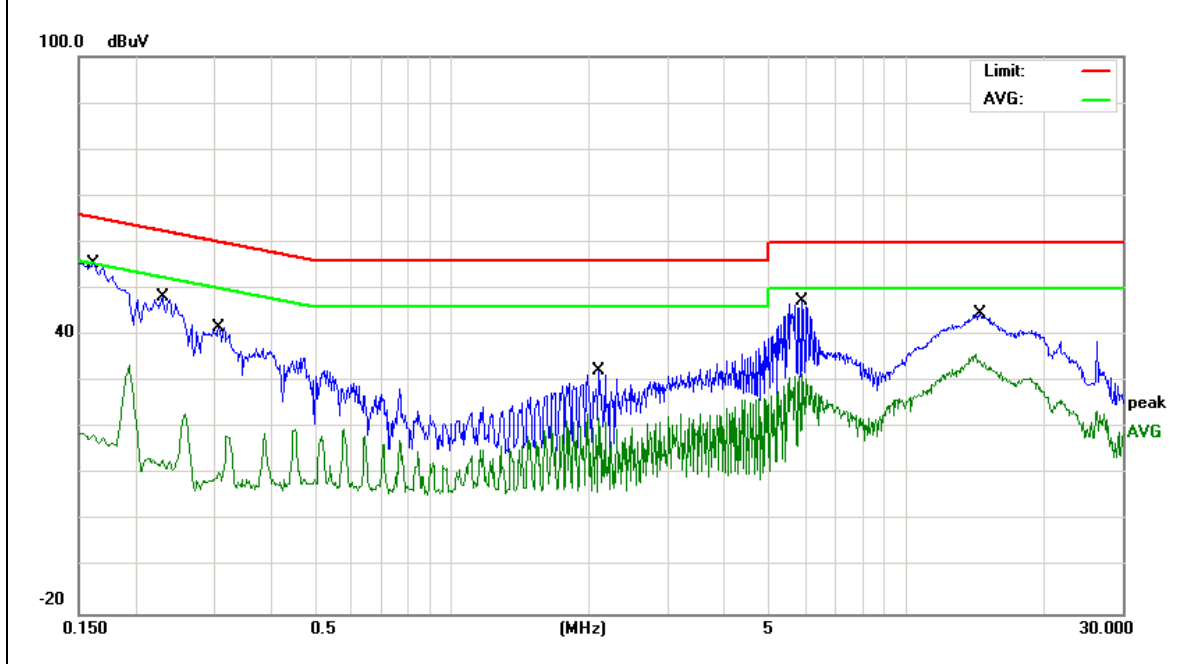


EUT:	PuduBot	Model Name :	PD9
Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 29.4V from Adapter AC 120V/60Hz	Test Mode:	Normal Link(module 1)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1539	44.57	9.63	54.20	65.78	-11.58	QP
0.1539	36.39	9.63	46.02	55.78	-9.76	AVG
0.1900	42.39	9.63	52.02	64.03	-12.01	QP
0.1900	32.73	9.63	42.36	54.03	-11.67	AVG
0.2580	35.98	9.65	45.63	61.49	-15.86	QP
0.2580	26.04	9.65	35.69	51.49	-15.80	AVG
2.1739	23.58	9.67	33.25	56.00	-22.75	QP
2.1739	13.89	9.67	23.56	46.00	-22.44	AVG
5.8818	36.56	9.79	46.35	60.00	-13.65	QP
5.8818	26.79	9.79	36.58	50.00	-13.42	AVG
14.2538	35.51	9.74	45.25	60.00	-14.75	QP
14.2538	25.84	9.74	35.58	50.00	-14.42	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

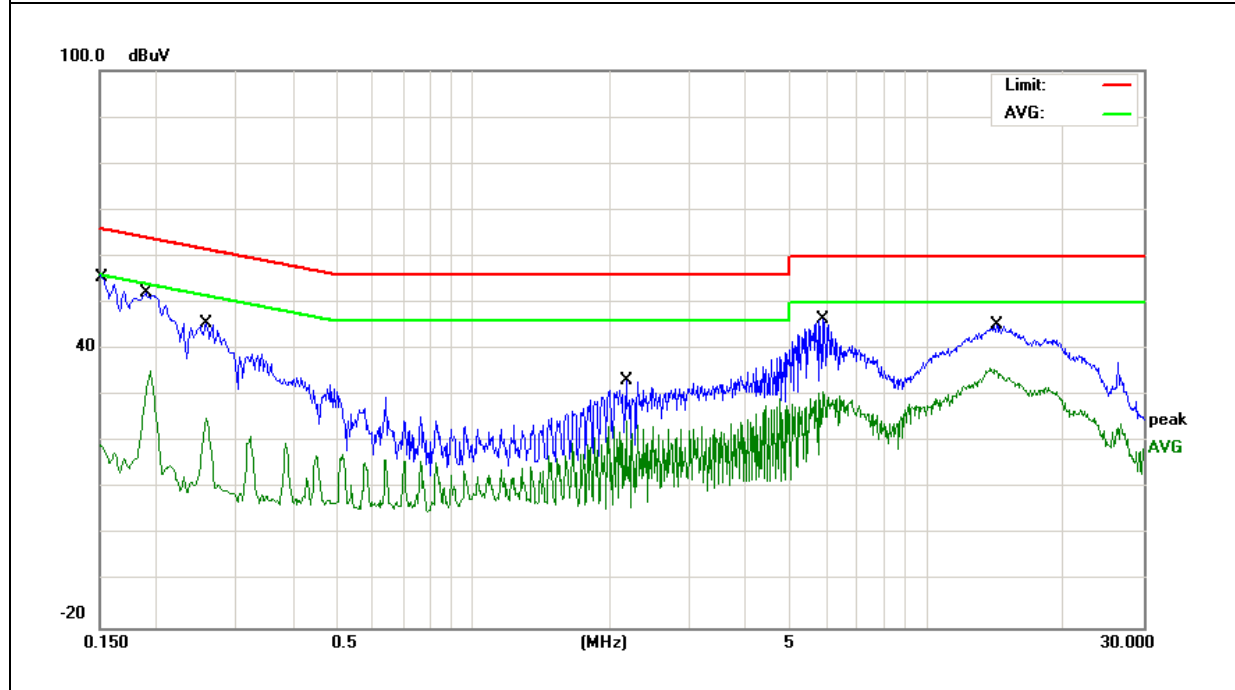

7.2 RADIATED SPURIOUS EMISSION

7.2.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and ANSI C63.10-2013

7.2.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	24000/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54


Remark : 1. Emission level in dBuV/m=20 log (uV/m)
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
3. For Frequency 9kHz~30MHz:
Distance extrapolation factor =40log(Specific distance/ test distance)(dB);
Limit line=Specific limits(dBuV) + distance extrapolation factor.
For Frequency above 30MHz:
Distance extrapolation factor =20log(Specific distance/ test distance)(dB);
Limit line=Specific limits(dBuV) + distance extrapolation factor.

7.2.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

7.2.4 Test Configuration


(a) For radiated emissions below 30MHz

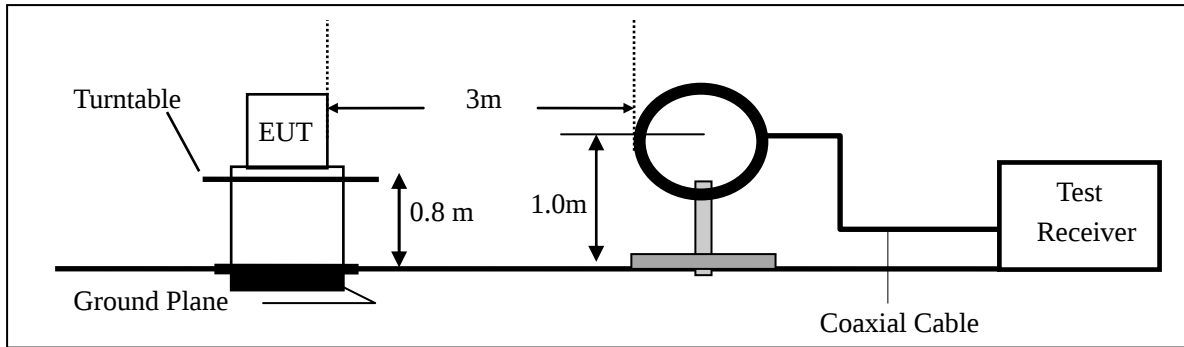

(b) For radiated emissions from 30MHz to 1000MHz

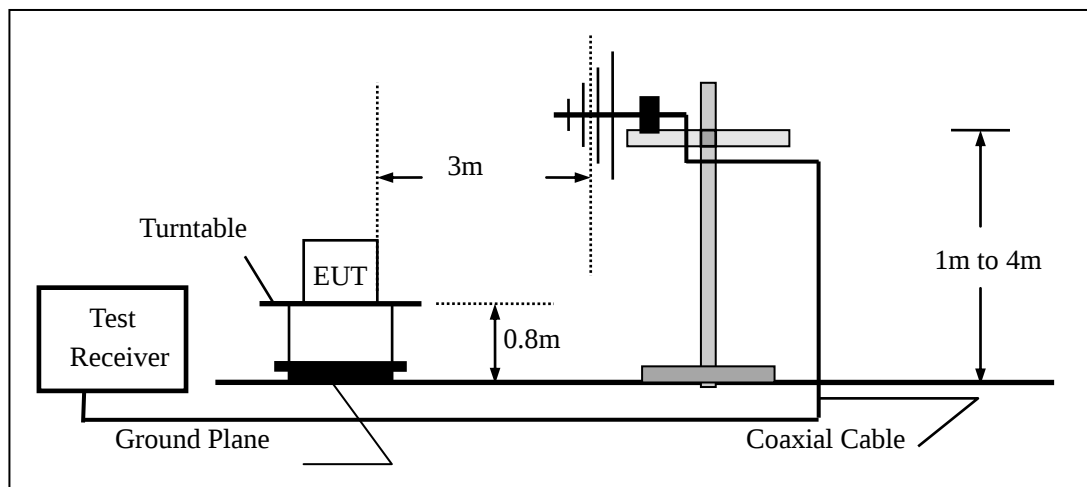

(c) For radiated emissions above 1000MHz

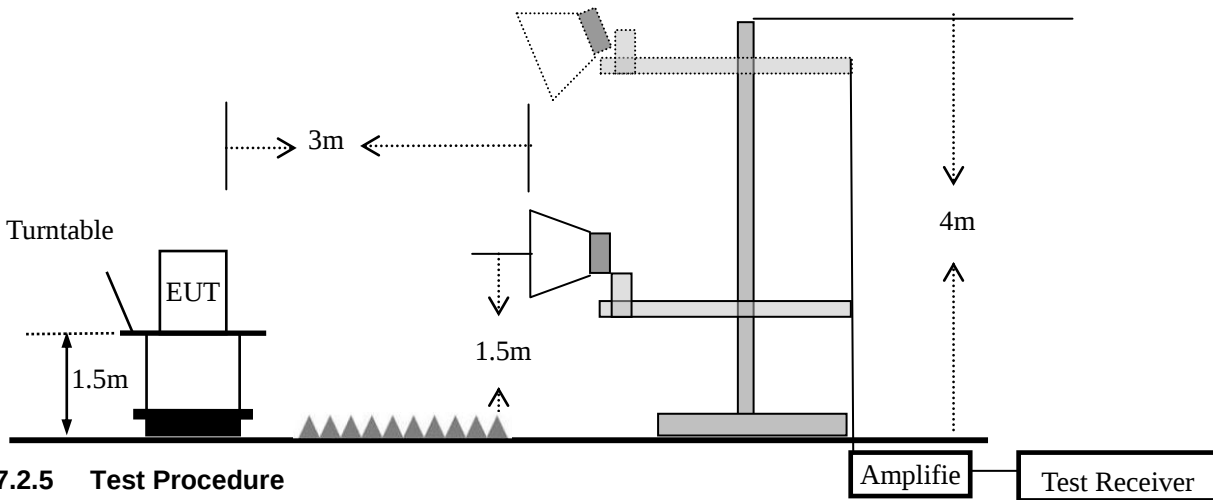

7.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz and frequencies above 1GHz,
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

- e. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- f. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- g. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

For peak measurement:

Set RBW=100 kHz for $f < 1$ GHz; VBW=120KHz; Sweep = auto; Detector function = peak; Trace = max hold; Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz

For average measurement:

VBW = 10 Hz, when duty cycle is no less than 98 percent.

VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz]/\text{narrower RBW} [kHz])$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.2.6 Test Results

Spurious Emission below 30MHz (9KHz to 30MHz)

EUT:	PuduBot	Model Name :	PD9
Temperature:	26 °C	Relative Humidity:	54%
Test Mode:	Mode2/Mode3/Mode4/Mode5	Test By:	Allen Liu

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Spurious Emission below 1GHz (30MHz to 1GHz)


All the modulation modes have been tested, and the worst result was report as below:

EUT:	PuduBot	Model Name :	PD9
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Test Mode:	Normal Link(module 2)
Test Voltage :	DC 25.41V		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	60.2800	21.18	11.40	32.58	40.00	-7.42	QP
V	109.7960	18.44	17.37	35.81	43.50	-7.69	QP
V	164.9073	12.11	17.96	30.07	43.50	-13.43	QP
V	219.8447	13.50	17.37	30.87	46.00	-15.13	QP
V	257.4221	11.58	21.51	33.09	46.00	-12.91	QP
V	343.1800	10.78	23.36	34.14	46.00	-11.86	QP

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

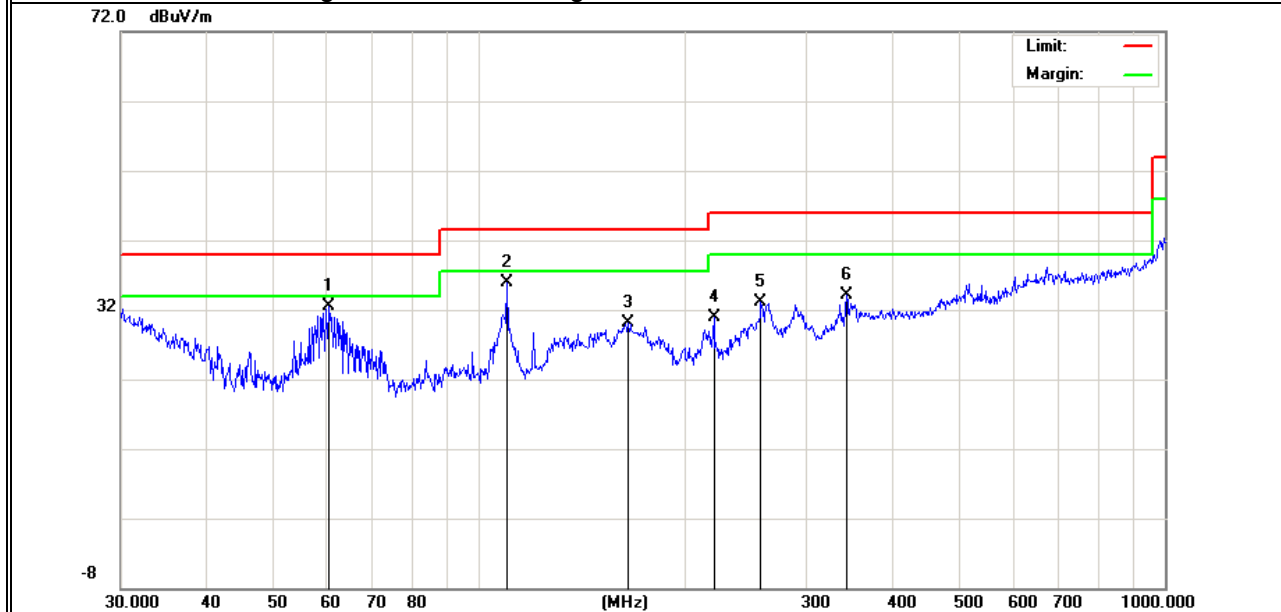

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	109.7960	13.89	17.37	31.26	43.50	-12.24	QP
H	167.8241	13.45	17.46	30.91	43.50	-12.59	QP
H	187.0956	14.00	16.58	30.58	43.50	-12.92	QP
H	271.3245	13.71	21.46	35.17	46.00	-10.83	QP
H	290.0172	15.62	21.65	37.27	46.00	-8.73	QP
H	349.2500	14.05	23.69	37.74	46.00	-8.26	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

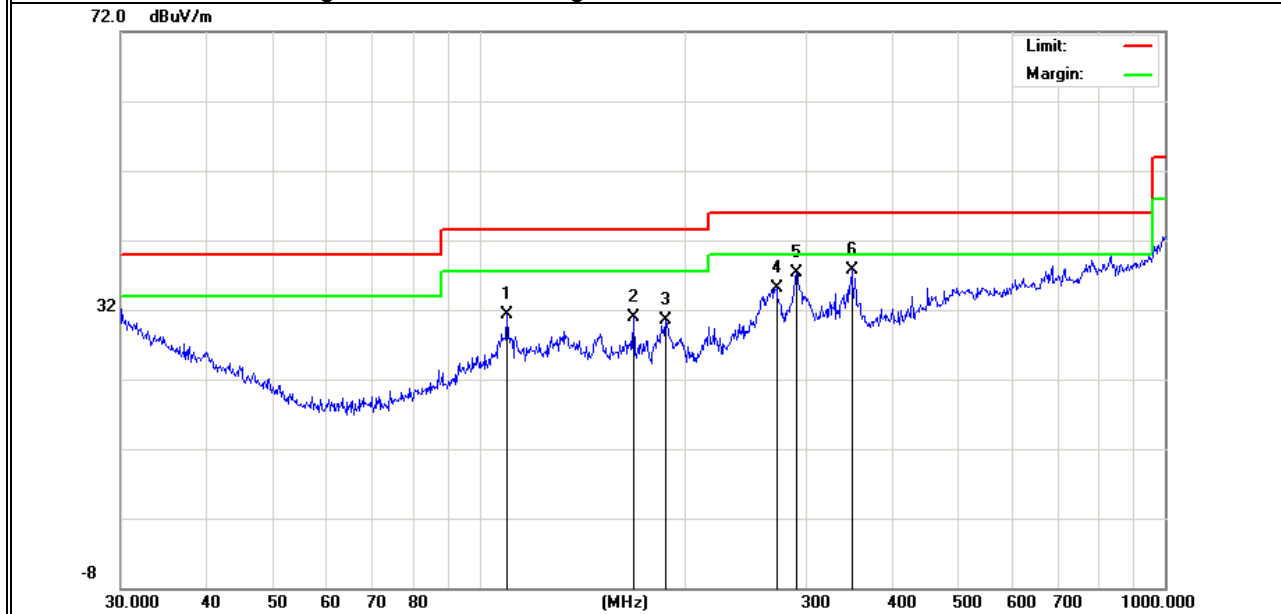


EUT:	PuduBot	Model Name :	PD9
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Test Mode:	Normal Link(module 1)
Test Voltage :	DC 25.41V		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	35.6240	14.83	20.97	35.80	40.00	-4.20	QP
V	49.5328	20.06	14.96	35.02	40.00	-4.98	QP
V	54.4516	21.33	12.87	34.20	40.00	-5.80	QP
V	59.8588	23.87	11.41	35.28	40.00	-4.72	QP
V	109.7960	21.21	17.37	38.58	43.50	-4.92	QP
V	257.4222	12.30	21.51	33.81	46.00	-12.19	QP

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

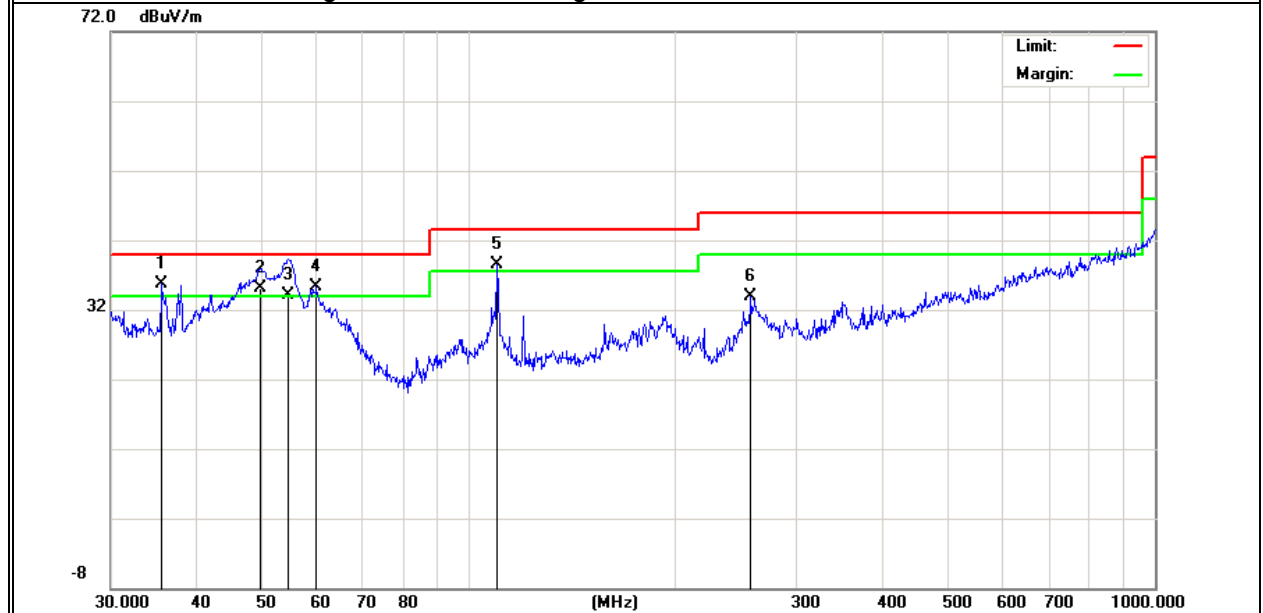

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	109.7960	14.19	17.37	31.56	43.50	-11.94	QP
H	167.8243	13.09	17.46	30.55	43.50	-12.95	QP
H	269.4284	10.59	21.81	32.40	46.00	-13.60	QP
H	352.9433	12.02	23.71	35.73	46.00	-10.27	QP
H	451.1349	8.08	26.14	34.22	46.00	-11.78	QP
H	672.8444	7.76	30.83	38.59	46.00	-7.41	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

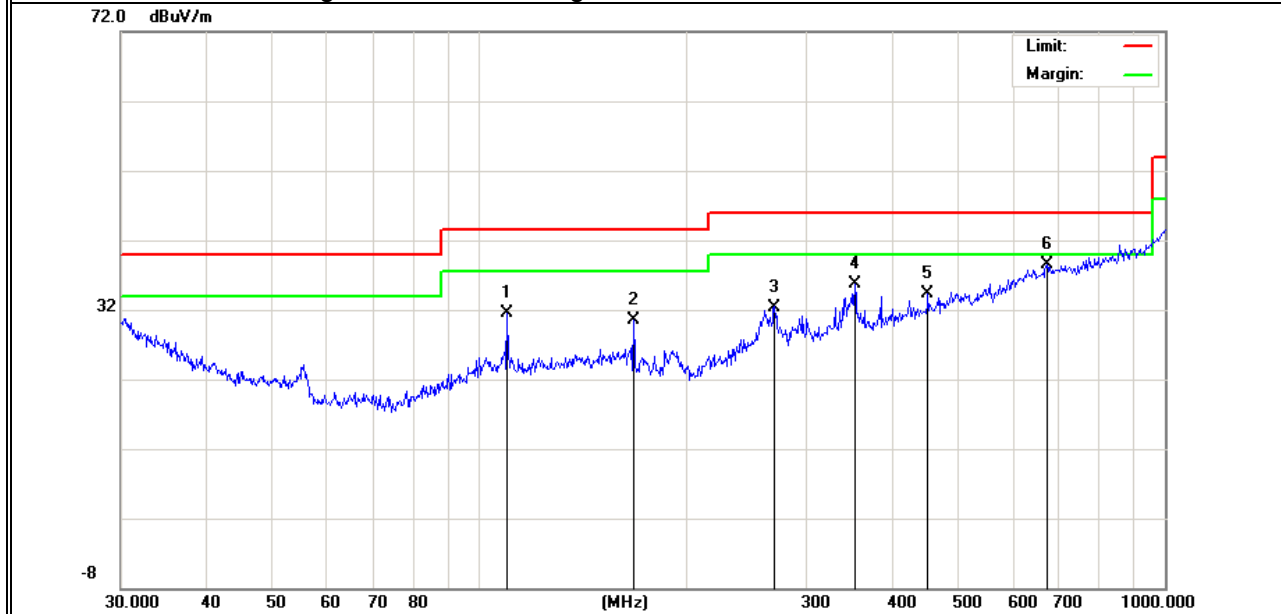

Spurious Emission Above 1GHz (1GHz to 25GHz)

EUT:	PuduBot	Model Name :	PD9
Temperature:	26 °C	Relative Humidity:	54%
Test Mode:	802.11b/g/n20/n40(module 2)	Test By:	Allen Liu

All the modulation modes have been tested, only shown the worst data as below:

Frequency	Read Level	Cable loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Remark	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)		
Low Channel (2412 MHz)(802.11b)--Above 1G									
4824.265	63.36	5.21	35.59	44.30	59.86	74.00	-14.14	Pk	Vertical
4824.265	40.91	5.21	35.59	44.30	37.41	54.00	-16.59	AV	Vertical
7236.296	59.90	6.48	36.27	44.60	58.05	74.00	-15.95	Pk	Vertical
7236.296	43.89	6.48	36.27	44.60	42.04	54.00	-11.96	AV	Vertical
4824.414	60.66	5.21	35.55	44.30	57.12	74.00	-16.88	Pk	Horizontal
4824.414	43.01	5.21	35.55	44.30	39.47	54.00	-14.53	AV	Horizontal
7236.428	62.90	6.48	36.27	44.52	61.13	74.00	-12.87	Pk	Horizontal
7236.428	47.14	6.48	36.27	44.52	45.37	54.00	-8.63	AV	Horizontal
Mid Channel (2437 MHz)(802.11b)--Above 1G									
4874.312	63.18	5.21	35.66	44.20	59.85	74.00	-14.15	Pk	Vertical
4874.312	42.41	5.21	35.66	44.20	39.08	54.00	-14.92	AV	Vertical
7311.227	59.99	7.10	36.50	44.43	59.16	74.00	-14.84	Pk	Vertical
7311.227	47.59	7.10	36.50	44.43	46.76	54.00	-7.24	AV	Vertical
4874.529	60.66	5.21	35.66	44.20	57.33	74.00	-16.67	Pk	Horizontal
4874.529	47.88	5.21	35.66	44.20	44.55	54.00	-9.45	AV	Horizontal
7311.313	59.84	7.10	36.50	44.43	59.01	74.00	-14.99	Pk	Horizontal
7311.313	41.29	7.10	36.50	44.43	40.46	54.00	-13.54	AV	Horizontal
High Channel (2462 MHz)(802.11b)--Above 1G									
4924.102	66.00	5.21	35.52	44.21	62.52	74.00	-11.48	Pk	Vertical
4924.102	42.33	5.21	35.52	44.21	38.85	54.00	-15.15	AV	Vertical
7386.425	60.46	7.10	36.53	44.60	59.49	74.00	-14.51	Pk	Vertical
7386.425	44.34	7.10	36.53	44.60	43.37	54.00	-10.63	AV	Vertical
4924.066	66.94	5.21	35.52	44.21	63.46	74.00	-10.54	Pk	Horizontal
4924.066	46.87	5.21	35.52	44.21	43.39	54.00	-10.61	AV	Horizontal
7386.198	61.12	7.10	36.53	44.60	60.15	74.00	-13.85	Pk	Horizontal
7386.198	44.71	7.10	36.53	44.60	43.74	54.00	-10.26	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamplifier Factor

(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(3) "module 2 802.11n20" MIMO mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

EUT:	PuduBot	Model Name :	PD9
Temperature:	26 °C	Relative Humidity:	54%
Test Mode:	802.11b/g/n20/n40(module 1)	Test By:	Allen Liu

Frequency	Read Level	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)		
Low Channel (2412 MHz)(802.11b)--Above 1G									
4824.265	62.70	5.21	35.59	44.30	59.20	74.00	-14.80	Pk	Vertical
4824.265	40.27	5.21	35.59	44.30	36.77	54.00	-17.23	AV	Vertical
7236.296	60.23	6.48	36.27	44.60	58.38	74.00	-15.62	Pk	Vertical
7236.296	43.35	6.48	36.27	44.60	41.50	54.00	-12.50	AV	Vertical
4824.414	61.48	5.21	35.55	44.30	57.94	74.00	-16.06	Pk	Horizontal
4824.414	42.73	5.21	35.55	44.30	39.19	54.00	-14.81	AV	Horizontal
7236.428	63.20	6.48	36.27	44.52	61.43	74.00	-12.57	Pk	Horizontal
7236.428	47.11	6.48	36.27	44.52	45.34	54.00	-8.66	AV	Horizontal
Mid Channel (2437 MHz)(802.11b)--Above 1G									
4874.312	62.56	5.21	35.66	44.20	59.23	74.00	-14.77	Pk	Vertical
4874.312	42.68	5.21	35.66	44.20	39.35	54.00	-14.65	AV	Vertical
7311.227	59.73	7.10	36.50	44.43	58.90	74.00	-15.10	Pk	Vertical
7311.227	46.65	7.10	36.50	44.43	45.82	54.00	-8.18	AV	Vertical
4874.529	60.58	5.21	35.66	44.20	57.25	74.00	-16.75	Pk	Horizontal
4874.529	48.34	5.21	35.66	44.20	45.01	54.00	-8.99	AV	Horizontal
7311.313	59.82	7.10	36.50	44.43	58.99	74.00	-15.01	Pk	Horizontal
7311.313	41.38	7.10	36.50	44.43	40.55	54.00	-13.45	AV	Horizontal
High Channel (2462 MHz)(802.11b)--Above 1G									
4924.102	65.88	5.21	35.52	44.21	62.40	74.00	-11.60	Pk	Vertical
4924.102	42.73	5.21	35.52	44.21	39.25	54.00	-14.75	AV	Vertical
7386.425	60.55	7.10	36.53	44.60	59.58	74.00	-14.42	Pk	Vertical
7386.425	44.75	7.10	36.53	44.60	43.78	54.00	-10.22	AV	Vertical
4924.066	66.61	5.21	35.52	44.21	63.13	74.00	-10.87	Pk	Horizontal
4924.066	46.79	5.21	35.52	44.21	43.31	54.00	-10.69	AV	Horizontal
7386.198	60.88	7.10	36.53	44.60	59.91	74.00	-14.09	Pk	Horizontal
7386.198	45.19	7.10	36.53	44.60	44.22	54.00	-9.78	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(3)"module 1 802.11b" mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

Spurious Emission in Restricted Band 2310MHz -18000MHz
module 2:

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
802.11b									
2310.00	57.47	2.97	27.80	43.80	44.44	74	-29.56	Pk	Horizontal
2310.00	43.78	2.97	27.80	43.80	30.75	54	-23.25	AV	Horizontal
2310.00	58.38	2.97	27.80	43.80	45.35	74	-28.65	Pk	Vertical
2310.00	41.48	2.97	27.80	43.80	28.45	54	-25.55	AV	Vertical
2390.00	57.42	3.14	27.21	43.80	43.97	74	-30.03	Pk	Vertical
2390.00	42.42	3.14	27.21	43.80	28.97	54	-25.03	AV	Vertical
2390.00	56.93	3.14	27.21	43.80	43.48	74	-30.52	Pk	Horizontal
2390.00	41.46	3.14	27.21	43.80	28.01	54	-25.99	AV	Horizontal
2483.50	58.32	3.58	27.70	44.00	45.60	74	-28.40	Pk	Vertical
2483.50	42.59	3.58	27.70	44.00	29.87	54	-24.13	AV	Vertical
2483.50	58.67	3.58	27.70	44.00	45.95	74	-28.05	Pk	Horizontal
2483.50	41.98	3.58	27.70	44.00	29.26	54	-24.74	AV	Horizontal
802.11g									
2310.00	59.16	2.97	27.80	43.80	46.13	74	-27.87	Pk	Horizontal
2310.00	44.16	2.97	27.80	43.80	31.13	54	-22.87	AV	Horizontal
2310.00	56.77	2.97	27.80	43.80	43.74	74	-30.26	Pk	Vertical
2310.00	42.89	2.97	27.80	43.80	29.86	54	-24.14	AV	Vertical
2390.00	57.47	3.14	27.21	43.80	44.02	74	-29.98	Pk	Vertical
2390.00	41.63	3.14	27.21	43.80	28.18	54	-25.82	AV	Vertical
2390.00	57.87	3.14	27.21	43.80	44.42	74	-29.58	Pk	Horizontal
2390.00	43.90	3.14	27.21	43.80	30.45	54	-23.55	AV	Horizontal
2483.50	58.43	3.58	27.70	44.00	45.71	74	-28.29	Pk	Vertical
2483.50	44.20	3.58	27.70	44.00	31.48	54	-22.52	AV	Vertical
2483.50	58.45	3.58	27.70	44.00	45.73	74	-28.27	Pk	Horizontal
2483.50	42.30	3.58	27.70	44.00	29.58	54	-24.42	AV	Horizontal
802.11n20									
2310.00	57.62	2.97	27.80	43.80	44.59	74	-29.41	Pk	Horizontal
2310.00	44.32	2.97	27.80	43.80	31.29	54	-22.71	AV	Horizontal
2310.00	58.72	2.97	27.80	43.80	45.69	74	-28.31	Pk	Vertical
2310.00	42.30	2.97	27.80	43.80	29.27	54	-24.73	AV	Vertical
2390.00	57.39	3.14	27.21	43.80	43.94	74	-30.06	Pk	Vertical
2390.00	41.71	3.14	27.21	43.80	28.26	54	-25.74	AV	Vertical
2390.00	56.49	3.14	27.21	43.80	43.04	74	-30.96	Pk	Horizontal
2390.00	42.46	3.14	27.21	43.80	29.01	54	-24.99	AV	Horizontal
2483.50	57.82	3.58	27.70	44.00	45.10	74	-28.90	Pk	Vertical
2483.50	42.44	3.58	27.70	44.00	29.72	54	-24.28	AV	Vertical
2483.50	58.96	3.58	27.70	44.00	46.24	74	-27.76	Pk	Horizontal
2483.50	41.75	3.58	27.70	44.00	29.03	54	-24.97	AV	Horizontal

802.11n40									
2310.00	59.01	2.97	27.80	43.80	45.98	74	-28.02	Pk	Horizontal
2310.00	44.81	2.97	27.80	43.80	31.78	54	-22.22	AV	Horizontal
2310.00	56.67	2.97	27.80	43.80	43.64	74	-30.36	Pk	Vertical
2310.00	43.76	2.97	27.80	43.80	30.73	54	-23.27	AV	Vertical
2390.00	57.97	3.14	27.21	43.80	44.52	74	-29.48	Pk	Vertical
2390.00	42.10	3.14	27.21	43.80	28.65	54	-25.35	AV	Vertical
2390.00	58.13	3.14	27.21	43.80	44.68	74	-29.32	Pk	Horizontal
2390.00	43.50	3.14	27.21	43.80	30.05	54	-23.95	AV	Horizontal
2483.50	58.61	3.58	27.70	44.00	45.89	74	-28.11	Pk	Vertical
2483.50	43.83	3.58	27.70	44.00	31.11	54	-22.89	AV	Vertical
2483.50	59.00	3.58	27.70	44.00	46.28	74	-27.72	Pk	Horizontal
2483.50	42.33	3.58	27.70	44.00	29.61	54	-24.39	AV	Horizontal

All the modulation modes have been tested, only shown the worst data as below:

Note: module 2 the worst antenna1 for SISO mode .

module 1:

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
802.11b									
2310.00	58.18	2.97	27.80	43.80	45.15	74	-28.85	Pk	Horizontal
2310.00	43.36	2.97	27.80	43.80	30.33	54	-23.67	AV	Horizontal
2310.00	58.28	2.97	27.80	43.80	45.25	74	-28.75	Pk	Vertical
2310.00	41.59	2.97	27.80	43.80	28.56	54	-25.44	AV	Vertical
2390.00	57.64	3.14	27.21	43.80	44.19	74	-29.81	Pk	Vertical
2390.00	42.05	3.14	27.21	43.80	28.60	54	-25.40	AV	Vertical
2390.00	57.23	3.14	27.21	43.80	43.78	74	-30.22	Pk	Horizontal
2390.00	41.46	3.14	27.21	43.80	28.01	54	-25.99	AV	Horizontal
2483.50	57.69	3.58	27.70	44.00	44.97	74	-29.03	Pk	Vertical
2483.50	42.94	3.58	27.70	44.00	30.22	54	-23.78	AV	Vertical
2483.50	58.75	3.58	27.70	44.00	46.03	74	-27.97	Pk	Horizontal
2483.50	41.50	3.58	27.70	44.00	28.78	54	-25.22	AV	Horizontal
802.11g									
2310.00	58.90	2.97	27.80	43.80	45.87	74	-28.13	Pk	Horizontal
2310.00	44.45	2.97	27.80	43.80	31.42	54	-22.58	AV	Horizontal
2310.00	56.96	2.97	27.80	43.80	43.93	74	-30.07	Pk	Vertical
2310.00	43.15	2.97	27.80	43.80	30.12	54	-23.88	AV	Vertical
2390.00	57.94	3.14	27.21	43.80	44.49	74	-29.51	Pk	Vertical
2390.00	42.09	3.14	27.21	43.80	28.64	54	-25.36	AV	Vertical
2390.00	57.71	3.14	27.21	43.80	44.26	74	-29.74	Pk	Horizontal
2390.00	43.40	3.14	27.21	43.80	29.95	54	-24.05	AV	Horizontal
2483.50	58.95	3.58	27.70	44.00	46.23	74	-27.77	Pk	Vertical
2483.50	43.72	3.58	27.70	44.00	31.00	54	-23.00	AV	Vertical
2483.50	59.33	3.58	27.70	44.00	46.61	74	-27.39	Pk	Horizontal
2483.50	41.65	3.58	27.70	44.00	28.93	54	-25.07	AV	Horizontal
802.11n20									
2310.00	57.99	2.97	27.80	43.80	44.96	74	-29.04	Pk	Horizontal
2310.00	44.06	2.97	27.80	43.80	31.03	54	-22.97	AV	Horizontal
2310.00	58.85	2.97	27.80	43.80	45.82	74	-28.18	Pk	Vertical
2310.00	42.11	2.97	27.80	43.80	29.08	54	-24.92	AV	Vertical
2390.00	57.85	3.14	27.21	43.80	44.40	74	-29.60	Pk	Vertical
2390.00	41.64	3.14	27.21	43.80	28.19	54	-25.81	AV	Vertical
2390.00	56.50	3.14	27.21	43.80	43.05	74	-30.95	Pk	Horizontal
2390.00	42.20	3.14	27.21	43.80	28.75	54	-25.25	AV	Horizontal
2483.50	58.17	3.58	27.70	44.00	45.45	74	-28.55	Pk	Vertical
2483.50	42.26	3.58	27.70	44.00	29.54	54	-24.46	AV	Vertical
2483.50	58.97	3.58	27.70	44.00	46.25	74	-27.75	Pk	Horizontal
2483.50	42.47	3.58	27.70	44.00	29.75	54	-24.25	AV	Horizontal

802.11n40									
2310.00	59.47	2.97	27.80	43.80	46.44	74	-27.56	Pk	Horizontal
2310.00	44.07	2.97	27.80	43.80	31.04	54	-22.96	AV	Horizontal
2310.00	57.09	2.97	27.80	43.80	44.06	74	-29.94	Pk	Vertical
2310.00	42.96	2.97	27.80	43.80	29.93	54	-24.07	AV	Vertical
2390.00	57.72	3.14	27.21	43.80	44.27	74	-29.73	Pk	Vertical
2390.00	41.84	3.14	27.21	43.80	28.39	54	-25.61	AV	Vertical
2390.00	58.45	3.14	27.21	43.80	45.00	74	-29.00	Pk	Horizontal
2390.00	43.93	3.14	27.21	43.80	30.48	54	-23.52	AV	Horizontal
2483.50	58.70	3.58	27.70	44.00	45.98	74	-28.02	Pk	Vertical
2483.50	44.50	3.58	27.70	44.00	31.78	54	-22.22	AV	Vertical
2483.50	58.39	3.58	27.70	44.00	45.67	74	-28.33	Pk	Horizontal
2483.50	42.20	3.58	27.70	44.00	29.48	54	-24.52	AV	Horizontal

Note: module 1 the worst antenna for SISO mode, antenna1 is the worst case for SISO mode .

Spurious Emission in Restricted Bands 3260MHz- 18000MHz

All the modulation modes have been tested, only shown the worst data as below:

module 2:

Frequency	Reading Level	Cable Loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
3260	60.40	4.04	29.57	44.70	49.31	74	-24.69	Pk	Vertical
3260	55.85	4.04	29.57	44.70	44.76	54	-9.24	AV	Vertical
3260	61.15	4.04	29.57	44.70	50.06	74	-23.94	Pk	Horizontal
3260	56.40	4.04	29.57	44.70	45.31	54	-8.69	AV	Horizontal
3332	64.80	4.26	29.87	44.40	54.53	74	-19.47	Pk	Vertical
3332	53.61	4.26	29.87	44.40	43.34	54	-10.66	AV	Vertical
3332	63.39	4.26	29.87	44.40	53.12	74	-20.88	Pk	Horizontal
3332	52.42	4.26	29.87	44.40	42.15	54	-11.85	AV	Horizontal
17797	43.51	10.99	43.95	43.50	54.95	74	-19.05	Pk	Vertical
17797	32.77	10.99	43.95	43.50	44.21	54	-9.79	AV	Vertical
17788	43.84	11.81	43.69	44.60	54.74	74	-19.26	Pk	Horizontal
17788	32.41	11.81	43.69	44.60	43.31	54	-10.69	AV	Horizontal

module 1:

Frequency	Reading Level	Cable Loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
3260	60.81	4.04	29.57	44.70	49.72	74	-24.28	Pk	Vertical
3260	55.58	4.04	29.57	44.70	44.49	54	-9.51	AV	Vertical
3260	62.08	4.04	29.57	44.70	50.99	74	-23.01	Pk	Horizontal
3260	57.09	4.04	29.57	44.70	46.00	54	-8.00	AV	Horizontal
3332	64.20	4.26	29.87	44.40	53.93	74	-20.07	Pk	Vertical
3332	54.21	4.26	29.87	44.40	43.94	54	-10.06	AV	Vertical
3332	63.16	4.26	29.87	44.40	52.89	74	-21.11	Pk	Horizontal
3332	53.03	4.26	29.87	44.40	42.76	54	-11.24	AV	Horizontal
17797	43.21	10.99	43.95	43.50	54.65	74	-19.35	Pk	Vertical
17797	32.90	10.99	43.95	43.50	44.34	54	-9.66	AV	Vertical
17788	43.63	11.81	43.69	44.60	54.53	74	-19.47	Pk	Horizontal
17788	32.12	11.81	43.69	44.60	43.02	54	-10.98	AV	Horizontal

“module 2 802.11n20 MIMO” mode is the worst mode, module 1 802.11b” mode is the worst mode
When PK value is lower than the Average value limit, average don't record.

7.3 6DB BANDWIDTH

7.3.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 D01 15.247 Meas Guidance D01V05r02 Section 8.2.

7.3.2 Conformance Limit

The minimum permissible 6dB bandwidth is 500 kHz.

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

7.3.5 Test Procedure

The testing follows Subclause 11.8 of ANSI C63.10.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW = 100KHz

VBW $\geq$ 3*RBW

Sweep = auto

Detector function = peak

Trace = max hold

7.3.6 Test Results

EUT:	PuduBot	Model Name :	PD9
Temperature:	26 °C	Relative Humidity:	54%
Test Mode:	802.11b/g/n20/n40	Test By:	Allen Liu

Test data reference attachment.

7.4 DUTY CYCLE

7.4.1 Applicable Standard

According to KDB 558074 D01 15.247 Meas Guidance D01V05r02 Section 6.

7.4.2 Conformance Limit

No limit requirement.

7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, 6.0)b) in KDB 558074

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = Zero Span

RBW = 10MHz(the largest available value)

VBW = 10MHz ($\geq$ RBW)

Number of points in Sweep > 100

Detector function = peak

Trace = Clear write

Measure T_{total} and T_{on}

Calculate Duty Cycle = T_{on} / T_{total}

7.4.6 Test Results

EUT:	PuduBot	Model Name :	PD9
Temperature:	26 °C	Relative Humidity:	54%
Test Mode:	802.11b/g/n20/n40	Test By:	Allen Liu

Test data reference attachment.

7.5 MAXIMUM OUTPUT POWER

7.5.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 D01 15.247 Meas Guidance D01V05r02 Section 8.3.2.3.

7.5.2 Conformance Limit


The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm). If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

7.5.3 Measuring Instruments

The following table is the setting of the power meter.

Power meter parameter	Setting
Detector	Peak

7.5.4 Test Setup

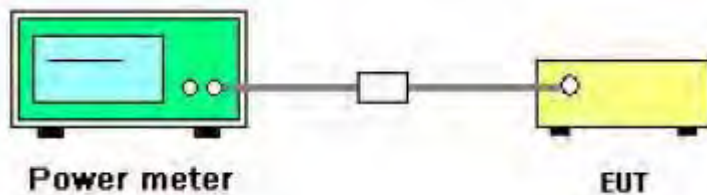

7.5.5 Test Procedure

The testing follows Measurement Procedure Subclause 11.9.1.3 of ANSI C63.10

7.5.6 EUT operation during Test

The EUT was programmed to be in continuously transmitting mode.

7.5.7 Test Results

EUT:	PuduBot	Model Name :	PD9
Temperature:	26 °C	Relative Humidity:	54%
Test Mode:	802.11b/g/n20/n40	Test By:	Allen Liu

For 802.11n has MIMO mode. Directional gain=7.73 dBi
 $7.73 \text{ dBi} > 6.0 \text{ dBi}$ so power limit= $30.00 - (7.73 - 6) = 28.27$ in dBm
Test data reference attachment.

7.6 POWER SPECTRAL DENSITY

7.6.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 D01 15.247 Meas Guidance D01V05r02 Section 8.4.

7.6.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The testing follows Measurement Procedure Subclause 11.10.2 of ANSI C63.10

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 * \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.6.6 Test Results

EUT:	PuduBot	Model Name :	PD9
Temperature:	26 °C	Relative Humidity:	54%
Test Mode:	802.11b/g/n20/n40	Test By:	Allen Liu

For 802.11n has MIMO mode. Directional gain=7.73 dBi
 $7.73 \text{ dBi} > 6.0 \text{ dBi}$ so power limit is $\text{limit} = 8 - (7.73 - 6) = 6.27$ in dBm
Test data reference attachment.

7.7 CONDUCTED BAND EDGE MEASUREMENT

7.7.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 Meas Guidance D01V05r02 Section 8.7.

7.7.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

7.7.5 Test Procedure

The testing follows FCC KDB 558074 D01 15.247 Meas Guidance D01V05r02 Section 8.7.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

7.7.6 Test Results

EUT:	PuduBot	Model Name :	PD9
Temperature:	26 °C	Relative Humidity:	54%
Test Mode:	802.11b/g/n20/n40	Test By:	Allen Liu

Test data reference attachment.

7.8 SPURIOUS RF CONDUCTED EMISSIONS

7.8.1 Conformance Limit

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

7.8.2 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.8.3 Test Setup

Please refer to Section 6.1 of this test report.

7.8.4 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength, and measure frequency range from 30MHz to 26.5GHz.

7.8.5 Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandedge measurement data.

Test data reference attachment.

7.9 ANTENNA APPLICATION

7.9.1 Antenna Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.9.2 Result

This EUT has three modules, module 2 supports Bluetooth, WIFI2.4G / 5G, module 2 has two antennas, Antenna 1 supports Bluetooth, WIFI2.4G / 5G, Antenna 2 supports WIFI2.4G / 5G. The module 1 only supports Bluetooth , WIFI 2.4G. The module 1 has only one antenna. module 3 only supports WCDMA/LTE. The module 3 has only one antenna. Antenna 4 supports WCDMA/LTE.

The module 2 for 2.4G WIFI has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
802.11b/g	1TX, 1RX
802.11n(20MHz,40MHz)	1TX, 1RX/2TX, 2RX

For 2.4GHz mode, Antenna 1,2 are transmitting, each with the same directional gain.
 For MIMO mode, Directional gain= $10\log[(10^{G0/20} + 10^{G1/20})^2 / N_{ANT}]$ dBi =7.73dbi in 2.4GHz
 802.11n(20/40) 2.4GHz has MIMO mode.

Note: G1 means antenna gain for ANT 1 in dBi.
 G2 means antenna gain for ANT 2 in dBi.
 N_{ANT} means the number of Antennas.


8 TEST RESULTS

MODULE 2(2.4G WIFI):


8.1.1 DUTY CYCLE

Antenna	Condition	Mode	Frequency (MHz)	Duty Cycle (%)
Ant 1	NVNT	802.11b	2412	99.11
Ant 1	NVNT	802.11b	2437	99.1
Ant 1	NVNT	802.11b	2462	99.07
Ant 2	NVNT	802.11b	2412	99.13
Ant 2	NVNT	802.11b	2437	98.86
Ant 2	NVNT	802.11b	2462	99.19
Ant 1	NVNT	802.11g	2412	99.62
Ant 1	NVNT	802.11g	2437	99.07
Ant 1	NVNT	802.11g	2462	99.5
Ant 2	NVNT	802.11g	2412	99.55
Ant 2	NVNT	802.11g	2437	99.09
Ant 2	NVNT	802.11g	2462	99.62
Ant 1	NVNT	802.11n(HT20)	2412	98.03
Ant 1	NVNT	802.11n(HT20)	2437	98.19
Ant 1	NVNT	802.11n(HT20)	2462	98.21
Ant 2	NVNT	802.11n(HT20)	2412	98.33
Ant 2	NVNT	802.11n(HT20)	2437	98.33
Ant 2	NVNT	802.11n(HT20)	2462	98.37
Ant 1	NVNT	802.11n(HT40)	2422	98.4
Ant 1	NVNT	802.11n(HT40)	2437	98.35
Ant 1	NVNT	802.11n(HT40)	2452	98.38
Ant 2	NVNT	802.11n(HT40)	2422	98.36
Ant 2	NVNT	802.11n(HT40)	2437	98.32
Ant 2	NVNT	802.11n(HT40)	2452	98.33


Duty Cycle NVNT 802.11b 2412MHz Ant 1

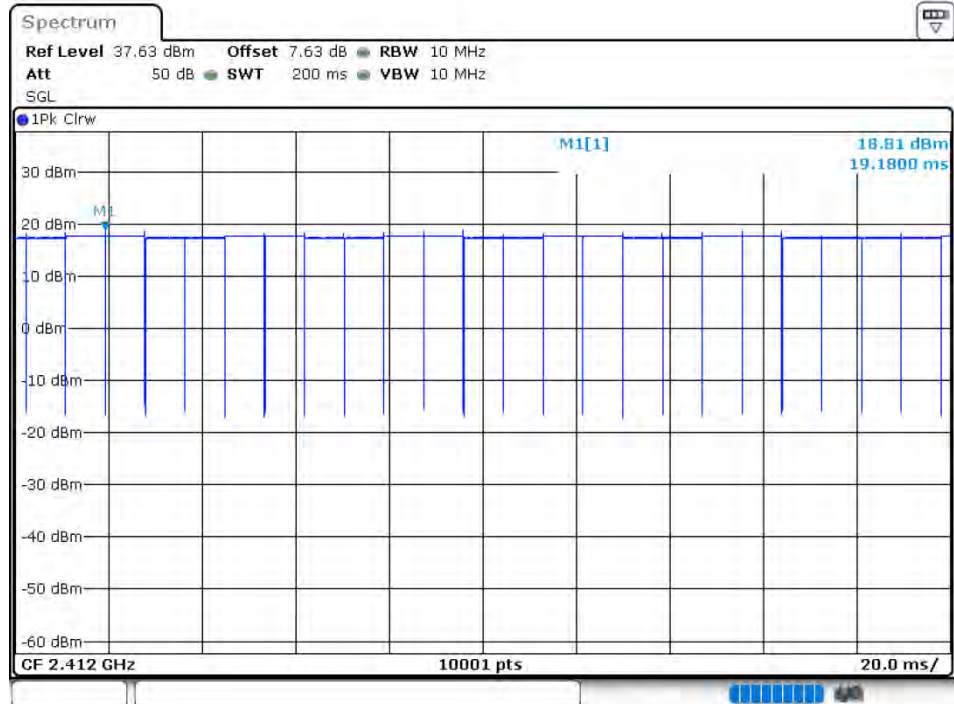


Duty Cycle NVNT 802.11b 2437MHz Ant 1

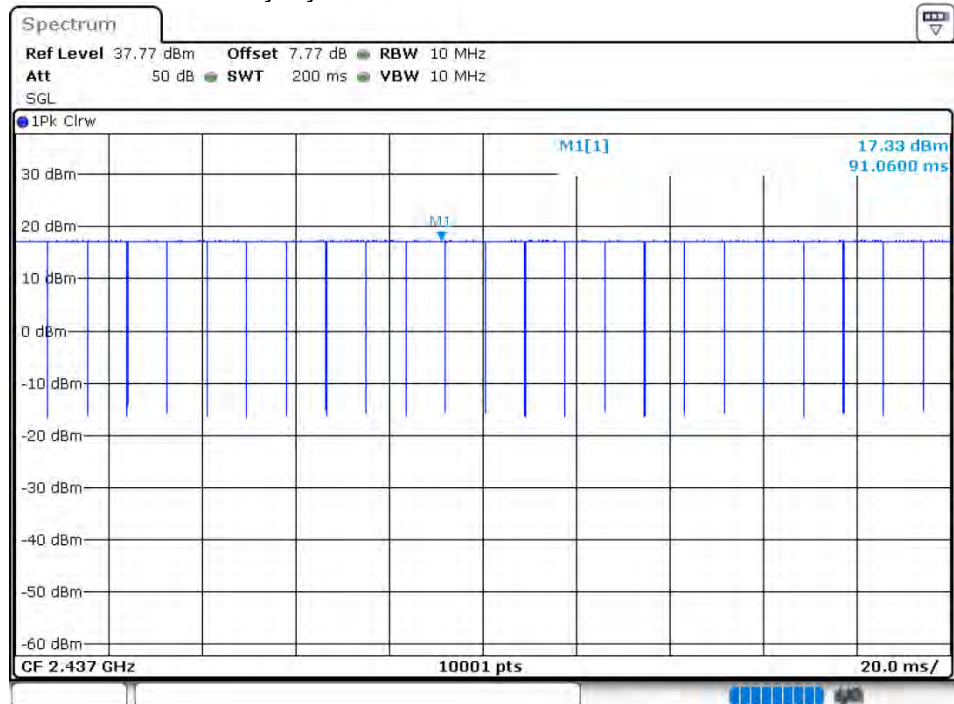


Duty Cycle NVNT 802.11b 2462MHz Ant 1

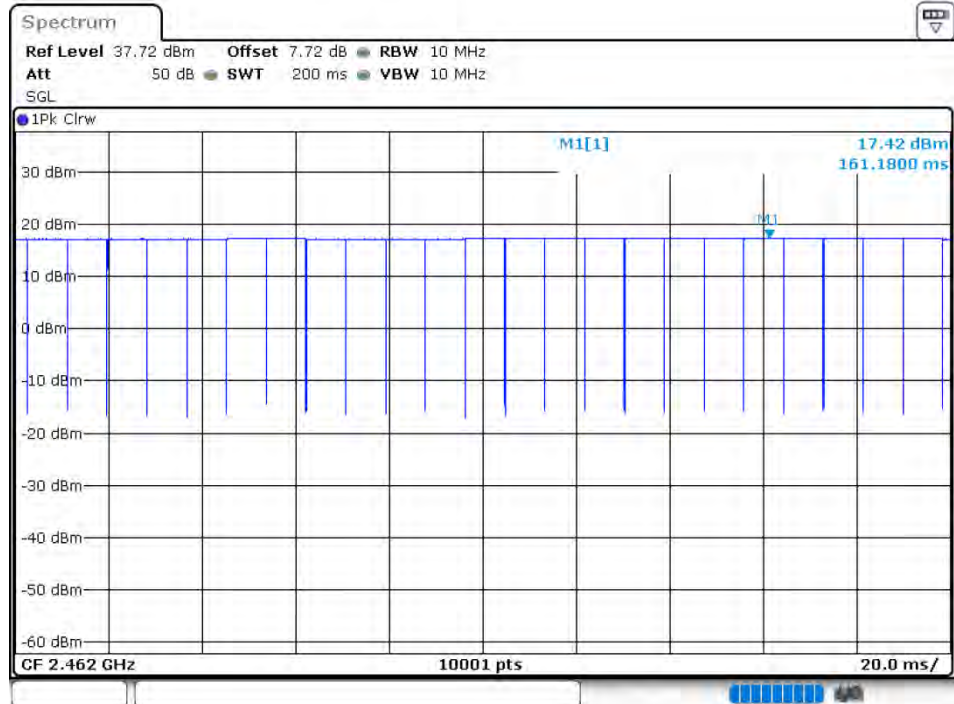


Duty Cycle NVNT 802.11b 2412MHz Ant 2

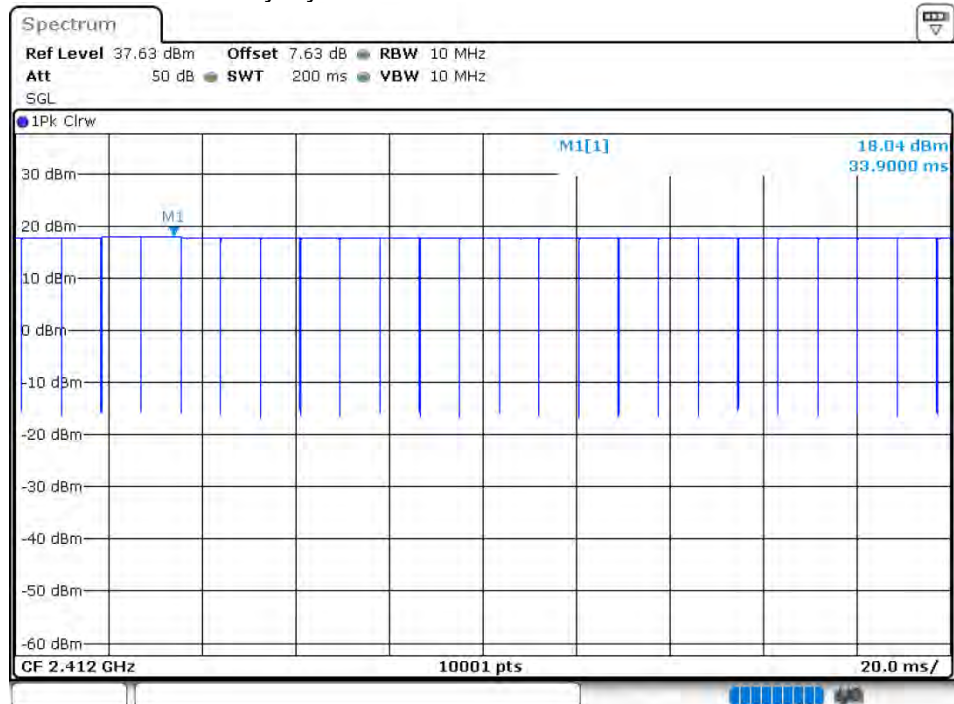


Duty Cycle NVNT 802.11b 2437MHz Ant 2

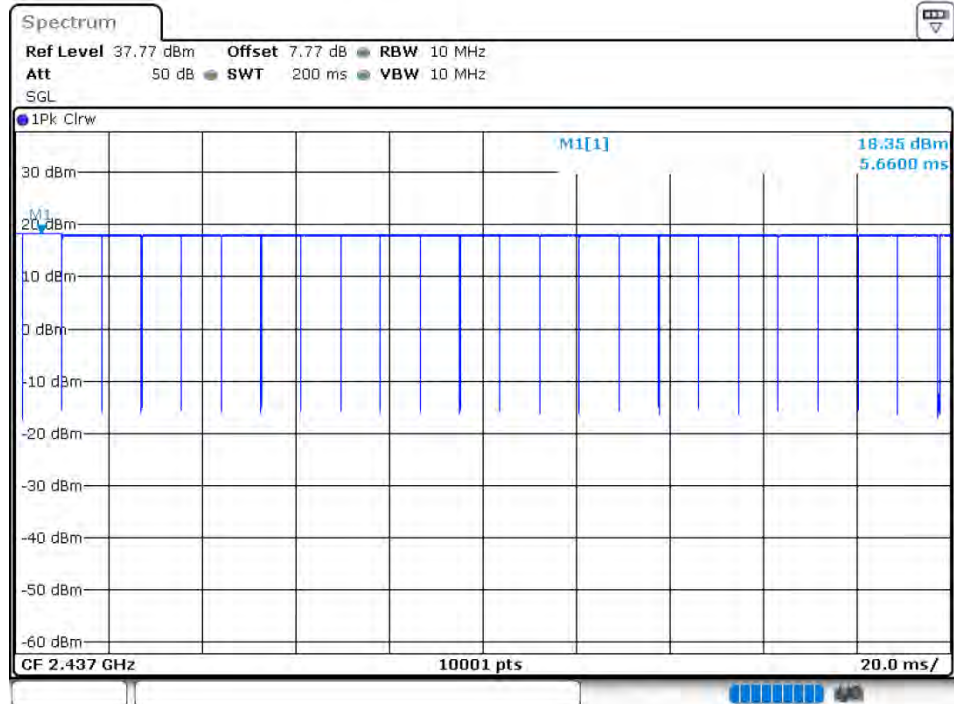


Duty Cycle NVNT 802.11b 2462MHz Ant 2

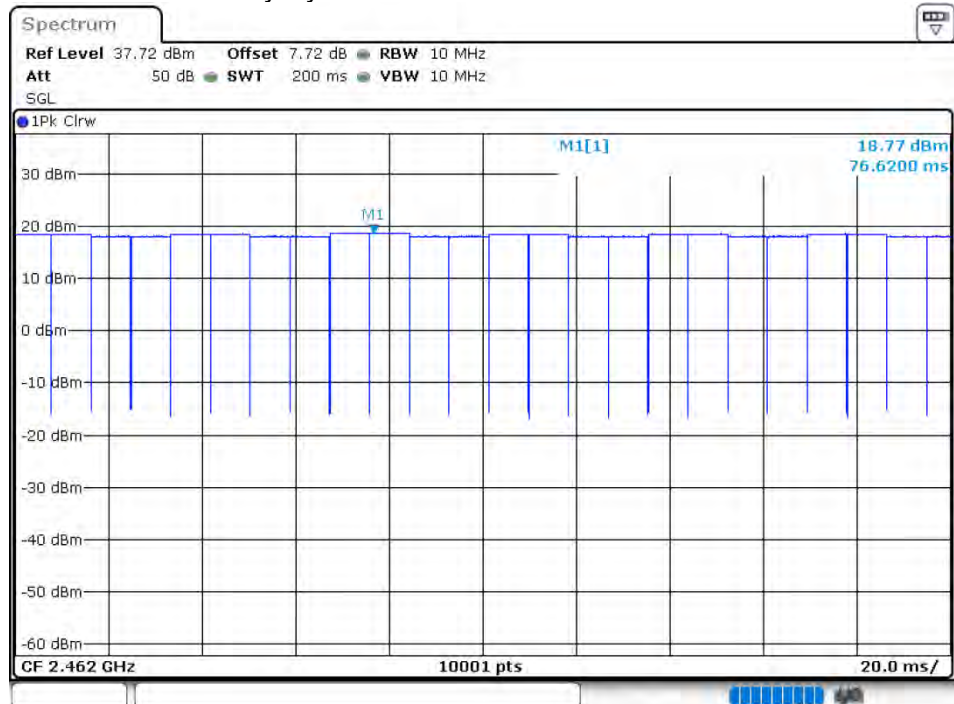


Duty Cycle NVNT 802.11g 2412MHz Ant 1

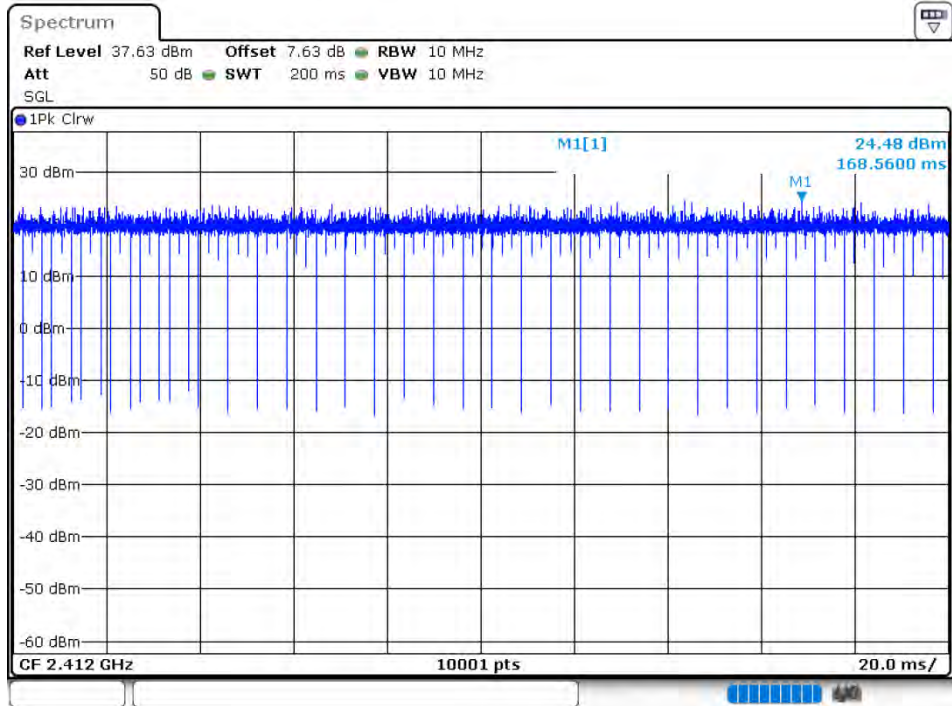


Duty Cycle NVNT 802.11g 2437MHz Ant 1

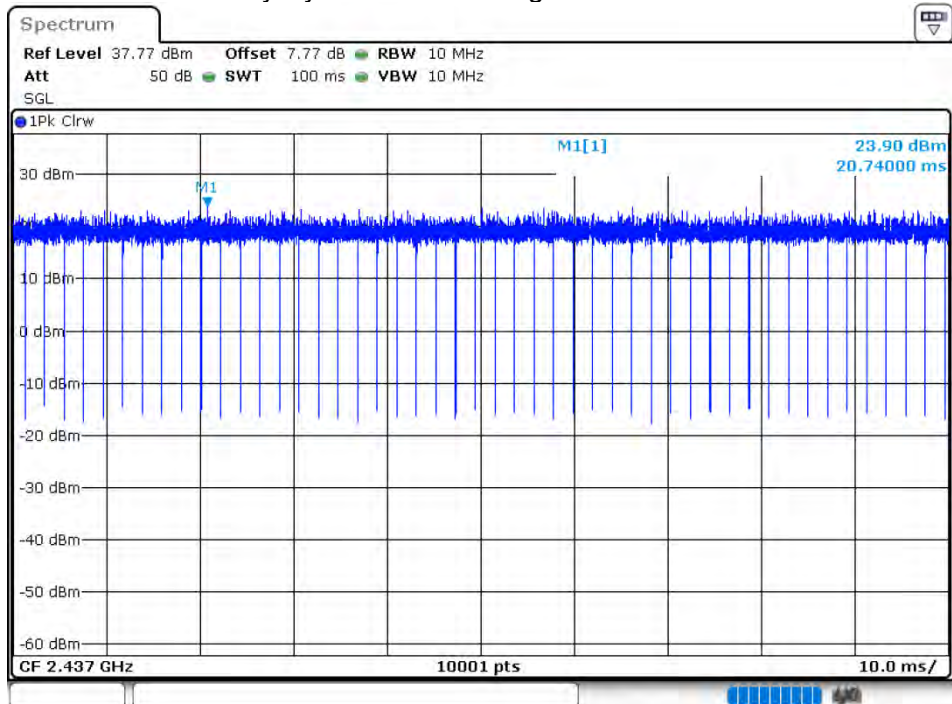


Duty Cycle NVNT 802.11g 2462MHz Ant 1

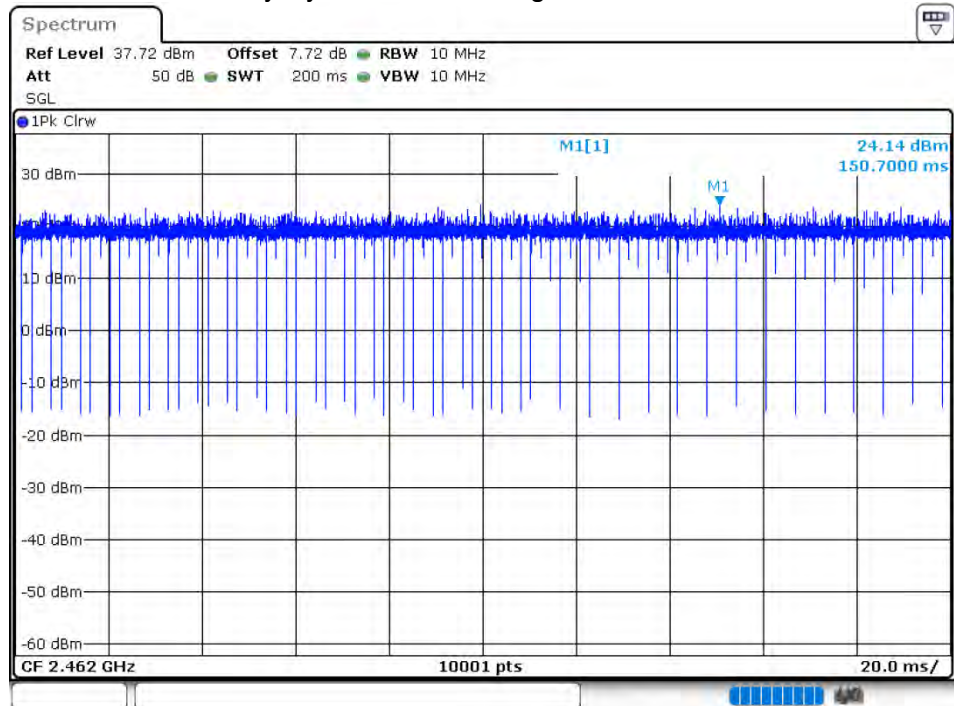


Duty Cycle NVNT 802.11g 2412MHz Ant 2

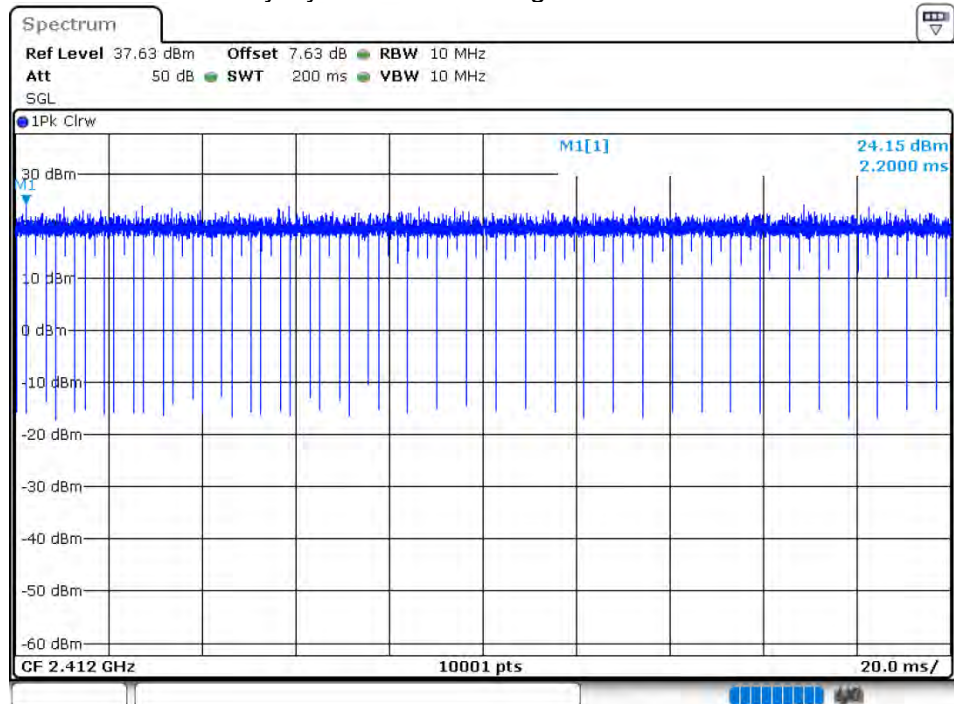


Duty Cycle NVNT 802.11g 2437MHz Ant 2

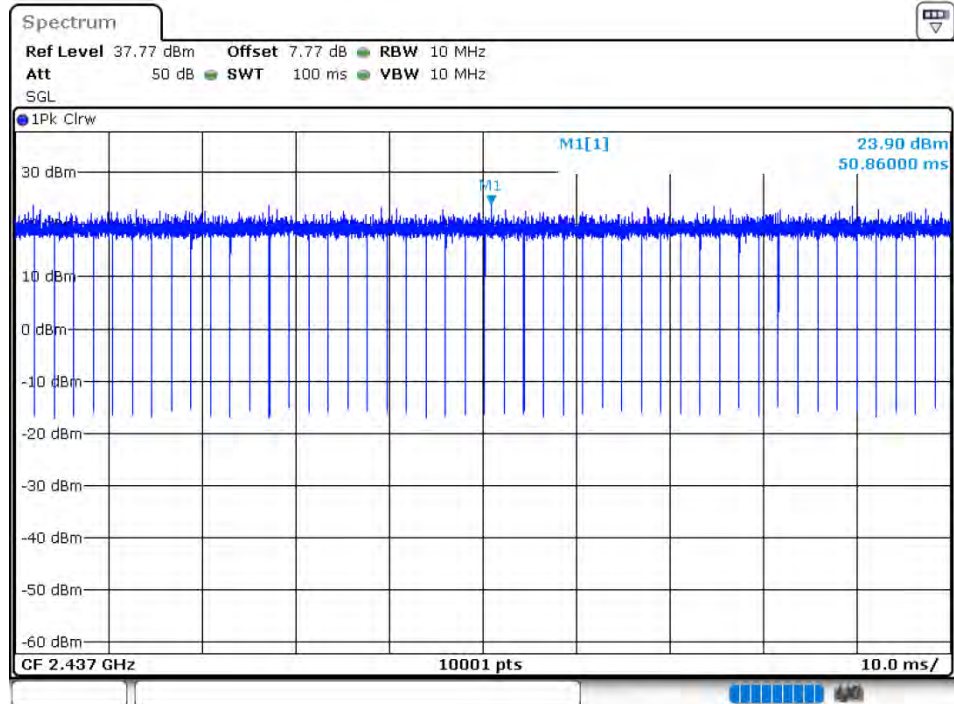


Duty Cycle NVNT 802.11g 2462MHz Ant 2

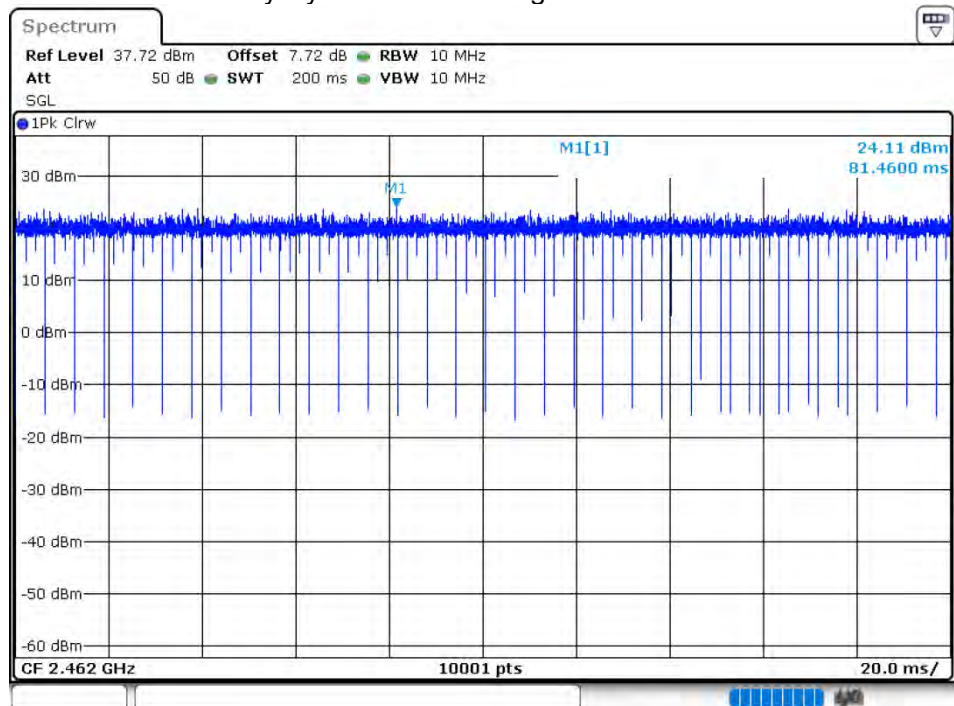


Duty Cycle NVNT 802.11n(HT20) 2412MHz Ant 1

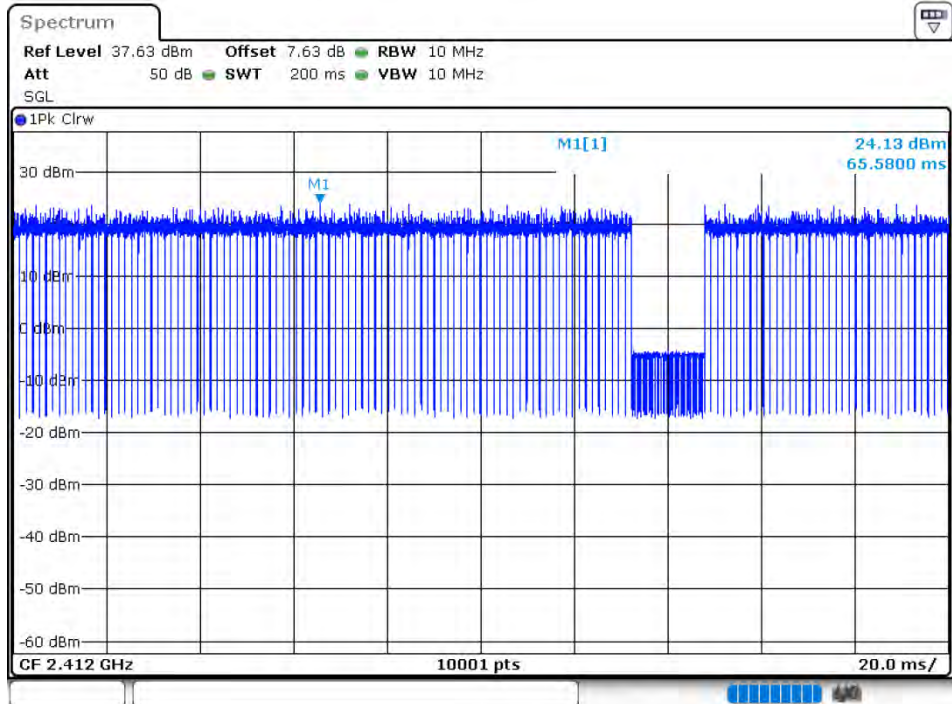


Duty Cycle NVNT 802.11n(HT20) 2437MHz Ant 1

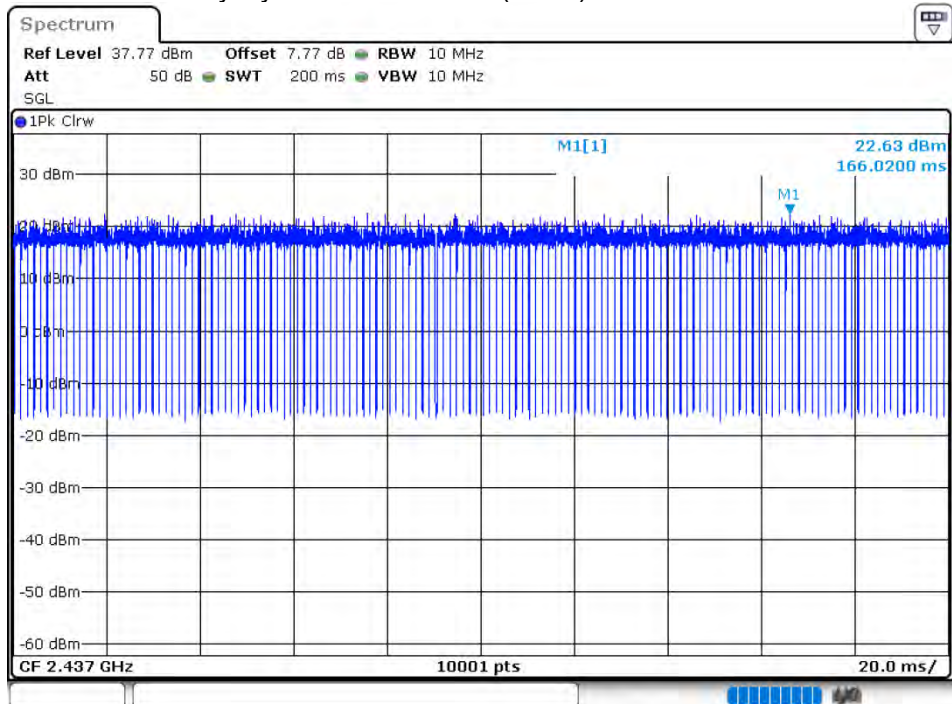


Duty Cycle NVNT 802.11n(HT20) 2462MHz Ant 1

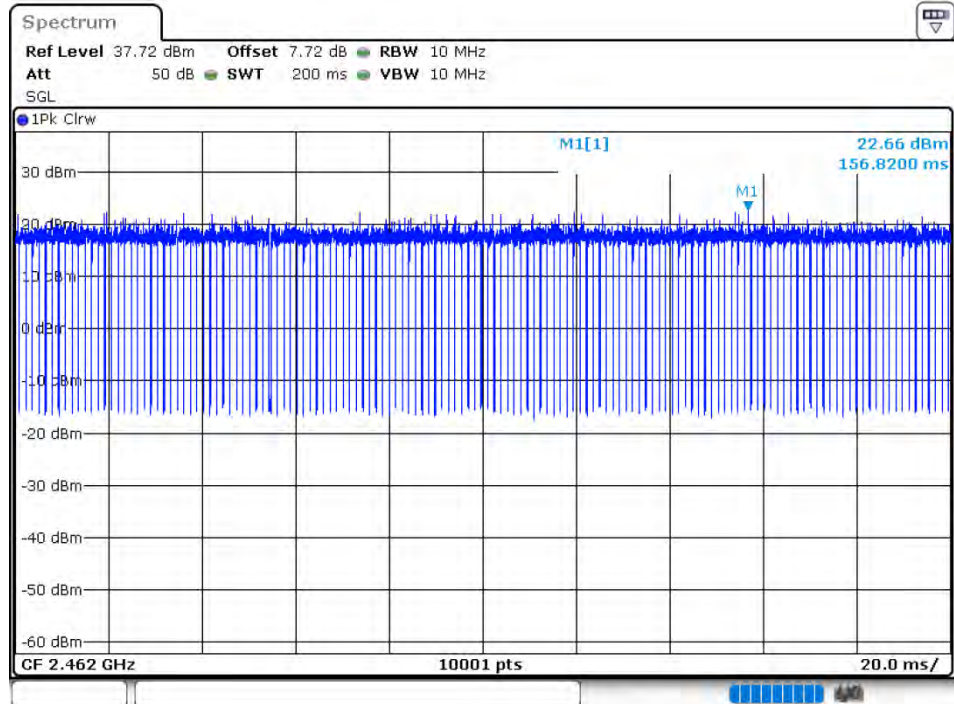


Duty Cycle NVNT 802.11n(HT20) 2412MHz Ant 2

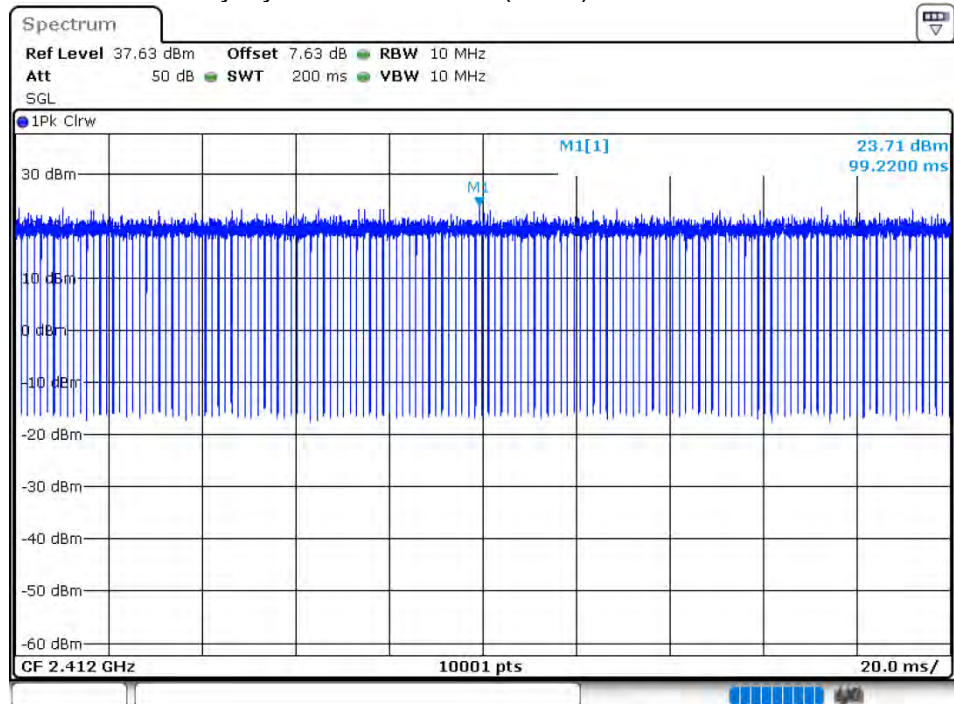


Duty Cycle NVNT 802.11n(HT20) 2437MHz Ant 2

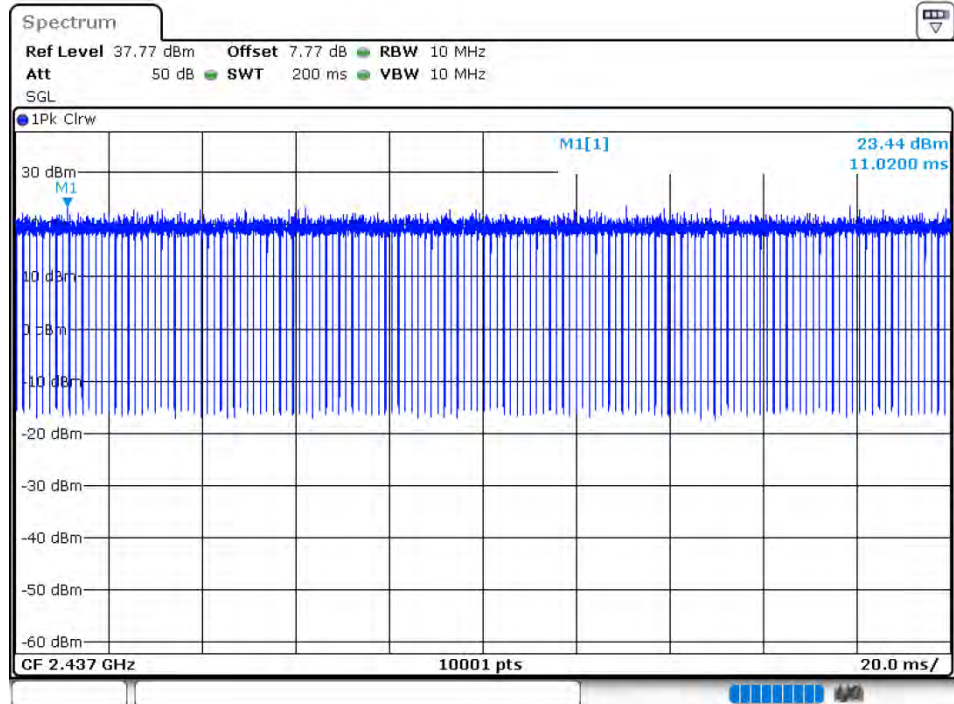


Duty Cycle NVNT 802.11n(HT20) 2462MHz Ant 2

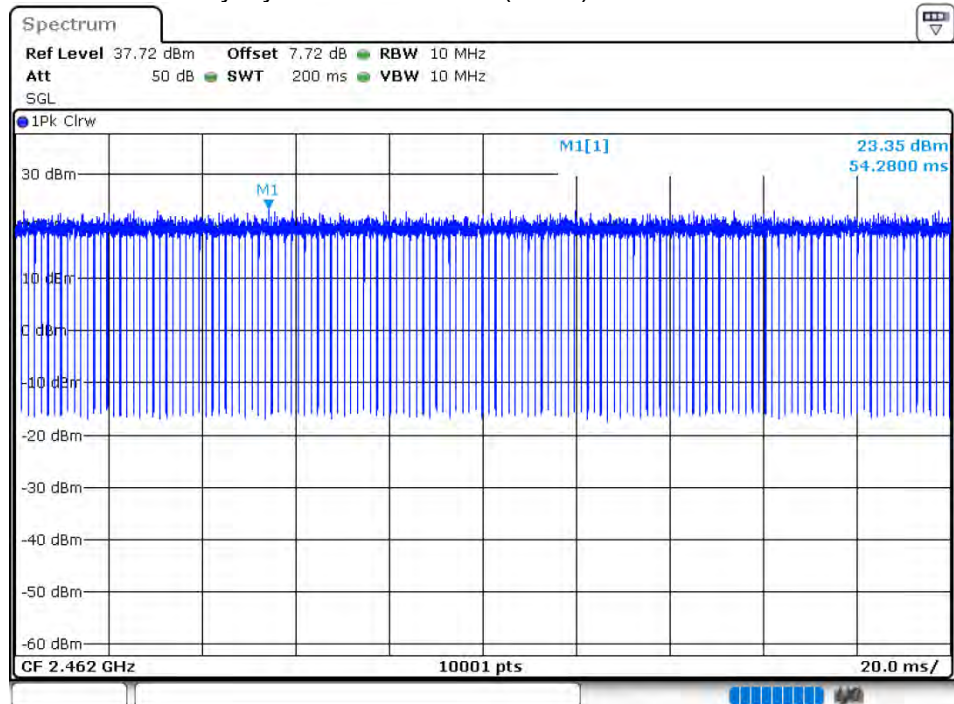


Duty Cycle NVNT 802.11n(HT40) 2422MHz Ant 1

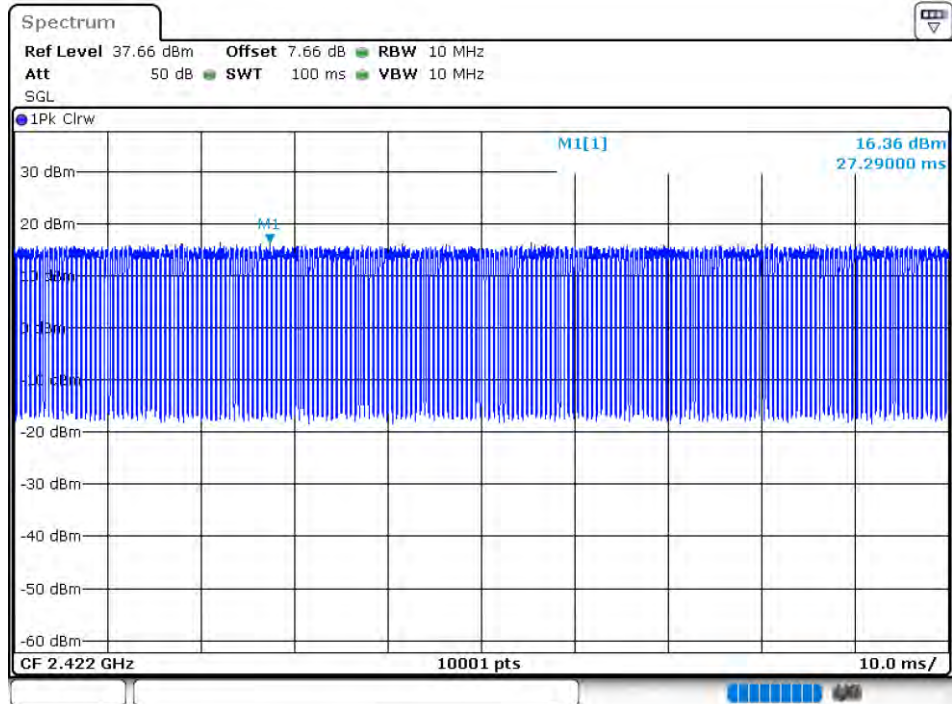


Duty Cycle NVNT 802.11n(HT40) 2437MHz Ant 1

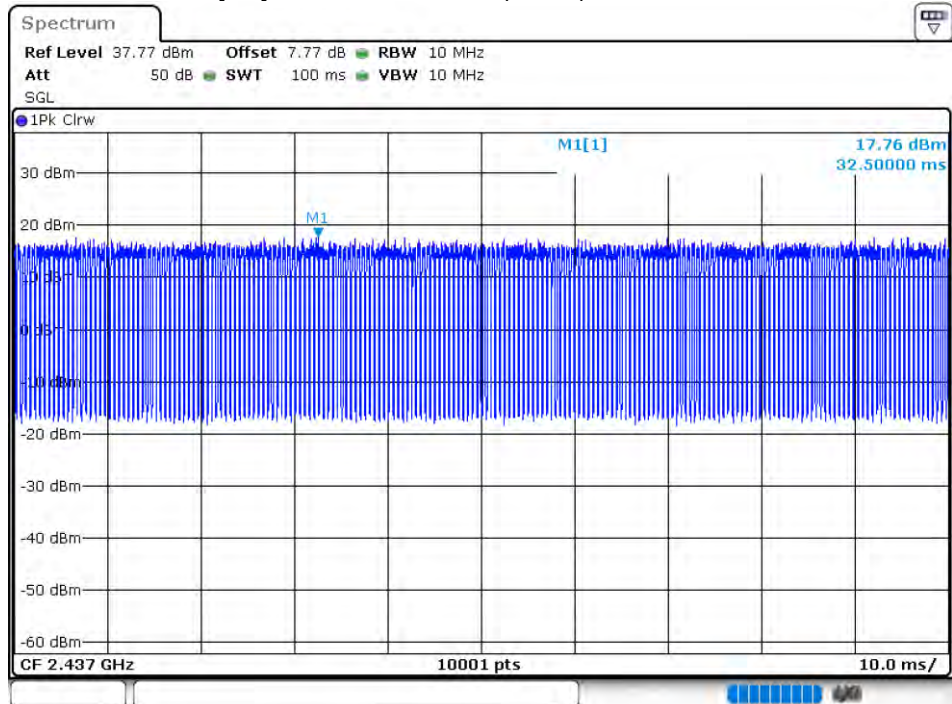


Duty Cycle NVNT 802.11n(HT40) 2452MHz Ant 1

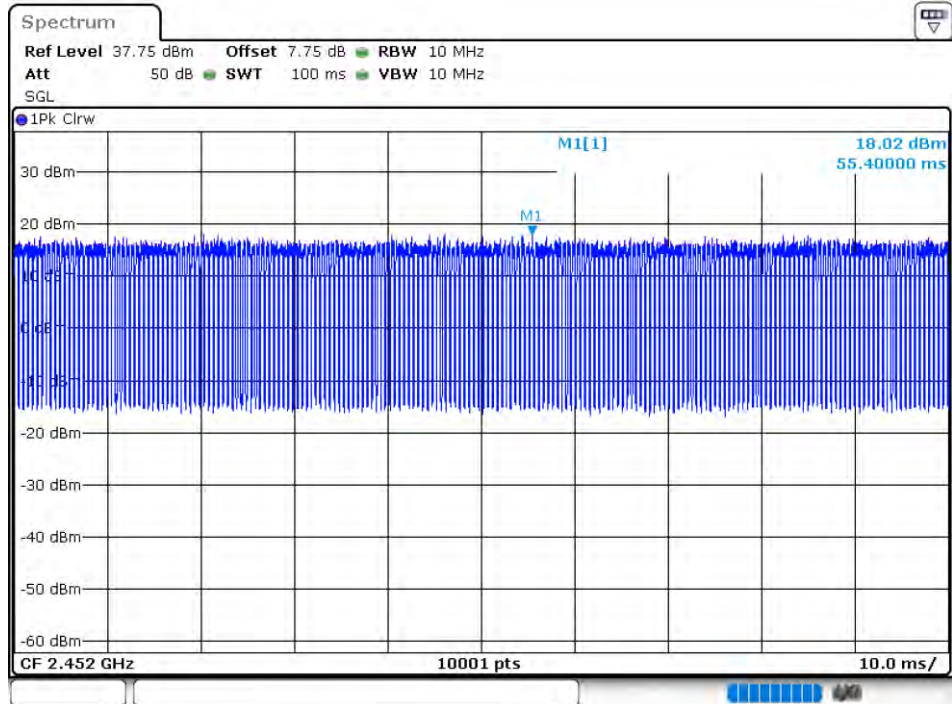


Duty Cycle NVNT 802.11n(HT40) 2422MHz Ant 2

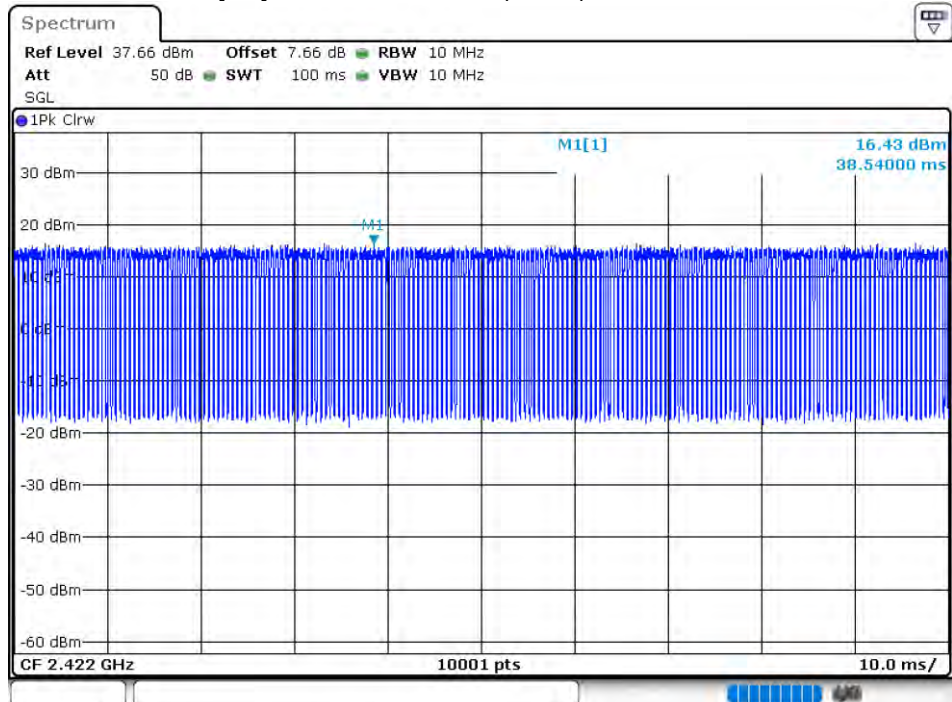

Duty Cycle NVNT 802.11n(HT40) 2437MHz Ant 2

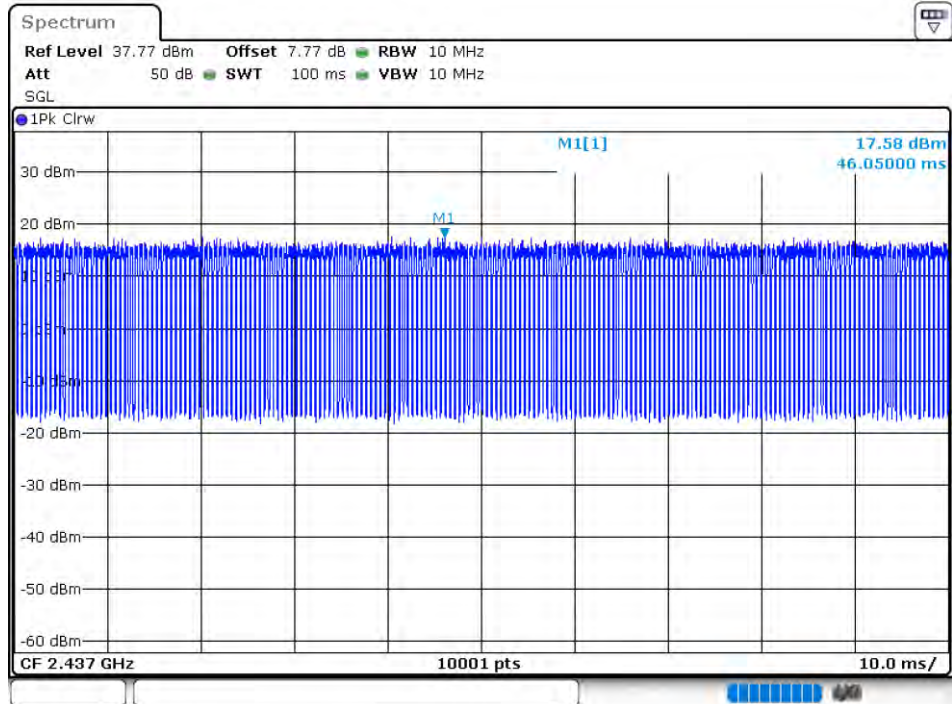

Duty Cycle NVNT 802.11n(HT40) 2452MHz Ant 2

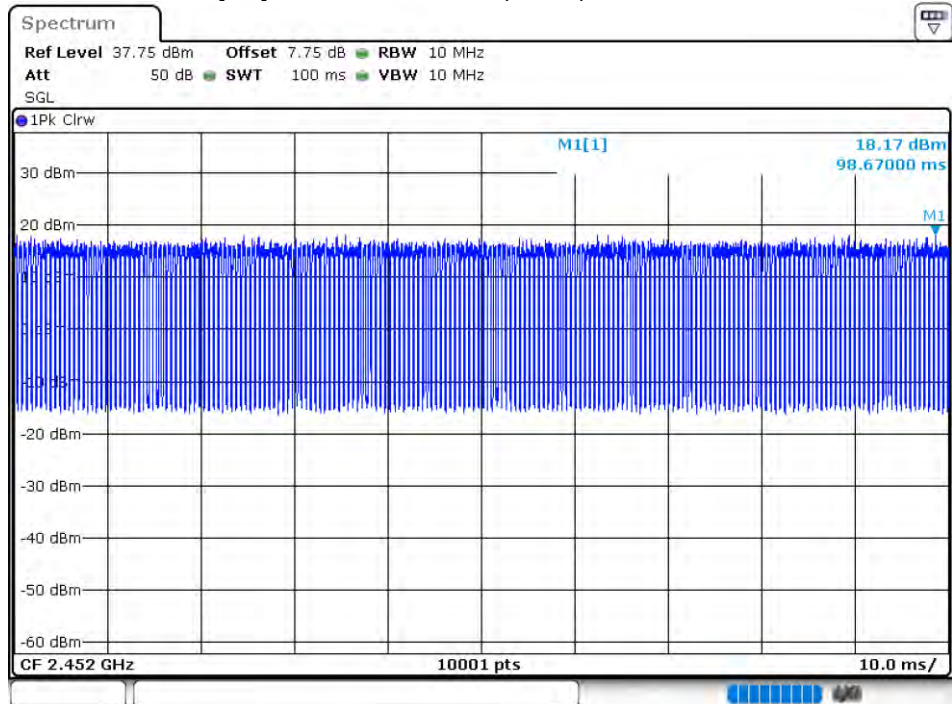


8.1.2 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	802.11b	2412	Ant 1	14.6	30	Pass
NVNT	802.11b	2437	Ant 1	13.48	30	Pass
NVNT	802.11b	2462	Ant 1	14.17	30	Pass
NVNT	802.11b	2412	Ant 2	14.81	30	Pass
NVNT	802.11b	2437	Ant 2	14.77	30	Pass
NVNT	802.11b	2462	Ant 2	15.24	30	Pass
NVNT	802.11g	2412	Ant 1	13.01	30	Pass
NVNT	802.11g	2437	Ant 1	12.4	30	Pass
NVNT	802.11g	2456	Ant 1	12.51	30	Pass
NVNT	802.11g	2412	Ant 2	13.07	30	Pass
NVNT	802.11g	2437	Ant 2	13.04	30	Pass
NVNT	802.11g	2456	Ant 2	13.36	30	Pass
NVNT	802.11n(HT20)	2412	Ant 1	12.82	30	Pass
NVNT	802.11n(HT20)	2437	Ant 1	11.26	30	Pass
NVNT	802.11n(HT20)	2462	Ant 1	11.45	30	Pass
NVNT	802.11n(HT20)	2412	Ant 2	13.1	30	Pass
NVNT	802.11n(HT20)	2437	Ant 2	12.93	30	Pass
NVNT	802.11n(HT20)	2462	Ant 2	13.18	30	Pass
NVNT	802.11n(HT40)	2422	Ant 1	12.5	30	Pass
NVNT	802.11n(HT40)	2437	Ant 1	11.89	30	Pass
NVNT	802.11n(HT40)	2452	Ant 1	11.89	30	Pass
NVNT	802.11n(HT40)	2422	Ant 2	12.51	30	Pass
NVNT	802.11n(HT40)	2437	Ant 2	11.93	30	Pass
NVNT	802.11n(HT40)	2452	Ant 2	11.97	30	Pass


8.1.3 OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	802.11b	2412	Ant 1	11.8282	7.12	0.5	Pass
NVNT	802.11b	2437	Ant 1	10.9091	7.12	0.5	Pass
NVNT	802.11b	2462	Ant 1	11.1089	6.56	0.5	Pass
NVNT	802.11b	2412	Ant 2	11.8681	8.04	0.5	Pass
NVNT	802.11b	2437	Ant 2	10.9091	7.08	0.5	Pass
NVNT	802.11b	2462	Ant 2	10.8292	7.08	0.5	Pass
NVNT	802.11g	2412	Ant 1	16.7433	16.32	0.5	Pass
NVNT	802.11g	2437	Ant 1	17.023	16.32	0.5	Pass
NVNT	802.11g	2462	Ant 1	16.7832	16.44	0.5	Pass
NVNT	802.11g	2412	Ant 2	16.6633	16.36	0.5	Pass
NVNT	802.11g	2437	Ant 2	16.8232	16.36	0.5	Pass
NVNT	802.11g	2462	Ant 2	16.8232	16.36	0.5	Pass
NVNT	802.11n(HT20)	2412	Ant 1	17.7822	17.6	0.5	Pass
NVNT	802.11n(HT20)	2437	Ant 1	18.2617	17.6	0.5	Pass
NVNT	802.11n(HT20)	2462	Ant 1	17.9421	16.68	0.5	Pass
NVNT	802.11n(HT20)	2412	Ant 2	18.1419	17.56	0.5	Pass
NVNT	802.11n(HT20)	2437	Ant 2	17.9021	17.6	0.5	Pass
NVNT	802.11n(HT20)	2462	Ant 2	17.7822	17.6	0.5	Pass
NVNT	802.11n(HT40)	2422	Ant 1	44.1958	36.16	0.5	Pass
NVNT	802.11n(HT40)	2437	Ant 1	36.2038	35.44	0.5	Pass
NVNT	802.11n(HT40)	2452	Ant 1	35.8841	32.8	0.5	Pass
NVNT	802.11n(HT40)	2422	Ant 2	45.6344	35.84	0.5	Pass
NVNT	802.11n(HT40)	2437	Ant 2	36.2837	35.6	0.5	Pass
NVNT	802.11n(HT40)	2452	Ant 2	35.964	30.88	0.5	Pass


OBW NVNT 802.11b 2412MHz Ant 1

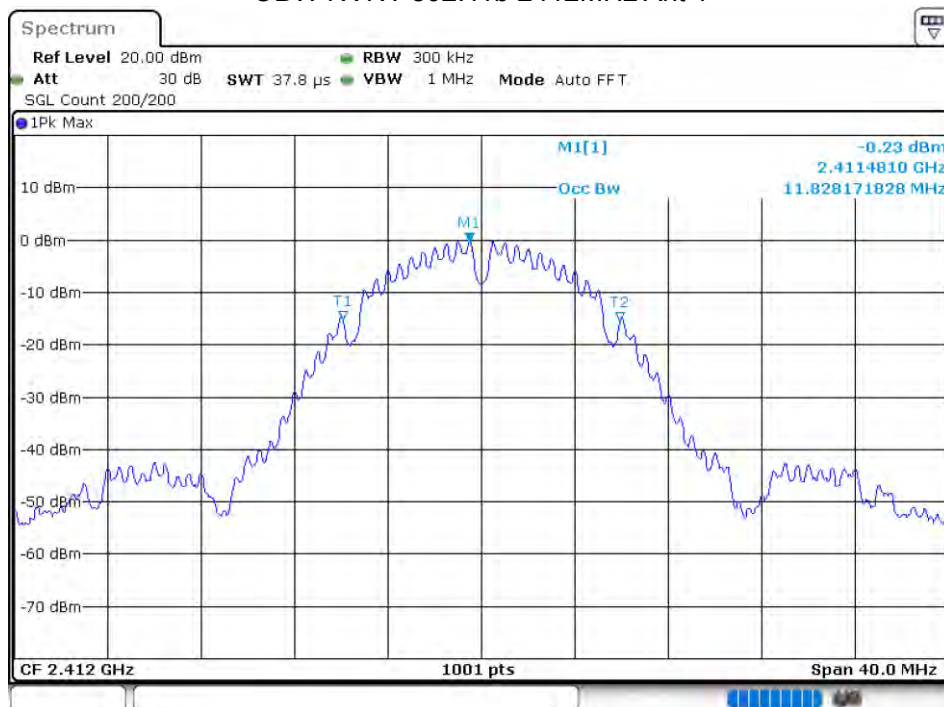


-6 dB BW NVNT 802.11b 2412MHz Ant 1

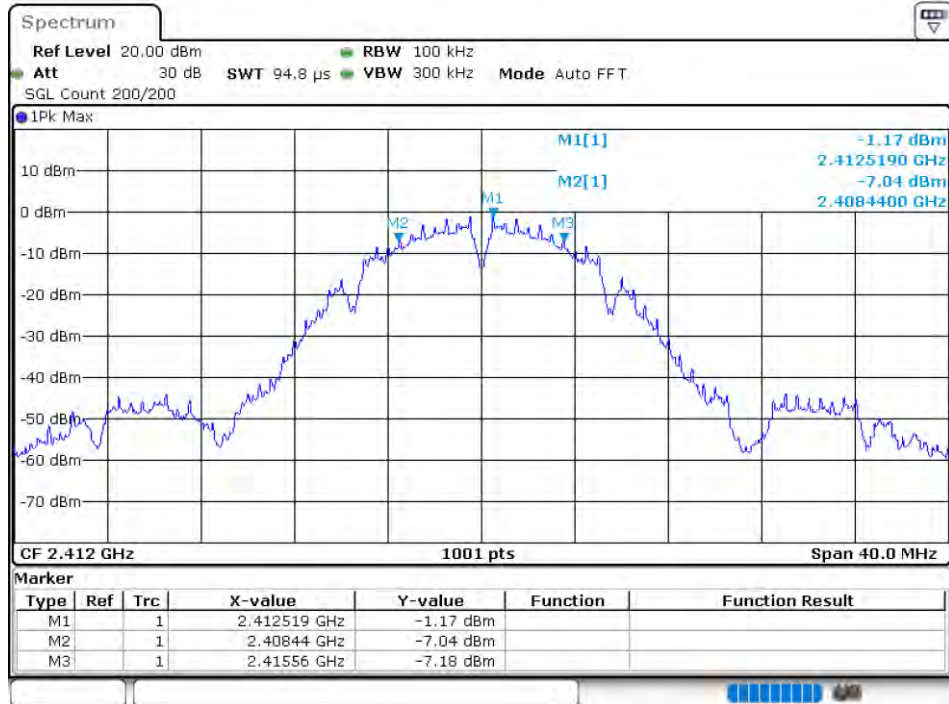


OBW NVNT 802.11b 2437MHz Ant 1

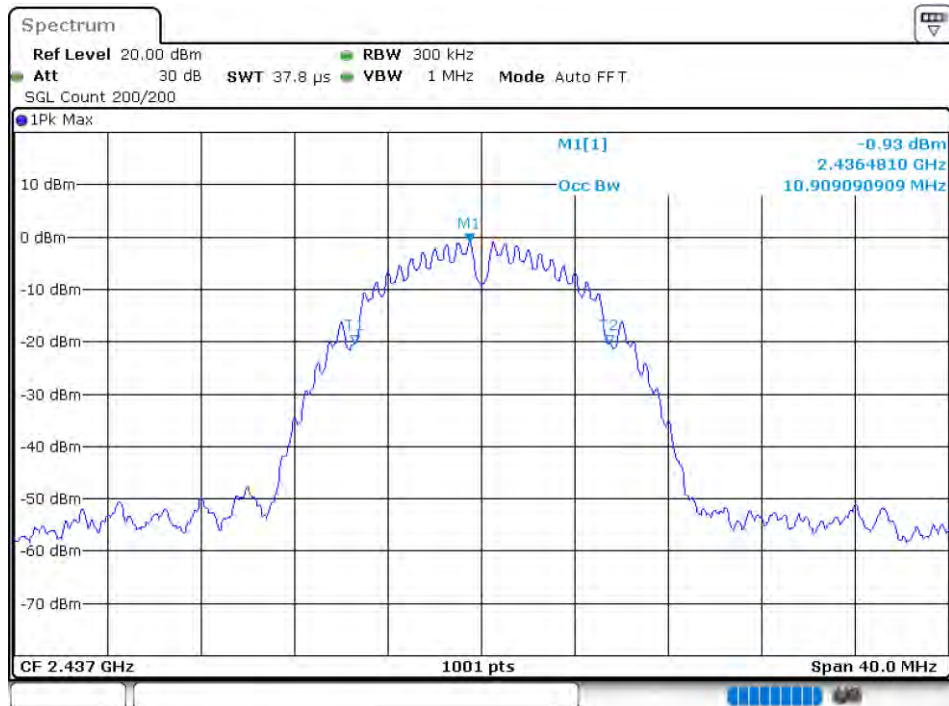


-6 dB BW NVNT 802.11b 2437MHz Ant 1

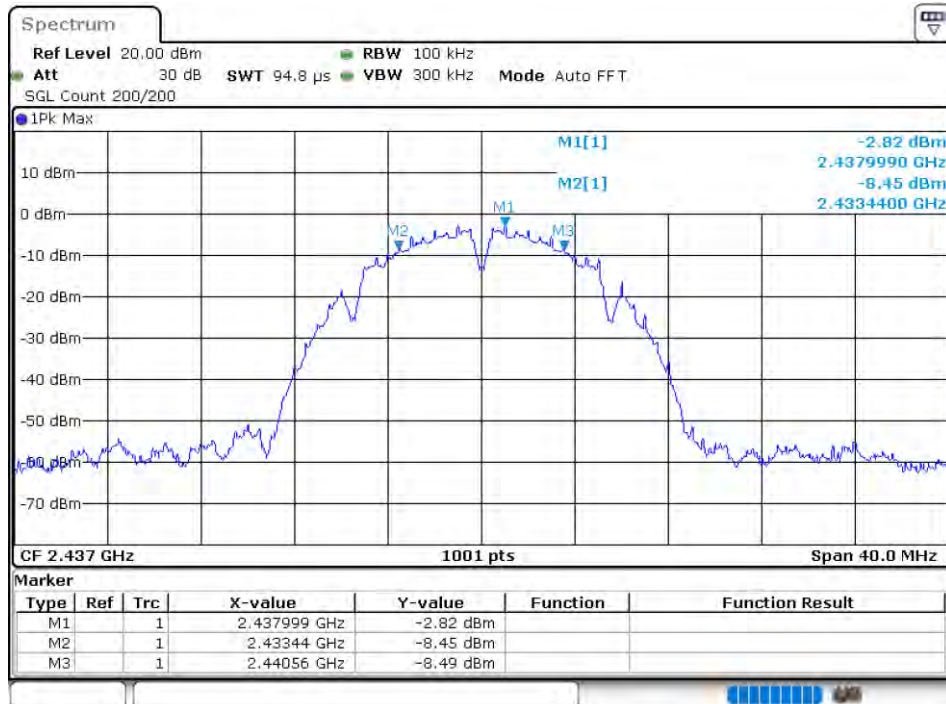


OBW NVNT 802.11b 2462MHz Ant 1

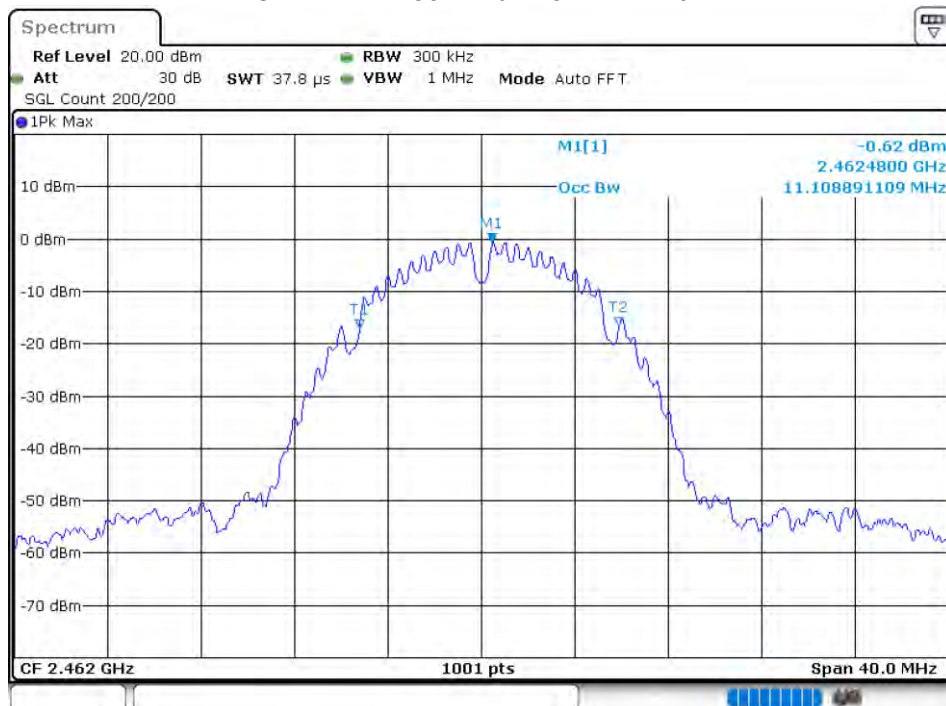


-6 dB BW NVNT 802.11b 2462MHz Ant 1

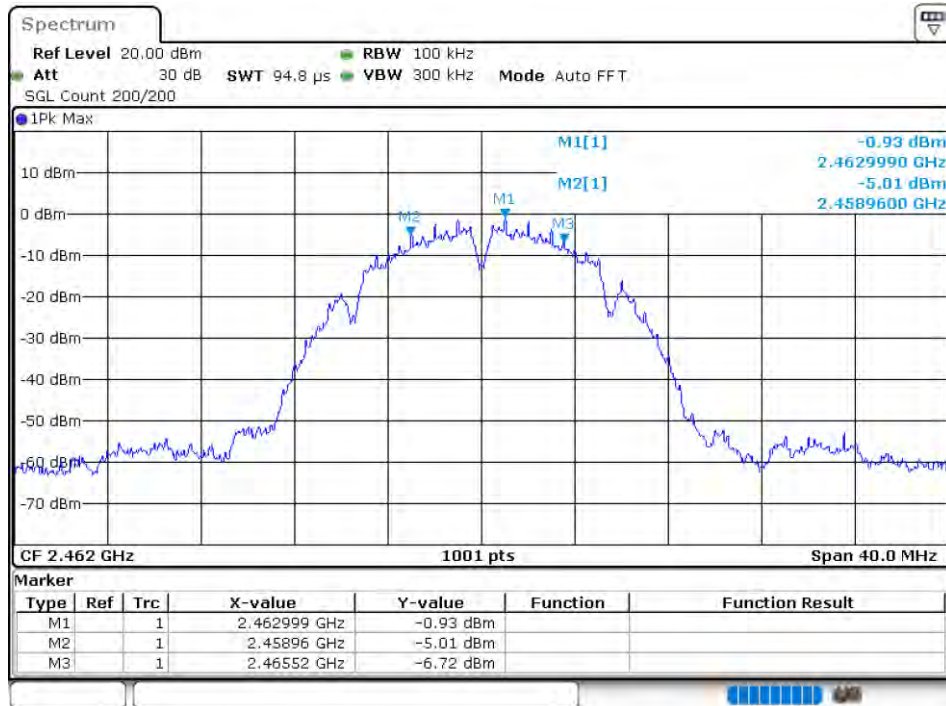


OBW NVNT 802.11b 2412MHz Ant 2

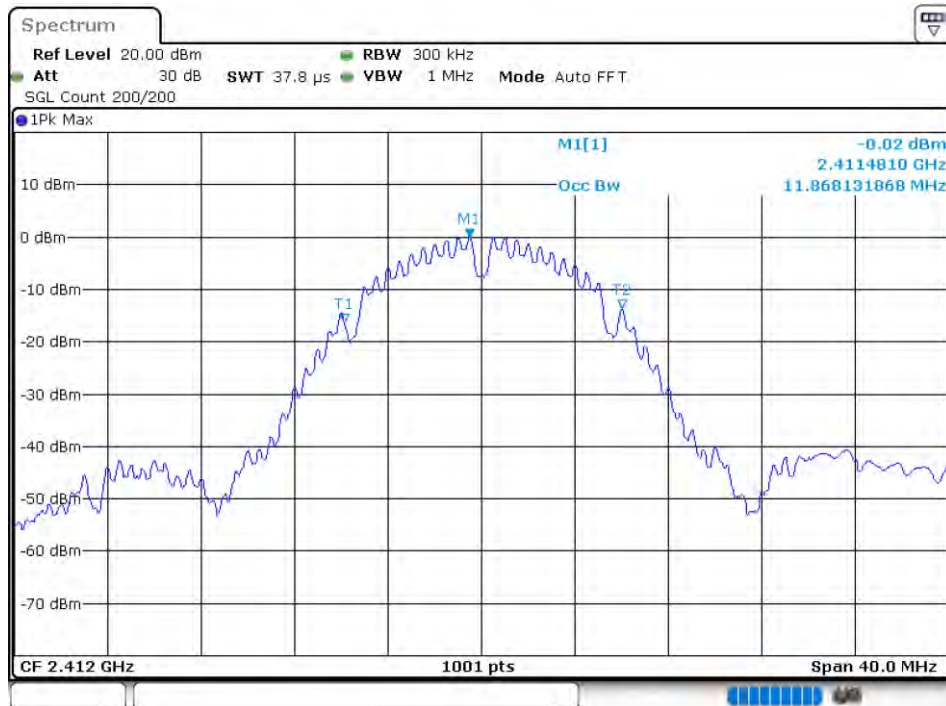

-6 dB BW NVNT 802.11b 2412MHz Ant 2

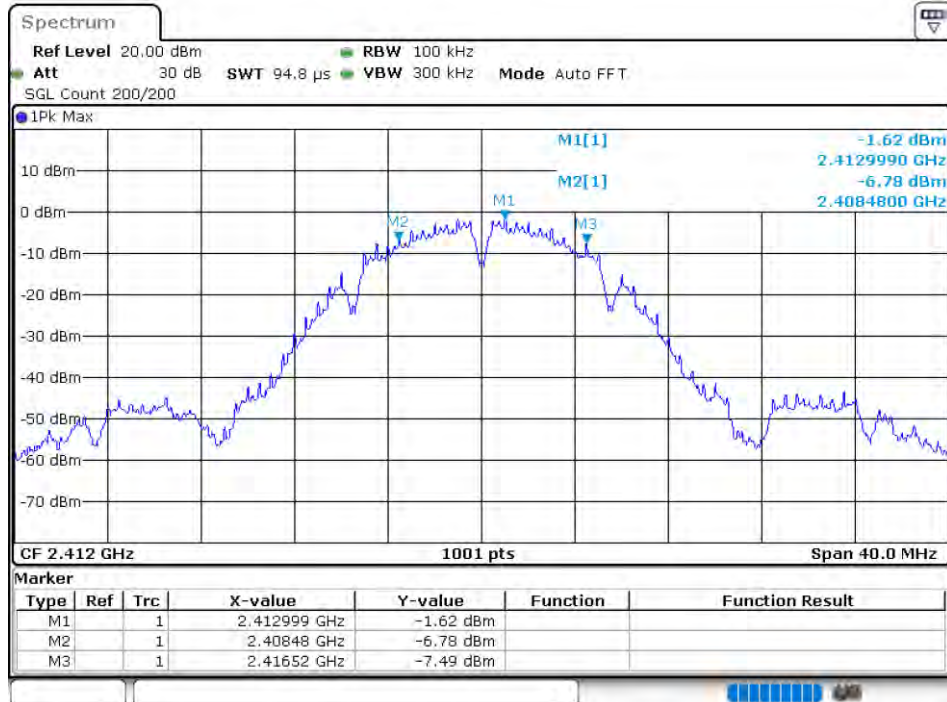


OBW NVNT 802.11b 2437MHz Ant 2

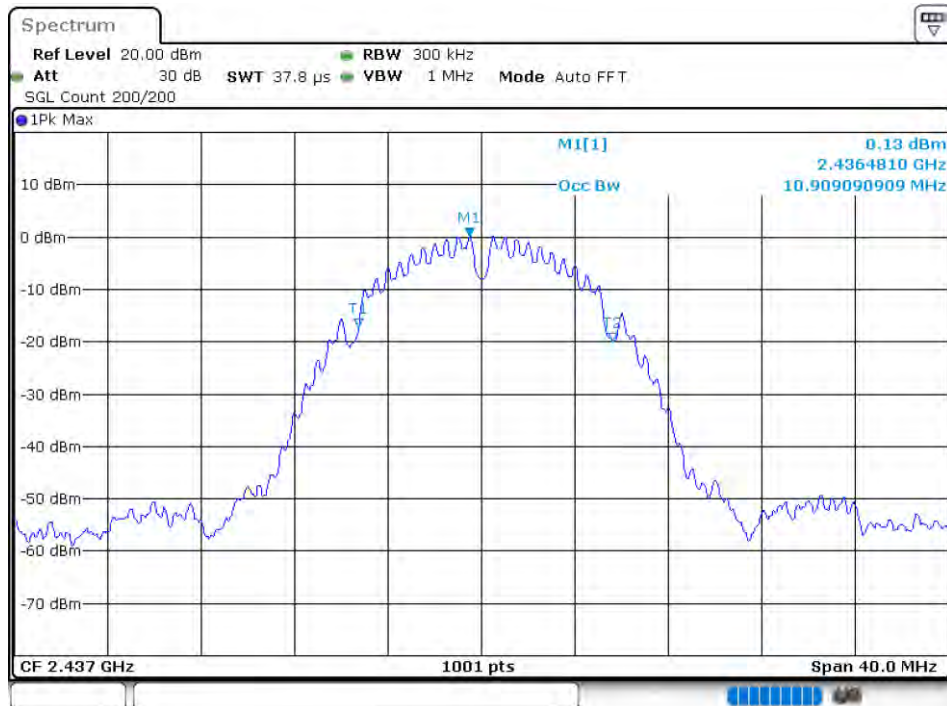


-6 dB BW NVNT 802.11b 2437MHz Ant 2



OBW NVNT 802.11b 2462MHz Ant 2

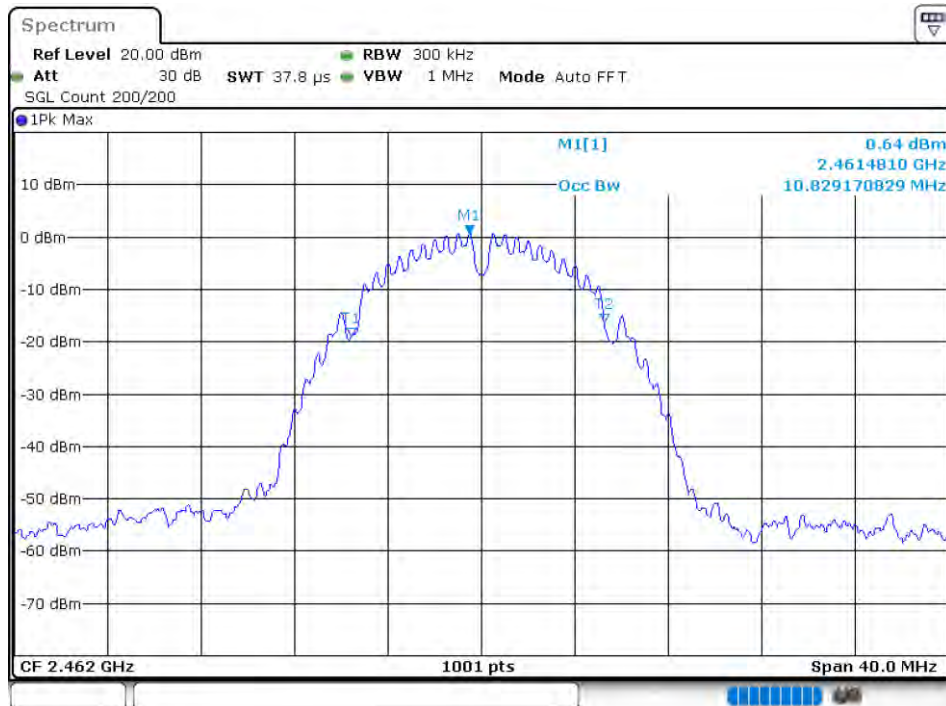


-6 dB BW NVNT 802.11b 2462MHz Ant 2

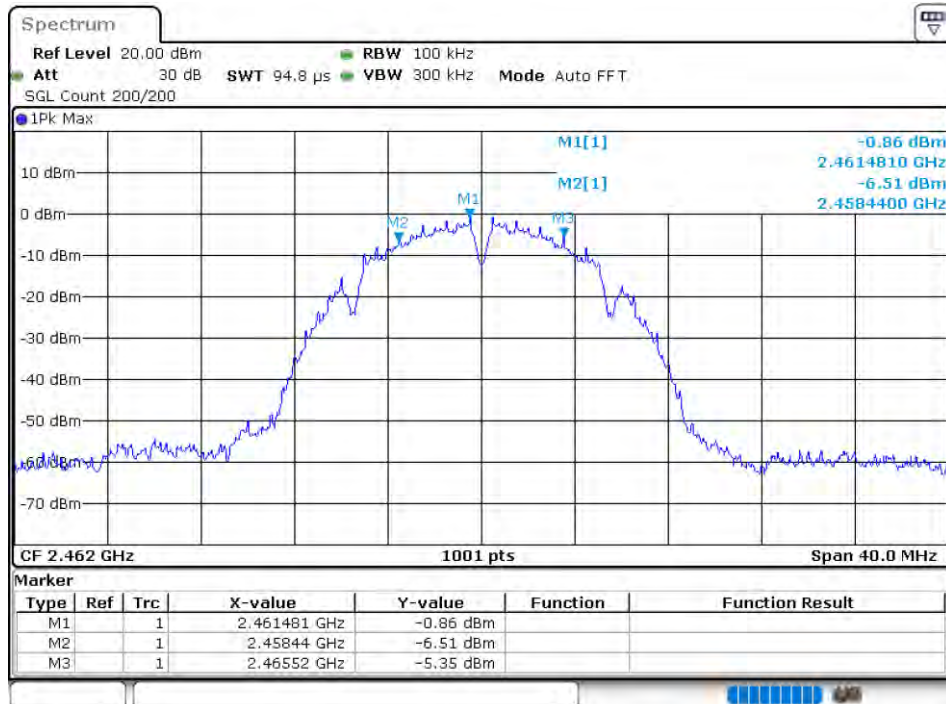

OBW NVNT 802.11g 2412MHz Ant 1




-6 dB BW NVNT 802.11g 2412MHz Ant 1

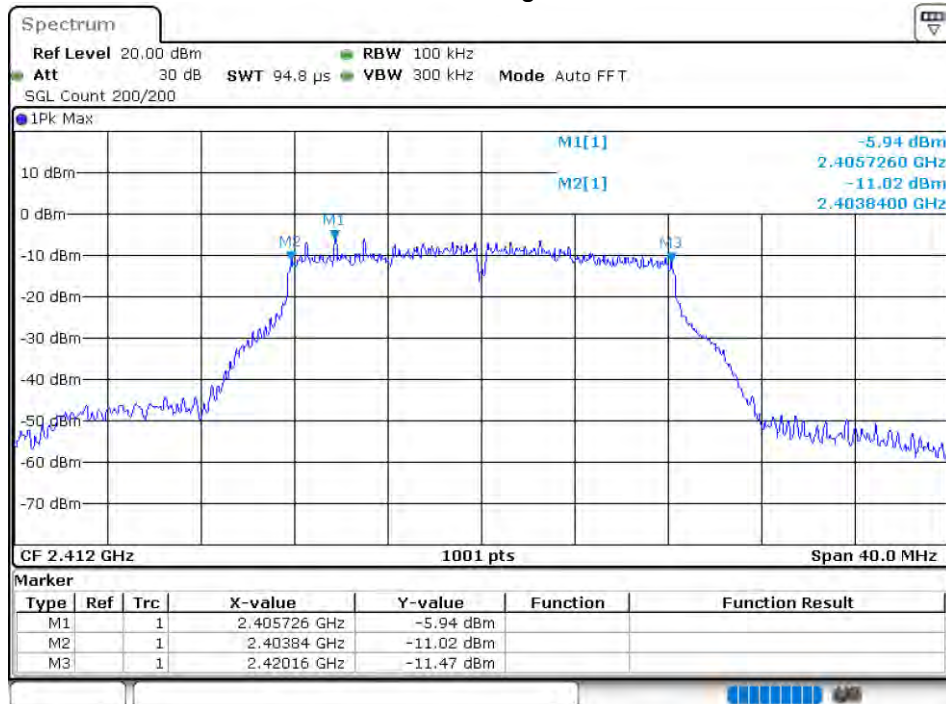

OBW NVNT 802.11g 2437MHz Ant 1




-6 dB BW NVNT 802.11g 2437MHz Ant 1

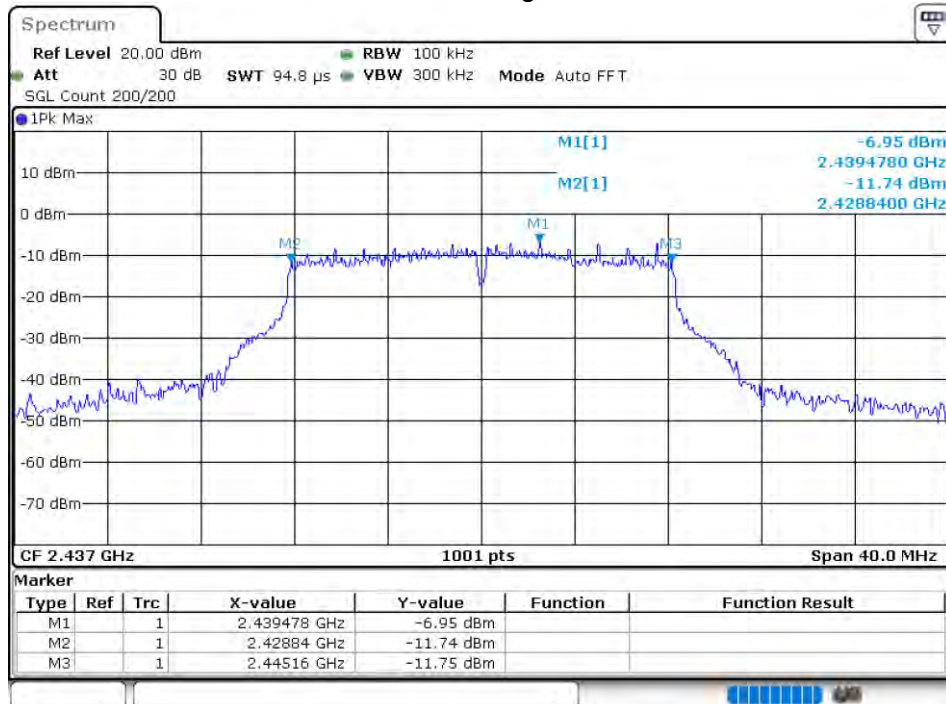

OBW NVNT 802.11g 2462MHz Ant 1




-6 dB BW NVNT 802.11g 2462MHz Ant 1

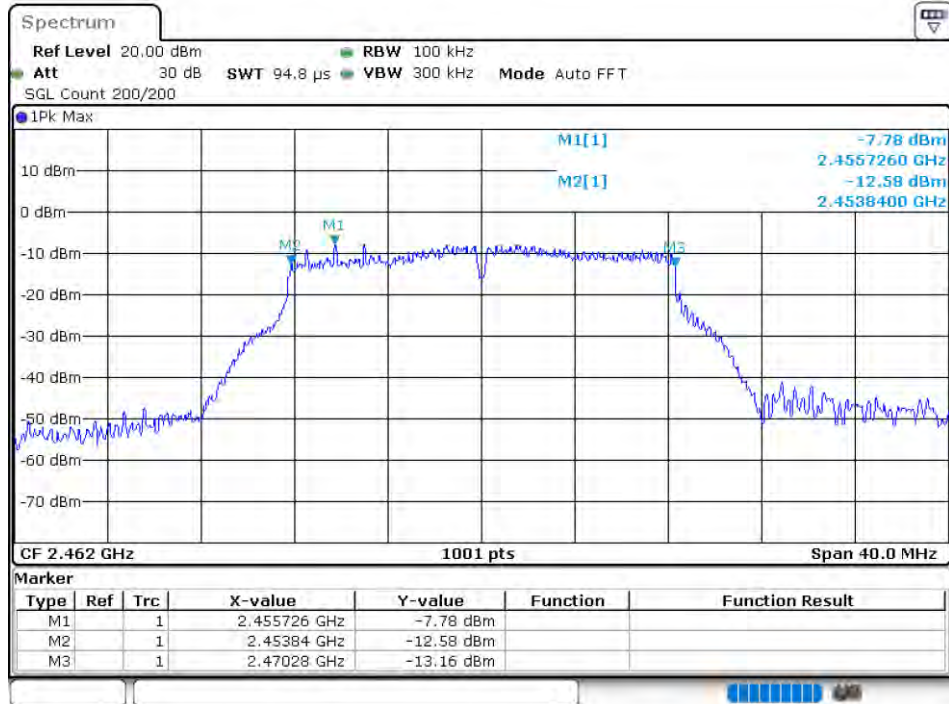

OBW NVNT 802.11g 2412MHz Ant 2




-6 dB BW NVNT 802.11g 2412MHz Ant 2

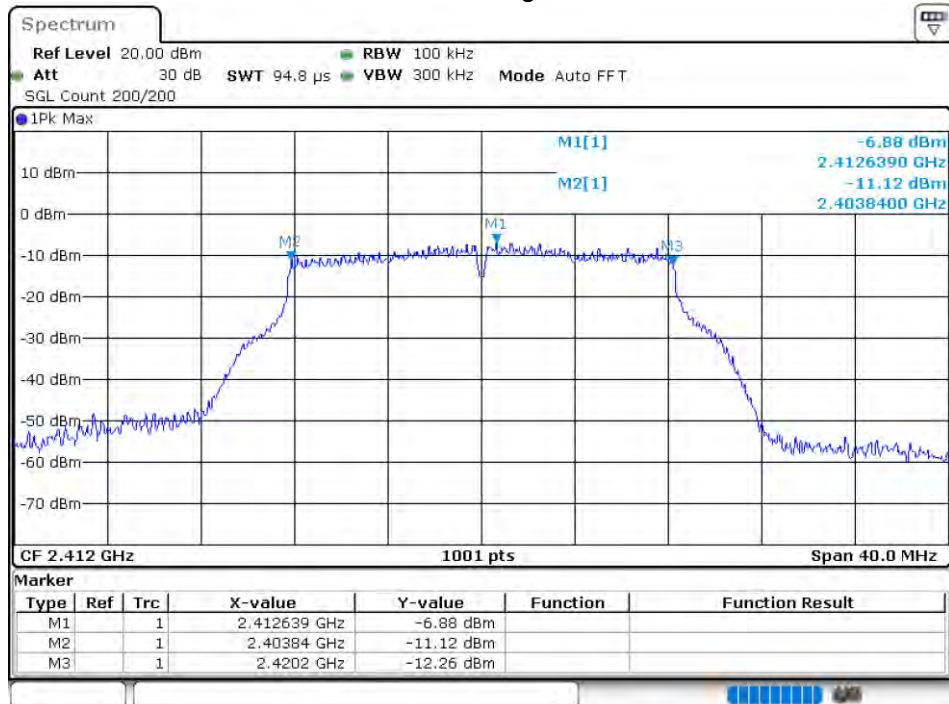

OBW NVNT 802.11g 2437MHz Ant 2




-6 dB BW NVNT 802.11g 2437MHz Ant 2

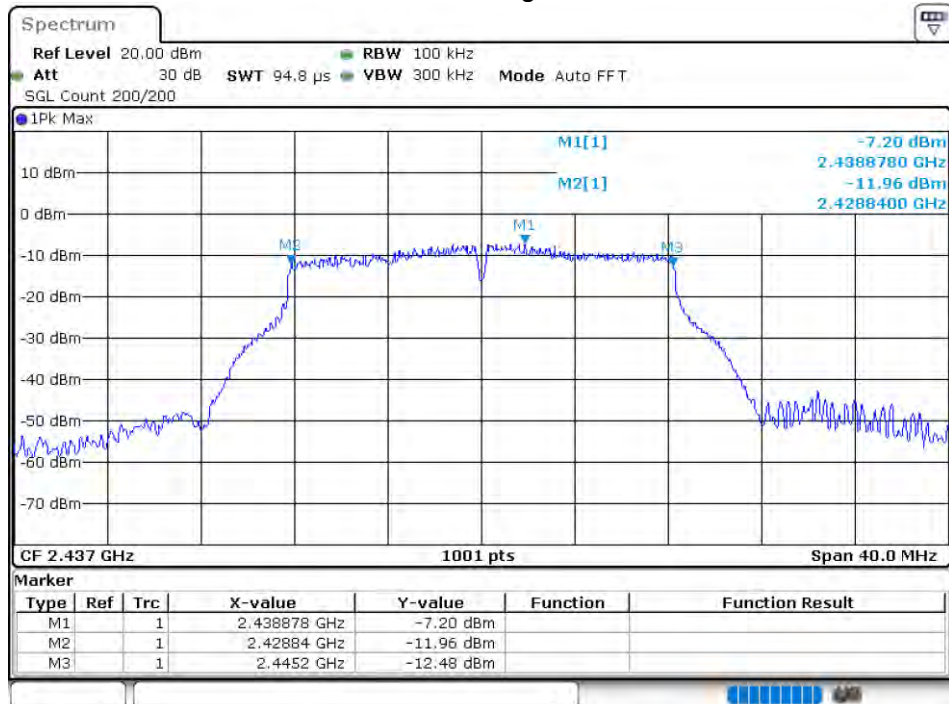

OBW NVNT 802.11g 2462MHz Ant 2




-6 dB BW NVNT 802.11g 2462MHz Ant 2

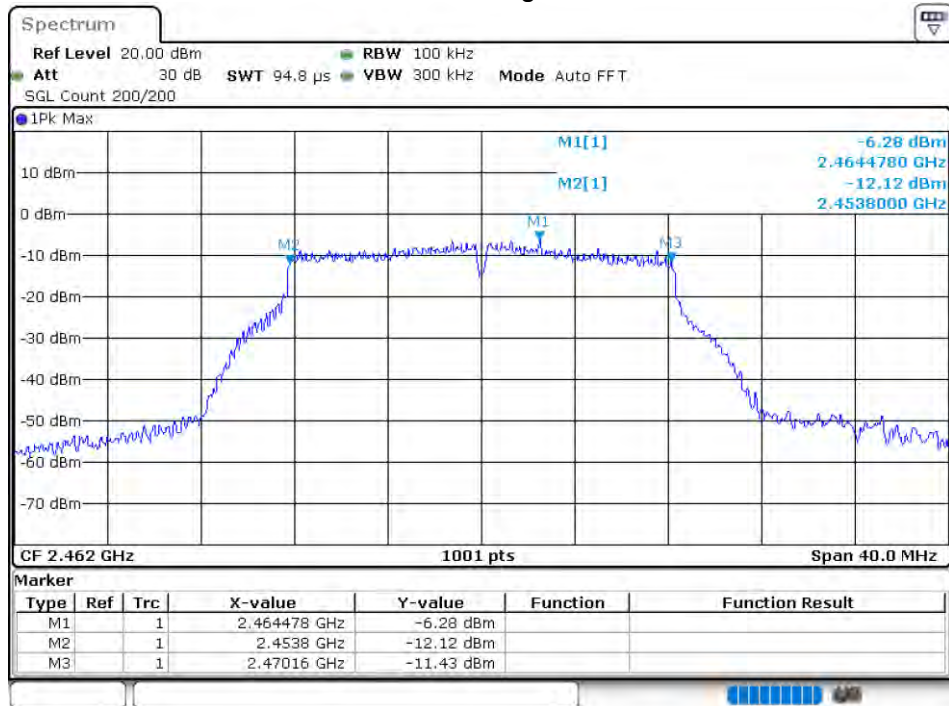

OBW NVNT 802.11n(HT20) 2412MHz Ant 1




-6 dB BW NVNT 802.11n(HT20) 2412MHz Ant 1

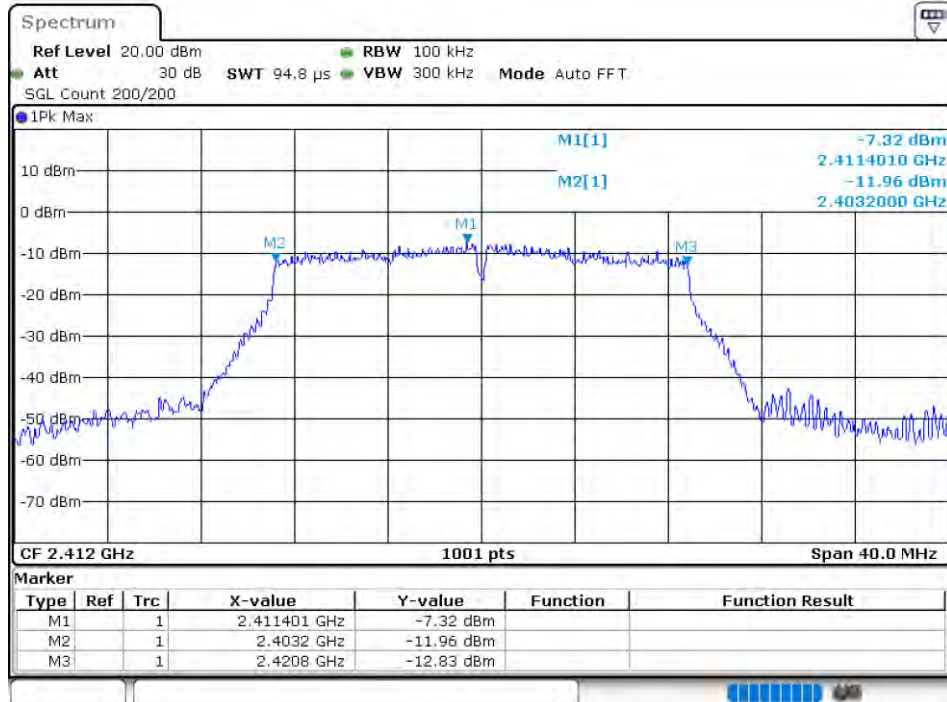


OBW NVNT 802.11n(HT20) 2437MHz Ant 1




-6 dB BW NVNT 802.11n(HT20) 2437MHz Ant 1

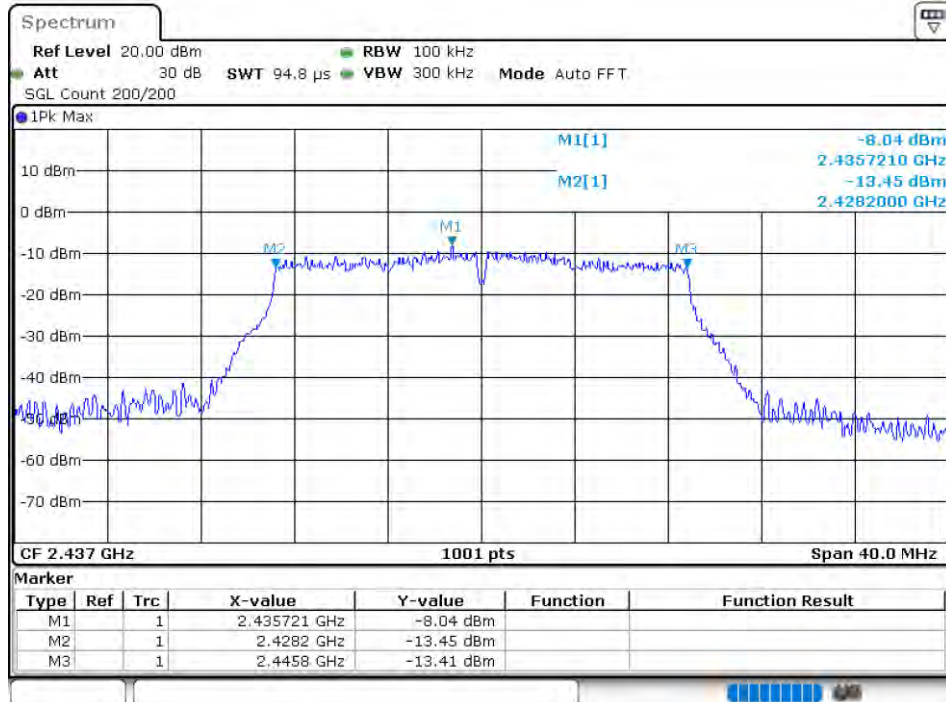

OBW NVNT 802.11n(HT20) 2462MHz Ant 1

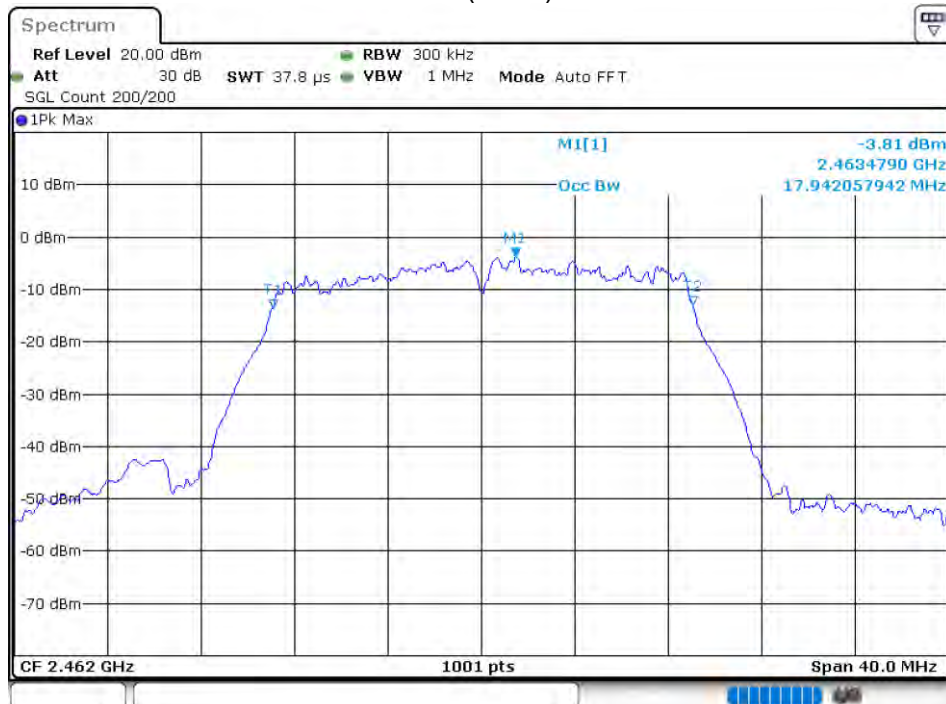


-6 dB BW NVNT 802.11n(HT20) 2462MHz Ant 1

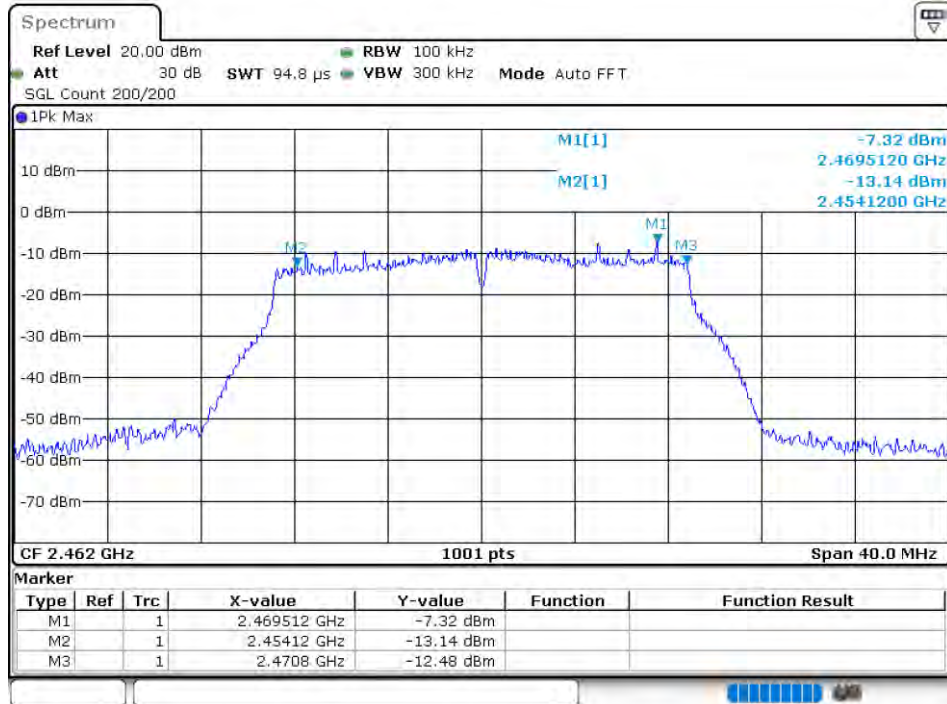

OBW NVNT 802.11n(HT20) 2412MHz Ant 2




-6 dB BW NVNT 802.11n(HT20) 2412MHz Ant 2

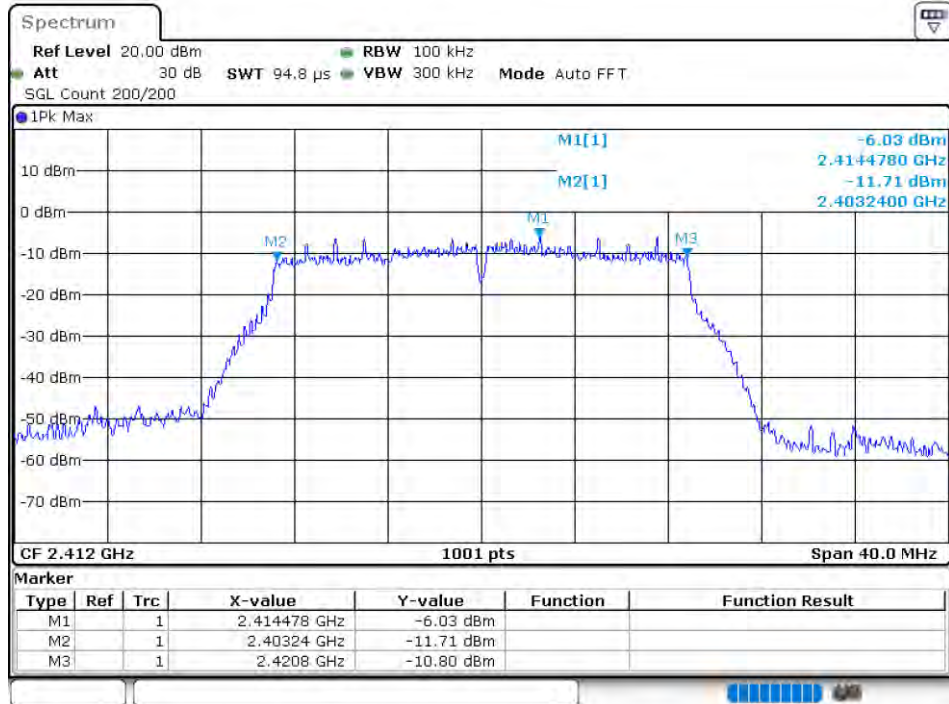


OBW NVNT 802.11n(HT20) 2437MHz Ant 2




-6 dB BW NVNT 802.11n(HT20) 2437MHz Ant 2

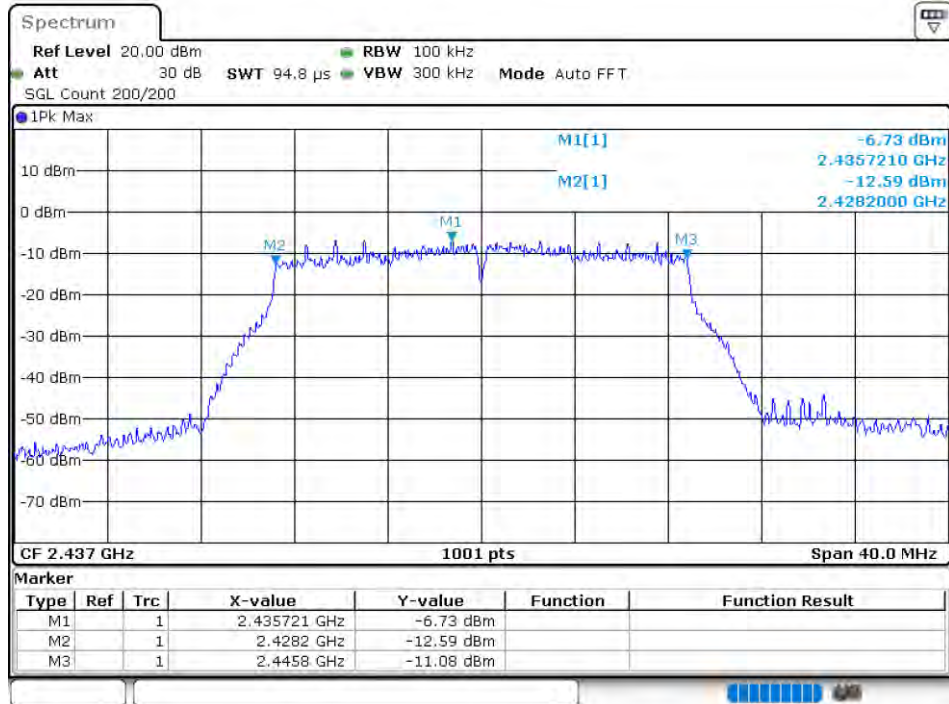


OBW NVNT 802.11n(HT20) 2462MHz Ant 2

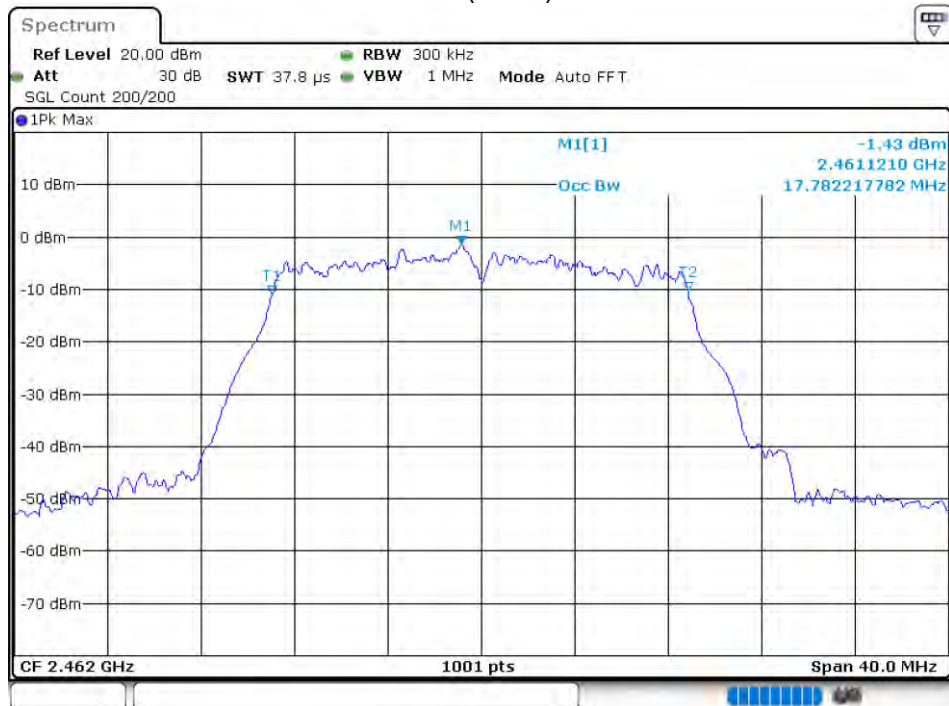


-6 dB BW NVNT 802.11n(HT20) 2462MHz Ant 2

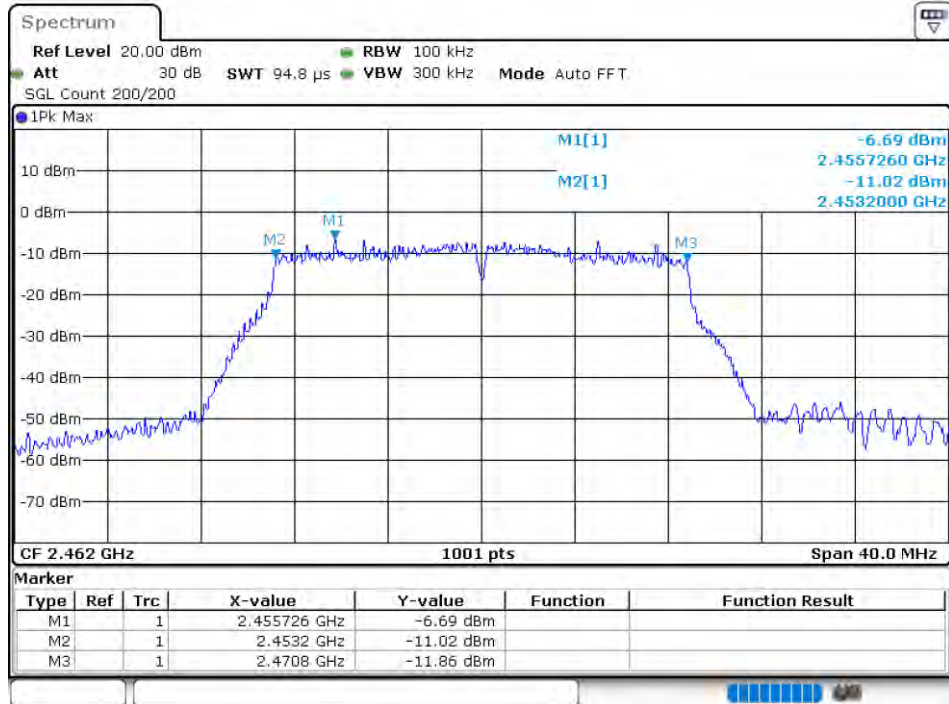


OBW NVNT 802.11n(HT40) 2422MHz Ant 1

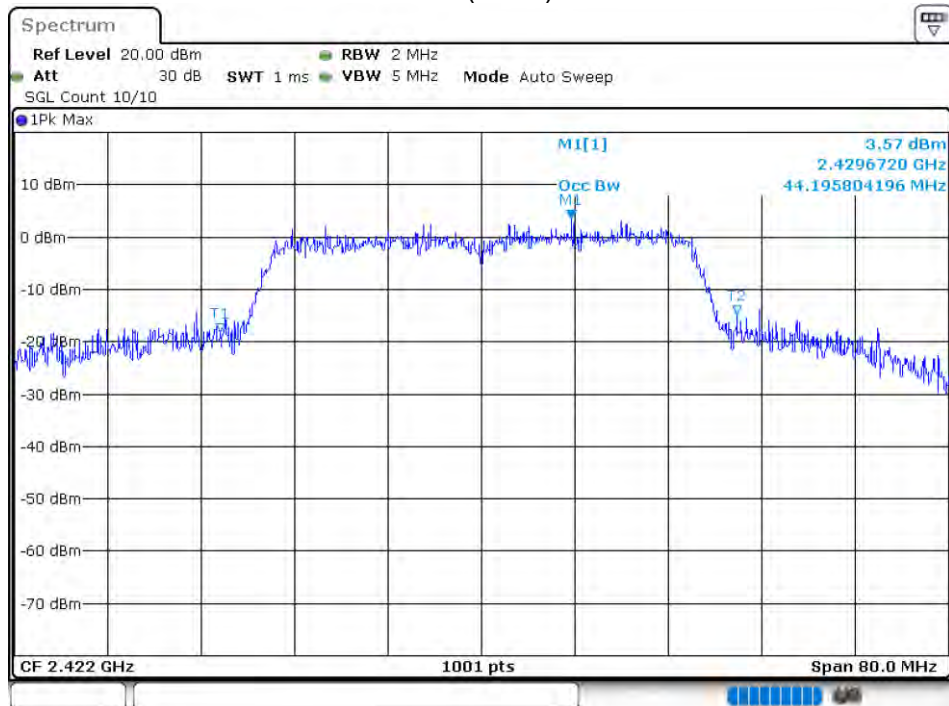


-6 dB BW NVNT 802.11n(HT40) 2422MHz Ant 1

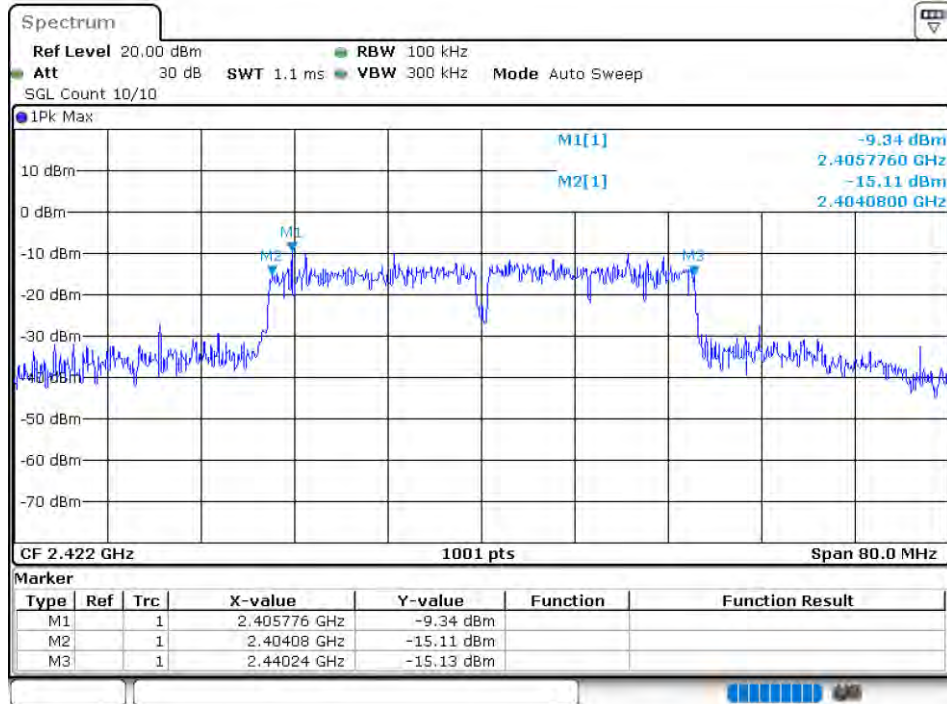


OBW NVNT 802.11n(HT40) 2437MHz Ant 1

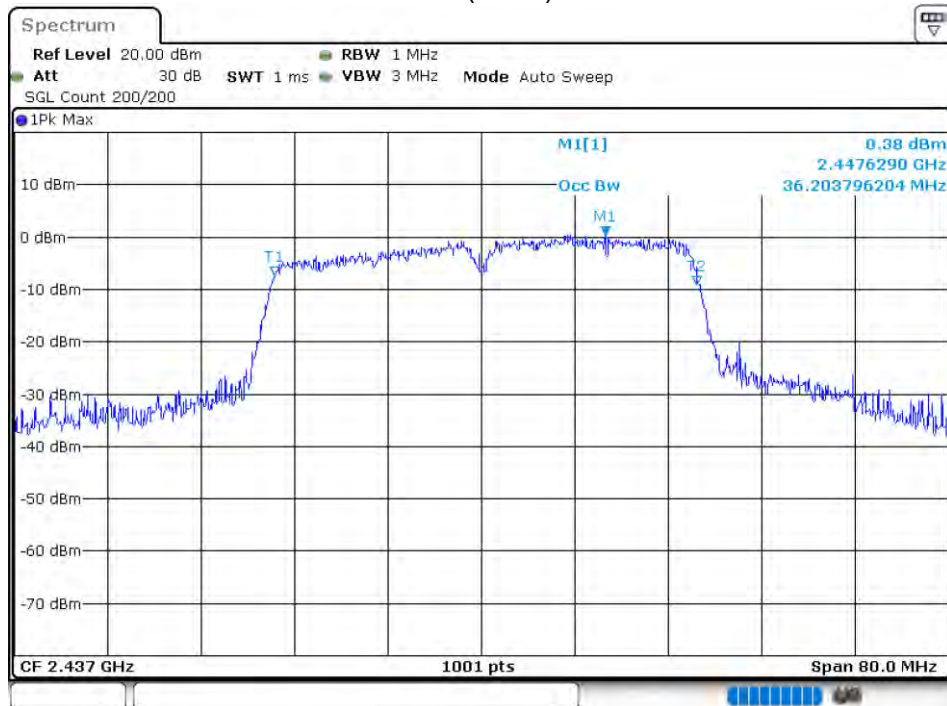


-6 dB BW NVNT 802.11n(HT40) 2437MHz Ant 1

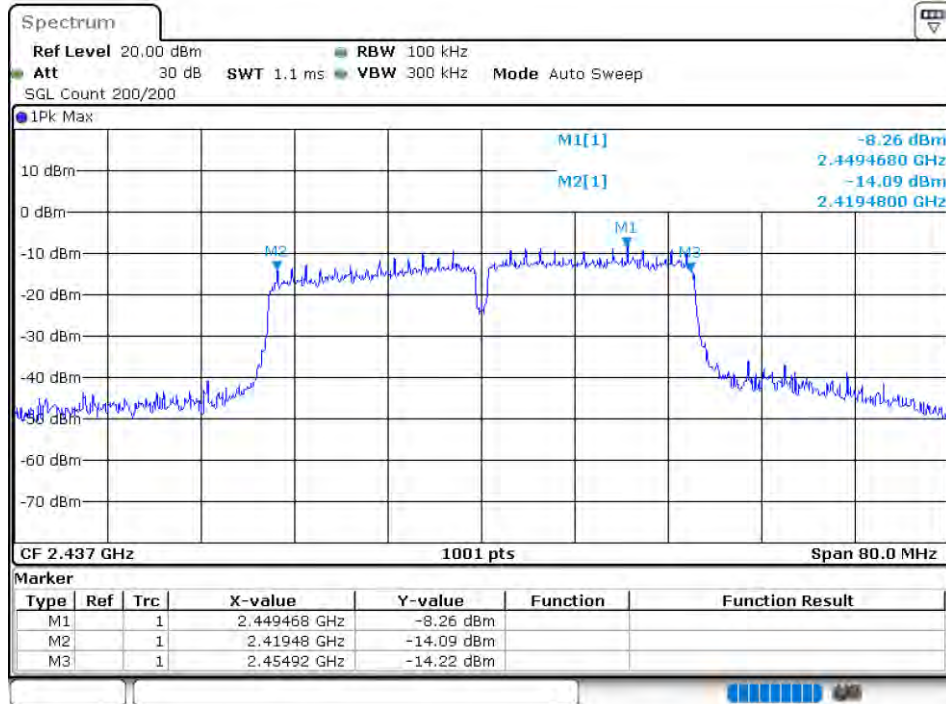


OBW NVNT 802.11n(HT40) 2452MHz Ant 1

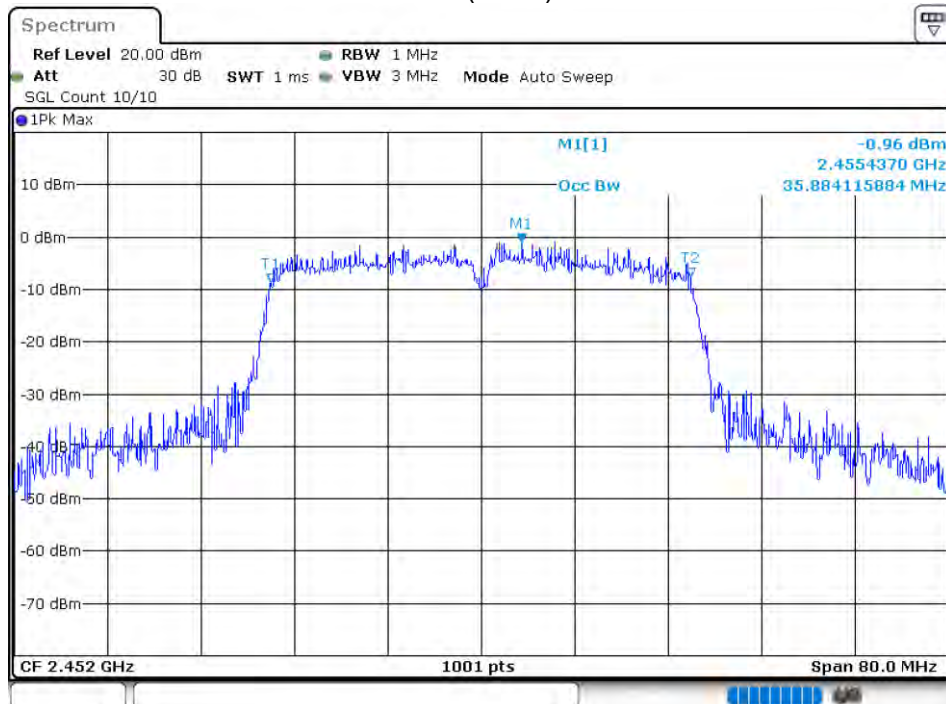


-6 dB BW NVNT 802.11n(HT40) 2452MHz Ant 1

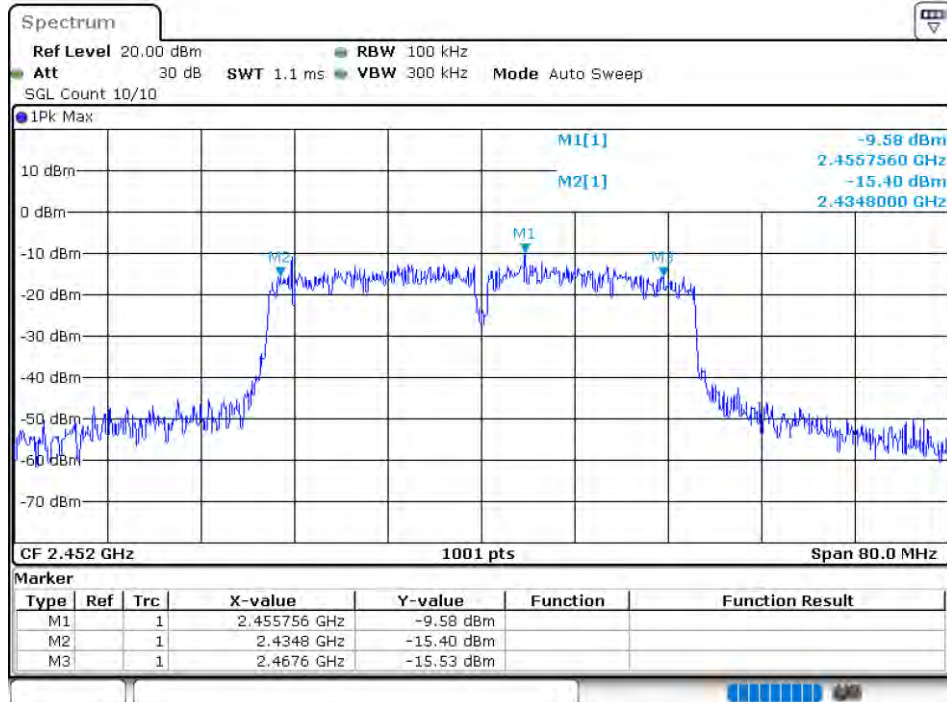


OBW NVNT 802.11n(HT40) 2422MHz Ant 2

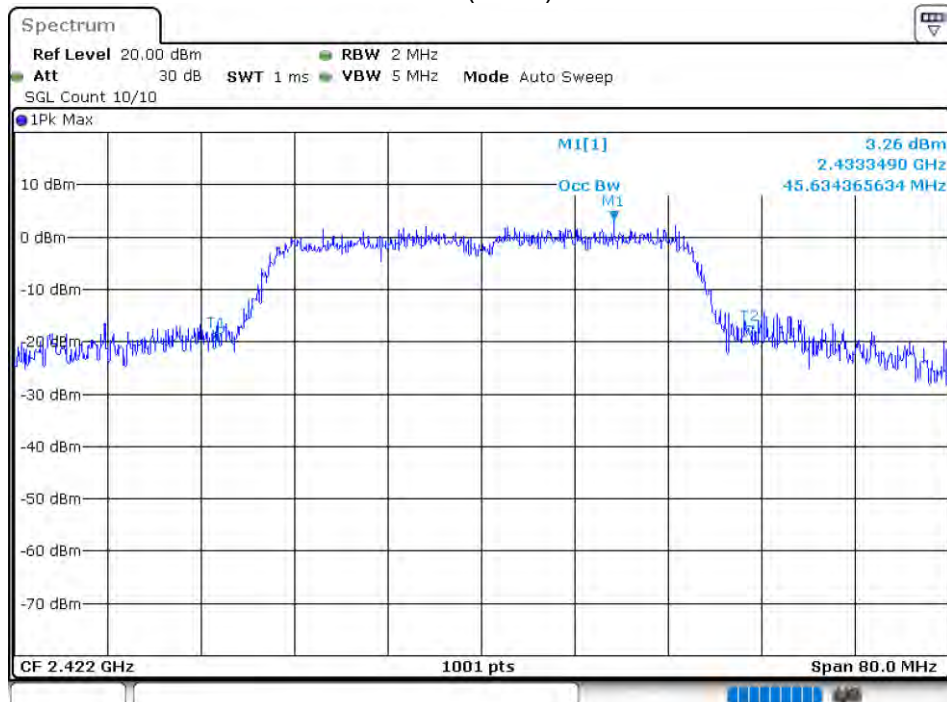


-6 dB BW NVNT 802.11n(HT40) 2422MHz Ant 2

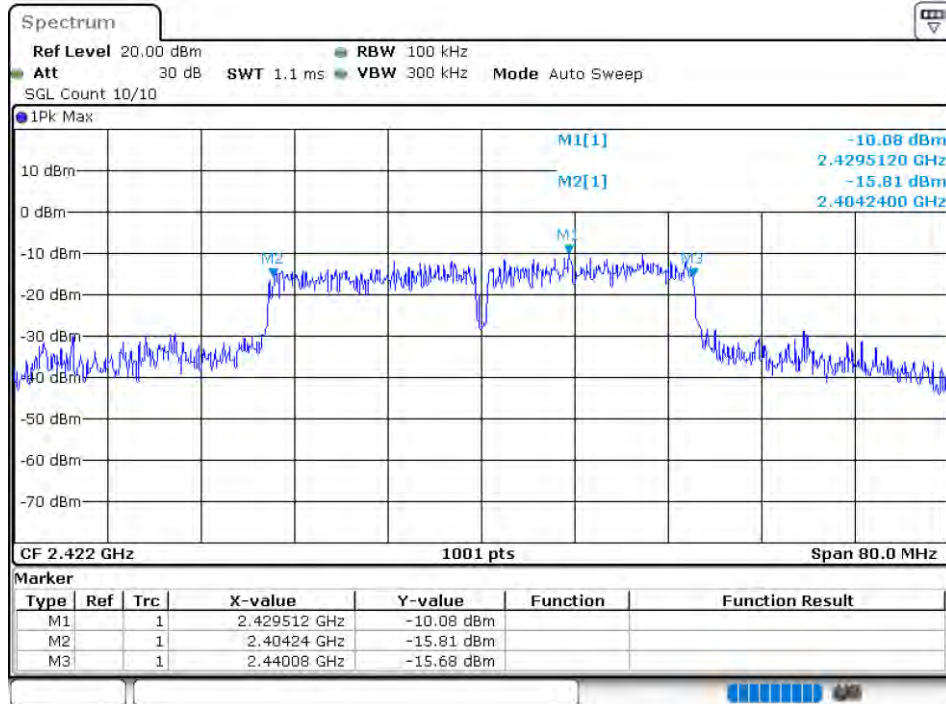


OBW NVNT 802.11n(HT40) 2437MHz Ant 2

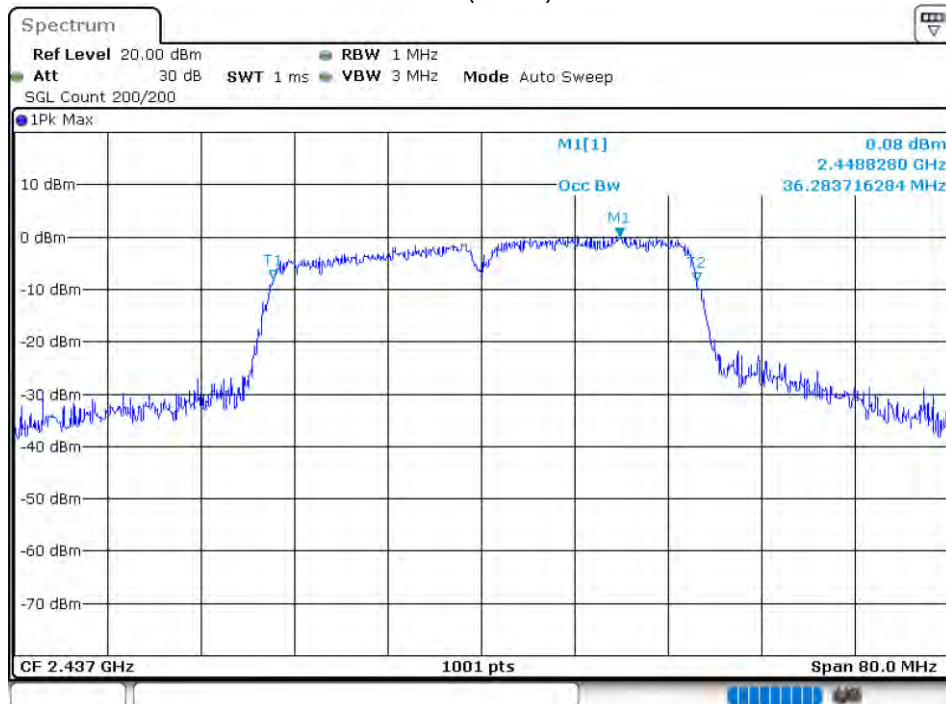


-6 dB BW NVNT 802.11n(HT40) 2437MHz Ant 2

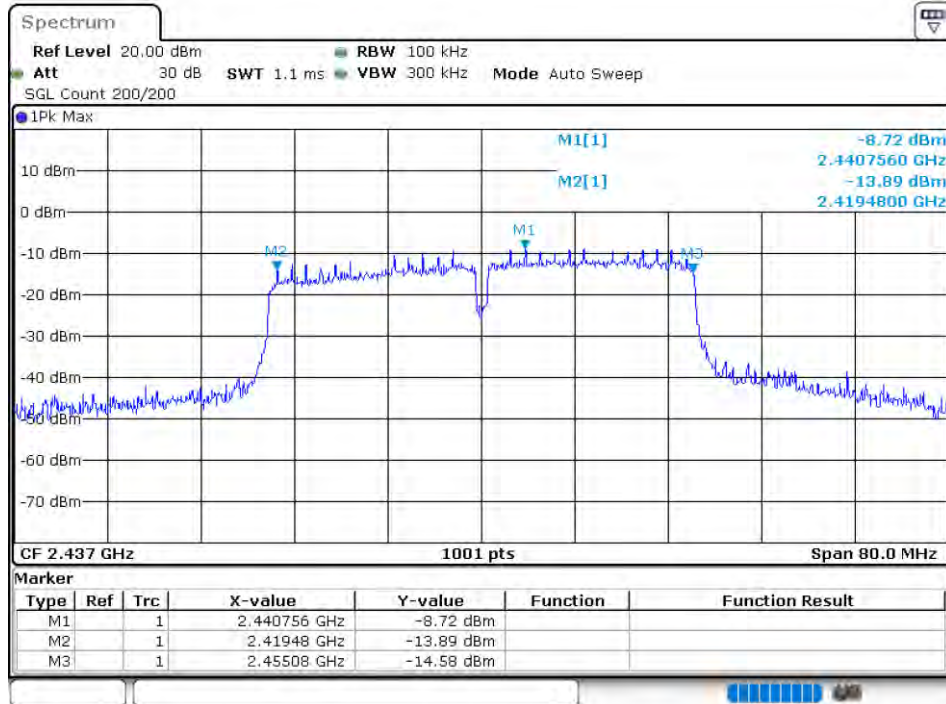

OBW NVNT 802.11n(HT40) 2452MHz Ant 2

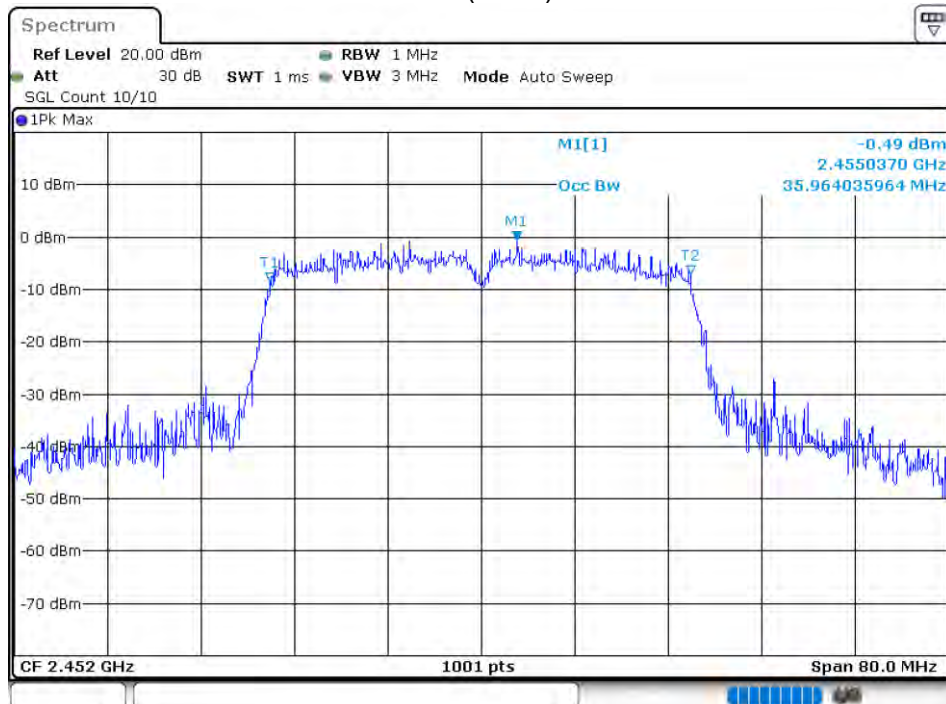


-6 dB BW NVNT 802.11n(HT40) 2452MHz Ant 2

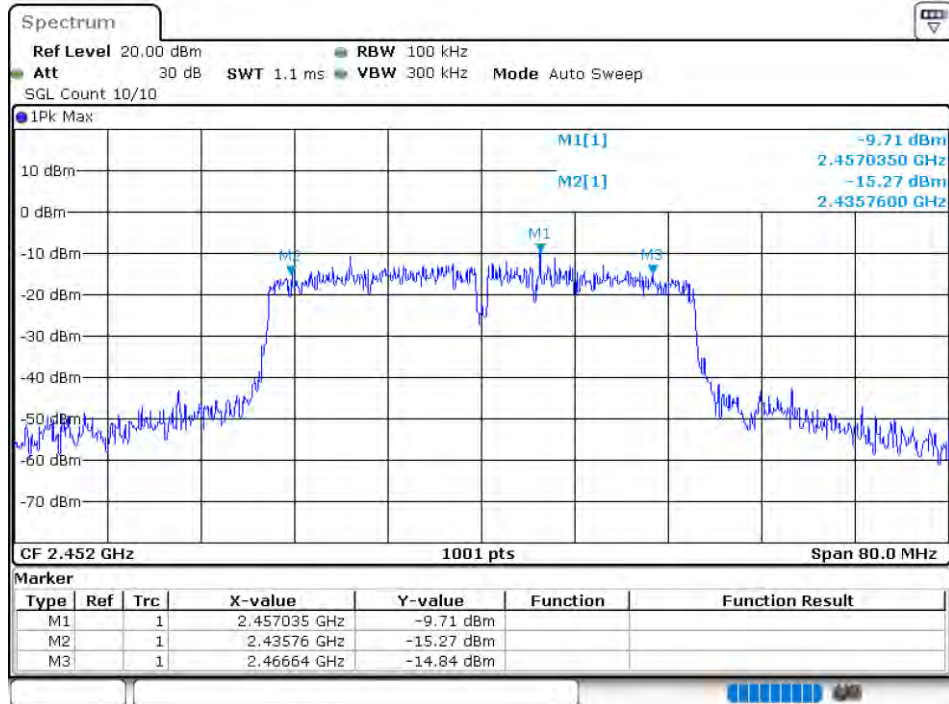


8.1.4 MAXIMUM POWER SPECTRAL DENSITY LEVEL

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	802.11b	2412	Ant 1	-5.177	8	Pass
NVNT	802.11b	2437	Ant 1	-7.343	8	Pass
NVNT	802.11b	2462	Ant 1	-7.619	8	Pass
NVNT	802.11b	2412	Ant 2	-6.499	8	Pass
NVNT	802.11b	2437	Ant 2	-5.973	8	Pass
NVNT	802.11b	2462	Ant 2	-6.494	8	Pass
NVNT	802.11g	2412	Ant 1	-10.089	8	Pass
NVNT	802.11g	2437	Ant 1	-11.417	8	Pass
NVNT	802.11g	2462	Ant 1	-11.346	8	Pass
NVNT	802.11g	2412	Ant 2	-9.841	8	Pass
NVNT	802.11g	2437	Ant 2	-9.654	8	Pass
NVNT	802.11g	2462	Ant 2	-9.48	8	Pass
NVNT	802.11n(HT20)	2412	Ant 1	-10.495	8	Pass
NVNT	802.11n(HT20)	2437	Ant 1	-11.966	8	Pass
NVNT	802.11n(HT20)	2462	Ant 1	-11.919	8	Pass
NVNT	802.11n(HT20)	2412	Ant 2	-10.63	8	Pass
NVNT	802.11n(HT20)	2437	Ant 2	-9.916	8	Pass
NVNT	802.11n(HT20)	2462	Ant 2	-10.348	8	Pass
NVNT	802.11n(HT40)	2422	Ant 1	-14.809	8	Pass
NVNT	802.11n(HT40)	2437	Ant 1	-14.634	8	Pass
NVNT	802.11n(HT40)	2452	Ant 1	-14.66	8	Pass
NVNT	802.11n(HT40)	2422	Ant 2	-14.667	8	Pass
NVNT	802.11n(HT40)	2437	Ant 2	-14.433	8	Pass
NVNT	802.11n(HT40)	2452	Ant 2	-13.861	8	Pass


PSD NVNT 802.11b 2412MHz Ant 1

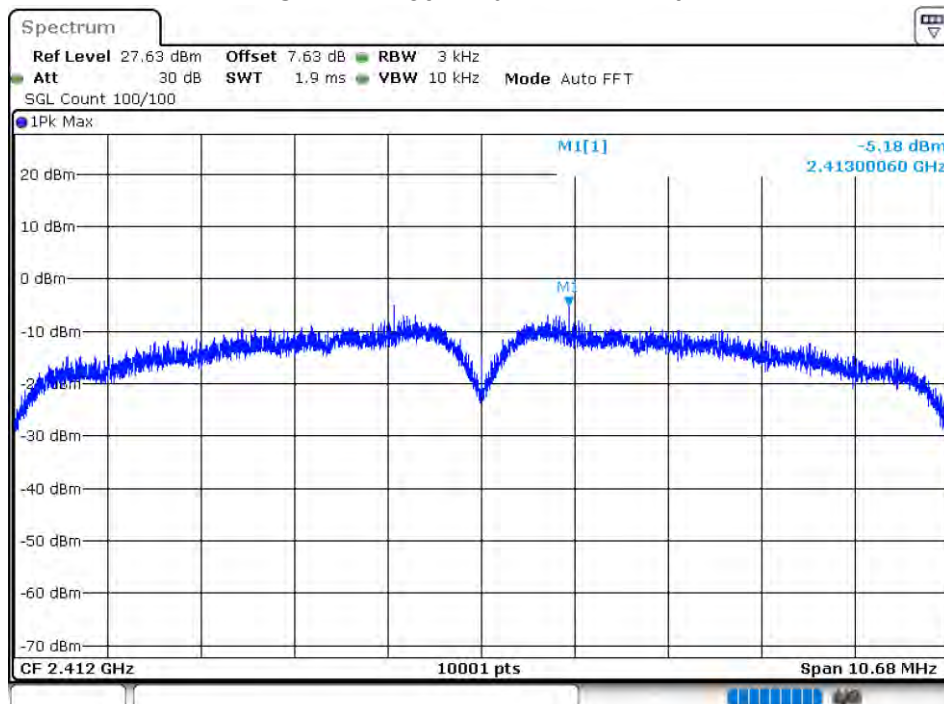


PSD NVNT 802.11b 2437MHz Ant 1

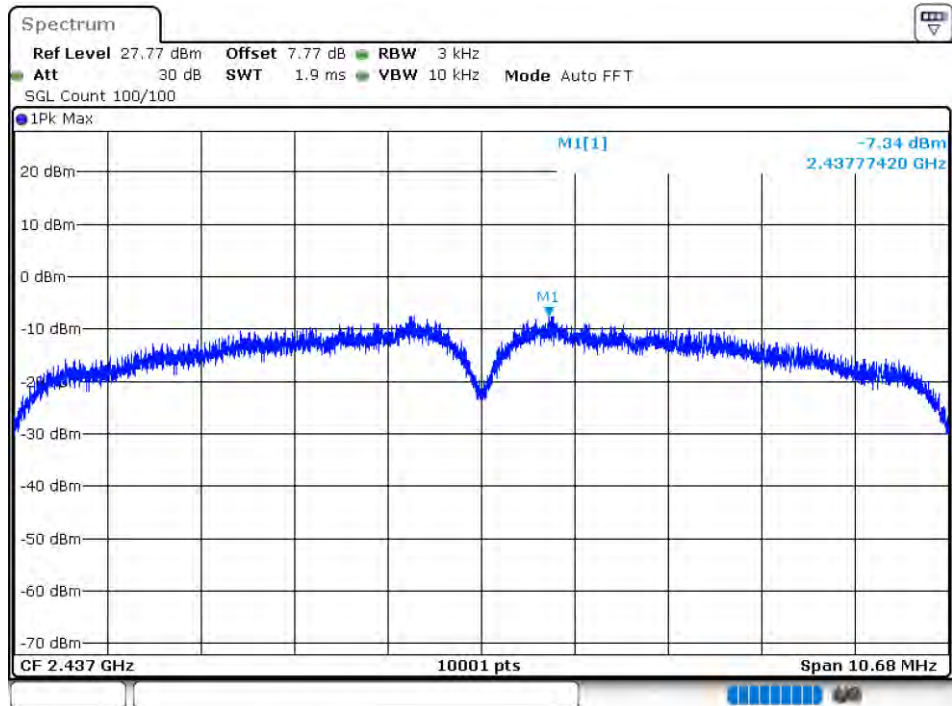


PSD NVNT 802.11b 2462MHz Ant 1

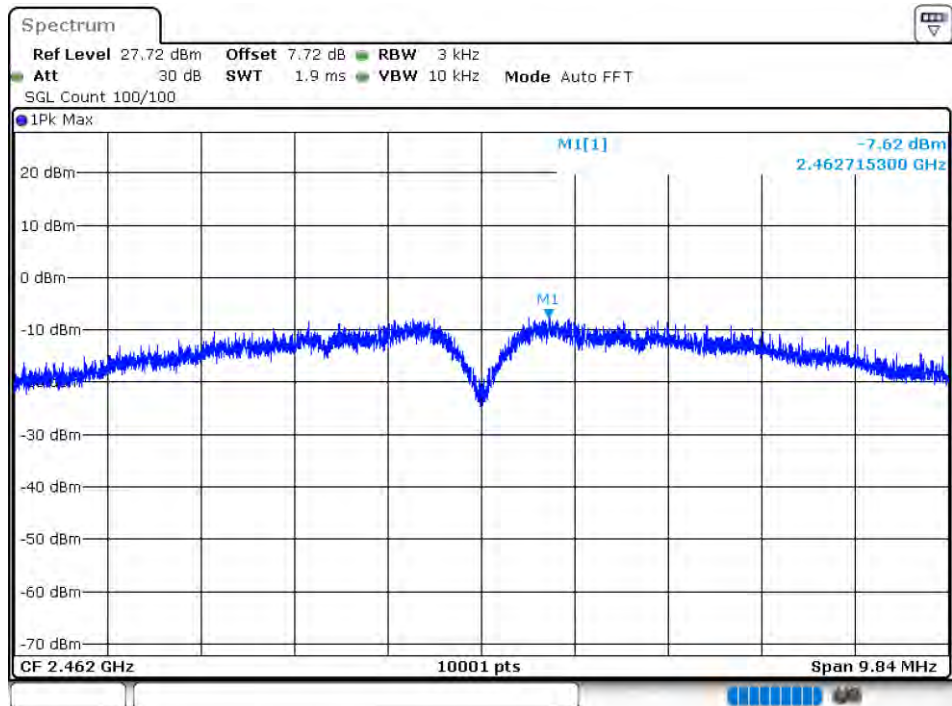


PSD NVNT 802.11b 2412MHz Ant 2

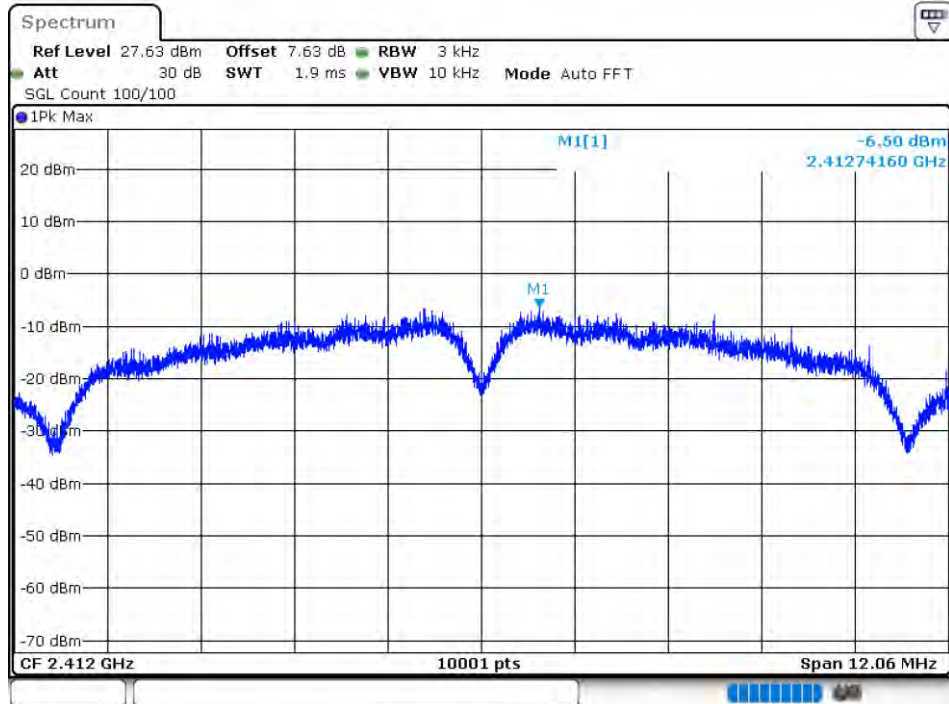


PSD NVNT 802.11b 2437MHz Ant 2

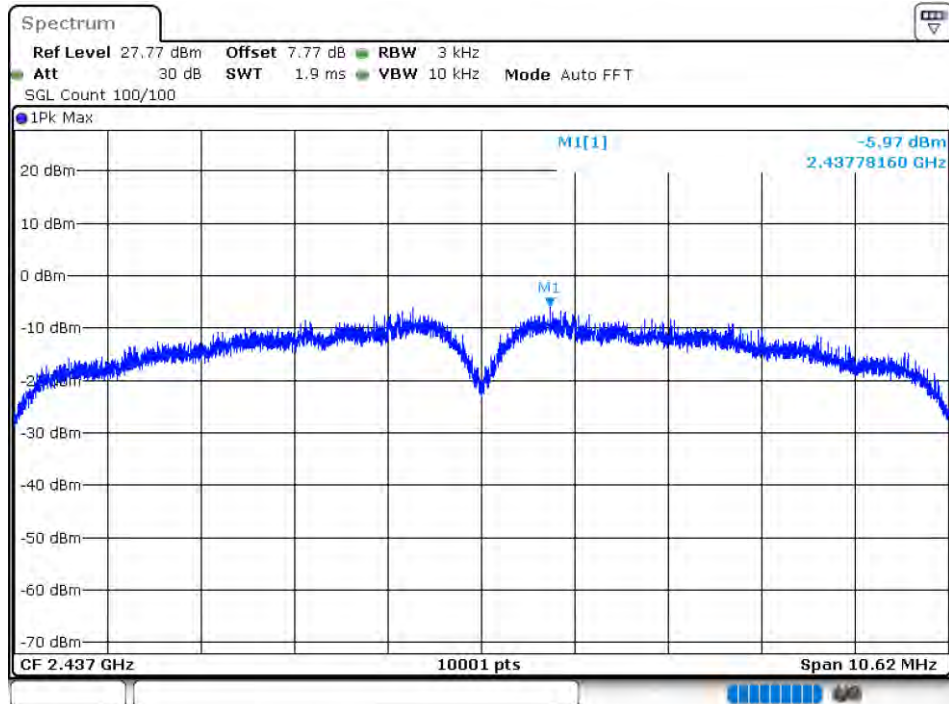


PSD NVNT 802.11b 2462MHz Ant 2

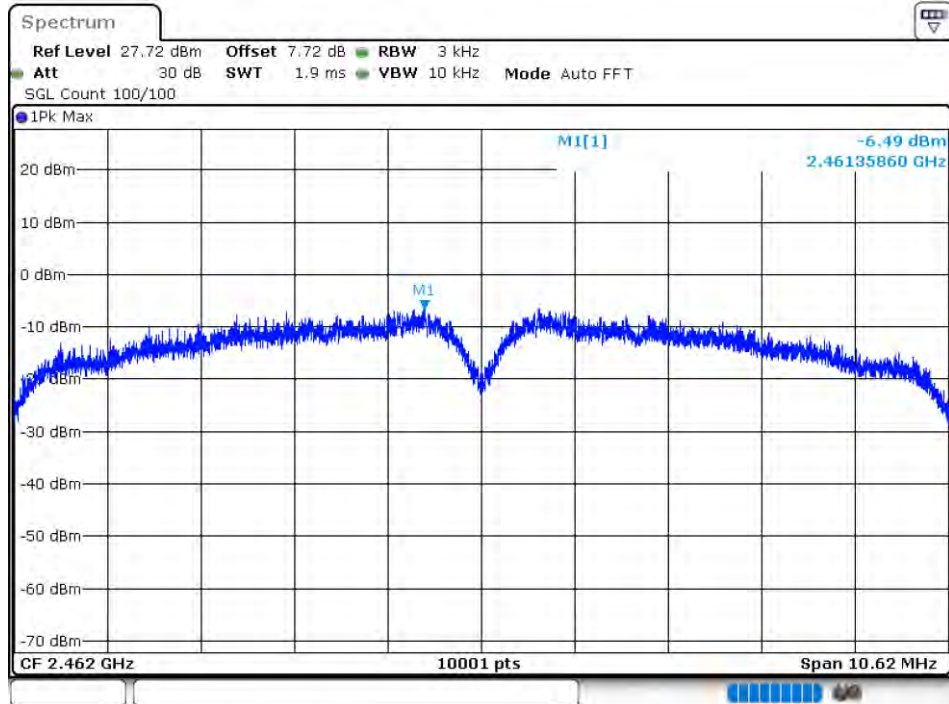


PSD NVNT 802.11g 2412MHz Ant 1

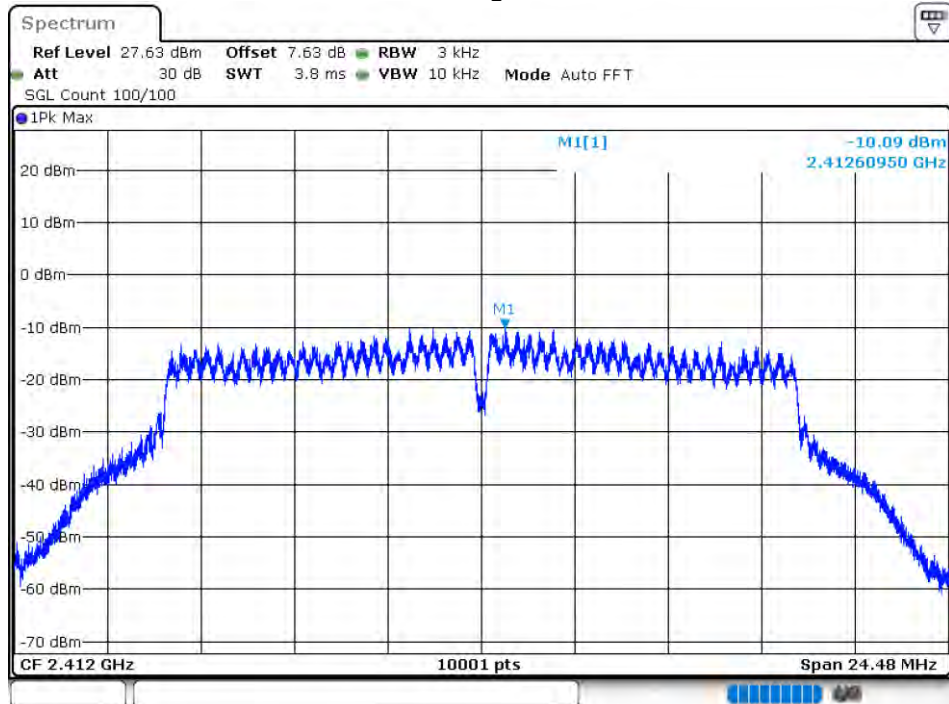


PSD NVNT 802.11g 2437MHz Ant 1

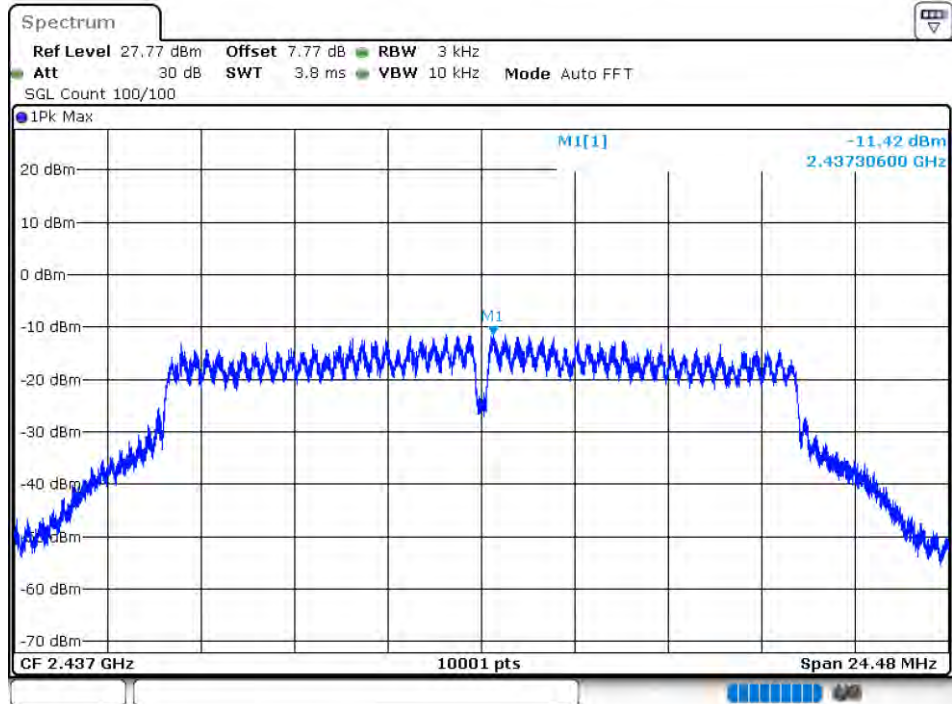


PSD NVNT 802.11g 2462MHz Ant 1

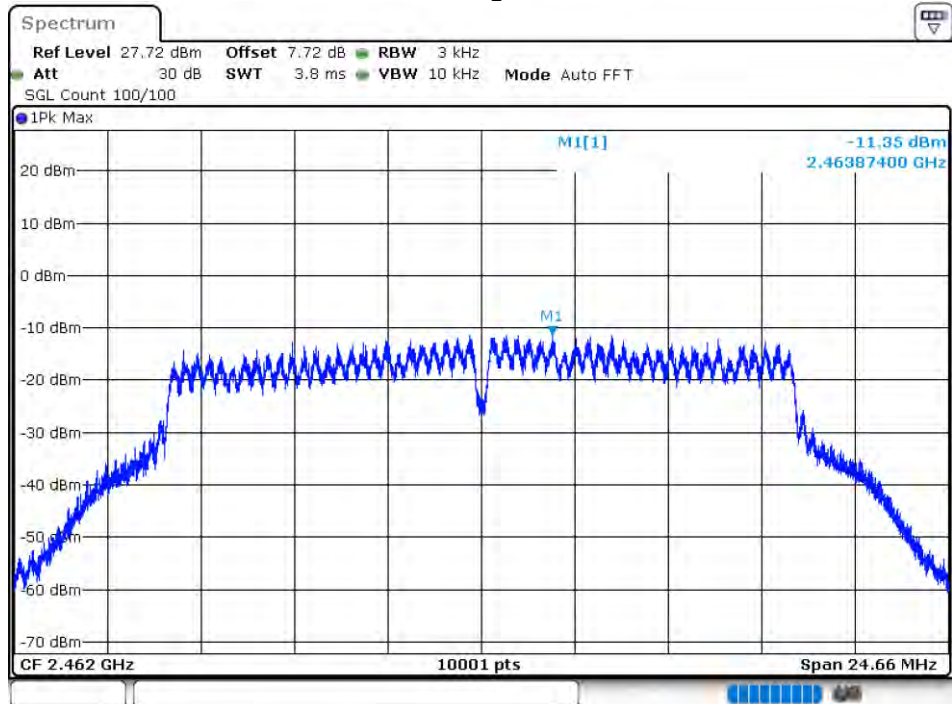


PSD NVNT 802.11g 2412MHz Ant 2

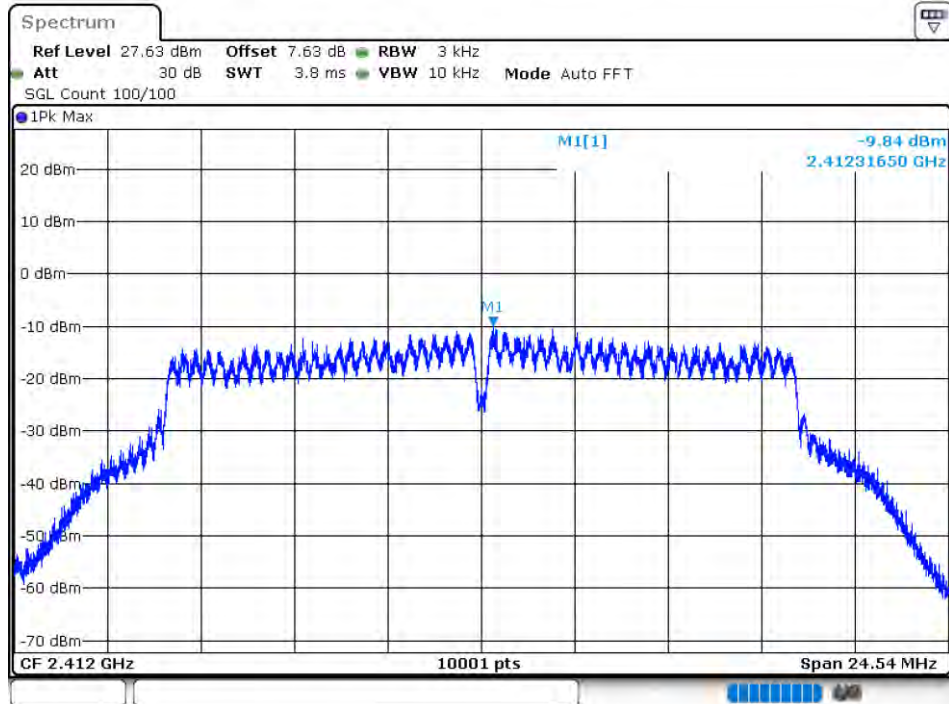


PSD NVNT 802.11g 2437MHz Ant 2

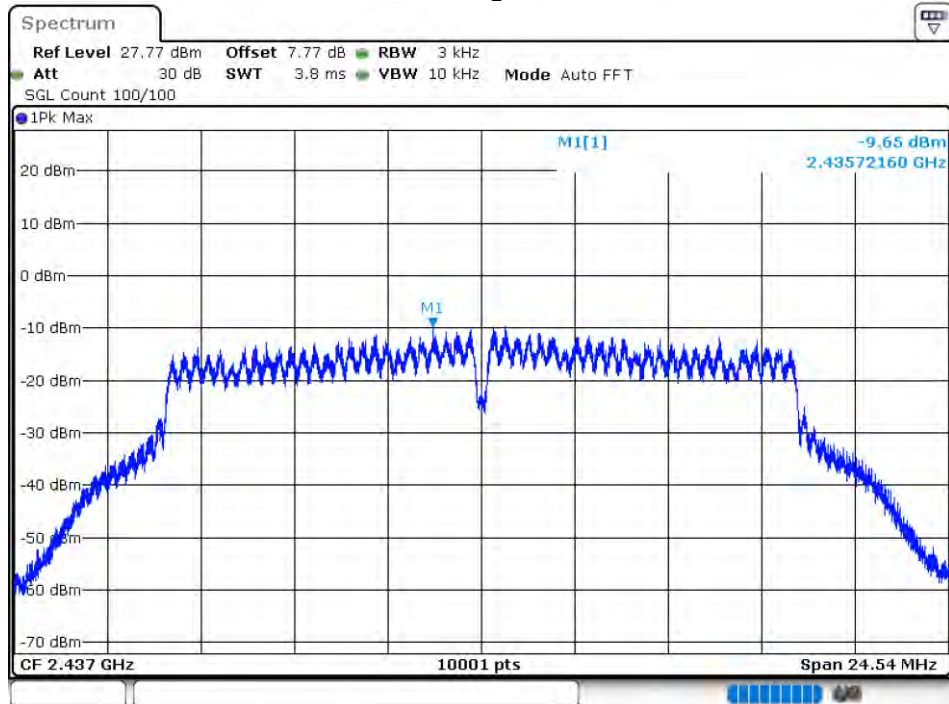


PSD NVNT 802.11g 2462MHz Ant 2

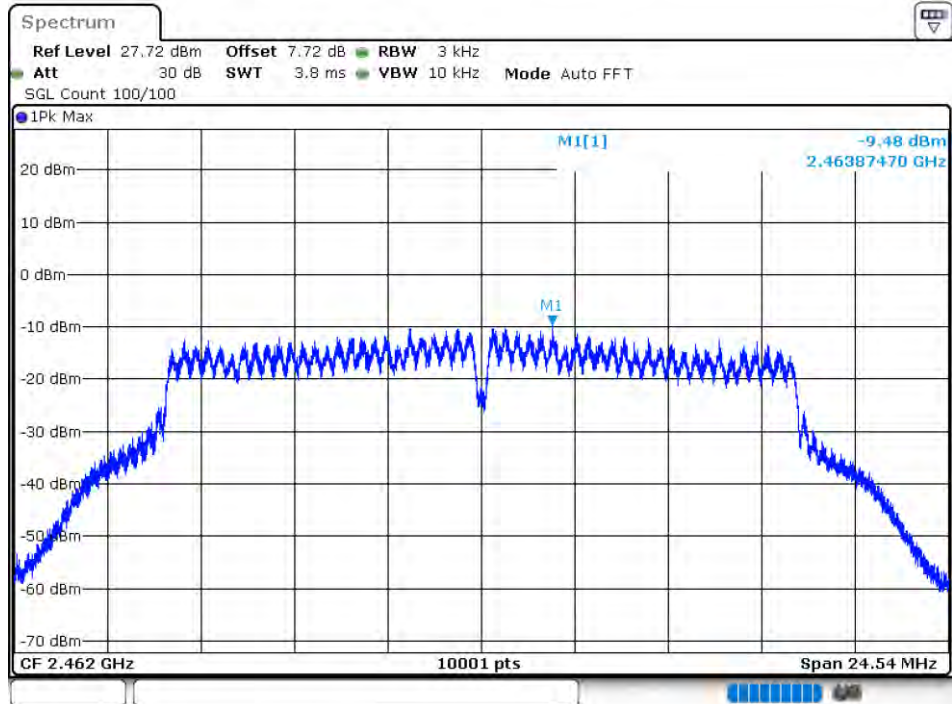


PSD NVNT 802.11n(HT20) 2412MHz Ant 1

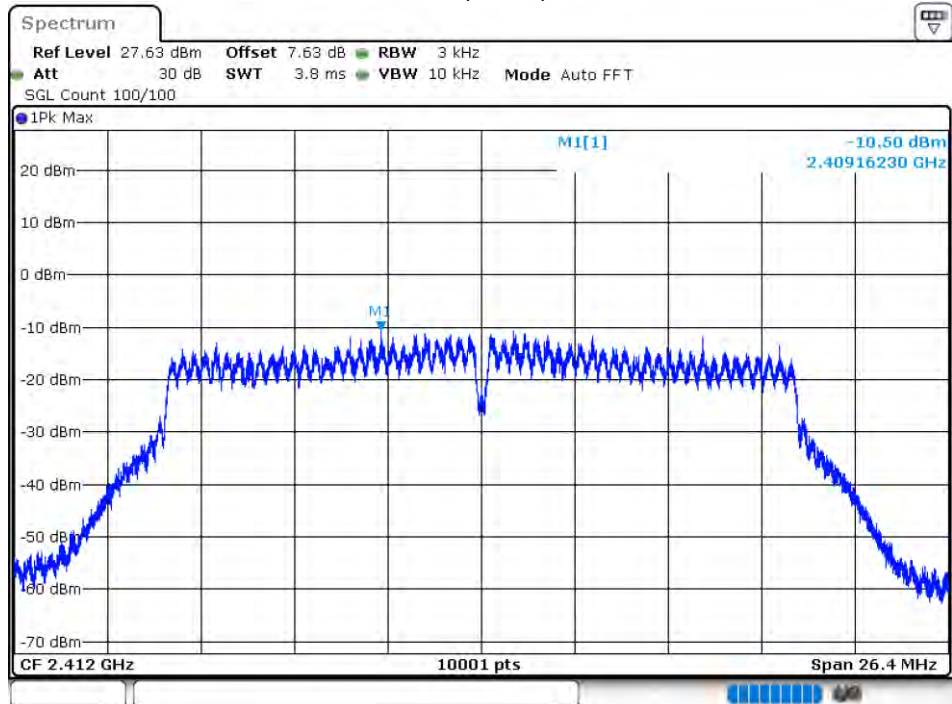


PSD NVNT 802.11n(HT20) 2437MHz Ant 1

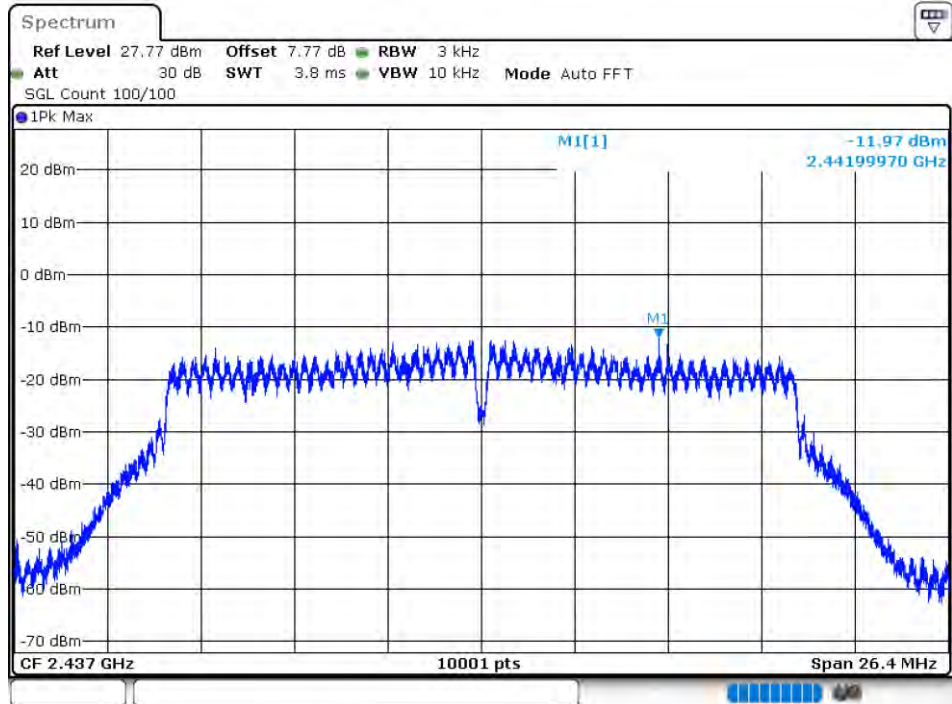


PSD NVNT 802.11n(HT20) 2462MHz Ant 1

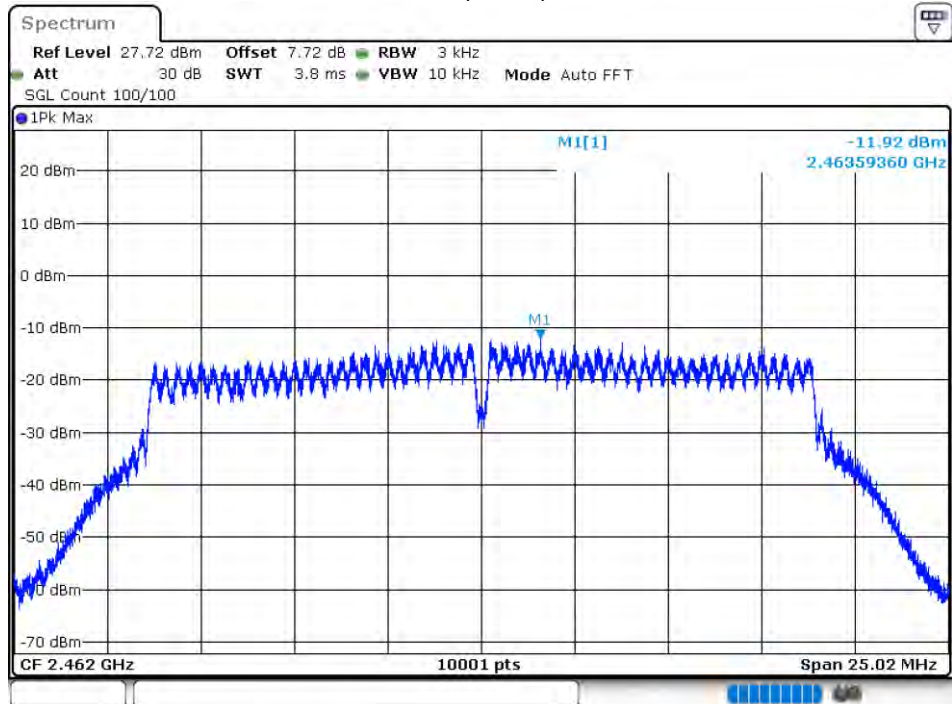


PSD NVNT 802.11n(HT20) 2412MHz Ant 2

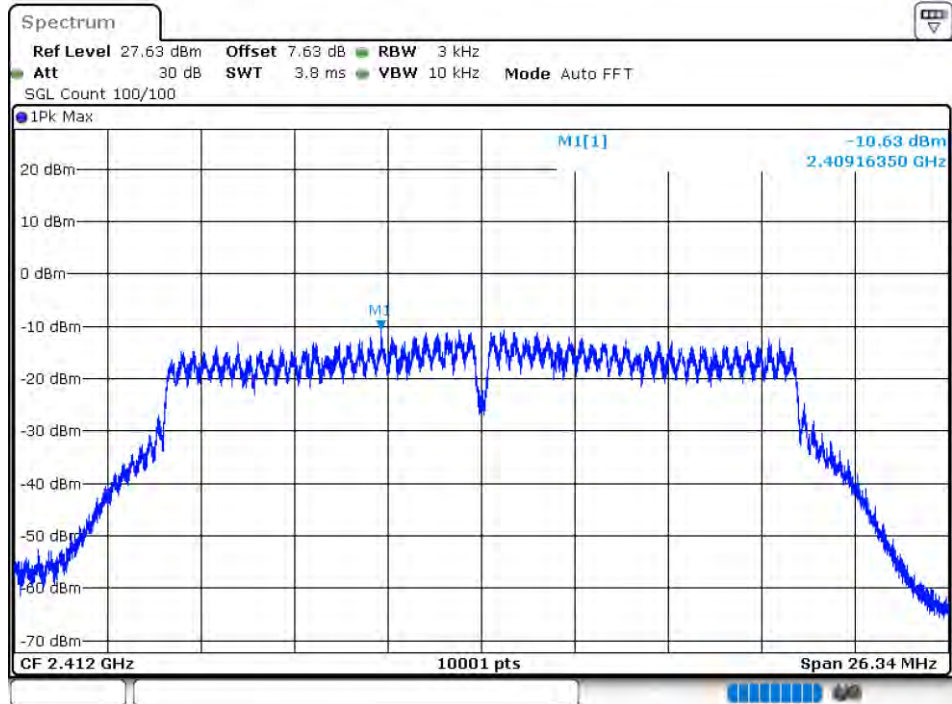


PSD NVNT 802.11n(HT20) 2437MHz Ant 2

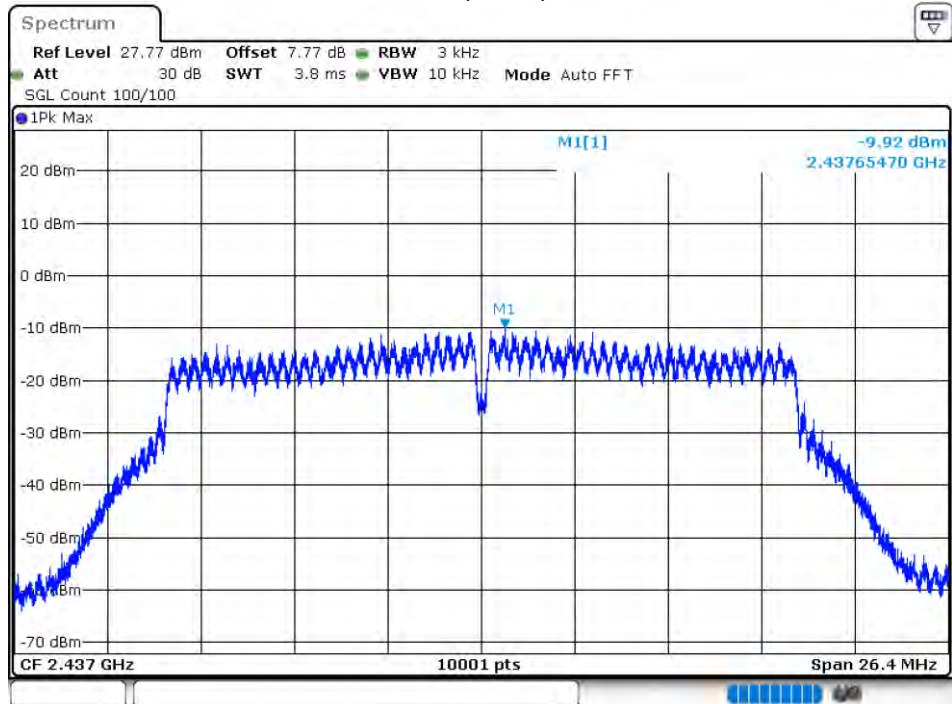


PSD NVNT 802.11n(HT20) 2462MHz Ant 2

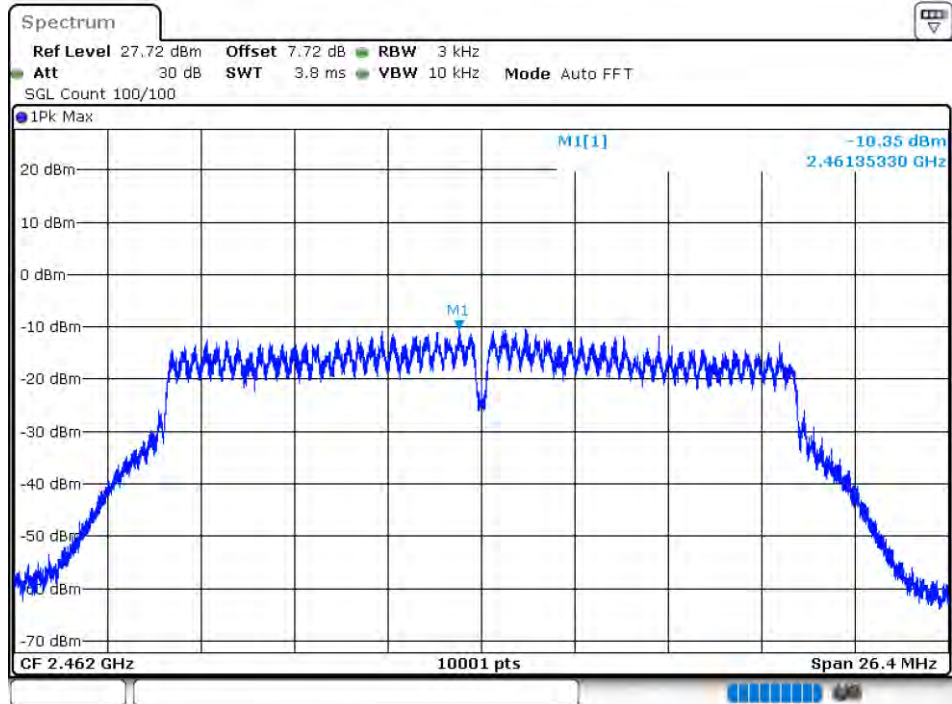


PSD NVNT 802.11n(HT40) 2422MHz Ant 1

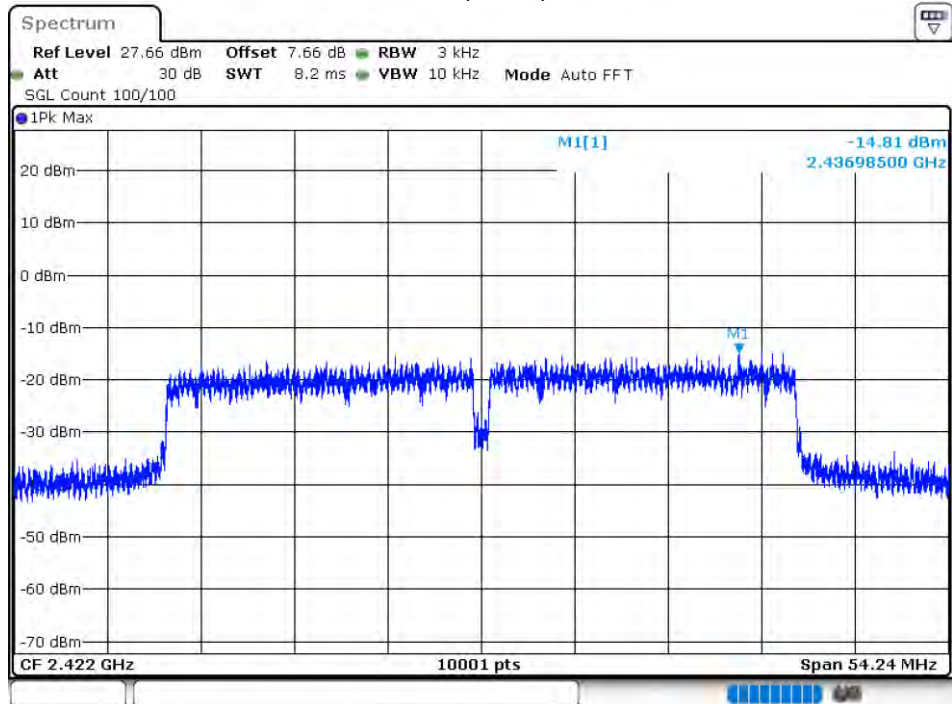


PSD NVNT 802.11n(HT40) 2437MHz Ant 1

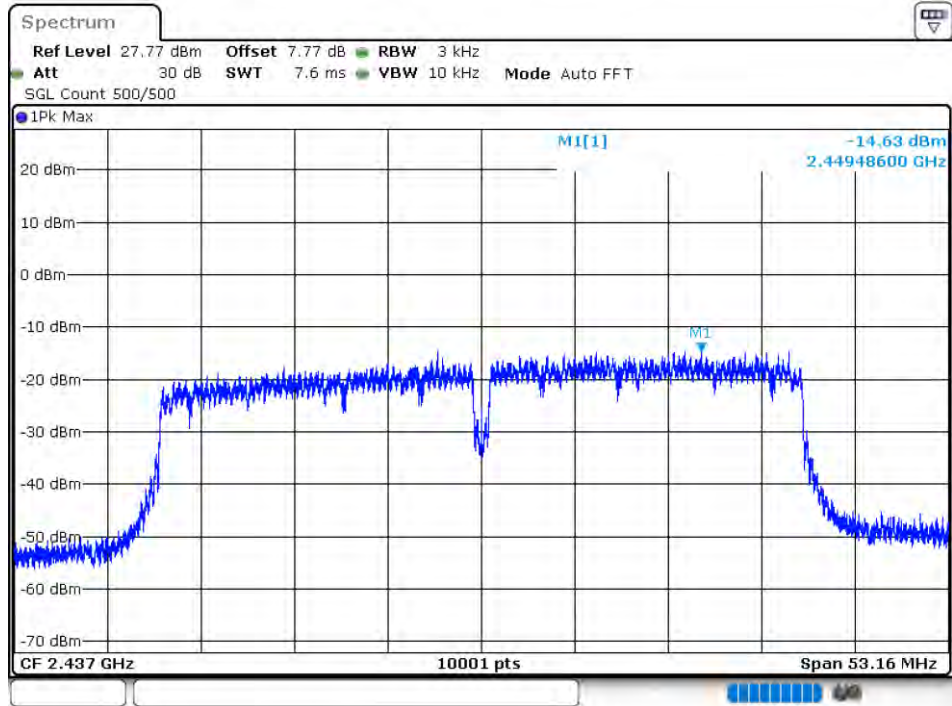


PSD NVNT 802.11n(HT40) 2452MHz Ant 1

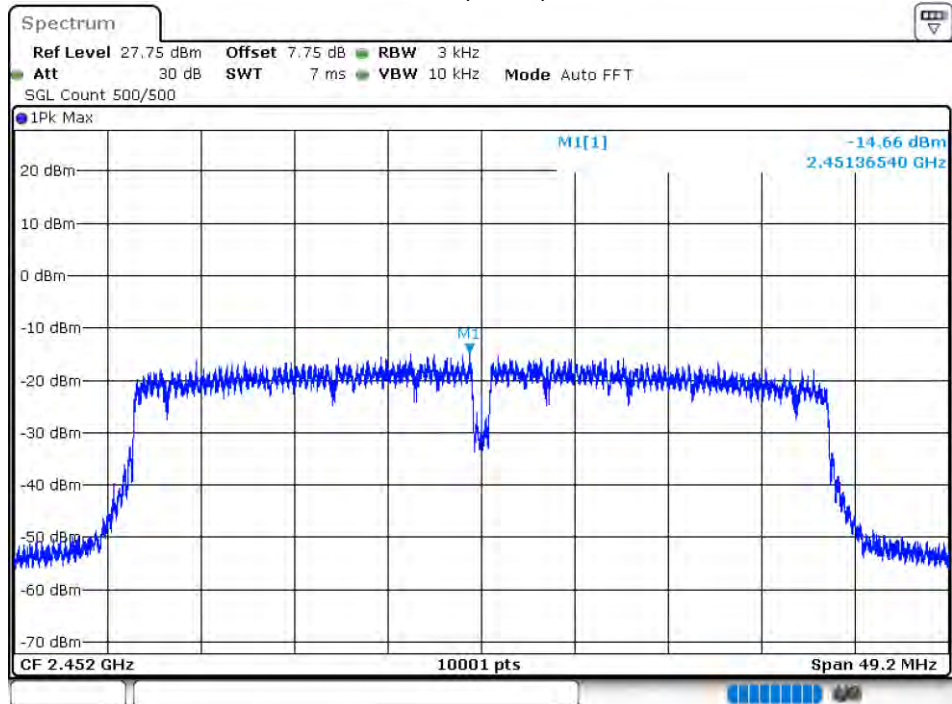


PSD NVNT 802.11n(HT40) 2422MHz Ant 2

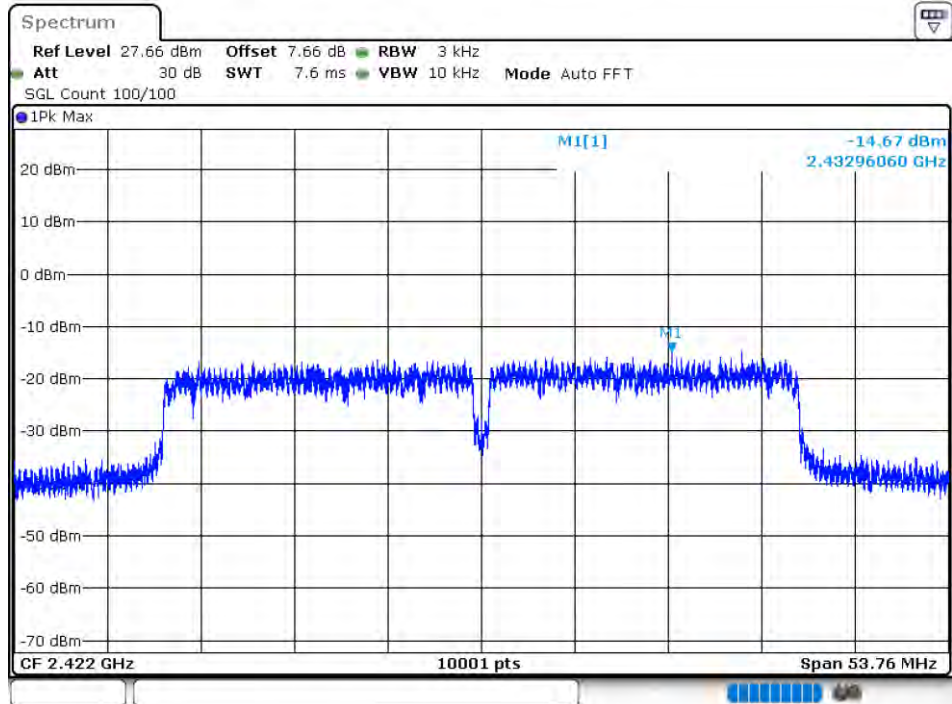

PSD NVNT 802.11n(HT40) 2437MHz Ant 2

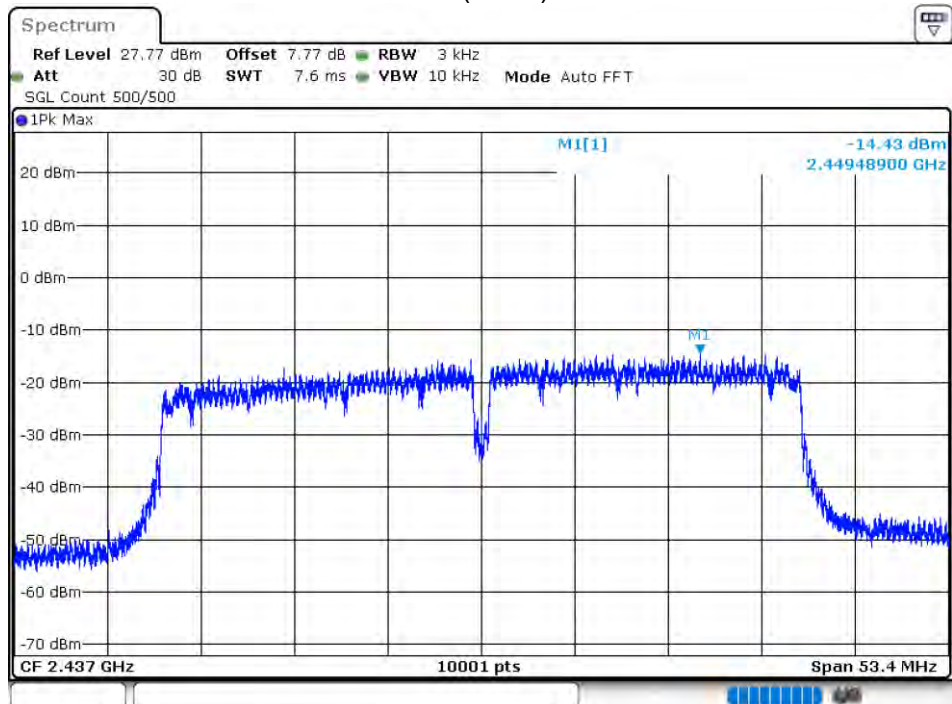


PSD NVNT 802.11n(HT40) 2452MHz Ant 2

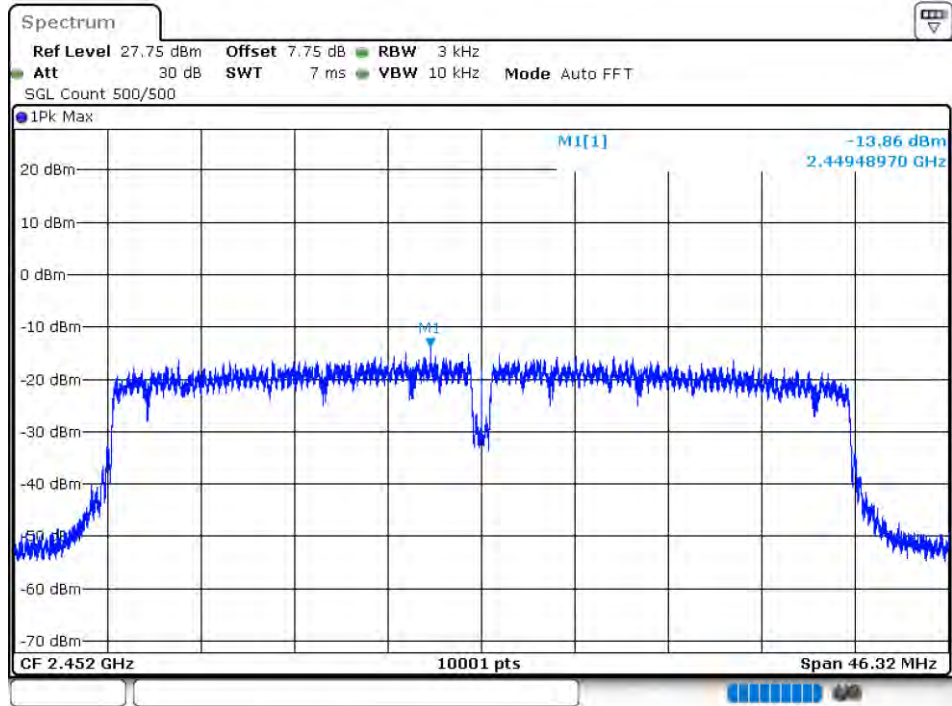


8.1.5 BAND EDGE

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	802.11b	2412	Ant 1	-56.7	-20	Pass
NVNT	802.11b	2462	Ant 1	-55.94	-20	Pass
NVNT	802.11b	2412	Ant 2	-57.3	-20	Pass
NVNT	802.11b	2462	Ant 2	-58.13	-20	Pass
NVNT	802.11g	2412	Ant 1	-46.6	-20	Pass
NVNT	802.11g	2462	Ant 1	-43.89	-20	Pass
NVNT	802.11g	2412	Ant 2	-49.27	-20	Pass
NVNT	802.11g	2462	Ant 2	-48.64	-20	Pass
NVNT	802.11n(HT20)	2412	Ant 1	-50.8	-20	Pass
NVNT	802.11n(HT20)	2462	Ant 1	-38.11	-20	Pass
NVNT	802.11n(HT20)	2412	Ant 2	-48.9	-20	Pass
NVNT	802.11n(HT20)	2462	Ant 2	-49.91	-20	Pass
NVNT	802.11n(HT40)	2422	Ant 1	-20.23	-20	Pass
NVNT	802.11n(HT40)	2452	Ant 1	-39.42	-20	Pass
NVNT	802.11n(HT40)	2422	Ant 2	-21.19	-20	Pass
NVNT	802.11n(HT40)	2452	Ant 2	-38.24	-20	Pass

Band Edge NVNT 802.11b 2412MHz Ant 1 Ref

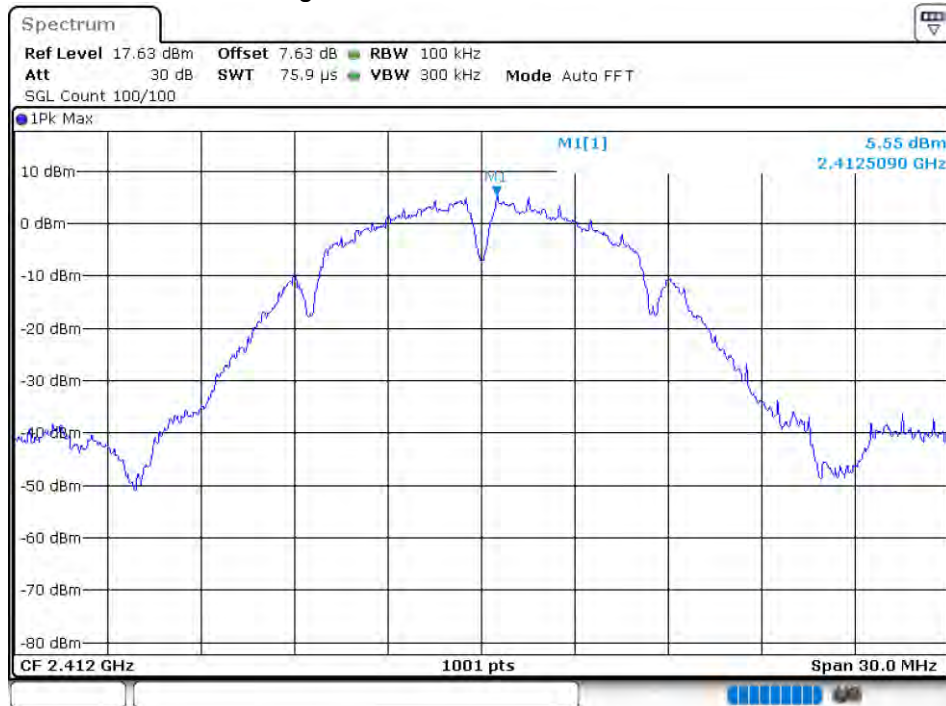


Band Edge NVNT 802.11b 2412MHz Ant 1 Emission

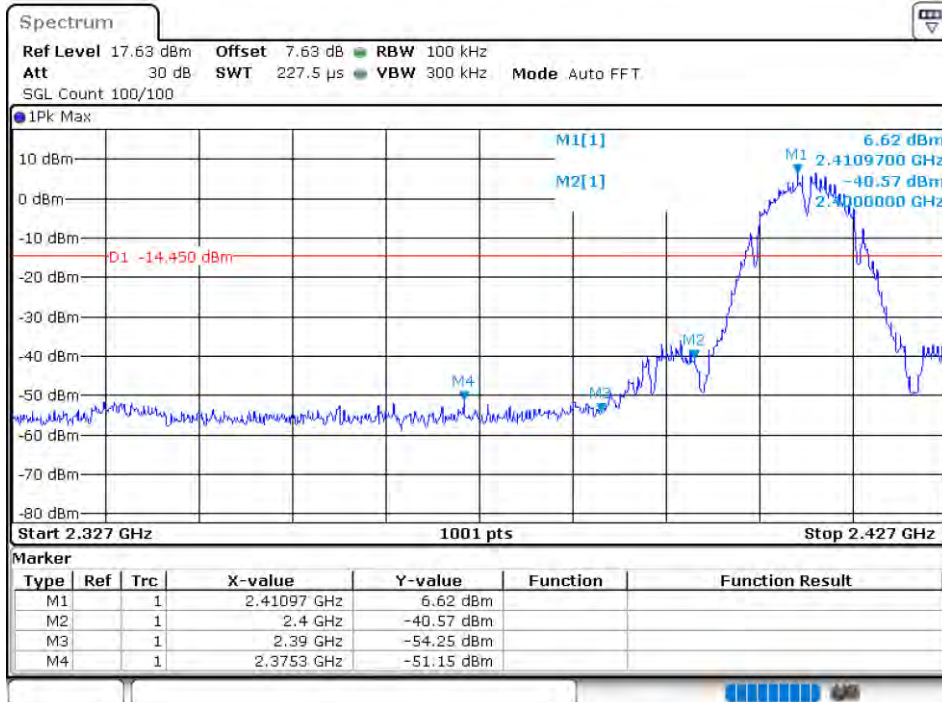

Band Edge NVNT 802.11b 2462MHz Ant 1 Ref




Band Edge NVNT 802.11b 2462MHz Ant 1 Emission

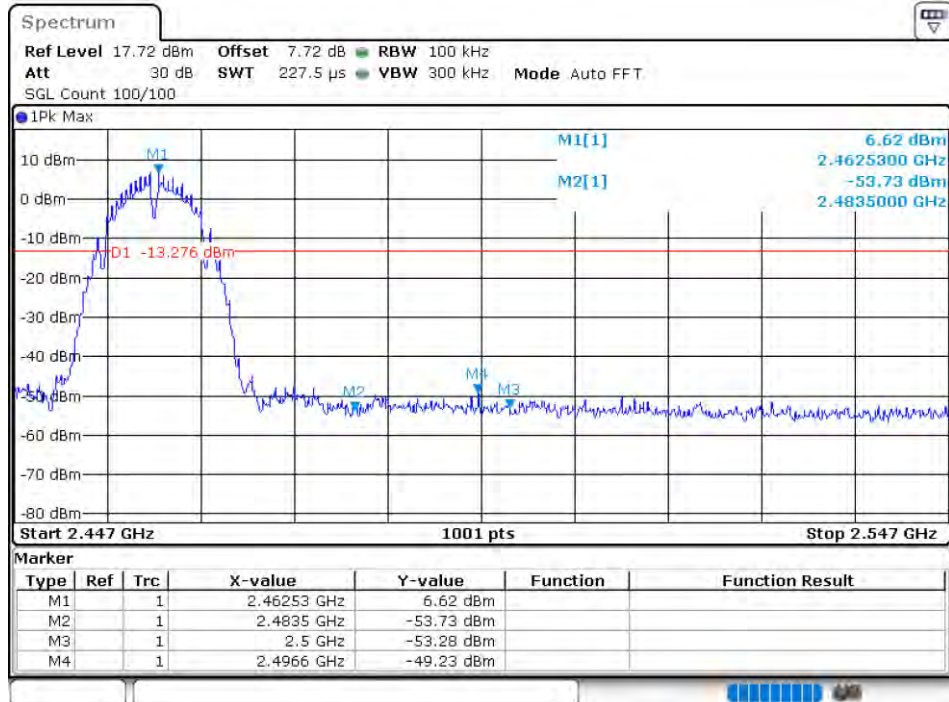

Band Edge NVNT 802.11b 2412MHz Ant 2 Ref




Band Edge NVNT 802.11b 2412MHz Ant 2 Emission

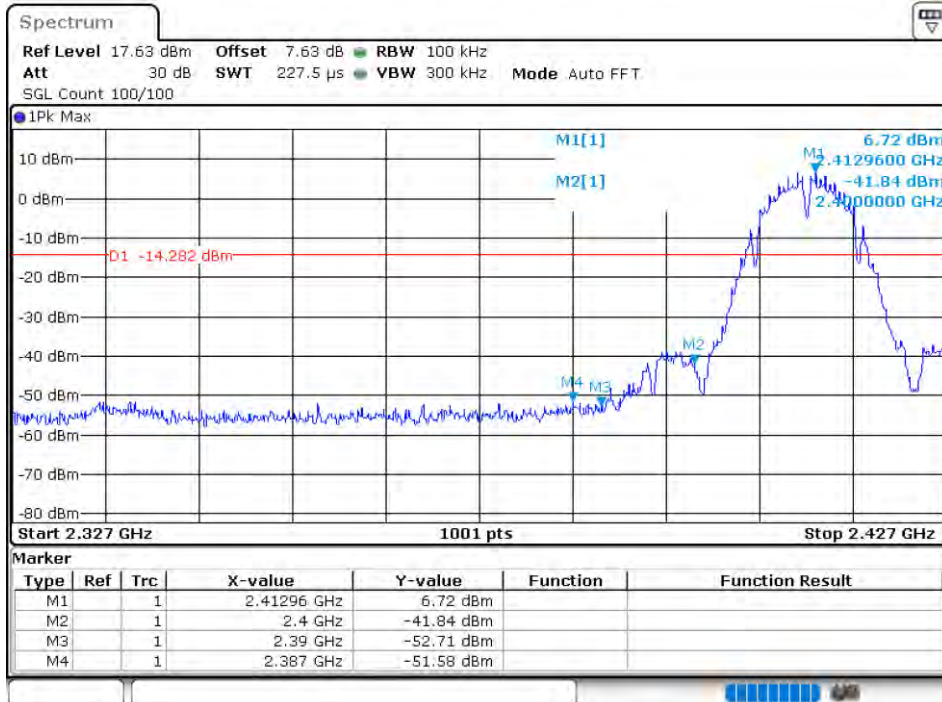


Band Edge NVNT 802.11b 2462MHz Ant 2 Ref




Band Edge NVNT 802.11b 2462MHz Ant 2 Emission

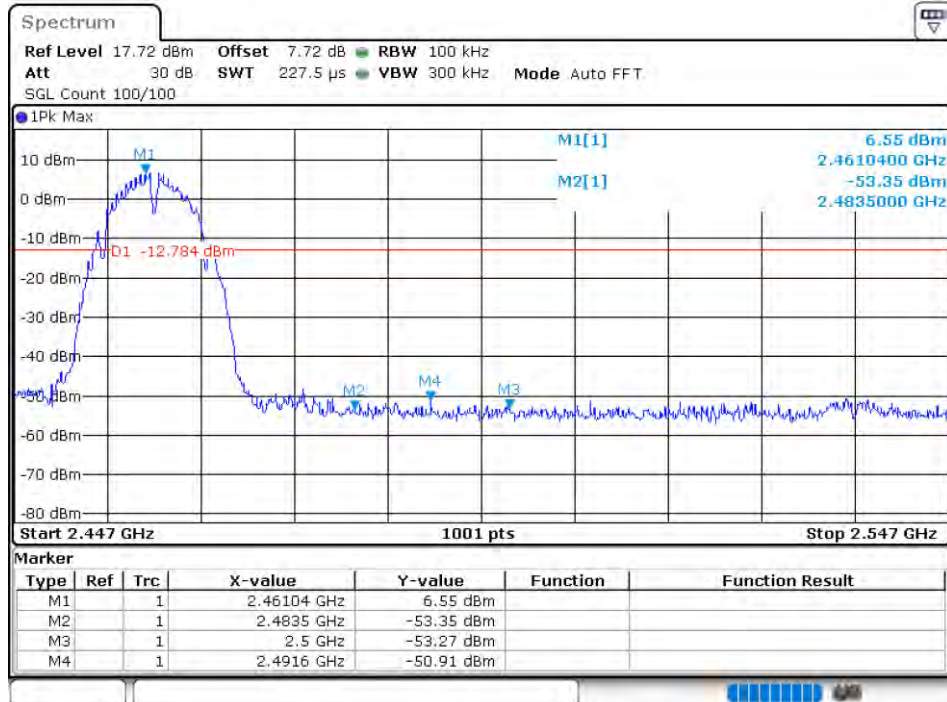


Band Edge NVNT 802.11g 2412MHz Ant 1 Ref

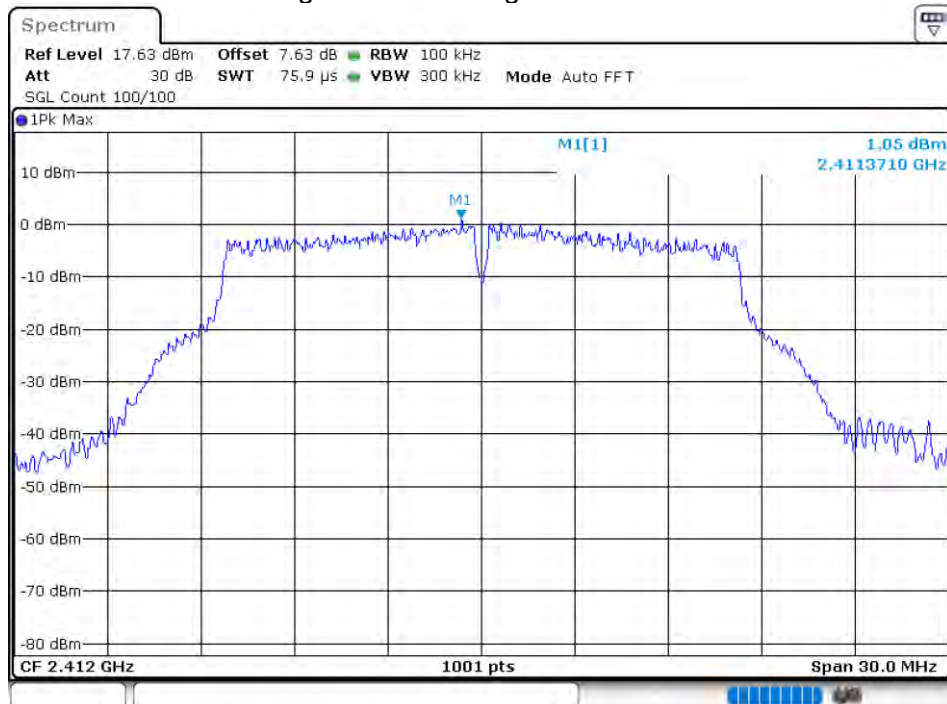


Band Edge NVNT 802.11g 2412MHz Ant 1 Emission

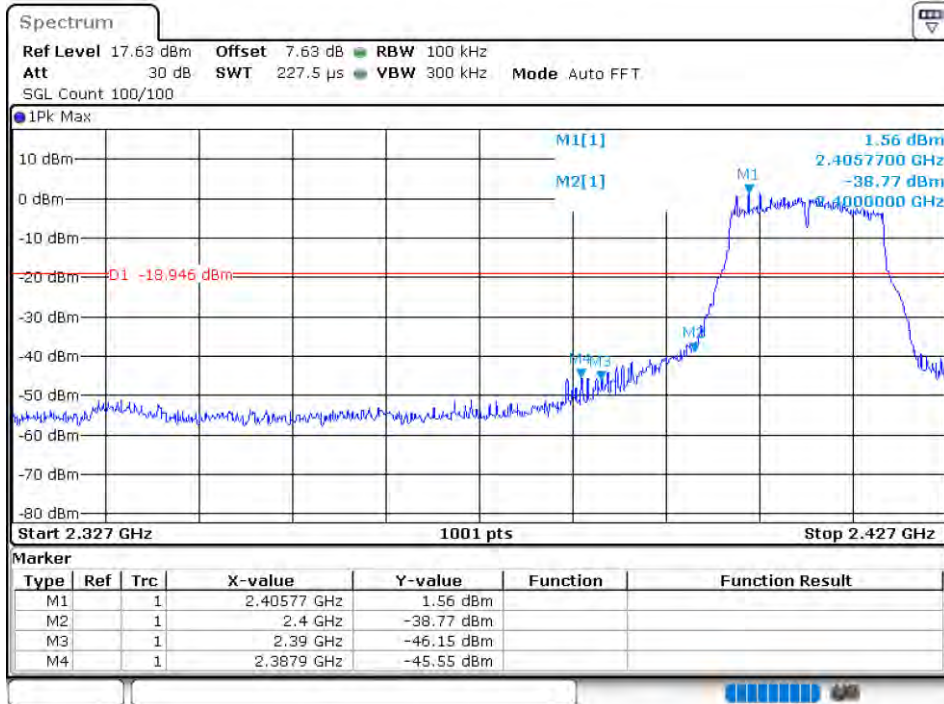


Band Edge NVNT 802.11g 2462MHz Ant 1 Ref

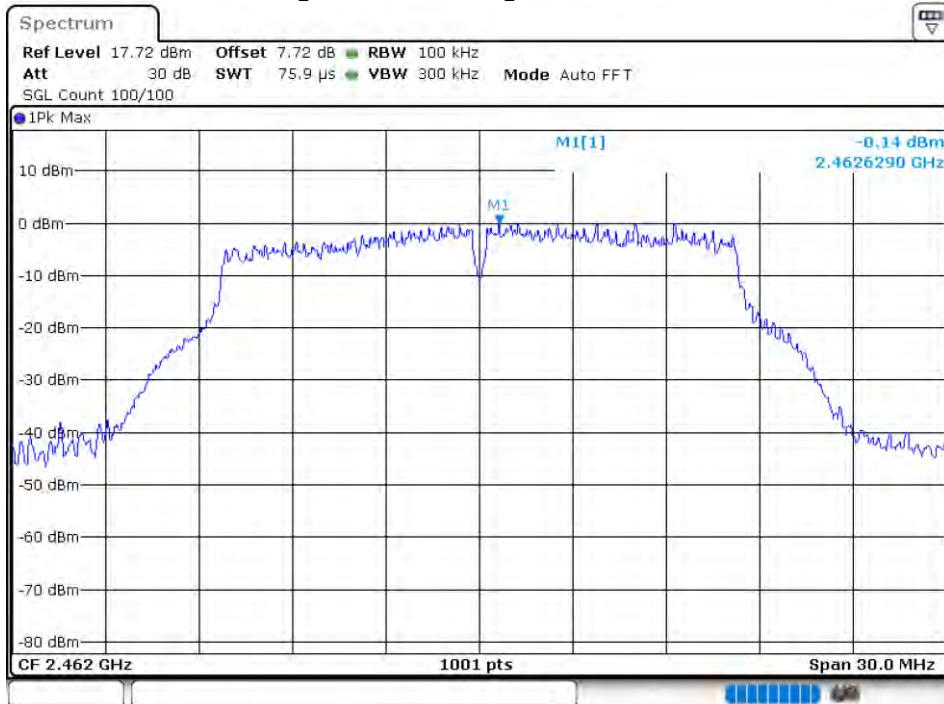


Band Edge NVNT 802.11g 2462MHz Ant 1 Emission

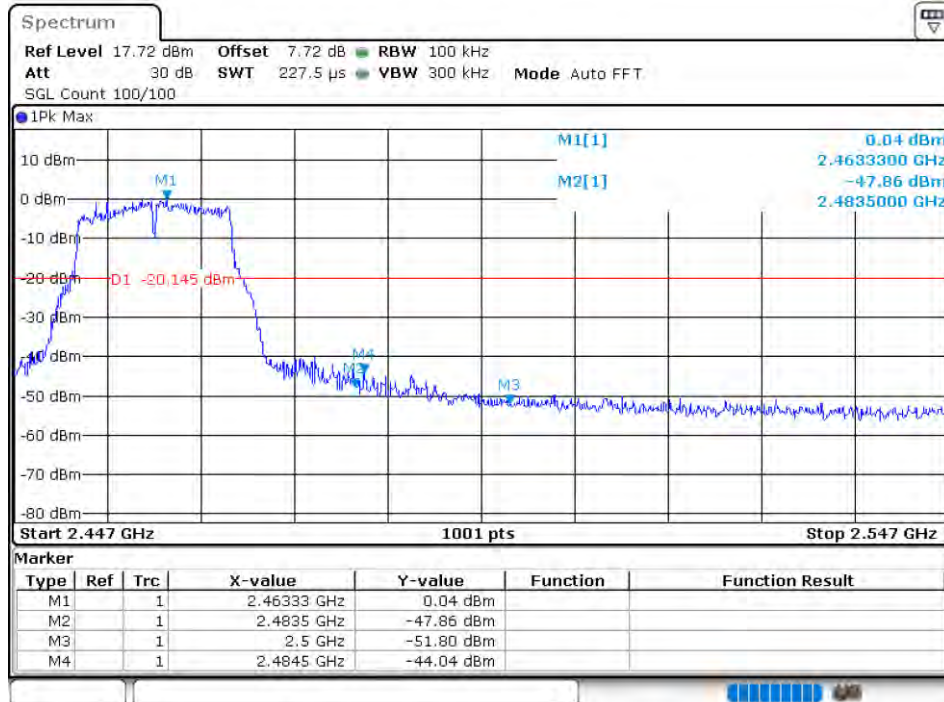


Band Edge NVNT 802.11g 2412MHz Ant 2 Ref

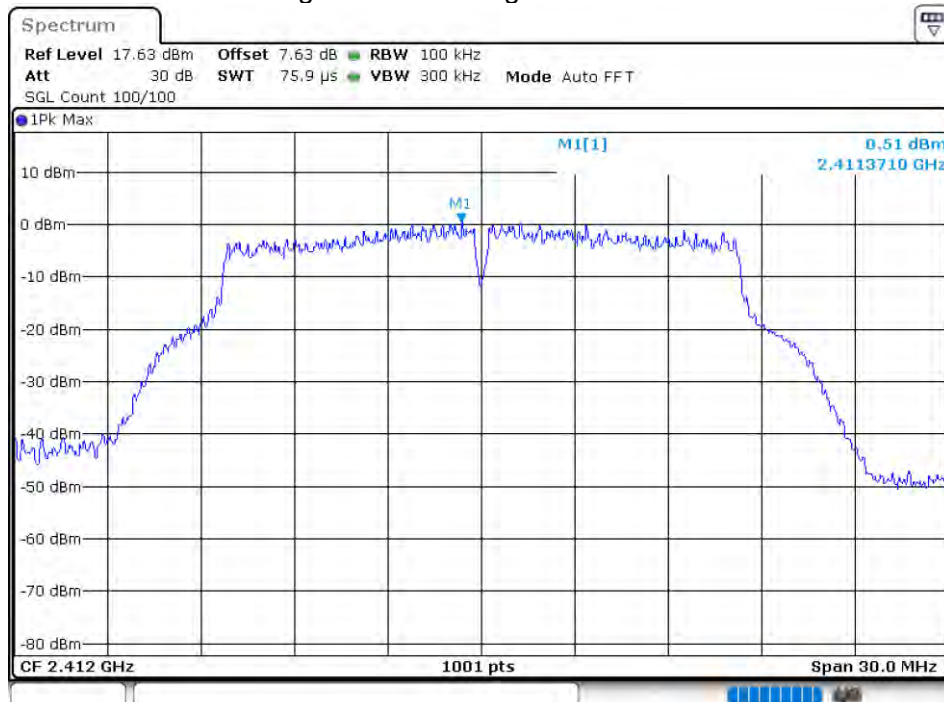


Band Edge NVNT 802.11g 2412MHz Ant 2 Emission

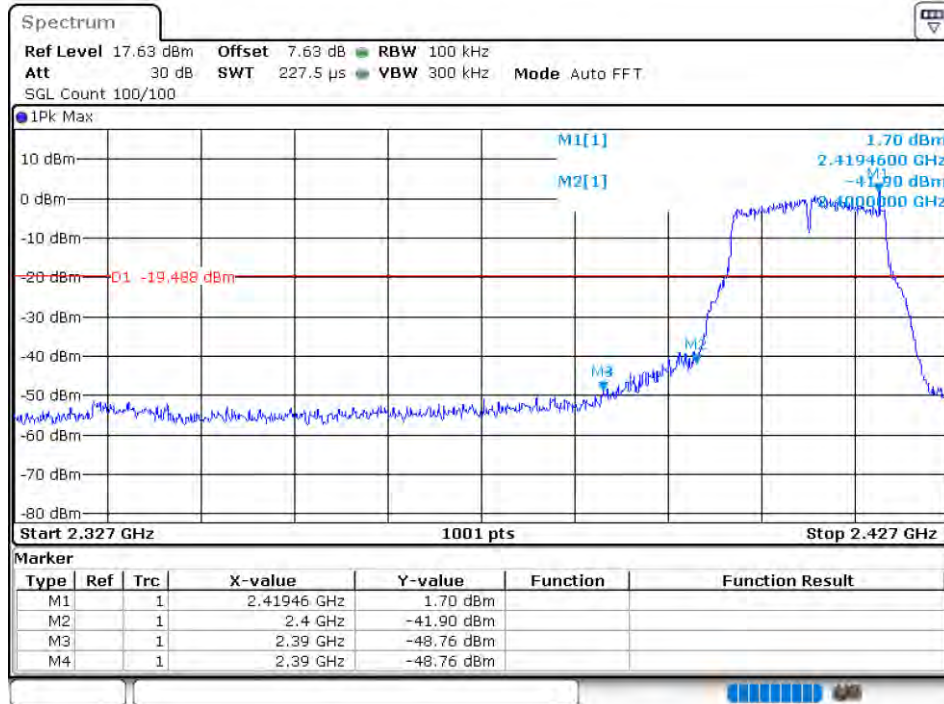


Band Edge NVNT 802.11g 2462MHz Ant 2 Ref

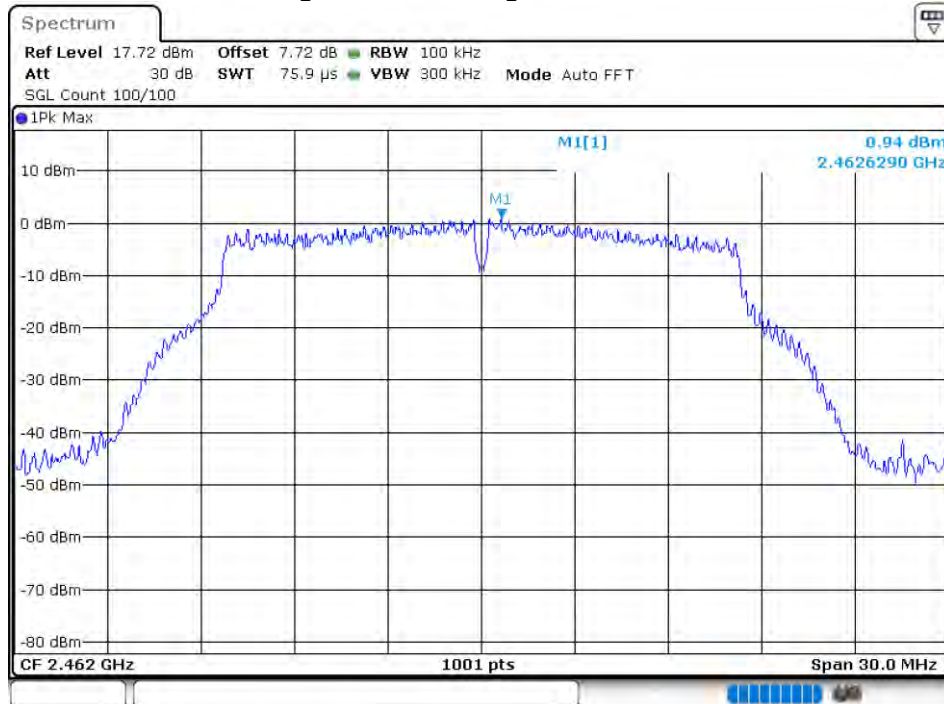


Band Edge NVNT 802.11g 2462MHz Ant 2 Emission

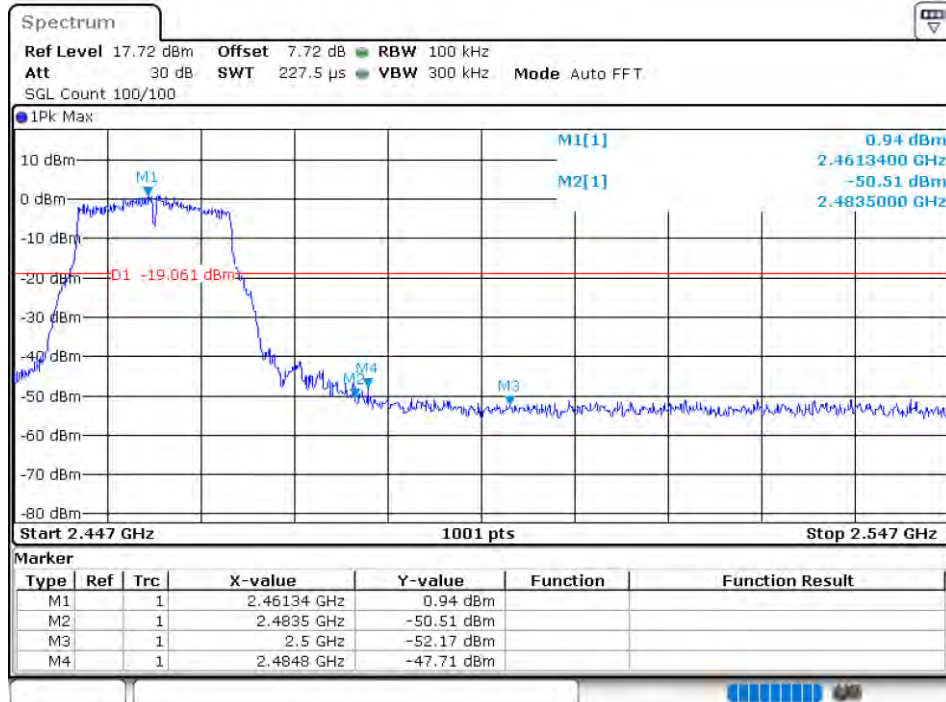


Band Edge NVNT 802.11n(HT20) 2412MHz Ant 1 Ref

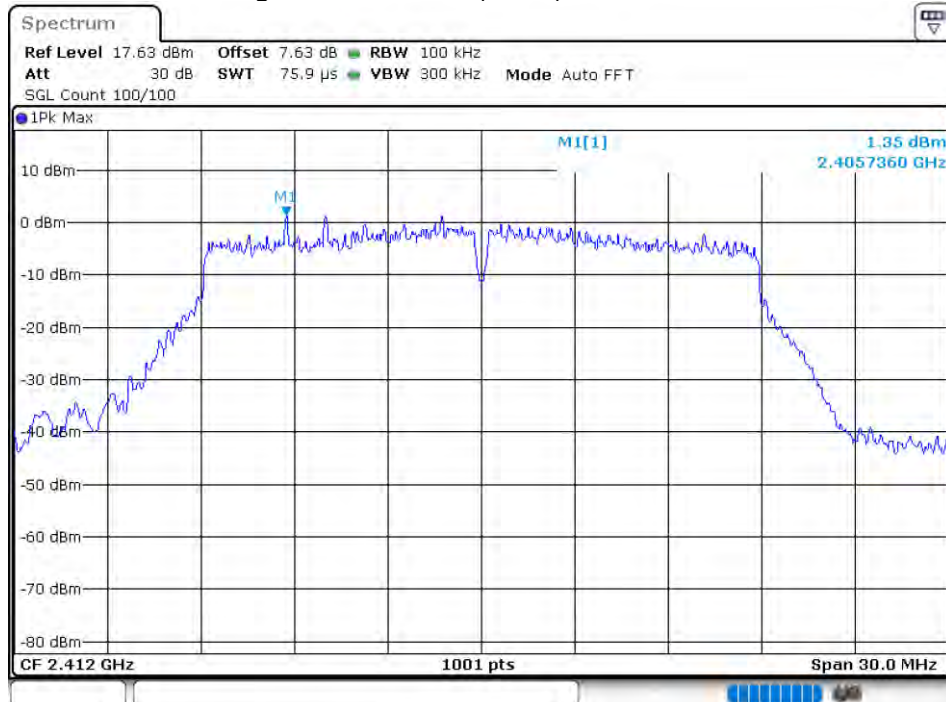


Band Edge NVNT 802.11n(HT20) 2412MHz Ant 1 Emission

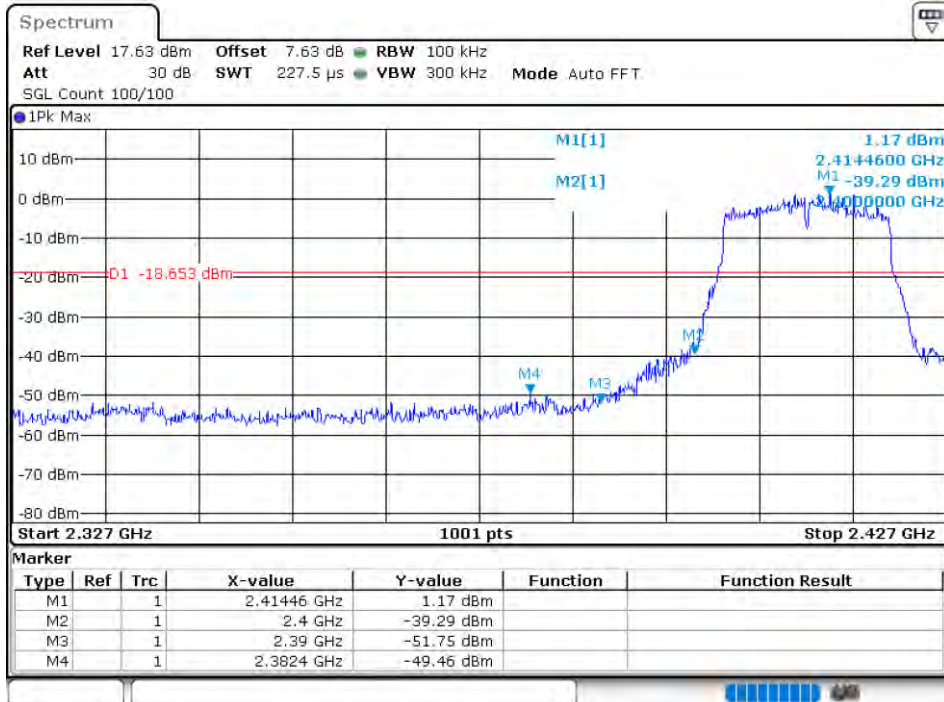


Band Edge NVNT 802.11n(HT20) 2462MHz Ant 1 Ref

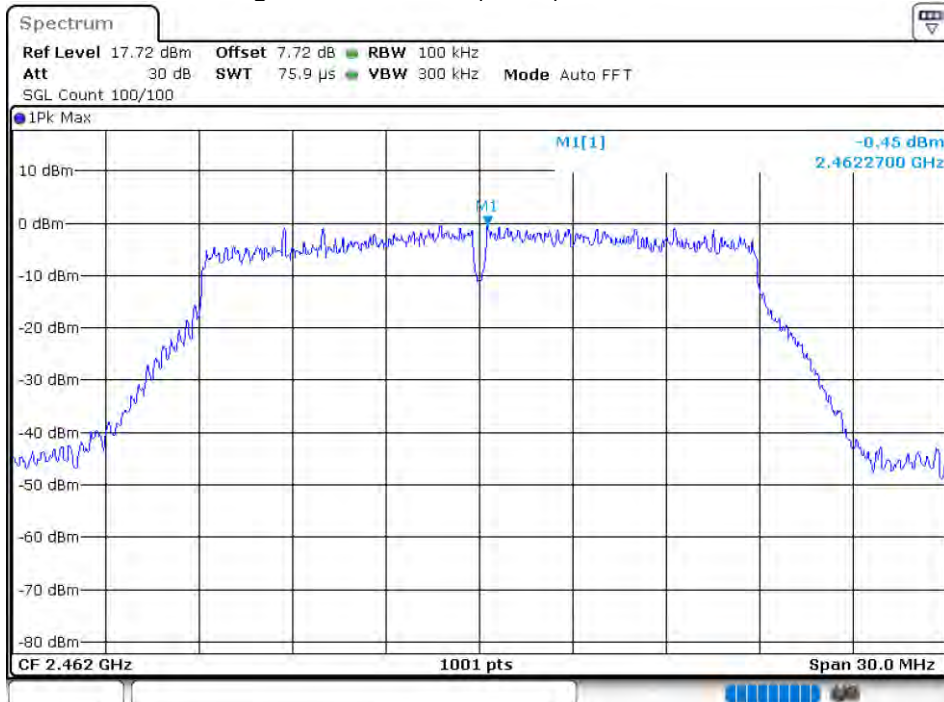


Band Edge NVNT 802.11n(HT20) 2462MHz Ant 1 Emission

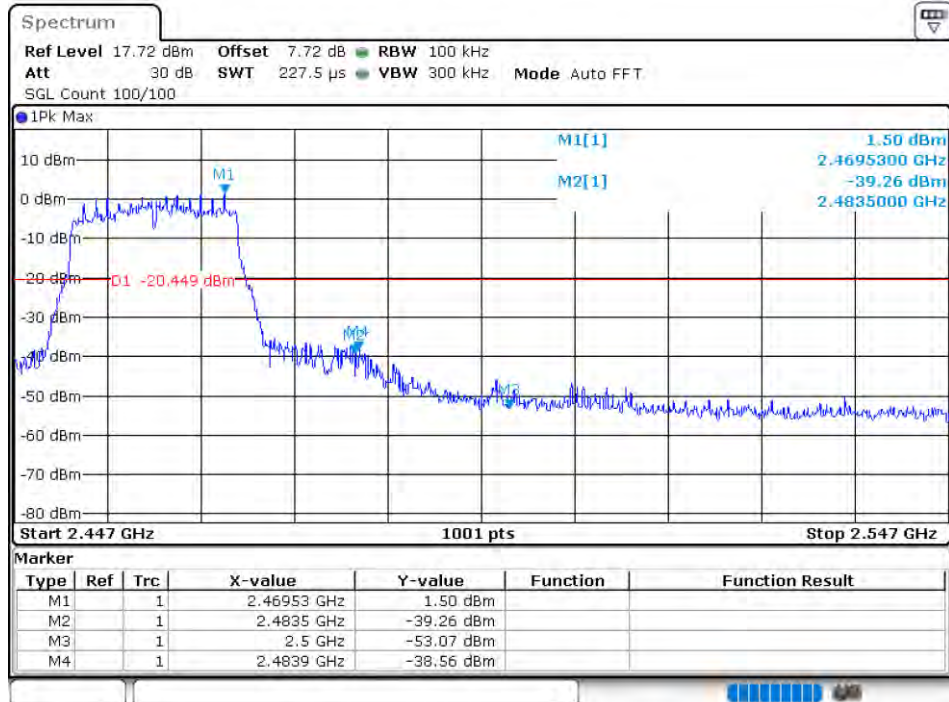


Band Edge NVNT 802.11n(HT20) 2412MHz Ant 2 Ref

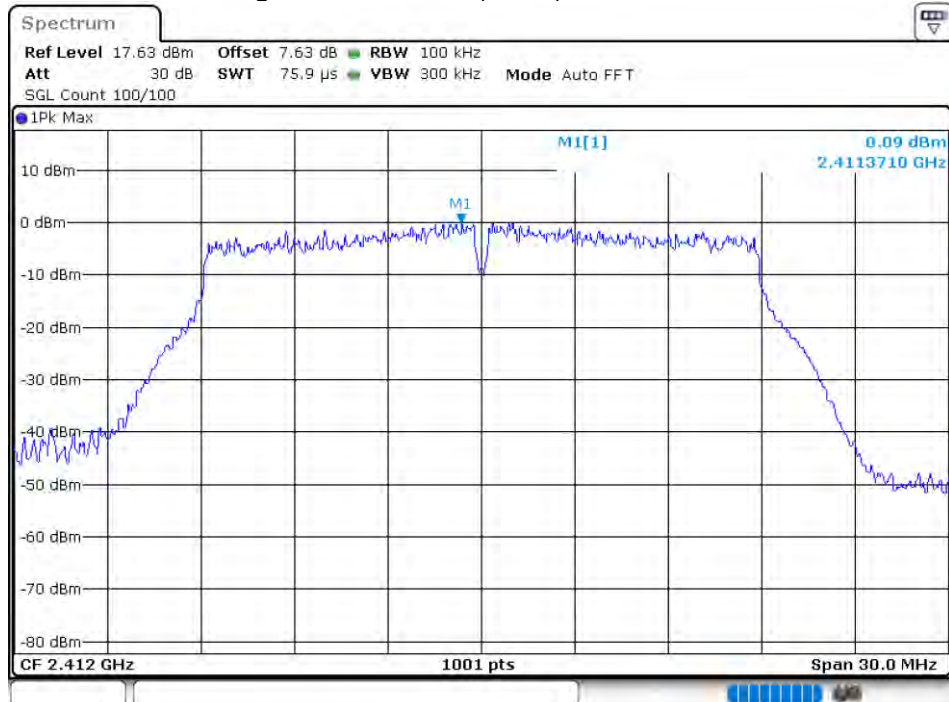


Band Edge NVNT 802.11n(HT20) 2412MHz Ant 2 Emission

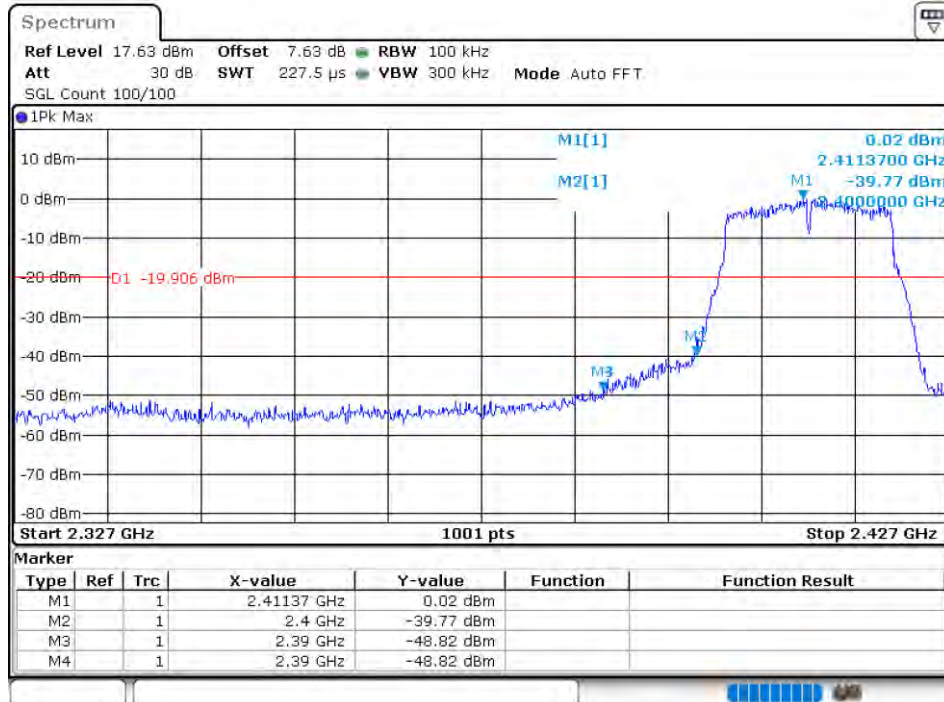


Band Edge NVNT 802.11n(HT20) 2462MHz Ant 2 Ref

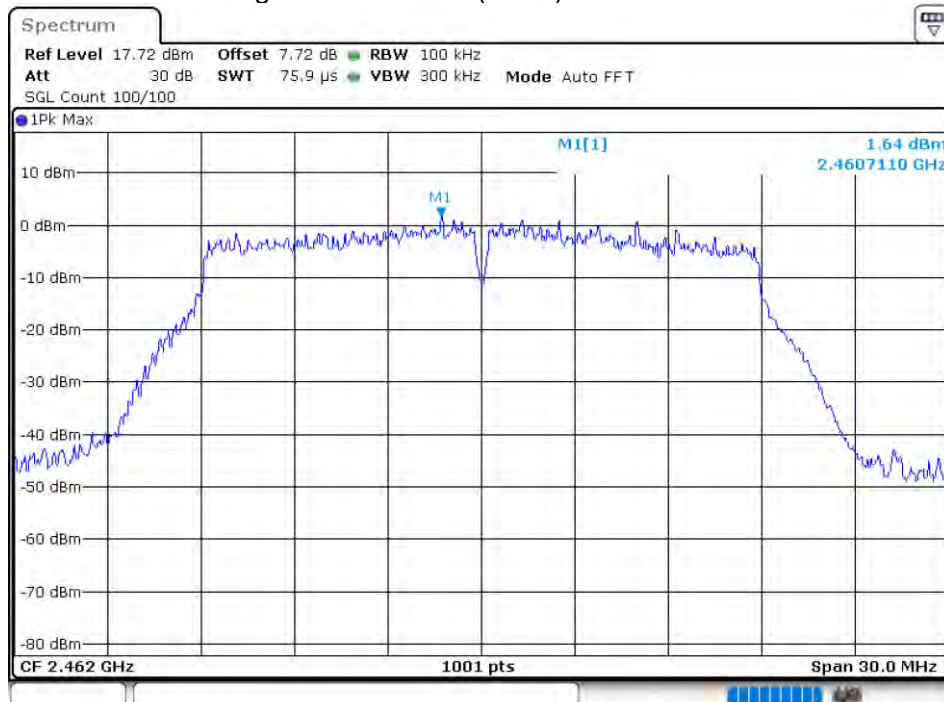


Band Edge NVNT 802.11n(HT20) 2462MHz Ant 2 Emission

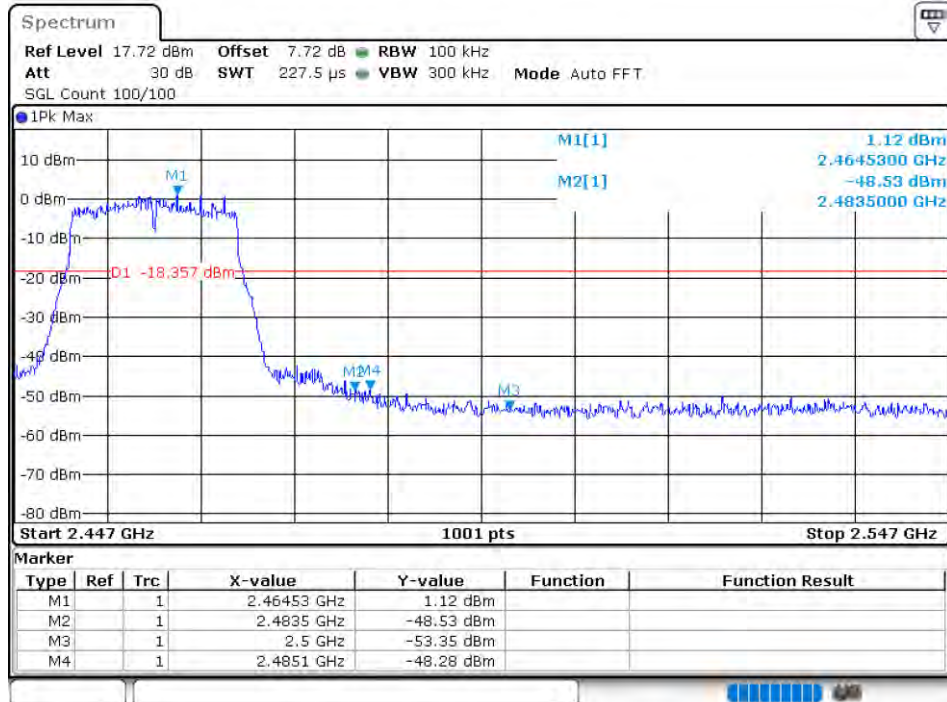


Band Edge NVNT 802.11n(HT40) 2422MHz Ant 1 Ref

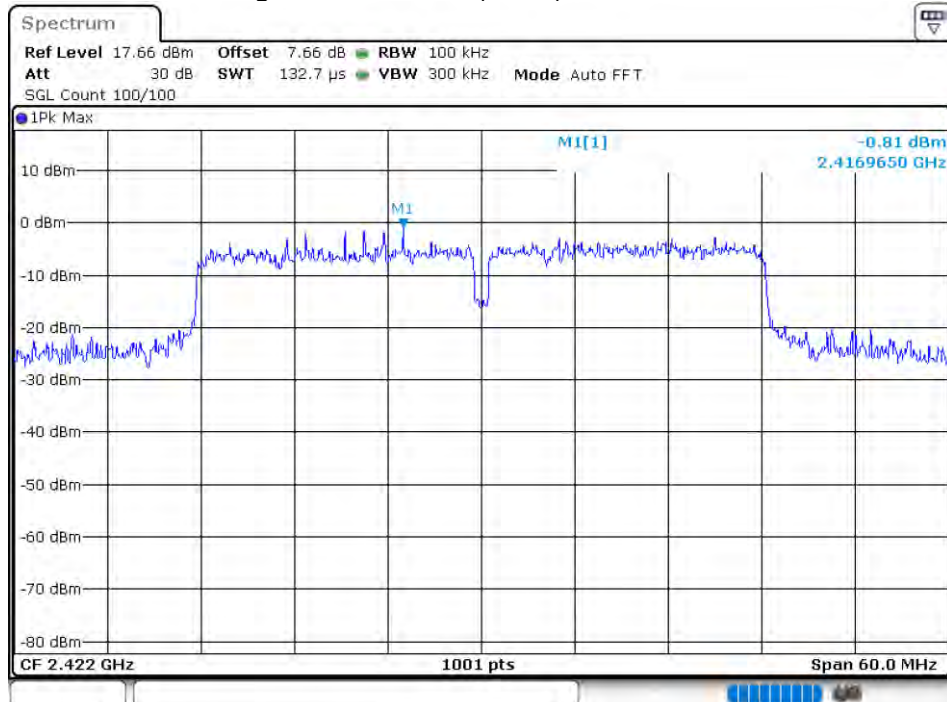


Band Edge NVNT 802.11n(HT40) 2422MHz Ant 1 Emission

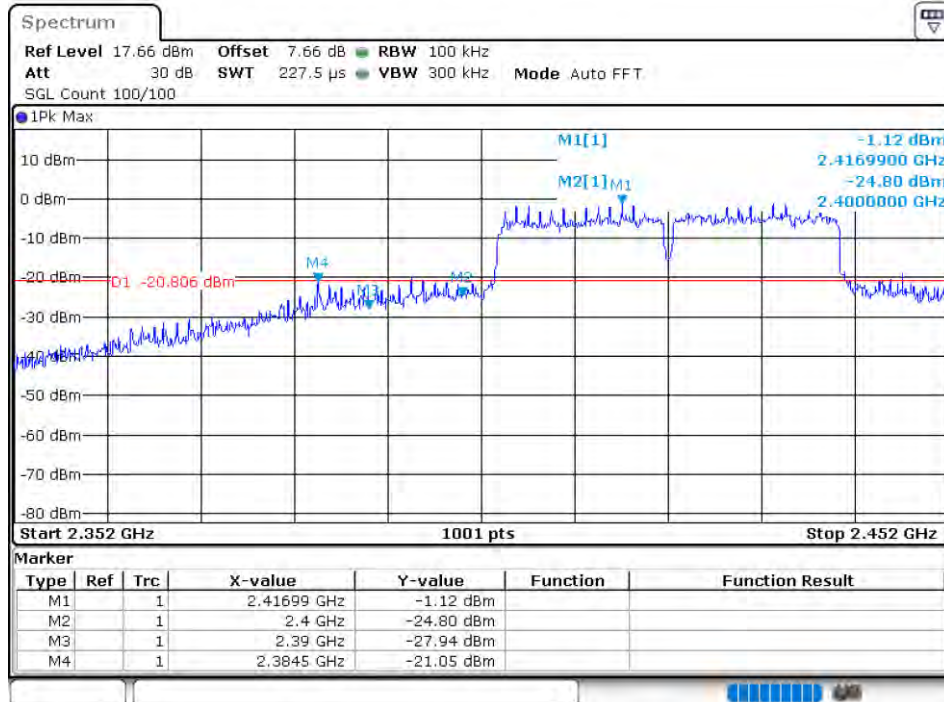


Band Edge NVNT 802.11n(HT40) 2452MHz Ant 1 Ref

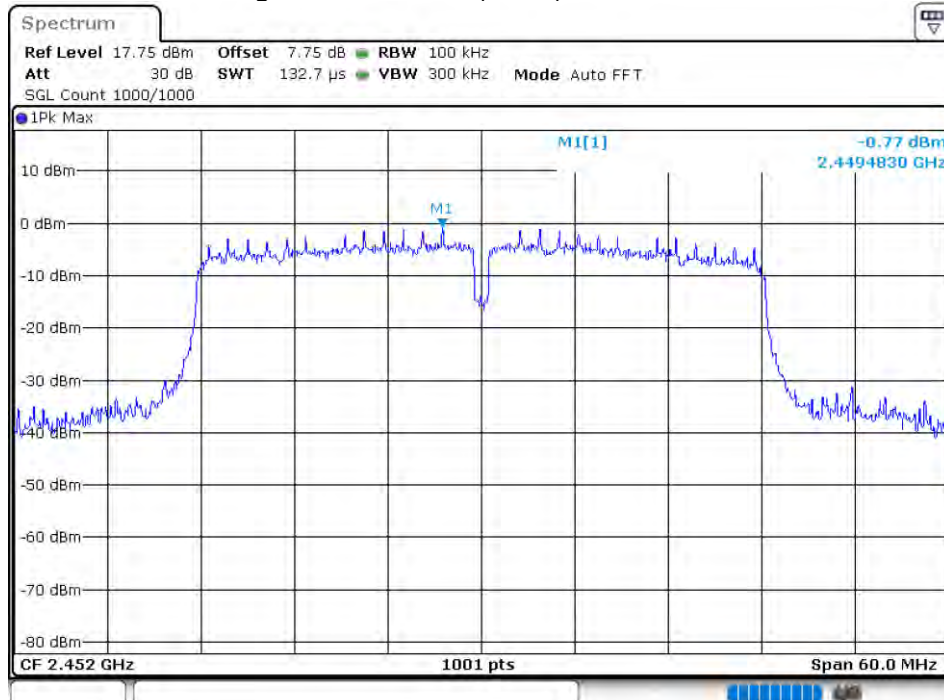


Band Edge NVNT 802.11n(HT40) 2452MHz Ant 1 Emission

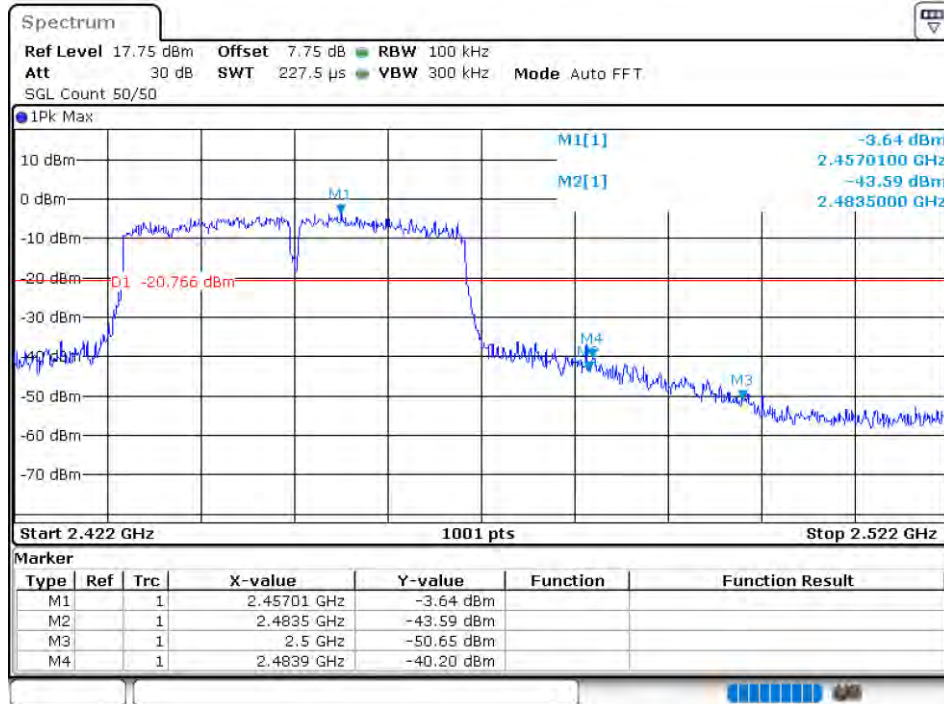


Band Edge NVNT 802.11n(HT40) 2422MHz Ant 2 Ref

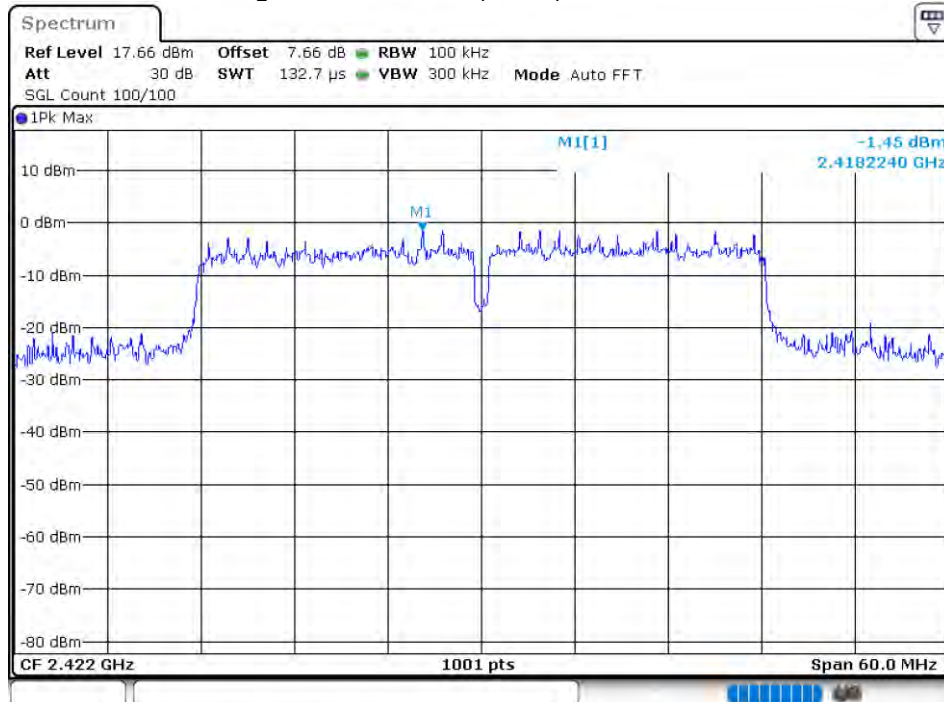


Band Edge NVNT 802.11n(HT40) 2422MHz Ant 2 Emission

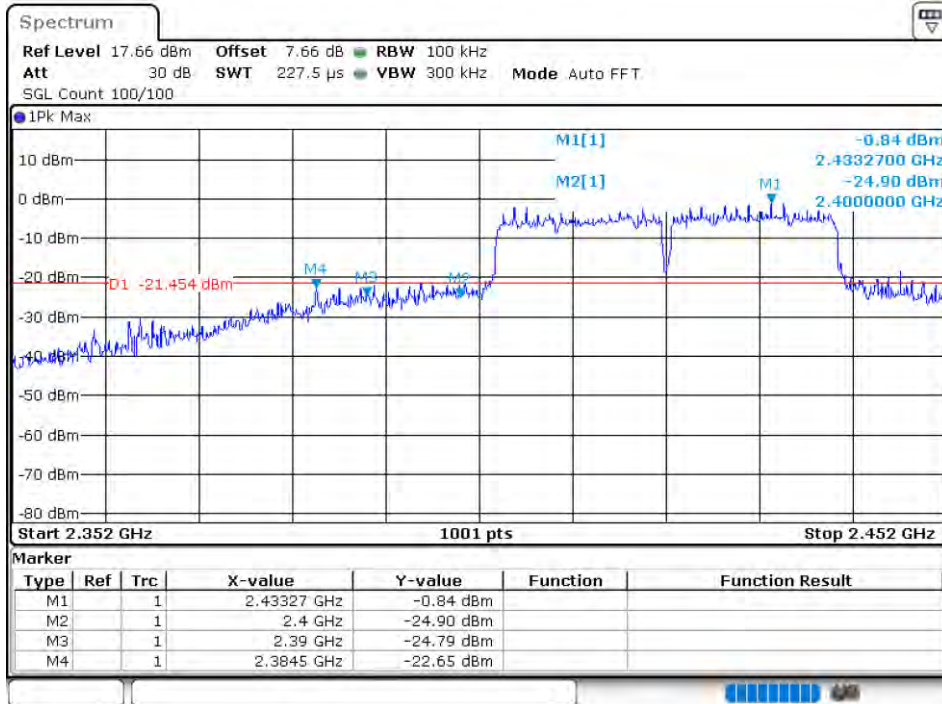

Band Edge NVNT 802.11n(HT40) 2452MHz Ant 2 Ref

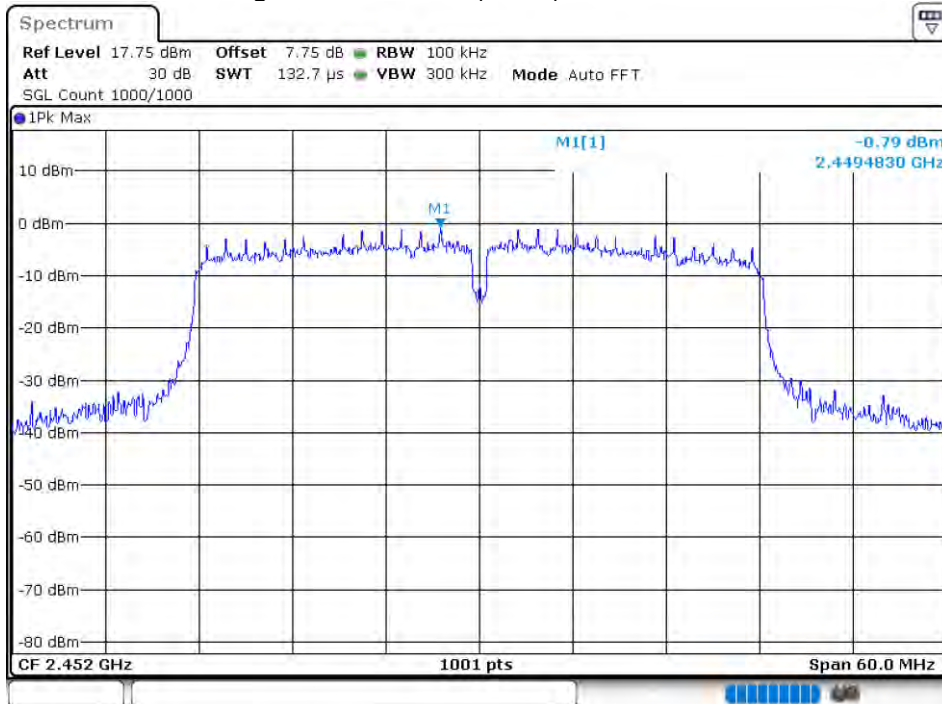


Band Edge NVNT 802.11n(HT40) 2452MHz Ant 2 Emission

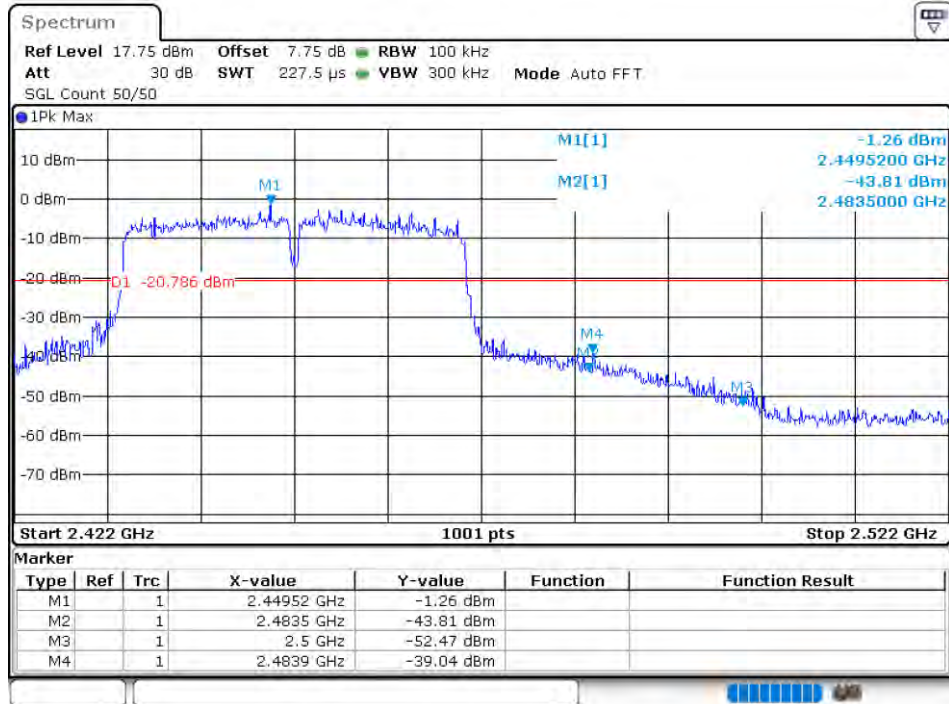


8.1.6 CONDUCTED RF SPURIOUS EMISSION

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	802.11b	2412	Ant 1	-52.44	-20	Pass
NVNT	802.11b	2437	Ant 1	-50.76	-20	Pass
NVNT	802.11b	2462	Ant 1	-51.42	-20	Pass
NVNT	802.11b	2412	Ant 2	-51.85	-20	Pass
NVNT	802.11b	2437	Ant 2	-52.5	-20	Pass
NVNT	802.11b	2462	Ant 2	-52.98	-20	Pass
NVNT	802.11g	2412	Ant 1	-46.67	-20	Pass
NVNT	802.11g	2437	Ant 1	-45.7	-20	Pass
NVNT	802.11g	2462	Ant 1	-45.68	-20	Pass
NVNT	802.11g	2412	Ant 2	-46.58	-20	Pass
NVNT	802.11g	2437	Ant 2	-46.26	-20	Pass
NVNT	802.11g	2462	Ant 2	-46.55	-20	Pass
NVNT	802.11n(HT20)	2412	Ant 1	-47.11	-20	Pass
NVNT	802.11n(HT20)	2437	Ant 1	-45.89	-20	Pass
NVNT	802.11n(HT20)	2462	Ant 1	-45.2	-20	Pass
NVNT	802.11n(HT20)	2412	Ant 2	-47.15	-20	Pass
NVNT	802.11n(HT20)	2437	Ant 2	-45.72	-20	Pass
NVNT	802.11n(HT20)	2462	Ant 2	-45.87	-20	Pass
NVNT	802.11n(HT40)	2422	Ant 1	-44.1	-20	Pass
NVNT	802.11n(HT40)	2437	Ant 1	-44.95	-20	Pass
NVNT	802.11n(HT40)	2452	Ant 1	-44.59	-20	Pass
NVNT	802.11n(HT40)	2422	Ant 2	-43.06	-20	Pass
NVNT	802.11n(HT40)	2437	Ant 2	-44.44	-20	Pass
NVNT	802.11n(HT40)	2452	Ant 2	-44.78	-20	Pass

Tx. Spurious NVNT 802.11b 2412MHz Ant 1 Ref

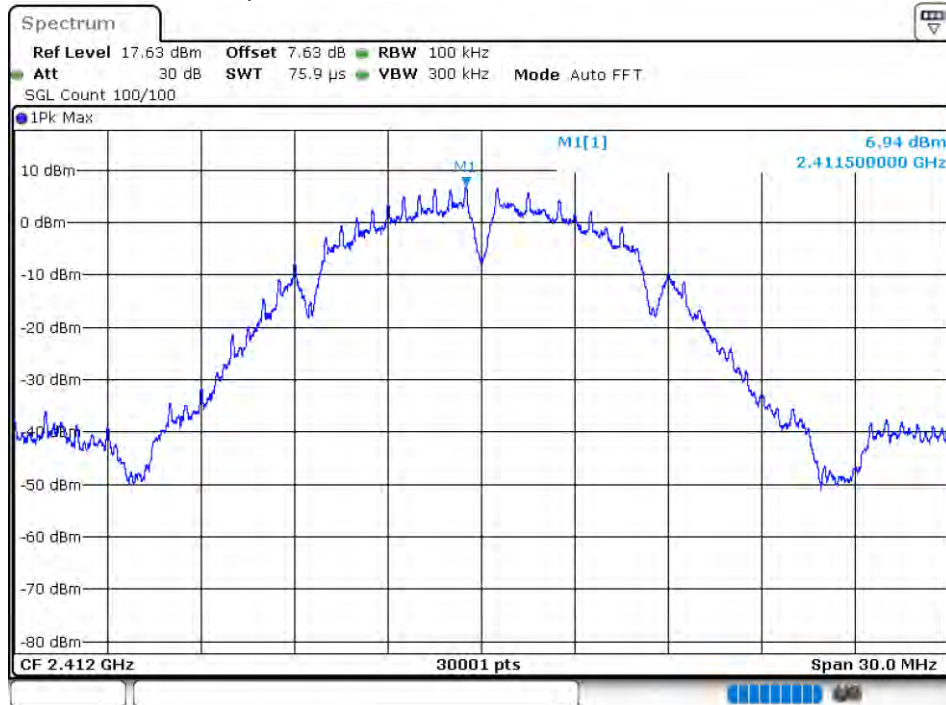


Tx. Spurious NVNT 802.11b 2412MHz Ant 1 Emission

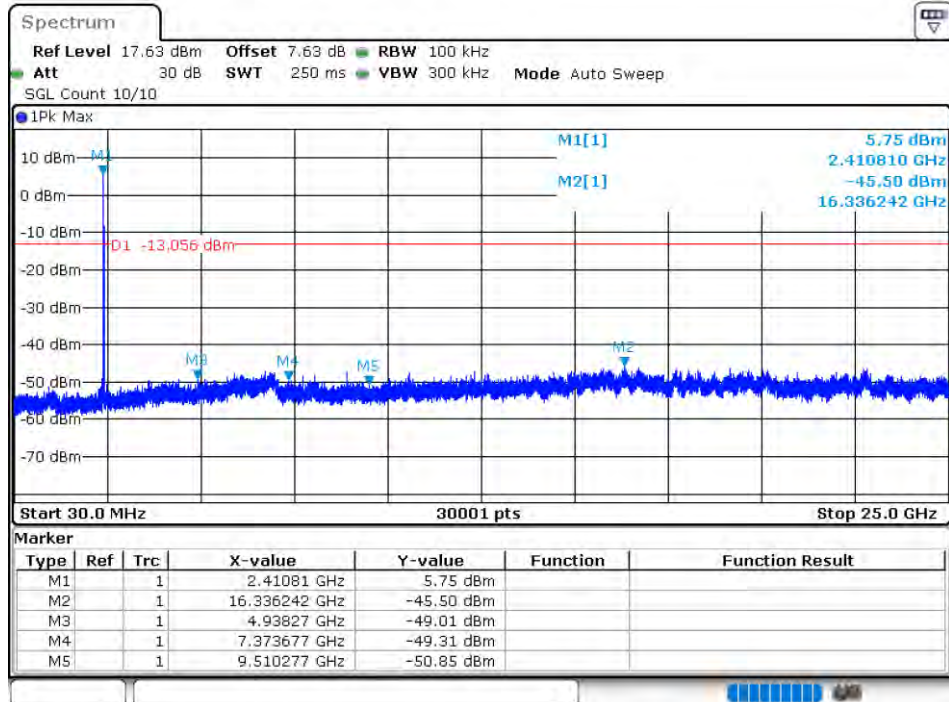


Tx. Spurious NVNT 802.11b 2437MHz Ant 1 Ref




Tx. Spurious NVNT 802.11b 2437MHz Ant 1 Emission

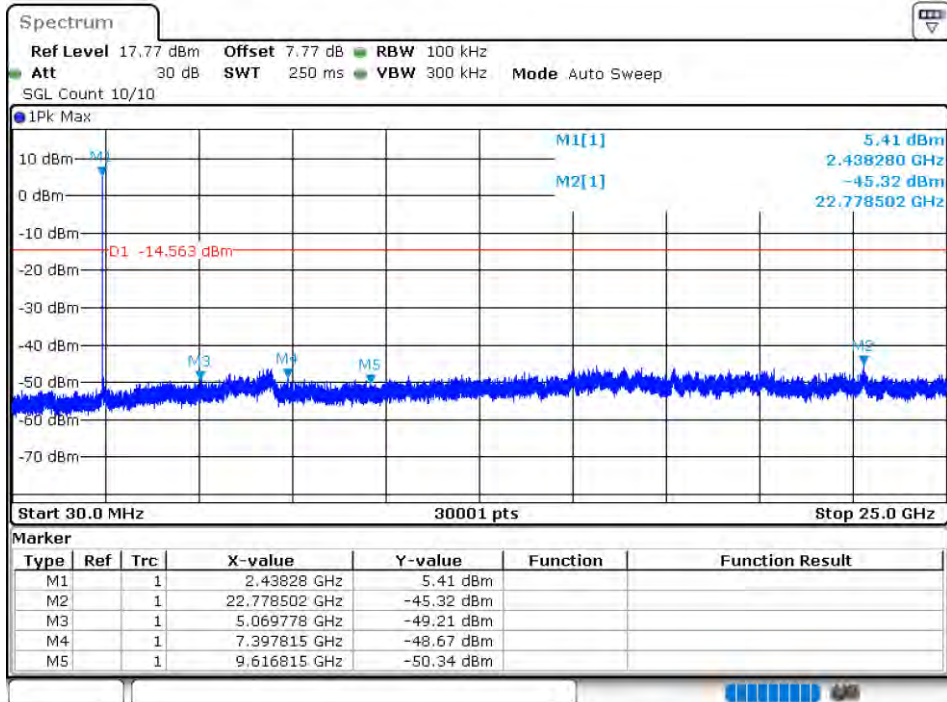


Tx. Spurious NVNT 802.11b 2462MHz Ant 1 Ref

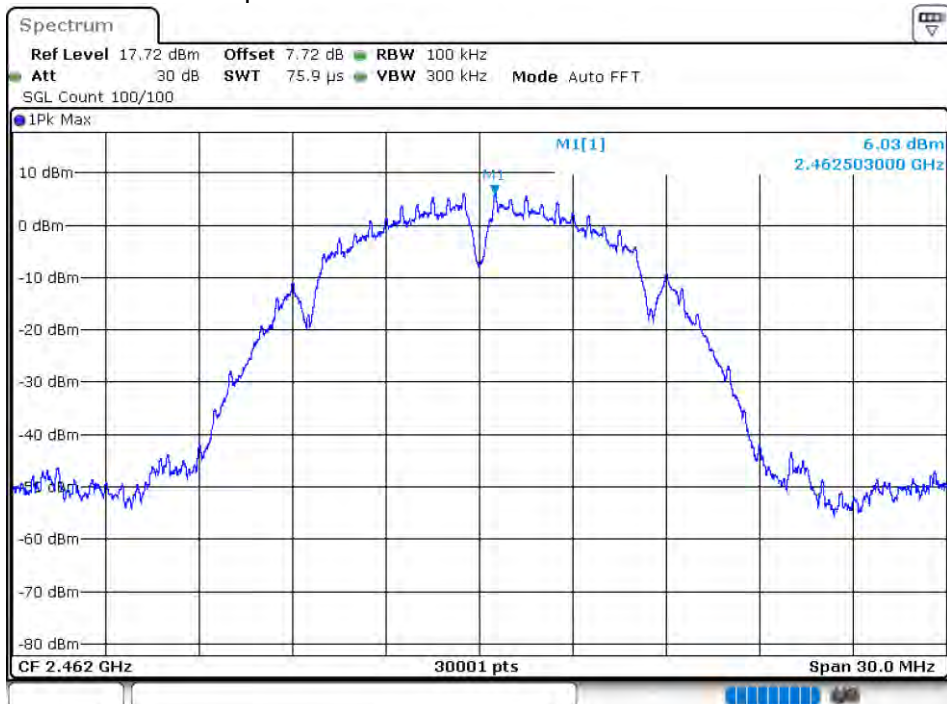


Tx. Spurious NVNT 802.11b 2462MHz Ant 1 Emission

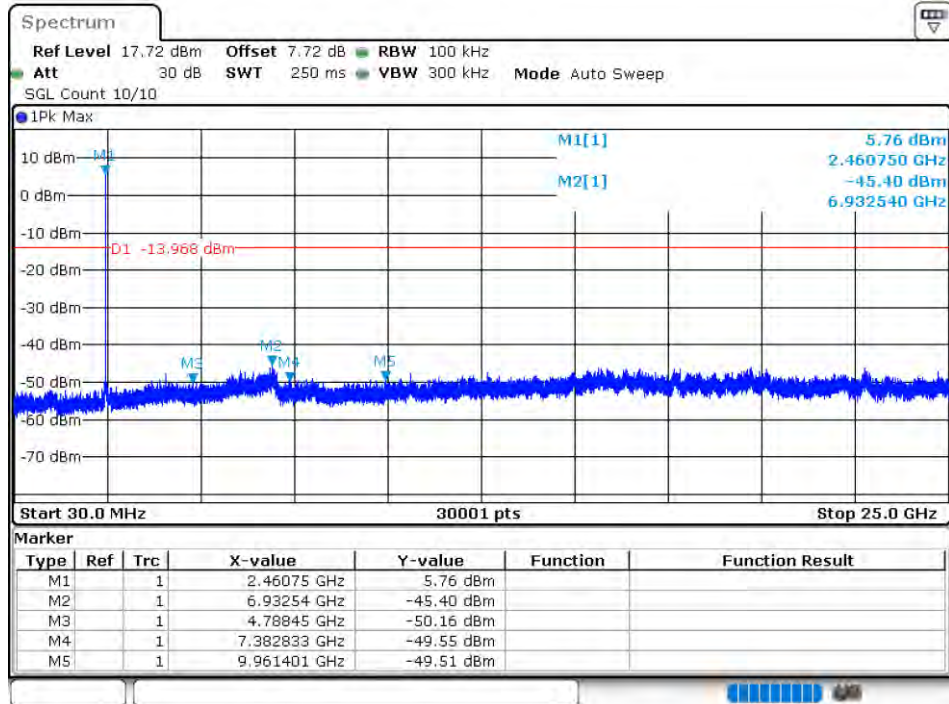


Tx. Spurious NVNT 802.11b 2412MHz Ant 2 Ref

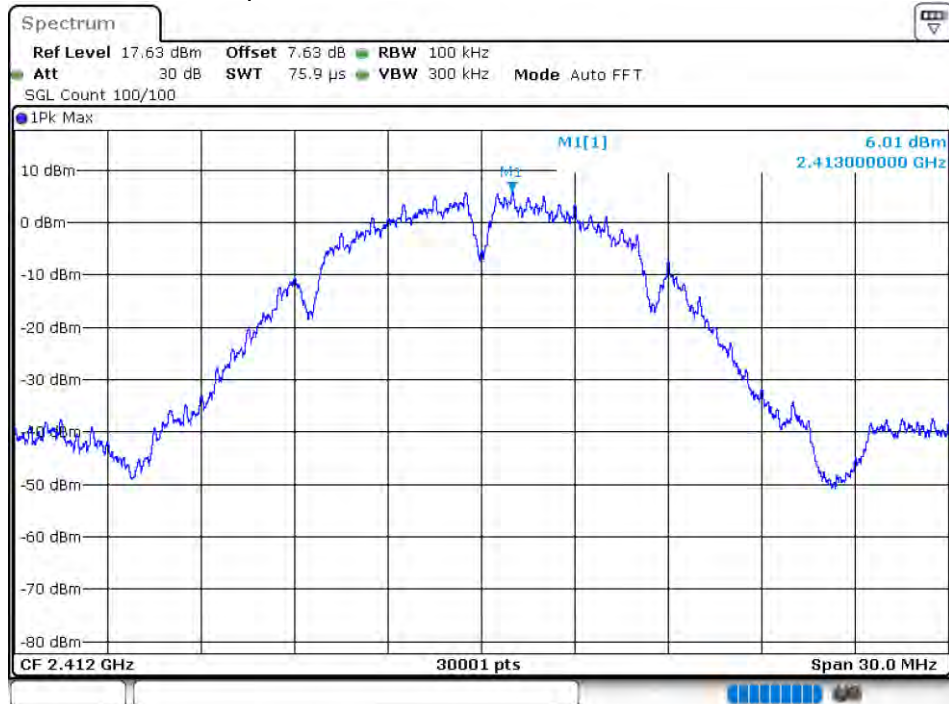


Tx. Spurious NVNT 802.11b 2412MHz Ant 2 Emission

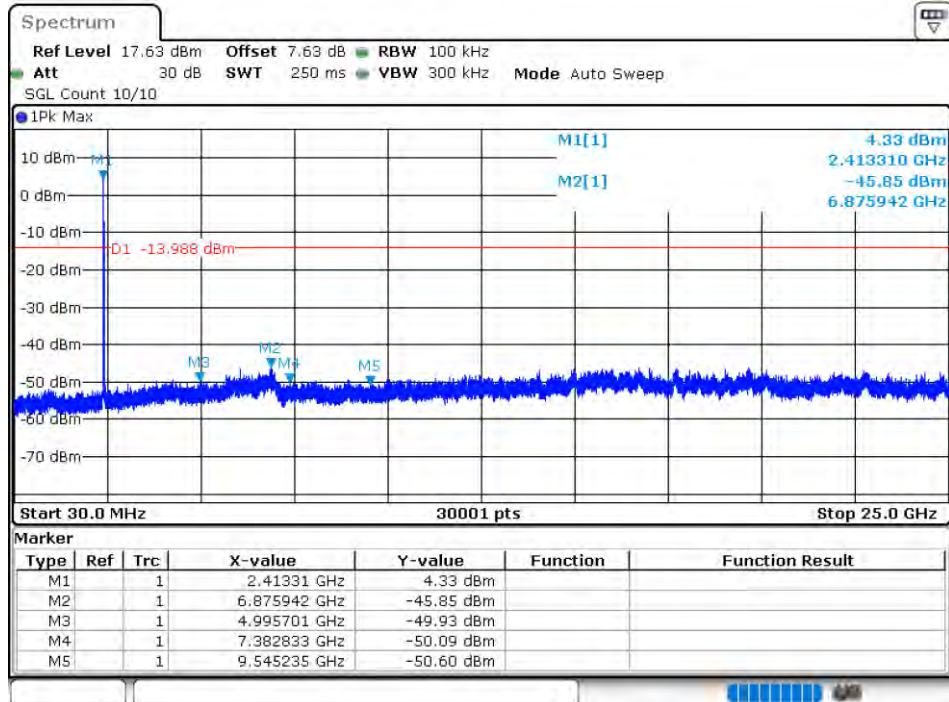

Tx. Spurious NVNT 802.11b 2437MHz Ant 2 Ref

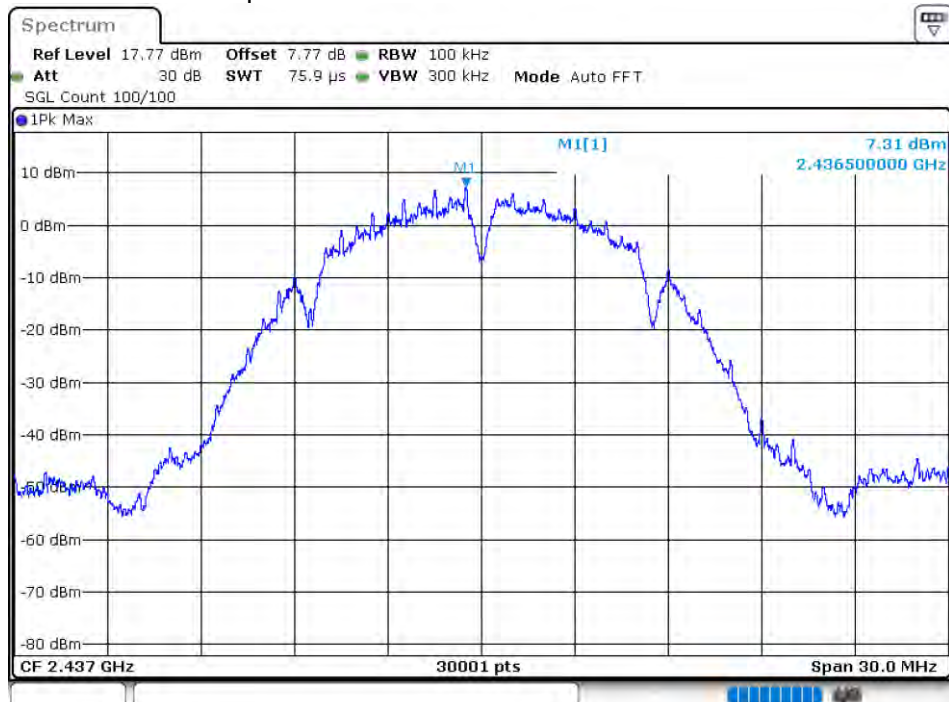


Tx. Spurious NVNT 802.11b 2437MHz Ant 2 Emission

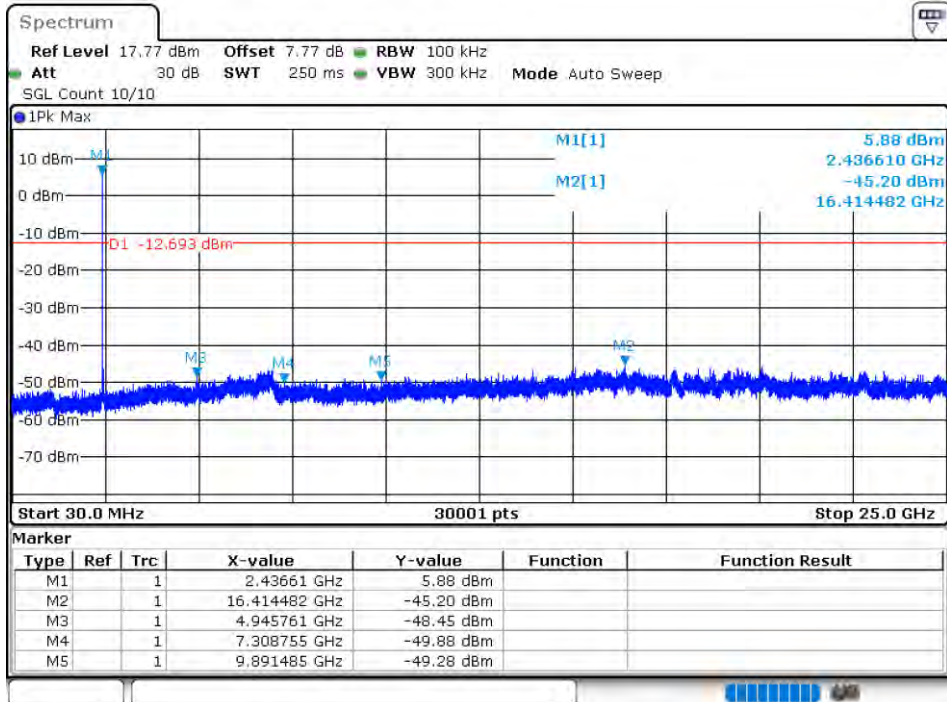


Tx. Spurious NVNT 802.11b 2462MHz Ant 2 Ref




Tx. Spurious NVNT 802.11b 2462MHz Ant 2 Emission

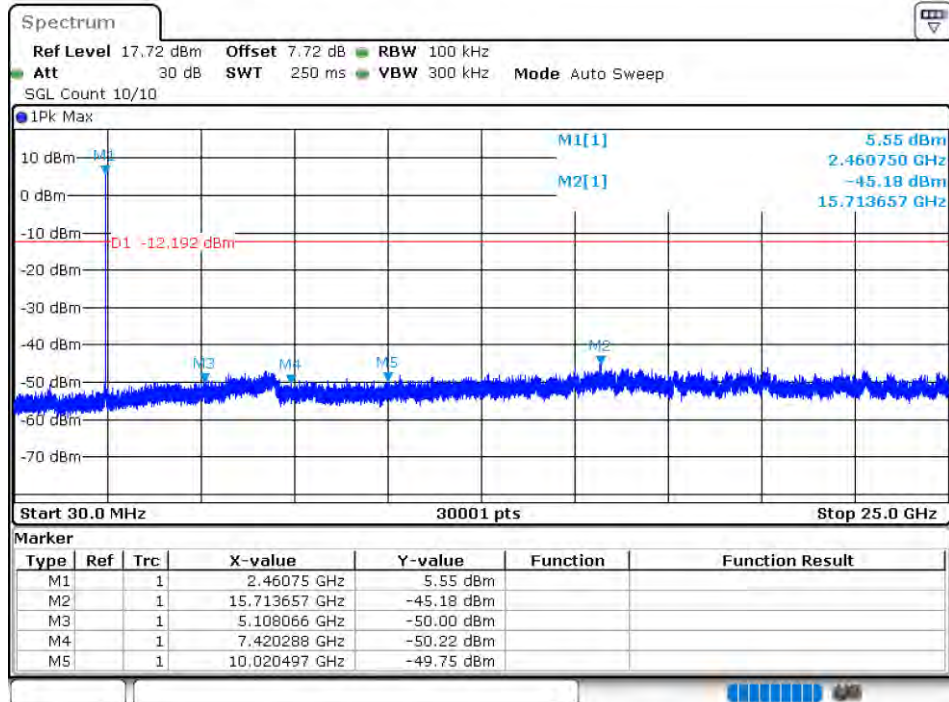

Tx. Spurious NVNT 802.11g 2412MHz Ant 1 Ref

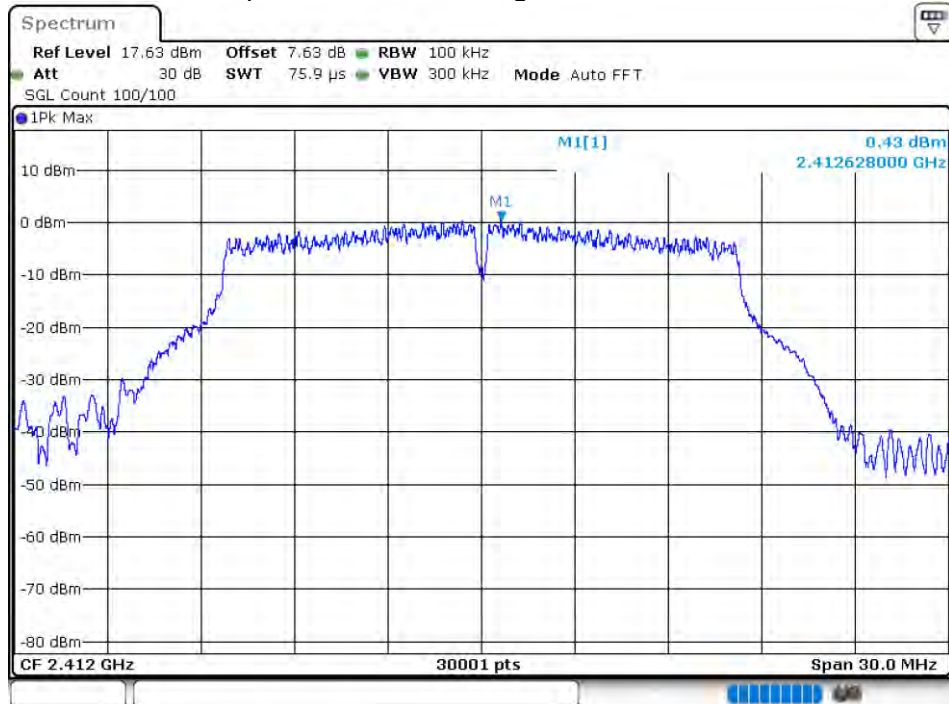

Tx. Spurious NVNT 802.11g 2412MHz Ant 1 Emission

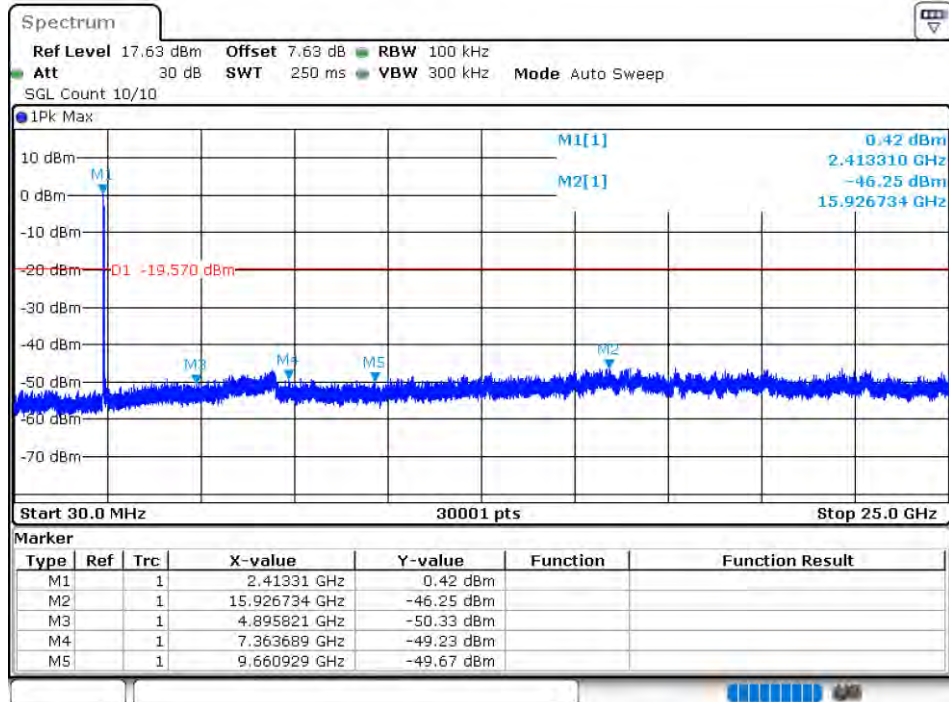

Tx. Spurious NVNT 802.11g 2437MHz Ant 1 Ref

