

RF

TEST REPORT


ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
Laptop

ISSUED TO
E&S International Enterprises, Inc.

7801 Hayvenhurst Avenue, Van Nuys, California 91406 USA

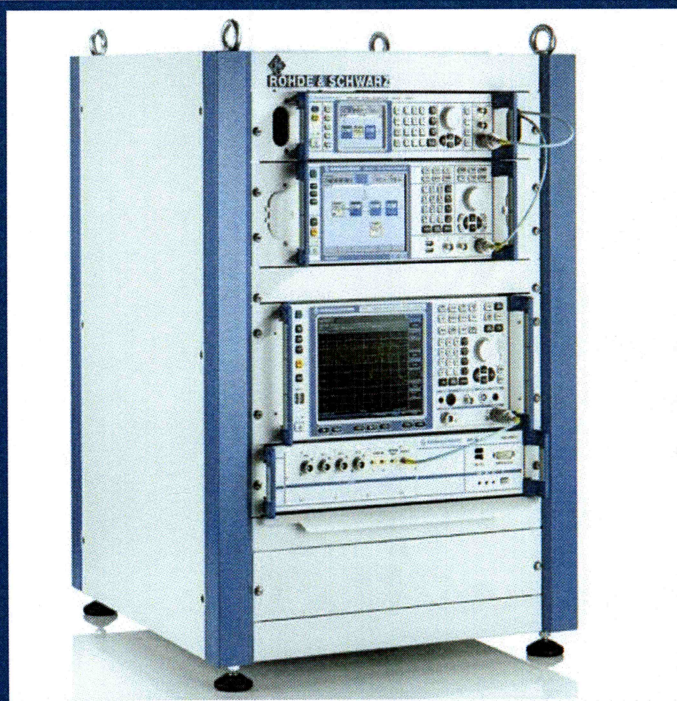

Tested by: Ye Hongji

Ye Hongji

Date: Sep. 02, 2021

Approved by: Liao Jianming

Liao Jianming
(Technical Director)

Date: Sep. 02, 2021

Report No.: BL-SZ2170517-601

EUT Name: Laptop

Model Name: GWTN156-11 (refer section 2.4)

Brand Name: Gateway

Test Standard: 47 CFR Part 15 Subpart C
(refer section 3.1)

FCC ID: 2AYPE-GWTN156-11W

Test conclusion: Pass

Test Date: Jul. 23, 2021 ~ Jul. 27, 2021

Date of Issue: Sep. 02, 2021

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Sep. 02, 2021</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	5
1.1	Identification of the Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Laboratory Condition	5
1.4	Announce	5
2	PRODUCT INFORMATION	6
2.1	Applicant Information	6
2.2	Manufacturer Information	6
2.3	Factory Information	6
2.4	General Description for Equipment under Test (EUT)	6
2.5	Technical Information	7
2.6	Additional Instructions	8
3	SUMMARY OF TEST RESULTS	9
3.1	Test Standards	9
3.2	Verdict	9
4	GENERAL TEST CONFIGURATIONS	10
4.1	Test Environments	10
4.2	Test Equipment List	10
4.3	Measurement Uncertainty	10
4.4	Description of Test Setup	11
4.4.1	For Antenna Port Test	11
4.4.2	For AC Power Supply Port Test	11
4.4.3	For Radiated Test (Below 30 MHz)	12
4.4.4	For Radiated Test (30 MHz-1 GHz)	12
4.4.5	For Radiated Test (Above 1 GHz)	13
4.5	Measurement Results Explanation Example	14
4.5.1	For conducted test items:	14

5	TEST ITEMS	15
5.1	Antenna Requirements	15
5.1.1	Relevant Standards	15
5.1.2	Antenna Anti-Replacement Construction	15
5.1.3	Antenna Gain	15
5.2	Frequency Hopping Systems	16
5.2.1	Relevant Standards	16
5.2.2	Description of the systems	16
5.3	Number of Hopping Frequencies	18
5.3.1	Limit	18
5.3.2	Test Setup	18
5.3.3	Test Procedure	18
5.3.4	Test Result	18
5.4	Peak Output Power	19
5.4.1	Test Limit	19
5.4.2	Test Setup	19
5.4.3	Test Procedure	19
5.4.4	Test Result	19
5.5	Occupied Bandwidth	20
5.5.1	Limit	20
5.5.2	Test Setup	20
5.5.3	Test Procedure	20
5.5.4	Test Result	20
5.6	Carrier Frequency Separation	21
5.6.1	Limit	21
5.6.2	Test Setup	21
5.6.3	Test Procedure	21
5.6.4	Test Result	21
5.7	Time of Occupancy (Dwell time)	22
5.7.1	Limit	22
5.7.2	Test Setup	22
5.7.3	Test Procedure	22
5.7.4	Test Result	23

5.8	Conducted Spurious Emission & Authorized-band band-edge.....	24
5.8.1	Limit.....	24
5.8.2	Test Setup.....	24
5.8.3	Test Procedure.....	24
5.8.4	Test Result.....	24
5.9	Conducted Emission.....	25
5.9.1	Limit.....	25
5.9.2	Test Setup.....	25
5.9.3	Test Procedure.....	25
5.9.4	Test Result.....	25
5.10	Radiated Spurious Emission.....	26
5.10.1	Limit.....	26
5.10.2	Test Setup.....	26
5.10.3	Test Procedure.....	26
5.10.4	Test Result.....	27
5.11	Band Edge (Restricted-band band-edge).....	28
5.11.1	Limit.....	28
5.11.2	Test Setup.....	28
5.11.3	Test Procedure.....	28
5.11.4	Test Result.....	28
ANNEX A	TEST RESULT.....	29
A.1	Number of Hopping Frequency.....	29
A.2	Peak Output Power.....	30
A.3	20 dB and 99% bandwidth.....	33
A.4	Hopping Frequency Separation.....	38
A.5	Average Time of Occupancy.....	39
A.6	Conducted Spurious Emissions & Authorized-band band-edge.....	42
A.7	Conducted Emissions.....	49
A.8	Radiated Spurious Emission.....	51
A.9	Band Edge (Restricted-band band-edge).....	69
ANNEX B	TEST SETUP PHOTOS.....	71
ANNEX C	EUT EXTERNAL PHOTOS.....	71
ANNEX D	EUT INTERNAL PHOTOS.....	71

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v5.7.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	E&S International Enterprises, Inc.
Address	7801 Hayvenhurst Avenue, Van Nuys, California 91406 USA

2.2 Manufacturer Information

Manufacturer	E&S International Enterprises, Inc.
Address	7801 Hayvenhurst Avenue, Van Nuys, California 91406 USA

2.3 Factory Information

Factory	E&S International Enterprises, Inc.
Address	7801 Hayvenhurst Avenue, Van Nuys, California 91406 USA

2.4 General Description for Equipment under Test (EUT)

EUT Name	Laptop
Model Name Under Test	GWTN156-11
Series Model Name	GWTN156-11BK, GWTN156-11BL, GWTN156-11RD, GWTN156-11GR, G152, G151, GWTN156-11BK, N15DP7
Description of Model name differentiation	All models are same with electrical parameters and internal circuit structure, but only different on color, CPU, screen and memory.
Hardware Version	S140GBR320
Software Version	Windows 10 S mode
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) WIFI 802.11b, 802.11g, 802.11n
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Transfer Rate	DH5: 1 Mbps 2DH5: 2 Mbps 3DH5: 3 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of Channel	79 (at intervals of 1 MHz)
Tested Channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz)
Antenna Type	PIFA Antenna
Antenna Gain	2.5 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
Antenna Impedance	50 Ω
Antenna System (MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
0	2402	21	2423	42	2444	63	2465
1	2403	22	2424	43	2445	64	2466
2	2404	23	2425	44	2446	65	2467
3	2405	24	2426	45	2447	66	2468
4	2406	25	2427	46	2448	67	2469
5	2407	26	2428	47	2449	68	2470
6	2408	27	2429	48	2450	69	2471
7	2409	28	2430	49	2451	70	2472
8	2410	29	2431	50	2452	71	2473
9	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460	-	-
17	2419	38	2440	59	2461	-	-
18	2420	39	2441	60	2462	-	-
19	2421	40	2442	61	2463	-	-
20	2422	41	2443	62	2464	-	-


2.6 Additional Instructions

EUT Software Settings:

Mode	☒ Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

Power level setup in software			
Test Software Version	Bluetooth MP Tool		
Mode	Channel	Frequency (MHz)	Soft Set
DH5	CH0	2402	TX LEVEL is built-in set parameters and cannot be changed and selected.
	CH39	2441	
	CH78	2480	
2DH5	CH0	2402	
	CH39	2441	
	CH78	2480	
3DH5	CH0	2402	
	CH39	2441	
	CH78	2480	

Run Software:

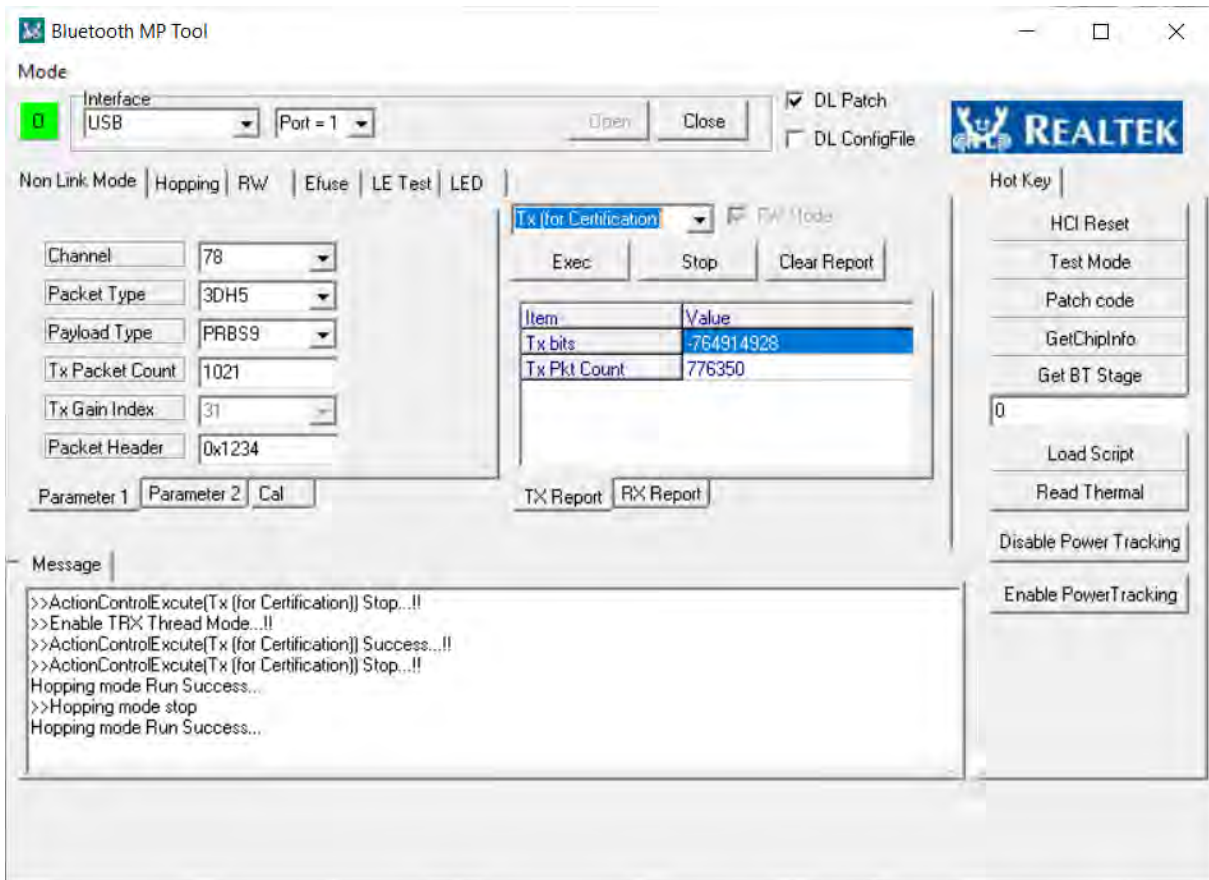

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Miscellaneous Wireless Communications Services
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

3.2 Verdict

No.	Description	FCC Part No.	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	N/A	--	Pass	Note ¹
2	Number of Hopping Frequencies	15.247(a)	Hopping Mode	ANNEX A.1	Pass	Note ²
3	Peak Output Power	15.247(b)	Low/Middle/High	ANNEX A.2	Pass	--
4	Occupied Bandwidth	15.247(a)	Low/Middle/High	ANNEX A.3	Pass	Note ²
5	Carrier Frequency Separation	15.247(a)	Hopping Mode	ANNEX A.4	Pass	Note ²
6	Time of Occupancy (Dwell time)	15.247(a)	Hopping Mode	ANNEX A.5	Pass	Note ²
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	Low/Middle/High	ANNEX A.6	Pass	Note ²
8	Conducted Emission	15.207	Low/Middle/High	ANNEX A.7	Pass	Note ²
9	Radiated Spurious Emission	15.209 15.247(d)	Hopping Mode, Low/Middle/High	ANNEX A.8	Pass	Note ²
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	Hopping Mode, Low/Middle/High	ANNEX A.9	Pass	Note ²
11	Receiver Spurious Emissions	--	--	--	N/A	Note ³

Note ¹: Please refer to section 5.1

Note ²: $\pi/4$ -DQPSK is the EDR 2M rate mode, 8-DPSK is the EDR 3M rate mode. The consistency of test results in $\pi/4$ -DQPSK and 8-DPSK is very high. So we chose 8-DPSK as a typical representative to appear on the report. Another we will show all the modes on the RF output power test item.

Note ³: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	7.6 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-40	101544	2021.04.01	2022.03.31
Bluetooth Signaling Unit	ROHDE&SCHWARZ	CMW500	142028	2021.06.01	2022.05.31
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2021.06.01	2022.05.31
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2021.06.01	2022.05.31
LISN	SCHWARZBECK	NSLK 8127	8127-687	2021.06.01	2022.05.31
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2019.10.29	2021.10.28
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2019.07.02	2022.07.01
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1917	2019.07.02	2022.07.01
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2021.01.05	2023.01.04
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2022.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2018.08.08	2021.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--

4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Occupied Channel Bandwidth	±2.8%
RF output power, conducted	±1.28 dB
Power Spectral Density, conducted	±1.30 dB
Unwanted Emissions, conducted	±1.84 dB
All emissions, radiated	±5.36 dB
Temperature	±0.82°C
Humidity	±4.1%


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

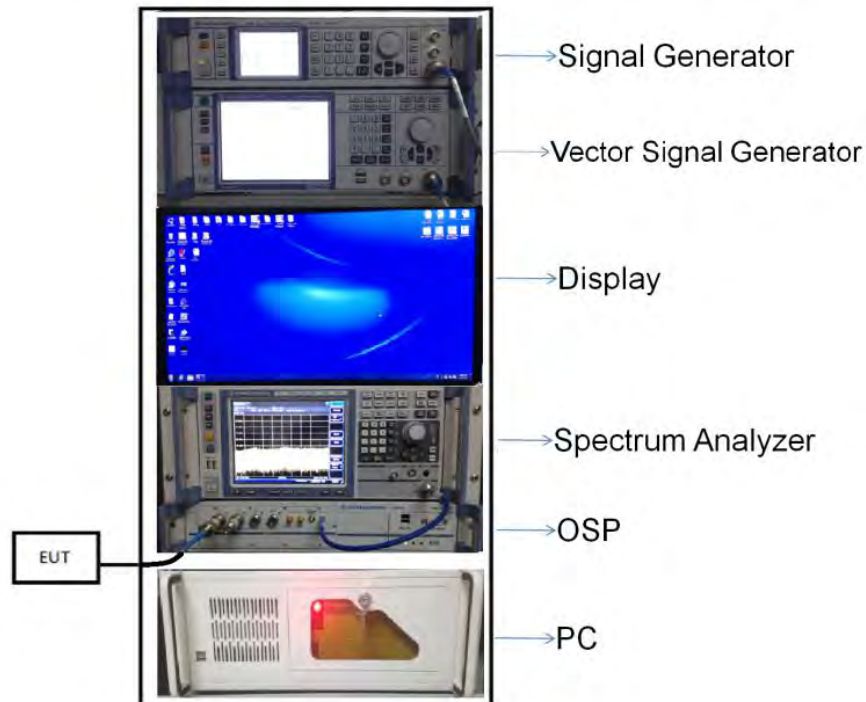


(Diagram 1)

4.4.2 For AC Power Supply Port Test

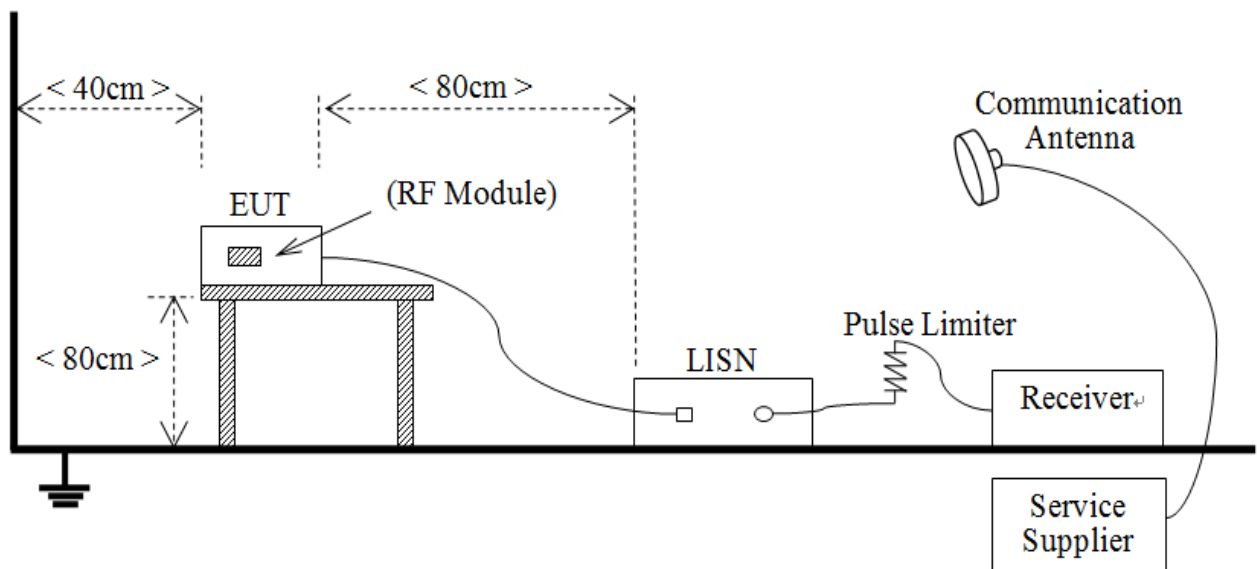


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

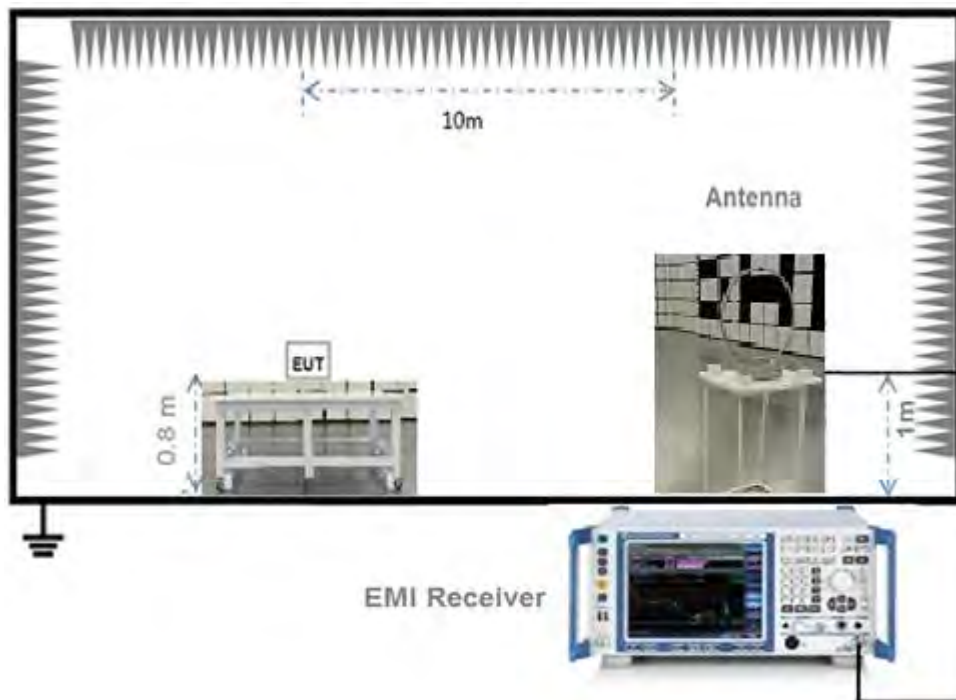


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

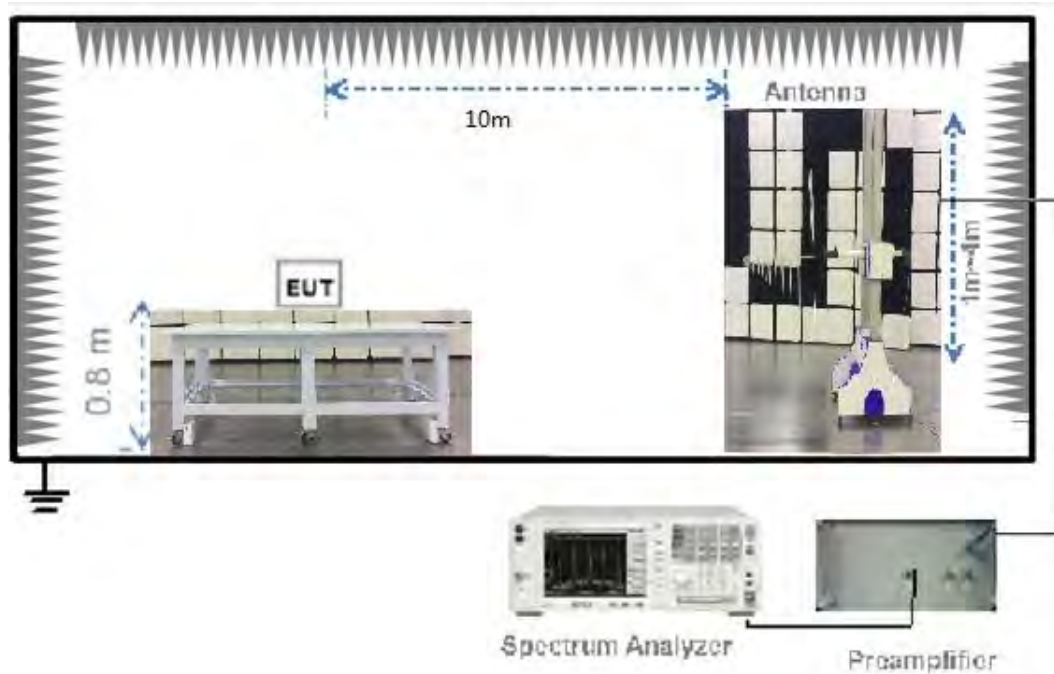

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

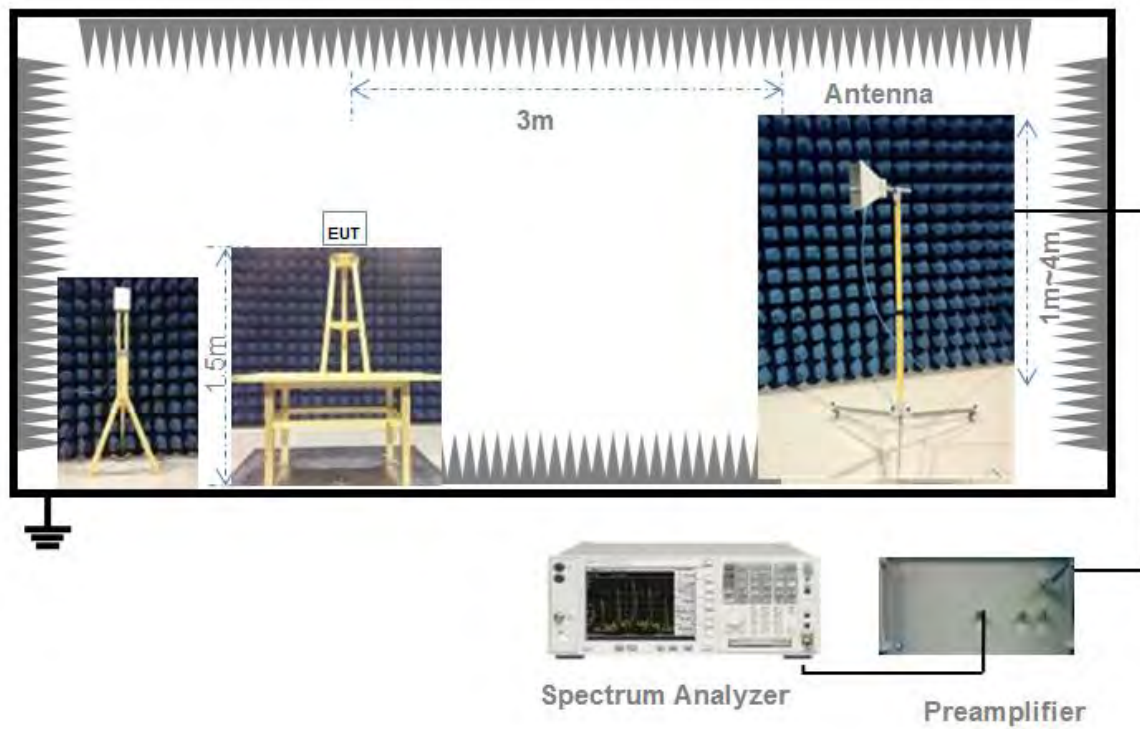

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (f)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Frequency Hopping Systems

5.2.1 Relevant Standards

FCC §15.247(a) (1) (i) (ii) (iii) (iv); FCC §15.247(g); FCC §15.247(h)

Describe how the hopping sequence is generated. Provide an example of the hopping sequence channels, to demonstrate that the sequence meets the requirement specified in the definition of an FHSS system. Per the definition in Section 2.1(c), the hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

Describe how each individual EUT meets the requirement that each of its hopping channels is used equally on average (e.g., that each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event).

Describe how the associated receiver(s) complies with the requirement that the input bandwidth (either RF or IF) matches the bandwidth of the transmitted signal.


Describe how the associated receiver(s) has the ability to shift frequencies in synchronization with the transmitted signals.

For short burst systems, describe how the EUT complies with the requirement that it be designed to be capable of operating as a true frequency hopping system. Specifically, the device shall comply with the equal frequency use and pseudorandom hopping sequence requirement when transmitting in short bursts, and shall be designed to comply when presented with continuous data (or information) stream.

Describe how the EUT complies with the requirement that it not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

5.2.2 Description of the systems

1. According to the preset procedure of the whole network, all the stations in the automatic control network synchronously change the frequency multiple times within one second, and temporarily stay on each frequency hopping channel. Periodic synchronization signaling is sent from the primary station, instructing all slaves to simultaneously change the operating frequency, then the hopping sequence is generated.
2. The hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

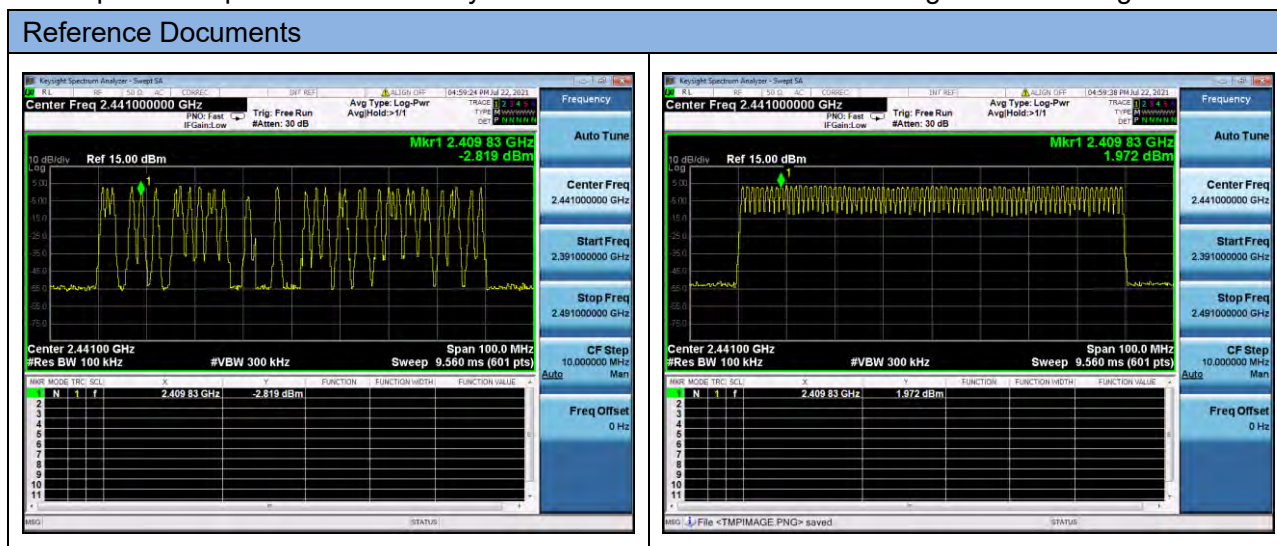

3. Channels are classified into two categories, used and unused, where used channels are part of the hopping sequence and unused channels are replaced in the hopping sequence by used channels in a pseudo-random way. Make each individual EUT meets the requirement that each of its hopping channels is used equally on average.
4. The input bandwidth and transmitted bandwidth are both 1MHz, the associated receiver(s) complies with the requirement that the input bandwidth matches the bandwidth of the transmitted signal.
5. Connected devices communicate on the same physical channel by synchronizing with a common clock and hopping sequence.
6. EUT isn't short burst systems.
7. EUT can't have the ability to be coordinated with other FHSS systems in an effort.

5.3 Number of Hopping Frequencies

5.3.1 Limit

FCC §15.247(a) (1) (iii); RSS-247, 5.1 (d)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = The frequency band of operation

RBW = To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.3.4 Test Result

Please refer to ANNEX A.1.

5.4 Peak Output Power

5.4.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS-247, 5.4 (b)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels (see Section 5.4(5) for exceptions).

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.2.

5.5 Occupied Bandwidth

5.5.1 Limit

FCC §15.247(a); RSS-247, 5.1 (a)

Measurement of the 20dB bandwidth of the modulated signal.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.5.4 Test Result

Please refer to ANNEX A.3.

5.6 Carrier Frequency Separation

5.6.1 Limit

FCC §15.247(a); RSS-247, 5.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 2/3 of the 20 dB bandwidth of the hopping channel, whichever is greater.

5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.6.4 Test Result

Please refer to ANNEX A.4.

5.7 Time of Occupancy (Dwell time)

5.7.1 Limit

FCC §15.247(a); RSS-247, 5.1 (d)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

Span: Zero span, centered on a hopping channel

RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel

Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel

Detector function: Peak

Trace: Max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

The average time of occupancy on any channel within the Period can be calculated with formulas:

For GFSK and 8-DPSK:

For DH1 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH3 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH5 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For AFH Mode:

For DH1 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (800 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH3 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (800 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.7.4 Test Result

Please refer to ANNEX A.5.

5.8 Conducted Spurious Emission & Authorized-band band-edge

5.8.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.8.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW = 300 kHz

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.8.4 Test Result

Please refer to ANNEX A.6.

5.9 Conducted Emission

5.9.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.9.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.9.4 Test Result

Please refer to ANNEX A.7.

5.10 Radiated Spurious Emission

5.10.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \cdot \log[\text{Field Strength } (\mu\text{V/m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: $54\text{dB}\mu\text{V/m}@3\text{m}$ (AV) and $74\text{dB}\mu\text{V/m}@3\text{m}$ (PK).

5.10.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1 \text{ GHz}$, 100 kHz for $f < 1 \text{ GHz}$

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.8.

5.11 Band Edge (Restricted-band band-edge)

5.11.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.11.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.11.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.11.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data


Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass
8-DPSK	2400 - 2483.5	79	15	Pass

Test plots


GFSK 2.4 GHz ~ 2.4415 GHz

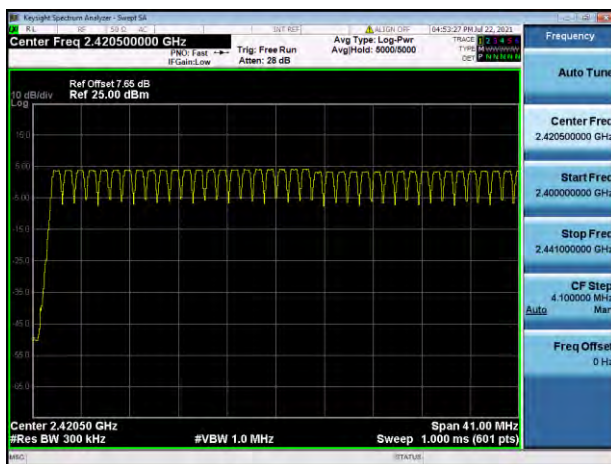


GFSK 2.4415 GHz ~ 2.4835 GHz

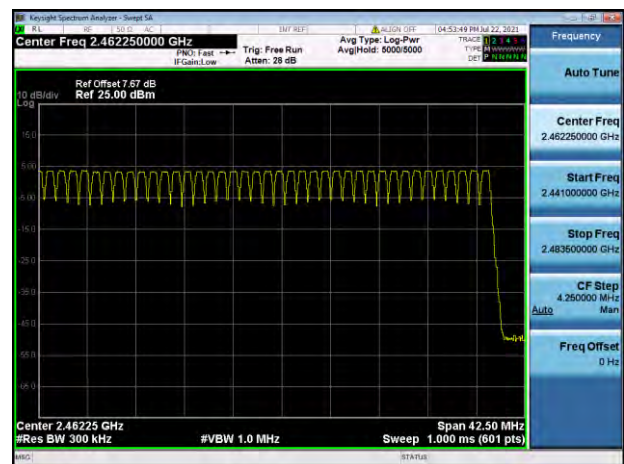

8-DPSK 2.4 GHz ~ 2.4415 GHz

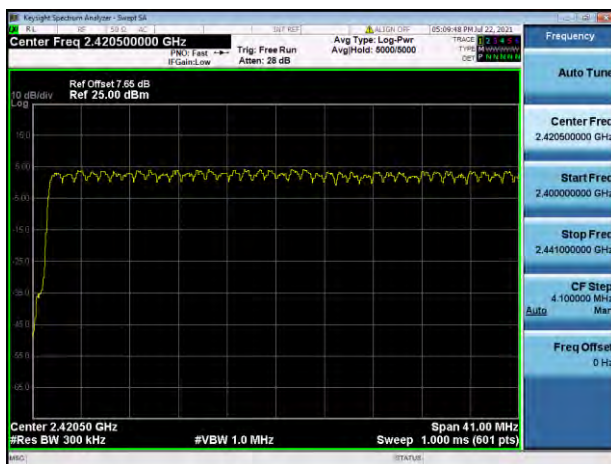

8-DPSK 2.4415 GHz ~ 2.4835 GHz

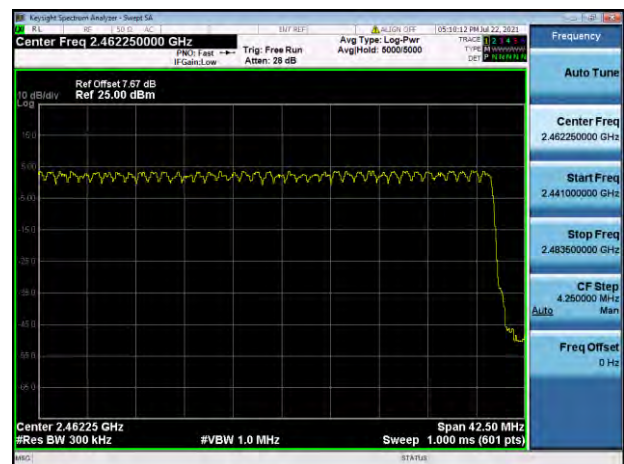

A.2 Peak Output Power

Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK		dBm	mW	
	dBm	mW			
Low	3.47	2.22	21	125	Pass
Middle	3.37	2.17			Pass
High	3.79	2.40			Pass

Channel	Measured Output Peak Power				Limit		Verdict
	π/4-DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW			
Low	4.35	2.72	4.84	3.05	21	125	Pass
Middle	4.27	2.67	4.68	2.94			Pass
High	4.72	2.97	5.19	3.31			Pass

Test plots

GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL



$\pi/4$ -DQPSK LOW CHANNEL



$\pi/4$ -DQPSK MIDDLE CHANNEL



$\pi/4$ -DQPSK HIGH CHANNEL



8-DPSK LOW CHANNEL



8-DPSK MIDDLE CHANNEL



8-DPSK HIGH CHANNEL



A.3 20 dB and 99% bandwidth


Test Data

GFSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.025000	0.904070
Middle	1.030000	0.901690
High	1.025000	0.910170
$\pi/4$ -DQPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.350000	1.195600
Middle	1.355000	1.192300
High	1.355000	1.198600
8-DPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.360000	1.190900
Middle	1.365000	1.193500
High	1.355000	1.192400


Test plots

20 dB Bandwidth

GFSK LOW CHANNEL

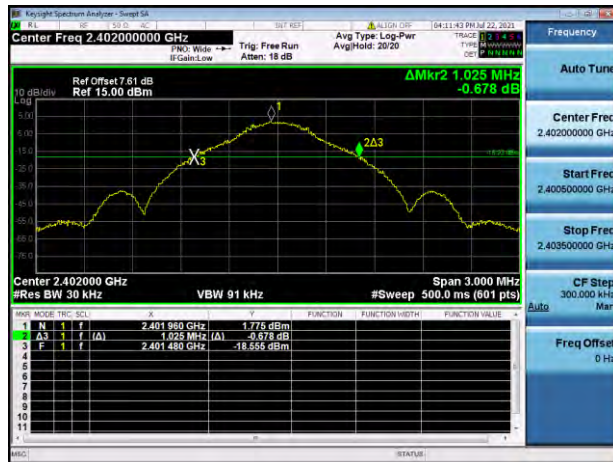

GFSK MIDDLE CHANNEL

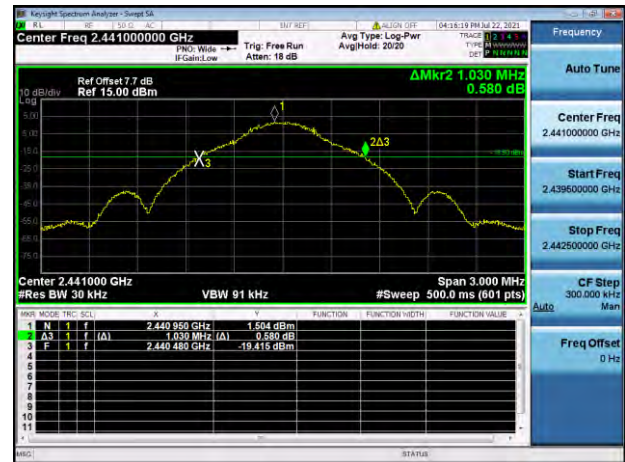

GFSK HIGH CHANNEL



π/4-DQPSK LOW CHANNEL



π/4-DQPSK MIDDLE CHANNEL



[illegible]

Center Freq 2.402000000 GHz

Ref Offset 7.61 dB
Ref 15.00 dBm

DMkr2 1.360 MHz
-0.357 dB

2A3

23.351 dBm

Center 2.402000 GHz
#RBW 300 kHz

VBW 91 kHz

Span 3.000 MHz
#Sweep 500.0 ms (601 pts)

Trace	Frequency	Power	Function	Function Width	Function Value
1	N	2.401 965 GHz	-3.244 dBm		
2	A3	1.360 MHz (Δ)	-0.357 dB		
3	F	2.401 310 GHz	-23.351 dBm		

[illegible]

Keyight Spectrum Analyzer - Sweep 25

Center Freq 2.480000000 GHz

Ref Offset 7.6 dB

Ref 15.00 dBm

DMkr2 1.355 MHz

0.088 dB

10 dBm

0 dB

-20 dB

-40 dB

-60 dB

-80 dB

-100 dB

-120 dB

-140 dB

-160 dB

-180 dB

-200 dB

-220 dB

-240 dB

-260 dB

-280 dB

-300 dB

-320 dB

-340 dB

-360 dB

-380 dB

-400 dB

-420 dB

-440 dB

-460 dB

-480 dB

-500 dB

-520 dB

-540 dB

-560 dB

-580 dB

-600 dB

-620 dB

-640 dB

-660 dB

-680 dB

-700 dB

-720 dB

-740 dB

-760 dB

-780 dB

-800 dB

-820 dB

-840 dB

-860 dB

-880 dB

-900 dB

-920 dB

-940 dB

-960 dB

-980 dB

-1000 dB

-1020 dB

-1040 dB

-1060 dB

-1080 dB

-1100 dB

-1120 dB

-1140 dB

-1160 dB

-1180 dB

-1200 dB

-1220 dB

-1240 dB

-1260 dB

-1280 dB

-1300 dB

-1320 dB

-1340 dB

-1360 dB

-1380 dB

-1400 dB

-1420 dB

-1440 dB

-1460 dB

-1480 dB

-1500 dB

-1520 dB

-1540 dB

-1560 dB

-1580 dB

-1600 dB

-1620 dB

-1640 dB

-1660 dB

-1680 dB

-1700 dB

-1720 dB

-1740 dB

-1760 dB

-1780 dB

-1800 dB

-1820 dB

-1840 dB

-1860 dB

-1880 dB

-1900 dB

-1920 dB

-1940 dB

-1960 dB

-1980 dB

-2000 dB

-2020 dB

-2040 dB

-2060 dB

-2080 dB

-2100 dB

-2120 dB

-2140 dB

-2160 dB

-2180 dB

-2200 dB

-2220 dB

-2240 dB

-2260 dB

-2280 dB

-2300 dB

-2320 dB

-2340 dB

-2360 dB

-2380 dB

-2400 dB

-2420 dB

-2440 dB

-2460 dB

-2480 dB

-2500 dB

-2520 dB

-2540 dB

-2560 dB

-2580 dB

-2600 dB

-2620 dB

-2640 dB

-2660 dB

-2680 dB

-2700 dB

-2720 dB

-2740 dB

-2760 dB

-2780 dB

-2800 dB

-2820 dB

-2840 dB

-2860 dB

-2880 dB

-2900 dB

-2920 dB

-2940 dB

-2960 dB

-2980 dB

-3000 dB

-3020 dB

-3040 dB

-3060 dB

-3080 dB

-3100 dB

-3120 dB

-3140 dB

-3160 dB

-3180 dB

-3200 dB

-3220 dB

-3240 dB

-3260 dB

-3280 dB

-3300 dB

-3320 dB

-3340 dB

-3360 dB

-3380 dB

-3400 dB

-3420 dB

-3440 dB

-3460 dB

-3480 dB

-3500 dB

-3520 dB

-3540 dB

-3560 dB

-3580 dB

-3600 dB

-3620 dB

-3640 dB

-3660 dB

-3680 dB

-3700 dB

-3720 dB

-3740 dB

-3760 dB

-3780 dB

-3800 dB

-3820 dB

-3840 dB

-3860 dB

-3880 dB

-3900 dB

-3920 dB

-3940 dB

-3960 dB

-3980 dB

-4000 dB

-4020 dB

-4040 dB

-4060 dB

-4080 dB

-4100 dB

-4120 dB

-4140 dB

-4160 dB

-4180 dB

-4200 dB

-4220 dB

-4240 dB

-4260 dB

-4280 dB

-4300 dB

-4320 dB

-4340 dB

-4360 dB

-4380 dB

-4400 dB

-4420 dB

-4440 dB

-4460 dB

-4480 dB

-4500 dB

-4520 dB

-4540 dB

-4560 dB

-4580 dB

-4600 dB

-4620 dB

-4640 dB

-4660 dB

-4680 dB

-4700 dB

-4720 dB

-4740 dB

-4760 dB

-4780 dB

-4800 dB

-4820 dB

-4840 dB

-4860 dB

-4880 dB

-4900 dB

-4920 dB

-4940 dB

-4960 dB

-4980 dB

-5000 dB

-5020 dB

-5040 dB

-5060 dB

-5080 dB

-5100 dB

-5120 dB

-5140 dB

-5160 dB

-5180 dB

-5200 dB

-5220 dB

-5240 dB

-5260 dB

-5280 dB

-5300 dB

-5320 dB

-5340 dB

-5360 dB

-5380 dB

-5400 dB

-5420 dB

-5440 dB

-5460 dB

-5480 dB

-5500 dB

-5520 dB

-5540 dB

-5560 dB

-5580 dB

-5600 dB

-5620 dB

-5640 dB

-5660 dB

-5680 dB

-5700 dB

-5720 dB

-5740 dB

-5760 dB

-5780 dB

-5800 dB

-5820 dB

-5840 dB

-5860 dB

-5880 dB

-5900 dB

-5920 dB

-5940 dB

-5960 dB

-5980 dB

-6000 dB

-6020 dB

-6040 dB

-6060 dB

-6080 dB

-6100 dB

-6120 dB

-6140 dB

-6160 dB

-6180 dB

-6200 dB

-6220 dB

-6240 dB

-6260 dB

-6280 dB

-6300 dB

-6320 dB

-6340 dB

-6360 dB

-6380 dB

-6400 dB

-6420 dB

-6440 dB

-6460 dB

-6480 dB

-6500 dB

-6520 dB

-6540 dB

-6560 dB

-6580 dB

-6600 dB

-6620 dB

-6640 dB

-6660 dB

-6680 dB

-6700 dB

-6720 dB

-6740 dB

-6760 dB

-6780 dB

-6800 dB


-682

99% Bandwidth

GFSK LOW CHANNEL




GFSK MIDDLE CHANNEL

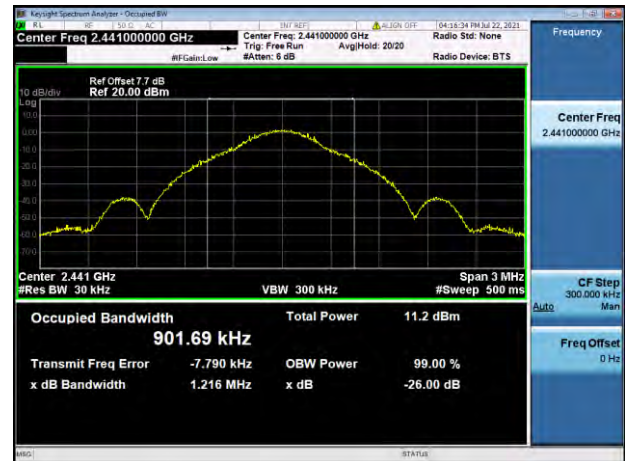


GFSK HIGH CHANNEL



$\pi/4$ -DQPSK LOW CHANNEL

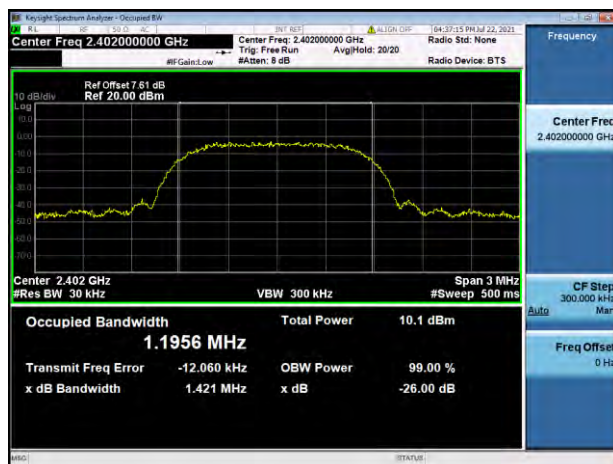

$\pi/4$ -DQPSK MIDDLE CHANNEL

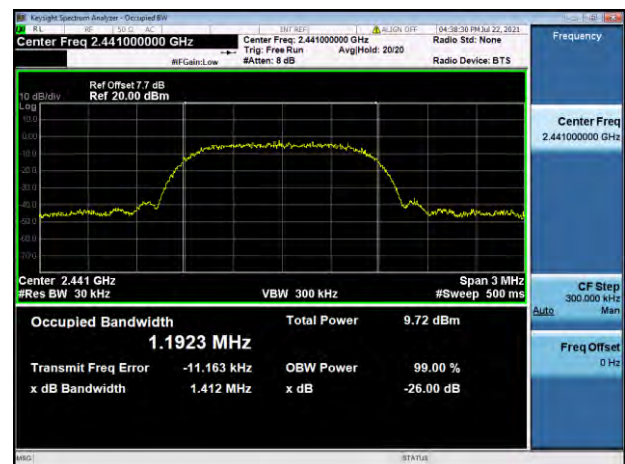

$\pi/4$ -DQPSK HIGH CHANNEL




8-DPSK LOW CHANNEL



8-DPSK MIDDLE CHANNEL



8-DPSK HIGH CHANNEL

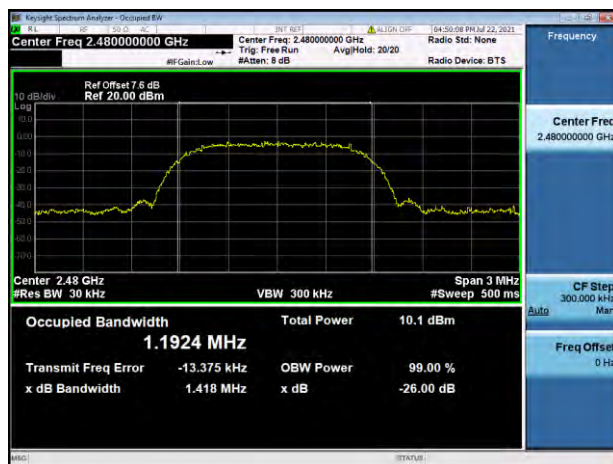

A.4 Hopping Frequency Separation

Test Data


Mode	Frequency separation (MHz)	2/3 of the 20 dB Bandwidth (MHz)	Verdict
GFSK	1	0.686667	Pass
8-DPSK	1	0.910000	Pass

Test Plots

GFSK



8-DPSK

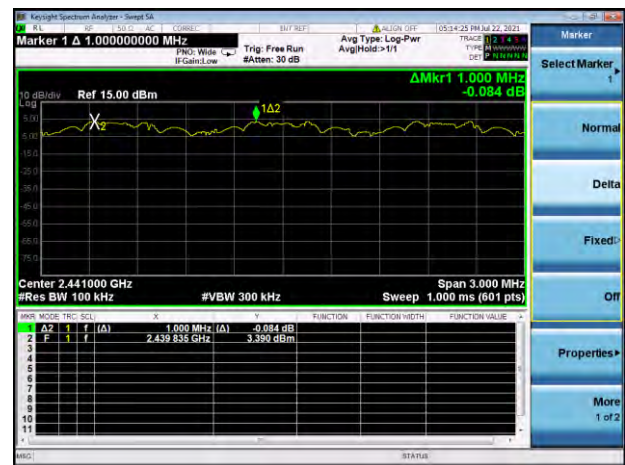


A.5 Average Time of Occupancy

Test Data


GFSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.3808	121.856	0.4	Pass
DH 3	1.6270	260.320	0.4	Pass
DH 5	2.8800	307.200	0.4	Pass
8-DPSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.39200	125.440	0.4	Pass
DH 3	1.64200	262.720	0.4	Pass
DH 5	2.89300	308.587	0.4	Pass
AFH Mode				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.38080	60.928	0.4	Pass
DH 3	1.63500	130.800	0.4	Pass
DH 5	2.88000	153.600	0.4	Pass

Test Plots


GFSK DH1

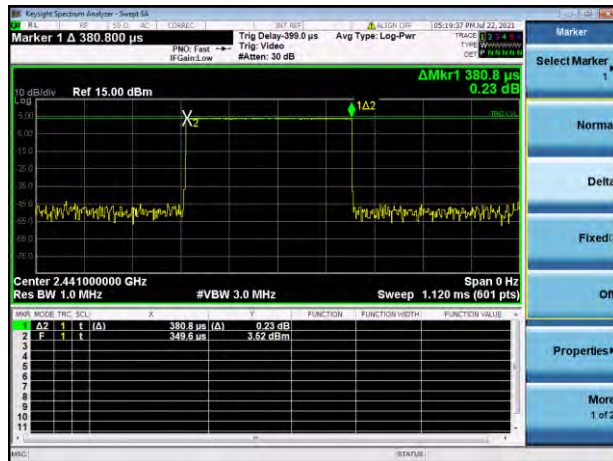

GFSK DH3

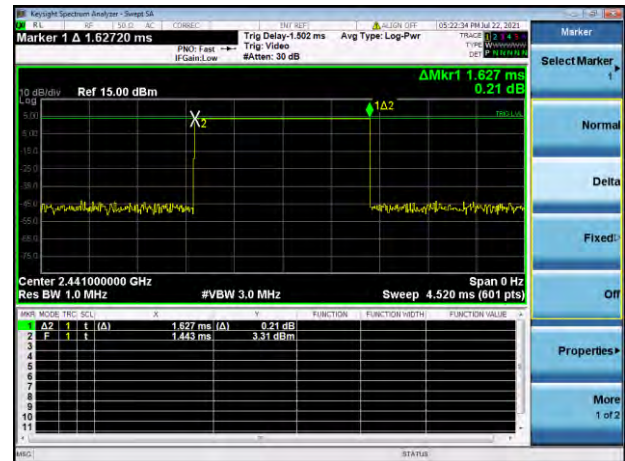


GFSK DH5

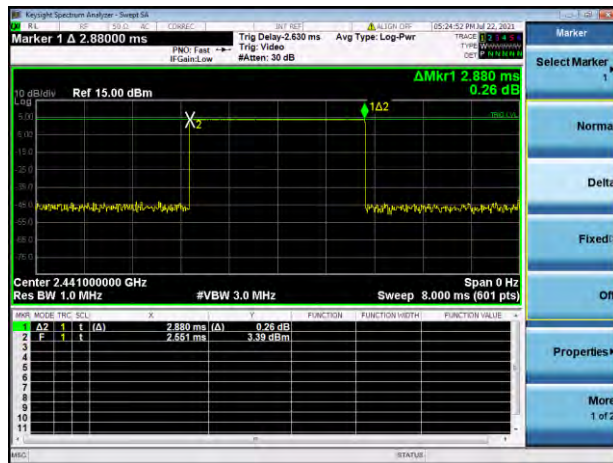


8-DPSK DH1




8-DPSK DH3

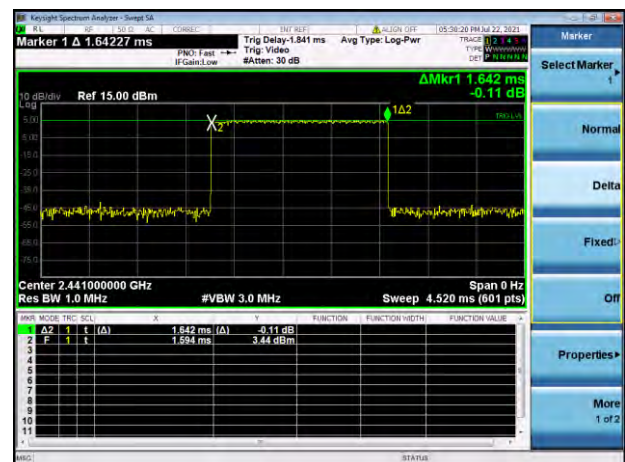


8-DPSK DH5

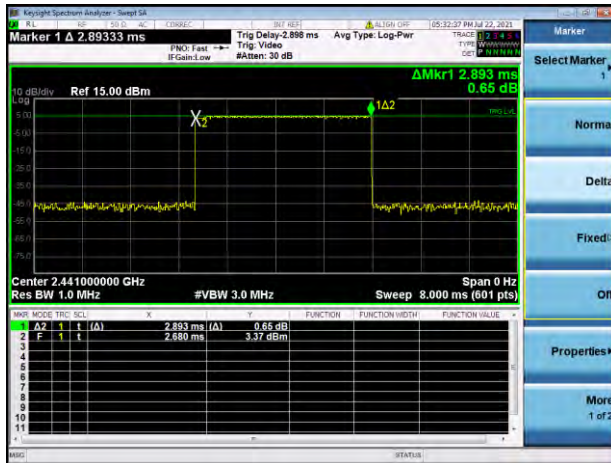

AFH Mode DH1

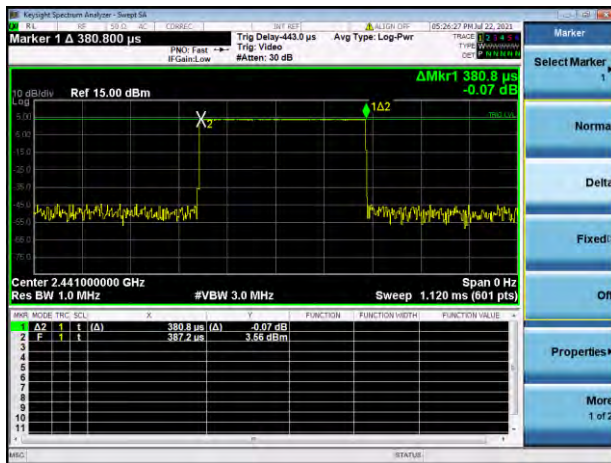

AFH Mode DH3

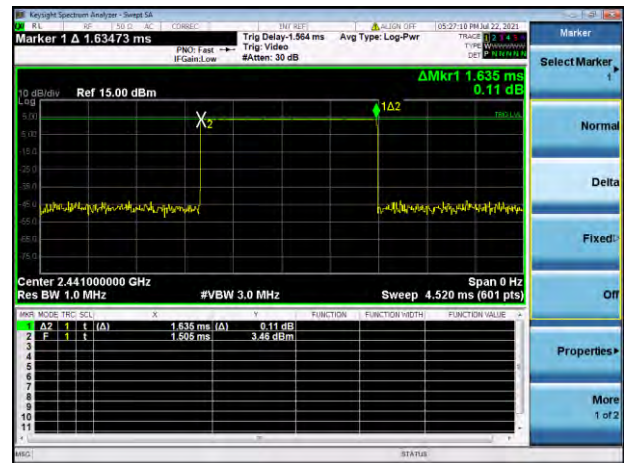

AFH Mode DH5



A.6 Conducted Spurious Emissions & Authorized-band band-edge

Test Data


GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-34.95	2.94	-17.057	Pass
Middle	-36.39	3.01	-16.988	Pass
High	-36.24	3.27	-16.730	Pass
8-DPSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-36.36	0.97	-19.033	Pass
Middle	-35.78	0.58	-19.420	Pass
High	-36.85	1.12	-18.882	Pass
Hopping Mode				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-35.92	3.77	-16.228	Pass
8-DPSK	-35.79	4.06	-15.939	Pass

Test Plots


GFSK LOW CHANNEL, CARRIER LEVEL




GFSK LOW CHANNEL, BAND EDGE

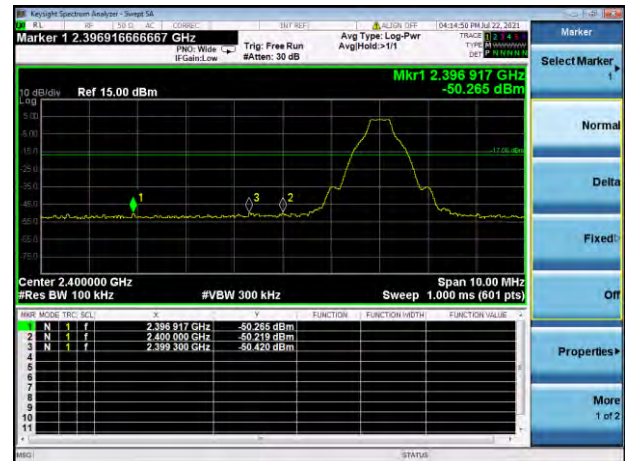

GFSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

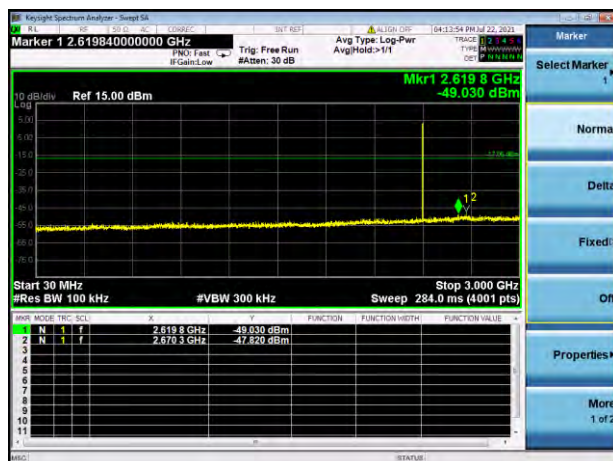


GFSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

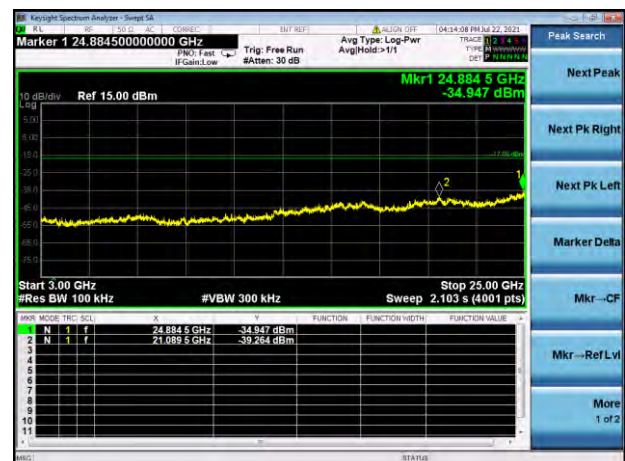


GFSK MIDDLE CHANNEL, CARRIER LEVEL




GFSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

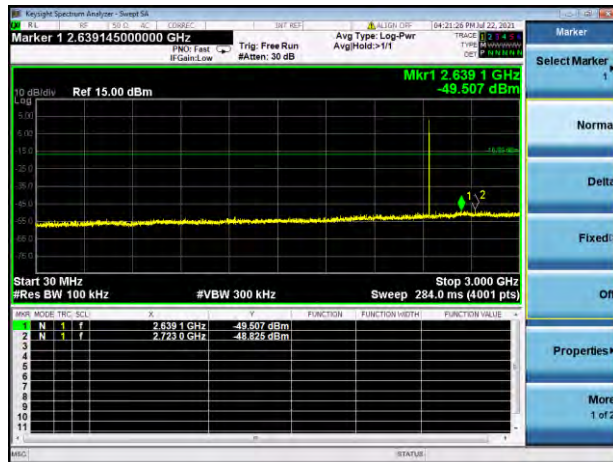


GFSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

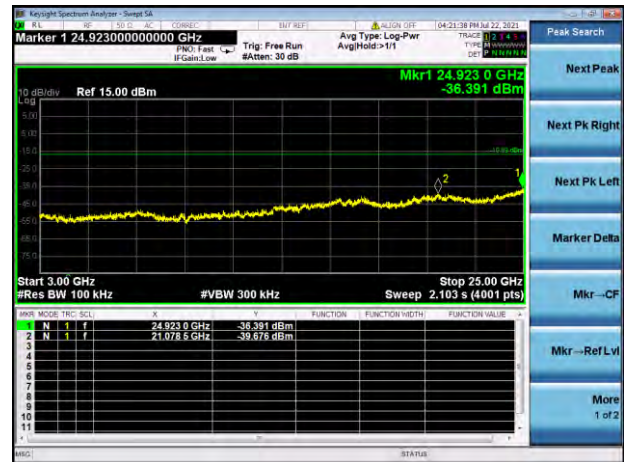

GFSK HIGH CHANNEL, CARRIER LEVEL

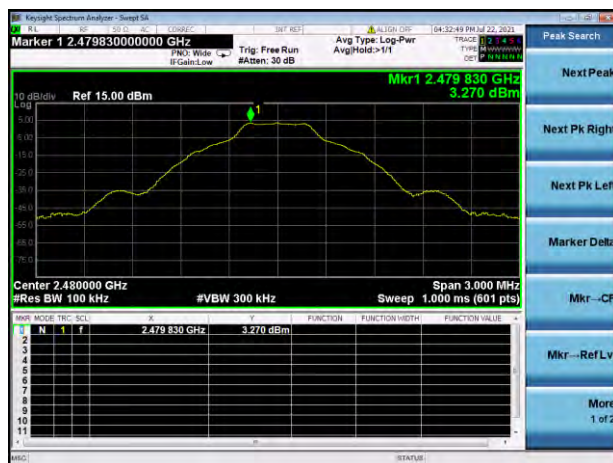


GFSK HIGH CHANNEL, BAND EDGE

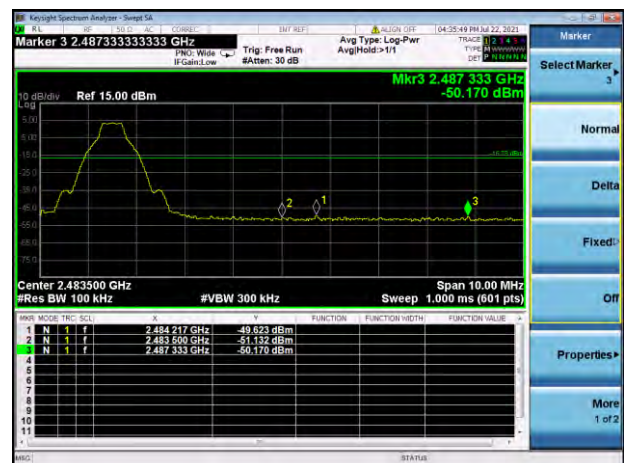


GFSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz




GFSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

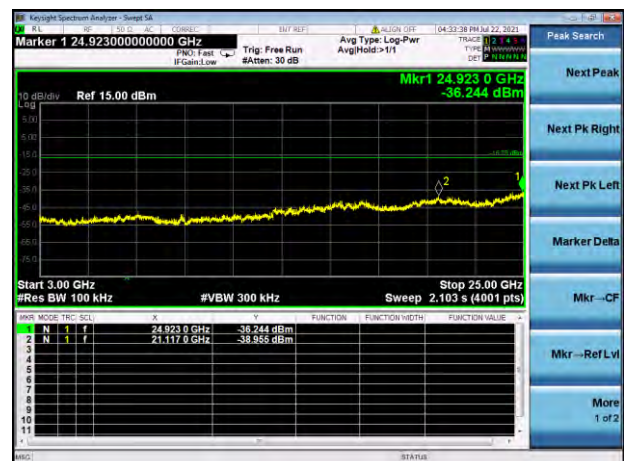

8-DPSK LOW CHANNEL, CARRIER LEVEL

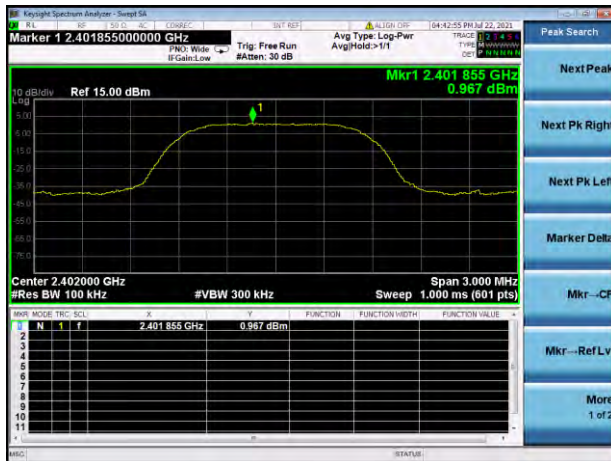


8-DPSK LOW CHANNEL, BAND EDGE

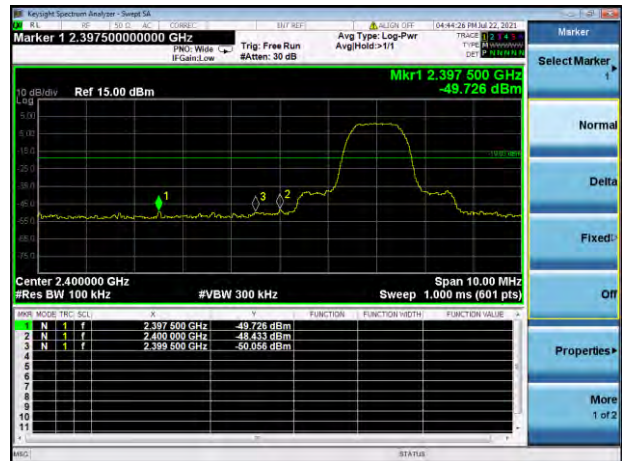


8-DPSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz




8-DPSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

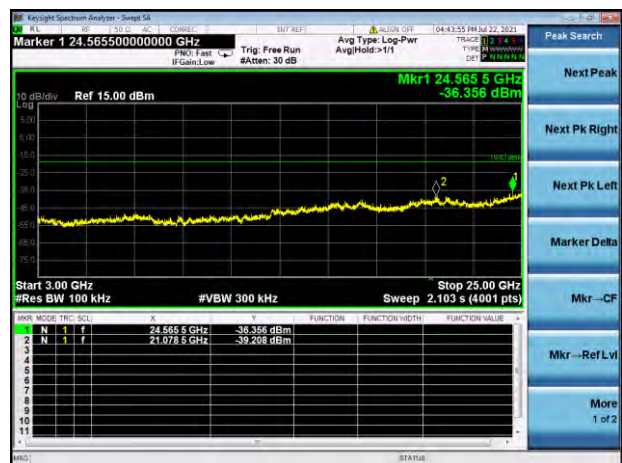

8-DPSK MIDDLE CHANNEL, CARRIER LEVEL

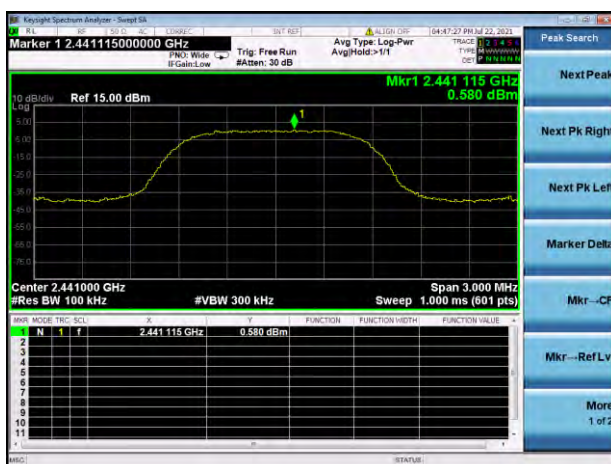


8-DPSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

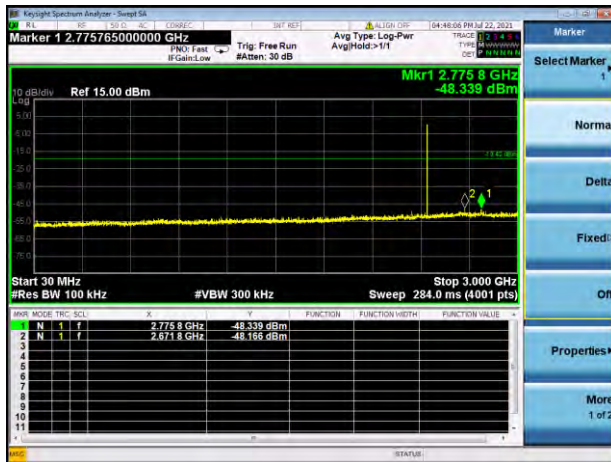


8-DPSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz




8-DPSK HIGH CHANNEL, CARRIER LEVEL

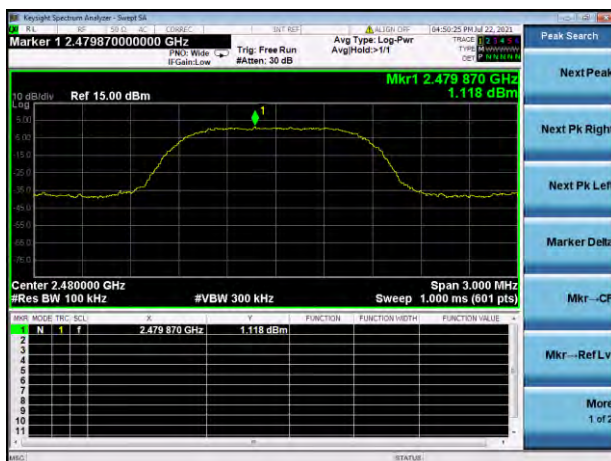


8-DPSK HIGH CHANNEL, BAND EDGE

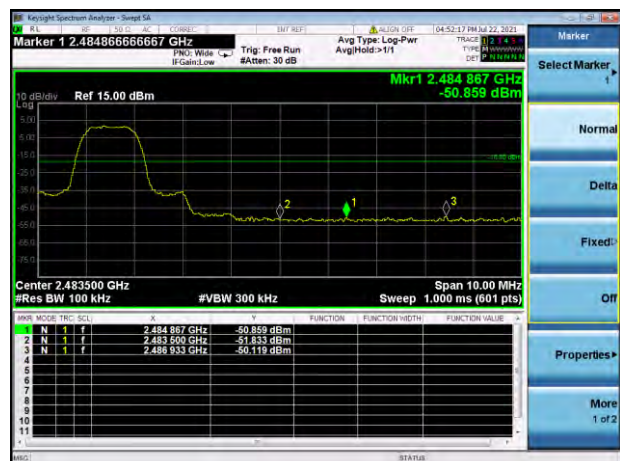


8-DPSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

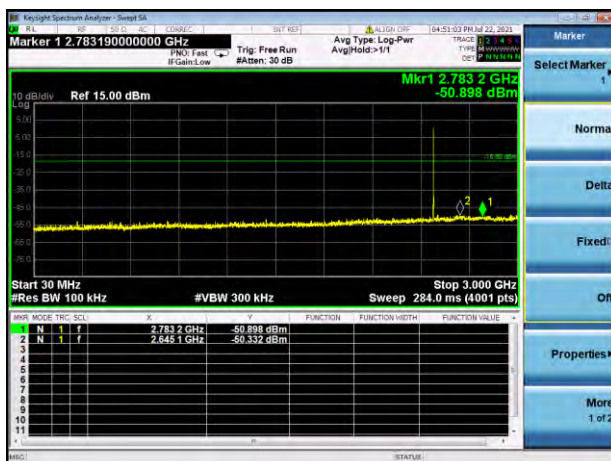


8-DPSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

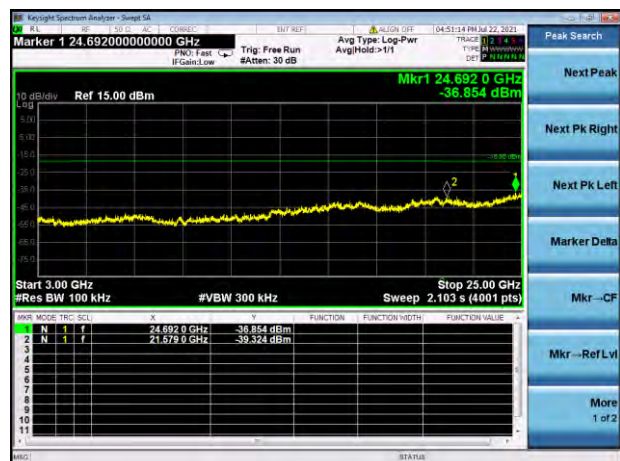

GFSK HOPPING, CARRIER LEVEL

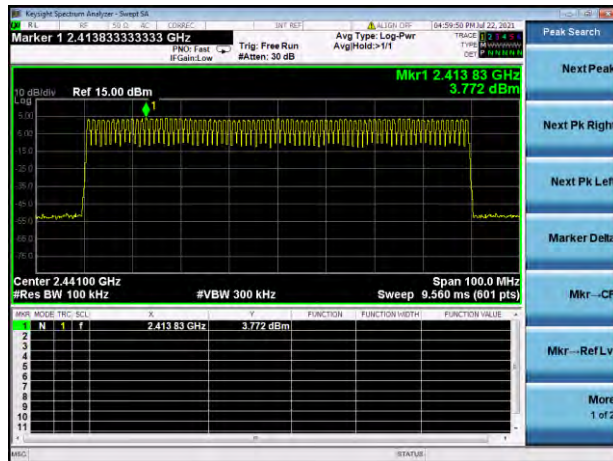

GFSK HOPPING BAND EDGE (LOW)

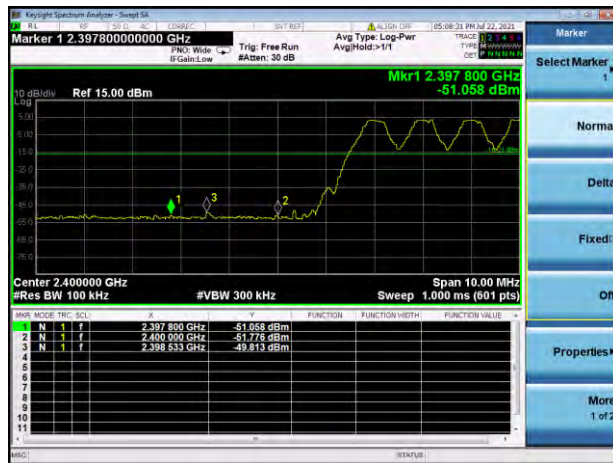


GFSK HOPPING BAND EDGE (HIGH)




GFSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz



GFSK Hopping Mode, SPURIOUS 30 GHz ~ 25 GHz

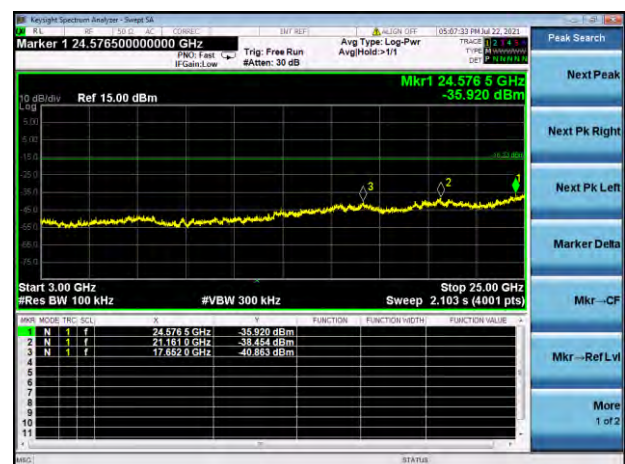

8-DPSK HOPPING, CARRIER LEVEL

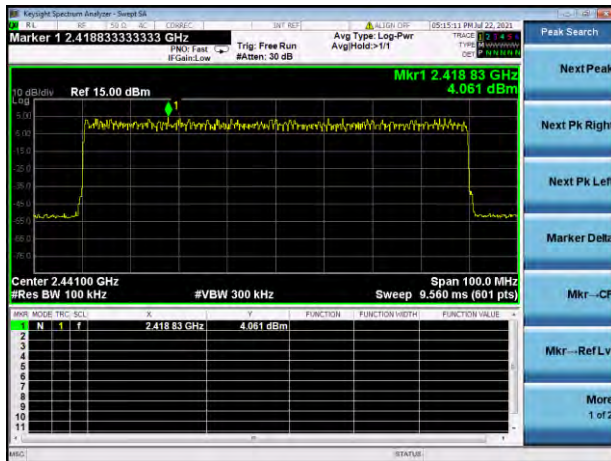


8-DPSK Hopping BAND EDGE (LOW)




8-DPSK Hopping BAND EDGE (HIGH)



8-DPSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

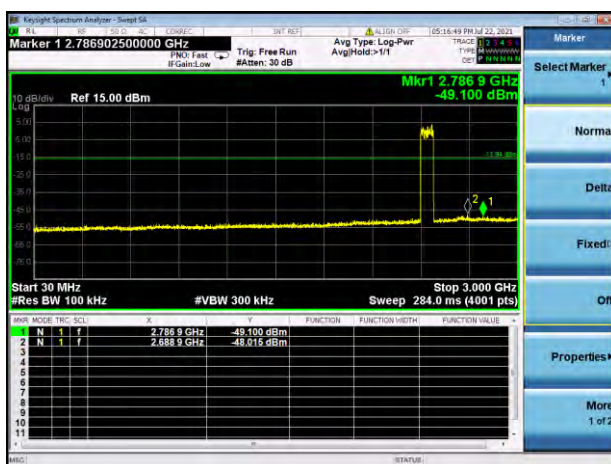

8-DPSK Hopping Mode, SPURIOUS 30 GHz ~ 25 GHz

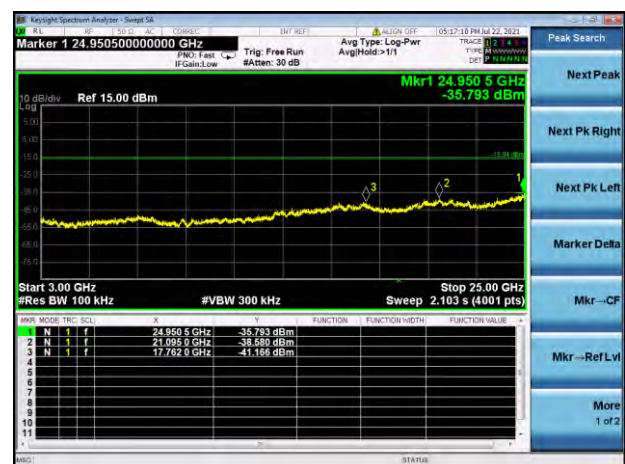

A.7 Conducted Emissions

Note¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.


Note²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15B_Class B

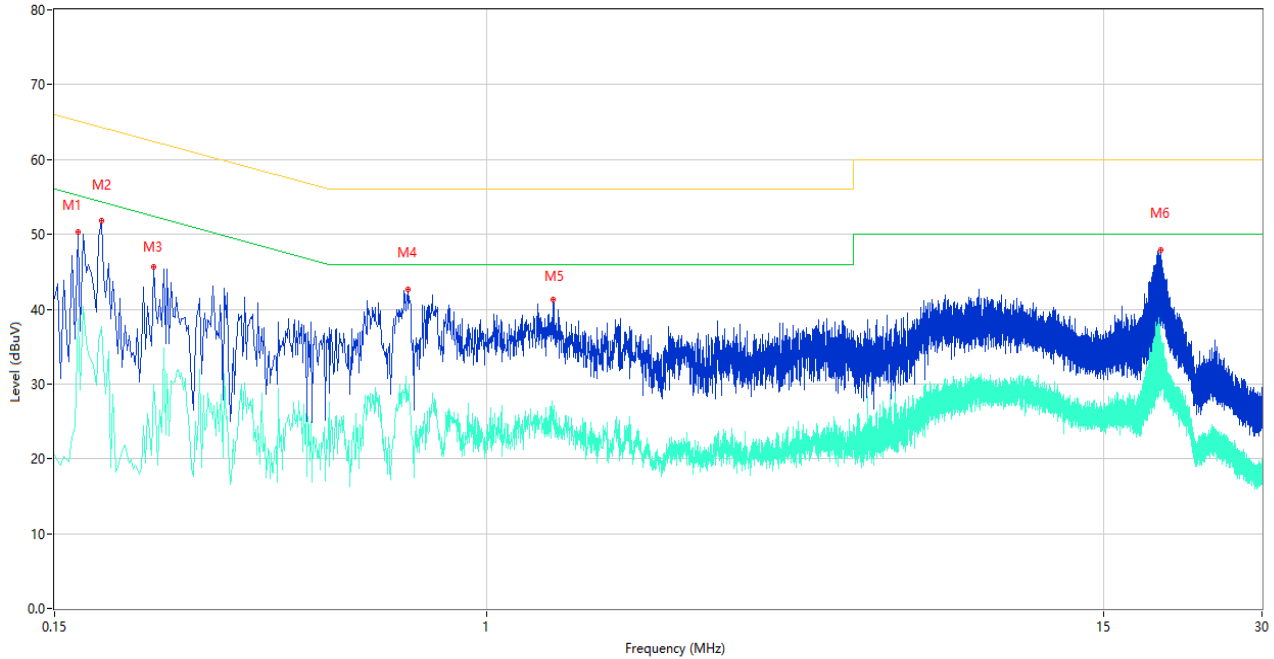

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.166	50.25	10.40	65.16	-14.91	Peak	L	Pass
1**	0.166	38.79	10.40	55.16	-16.37	AV	L	Pass
2	0.184	51.81	10.39	64.30	-12.49	Peak	L	Pass
2**	0.184	37.71	10.39	54.30	-16.59	AV	L	Pass
3	0.232	45.59	10.36	62.38	-16.79	Peak	L	Pass
3**	0.232	30.03	10.36	52.38	-22.35	AV	L	Pass
4	0.706	42.58	10.26	56.00	-13.42	Peak	L	Pass
4**	0.706	28.76	10.26	46.00	-17.24	AV	L	Pass
5	1.334	41.35	10.24	56.00	-14.65	Peak	L	Pass
5**	1.334	26.52	10.24	46.00	-19.48	AV	L	Pass
6	19.258	47.84	10.53	60.00	-12.16	Peak	L	Pass
6**	19.258	34.38	10.53	50.00	-15.62	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15B_Class B

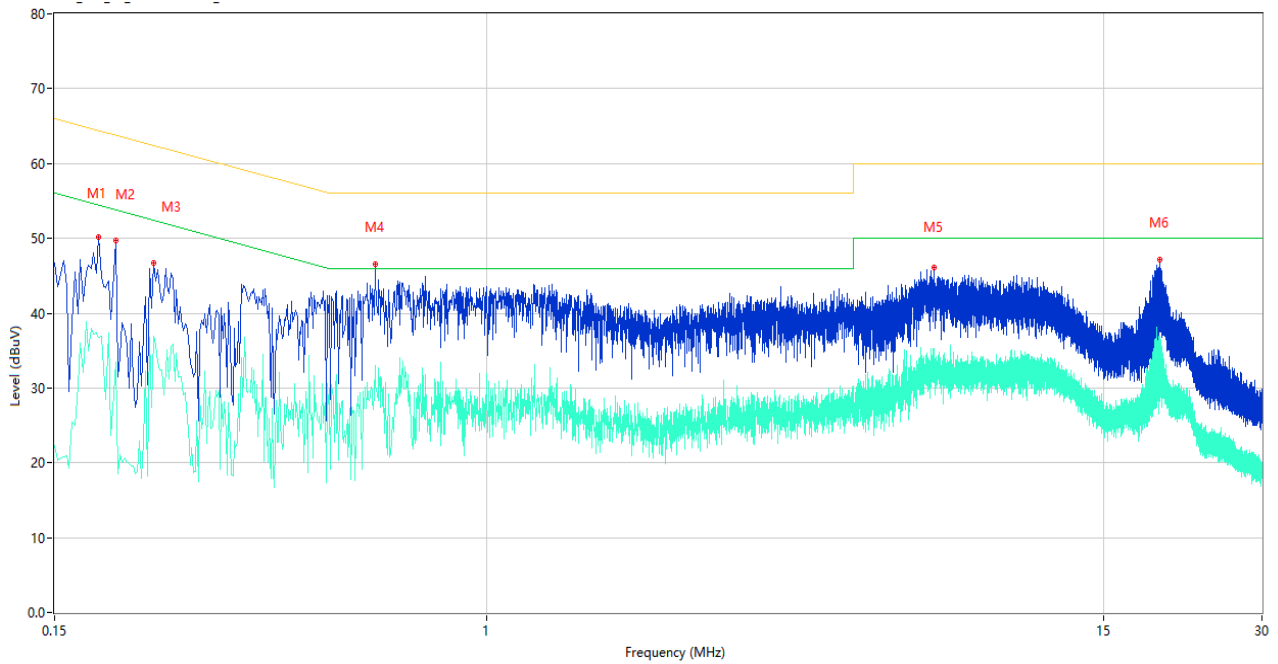

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.182	50.10	10.39	64.39	-14.29	Peak	N	Pass
1**	0.182	36.73	10.39	54.39	-17.66	AV	N	Pass
2	0.196	49.73	10.38	63.78	-14.05	Peak	N	Pass
2**	0.196	33.49	10.38	53.78	-20.29	AV	N	Pass
3	0.232	46.74	10.36	62.38	-15.64	Peak	N	Pass
3**	0.232	36.92	10.36	52.38	-15.46	AV	N	Pass
4	0.612	46.57	10.28	56.00	-9.43	Peak	N	Pass
4**	0.612	33.04	10.28	46.00	-12.96	AV	N	Pass
5	7.130	46.06	10.34	60.00	-13.94	Peak	N	Pass
5**	7.130	33.53	10.34	50.00	-16.47	AV	N	Pass
6	19.170	47.15	10.52	60.00	-12.85	Peak	N	Pass
6**	19.170	36.87	10.52	50.00	-13.13	AV	N	Pass

A.8 Radiated Spurious Emission

Test Data and Plots

Note¹: The symbol of “--” in the table which means not application.


Note²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note³: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and DH5-Hopping mode is the worst.

Note⁴: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)


The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

30 MHz to 1 GHz, ANT H

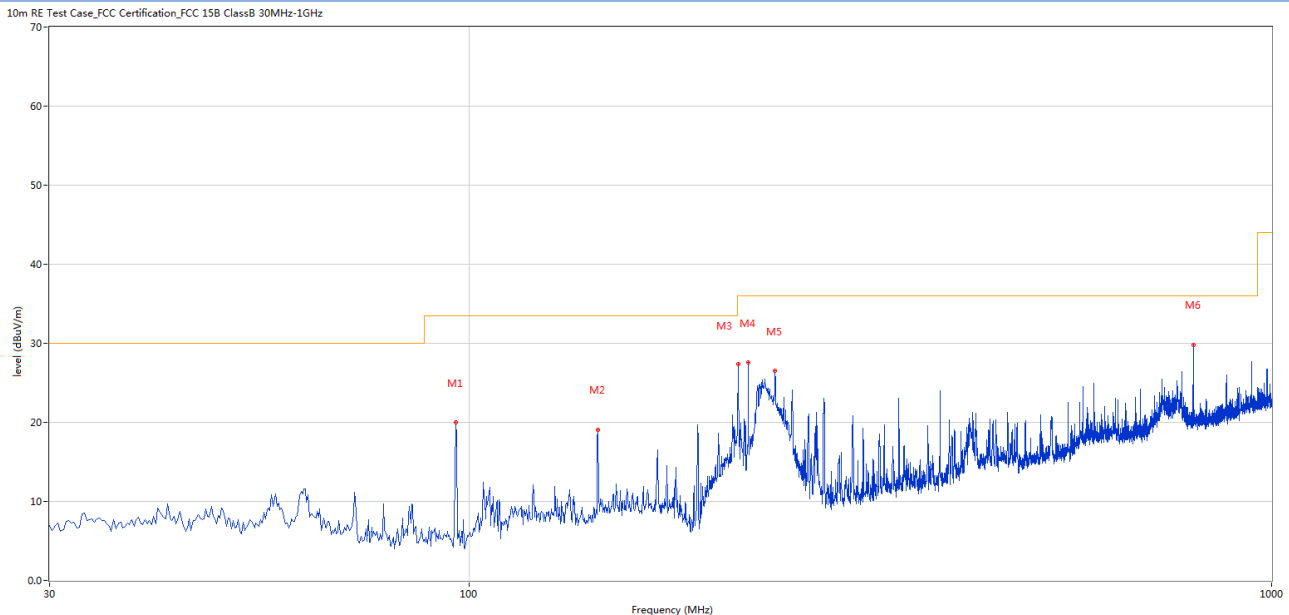

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	96.186	19.98	-30.42	33.5	-13.52	Peak	135.00	200	Horizontal	Pass
2	144.674	19.05	-26.01	33.5	-14.45	Peak	246.00	200	Horizontal	Pass
3	216.436	27.40	-28.74	36.0	-8.60	Peak	241.00	200	Horizontal	Pass
4	222.739	27.56	-28.54	36.0	-8.44	Peak	186.00	200	Horizontal	Pass
5	240.437	26.54	-27.86	36.0	-9.46	Peak	186.00	200	Horizontal	Pass
6	799.745	29.77	-14.27	36.0	-6.23	Peak	290.00	100	Horizontal	Pass

30 MHz to 1 GHz, ANT V

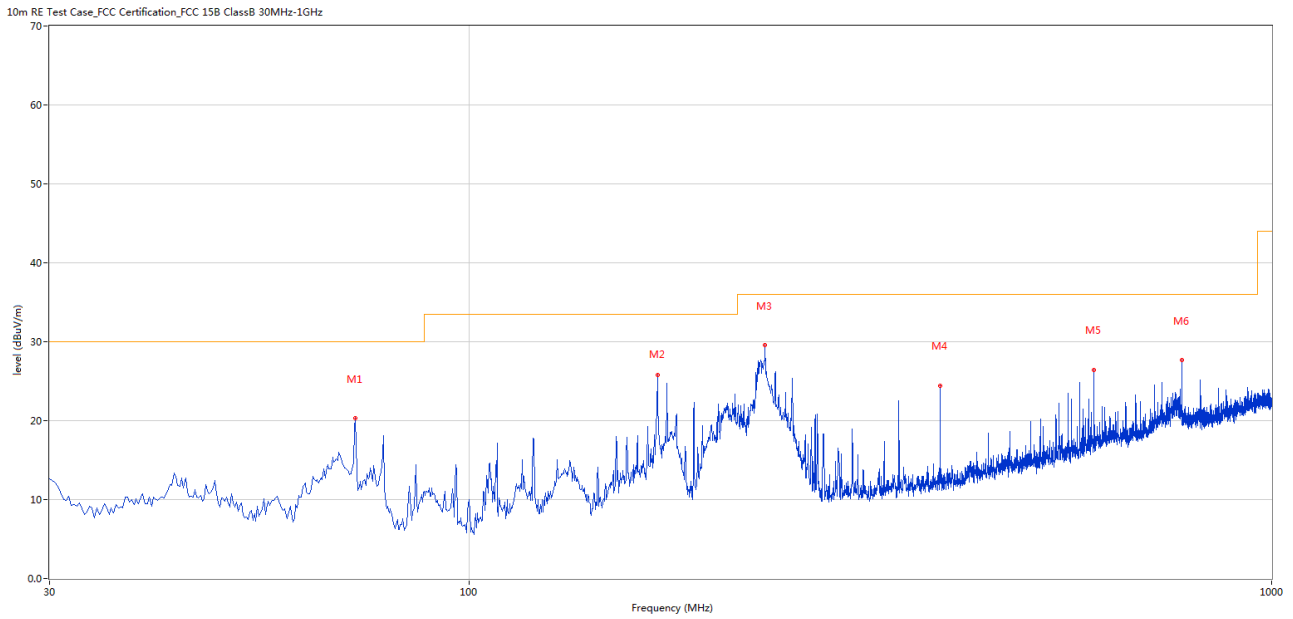

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	72.184	20.28	-30.23	30.0	-9.72	Peak	144.00	100	Vertical	Pass
2	171.585	25.76	-26.92	33.5	-7.74	Peak	174.00	100	Vertical	Pass
3	233.649	29.54	-28.01	36.0	-6.46	Peak	0.00	100	Vertical	Pass
4	386.143	24.44	-23.42	36.0	-11.56	Peak	179.00	100	Vertical	Pass
5	600.702	26.46	-18.20	36.0	-9.54	Peak	226.00	200	Vertical	Pass
6	772.349	27.67	-14.53	36.0	-8.33	Peak	247.00	200	Vertical	Pass


Test Data and Plots (1 GHz ~ 10th Harmonic)

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious from 18GHz-25GHz is noise only, do not show on the report.

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

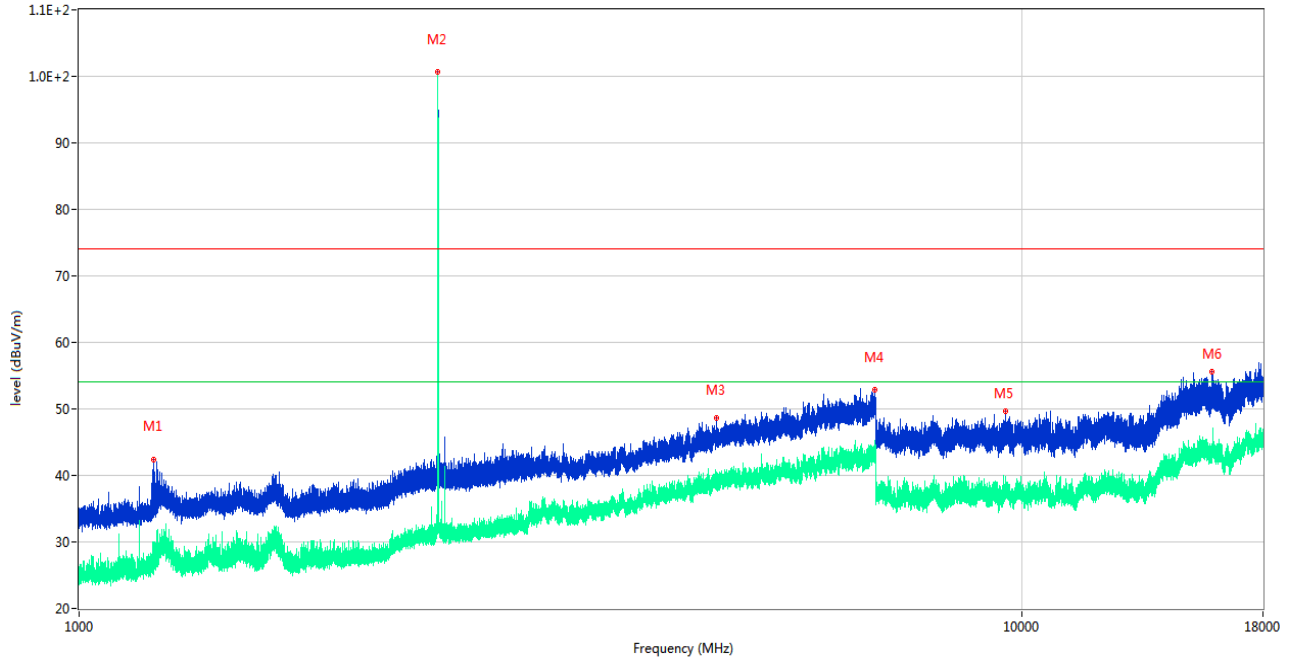

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1200.500	42.45	-15.01	74.0	-31.55	Peak	295.00	150	Horizontal	Pass
1**	1200.500	30.05	-15.01	54.0	-23.95	AV	295.00	150	Horizontal	Pass
2	2401.800	100.63	-10.75	74.0	26.63	Peak	176.00	150	Horizontal	N/A
2**	2401.800	99.71	-10.75	54.0	45.71	AV	176.00	150	Horizontal	N/A
3	4735.000	48.69	-1.99	74.0	-25.31	Peak	98.00	150	Horizontal	Pass
3**	4735.000	40.48	-1.99	54.0	-13.52	AV	98.00	150	Horizontal	Pass
4	6969.600	52.92	5.13	74.0	-21.08	Peak	212.00	150	Horizontal	Pass
4**	6969.600	42.27	5.13	54.0	-11.73	AV	212.00	150	Horizontal	Pass
5	9605.037	49.64	18.78	74.0	-24.36	Peak	278.00	150	Horizontal	Pass
5**	9605.037	36.67	18.78	54.0	-17.33	AV	278.00	150	Horizontal	Pass
6	15894.750	55.61	23.29	74.0	-18.39	Peak	-2.00	150	Horizontal	Pass
6**	15894.750	42.71	23.29	54.0	-11.29	AV	-2.00	150	Horizontal	Pass

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

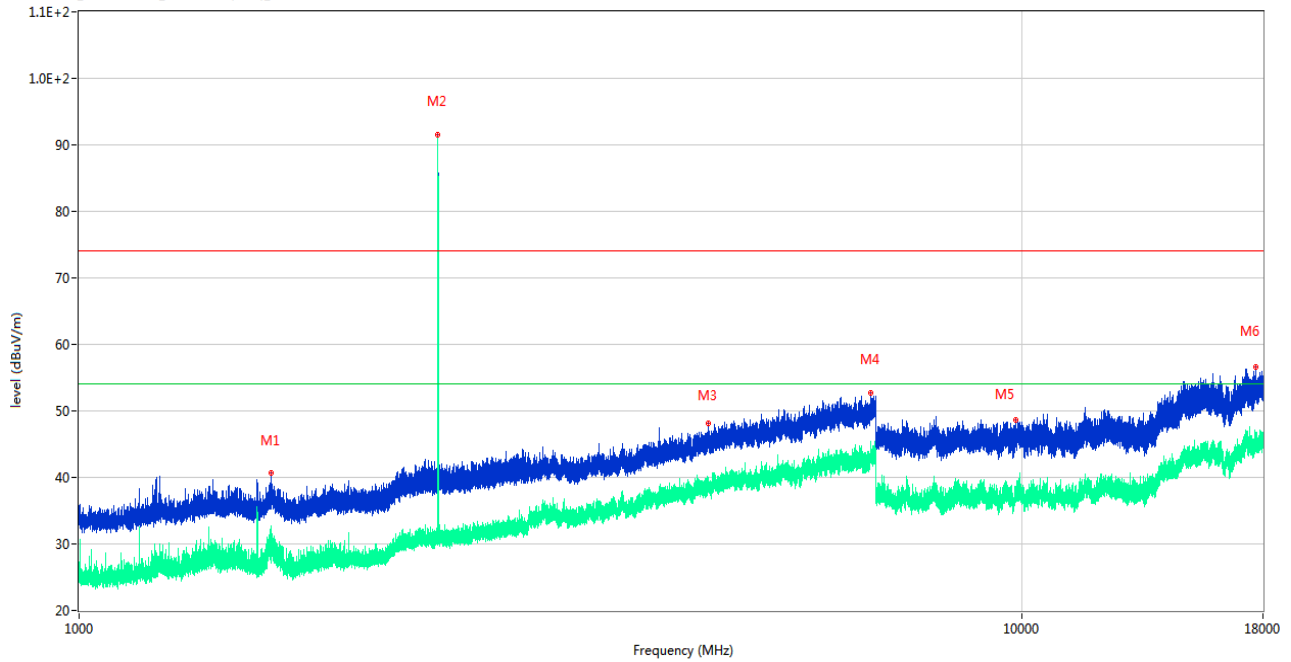

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1597.300	40.65	-15.21	74.0	-33.35	Peak	194.00	150	Vertical	Pass
1**	1597.300	29.21	-15.21	54.0	-24.79	AV	194.00	150	Vertical	Pass
2	2401.800	91.58	-10.75	74.0	17.58	Peak	103.00	150	Vertical	N/A
2**	2401.800	89.85	-10.75	54.0	35.85	AV	103.00	150	Vertical	N/A
3	4645.000	48.12	-1.76	74.0	-25.88	Peak	182.00	150	Vertical	Pass
3**	4645.000	38.77	-1.76	54.0	-15.23	AV	182.00	150	Vertical	Pass
4	6916.000	52.77	4.74	74.0	-21.23	Peak	67.00	150	Vertical	Pass
4**	6916.000	43.61	4.74	54.0	-10.39	AV	67.00	150	Vertical	Pass
5	9847.687	48.59	17.59	74.0	-25.41	Peak	233.00	150	Vertical	Pass
5**	9847.687	36.76	17.59	54.0	-17.24	AV	233.00	150	Vertical	Pass
6	17668.463	56.60	24.33	74.0	-17.40	Peak	172.00	150	Vertical	Pass
6**	17668.463	45.74	24.33	54.0	-8.26	AV	172.00	150	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

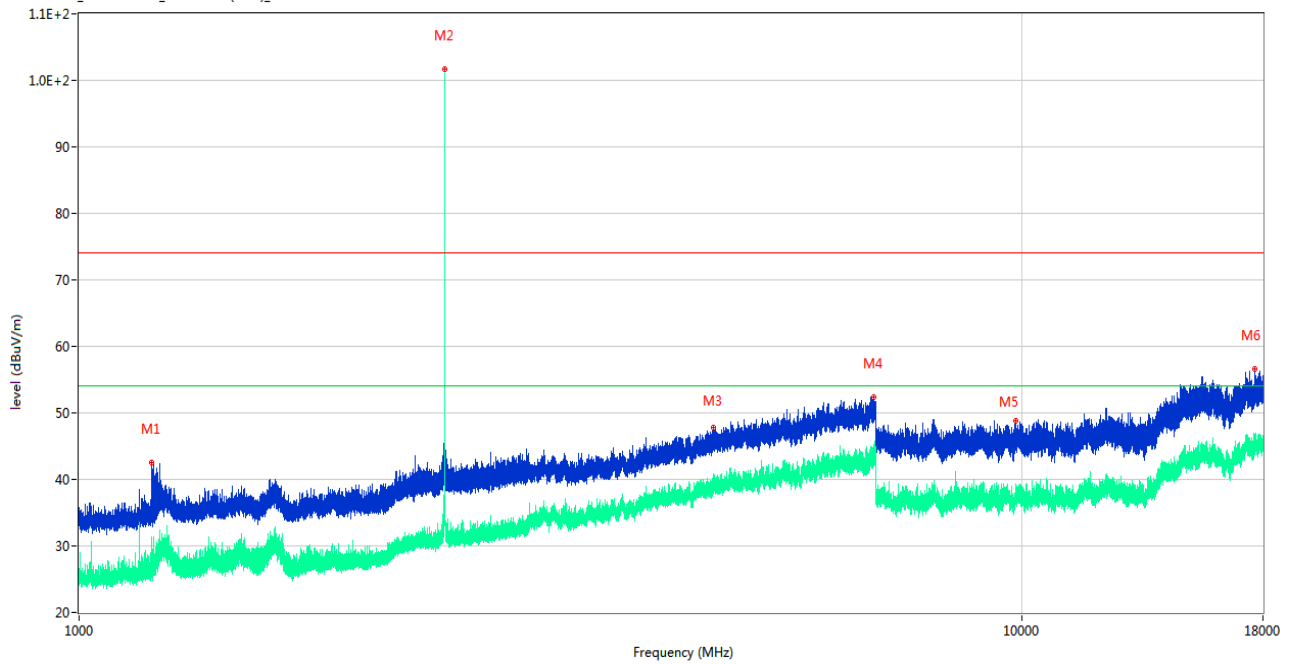

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1194.800	42.60	-14.94	74.0	-31.40	Peak	168.00	150	Horizontal	Pass
1**	1194.800	26.24	-14.94	54.0	-27.76	AV	168.00	150	Horizontal	Pass
2	2440.800	101.64	-10.52	74.0	27.64	Peak	178.00	150	Horizontal	N/A
2**	2440.800	100.66	-10.52	54.0	46.66	AV	178.00	150	Horizontal	N/A
3	4708.600	47.81	-2.39	74.0	-26.19	Peak	130.00	150	Horizontal	Pass
3**	4708.600	38.97	-2.39	54.0	-15.03	AV	130.00	150	Horizontal	Pass
4	6962.200	52.45	4.79	74.0	-21.55	Peak	337.00	150	Horizontal	Pass
4**	6962.200	43.38	4.79	54.0	-10.62	AV	337.00	150	Horizontal	Pass
5	9831.875	48.75	17.56	74.0	-25.25	Peak	164.00	150	Horizontal	Pass
5**	9831.875	37.98	17.56	54.0	-16.02	AV	164.00	150	Horizontal	Pass
6	17664.526	56.69	24.29	74.0	-17.31	Peak	173.00	150	Horizontal	Pass
6**	17664.526	44.98	24.29	54.0	-9.02	AV	173.00	150	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

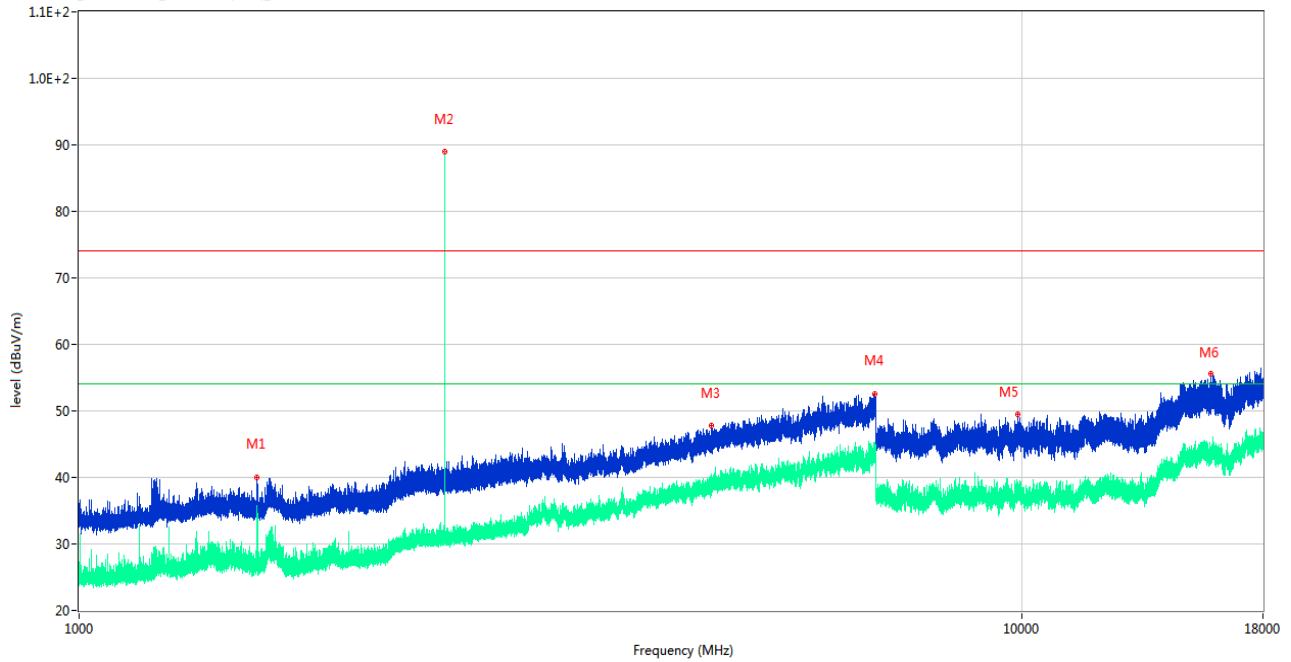

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1544.800	40.07	-14.87	74.0	-33.93	Peak	189.00	150	Vertical	Pass
1**	1544.800	32.08	-14.87	54.0	-21.92	AV	189.00	150	Vertical	Pass
2	2440.800	88.97	-10.52	74.0	14.97	Peak	107.00	150	Vertical	N/A
2**	2440.800	87.77	-10.52	54.0	33.77	AV	107.00	150	Vertical	N/A
3	4680.400	47.74	-2.38	74.0	-26.26	Peak	59.00	150	Vertical	Pass
3**	4680.400	38.17	-2.38	54.0	-15.83	AV	59.00	150	Vertical	Pass
4	6977.000	52.46	5.12	74.0	-21.54	Peak	330.00	150	Vertical	Pass
4**	6977.000	43.75	5.12	54.0	-10.25	AV	330.00	150	Vertical	Pass
5	9899.437	49.41	17.71	74.0	-24.59	Peak	154.00	150	Vertical	Pass
5**	9899.437	38.34	17.71	54.0	-15.66	AV	154.00	150	Vertical	Pass
6	15860.362	55.60	23.34	74.0	-18.40	Peak	19.00	150	Vertical	Pass
6**	15860.362	42.93	23.34	54.0	-11.07	AV	19.00	150	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

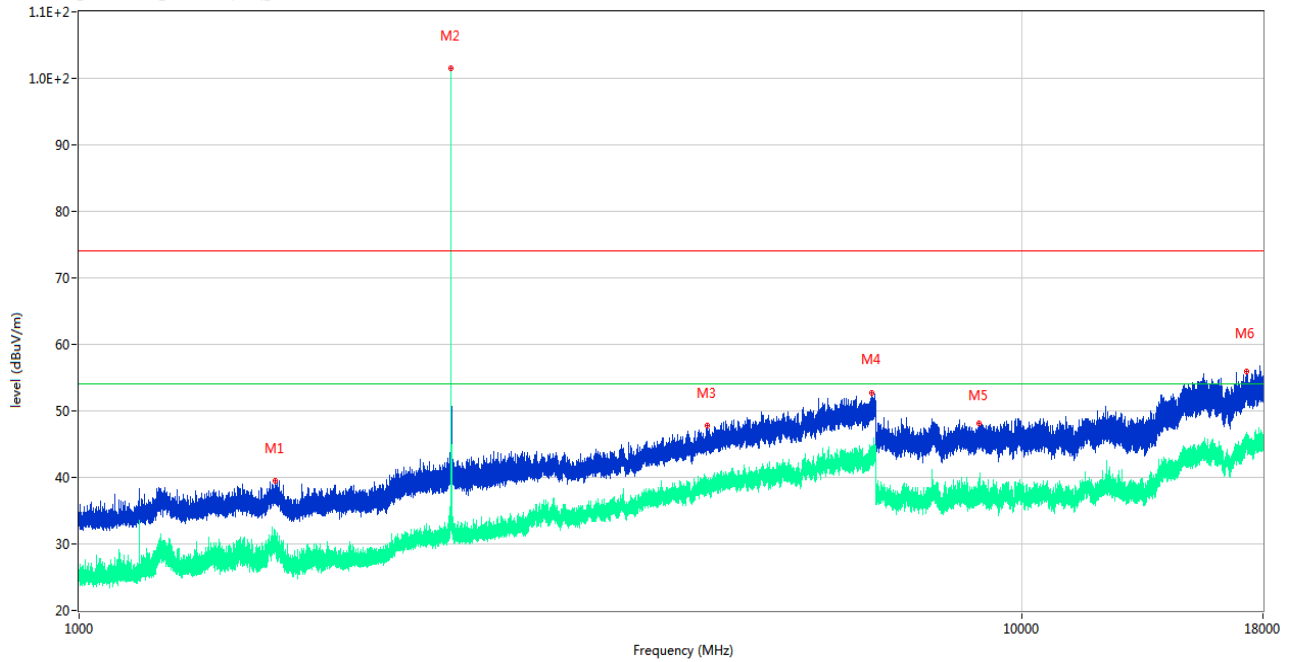

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1614.500	39.43	-15.14	74.0	-34.57	Peak	214.00	150	Horizontal	Pass
1**	1614.500	29.38	-15.14	54.0	-24.62	AV	214.00	150	Horizontal	Pass
2	2479.800	101.55	-10.36	74.0	27.55	Peak	168.00	150	Horizontal	N/A
2**	2479.800	100.04	-10.36	54.0	46.04	AV	168.00	150	Horizontal	N/A
3	4640.600	47.73	-1.85	74.0	-26.27	Peak	201.00	150	Horizontal	Pass
3**	4640.600	38.72	-1.85	54.0	-15.28	AV	201.00	150	Horizontal	Pass
4	6919.400	52.67	4.51	74.0	-21.33	Peak	163.00	150	Horizontal	Pass
4**	6919.400	43.07	4.51	54.0	-10.93	AV	163.00	150	Horizontal	Pass
5	9005.312	48.08	18.04	74.0	-25.92	Peak	81.00	150	Horizontal	Pass
5**	9005.312	37.63	18.04	54.0	-16.37	AV	81.00	150	Horizontal	Pass
6	17292.036	55.96	24.56	74.0	-18.04	Peak	77.00	150	Horizontal	Pass
6**	17292.036	45.19	24.56	54.0	-8.81	AV	77.00	150	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

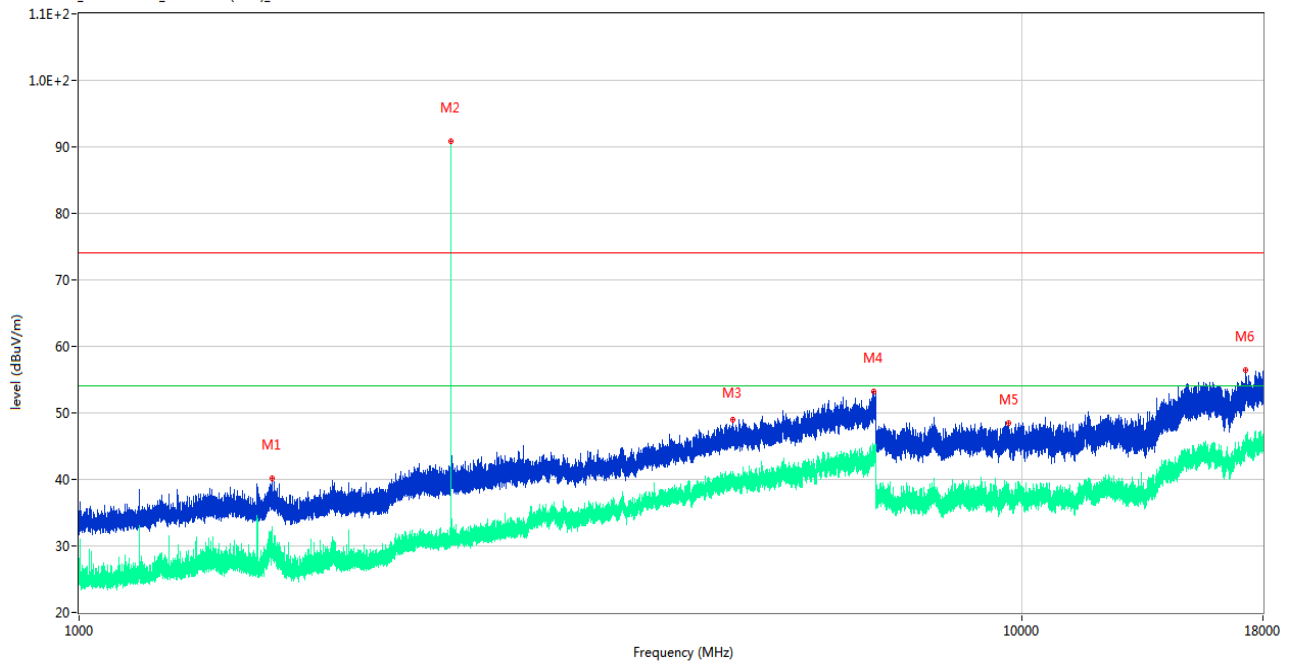

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1600.300	40.16	-15.05	74.0	-33.84	Peak	185.00	150	Vertical	Pass
1**	1600.300	28.68	-15.05	54.0	-25.32	AV	185.00	150	Vertical	Pass
2	2480.100	90.79	-10.33	74.0	16.79	Peak	121.00	150	Vertical	N/A
2**	2480.100	90.22	-10.33	54.0	36.22	AV	121.00	150	Vertical	N/A
3	4934.400	49.00	-1.10	74.0	-25.00	Peak	40.00	150	Vertical	Pass
3**	4934.400	40.50	-1.10	54.0	-13.50	AV	40.00	150	Vertical	Pass
4	6957.000	53.27	4.46	74.0	-20.73	Peak	130.00	150	Vertical	Pass
4**	6957.000	45.14	4.46	54.0	-8.86	AV	130.00	150	Vertical	Pass
5	9681.225	48.52	18.55	74.0	-25.48	Peak	174.00	150	Vertical	Pass
5**	9681.225	36.76	18.55	54.0	-17.24	AV	174.00	150	Vertical	Pass
6	17257.912	56.45	24.23	74.0	-17.55	Peak	49.00	150	Vertical	Pass
6**	17257.912	44.84	24.23	54.0	-9.16	AV	49.00	150	Vertical	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

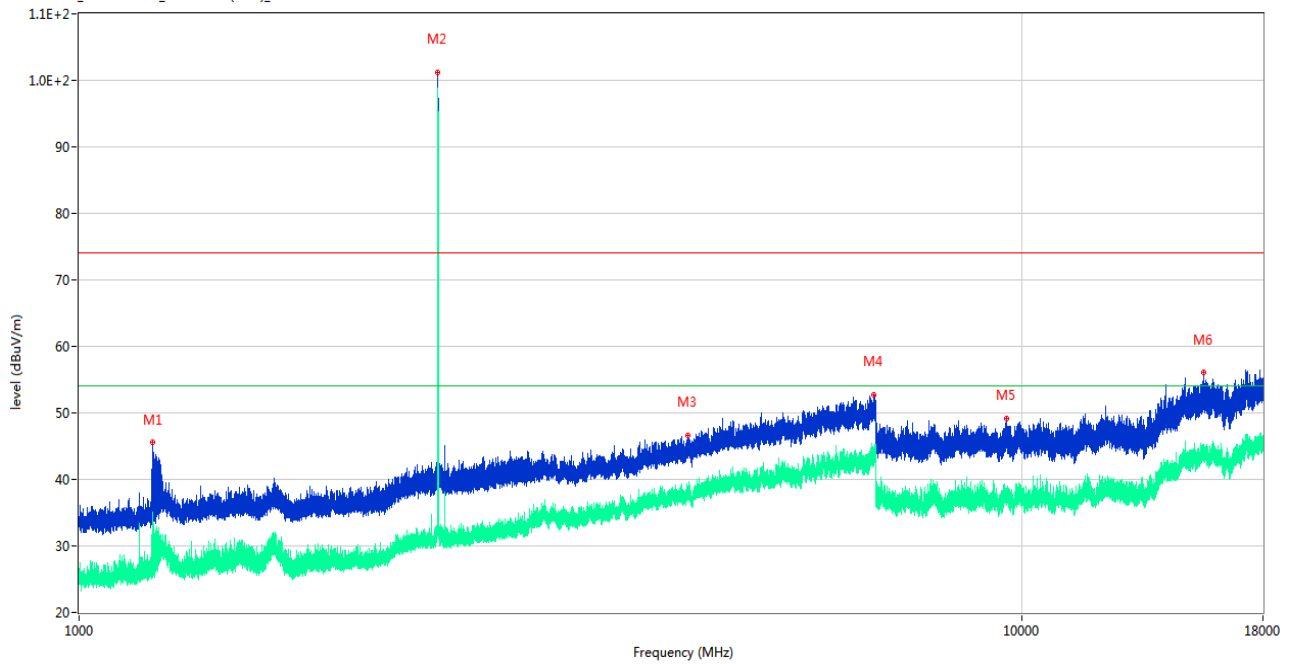

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.900	45.55	-14.98	74.0	-28.45	Peak	278.00	150	Horizontal	Pass
1**	1197.900	25.58	-14.98	54.0	-28.42	AV	278.00	150	Horizontal	Pass
2	2401.900	101.17	-10.74	74.0	27.17	Peak	176.00	150	Horizontal	N/A
2**	2401.900	98.45	-10.74	54.0	44.45	AV	176.00	150	Horizontal	N/A
3	4424.400	46.63	-2.30	74.0	-27.37	Peak	199.00	150	Horizontal	Pass
3**	4424.400	38.69	-2.30	54.0	-15.31	AV	199.00	150	Horizontal	Pass
4	6956.800	52.73	4.48	74.0	-21.27	Peak	142.00	150	Horizontal	Pass
4**	6956.800	42.31	4.48	54.0	-11.69	AV	142.00	150	Horizontal	Pass
5	9621.137	49.16	18.80	74.0	-24.84	Peak	244.00	150	Horizontal	Pass
5**	9621.137	37.63	18.80	54.0	-16.37	AV	244.00	150	Horizontal	Pass
6	15594.188	56.02	23.56	74.0	-17.98	Peak	258.00	150	Horizontal	Pass
6**	15594.188	43.30	23.56	54.0	-10.70	AV	258.00	150	Horizontal	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

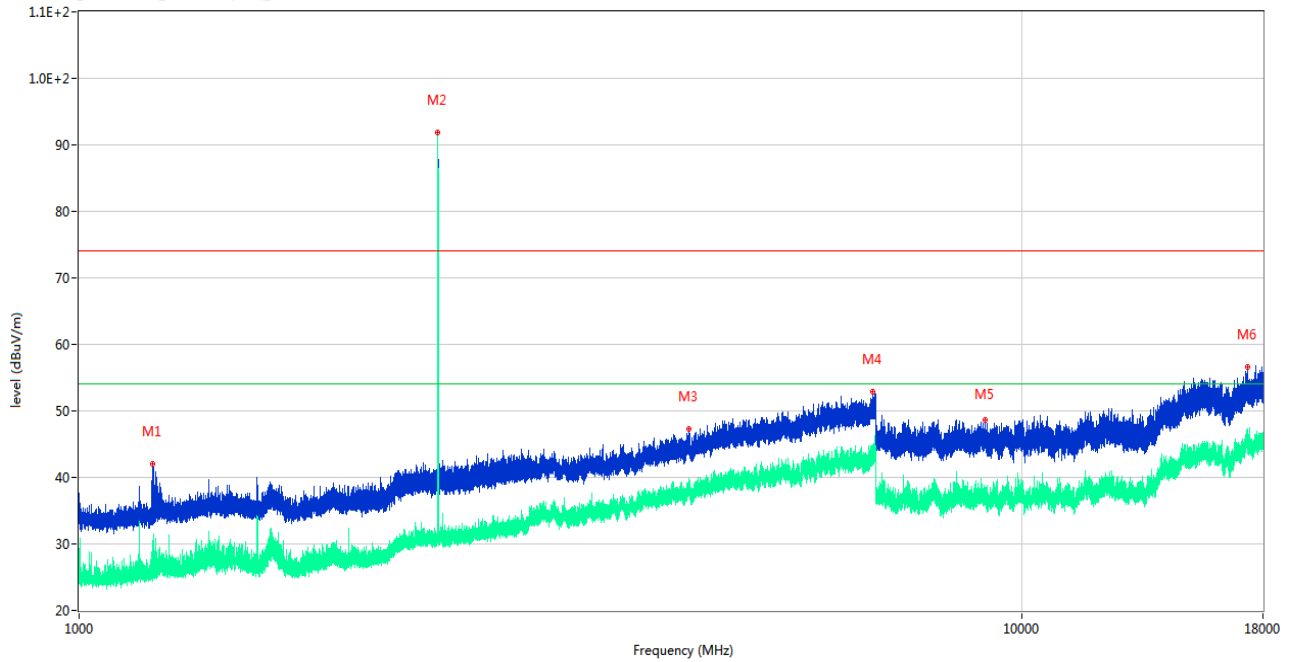

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.500	42.01	-14.97	74.0	-31.99	Peak	73.00	150	Vertical	Pass
1**	1197.500	25.26	-14.97	54.0	-28.74	AV	73.00	150	Vertical	Pass
2	2401.800	91.84	-10.75	74.0	17.84	Peak	102.00	150	Vertical	N/A
2**	2401.800	91.03	-10.75	54.0	37.03	AV	102.00	150	Vertical	N/A
3	4432.000	47.31	-2.20	74.0	-26.69	Peak	349.00	150	Vertical	Pass
3**	4432.000	37.29	-2.20	54.0	-16.71	AV	349.00	150	Vertical	Pass
4	6949.800	52.90	4.25	74.0	-21.10	Peak	131.00	150	Vertical	Pass
4**	6949.800	44.09	4.25	54.0	-9.91	AV	131.00	150	Vertical	Pass
5	9140.725	48.70	17.60	74.0	-25.30	Peak	105.00	150	Vertical	Pass
5**	9140.725	36.75	17.60	54.0	-17.25	AV	105.00	150	Vertical	Pass
6	17345.063	56.53	23.85	74.0	-17.47	Peak	255.00	150	Vertical	Pass
6**	17345.063	44.47	23.85	54.0	-9.53	AV	255.00	150	Vertical	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

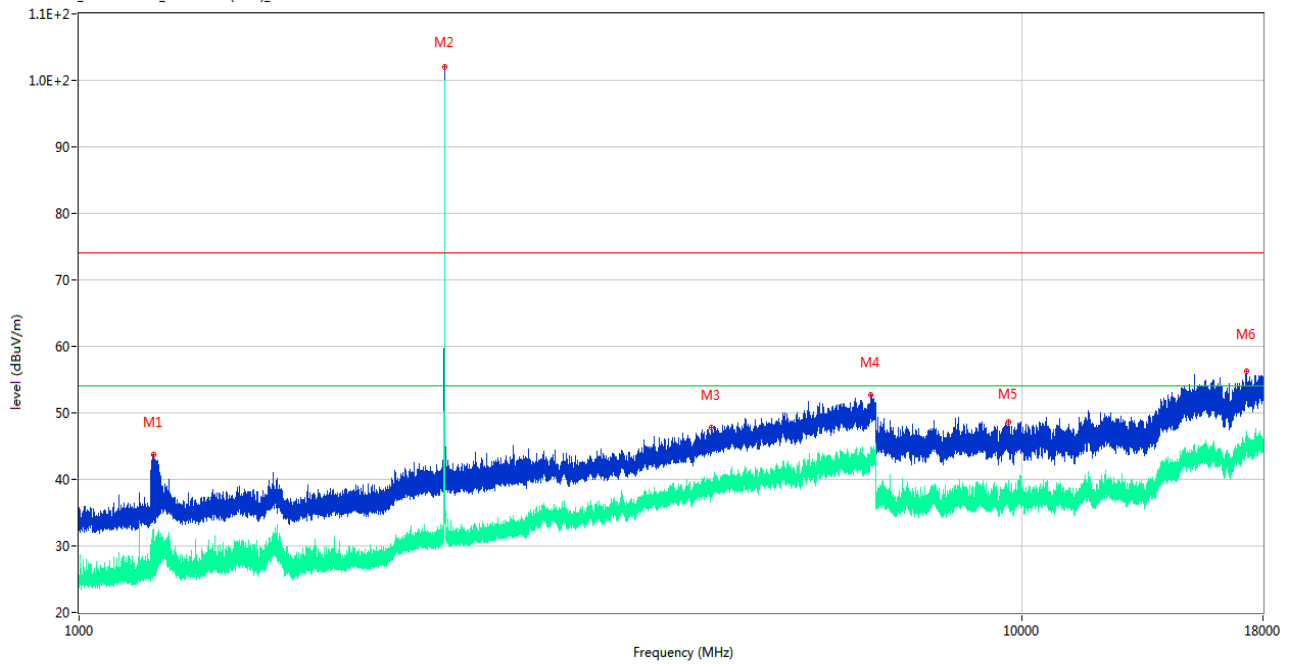

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1199.200	43.70	-14.99	74.0	-30.30	Peak	268.00	150	Horizontal	Pass
1**	1199.200	26.15	-14.99	54.0	-27.85	AV	268.00	150	Horizontal	Pass
2	2440.800	102.01	-10.52	74.0	28.01	Peak	182.00	150	Horizontal	N/A
2**	2440.800	100.07	-10.52	54.0	46.07	AV	182.00	150	Horizontal	N/A
3	4680.600	47.75	-2.40	74.0	-26.25	Peak	150.00	150	Horizontal	Pass
3**	4680.600	38.34	-2.40	54.0	-15.66	AV	150.00	150	Horizontal	Pass
4	6916.200	52.70	4.73	74.0	-21.30	Peak	360.00	150	Horizontal	Pass
4**	6916.200	44.11	4.73	54.0	-9.89	AV	360.00	150	Horizontal	Pass
5	9675.187	48.59	18.62	74.0	-25.41	Peak	0.00	150	Horizontal	Pass
5**	9675.187	37.10	18.62	54.0	-16.90	AV	0.00	150	Horizontal	Pass
6	17274.450	56.30	24.43	74.0	-17.70	Peak	1.00	150	Horizontal	Pass
6**	17274.450	45.35	24.43	54.0	-8.65	AV	1.00	150	Horizontal	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

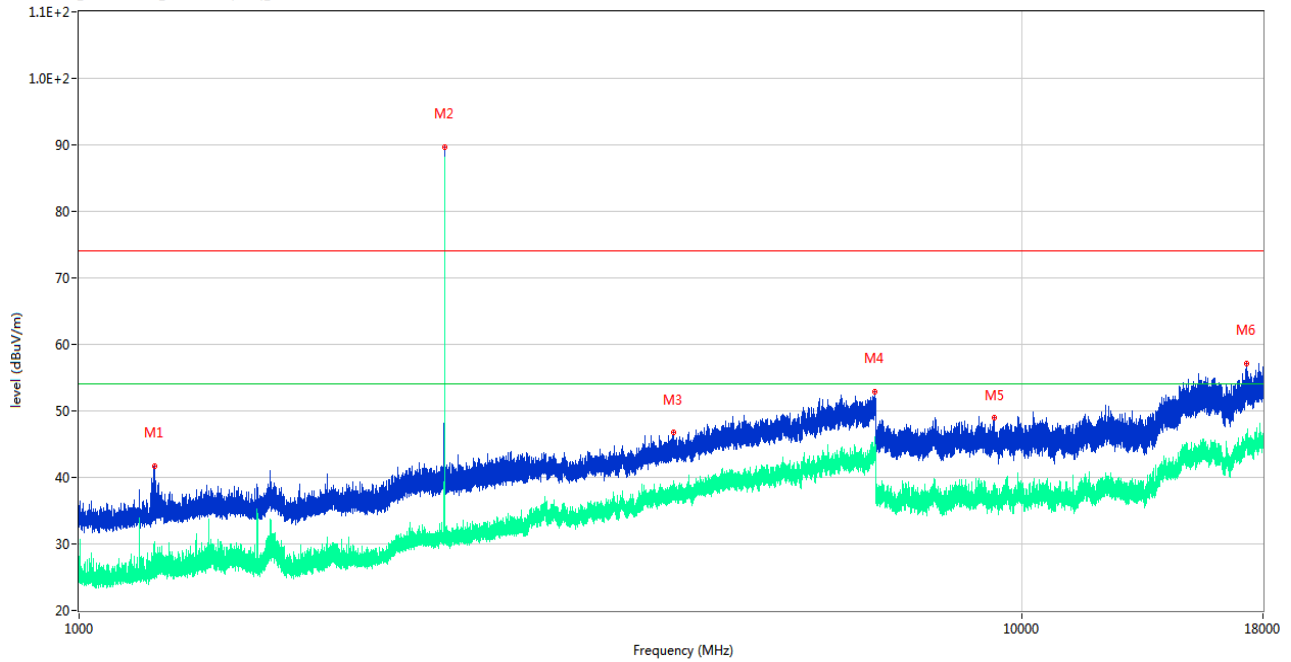

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1203.800	41.77	-15.06	74.0	-32.23	Peak	303.00	150	Vertical	Pass
1**	1203.800	24.74	-15.06	54.0	-29.26	AV	303.00	150	Vertical	Pass
2	2440.800	89.63	-10.52	74.0	15.63	Peak	144.00	150	Vertical	N/A
2**	2440.800	86.73	-10.52	54.0	32.73	AV	144.00	150	Vertical	N/A
3	4270.200	46.84	-3.57	74.0	-27.16	Peak	235.00	150	Vertical	Pass
3**	4270.200	36.95	-3.57	54.0	-17.05	AV	235.00	150	Vertical	Pass
4	6977.800	52.94	5.05	74.0	-21.06	Peak	322.00	150	Vertical	Pass
4**	6977.800	46.08	5.05	54.0	-7.92	AV	322.00	150	Vertical	Pass
5	9331.912	48.95	17.02	74.0	-25.05	Peak	94.00	150	Vertical	Pass
5**	9331.912	37.84	17.02	54.0	-16.16	AV	94.00	150	Vertical	Pass
6	17283.637	57.17	24.52	74.0	-16.83	Peak	80.00	150	Vertical	Pass
6**	17283.637	45.16	24.52	54.0	-8.84	AV	80.00	150	Vertical	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

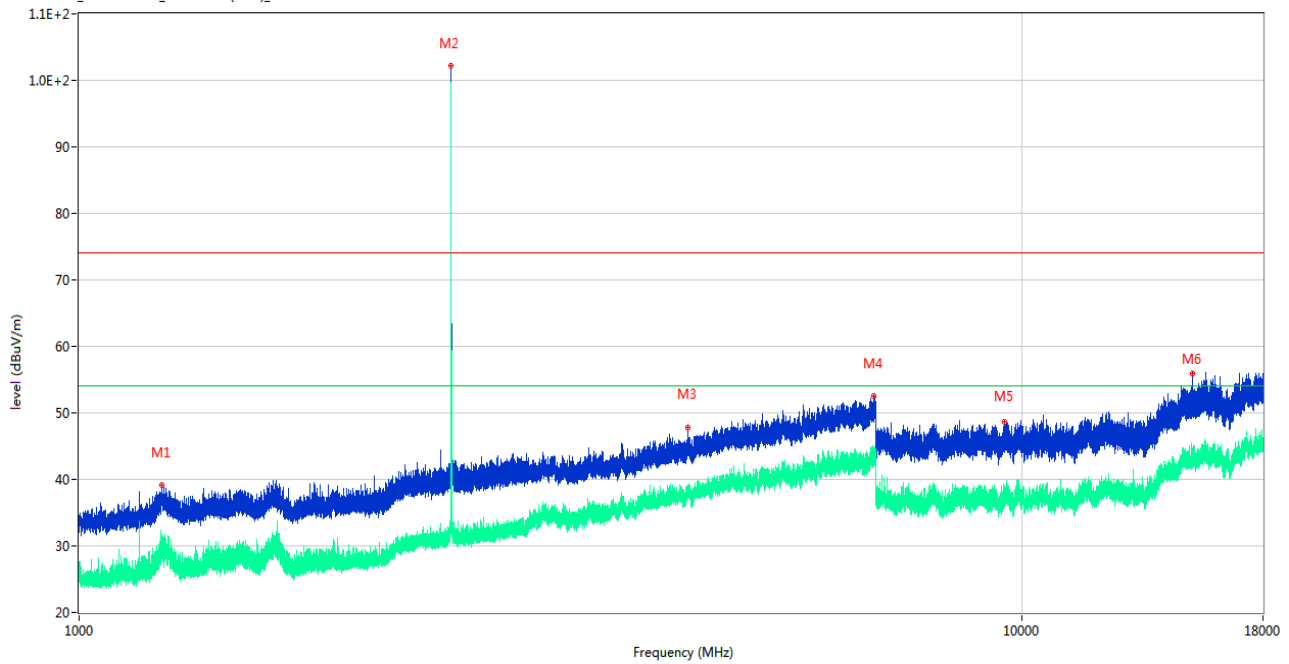

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1223.100	39.11	-14.87	74.0	-34.89	Peak	341.00	150	Horizontal	Pass
1**	1223.100	30.67	-14.87	54.0	-23.33	AV	341.00	150	Horizontal	Pass
2	2480.000	102.18	-10.35	74.0	28.18	Peak	184.00	150	Horizontal	N/A
2**	2480.000	99.38	-10.35	54.0	45.38	AV	184.00	150	Horizontal	N/A
3	4424.400	47.79	-2.30	74.0	-26.21	Peak	350.00	150	Horizontal	Pass
3**	4424.400	37.76	-2.30	54.0	-16.24	AV	350.00	150	Horizontal	Pass
4	6952.600	52.54	4.29	74.0	-21.46	Peak	172.00	150	Horizontal	Pass
4**	6952.600	43.57	4.29	54.0	-10.43	AV	172.00	150	Horizontal	Pass
5	9582.037	48.69	18.50	74.0	-25.31	Peak	13.00	150	Horizontal	Pass
5**	9582.037	37.60	18.50	54.0	-16.40	AV	13.00	150	Horizontal	Pass
6	15163.950	55.88	21.94	74.0	-18.12	Peak	-2.00	150	Horizontal	Pass
6**	15163.950	44.73	21.94	54.0	-9.27	AV	-2.00	150	Horizontal	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

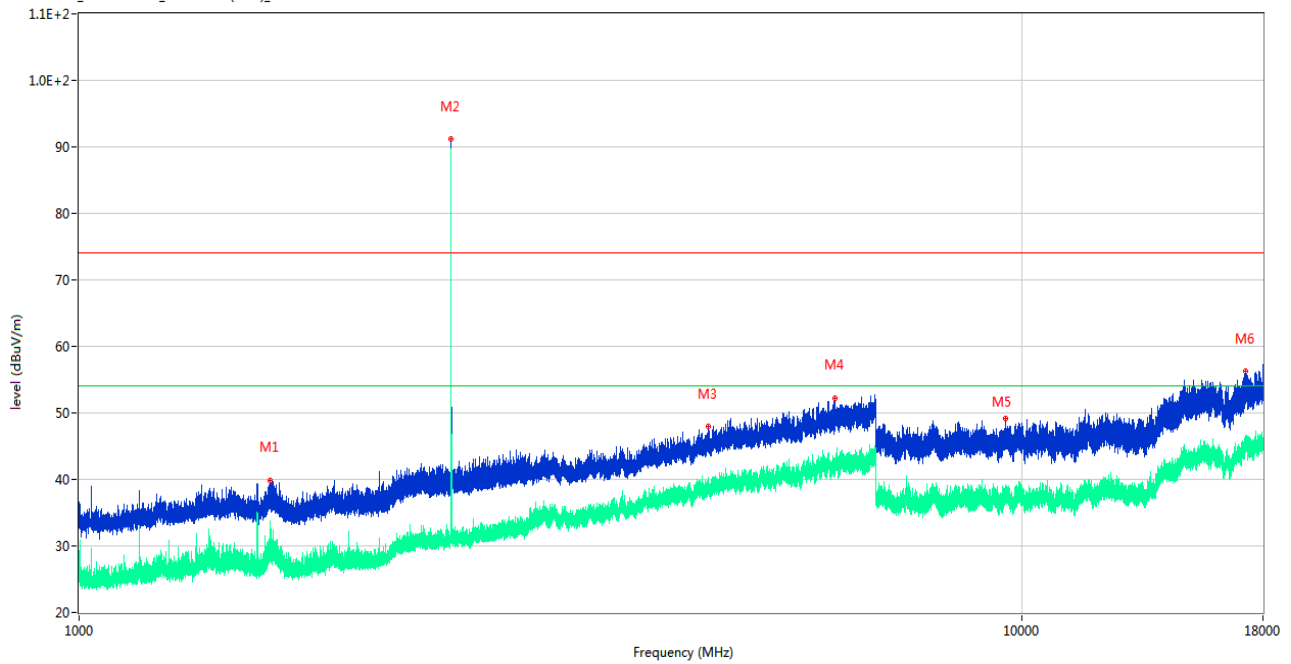


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1593.700	39.88	-15.17	74.0	-34.12	Peak	246.00	150	Vertical	Pass
1**	1593.700	31.15	-15.17	54.0	-22.85	AV	246.00	150	Vertical	Pass
2	2479.900	91.27	-10.36	74.0	17.27	Peak	140.00	150	Vertical	N/A
2**	2479.900	88.86	-10.36	54.0	34.86	AV	140.00	150	Vertical	N/A
3	4644.600	47.97	-1.81	74.0	-26.03	Peak	146.00	150	Vertical	Pass
3**	4644.600	38.07	-1.81	54.0	-15.93	AV	146.00	150	Vertical	Pass
4	6335.400	52.15	3.00	74.0	-21.85	Peak	360.00	150	Vertical	Pass
4**	6335.400	41.73	3.00	54.0	-12.27	AV	360.00	150	Vertical	Pass
5	9602.450	49.16	18.77	74.0	-24.84	Peak	286.00	150	Vertical	Pass
5**	9602.450	36.80	18.77	54.0	-17.20	AV	286.00	150	Vertical	Pass
6	17259.749	56.35	24.24	74.0	-17.65	Peak	196.00	150	Vertical	Pass
6**	17259.749	44.44	24.24	54.0	-9.56	AV	196.00	150	Vertical	Pass

Hopping Mode:

GFSK MODE 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

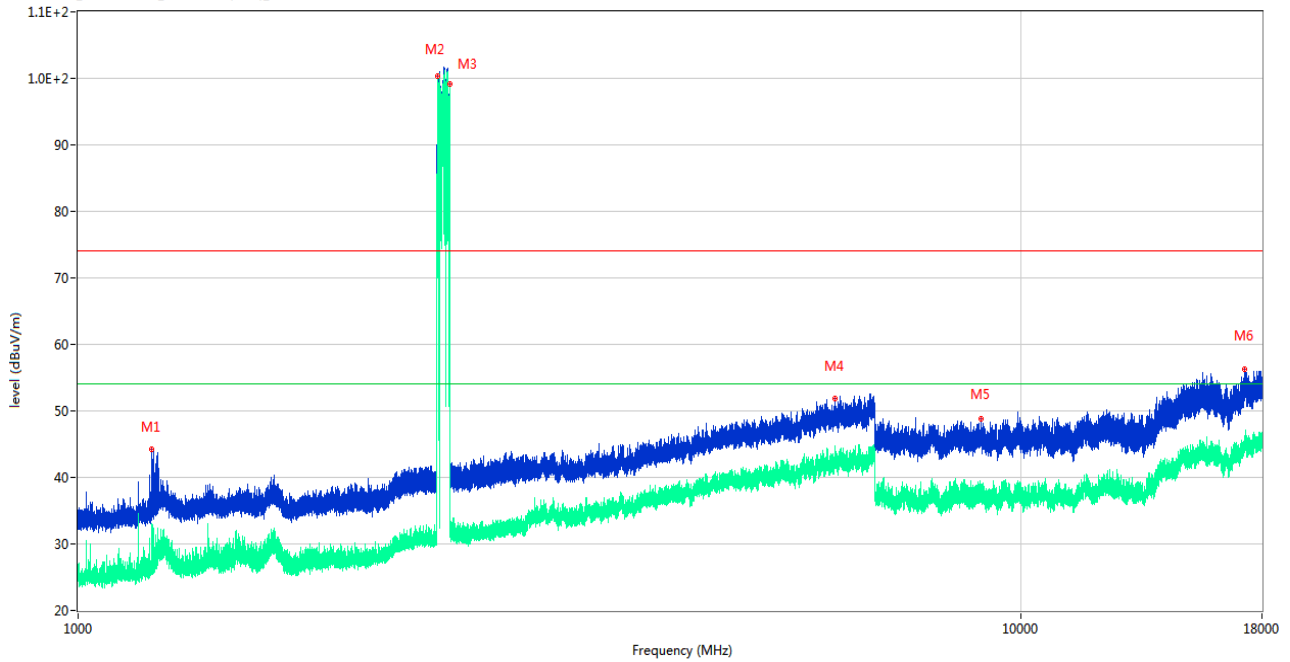

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1195.900	44.17	-14.96	74.0	-29.83	Peak	291.00	150	Horizontal	Pass
1**	1195.900	26.06	-14.96	54.0	-27.94	AV	291.00	150	Horizontal	Pass
2	2405.800	100.37	-10.77	74.0	26.37	Peak	188.00	150	Horizontal	N/A
2**	2405.800	97.39	-10.77	54.0	43.39	AV	188.00	150	Horizontal	N/A
3	2479.100	99.10	-10.40	74.0	25.10	Peak	141.00	150	Horizontal	N/A
3**	2479.100	98.76	-10.40	54.0	44.76	AV	141.00	150	Horizontal	N/A
4	6348.200	51.88	2.80	74.0	-22.12	Peak	282.00	150	Horizontal	Pass
4**	6348.200	43.51	2.80	54.0	-10.49	AV	282.00	150	Horizontal	Pass
5	9056.201	48.88	18.24	74.0	-25.12	Peak	210.00	150	Horizontal	Pass
5**	9056.201	37.71	18.24	54.0	-16.29	AV	210.00	150	Horizontal	Pass
6	17244.525	56.21	24.20	74.0	-17.79	Peak	360.00	150	Horizontal	Pass
6**	17244.525	44.16	24.20	54.0	-9.84	AV	360.00	150	Horizontal	Pass

GFSK MODE 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

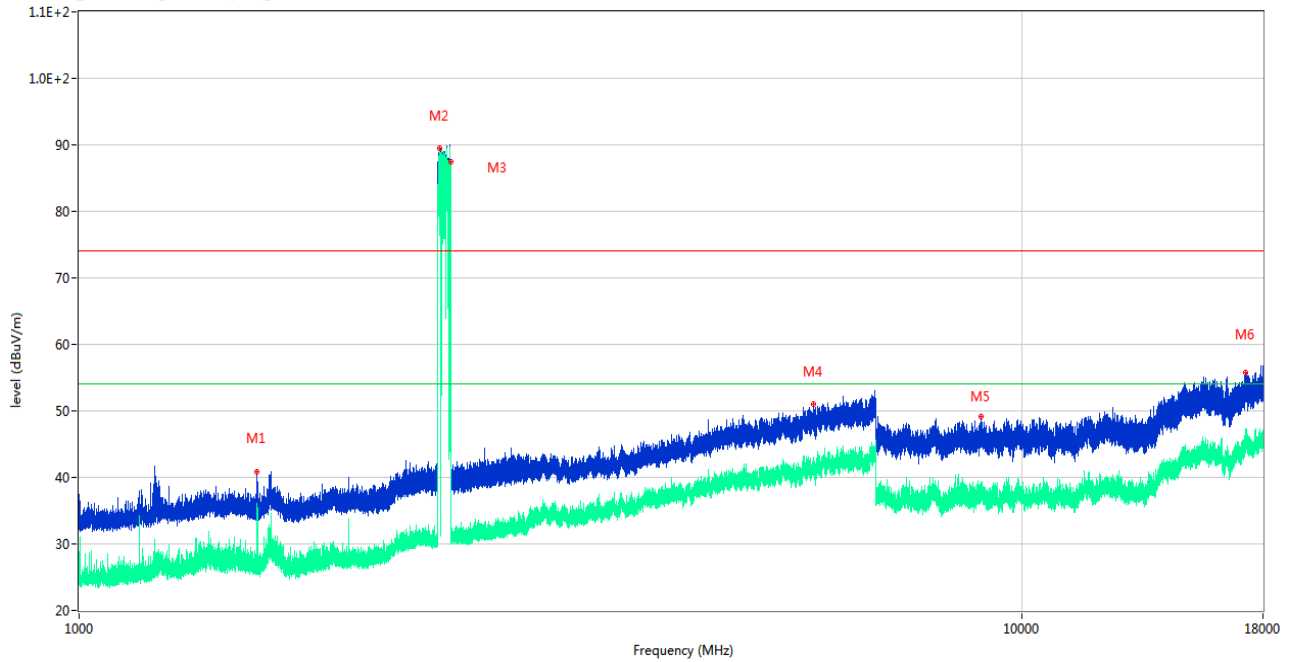

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1545.000	40.92	-14.88	74.0	-33.08	Peak	192.00	150	Vertical	Pass
1**	1545.000	34.11	-14.88	54.0	-19.89	AV	192.00	150	Vertical	Pass
2	2408.800	89.50	-10.51	74.0	15.50	Peak	347.00	150	Vertical	N/A
2**	2408.800	87.45	-10.51	54.0	33.45	AV	347.00	150	Vertical	N/A
3	2478.800	87.45	-10.41	74.0	13.45	Peak	22.00	150	Vertical	N/A
3**	2478.800	84.89	-10.41	54.0	30.89	AV	22.00	150	Vertical	N/A
4	6009.200	51.08	2.07	74.0	-22.92	Peak	246.00	150	Vertical	Pass
4**	6009.200	42.10	2.07	54.0	-11.90	AV	246.00	150	Vertical	Pass
5	9050.450	49.17	18.24	74.0	-24.83	Peak	93.00	150	Vertical	Pass
5**	9050.450	37.34	18.24	54.0	-16.66	AV	93.00	150	Vertical	Pass
6	17255.025	55.76	24.22	74.0	-18.24	Peak	360.00	150	Vertical	Pass
6**	17255.025	44.63	24.22	54.0	-9.37	AV	360.00	150	Vertical	Pass

8-DPSK MODE 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

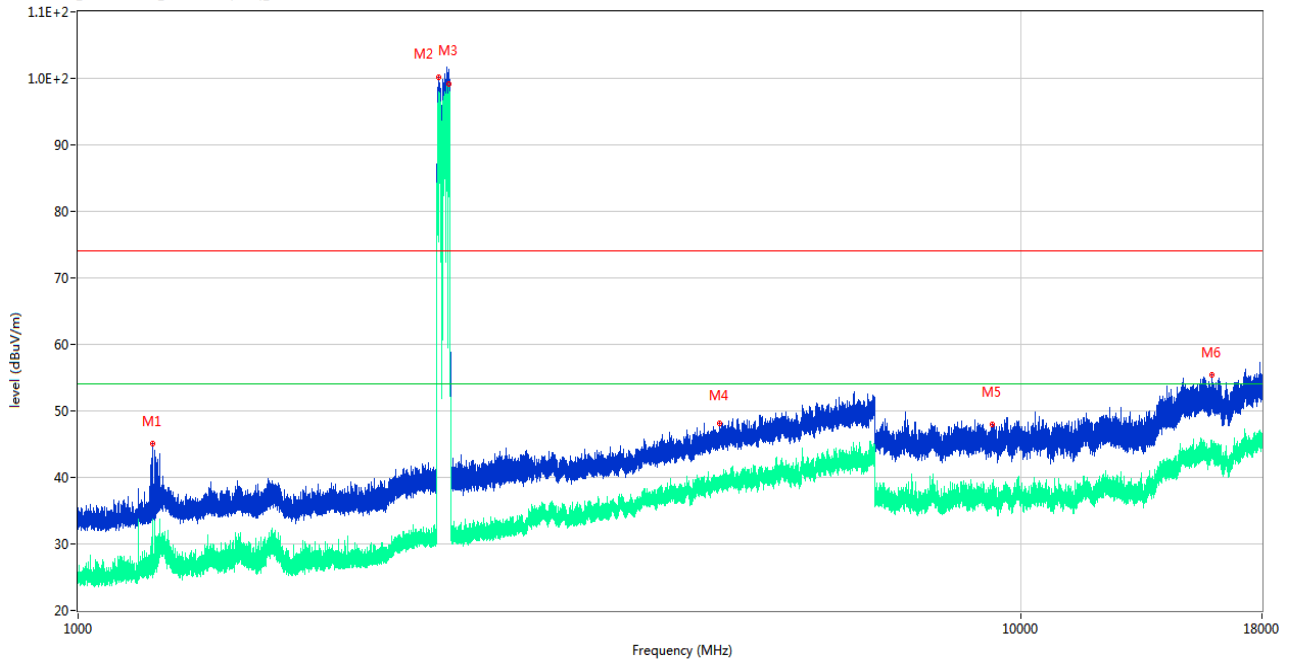

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1199.600	45.00	-15.00	74.0	-29.00	Peak	172.00	150	Horizontal	Pass
1**	1199.600	26.61	-15.00	54.0	-27.39	AV	172.00	150	Horizontal	Pass
2	2413.000	100.18	-10.19	74.0	26.18	Peak	172.00	150	Horizontal	N/A
2**	2413.000	96.96	-10.19	54.0	42.96	AV	172.00	150	Horizontal	N/A
3	2473.900	100.82	-10.60	74.0	26.82	Peak	186.00	150	Horizontal	N/A
3**	2473.900	99.15	-10.60	54.0	45.15	AV	186.00	150	Horizontal	N/A
4	4785.200	48.14	-2.03	74.0	-25.86	Peak	49.00	150	Horizontal	Pass
4**	4785.200	38.53	-2.03	54.0	-15.47	AV	49.00	150	Horizontal	Pass
5	9316.963	47.91	16.98	74.0	-26.09	Peak	162.00	150	Horizontal	Pass
5**	9316.963	36.73	16.98	54.0	-17.27	AV	162.00	150	Horizontal	Pass
6	15946.200	55.36	23.93	74.0	-18.64	Peak	219.00	150	Horizontal	Pass
6**	15946.200	44.09	23.93	54.0	-9.91	AV	219.00	150	Horizontal	Pass

8-DPSK MODE 1 GHz to 18 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

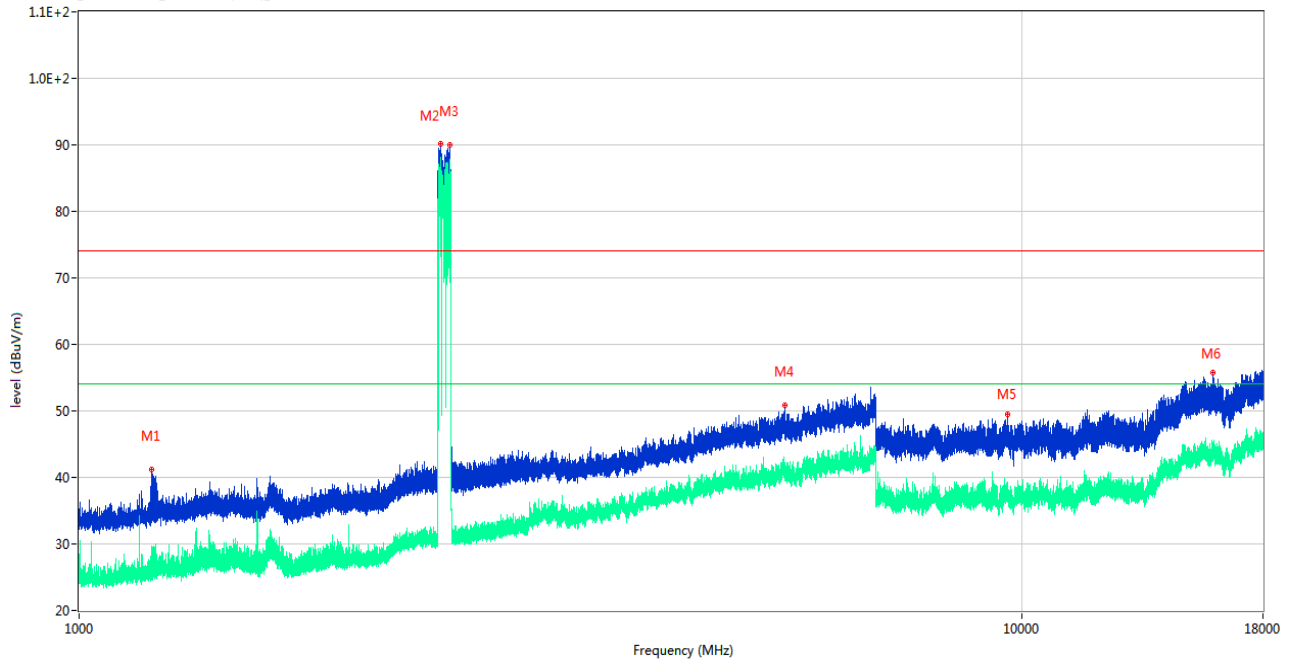

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1193.500	41.17	-15.01	74.0	-32.83	Peak	81.00	150	Vertical	Pass
1**	1193.500	25.20	-15.01	54.0	-28.80	AV	81.00	150	Vertical	Pass
2	2419.000	90.20	-9.98	74.0	16.20	Peak	350.00	150	Vertical	N/A
2**	2419.000	88.19	-9.98	54.0	34.19	AV	350.00	150	Vertical	N/A
3	2470.000	89.98	-10.70	74.0	15.98	Peak	98.00	150	Vertical	N/A
3**	2470.000	87.72	-10.70	54.0	33.72	AV	98.00	150	Vertical	N/A
4	5598.400	50.77	0.32	74.0	-23.23	Peak	0.00	150	Vertical	Pass
4**	5598.400	41.10	0.32	54.0	-12.90	AV	0.00	150	Vertical	Pass
5	9647.875	49.46	18.95	74.0	-24.54	Peak	0.00	150	Vertical	Pass
5**	9647.875	38.11	18.95	54.0	-15.89	AV	0.00	150	Vertical	Pass
6	15933.862	55.76	23.82	74.0	-18.24	Peak	238.00	150	Vertical	Pass
6**	15933.862	44.28	23.82	54.0	-9.72	AV	238.00	150	Vertical	Pass

A.9 Band Edge (Restricted-band band-edge)

Note¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note⁴: The Level (dBuV/m) has been corrected by factor.

Test Data

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390.00	53.657	31.47	74	20.343	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK	HIGH	2483.50	53.878	31.40	74	20.122	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK	Low	2390.00	53.412	31.47	74	20.588	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK	HIGH	2483.50	53.886	31.40	74	20.114	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK(Hopping)	Low	2390.00	53.840	31.47	74	20.160	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK(Hopping)	HIGH	2483.50	53.408	31.40	74	20.592	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK (Hopping)	Low	2390.00	53.217	31.47	74	20.783	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK (Hopping)	HIGH	2483.50	53.194	31.40	74	20.806	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass

Test Plots


GFSK LOW CHANNEL, PEAK

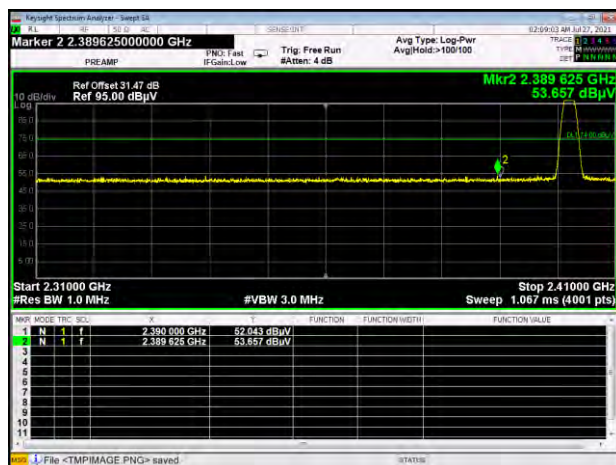


GFSK HIGH CHANNEL, PEAK



8-DPSK LOW CHANNEL, PEAK

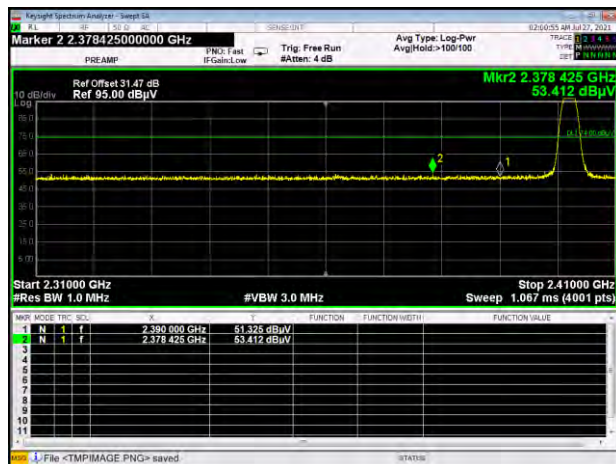


8-DPSK HIGH CHANNEL, PEAK

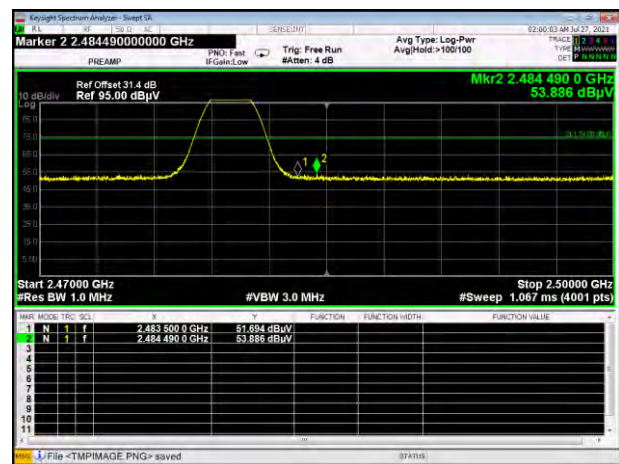


Hopping Mode:

GFSK LOW FREQUENCY BAND, PEAK

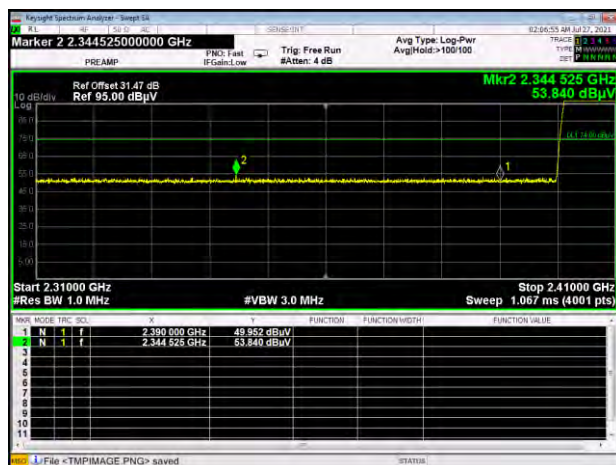

GFSK HIGH FREQUENCY BAND, PEAK

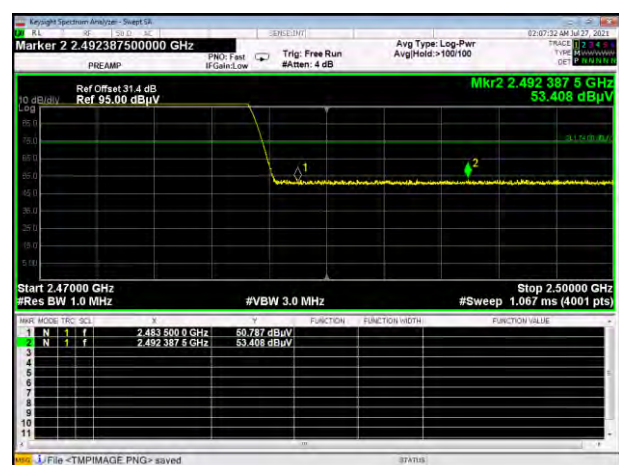

8-DPSK LOW FREQUENCY BAND, PEAK



8-DPSK HIGH FREQUENCY BAND, PEAK



ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-SZ2170517-AR.PDF".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL-SZ2170517-AW.PDF".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL-SZ2170517-AI.PDF".

--END OF REPORT--