



FCC RF Test Report

Product Name: Smart Phone

Model Number: MAR-LX2J

Report No.: SYBH(Z-RF)20190219010002-2005

FCC ID : QISMAR-LX2J

Authorized	APPROVED (Lab Manager)	PREPARED (Test Engineer)
BY	He Hao	Tao Ming
DATE	2019-03-26	2019-03-26

Reliability Laboratory of Huawei Technologies Co., Ltd.

(Global Compliance and Testing Center of Huawei Technologies Co., Ltd.)

No.2, New City Avenue, Songshan Lake Sci. & Tech. Industry Park, Dongguan, 523808, P.R.C

Telephone: +86 769 23830808

Fax: +86 769 23837628

※ ※ Notice ※ ※

1. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01.
2. The laboratory has been recognized by the US Federal Communications Commission (FCC) to perform compliance testing subject to the Commission's Certification rules. The Designation Number is CN1173, and the Test Firm Registration Number is 294140.
3. The laboratory has been recognized by the Innovation, Science and Economic Development Canada (ISED) to test to Canadian radio equipment requirements. The CAB identifier is CN0003, and the ISED# is 21741.
4. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd) is also named "Global Compliance and Testing Center of Huawei Technologies Co., Ltd", the both names have coexisted since 2009.
5. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. The test report is only valid for the test samples.
8. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
9. If any question about this report, please contact the laboratory (PublicGCTC@huawei.com).

MODIFICATION RECORD

No.	Report No	Modification Description
1	SYBH(Z-RF)2019021901000 2-2005	First release.

DECLARATION

Type	Description
Multiple Models Applications	☒ The present report applies to single model. ☐ The present report applies to several models. The practical measurements are performed with the model. The present report only presents the worst test case of all modes, see relevant test results for detailed.

1 **Table of contents**

1	Table of contents	4
2	General Information	5
2.1	Test standard/s	5
2.2	Test Environment	5
2.3	Test Laboratories	5
2.4	Applicant and Manufacturer	5
2.5	Application details	5
3	Test Summary	6
3.1	Measurement Technical Requirements	6
4	Description of the Equipment under Test (EUT)	8
4.1	General Description	8
4.2	EUT Identity	8
4.3	Technical Description	10
5	General Test Conditions / Configurations	12
5.1	Test Modes	12
5.2	EUT Configurations	12
5.3	Test Setups	13
5.4	Test Conditions	16
6	Main Test Instruments	17
7	Measurement Uncertainty	18
8	Appendixes	18

2 General Information

2.1 Test standard/s

Applied Rules :	47 CFR FCC Part 2, Subpart J 47 CFR FCC Part 15, Subpart C 47 CFR FCC Part 15, Subpart E
Test Method :	FCC KDB 789033 D02 General UNII Test Procedures New Rules v02 ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices

2.2 Test Environment

Temperature :	TN	15 to 30	°C during room temperature tests
Ambient Relative Humidity:	20 to 85 %		
Atmospheric Pressure:	Not applicable		
Power supply :	VL	3.6	V
	VN	3.8	V DC by Battery
	VH	4.35	V

NOTE 1: 1) VN= nominal voltage, VL= low extreme test voltage, VH= High extreme test voltage;

TN= normal temperature, TL= low extreme test temperature, TH= High extreme test temperature.

NOTE 2: The values used in the test report may be stringent than the declared.

2.3 Test Laboratories

Test Location 1 :	RELIABILITY LABORATORY OF HUAWEI TECHNOLOGIES CO., LTD.
Address of Test Location 1 :	No.2, New City Avenue, Songshan Lake Sci. & Tech. Industry Park, Dongguan, 523808, P.R.C

2.4 Applicant and Manufacturer

Company Name :	HUAWEI TECHNOLOGIES CO., LTD
Address :	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

2.5 Application details

Date of Receipt Sample:	2019-02-24
Start of test:	2019-03-01
End of test:	2019-03-26

3 Test Summary

3.1 Measurement Technical Requirements

3.1.1 U-NII (5150-5250, 5250-5350, 5470-5725 MHz, 5725-5850)

Test Item	Band	FCC Rule No.	Requirements	Test Result	Verdict
Emission Bandwidth	5150-5250	15.403(i) 15.407(a)(1)	No limit.	Appendix A1&A2	Pass
	5250-5350	15.403(i) 15.407(a)(2)			
	5470-5725	15.403(i) 15.407(a)(2)			
	5725-5850	15.403(i) 15.407(e)	≥ 500 kHz.		
Occupied Bandwidth	5150-5250	KDB 789033 D02 § D	No limit.	Appendix B	Pass
	5250-5350				
	5470-5725				
	5725-5850				
Duty Cycle	5150-5850	KDB 789033 D02 § B	No limit.	Appendix C	Pass
Maximum Output Power	5150-5250	15.407(a)(1) 15.407(a)(4)	FCC: conducted < 250mW (avg during transmission)	Appendix D	
	5250-5350	15.407(a)(2) 15.407(a)(4)	FCC: conducted <MIN{250mW,11dBm+10*lg(EBW)} (avg during transmission)		
	5470-5725	15.407(a)(2) 15.407(a)(4)	FCC: conducted <MIN{250mW,11dBm+10*lg(EBW)} (avg during transmission)		
	5725-5850	15.407(a)(3)	conducted < 1W (avg during transmission)		
maximum	5150-5250	15.407(a)(1)	FCC	Appendix E	

Test Item	Band	FCC Rule No.	Requirements	Test Result	Verdict
Power Spectral Density		15.407(a)(4)	conducted <11dBm/MHz (avg during transmission)		
	5250-5350	15.407(a)(2) 15.407(a)(4)	conducted <11dBm/MHz (avg during transmission)		
	5470-5725	15.407(a)(2) 15.407(a)(4)	conducted <11dBm/MHz (avg during transmission)		
	5725-5850	15.407(a)(3) 15.407(a)(4)	conducted <30dBm/500KHz (avg during transmission)		
Frequency Stability	5150-5250 5250-5350 5470-5725 5725-5850	15.407(g)	FCC Part 15.407(g)	Appendix F	Pass
NOTE: The transmitter has an integral PCB loop antenna that is enclosed within the housing of the EUT and meets the requirements of FCC 15.203					

4 Description of the Equipment under Test (EUT)

4.1 General Description

MAR-LX2J is subscriber equipment in the GSM/WCDMA/LTE system. The GSM frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900. The UMTS frequency band is B1 and B2 and B5 and B6 and B8 and B19. The LTE frequency band is B1 and B3 and B5 and B7 and B8 and B18 and B19 and B26 and B28 and B41. The Mobile Phone implements such functions as RF signal receiving/transmitting, GSM/WCDMA/LTE protocol processing, voice, video MMS service, GPS and WIFI etc. Externally it provides one micro SD card interface (it can also used as SIM card interface), earphone port (to provide voice service) and one SIM card interface. MAR-LX2J are dual SIM and single SIM smart phones, Single SIM delete SIM only by software. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

Note: Only 5G WIAN test data included in this report.

4.2 EUT Identity

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

4.2.1 Board

Board		
Description	Software Version	Hardware Version
Main Board	9.0.1.120(SP1C900E120R1P16)	HL2MARLM

4.2.2 Sub-Assembly

Sub-Assembly			
Sub-Assembly Name	Model	Manufacturer	Description
Adapter	HW-090200EH0	Huawei Technologies Co., Ltd.	Input voltage: 100-240V ~50/60Hz 0.5A Output voltage: 5V  2A OR 9V  2A
Adapter	HW-090200BH0	Huawei Technologies Co., Ltd.	Input voltage: 100-240V ~50/60Hz 0.5A Output voltage: 5V  2A OR 9V  2A
Adapter	HW-090200JH0	Huawei Technologies Co., Ltd.	Input voltage: 100-240V ~50/60Hz 0.5A Output voltage: 5V  2A OR 9V  2A
Adapter	HW-090200UH0	Huawei Technologies Co., Ltd.	Input voltage: 100-240V ~50/60Hz 0.5A Output voltage: 5V  2A OR 9V  2A
Adapter	HW-059200EHQ	Huawei Technologies Co., Ltd.	Input voltage: 100-240V ~50/60Hz 0.5A Output voltage: 5V  2A OR 9V  2A

Sub-Assembly			
Sub-Assembly Name	Model	Manufacturer	Description
Battery	HB356687ECW	Huawei Technologies Co., Ltd.	Rated capacity: 3240mAh Nominal Voltage:  +3.82V Charging Voltage:  +4.40V

4.3 Technical Description

Characteristics	Description	
IEEE 802.11 WLAN Mode Supported	☒ 802.11a (20 MHz channel bandwidth), ☒ 802.11n (20 MHz channel bandwidth), ☒ 802.11n (40 MHz channel bandwidth), ☒ 802.11ac (20 MHz channel bandwidth), ☒ 802.11ac (40 MHz channel bandwidth), ☒ 802.11ac (80 MHz channel bandwidth)	
TX/RX Operating Range	All	$f_c = 5000 \text{ MHz} + N * 5 \text{ MHz}$, where: - f_c = "Operating Frequency" in MHz, - N = "Channel Number".
	5150-5250 MHz (U-NII)	$N = 36$ to 48 with step of 4 for the 20 MHz channel bandwidth. $N = 38$ to 46 with step of 8 for the 40 MHz channel bandwidth. $N = 42$ for the 80 MHz channel bandwidth.
	5250-5350 MHz (U-NII)	$N = 52$ to 64 with step of 4 for the 20 MHz channel bandwidth. $N = 54$ to 62 with step of 8 for the 40 MHz channel bandwidth. $N = 58$ for the 80 MHz channel bandwidth.
	5470-5650 MHz (U-NII) (for FCC)	$N = 100$ to 128 with step of 4 for the 20 MHz channel bandwidth. $N = 102$ to 126 with step of 8 for the 40 MHz channel bandwidth. $N = 106$ to 122 with step of 16 for the 80 MHz channel bandwidth.
	5650-5725 MHz (U-NII)	$N = 132$ to 140 with step of 4 for the 20 MHz channel bandwidth. $N = 134$ with step of 8 for the 40 MHz channel bandwidth.
	5725-5850MHz (U-NII)	$N = 149$ to 165 with step of 4 for the 20 MHz channel bandwidth. $N = 151$ to 159 with step of 8 for the 40 MHz channel bandwidth. $N = 155$ for the 80 MHz channel bandwidth.
Modulation Type	802.11a: BPSK/QPSK/16QAM/64QAM (OFDM).	
	802.11n: BPSK/QPSK/16QAM/64QAM (OFDM).	
	802.11ac: BPSK/QPSK/16QAM/64QAM (OFDM).	
Emission Designator	U-NII(5150-5250, 5250-5350, 5470-5725, 5725-5850)	19M6G7D (for 802.11a mod), 20M2G7D (for 802.11n 20 MHz mode), 39M3G7D (for 802.11n 40 MHz mode), 20M2G7D (for 802.11ac 20 MHz mode) 39M1G7D (for 802.11ac 40 MHz mode) 80M7G7D (for 802.11ac 80 MHz mode)
TX Power Control (TPC)	☒ Supported, ☐ Not Supported	
Equipment Type	☒ Stand-alone equipment, ☐ Plug-in radio device, ☐ Combined equipment	
Antenna	Description	Isotropic Antenna
	Type	☒ Integral ☐ External ☐ Dedicated
	Ports	☒ Ant 1, ☐ Ant 2, ☐ Ant 3, ☐ Ant 4
	Smart System	☒ SISO (for 802.11a/n/ac),

Characteristics	Description	
		☐ CDD (for 802.11a), 2 Tx & 2 Rx, ☐ MIMO (for 802.11a/ac), 2 Tx & 2 Rx, ☐ Diversity (for 802.11a/n/ac) : Tx & Rx
	Gain	Ant 1: 2 dBi (per antenna port, max.)
	Remark	When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.
Power Supply	Type	☐ External DC mains, ☒ Battery, ☐ AC/DC Adapter, ☐ Powered over Ethernet (PoE). ☐ Other

5 General Test Conditions / Configurations

5.1 Test Modes

NOTE: Worst cases for each IEEE 802.11 mode are selected to perform tests.

Test Mode	Test Modes Description
11A	IEEE 802.11a with data rate of 6 Mbps using SISO mode.
11N20	IEEE 802.11n with data rate of MCS0 and bandwidth of 20 MHz using SISO mode.
11N40	IEEE 802.11n with data rate of MCS0 and bandwidth of 40 MHz using SISO mode.
11AC20	IEEE 802.11ac with data rate of MCS0 and bandwidth of 20 MHz using SISO mode.
11AC40	IEEE 802.11ac with data rate of MCS0 and bandwidth of 40 MHz using SISO mode.
11AC80	IEEE 802.11ac with data rate of MCS0 and bandwidth of 80 MHz using SISO mode.

5.2 EUT Configurations

5.2.1 General Configurations

Configuration	Description
Test Antenna Ports	Until otherwise specified, - All TX tests are performed at all TX antenna ports of the EUT, and - All RX tests are performed at all RX antenna ports of the EUT.
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.


5.2.2 Customized Configurations

Test Mode	Antenna Port	Power Conf.,	Duty cycle [%]
11A	Ant 1	15.5	98.39
11N20	Ant 1	15.0	98.27
11N40	Ant 1	13.0	96.6
11AC20	Ant 1	15.0	98.23
11AC40	Ant 1	13.0	96.62
11AC80	Ant 1	13.0	93.38

5.3 Test Setups

5.3.1 Test Setup 1


The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.

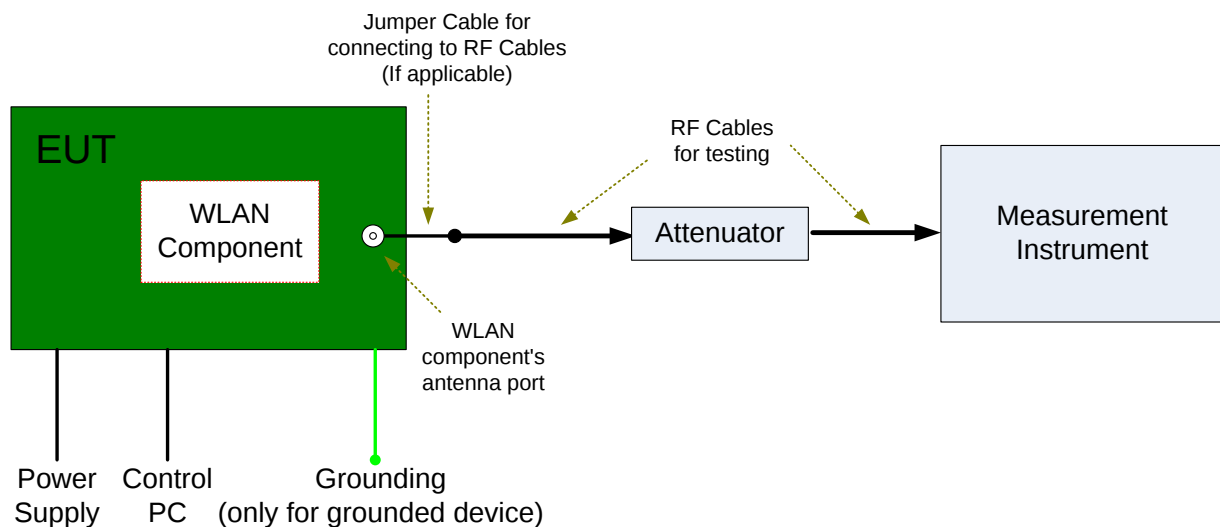


5.3.2 Test Setup 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.4. The test distance is 3 m (for 30 MHz to 26.5 GHz) or 1 m (for 26.5 GHz to 40 GHz). The setup is according to ANSI C63.10, ANSI C63.4 and CAN/CSA-CEI/IEC CISPR 22.

The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

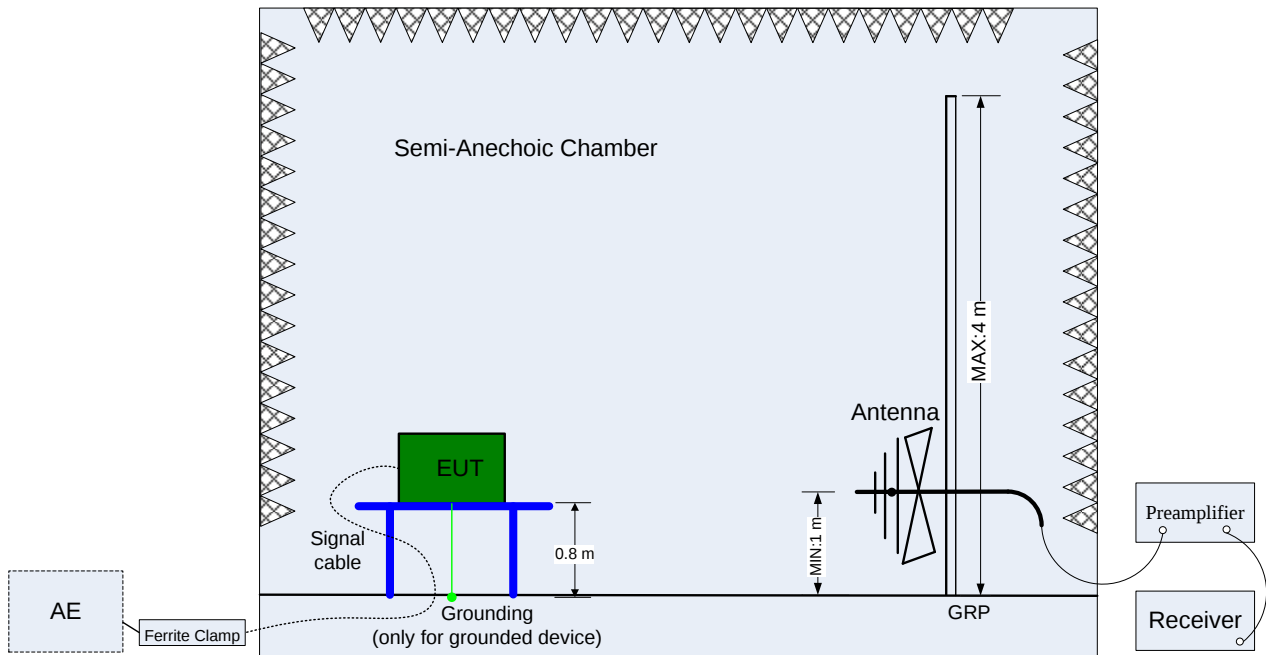

(Below 1 GHz)

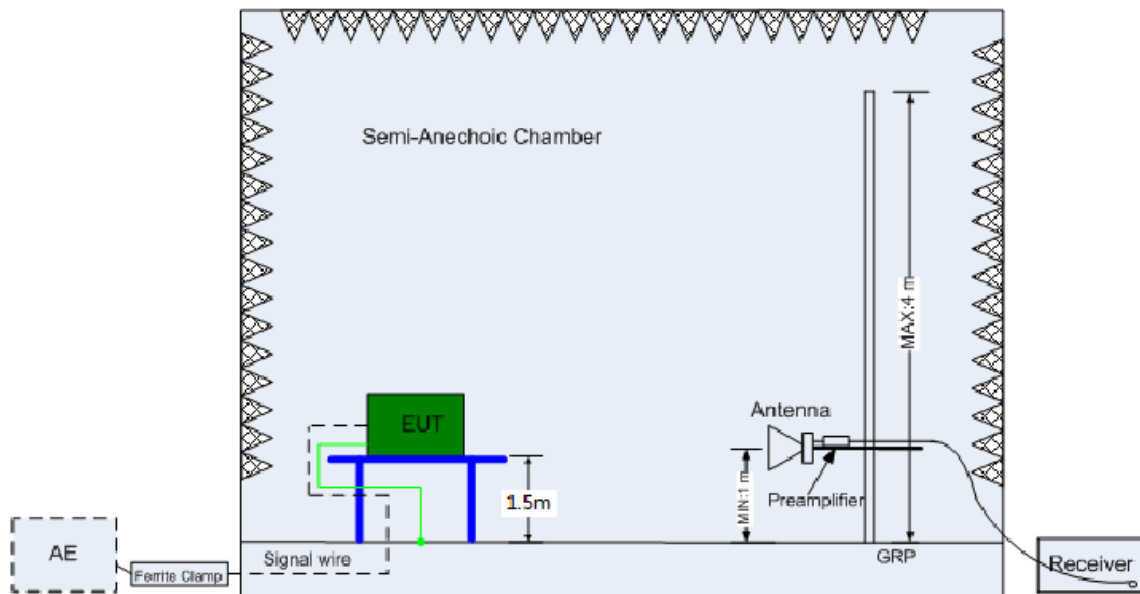


(Above 1 GHz)

5.3.3 Test Setup 3

The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

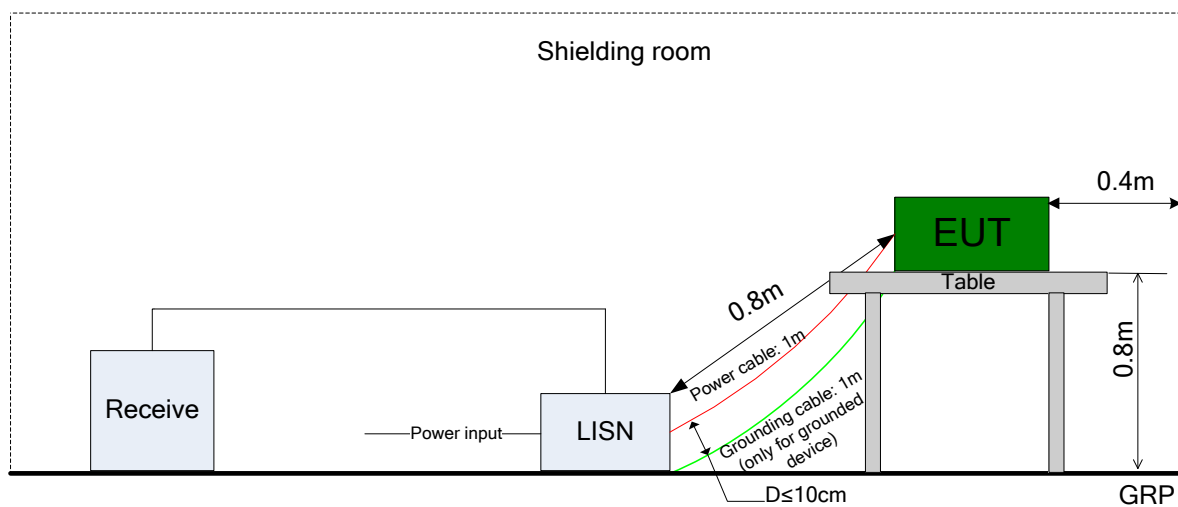

5.4 Test Conditions

Test Case	Test Conditions	
	Configuration	Description
Emission Bandwidth (EBW)	Meas. Method	FCC KDB 789033 D02 §C).
	Test Env.	TN/VN
	Test Setup	Test Setup 1
	EUT Conf.	All EUT conf. with Tx modes.
Occupied Bandwidth (OBW)	Meas. Method	FCC KDB 789033 D02 §D).
	Test Env.	TN/VN
	Test Setup	Test Setup 1
	EUT Conf.	All EUT conf. with Tx modes.
Maximum Conducted Output Power	Meas. Method	FCC KDB 789033 D02 §E)2)b) Method SA-1 and d) Method SA-2.
	Test Env.	TN/VN
	Test Setup	Test Setup 1
	EUT Conf.	All EUT conf. with Tx modes.
Maximum Power Spectral Density	Meas. Method	FCC KDB 789033 D02 §F).
	Test Env.	TN/VN
	Test Setup	Test Setup 1
	EUT Conf.	All EUT conf. with Tx modes.
Frequency Stability	Meas. Method	15.407(g) Frequency Stability
	Test Env.	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) VL, VN and VH of Rated Voltage at Ambient Climate.
	Test Setup	Test Setup 1
	EUT Conf.	Ch.36,Ch.165

6 Main Test Instruments

This table gives a complete overview of the RF measurement equipment.

Main Test Equipments(BT/WIFI test system)					
Equipment Name	Manufacturer	Model	Serial Number	Cal Date	Cal-Due
Power Sensor	R&S	NRP2	103085/106211	2018/05/17	2019/05/17
Temperature Chamber	WEISS	WKL64	56246002940010	2018/12/13	2019/12/13
Spectrum Analyzer	Agilent	N9030A	MY49431698	2018/07/23	2019/07/23
Universal Radio Communication Tester	R&S	CMW500	159302	2018/07/23	2019/07/23
Signal generator	Agilent	E8257D	MY51500314	2018/04/27	2019/04/27

7 Measurement Uncertainty

For a 95% confidence level ($k = 2$), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item		Extended Uncertainty
Transmit Output Power Data	Power [dBm]	U = 0.58 dB
RF Power Density, Conducted	Power [dBm]	U = 0.64 dB
Bandwidth	Magnitude [kHz]	20MHz: U=41.78kHz 40MHz: U=82.12kHz 80MHz: U=163.5kHz
Band Edge Compliance	Disturbance Power [dBm]	U = 0.9 dB
Spurious Emissions, Conducted	Disturbance Power [dBm]	20MHz~3.6GHz: U=0.88dB 3.6GHz~8.4GHz: U=1.08dB 8.4GHz~13.6GHz: U=1.24dB 13.6GHz~22GHz: U=1.34dB 22GHz~26.5GHz: U=1.36dB
Field Strength of Spurious Radiation	ERP/EIRP [dBm]	For 3 m Chamber: U = 5.90 dB (30 MHz-1 GHz) U = 4.94 dB (1 GHz-18 GHz) U = 4.24 dB (18 GHz-26.5 GHz) U = 5.5 dB (26.5 GHz-40 GHz)
Frequency Stability	Frequency Accuracy [Hz]	U=82.24Hz
AC Power Line Conducted Emissions	Disturbance Voltage[dBμV]	U=2.3 dB
Duty Cycle	Duty Cycle [%]	U=±2.06 %

8 Appendixes

Appendix No.	Description
SYBH(Z-RF)20190219010002-2005-A	Appendix_for_5G_WLAN

END