





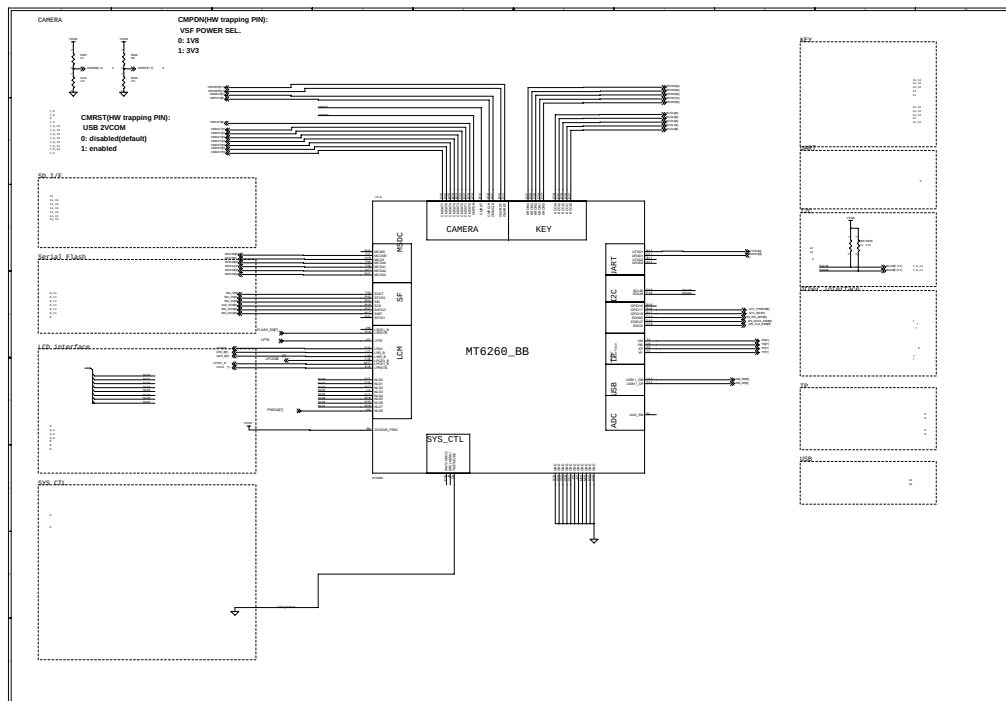

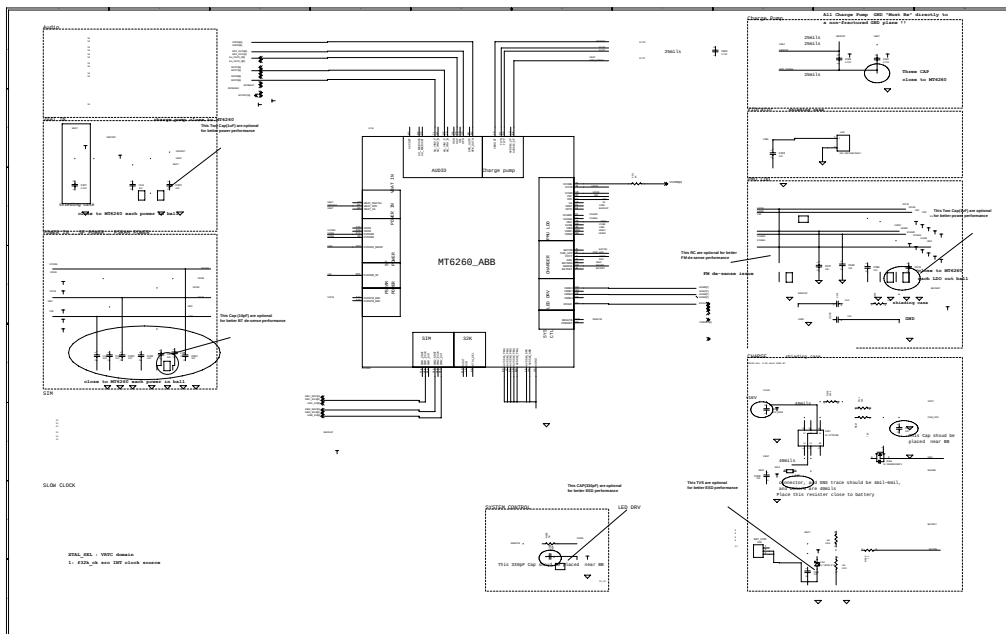

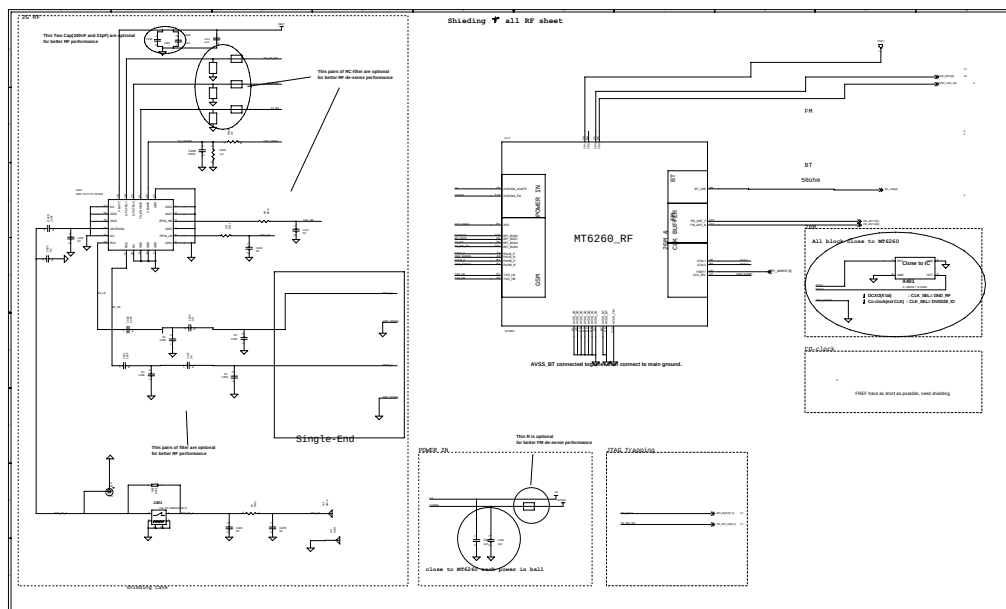

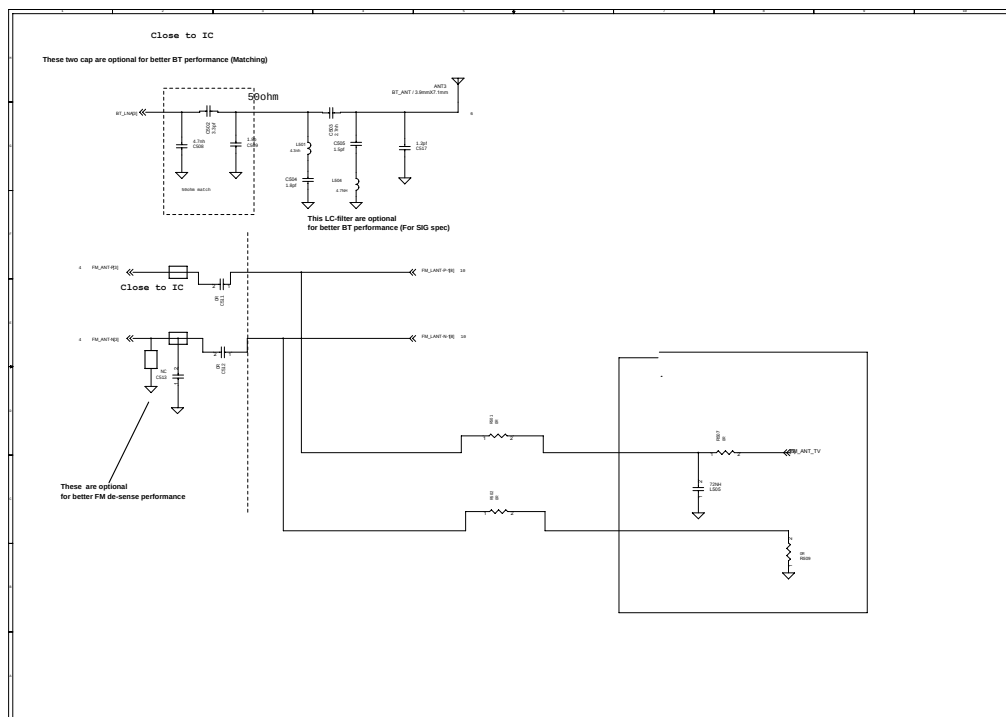


Serial Flash

Shielding ✖ all sheet

SHOLD : SIO3
SWP : SIO2
SOUT : SQI_SI : DQ0
SIN : SQI_SO : DQ1

2

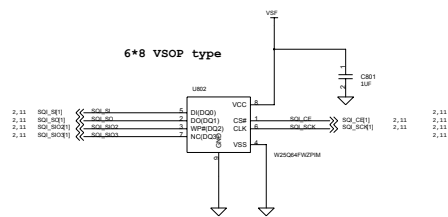

LCM (Parallel Serial co-exist)




In LCM interface we use serial interface (left-hand side section) for serial interface (right-hand side section).
In serial mode LCM serial and parallel on layout can be modified in M2000 solution.

This board was tested for data

Pin 2146, 2147, 2148



This board was tested for data



Camera

Based on your system board design, it is not possible to connect the camera to the system.

This board was tested for data

Camera Interface fix 2.8V

