

Date: 2024-02-27

01_LTE Band 71_20M_QPSK_1RB_0Offset_Left Cheek_0mm_Ch133322

Communication System: Band 71; Frequency: 683.000

Medium: HSL. Medium parameters used: $f = 683.000$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.321 W/kg; SAR (10g) = 0.225 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.327 W/kg; SAR (10g) = 0.257 W/kg;

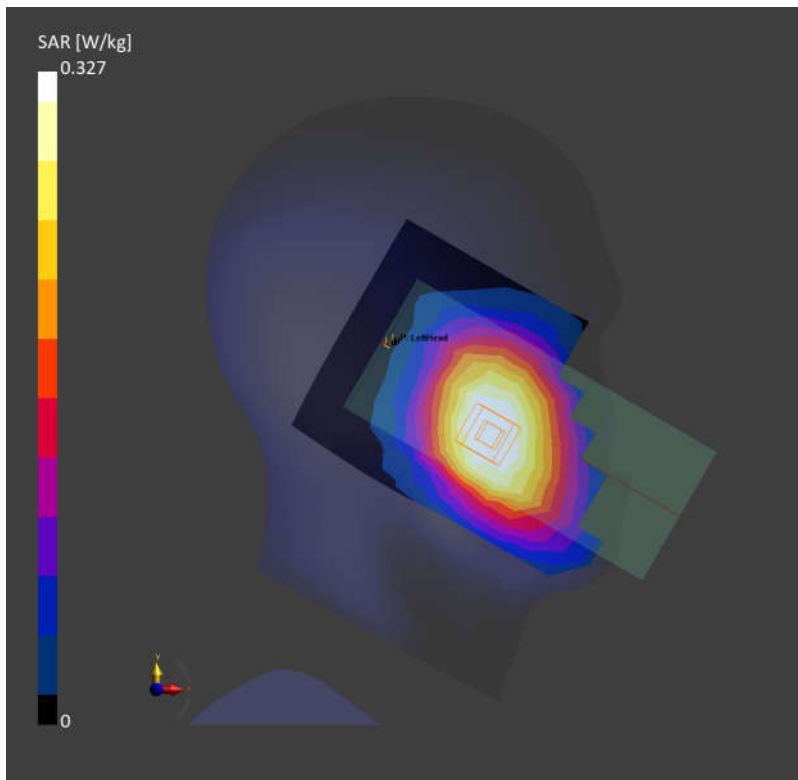

Date: 2024-02-27

02_LTE Band 12_10M_QPSK_1RB_0Offset_Left Cheek_0mm_Ch23095

Communication System: Band 12; Frequency: 707.500

Medium: HSL. Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.299 W/kg; SAR (10g) = 0.210 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.13 dB

SAR (1g) = 0.317 W/kg; SAR (10g) = 0.251 W/kg;

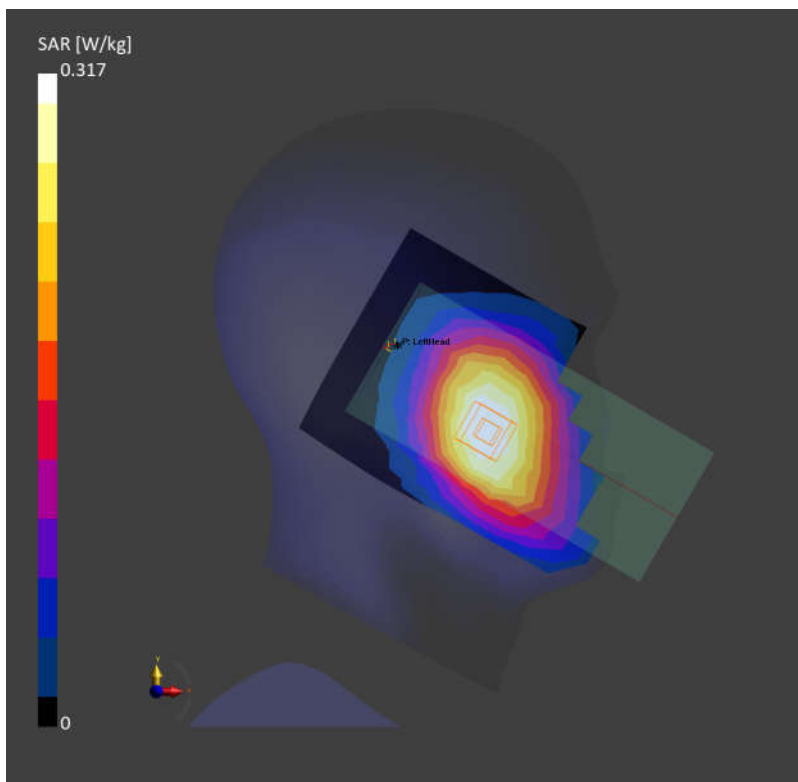

03_LTE Band 13_10M_QPSK_1RB_0Offset_Left Cheek_0mm_Ch23230

Communication System: Band 13; Frequency: 782.000

Medium: HSL. Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.910$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.275 W/kg; SAR (10g) = 0.191 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.12 dB

SAR (1g) = 0.292 W/kg; SAR (10g) = 0.229 W/kg;

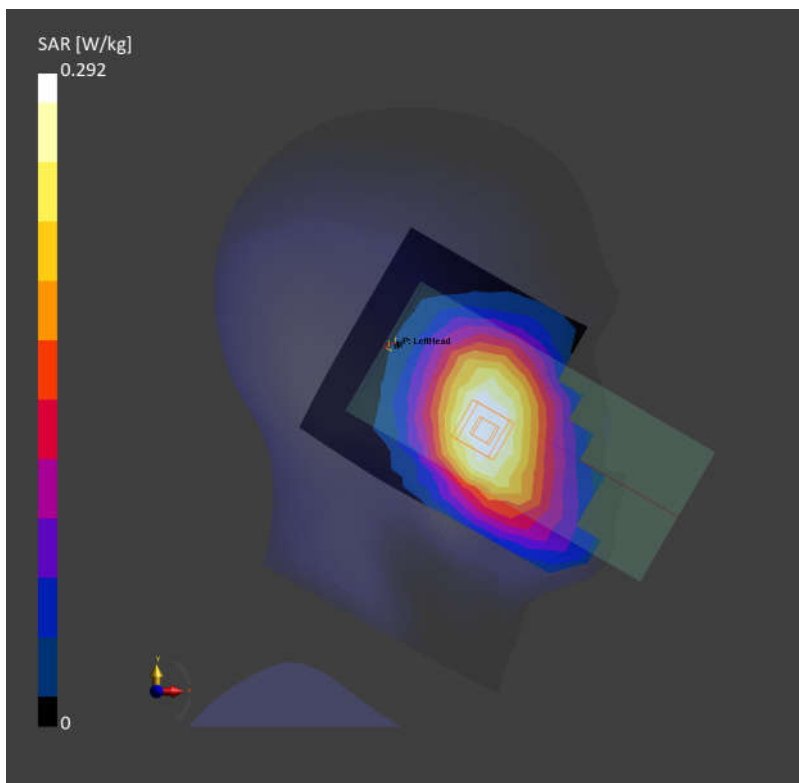

04_LTE Band 14_10M_QPSK_1RB_0Offset_Left Cheek_0mm_Ch23330

Communication System: Band 14; Frequency: 793.000

Medium: HSL. Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 42.2$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.299 W/kg; SAR (10g) = 0.208 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.12 dB

SAR (1g) = 0.318 W/kg; SAR (10g) = 0.249 W/kg;

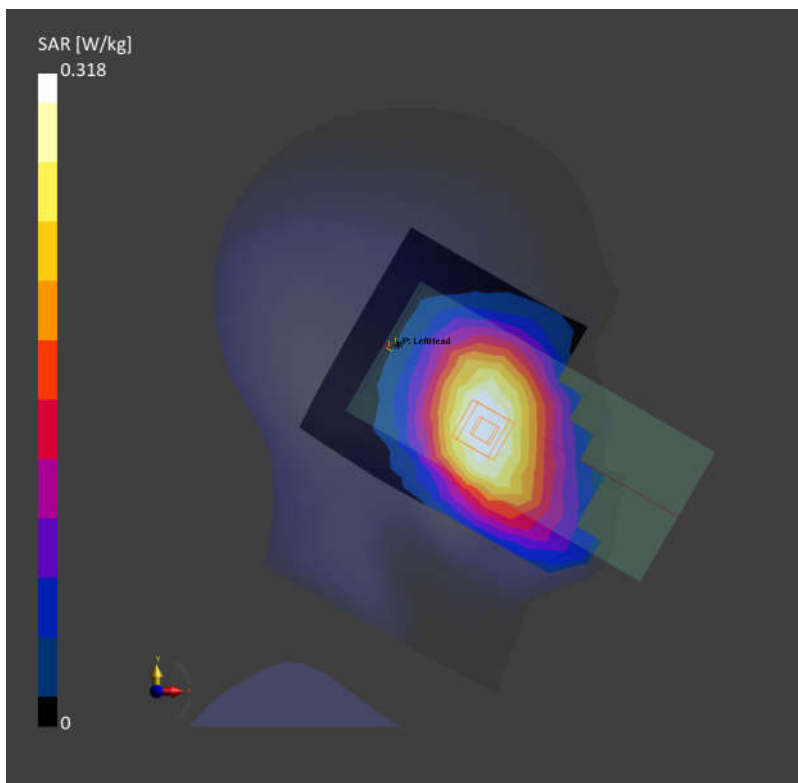

05_FR1 n71_20M_QPSK_50RB_28Offset_Left Cheek_0mm_Ch136100

Communication System: Band n71; Frequency: 680.500

Medium: HSL. Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.129 W/kg; SAR (10g) = 0.090 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.134 W/kg; SAR (10g) = 0.105 W/kg;

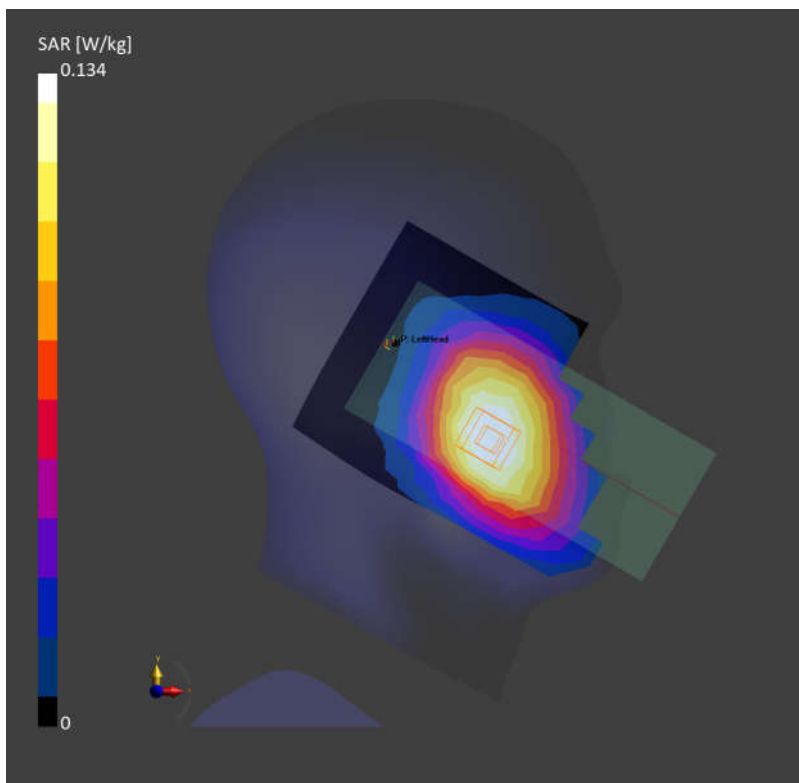

06_FR1 n12_15M_QPSK_36RB_22Offset_Right Cheek_0mm_Ch141500

Communication System: Band n12; Frequency: 707.500

Medium: HSL. Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.056 W/kg; SAR (10g) = 0.039 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.15 dB

SAR (1g) = 0.059 W/kg; SAR (10g) = 0.046 W/kg;

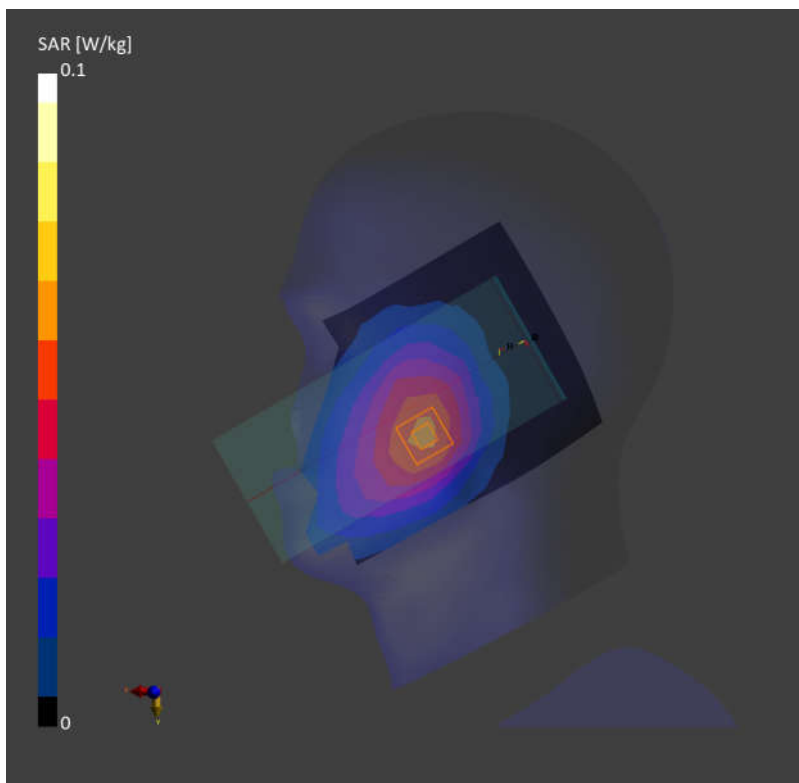

07_FR1 n14_10M_QPSK_1RB_1Offset_Left Cheek_0mm_Ch158600

Communication System: Band n14; Frequency: 793.000

Medium: HSL. Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 42.2$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.206 W/kg; SAR (10g) = 0.142 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.219 W/kg; SAR (10g) = 0.171 W/kg;

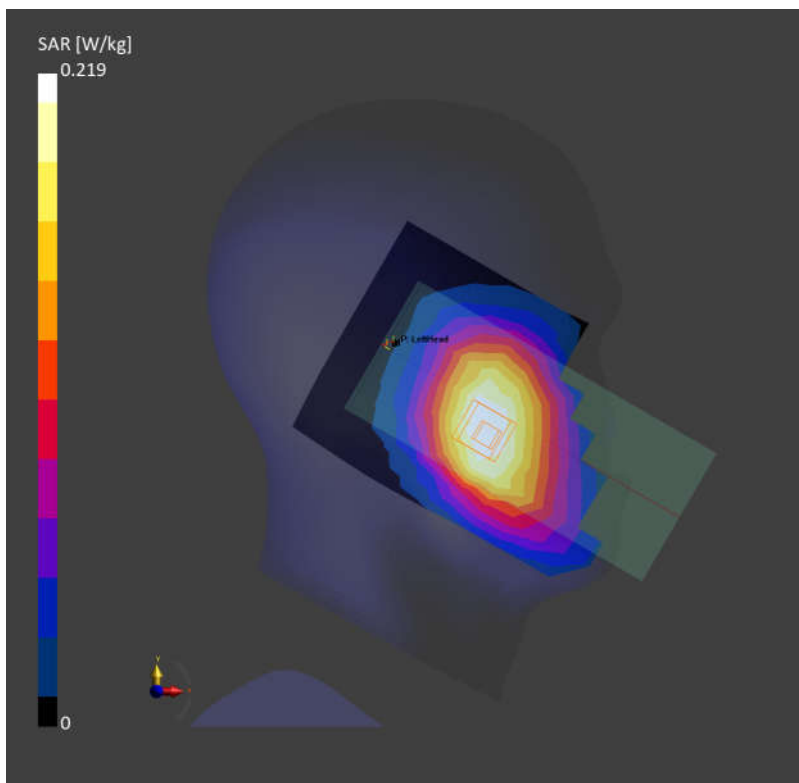

08_GSM850_GPRS (4 Tx slots)_Left Cheek_0mm_Ch189

Communication System: GSM 850; Frequency: 836.400

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.263 W/kg; SAR (10g) = 0.182 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.11 dB

SAR (1g) = 0.257 W/kg; SAR (10g) = 0.213 W/kg;

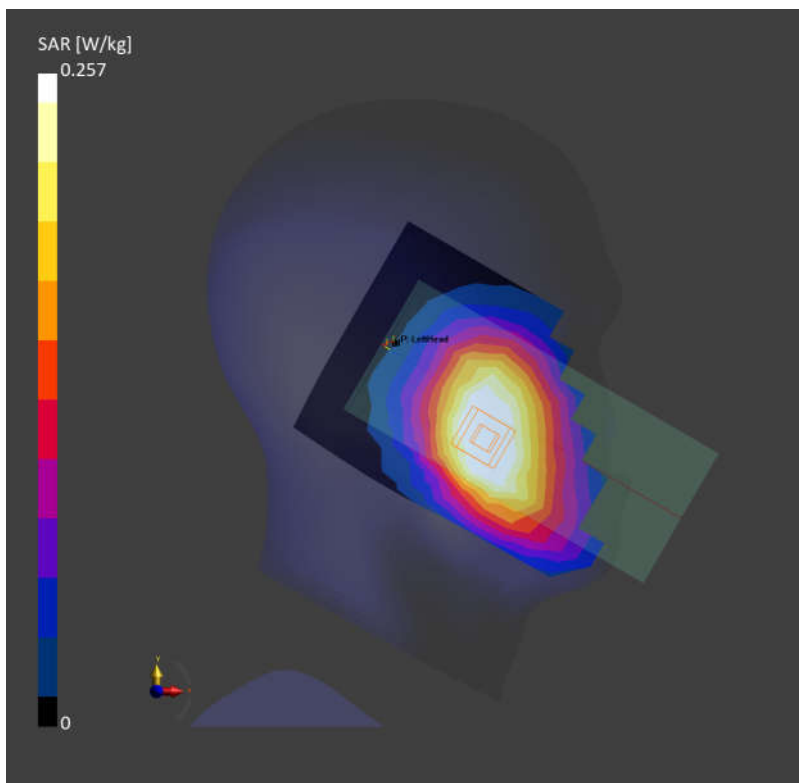

09_WCDMA V_RMC 12.2Kbps_Left Cheek_0mm_Ch4182

Communication System: Band 5; Frequency: 836.400

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.195 W/kg; SAR (10g) = 0.134 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.205 W/kg; SAR (10g) = 0.161 W/kg;

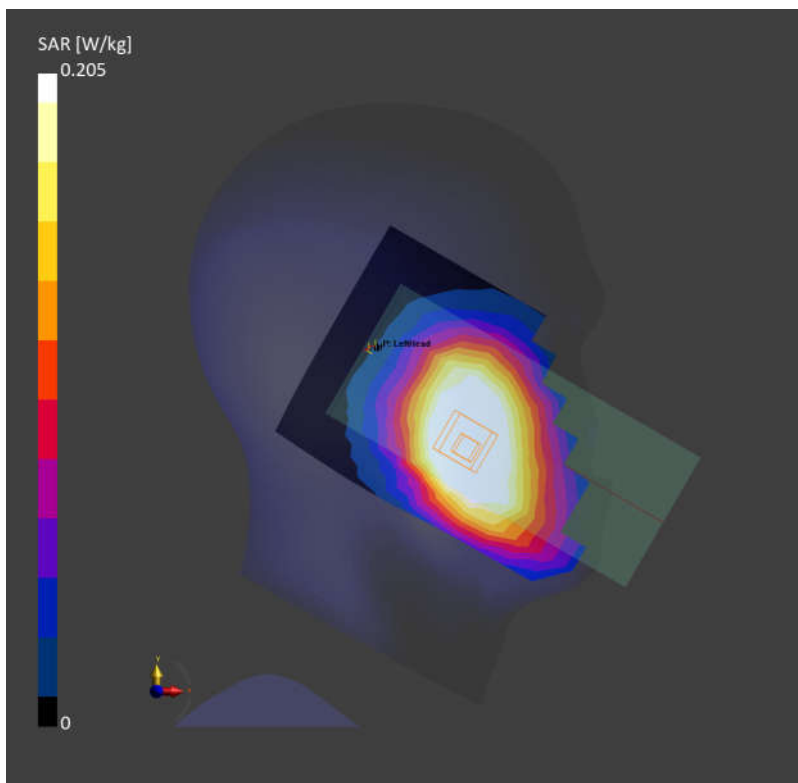

10_LTE Band 26_15M_QPSK_1RB_0Offset_Left Cheek_0mm_Ch26865

Communication System: Band 26; Frequency: 831.500

Medium: HSL. Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.322 W/kg; SAR (10g) = 0.223 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.17 dB

SAR (1g) = 0.340 W/kg; SAR (10g) = 0.265 W/kg;

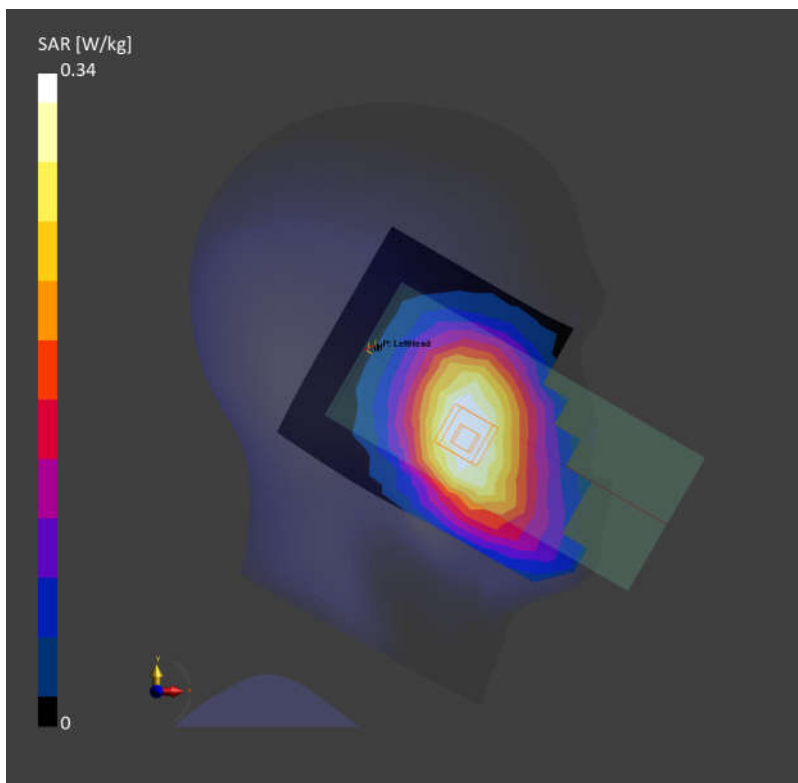

11_FR1 n26_20M_QPSK_1RB_1Offset_Left Cheek_0mm_Ch166300

Communication System: Band n26; Frequency: 831.500

Medium: HSL. Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.207 W/kg; SAR (10g) = 0.143 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.220 W/kg; SAR (10g) = 0.171 W/kg;

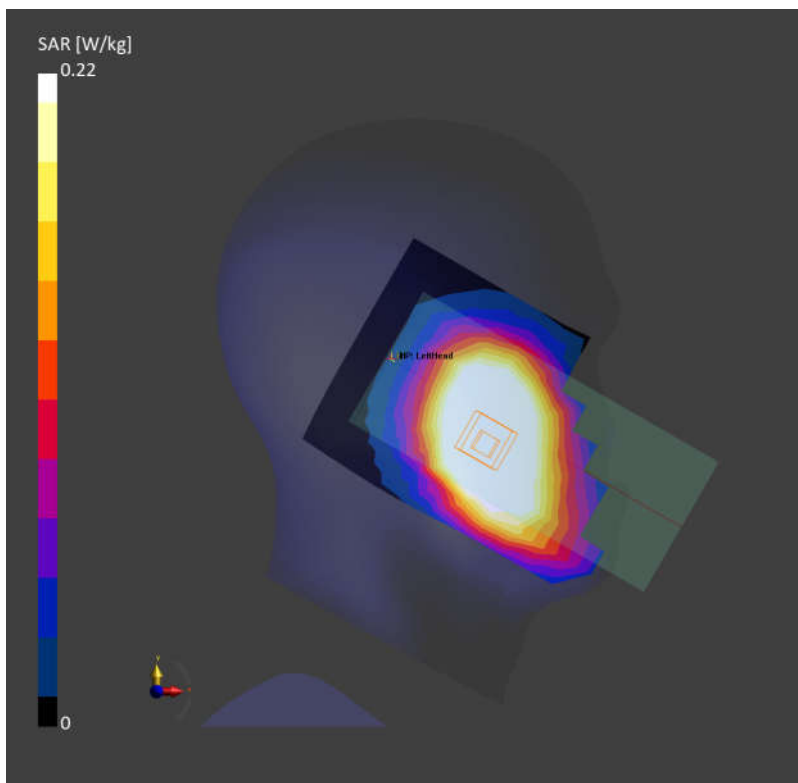

12_WCDMA IV_RMC 12.2Kbps_Right Cheek_0mm_Ch1413

Communication System: Band 4; Frequency: 1732.600

Medium: HSL. Medium parameters used: $f = 1732.600$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.87, 9.06, 8.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.581 W/kg; SAR (10g) = 0.298 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.693 W/kg; SAR (10g) = 0.313 W/kg;

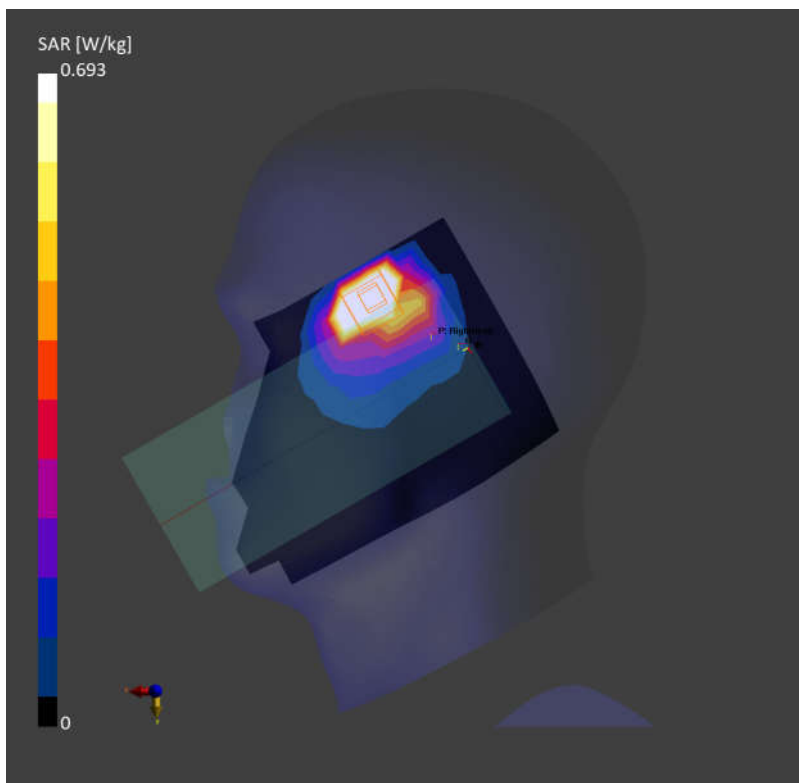

13_LTE Band 66_20M_QPSK_1RB_0Offset_Right Cheek_0mm_Ch132322

Communication System: Band 66; Frequency: 1745.000

Medium: HSL. Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.87, 9.06, 8.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.623 W/kg; SAR (10g) = 0.318 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.8 mm x 4.8 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.707 W/kg; SAR (10g) = 0.329 W/kg;

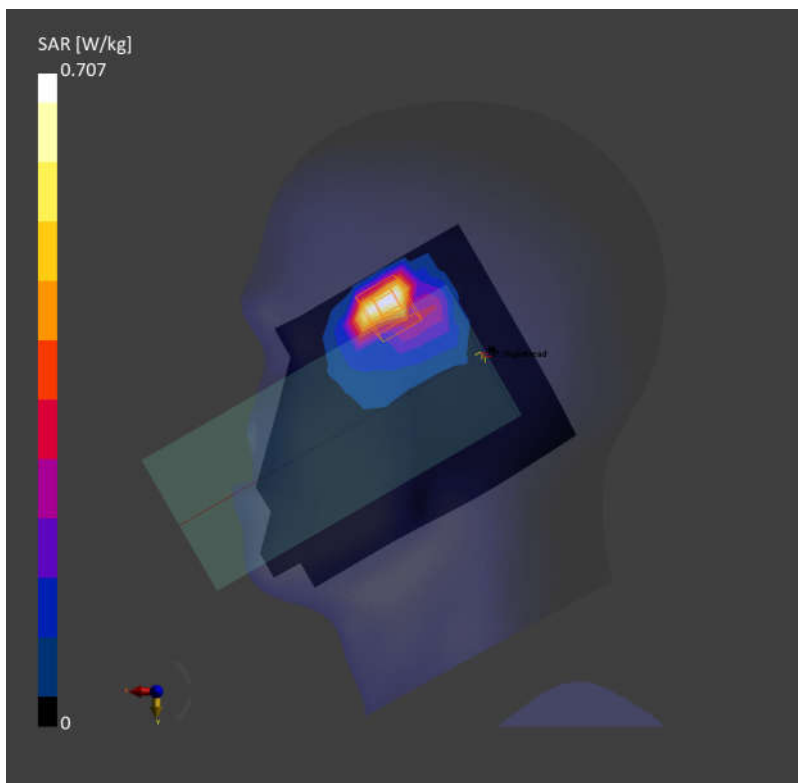

14_FR1 n70_15M_QPSK_36RB_22Offset_Right Cheek_0mm_Ch340500

Communication System: Band n70; Frequency: 1702.500

Medium: HSL. Medium parameters used: $f = 1702.500$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 41.1$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.87, 9.06, 8.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.649 W/kg; SAR (10g) = 0.392 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.700 W/kg; SAR (10g) = 0.409 W/kg;

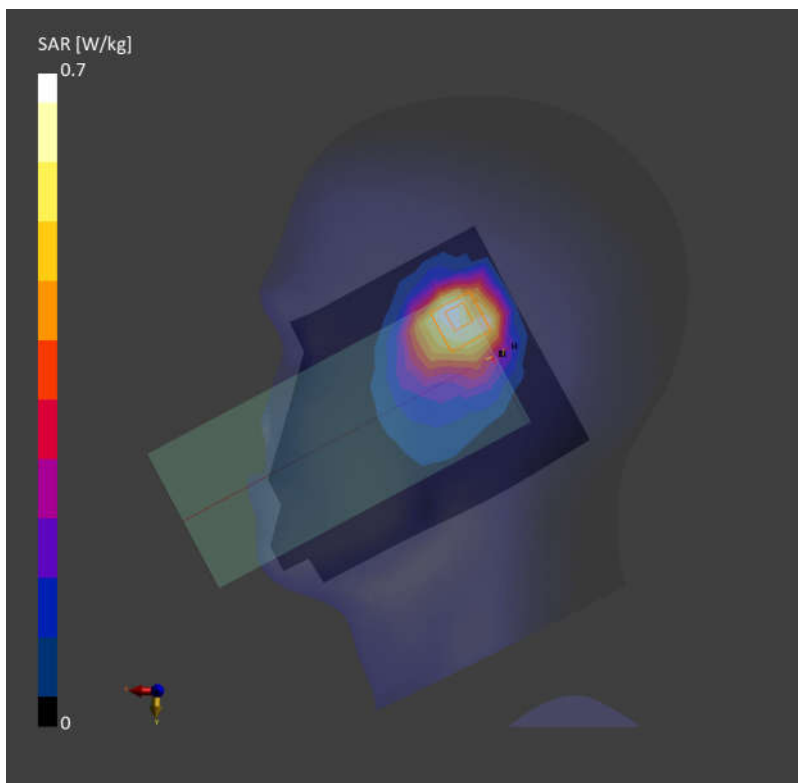

15_FR1 n66_40M_QPSK_108RB_54Offset_Right Cheek_0mm_Ch349000

Communication System: Band n66; Frequency: 1745.000

Medium: HSL. Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.87, 9.06, 8.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.628 W/kg; SAR (10g) = 0.320 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.12 dB

SAR (1g) = 0.736 W/kg; SAR (10g) = 0.330 W/kg;

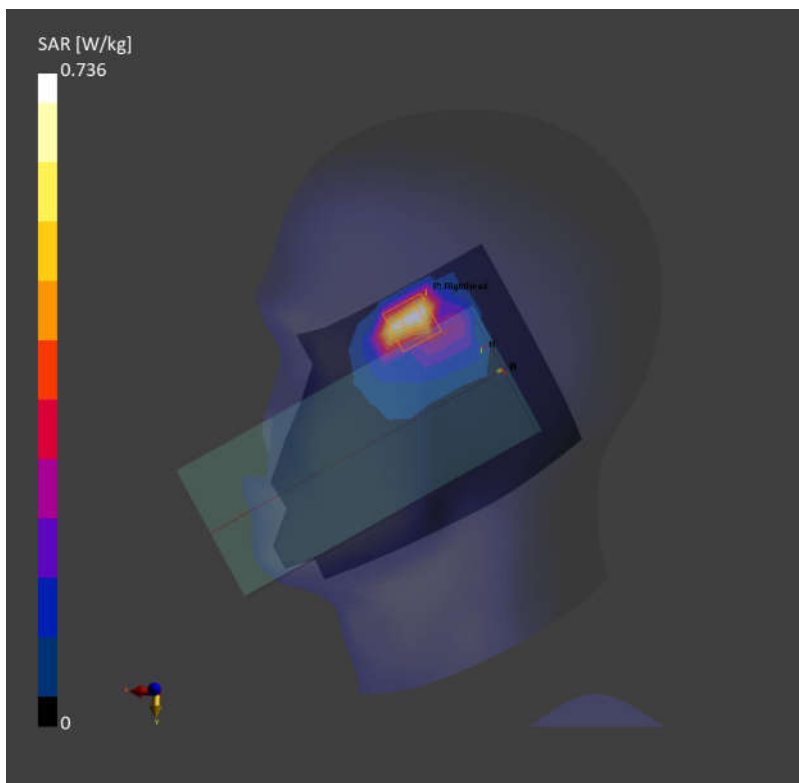

16_GSM1900_GPRS (4 Tx slots)_Right Cheek_0mm_Ch661

Communication System: PCS 1900; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.647 W/kg; SAR (10g) = 0.327 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm

Power Drift = -0.09 dB

SAR (1g) = 0.667 W/kg; SAR (10g) = 0.299 W/kg;

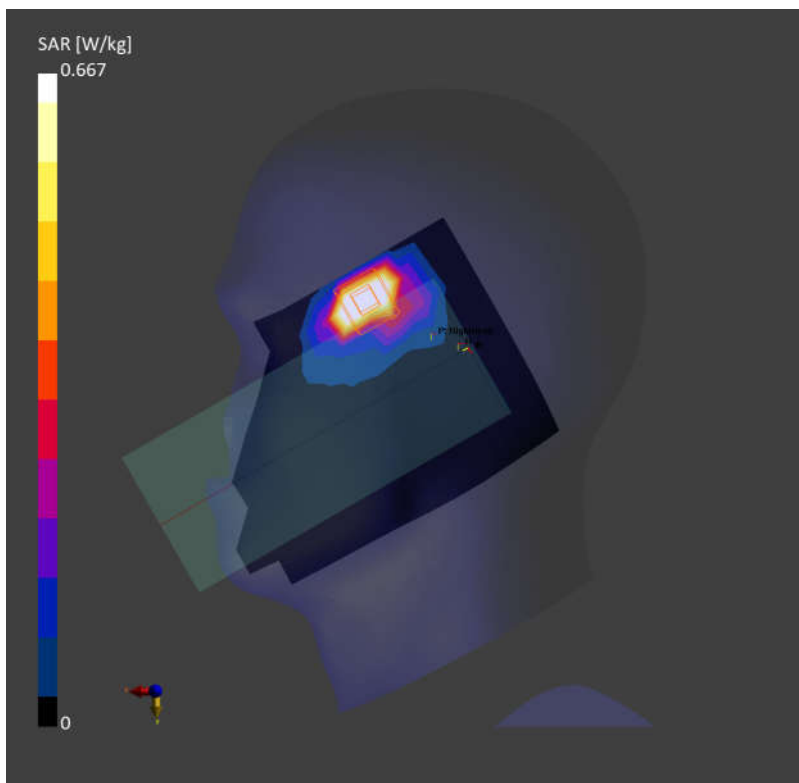

17_WCDMA II_RMC 12.2Kbps_Right Cheek_0mm_Ch9262

Communication System: Band 2; Frequency: 1852.400

Medium: HSL. Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.633 W/kg; SAR (10g) = 0.359 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.687 W/kg; SAR (10g) = 0.386 W/kg;

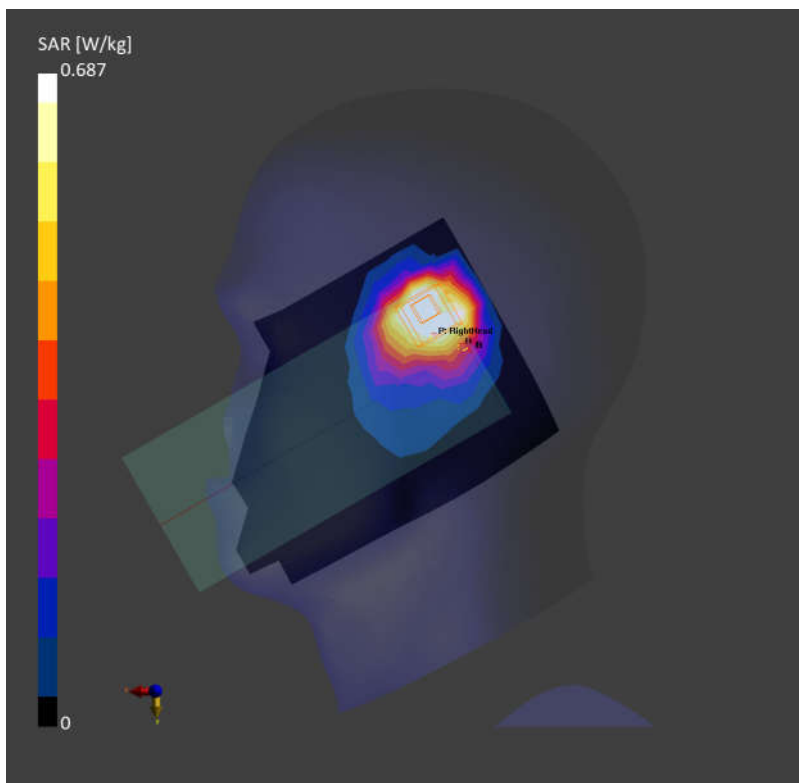

18_LTE Band 25_20M_QPSK_1RB_0Offset_Right Cheek_0mm_Ch26340

Communication System: Band 25; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.509 W/kg; SAR (10g) = 0.265 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 0.669 W/kg; SAR (10g) = 0.297 W/kg;

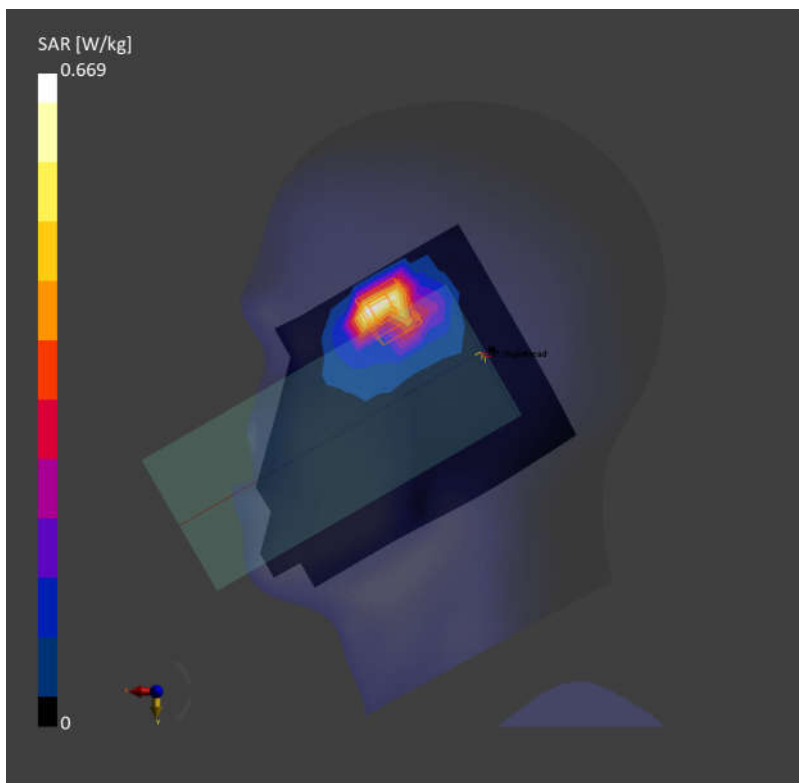

19_FR1 n25_40M_QPSK_1RB_1Offset_Right Cheek_0mm_Ch376500

Communication System: Band n25; Frequency: 1882.500

Medium: HSL. Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.553 W/kg; SAR (10g) = 0.287 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.15 dB

SAR (1g) = 0.728 W/kg; SAR (10g) = 0.323 W/kg;

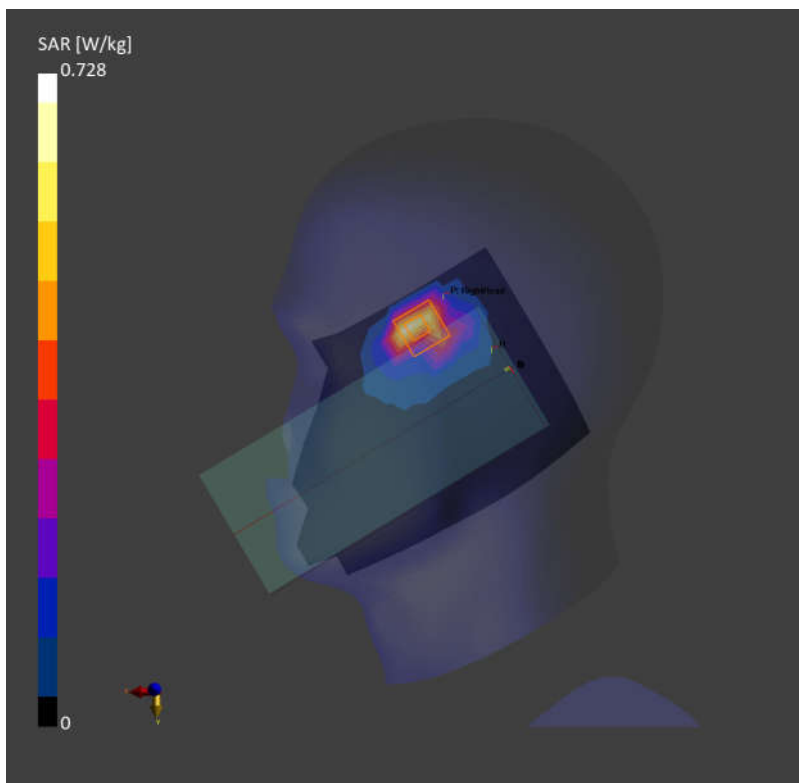

20_LTE Band 30_10M_QPSK_1RB_0Offset_Right Cheek_0mm_Ch27710

Communication System: Band 30; Frequency: 2310.000

Medium: HSL. Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.72$ S/m; $\epsilon_r = 38.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.57, 8.73, 7.66); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.667 W/kg; SAR (10g) = 0.367 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.695 W/kg; SAR (10g) = 0.370 W/kg;

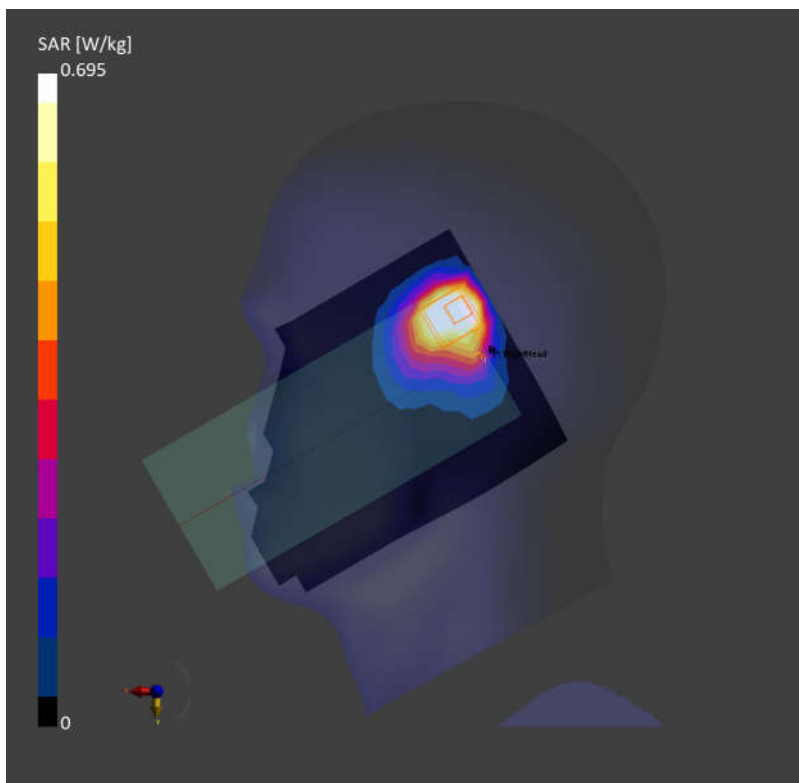

21_FR1 n30_10M_QPSK_25RB_14Offset_Right Cheek_0mm_Ch462000

Communication System: Band n30; Frequency: 2310.000

Medium: HSL. Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.72$ S/m; $\epsilon_r = 38.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.57, 8.73, 7.66); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.740 W/kg; SAR (10g) = 0.322 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.7 mm x 4.7 mm x 1.5 mm

Power Drift = -0.18 dB

SAR (1g) = 0.721 W/kg; SAR (10g) = 0.308 W/kg;

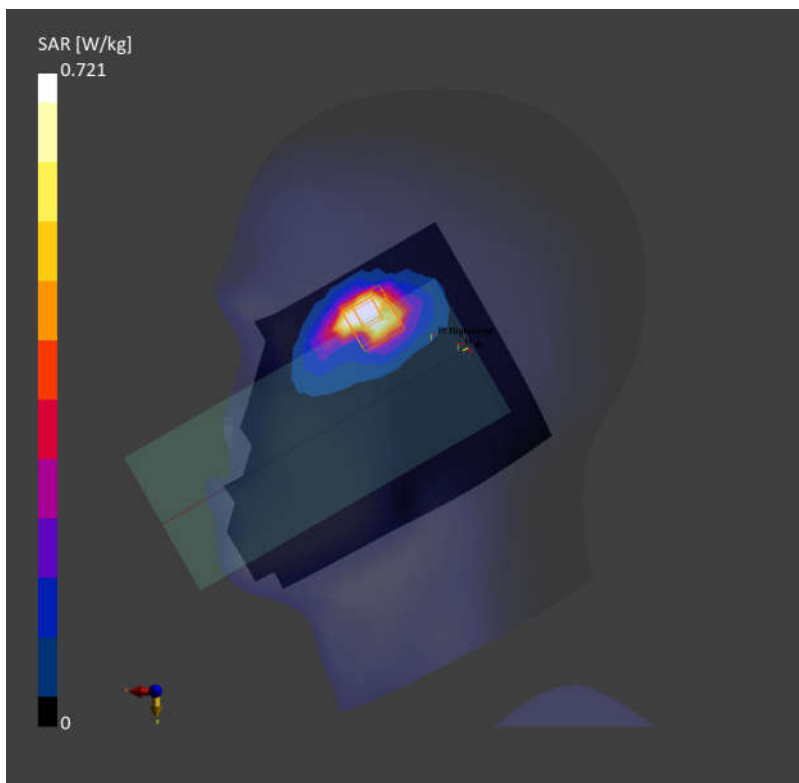

22_LTE Band 7_20M_QPSK_1RB_0Offset_Left Cheek_0mm_Ch21350

Communication System: Band 7; Frequency: 2560.000

Medium: HSL. Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.631 W/kg; SAR (10g) = 0.243 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm

Power Drift = -0.08 dB

SAR (1g) = 0.696 W/kg; SAR (10g) = 0.248 W/kg;

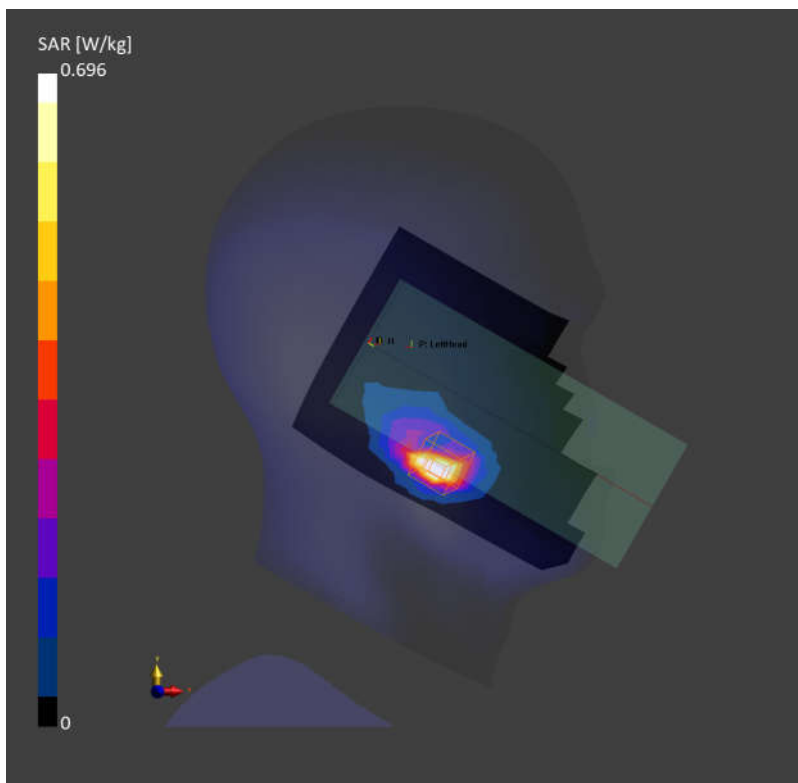

Date: 2024-03-04

23LTE Band 41 HPUE_20M_QPSK_1RB_0Offset_Right Tilted_0mm_Ch41055

Communication System: Band 41; Frequency: 2636.500

Medium: HSL. Medium parameters used: $f = 2636.500$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.681 W/kg; SAR (10g) = 0.300 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.707 W/kg; SAR (10g) = 0.309 W/kg;

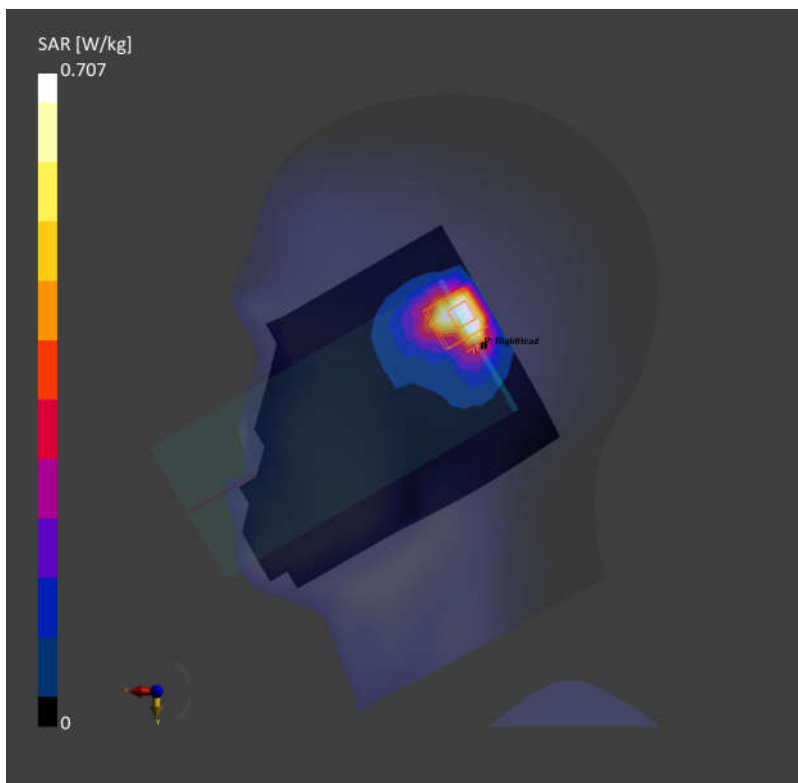

24_FR1 n7_50M_QPSK_135RB_68Offset_Left Cheek_0mm_Ch507000

Communication System: Band n7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.696 W/kg; SAR (10g) = 0.272 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.09 dB

SAR (1g) = 0.731 W/kg; SAR (10g) = 0.284 W/kg;

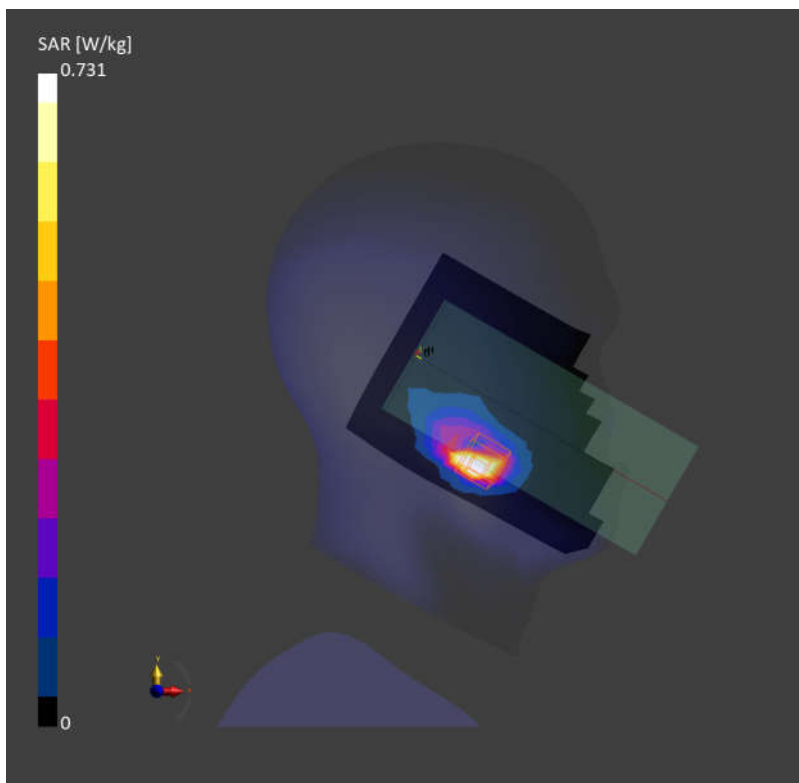

25_FR1 n41 HPUE_100M_QPSK_135RB_69Offset_Right Tilted_0mm_Ch518598

Communication System: Band n41; Frequency: 2592.990

Medium: HSL. Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.698 W/kg; SAR (10g) = 0.314 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.726 W/kg; SAR (10g) = 0.321 W/kg;

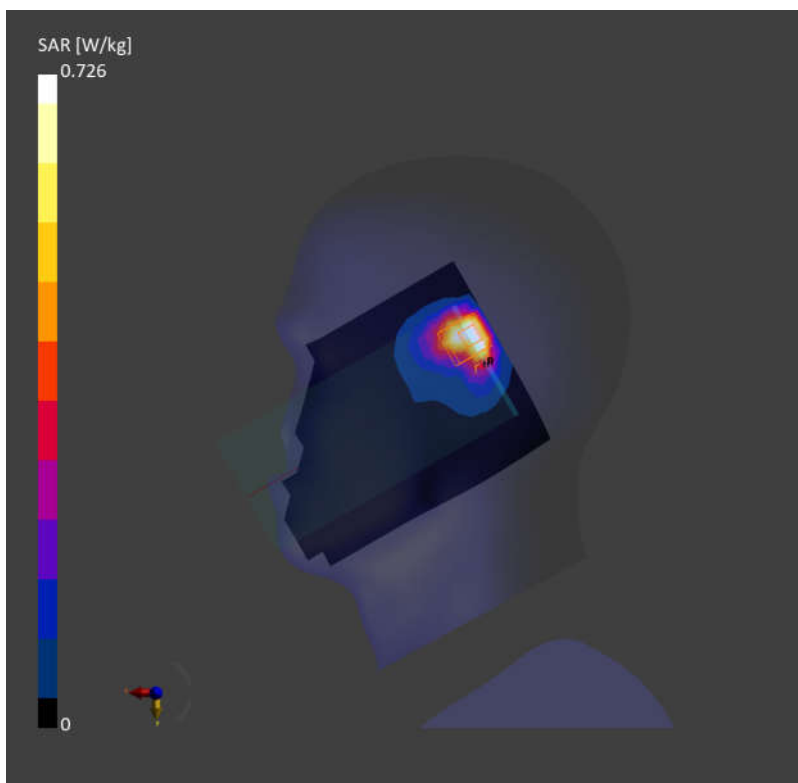

26_LTE Band 48_20M_QPSK_1RB_0Offset_Left Cheek_0mm_Ch55830

Communication System: Band 48; Frequency: 3609.000

Medium: HSL. Medium parameters used: $f = 3609.000$ MHz; $\sigma = 2.90$ S/m; $\epsilon_r = 38.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.89, 8.06, 7.01); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.611 W/kg; SAR (10g) = 0.231 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.09 dB

SAR (1g) = 0.674 W/kg; SAR (10g) = 0.239 W/kg;

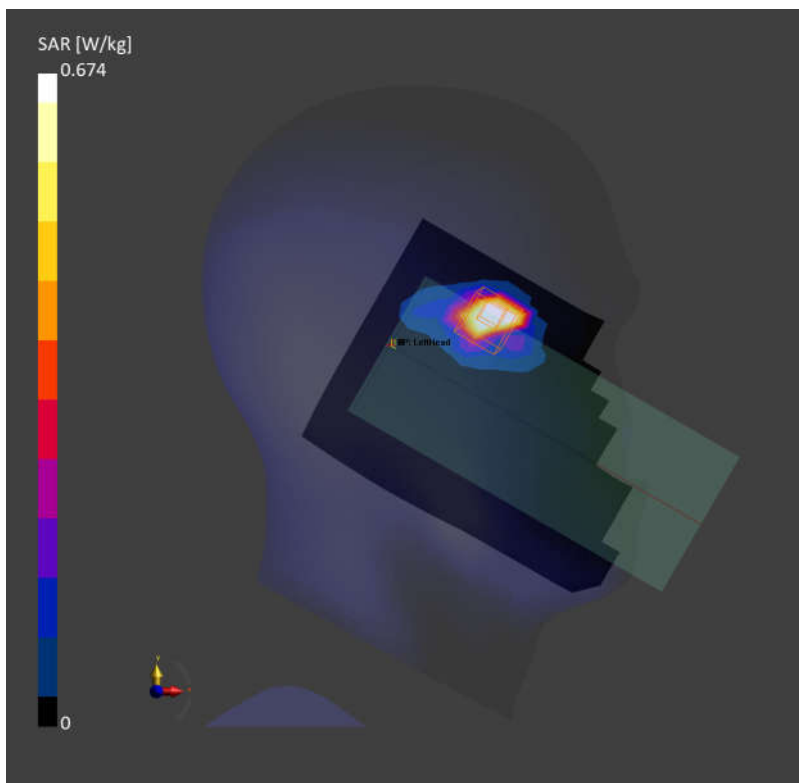

Date: 2024-03-06

27_FR1 n48_40M_QPSK_50RB_28Offset_Left Cheek_0mm_Ch641666

Communication System: Band n48; Frequency: 3624.99

Medium: HSL. Medium parameters used: $f = 3624.985$ MHz; $\sigma = 2.91$ S/m; $\epsilon_r = 38.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.89, 8.06, 7.01); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.618 W/kg; SAR (10g) = 0.233 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 0.708 W/kg; SAR (10g) = 0.242 W/kg;

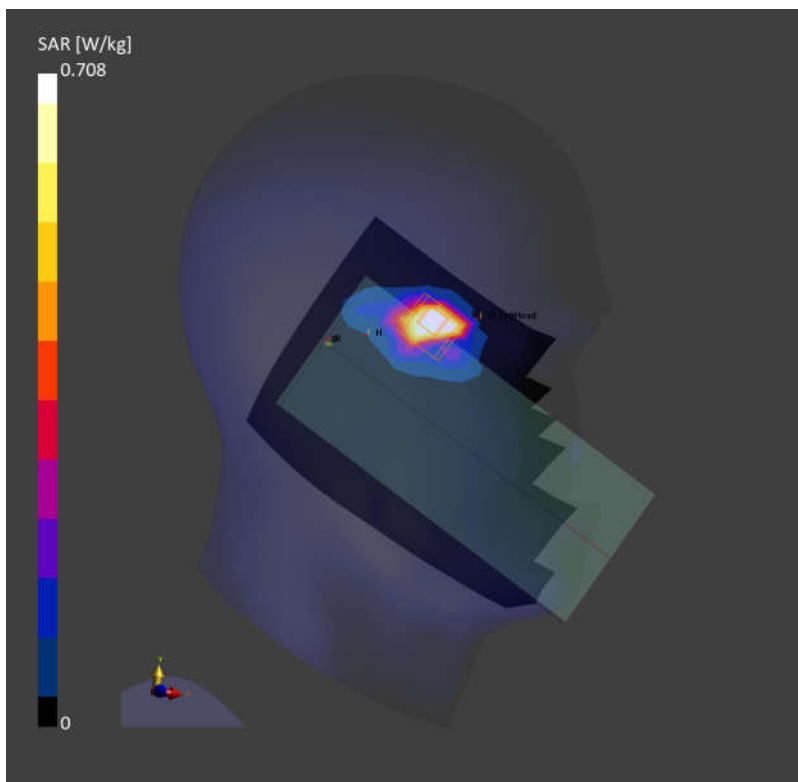

Date: 2024-03-05

28_FR1 n77 Part 27Q HPUE_100M_QPSK_1RB_1Offset_Right Cheek_0mm_Ch633334

Communication System: Band n77; Frequency: 3500.010

Medium: HSL. Medium parameters used: $f = 3500.010$ MHz; $\sigma = 2.88$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.99, 8.16, 7.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.694 W/kg; SAR (10g) = 0.266 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.04 dB

SAR (1g) = 0.698 W/kg; SAR (10g) = 0.265 W/kg;

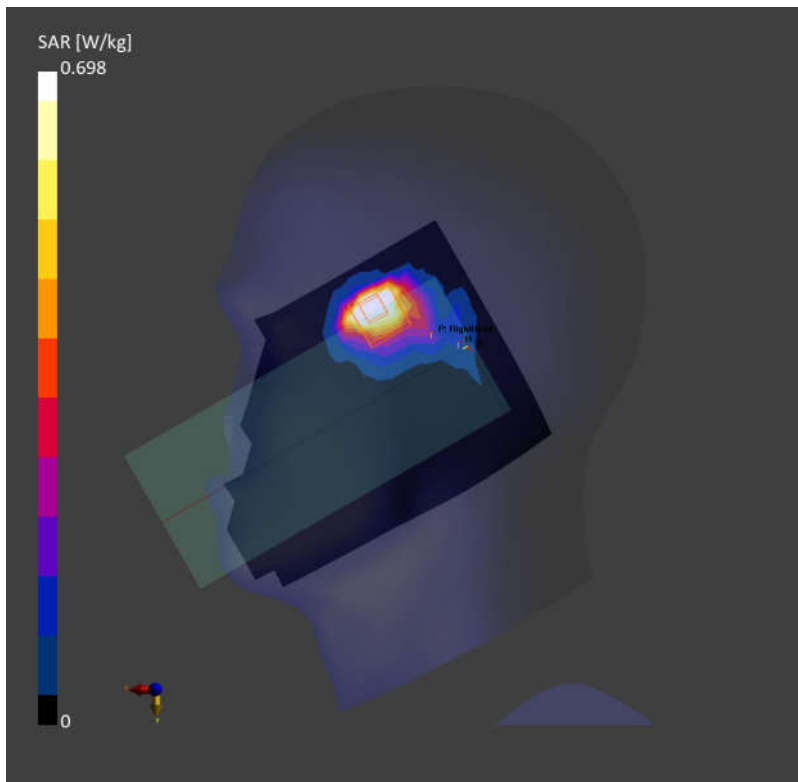

29_WLAN2.4GHz_802.11b 1Mbps_Left Cheek_0mm_Ch11

Communication System: WLAN 2.4GHz; Frequency: 2462.000

Medium: HSL. Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.47, 8.61, 7.55); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.832 W/kg; SAR (10g) = 0.332 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm

Power Drift = -0.07 dB

SAR (1g) = 0.808 W/kg; SAR (10g) = 0.314 W/kg;

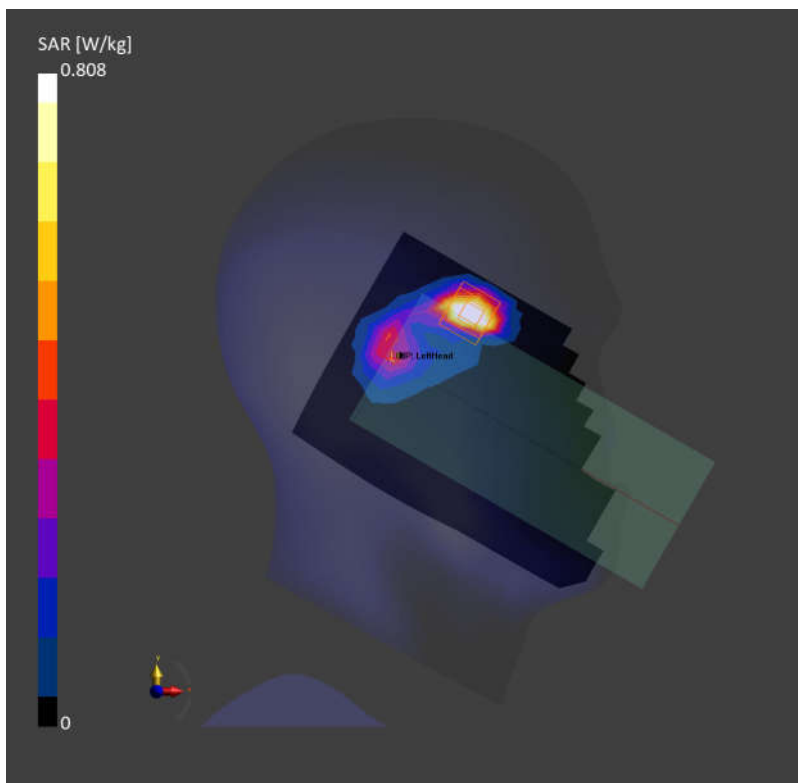

30_Bluetooth_1Mbps_Left Cheek_0mm_Ch39

Communication System: ISM 2.4 GHz Band; Frequency: 2441.000

Medium: HSL. Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.47, 8.61, 7.55); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.259 W/kg; SAR (10g) = 0.104 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.265 W/kg; SAR (10g) = 0.112 W/kg;

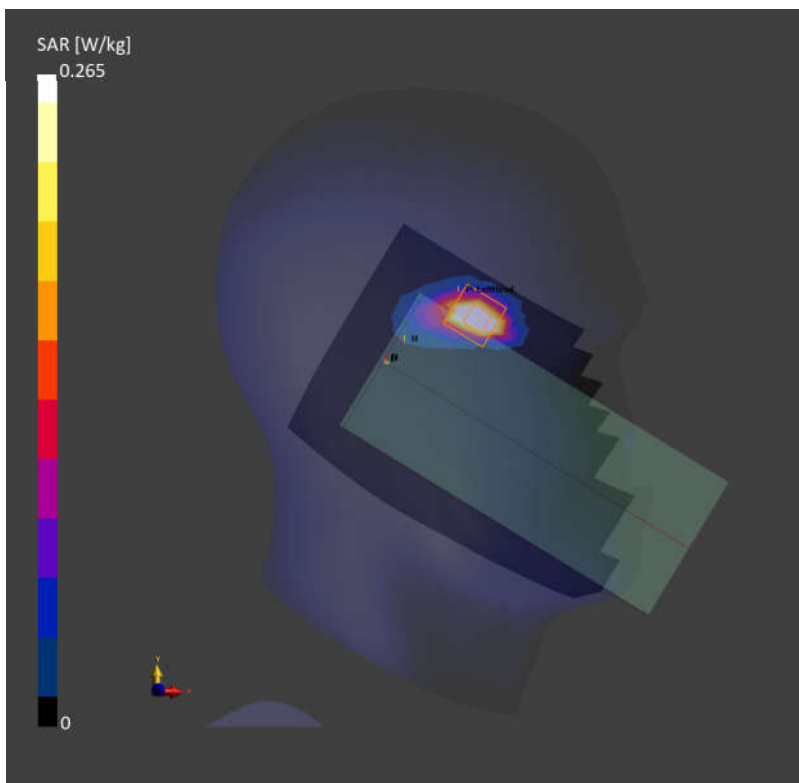

31_WLAN5GHz_802.11n-HT40 MCS0_Left Cheek_0mm_Ch54

Communication System: WLAN 5GHz; Frequency: 5270.000

Medium: HSL. Medium parameters used: $f = 5270.000$ MHz; $\sigma = 4.61$ S/m; $\epsilon_r = 36.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.84, 6.82, 5.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.711 W/kg; SAR (10g) = 0.257 W/kg;

Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.09 dB

SAR (1g) = 0.715 W/kg; SAR (10g) = 0.251 W/kg;

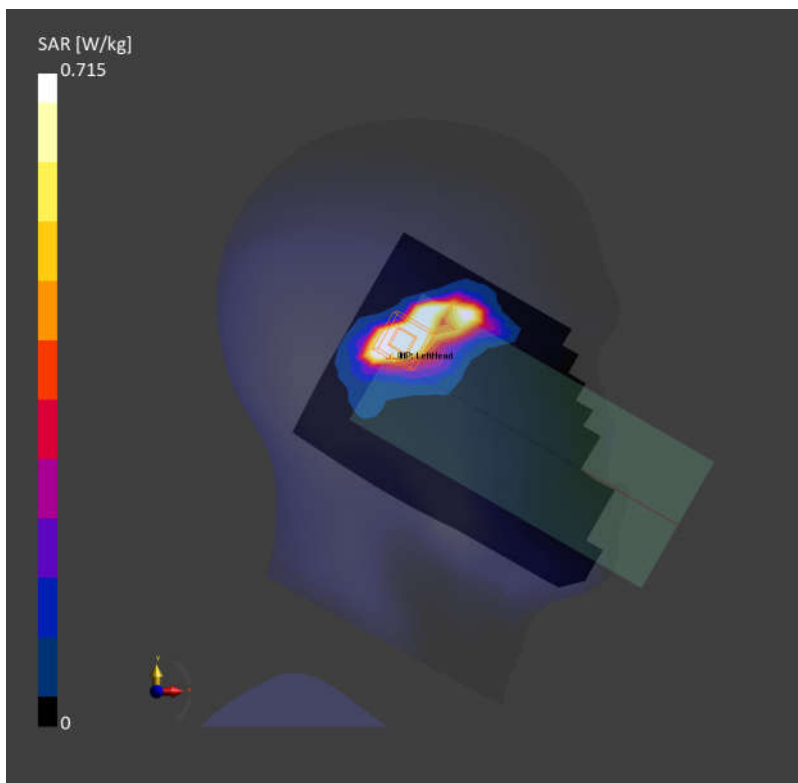

32_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch138

Communication System: WLAN 5GHz; Frequency: 5690.000

Medium: HSL. Medium parameters used: $f = 5690.000$ MHz; $\sigma = 5.07$ S/m; $\epsilon_r = 35.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(4.83, 5.71, 4.9); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.706 W/kg; SAR (10g) = 0.258 W/kg;

Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.07 dB

SAR (1g) = 0.702 W/kg; SAR (10g) = 0.249 W/kg;

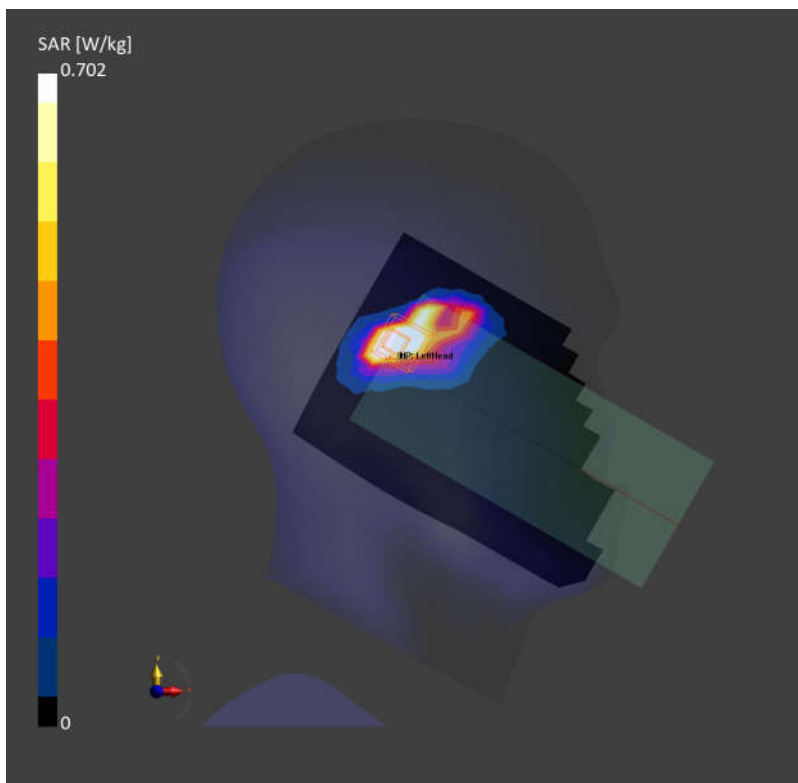

33_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch155

Communication System: WLAN 5GHz; Frequency: 5775.000

Medium: HSL. Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.15$ S/m; $\epsilon_r = 35.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.03, 5.88, 5.16); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.709 W/kg; SAR (10g) = 0.257 W/kg;

Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.03 dB

SAR (1g) = 0.705 W/kg; SAR (10g) = 0.227 W/kg;

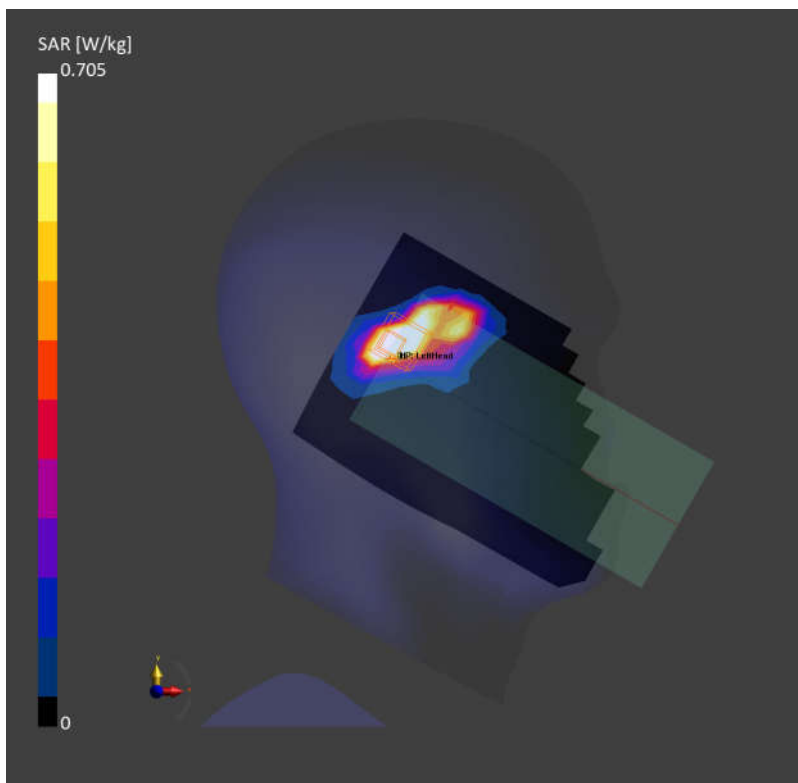

34_LTE Band 71_20M_QPSK_1RB_0Offset_Left Side_5mm_Ch133322

Communication System: Band 71; Frequency: 683.000

Medium: HSL. Medium parameters used: $f = 683.000$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 44.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.944 W/kg; SAR (10g) = 0.588 W/kg;

Zoom Scan (36.0 mm x 36.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 5.0 mm

Power Drift = -0.02 dB

SAR (1g) = 0.827 W/kg; SAR (10g) = 0.558 W/kg;

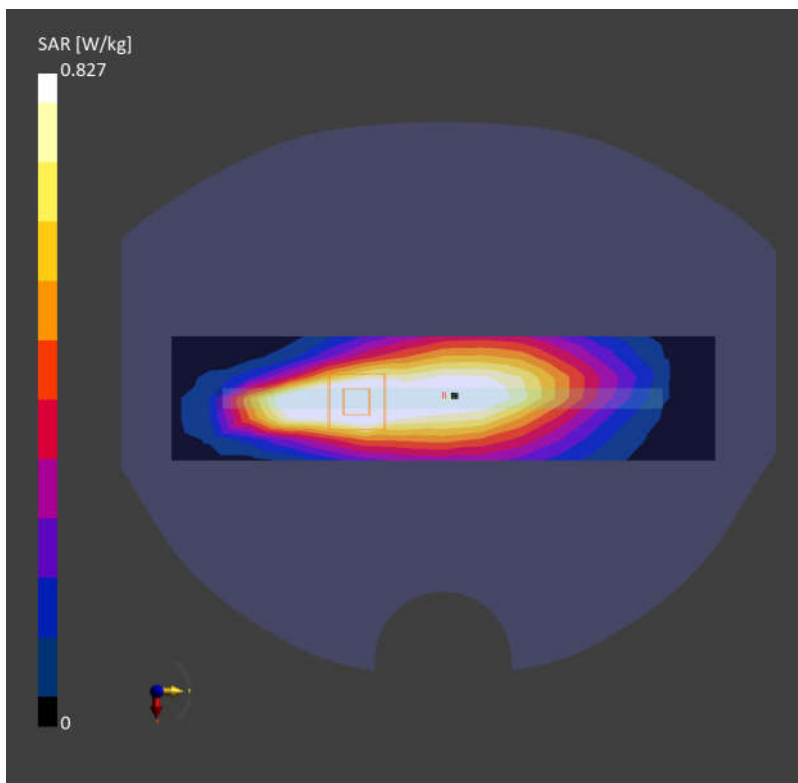

35_LTE Band 12_10M_QPSK_1RB_0Offset_Bottom Side_5mm_Ch23095

Communication System: Band 12; Frequency: 707.500

Medium: HSL. Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.832$ S/m; $\epsilon_r = 41.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.863 W/kg; SAR (10g) = 0.490 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.955 W/kg; SAR (10g) = 0.430 W/kg;

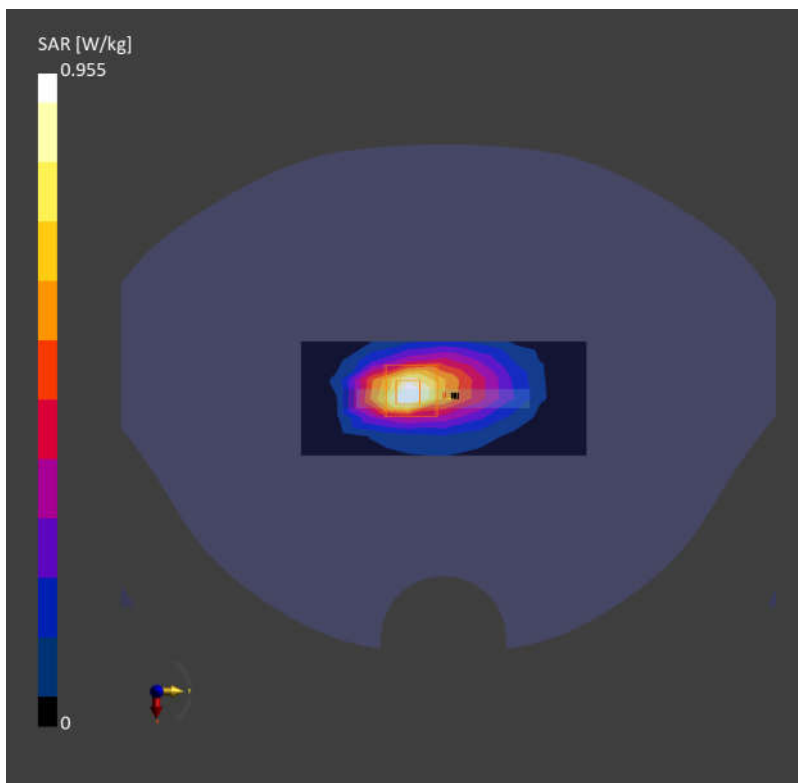

36_LTE Band 13_10M_QPSK_1RB_0Offset_Back_5mm_Ch23230

Communication System: Band 13; Frequency: 782.000

Medium: HSL. Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 43.8$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.812 W/kg; SAR (10g) = 0.510 W/kg;

Zoom Scan (36.0 mm x 36.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 5.0 mm

Power Drift = -0.17 dB

SAR (1g) = 0.810 W/kg; SAR (10g) = 0.441 W/kg;

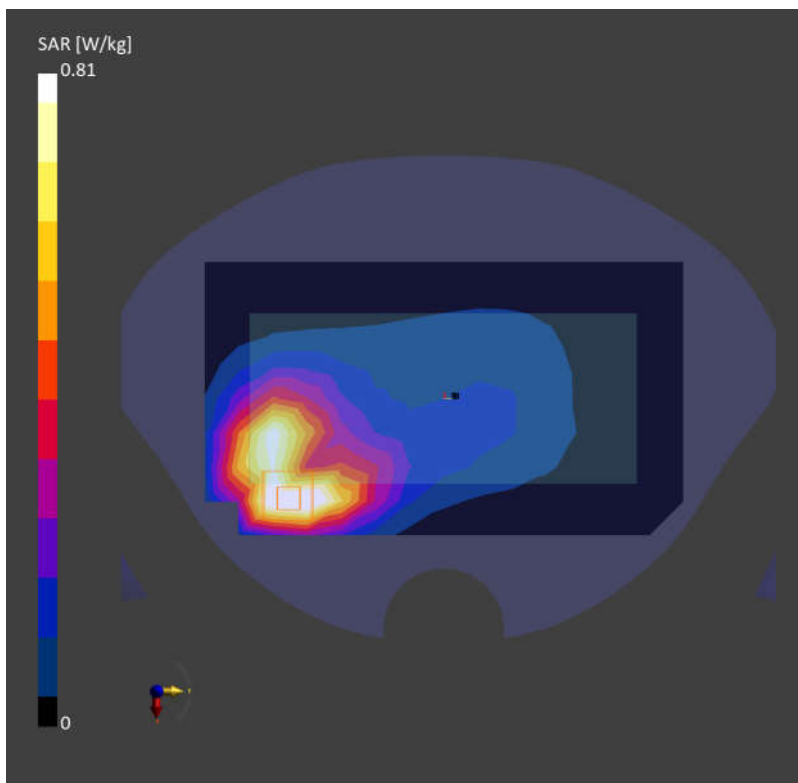

37_LTE Band 14_10M_QPSK_1RB_0Offset_Bottom Side_5mm_Ch23330

Communication System: Band 14; Frequency: 793.000

Medium: HSL. Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.910$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.770 W/kg; SAR (10g) = 0.440 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.865 W/kg; SAR (10g) = 0.389 W/kg;

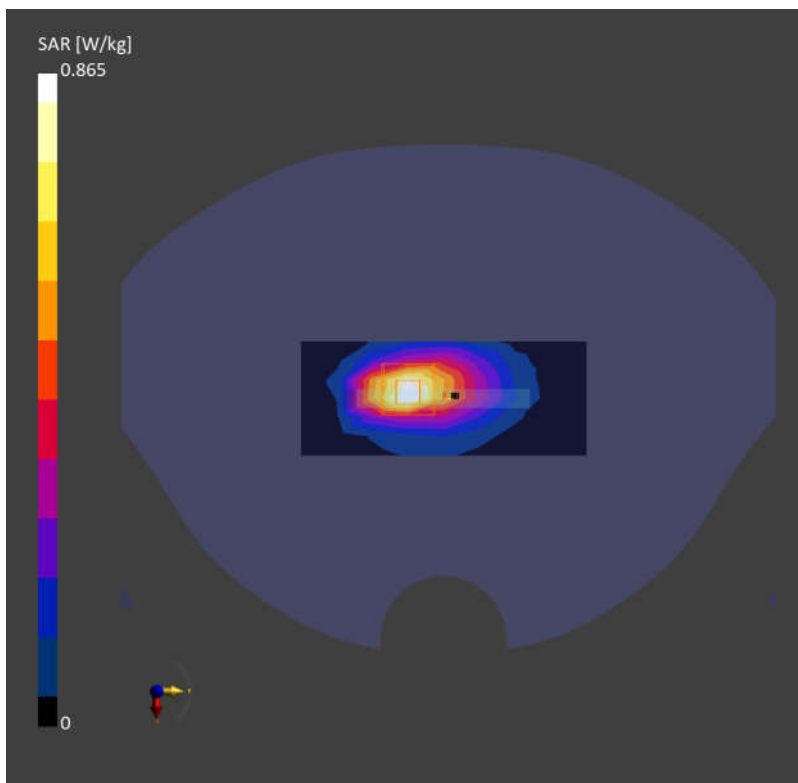

38_FR1 n71_20M_QPSK_50RB_28Offset_Left Side_5mm_Ch136100

Communication System: Band n71; Frequency: 680.500

Medium: HSL. Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.808$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.859 W/kg; SAR (10g) = 0.485 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.804 W/kg; SAR (10g) = 0.454 W/kg;

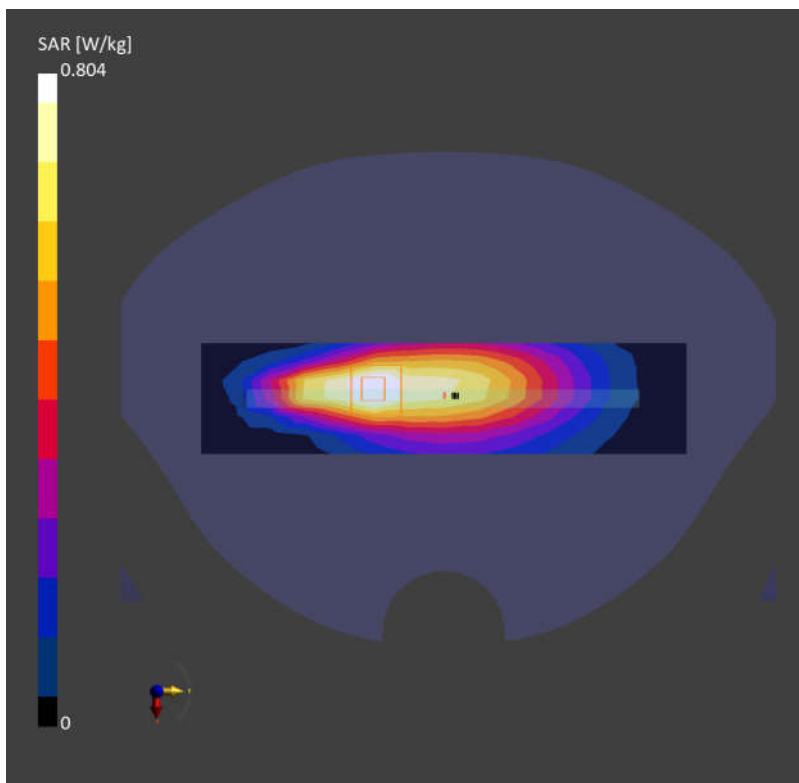

39_FR1 n12_15M_QPSK_1RB_1Offset_Bottom Side_5mm_Ch141500

Communication System: Band n12; Frequency: 707.500

Medium: HSL. Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.591 W/kg; SAR (10g) = 0.346 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.646 W/kg; SAR (10g) = 0.303 W/kg;

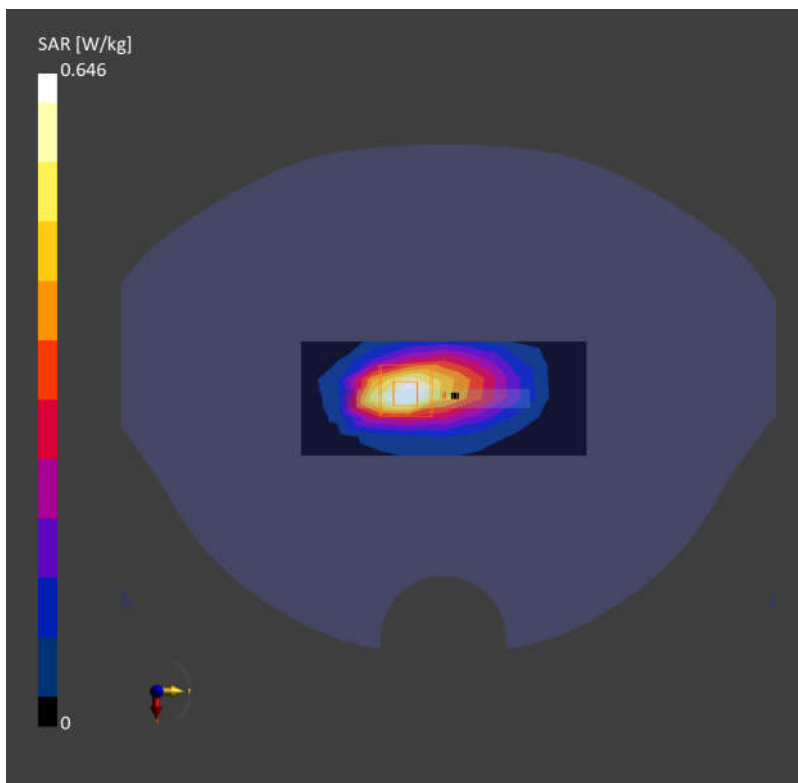

40_FR1 n14_10M_QPSK_1RB_1Offset_Back_5mm_Ch158600

Communication System: Band n14; Frequency: 793.000

Medium: HSL. Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.910$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.651 W/kg; SAR (10g) = 0.417 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.718 W/kg; SAR (10g) = 0.392 W/kg;

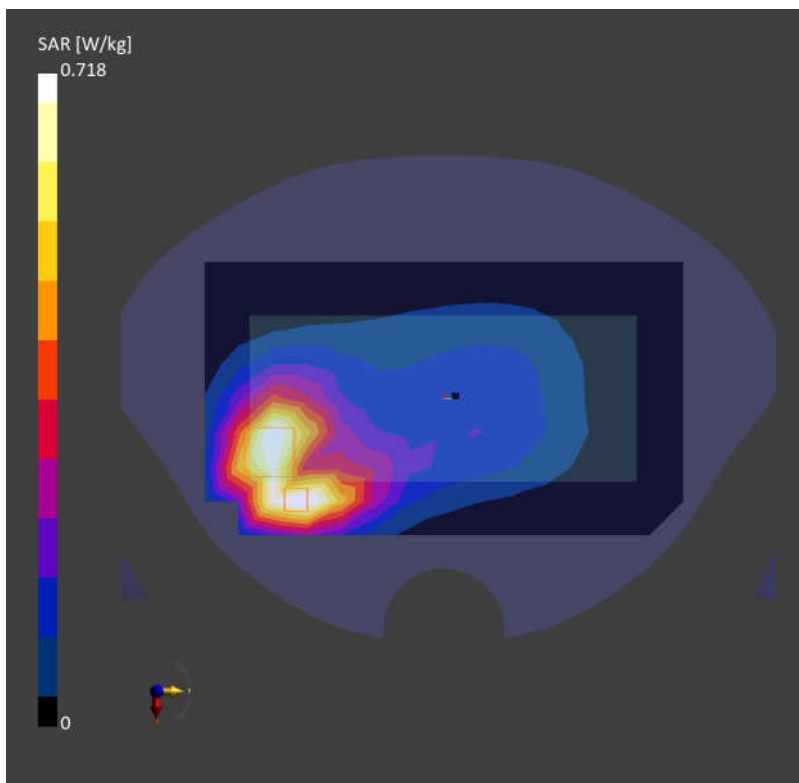

41_GSM850_GPRS (4 Tx slots)_Back_5mm_Ch189

Communication System: GSM 850; Frequency: 836.400

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.827 W/kg; SAR (10g) = 0.515 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.802 W/kg; SAR (10g) = 0.401 W/kg;

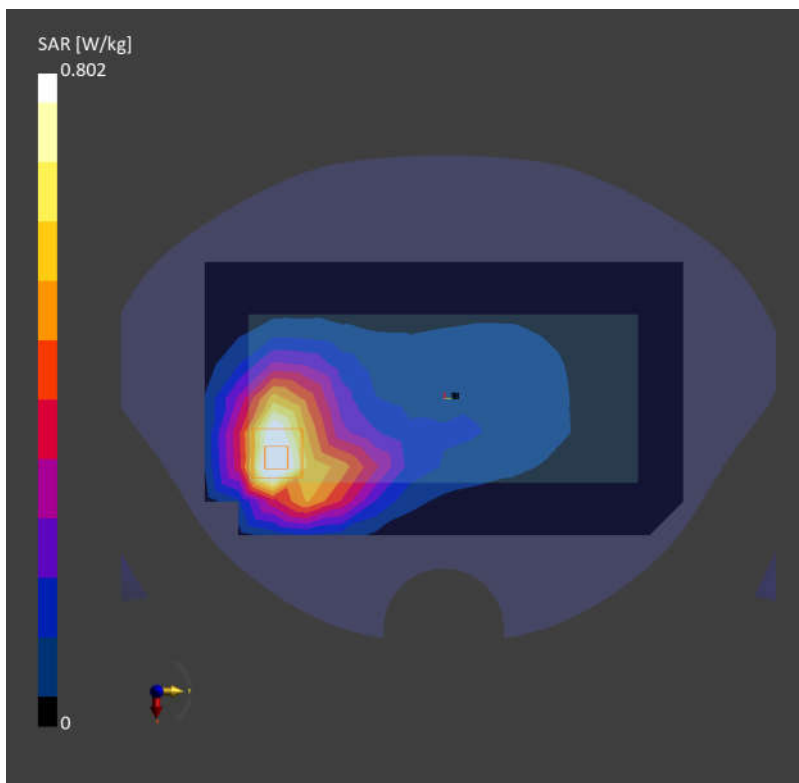

42_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4182

Communication System: Band 5; Frequency: 836.400

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.923 W/kg; SAR (10g) = 0.583 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.15 dB

SAR (1g) = 0.936 W/kg; SAR (10g) = 0.517 W/kg;

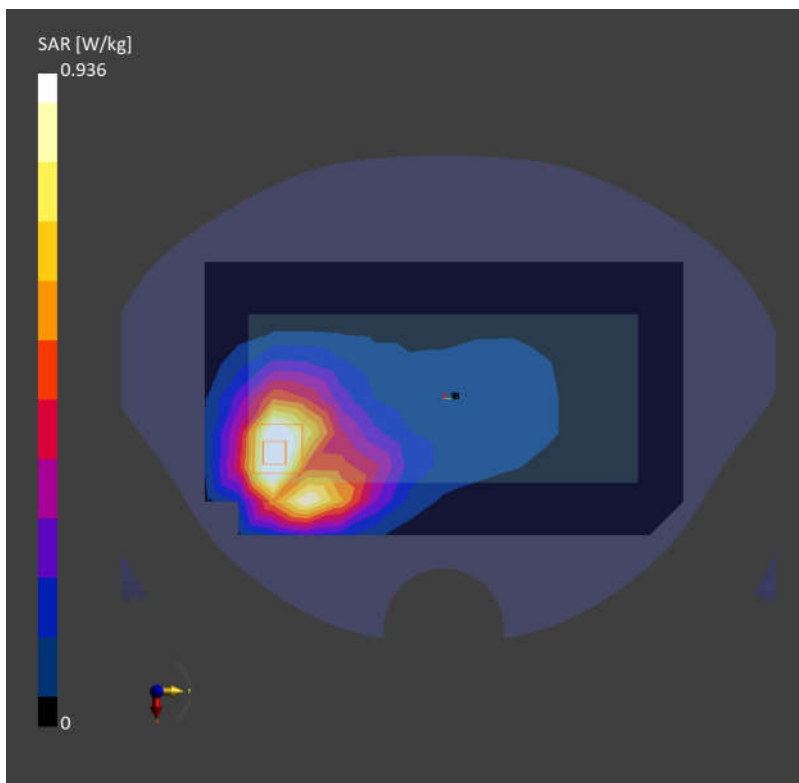

43_LTE Band 26_15M_QPSK_1RB_0Offset_Back_5mm_Ch26865

Communication System: Band 26; Frequency: 831.500

Medium: HSL. Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 43.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.06 W/kg; SAR (10g) = 0.663 W/kg;

Zoom Scan (36.0 mm x 36.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 5.0 mm

Power Drift = -0.09 dB

SAR (1g) = 1.03 W/kg; SAR (10g) = 0.587 W/kg;

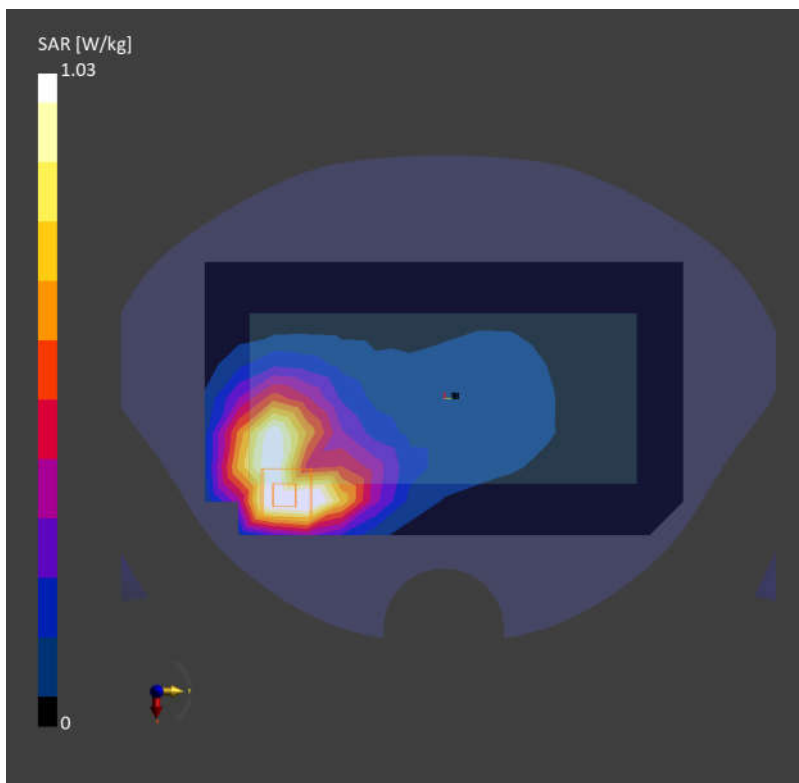

44_FR1 n26_20M_QPSK_50RB_28Offset_Back_5mm_Ch166300

Communication System: Band n26; Frequency: 831.500

Medium: HSL. Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.792 W/kg; SAR (10g) = 0.467 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.778 W/kg; SAR (10g) = 0.431 W/kg;

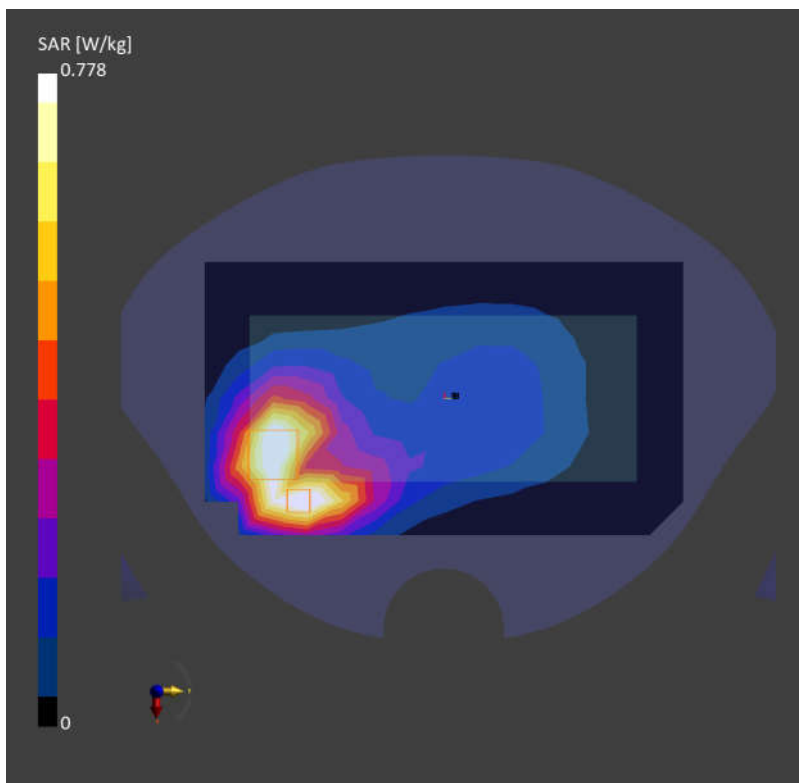

45_WCDMA IV_RMC 12.2Kbps_Left Side_5mm_Ch1312

Communication System: Band 4; Frequency: 1712.400

Medium: HSL. Medium parameters used: $f = 1712.400$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.87, 9.06, 8.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.893 W/kg; SAR (10g) = 0.443 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.992 W/kg; SAR (10g) = 0.435 W/kg;

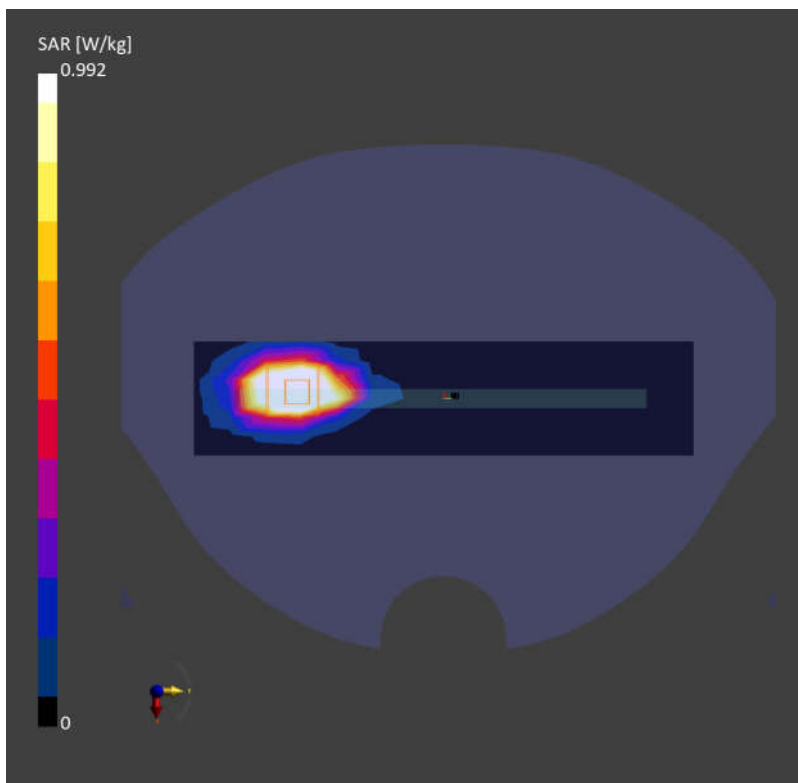

46_LTE Band 66_20M_QPSK_1RB_0Offset_Left Side_5mm_Ch132072

Communication System: Band 66; Frequency: 1720.000

Medium: HSL. Medium parameters used: $f = 1720.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.87, 9.06, 8.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.929 W/kg; SAR (10g) = 0.454 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.959 W/kg; SAR (10g) = 0.468 W/kg;

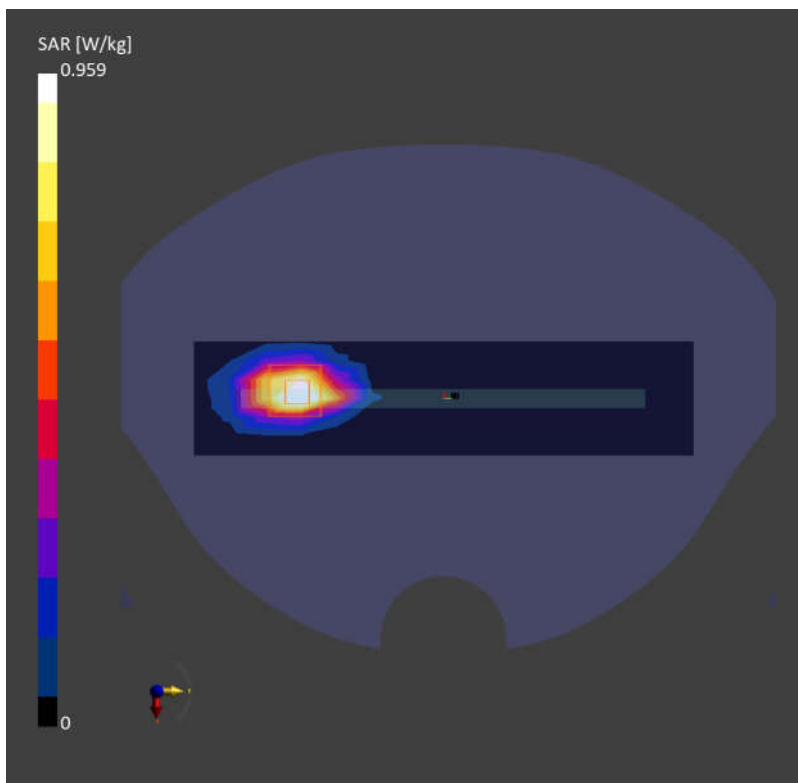

47_FR1 n70_15M_QPSK_1RB_1Offset_Left Side_5mm_Ch340500

Communication System: Band n70; Frequency: 1702.500

Medium: HSL. Medium parameters used: $f = 1702.500$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.87, 9.06, 8.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.851 W/kg; SAR (10g) = 0.403 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.923 W/kg; SAR (10g) = 0.399 W/kg;

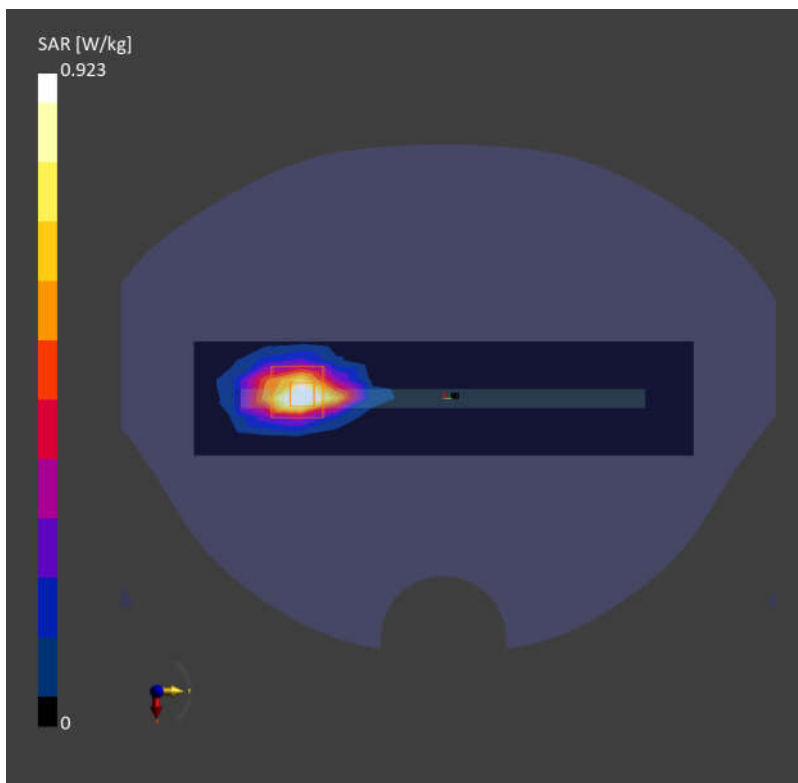

48_FR1 n66_40M_QPSK_108RB_54Offset_Bottom Side_5mm_Ch349000

Communication System: Band n66; Frequency: 1745.000

Medium: HSL. Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.87, 9.06, 8.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.975 W/kg; SAR (10g) = 0.457 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.487 W/kg;

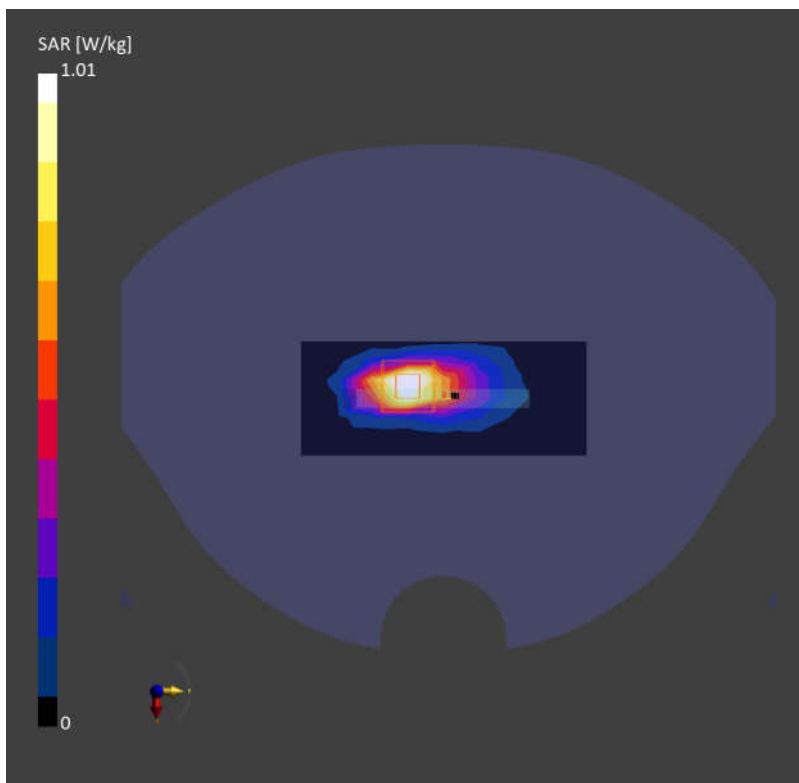

49_GSM1900_GPRS (4 Tx slots)_Left Side_5mm_Ch512

Communication System: PCS 1900; Frequency: 1850.200

Medium: HSL. Medium parameters used: $f = 1850.200$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.985 W/kg; SAR (10g) = 0.416 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.991 W/kg; SAR (10g) = 0.411 W/kg;

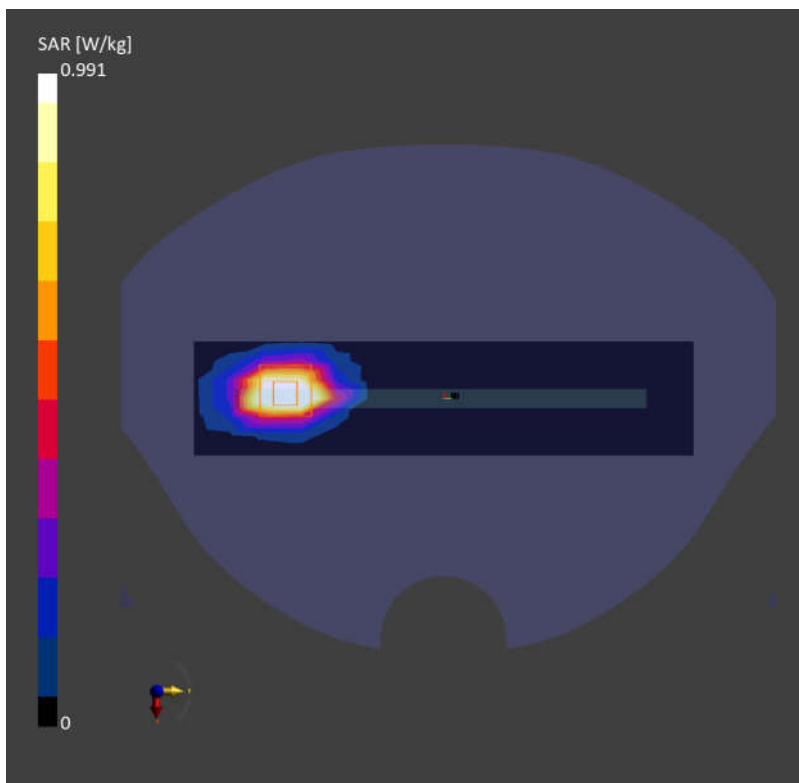

50_WCDMA II_RMC 12.2Kbps_Left Side_5mm_Ch9262

Communication System: Band 2; Frequency: 1852.400

Medium: HSL. Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.936 W/kg; SAR (10g) = 0.457 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.986 W/kg; SAR (10g) = 0.444 W/kg;

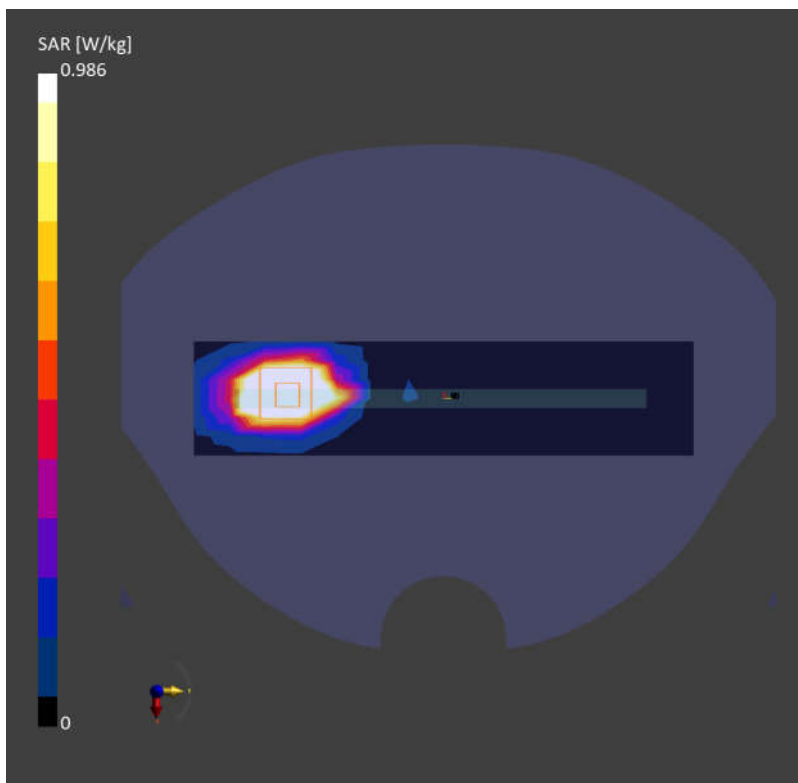

51_LTE Band 25_20M_QPSK_1RB_0Offset_Left Side_5mm_Ch26140

Communication System: Band 25; Frequency: 1860.000

Medium: HSL. Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.914 W/kg; SAR (10g) = 0.447 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm

Power Drift = 0.18 dB

SAR (1g) = 0.968 W/kg; SAR (10g) = 0.433 W/kg;

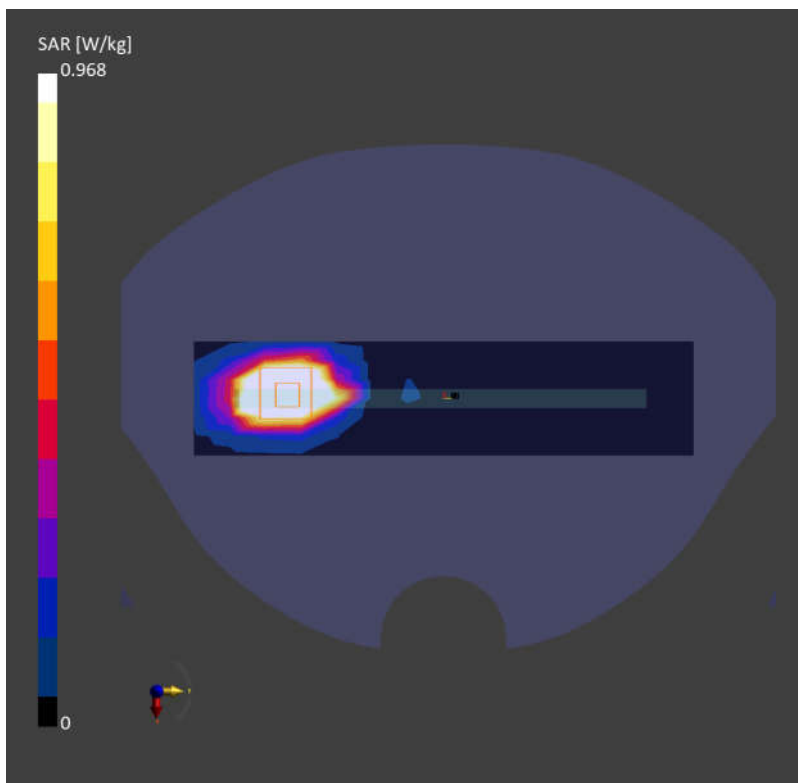

Date: 2024-03-10

52_FR1 n25_40M_QPSK_1RB_1Offset_Bottom Side _5mm_Ch376500

Communication System: Band n25; Frequency: 1882.500

Medium: HSL. Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 1.00 W/kg; SAR (10g) = 0.524 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.528 W/kg;

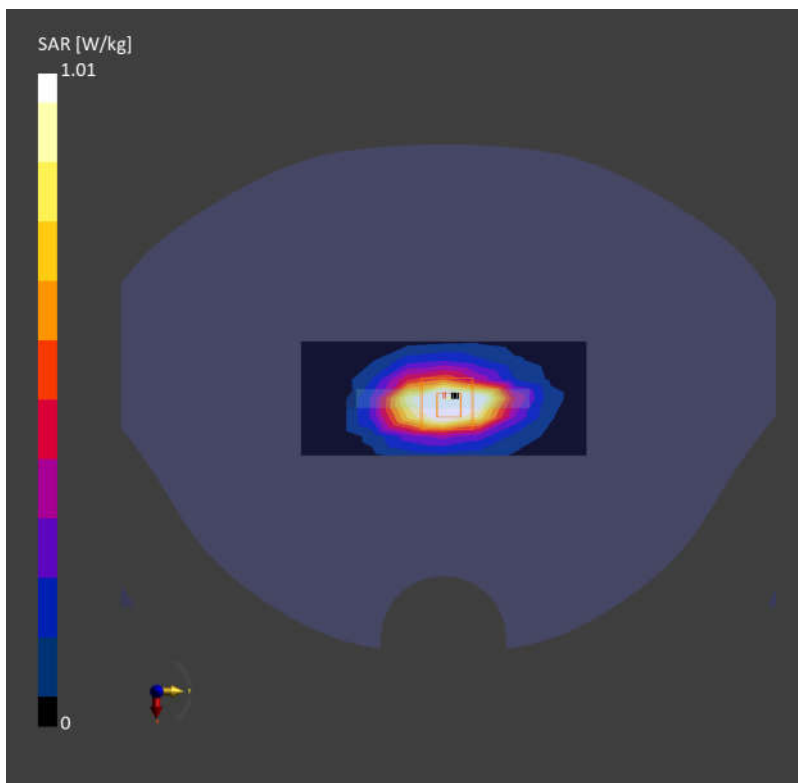

53_LTE Band 30_10M_QPSK_1RB_0Offset_Bottom Side_5mm_Ch27710

Communication System: Band 30; Frequency: 2310.000

Medium: HSL. Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.72$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.57, 8.73, 7.66); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.902 W/kg; SAR (10g) = 0.441 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.976 W/kg; SAR (10g) = 0.460 W/kg;

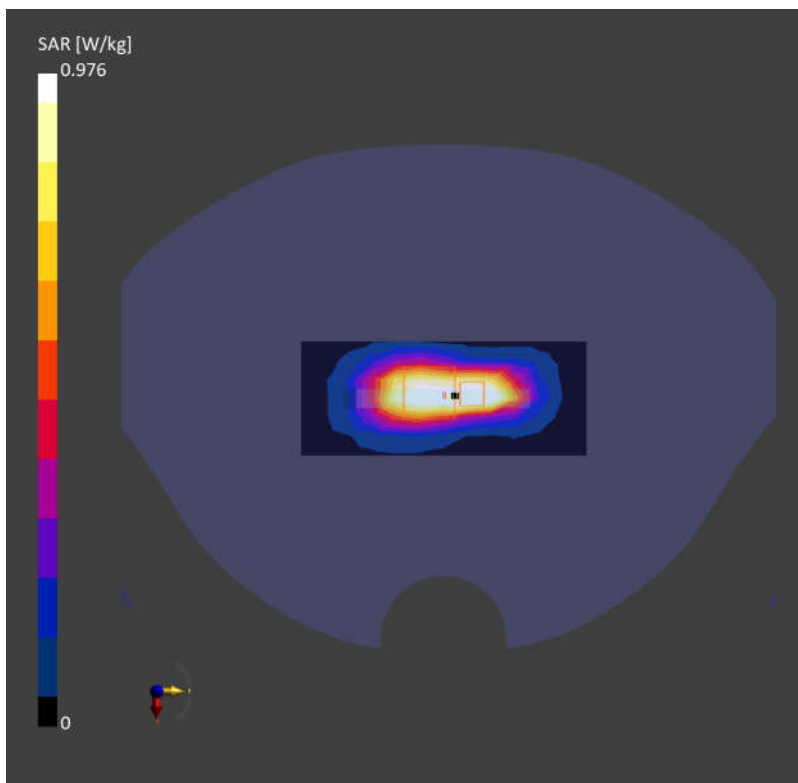

54_FR1 n30_10M_QPSK_1RB_1Offset_Bottom Side_5mm_Ch462000

Communication System: Band n30; Frequency: 2310.000

Medium: HSL. Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.72$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.57, 8.73, 7.66); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.895 W/kg; SAR (10g) = 0.382 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.999 W/kg; SAR (10g) = 0.416 W/kg;

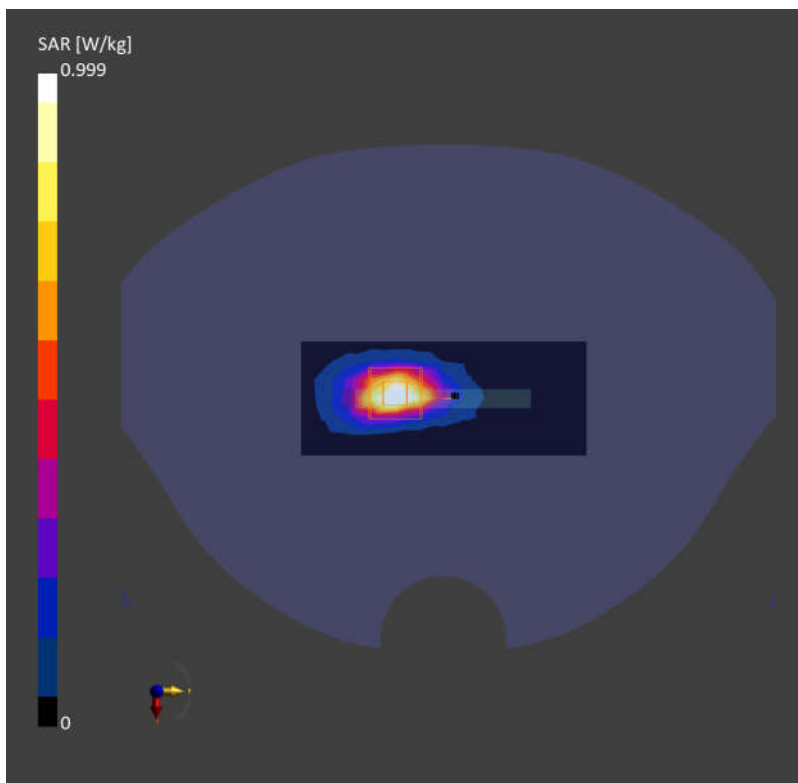

55_LTE Band 7_20M_QPSK_1RB_0Offset_Left Side_5mm_Ch21350

Communication System: Band 7; Frequency: 2560.000

Medium: HSL. Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.916 W/kg; SAR (10g) = 0.438 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.9 mm x 4.9 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.948 W/kg; SAR (10g) = 0.459 W/kg;

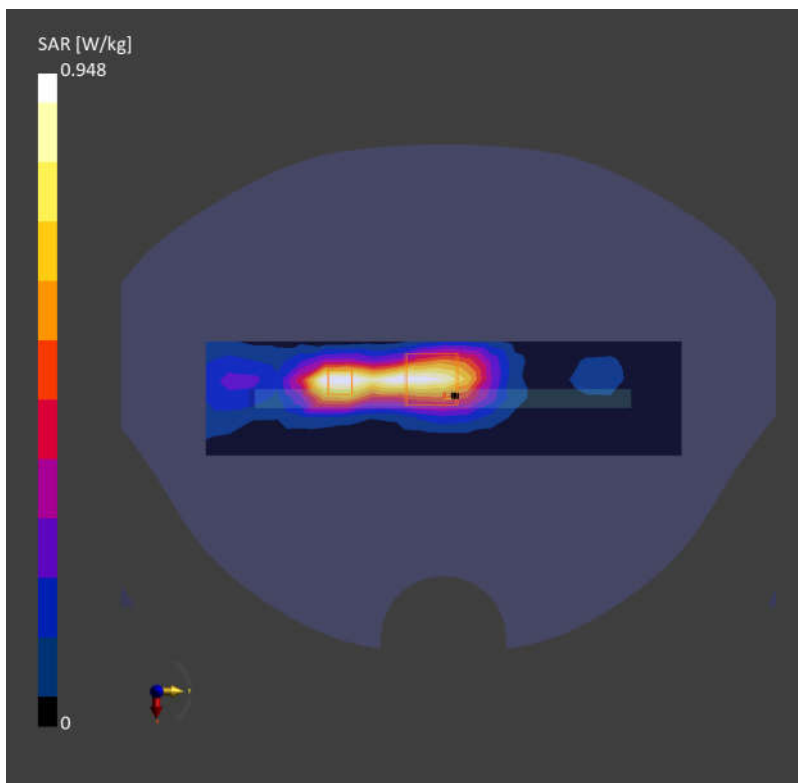

56_LTE Band 41 HPUE_20M_QPSK_1RB_0Offset_Left Side_5mm_Ch41055

Communication System: Band 41; Frequency: 2636.500

Medium: HSL. Medium parameters used: $f = 2636.500$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 37.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.919 W/kg; SAR (10g) = 0.459 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.985 W/kg; SAR (10g) = 0.485 W/kg;

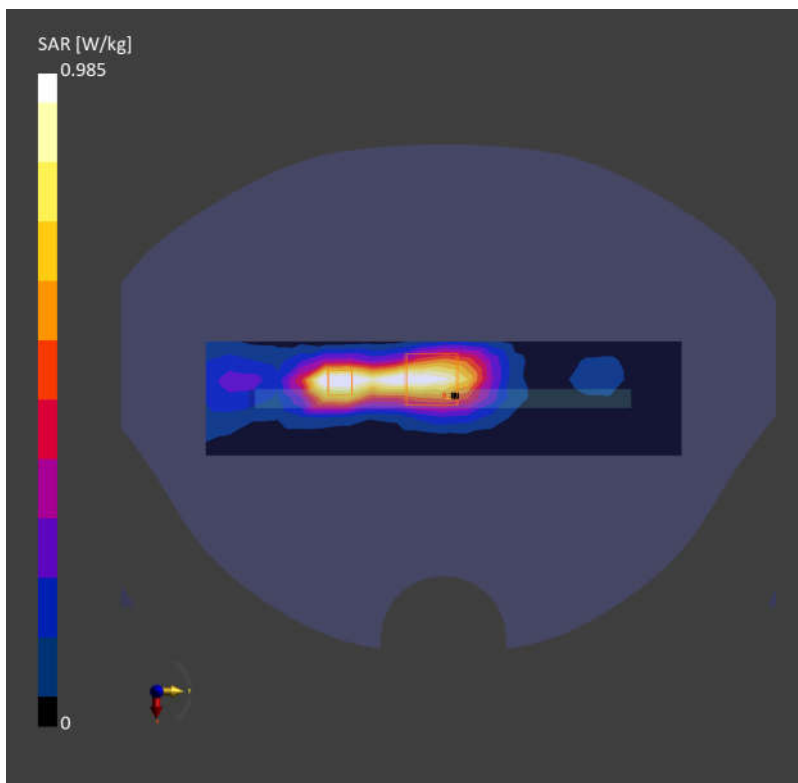

57_FR1 n7_50M_QPSK_135RB_68Offset_Right Side_5mm_Ch507000

Communication System: Band n7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 220.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.926 W/kg; SAR (10g) = 0.413 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 1.04 W/kg; SAR (10g) = 0.451 W/kg;

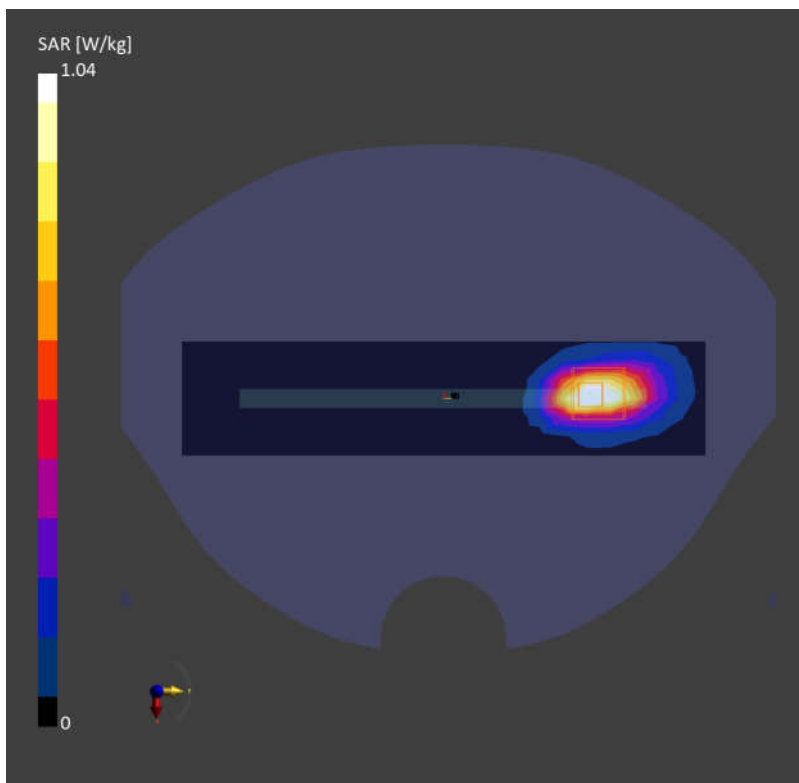

58_FR1 n41 HPUE_100M_QPSK_135RB_69Offset_Right Side_5mm_Ch518598

Communication System: Band n41; Frequency: 2592.990

Medium: HSL. Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 37.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.892 W/kg; SAR (10g) = 0.324 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.911 W/kg; SAR (10g) = 0.337 W/kg;

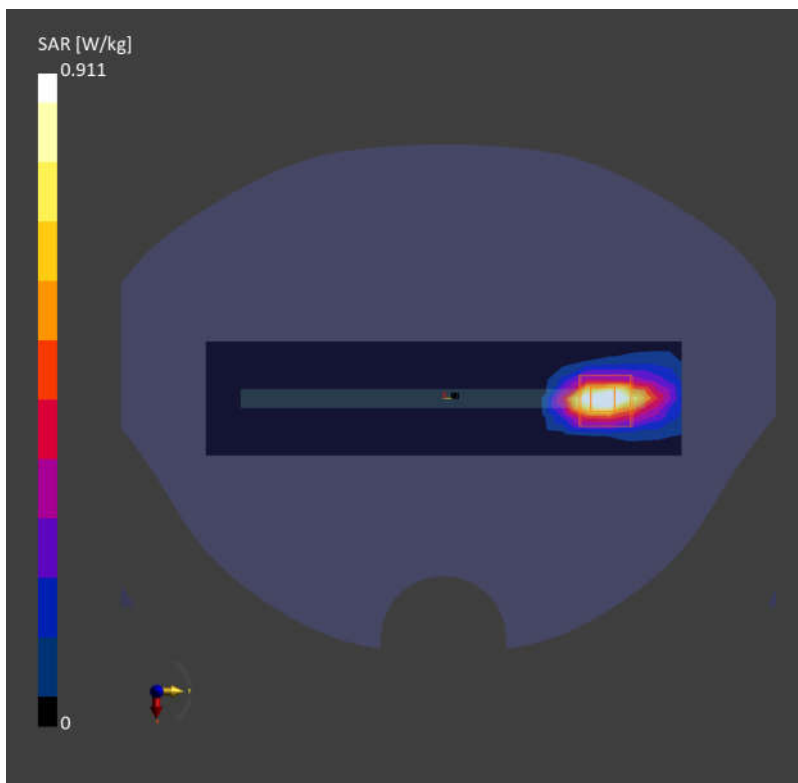

59_LTE Band 48_20M_QPSK_1RB_0Offset_Top Side_5mm_Ch56640

Communication System: Band 48; Frequency: 3690.000

Medium: HSL. Medium parameters used: $f = 3690.000$ MHz; $\sigma = 2.98$ S/m; $\epsilon_r = 38.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.89, 8.06, 7.01); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.418 W/kg; SAR (10g) = 0.129 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.9 mm x 4.9 mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 0.477 W/kg; SAR (10g) = 0.139 W/kg;

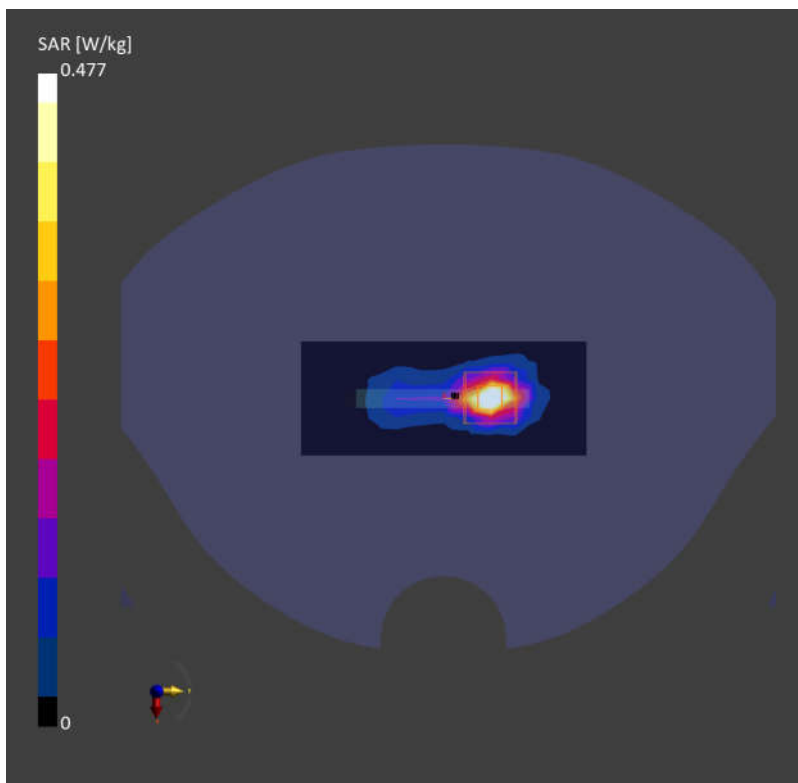

60_FR1 n48_40M_QPSK_50RB_28Offset_Right Side_5mm_Ch641666

Communication System: Band n48; Frequency: 3624.985

Medium: HSL. Medium parameters used: $f = 3624.985$ MHz; $\sigma = 2.91$ S/m; $\epsilon_r = 38.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.89, 8.06, 7.01); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.436 W/kg; SAR (10g) = 0.183 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm

Power Drift = 0.04 dB

SAR (1g) = 0.473 W/kg; SAR (10g) = 0.199 W/kg;

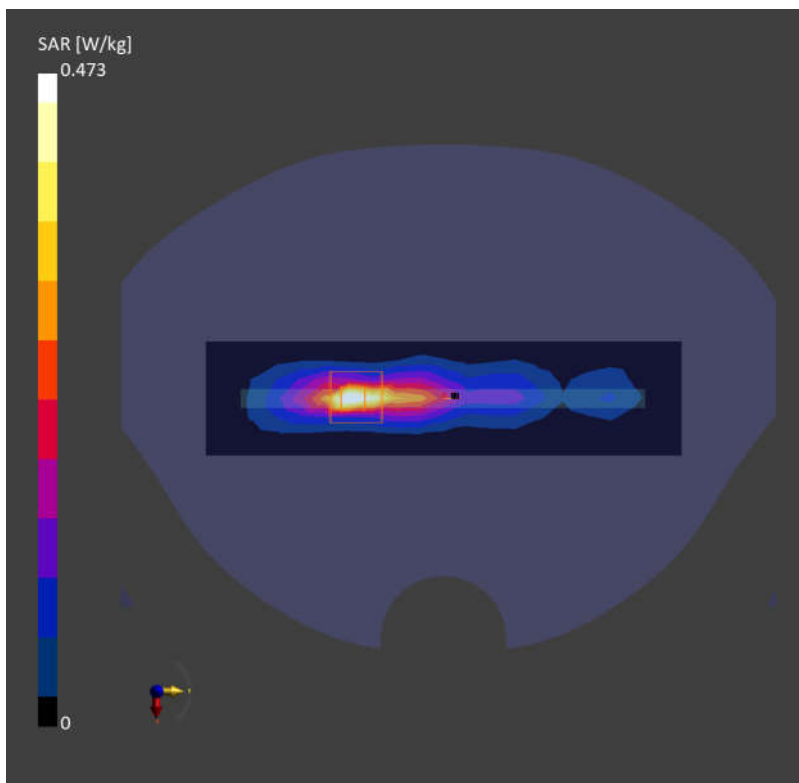

62_WLAN2.4GHz_802.11b 1Mbps_Right Side_5mm_Ch6

Communication System: WLAN 2.4GHz; Frequency: 2437.000

Medium: HSL. Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 38.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.47, 8.61, 7.55); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 220.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.408 W/kg; SAR (10g) = 0.163 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.416 W/kg; SAR (10g) = 0.165 W/kg;

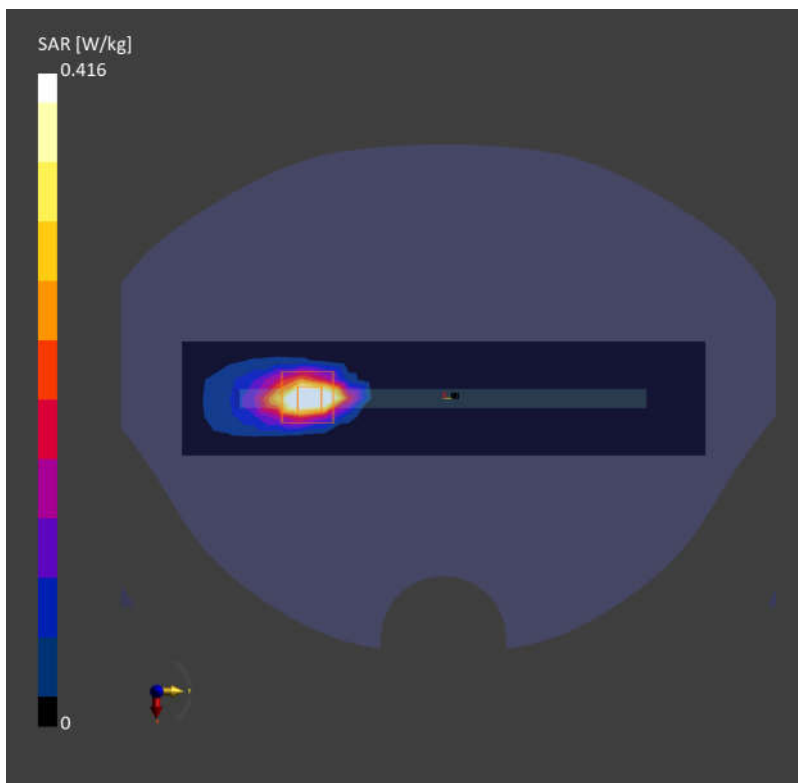

63_Bluetooth_1Mbps_Right Side_5mm_Ch39

Communication System: ISM 2.4 GHz Band; Frequency: 2441.000

Medium: HSL. Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 38.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.47, 8.61, 7.55); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448


Area Scan (48.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.204 W/kg; SAR (10g) = 0.087 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.05 dB

SAR (1g) = 0.199 W/kg; SAR (10g) = 0.081 W/kg;

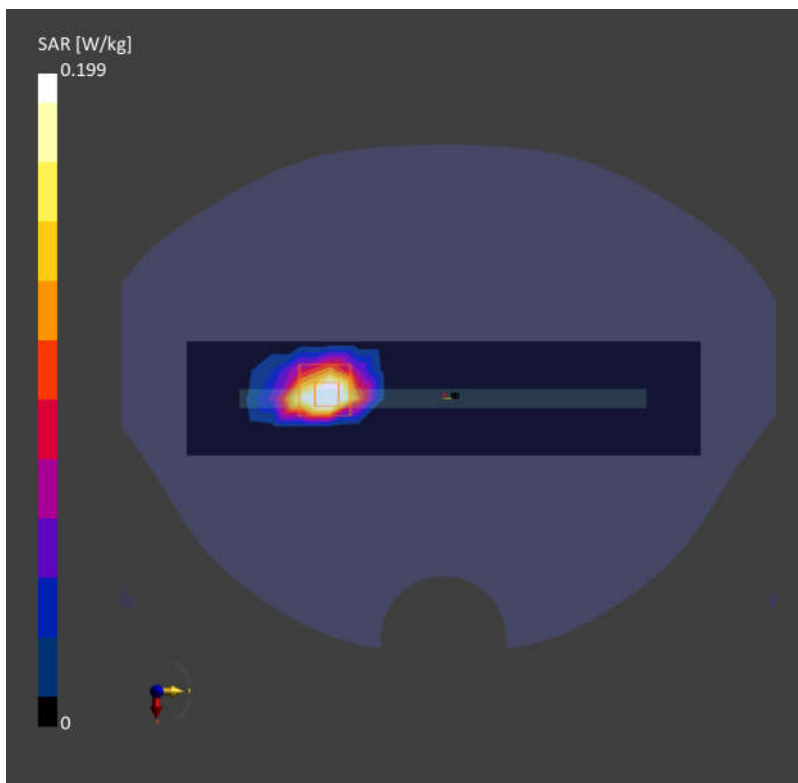

64_WLAN5GHz_802.11n-HT40 MCSO_Right Side_5mm_Ch46

Communication System: WLAN 5GHz; Frequency: 5230.000

Medium: HSL. Medium parameters used: $f = 5230.000$ MHz; $\sigma = 4.65$ S/m; $\epsilon_r = 36.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.84, 6.82, 5.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2023-04-24
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.2.4.2448

Area Scan (48.0 mm x 220.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.378 W/kg; SAR (10g) = 0.108 W/kg;

Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.08 dB

SAR (1g) = 0.377 W/kg; SAR (10g) = 0.112 W/kg;

