

# RF TEST REPORT


ISSUED BY  
Shenzhen BALUN Technology Co., Ltd.



FOR  
**LTE GPS Condition Tracker**

ISSUED TO  
Shenzhen Jimi IoT Co., Ltd.

3-4/F, Block A, Building #7, Shenzhen International Innovation Valley,  
Dashi 1st Road, Nanshan District, Shenzhen, Guangdong, China

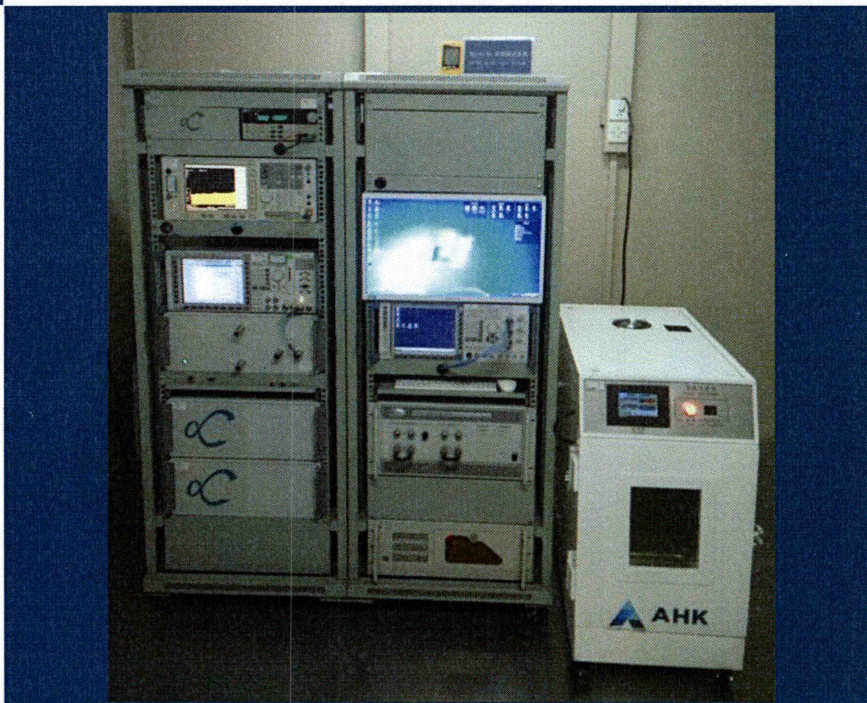

Tested by:

*Wu Huihui*  
Wu Huihui

Date

*Oct. 18, 2021*

Approved by:

*Liao Jianming*  
Liao Jianming  
(Technical Director)

Date

*Oct. 18, 2021*

Report No.: BL-SZ2160023-501

EUT Name: LTE GPS Condition Tracker

Model Name: JM-LL03S (refer section 2.4)

Brand Name: HERE

Test Standard: 47 CFR Part 2

47 CFR Part 22

47 CFR Part 24

47 CFR Part 27

47 CFR Part 90

FCC ID: 2AMLFJM-LL03S

Test Conclusion: Pass

Test Date: Jul. 05, 2021 ~ Jul. 20, 2021

Date of Issue: Oct. 18, 2021

*NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.*



**Revision History**

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>Oct. 18, 2021</u>	<u>Initial Issue</u>

**TABLE OF CONTENTS**

1	ADMINISTRATIVE DATA (GENERAL INFORMATION) .....	4
1.1	Identification of the Testing Laboratory .....	4
1.2	Identification of the Responsible Testing Location .....	4
1.3	Laboratory Condition .....	4
1.4	Announce .....	4
2	PRODUCT INFORMATION .....	5
2.1	Applicant Information .....	5
2.2	Manufacturer Information .....	5
2.3	Factory Information .....	5
2.4	General Description for Equipment under Test (EUT) .....	5
2.5	Technical Information .....	6
3	SUMMARY OF TEST RESULTS .....	8
3.1	Test Standards .....	8
3.2	Test Verdict .....	9
4	GENERAL TEST CONFIGURATIONS .....	11
4.1	Test Environments .....	11
4.2	Test Equipment List .....	11
4.3	Test Configurations .....	13
4.4	Test Setup .....	20
5	TEST ITEMS .....	22
5.1	Transmitter Radiated Power (EIRP/ERP) .....	22
5.2	Peak to Average Ratio .....	25
5.3	Occupied Bandwidth .....	27
5.4	Frequency Stability .....	29
5.5	Spurious Emission at Antenna Terminals .....	31
5.6	Band Edge .....	35

5.7	Field Strength of Spurious Radiation .....	39
ANNEX A	TEST RESULTS.....	44
A.1	Transmitter Radiated Power (EIRP/ERP).....	44
A.2	Peak to Average Ratio .....	67
A.3	Occupied Bandwidth .....	68
A.4	Frequency Stability.....	68
A.5	Spurious Emission at Antenna Terminals .....	68
A.6	Band Edge .....	68
A.7	Field Strength of Spurious Radiation .....	69
ANNEX B	TEST SETUP PHOTOS .....	72
ANNEX C	EUT EXTERNAL PHOTOS .....	72
ANNEX D	EUT INTERNAL PHOTOS.....	72

# 1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

## 1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China.
Phone Number	+86 755 6685 0100

## 1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China.
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

## 1.3 Laboratory Condition

Ambient Temperature	20 °C to 35 °C
Ambient Relative Humidity	30 % to 60 %
Ambient Pressure	98 kPa to 102 kPa

## 1.4 Announce

- (1) The test report reference to the report template version v6.2.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant. The applicant is responsible for the impact of the information provided on the validity of the results.

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

Applicant	Shenzhen Jimi IoT Co., Ltd.
Address	3-4/F, Block A, Building #7, Shenzhen International Innovation Valley, Dashi 1st Road, Nanshan District, Shenzhen, Guangdong, China

### 2.2 Manufacturer Information

Manufacturer	Shenzhen Jimi IoT Co., Ltd.
Address	3-4/F, Block A, Building #7, Shenzhen International Innovation Valley, Dashi 1st Road, Nanshan District, Shenzhen, Guangdong, China

### 2.3 Factory Information

Factory	Huizhou Jimi Manufacturing Co., Ltd.
Address	Factory Buildings 1 and 2, Jimi Industrial Park, 101 Jinfu Road, Xiaojinkou Subdistrict, Huicheng District, Huizhou, Guangdong, China

### 2.4 General Description for Equipment under Test (EUT)

EUT Name	LTE GPS Condition Tracker
Model Name Under Test	JM-LL03S
Series Model Name	JM-LL03S2, JM-L03S3, JM-LL03S4, JM-LL03S5
Description of Model name differentiation	All models are same with electrical parameters and internal circuit structure, but only differ in model name.
Hardware Version	TT93-MB-V1.2
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

## 2.5 Technical Information

Note: The information provided by the applicant, except for The Max RF Output Power (EIRP/ERP).

All Network and Wireless connectivity for EUT	2G Network GPRS/EGPRS 850/900/1800/1900 MHz; FDD LTE-M1 Band 1/ 2/ 3/ 4/ 5/ 8/ 12/ 13/ 18/ 19/ 20/ 26/ 28/ 66; FDD NB-IoT Band 1/ 2/ 3/ 4/ 5/ 8/ 12/ 13/ 18/ 19/ 20/ 26/ 28/ 66; WLAN; Bluetooth; GPS; GLONASS; NFC
About the Product	The equipment is LTE GPS Condition Tracker, intended for used with information technology equipment.

The requirement for the following technical information of the EUT was tested in this report:

Operating Bands	GPRS/EGPRS 850/ 1900 MHz FDD LTE-M1 Band 2/ 4/ 5/ 12/ 13/ 26/ 66; FDD NB-IoT Band 2/ 4/ 5/ 12/ 13/ 66;	
Modulation Type	GSM/GPRS	GMSK
	EGPRS	8PSK
	LTE-M1	QPSK
		16QAM
	NB-IoT	BPSK
		QPSK
TX Frequency Range	GSM/GPRS/EGPRS 850: 824 MHz ~ 849 MHz GSM/GPRS/EGPRS 1900: 1850 MHz ~ 1910 MHz FDD LTE Band 2: 1850 MHz ~ 1910 MHz FDD LTE Band 4: 1710 MHz ~ 1755 MHz FDD LTE Band 5: 824 MHz ~ 849 MHz FDD LTE Band 12: 699 MHz ~ 716 MHz FDD LTE Band 13: 777 MHz ~ 787 MHz FDD LTE Band 26: 814 MHz ~ 849 MHz FDD LTE Band 66: 1710 MHz ~ 1780 MHz	
Rx Frequency Range	GSM/GPRS/EGPRS 850: 824 MHz ~ 849 MHz GSM/GPRS/EGPRS 1900: 1850 MHz ~ 1910 MHz FDD LTE Band 2: 1850 MHz ~ 1910 MHz FDD LTE Band 4: 1710 MHz ~ 1755 MHz FDD LTE Band 5: 824 MHz ~ 849 MHz FDD LTE Band 12: 699 MHz ~ 716 MHz FDD LTE Band 13: 777 MHz ~ 787 MHz FDD LTE Band 26: 814 MHz ~ 849 MHz FDD LTE Band 66: 1710 MHz ~ 1780 MHz	
Power Class	GSM/GPRS 850: 4 GSM/GPRS 1900: 1 EGPRS 850/1900: E2 FDD LTE-M1 Band 2: 3 FDD LTE-M1 Band 4: 3 FDD LTE-M1 Band 5: 3 FDD LTE-M1 Band 12: 3 FDD LTE-M1 Band 13: 3	

	FDD LTE-M1 Band 26: 3 FDD LTE-M1 Band 66: 3 FDD NB-IoT Band 2: 3 FDD NB-IoT Band 4: 3 FDD NB-IoT Band 5: 3 FDD NB-IoT Band 12: 3 FDD NB-IoT Band 13: 3 FDD NB-IoT Band 66: 3
Multislot Class	GPRS/EGPRS: 33
Antenna Type	FPC Antenna
Antenna Gain	GSM/GPRS/EGPRS 850: 2.5 dBi GSM/GPRS/EGPRS 1900: 2.0 dBi FDD LTE-M1 Band 2: 2.0 dBi FDD LTE-M1 Band 4: 1.8 dBi FDD LTE-M1 Band 5: 2.5 dBi FDD LTE-M1 Band 12: 2.9 dBi FDD LTE-M1 Band 13: 2.6 dBi FDD LTE-M1 Band 26: 2.5 dBi FDD LTE-M1 Band 66: 2.4 dBi FDD NB-IoT Band 2: 2.0 dBi FDD NB-IoT Band 4: 1.8 dBi FDD NB-IoT Band 5: 2.5 dBi FDD NB-IoT Band 12: 2.9 dBi FDD NB-IoT Band 13: 2.6 dBi FDD NB-IoT Band 66: 2.4 dBi
The Max RF Output Power (EIRP/ERP)	GSM/GPRS/EGPRS 850: 32.26 dBm GSM/GPRS/EGPRS 1900: 31.60 dBm FDD LTE-M1 Band 2: 20.65 dBm FDD LTE-M1 Band 4: 20.36 dBm FDD LTE-M1 Band 5: 19.86 dBm FDD LTE-M1 Band 12: 19.81 dBm FDD LTE-M1 Band 13: 19.59 dBm FDD LTE-M1 Band 26: 19.37 dBm FDD LTE-M1 Band 66: 21.52 dBm FDD NB-IoT Band 2: 20.20 dBm FDD NB-IoT Band 4: 20.26 dBm FDD NB-IoT Band 5: 19.40 dBm FDD NB-IoT Band 12: 19.35 dBm FDD NB-IoT Band 13: 19.49 dBm FDD NB-IoT Band 66: 20.77 dBm

Note 1: The EUT information are declared by manufacturer. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3 SUMMARY OF TEST RESULTS

#### 3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22 Subpart H	Cellular Radiotelephone Service
3	47 CFR Part 24 Subpart E	Broadband PCS
4	47 CFR Part 27	Miscellaneous Wireless Communications Services
5	47 CFR Part 90 Subpart S	Regulations Governing Licensing and Use of Frequencies in the 806-824, 851-869, 896-901, and 935-940 MHz Bands
6	ANSI/TIA-603-E-2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
7	KDB 971168 D01 v03	Measurement Guidance for Certification of Licensed Digital Transmitters



### 3.2 Test Verdict

No.	Test Description	FCC Part No.	Test Result	Test Verdict
1	Conducted RF Output Power	2.1046	Reporting only (ANNEX A.1)	Pass
2	Effective (Isotropic) Radiated Power	2.1046 22.913 24.232 27.50 90.542(a)	ANNEX A.1	Pass
3	Peak to Average Ratio	2.1046 24.232(d) 27.50(d)	ANNEX A.2	Pass
4	Occupied Bandwidth	2.1049 22.917 24.238 27.53 90.209	ANNEX A.3	Pass
5	Frequency Stability	2.1055 22.355 24.235 27.54 90.213	ANNEX A.4	Pass
6	Spurious Emission at Antenna Terminals	2.1051 22.917 24.238 27.53 90.691 90.543	ANNEX A.5	Pass
7	Band Edge	2.1051 22.917 24.238 27.53 90.691 90.543	ANNEX A.6	Pass
8	Field Strength of Spurious Radiation	2.1053 22.917 24.238 27.53 90.691 90.543	ANNEX A.7	Pass

Note 1: The RF module (FCC ID: XMR201910BG95M3) installed in the EUT is electronically and mechanically identical to the original certified module in the test report No. R1907A0446-R1V1 & No. R1907A0446-R2 & No. R1907A0446-R4 & No. R1907A0446-R5 & No. R1907A0446-R7 & No. R1907A0446-R8 & No. R1907A0446-R3V1& No. R1907A0446-R6V2 (which issued by

No.	Test Description	FCC Part No.	Test Result	Test Verdict
<p>Quectel Wireless Solutions Co., Ltd), so just Field Strength of Spurious Radiation was retested in this report. Other test items please refer to report:</p> <ol style="list-style-type: none"><li>1. GSM850 &amp; FDD LTE-M1 Band 5 refer No. R1907A0446-R1V1 issued on Sep.25, 2019;</li><li>2. GSM1900 &amp; FDD LTE-M1 Band 2 refer No. R1907A0446-R2 issued on Sep.11, 2019;</li><li>3. FDD LTE-M1 Band 4/12/13/66 refer No. R1907A0446-R3V1 issued on Sep.27, 2019;</li><li>4. FDD LTE-NB-IoT Band 5 refer No. R1907A0446-R4 issued on Sep.11, 2019;</li><li>5. FDD LTE-NB-IoT Band 2 refer No. R1907A0446-R5 issued on Sep.11, 2019;</li><li>6. FDD LTE-NB-IoT 4/12/13/66 refer No. R1907A0446-R6V2 issued on Mar.02, 2021;</li><li>7. FDD LTE-M1 Band 26(Part 22) refer No. R1907A0446-R7 issued on Sep.12, 2019;</li><li>8. FDD LTE-M1 Band 26(Part 90) refer No. R1907A0446-R8 issued on Sep.12, 2019;</li></ol>				

## 4 GENERAL TEST CONFIGURATIONS

### 4.1 Test Environments

During the measurement, the environmental conditions were within the listed ranges:

Test Voltage of the EUT	NV (Normal Voltage)	3.8 V
	LV (Low Voltage)	3.6 V
	HV (High Voltage)	4.2 V
Test Temperature of the EUT	NT (Normal Temperature)	+25 °C
	LT (Low Temperature)	-20 °C
	HT (High Temperature)	+60 °C

### 4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Software /Firmware Version	Cal. Date	Cal. Due
<b>Conducted Test System</b>						
Test Software 1	R&S	CMUgo	N/A	V2.0.1	N/A	N/A
Test Software 2	R&S	CMWRun	N/A	V1.9.8	N/A	N/A
Test Software 3	BALUN	BL410R	N/A	V2.1.1.48 8	N/A	N/A
Universal Radio Communication Tester	R&S	CMU 200	119280	V5.13	2021.01.14	2022.01.13
Wideband Radio Communication Tester	R&S	CMW 500	127794	V3.5.137	2021.06.01	2022.05.31
Wideband Radio Communication Tester	R&S	CMW 500	120598	V3.5.137	2021.01.14	2022.01.13
Spectrum Analyzer	R&S	FSV-40	101544	2.30.SP4	2021.06.01	2022.05.31
Spectrum Analyzer	Agilent	E4440A	MY45304434	A.11.21	2020.09.25	2021.09.24
Spectrum Analyzer	Agilent	E4440A	MY46181663	A.11.21	2020.10.21	2021.10.20
Temperature Chamber	AHK	SP20	1412	N/A	2021.06.04	2022.06.03
DC Power Supply	ITECH	IT6863A	8000140207 57120008	N/A	2020.09.25	2021.09.24
Power Sensor	Agilent	E9304A H18	MY41497164	N/A	2020.09.25	2021.09.24
Power Splitter	KMW	DCPD- LDC	1305003215	N/A	N/A	N/A
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	N/A	N/A	N/A

Description	Manufacturer	Model	Serial No.	Software /Firmware Version	Cal. Date	Cal. Due
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	N/A	N/A	N/A
Wideband Radio Communication Tester	R&S	CMW 500	168792	V3.5.137	2021.04.01	2022.03.31
<b>Radiated Test System</b>						
Test Software	BALUN	BL410_E	N/A	V16.921	N/A	N/A
Test Antenna-Bi-Log(30 MHz-3 GHz)	Schwarzbeck	VULB 9163	9163-624	N/A	2019.07.02	2022.07.01
Test Antenna-Horn(1-18 GHz)	Schwarzbeck	BBHA 9120D	9120D-1148	N/A	2019.07.02	2022.07.01
Test Antenna-Horn(18-40 GHz)	A-INFO	LB-180400KF	J211060273	N/A	2021.01.04	2023.01.03
Anechoic Chamber	YIHENG	9m*6m*6m	#3	N/A	2018.07.18	2022.07.17
EMI Receiver	KEYSIGHT	N9038A	MY53220118	A.14.16	2020.09.18	2021.09.17
Wideband Radio Communication Tester	R&S	CMW 500	127794	V3.2.73	2021.06.01	2022.05.31
Wideband Radio Communication Tester	R&S	CMW 500	168792	V3.5.137	2021.04.01	2022.03.31



### 4.3 Test Configurations

Test Items	Test Mode	Test Channel		
		LCH	MCH	HCH
Effective (Isotropic) Radiated Power	GSM 850	v	v	v
	GSM 1900	v	v	v
	GPRS 850	v	v	v
	GPRS 1900	v	v	v
	EGPRS 850	v	v	v
	EGPRS 1900	v	v	v
Occupied Bandwidth	GSM 850	v	v	v
	GSM 1900	v	v	v
	EGPRS 850	v	v	v
	EGPRS 1900	v	v	v
Frequency Stability	GSM 850	v	v	v
	GSM 1900	v	v	v
	GPRS 850	v	v	v
	GPRS 1900	v	v	v
	EGPRS 850	v	v	v
	EGPRS 1900	v	v	v
Spurious Emission at Antenna Terminals	GSM 850	v	v	v
	GSM 1900	v	v	v
	EGPRS 850	v	v	v
	EGPRS 1900	v	v	v
Band Edge	GSM 850	v	--	v
	GSM 1900	v	--	v
	EGPRS 850	v	--	v
	EGPRS 1900	v	--	v
Field Strength of Spurious Radiation	GSM 850	v	v	v
	GSM 1900	v	v	v
	EGPRS 850	v	v	v
	EGPRS 1900	v	v	v

Note 1: The mark "v" means that this configuration is chosen for testing.

Test Mode	UL Channel	UL Channel No.	UL Frequency (MHz)
GSM/GPRS/EGPRS 850	Low Channel	128	824.2
	Middle Channel	190	836.6
	High Channel	251	848.8
GSM/GPRS/EGPRS 1900	Low Channel	512	1850.2
	Middle Channel	661	1880.0
	High Channel	810	1909.8

LTE-M1 Band	Bandwidth (MHz)						Modulation Type		RB#			Test Channel		
	1.4	3	5	10	15	20	QPSK	16-QAM	1	Half	Full	LCH	MCH	HCH
Effective (Isotropic) Radiated Power														
2	v	v	v	v	v	v	v	v	v	--	v	v	v	v
4	v	v	v	v	v	v	v	v	v	--	v	v	v	v
5	v	v	v	v	n	n	v	v	v	--	v	v	v	v
12	v	v	v	v	n	n	v	v	v	--	v	v	v	v
13	n	n	v	v	n	n	v	v	v	--	v	v	v	v
26(Part22)	v	v	v	v	v	n	v	v	v	--	v	v	v	v
26(Part90)	v	v	v	v	--	n	v	v	v	--	v	v	v	v
66	v	v	v	v	v	v	v	v	v	--	v	v	v	v
Peak to Average Ratio														
2	--	--	--	--	--	v	v	v	--	--	v	v	v	v
4	--	--	--	--	--	v	v	v	--	--	v	v	v	v
5	--	--	--	v	n	n	v	v	--	--	v	v	v	v
12	--	--	--	v	n	n	v	v	--	--	v	v	v	v
13	n	n	--	v	n	n	v	v	--	--	v	v	v	v
26(Part22)	--	--	--	--	v	n	v	v	--	--	v	v	v	v
26(Part90)	--	--	--	v	--	n	v	v	--	--	v	--	v	--
66	--	--	--	--	--	v	v	v	--	--	v	v	v	v
Occupied Bandwidth														
2	v	v	v	v	v	v	v	v	--	--	v	v	v	v
4	v	v	v	v	v	v	v	v	--	--	v	v	v	v
5	v	v	v	v	n	n	v	v	--	--	v	v	v	v
12	v	v	v	v	n	n	v	v	--	--	v	v	v	v
13	n	n	v	v	n	n	v	v	--	--	v	v	v	v
26(Part22)	v	v	v	v	v	n	v	v	--	--	v	v	v	v
26(Part90)	v	v	v	v	--	n	v	v	--	--	v	v	v	v
66	v	v	v	v	v	v	v	v	--	--	v	v	v	v
Frequency Stability														
2	--	--	--	v	--	--	v	v	--	--	v	--	v	--
4	--	--	--	v	--	--	v	v	--	--	v	--	v	--
5	--	--	--	v	n	n	v	v	--	--	v	--	v	--
12	--	--	--	v	n	n	v	v	--	--	v	--	v	--
13	n	n	--	v	n	n	v	v	--	--	v	--	v	--
26(Part22)	--	--	--	v	--	n	v	v	--	--	v	--	v	--
26(Part90)	--	--	--	v	--	n	v	v	--	--	v	--	v	--
66	--	--	--	--	--	v	v	v	--	--	v	--	v	--
Spurious Emission at Antenna Terminals														
2	v	v	v	v	v	v	v	v	v	--	--	v	v	v
4	v	v	v	v	v	v	v	v	v	--	--	v	v	v
5	v	v	v	v	n	n	v	v	v	--	--	v	v	v
12	v	v	v	v	n	n	v	v	v	--	--	v	v	v
13	n	n	v	v	n	n	v	v	v	--	--	v	v	v

LTE-M1 Band	Bandwidth (MHz)						Modulation Type		RB#			Test Channel		
	1.4	3	5	10	15	20	QPSK	16-QAM	1	Half	Full	LCH	MCH	HCH
26(Part22)	v	v	v	v	v	n	v	v	v	--	--	v	v	v
26(Part90)	v	v	v	v	--	n	v	v	v	--	--	v	v	v
66	v	v	v	v	v	v	v	v	v	--	--	v	v	v
Band Edge														
2	v	v	v	v	v	v	v	v	v	--	v	v	--	v
4	v	v	v	v	v	v	v	v	v	--	v	v	--	v
5	v	v	v	v	n	n	v	v	v	--	v	v	--	v
12	v	v	v	v	n	n	v	v	v	--	v	v	--	v
13	n	n	v	v	n	n	v	v	v	--	v	v	--	v
26(Part22)	v	v	v	v	v	n	v	v	v	--	v	v	--	v
26(Part90)	v	v	v	v	--	n	v	v	v	--	v	v	--	v
66	v	v	v	v	v	v	v	v	v	--	v	v	--	v
Field Strength of Spurious Radiation														
2	v	v	v	v	v	v	v	v	v	--	--	--	v	--
4	v	v	v	v	v	v	v	v	v	--	--	--	v	--
5	v	v	v	v	n	n	v	v	v	--	--	--	v	--
12	v	v	v	v	n	n	v	v	v	--	--	--	v	--
13	n	n	v	v	n	n	v	--	v	--	--	--	v	--
26(Part22)	v	v	v	v	v	n	v	v	v	--	--	--	v	--
26(Part90)	v	v	v	v	--	n	v	v	v	--	--	--	v	--
66	v	v	v	v	v	v	v	--	v	--	--	--	v	--
Note 1: The mark "v" means that this configuration is chosen for testing.														
Note 2: The mark "n" means that this bandwidth is not supported.														

NB-IoT Band	Sub-carrier spacing (kHz)		Modulation Type		Test Channel		
	3.75	15	BPSK	QPSK	LCH	MCH	HCH
Effective (Isotropic) Radiated Power							
2	v	v	v	v	v	v	v
4	v	v	v	v	v	v	v
5	v	v	v	v	v	v	v
12	v	v	v	v	v	v	v
13	v	v	v	v	v	v	v
66	v	v	v	v	v	v	v
Peak to Average Ratio							
2	v	v	v	v	v	v	v
4	v	v	v	v	v	v	v
5	v	v	v	v	v	v	v
12	v	v	v	v	v	v	v
13	v	v	v	v	v	v	v
66	v	v	v	v	v	v	v
Occupied Bandwidth							
2	v	v	v	v	v	v	v

NB-IoT Band	Sub-carrier spacing (kHz)		Modulation Type		Test Channel		
	3.75	15	BPSK	QPSK	LCH	MCH	HCH
4	v	v	v	v	v	v	v
5	v	v	v	v	v	v	v
12	v	v	v	v	v	v	v
13	v	v	v	v	v	v	v
66	v	v	v	v	v	v	v
Frequency Stability							
2	v	v	v	v	--	v	--
4	v	v	v	v	--	v	--
5	v	v	v	v	--	v	--
12	v	v	v	v	--	v	--
13	v	v	v	v	--	v	--
66	v	v	v	v	--	v	--
71	v	v	v	v	--	v	--
Spurious Emission at Antenna Terminals							
2	v	v	v	v	v	v	v
4	v	v	v	v	v	v	v
5	v	v	v	v	v	v	v
12	v	v	v	v	v	v	v
13	v	v	v	v	v	v	v
66	v	v	v	v	v	v	v
Band Edge							
2	v	v	v	v	v	--	v
4	v	v	v	v	v	--	v
5	v	v	v	v	v	--	v
12	v	v	v	v	v	--	v
13	v	v	v	v	v	--	v
66	v	v	v	v	v	--	v
Field Strength of Spurious Radiation							
2	v	v	v	v	--	v	--
4	v	v	v	v	--	v	--
5	v	v	v	v	--	v	--
12	v	v	v	v	--	v	--
13	v	v	v	v	--	v	--
66	v	v	v	v	--	v	--
Note 1: The mark “v” means that this configuration is chosen for testing.							
Note 2: The mark “n” means that this bandwidth is not supported.							




Test Mode	UL Channel	Channel Bandwidth (MHz)	UL Channel No.	UL Frequency (MHz)
LTE Band 2	Low Range	1.4	18607	1850.7
		3	18615	1851.5
		5	18625	1852.5
		10	18650	1855
		15	18675	1857.5
		20	18700	1860
	Middle Range	1.4/3/5/10/15/20	18900	1880
	High Range	1.4	19193	1909.3
		3	19185	1908.5
		5	19175	1907.5
		10	19150	1905
		15	19125	1902.5
		20	19100	1900
LTE Band 4	Low Range	1.4	19957	1710.7
		3	19965	1711.5
		5	19975	1712.5
		10	20000	1715
		15	20025	1717.5
		20	20050	1720
	Middle Range	1.4/3/5/10/15/20	20175	1732.5
	High Range	1.4	20393	1754.3
		3	20385	1753.5
		5	20375	1752.5
		10	20350	1750
		15	20325	1747.5
		20	20300	1745
LTE Band 5	Low Range	1.4	20407	824.7
		3	20415	825.5
		5	20425	826.5
		10	20450	829
	Middle Range	1.4/3/5/10	20525	836.5
	High Range	1.4	20643	848.3
		3	20635	847.5
		5	20625	846.5
		10	20600	844
LTE Band 12	Low Range	1.4	23017	699.7
		3	23025	700.5
		5	23035	701.5
		10	23060	704
	Middle Range	1.4/3/5/10	23095	707.5
	High Range	1.4	23173	715.3
		3	23165	714.5
		5	23155	713.5

Test Mode	UL Channel	Channel Bandwidth (MHz)	UL Channel No.	UL Frequency (MHz)
		10	23130	711
LTE Band 13	Low Range	5	23205	779.5
		10	--	--
	Middle Range	5/10	23230	782
	High Range	5	23255	784.5
		10	--	--
LTE Band 26 (Part90)	Low Range	1.4	26697	814.7
		3	26705	815.5
		5	26715	816.5
		10	---	---
	Middle Range	1.4/3/5/10	26740	819
	High Range	1.4	26783	823.3
		3	26775	822.5
		5	26765	821.5
		10	---	---
LTE Band 26 (Part22)	Low Range	1.4	26797	824.7
		3	26805	825.5
		5	26815	826.5
		10	26840	829
		15	26865	831.5
	Middle Range	1.4/3/5/10/15	26915	836.5
	High Range	1.4	27033	848.3
		3	27025	847.5
		5	27015	846.5
		10	26990	844
		15	26965	841.5
LTE Band 66	Low Range	1.4	131979	1710.7
		3	131987	1711.5
		5	131997	1712.5
		10	132022	1715
		15	132047	1717.5
		20	132072	1720
	Middle Range	1.4/3/5/10/15/20	132322	1745
	High Range	1.4	132665	1779.3
		3	132657	1778.5
		5	132647	1777.5
		10	132622	1775
		15	132597	1772.5
		20	132572	1770
NB-IoT Band 2	Low Range	---	18601	1850.1
	Middle Range	---	18900	1880.0
	High Range	---	19199	1909.9
NB-IoT	Low Range	---	19951	1710.1

Test Mode	UL Channel	Channel Bandwidth (MHz)	UL Channel No.	UL Frequency (MHz)
Band 4	Middle Range	---	20175	1732.5
	High Range	---	20399	1754.9
NB-IoT Band 5	Low Range	---	20401	824.1
	Middle Range	---	20525	836.5
	High Range	---	20649	848.9
NB-IoT Band 12	Low Range	---	23011	699.1
	Middle Range	---	23095	707.5
	High Range	---	23179	715.9
NB-IoT Band 13	Low Range	---	23181	777.1
	Middle Range	---	23230	782.0
	High Range	---	23279	786.9
NB-IoT Band 66	Low Range	---	131973	1710.1
	Middle Range	---	132322	1745
	High Range	---	132671	1779.9


## 4.4 Test Setup

### 4.4.1 For Antenna Port Test

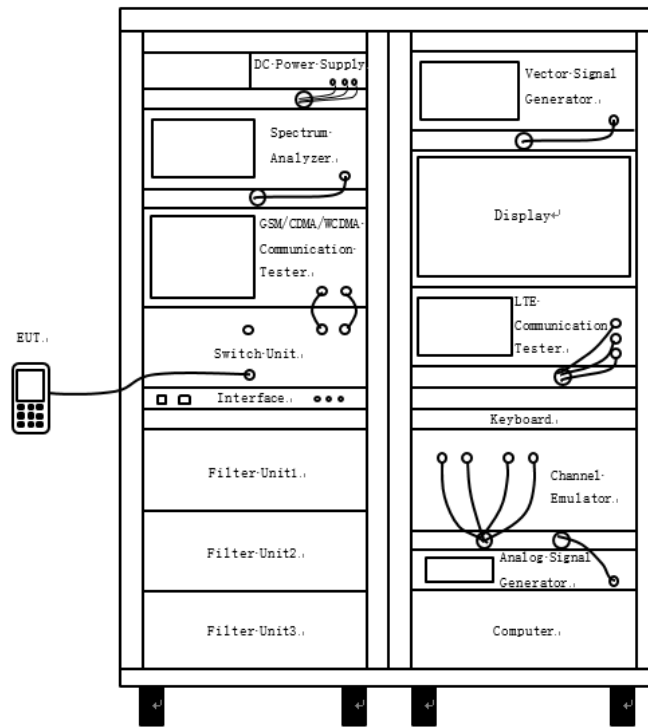

(Diagram 1)


### 4.4.2 For Frequency Stability Test

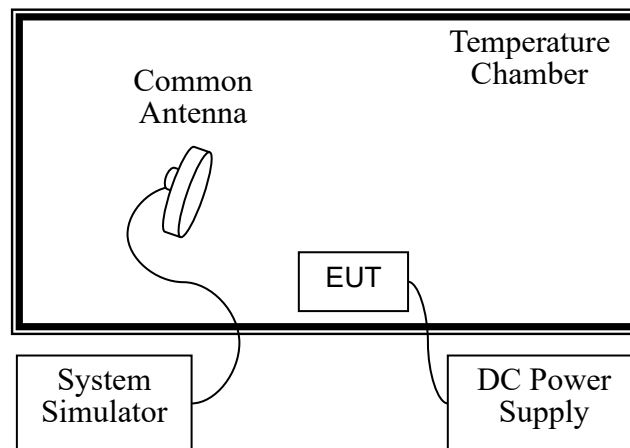

(Diagram 2)




#### 4.4.3 For Radiated Test (30 MHz ~ 1 GHz)

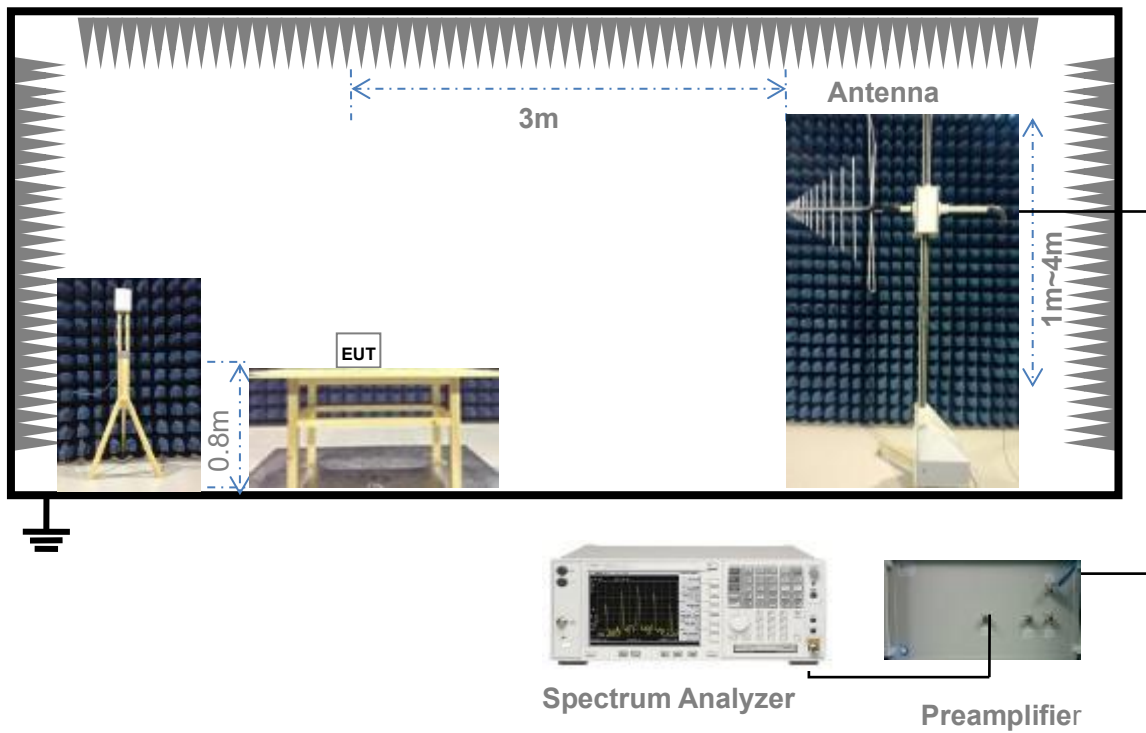

(Diagram 3)

#### 4.4.4 For Radiated Test (Above 1 GHz)

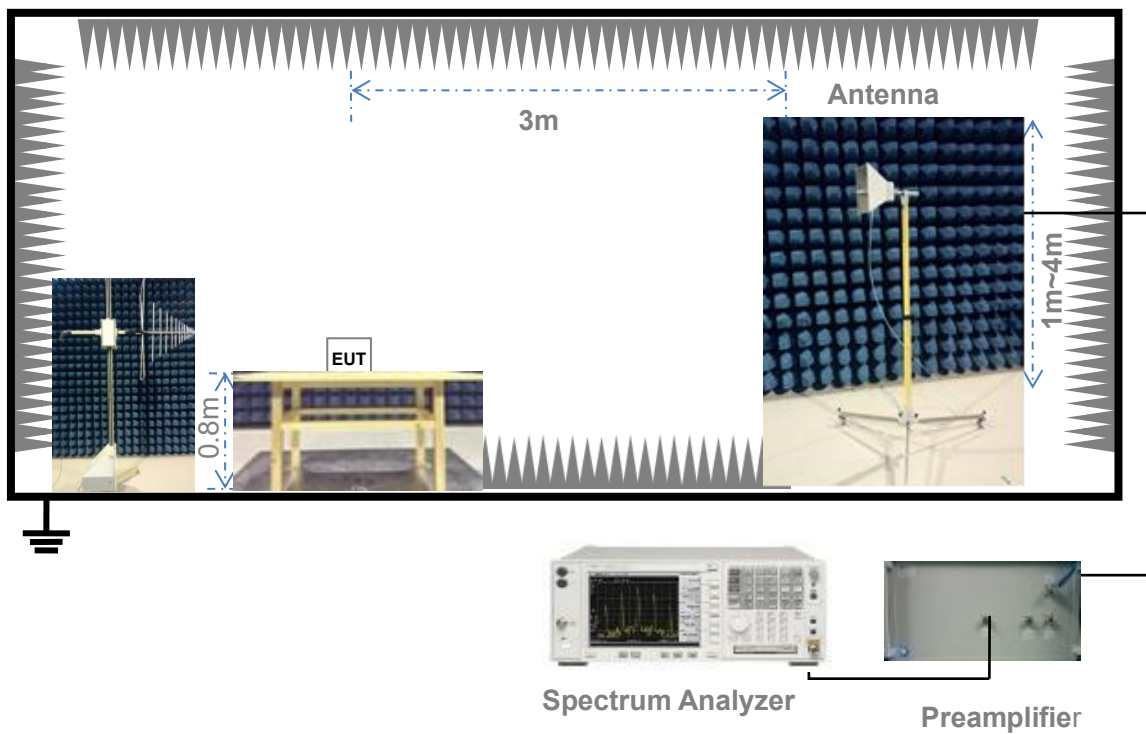

(Diagram 4)

## 5 TEST ITEMS

### 5.1 Transmitter Radiated Power (EIRP/ERP)

#### 5.1.1 Limit

FCC § 2.1046 & 22.913(a) & 24.232(c) & 27.50(a) & 27.50(b) & 27.50(c) & 27.50(d) & 27.50(h) & 90.635(b) & 90.542(a)

According to FCC section 22.913(a) (5), the Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC section 24.232(c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to FCC section 27.50(a) (3), for mobile and portable stations transmitting in the 2305-2315MHz band or the 2350-2360MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards.

FCC section 27.50(b) (10), portable stations (hand-held devices) transmitting in the 746-757MHz, 776-788MHz, and 805-806MHz bands are limited to 3 watts ERP.

FCC section 27.50(c) (10), portable stations (hand-held devices) in the 600MHz uplink band and the 698-746MHz band, and fixed and mobile stations in the 600MHz uplink band are limited to 3 watts ERP.

FCC section 27.50(d) (4), fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(7) Fixed, mobile, and portable (hand-held) stations operating in the 2000-2020 MHz band are limited to 2 watts EIRP.

And FCC section 27.50(h) (2), for mobile and other user stations, mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

According to FCC section 90.635(b), the maximum output power of the transmitter for mobile stations is 100 watts (20dBW).

According to FCC section 90.542(a) (7), portable stations (hand-held devices) transmitting in the 758-768 MHz band and the 788-798 MHz band are limited to 3 watts ERP.

#### 5.1.2 Test Setup

The section 4.4.1 (Diagram 1) test setup description is used for conducted test, and the section 4.4.3 and 4.4.4 (Diagram 3, 4) test setup description is used for radiated test. The photo of test setup please refer to ANNEX B.

#### 5.1.3 Test Procedure

##### **Description of the Conducted Output Power Measurement**

The EUT is coupled to the SS with attenuator through power splitter; the RF load attached to EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. A system simulator is used to establish communication with the EUT, and its parameters are set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The relevant equation for determining the conducted measured value is:

$$\text{Conducted Output Power Value (dBm)} = \text{Measured Value (dBm)} + \text{Path Loss (dB)}$$

where:

Conducted Output Power Value = final conducted measured value in the conducted power test, in dBm;

Measured Value = measured conducted power received by spectrum analyzer or power meter, in dBm;

Path Loss = signal attenuation in the connecting cable between the transmitter and spectrum analyzer or power meter, including external cable loss, in dB;

During the test, the data of Path Loss (dB) is added in the spectrum analyzer or power meter, so Measured Value (dBm) is the final values which contains the data of Path Loss (dB).

For example:

In the conducted output power test, when measured value for GSM850 is 24.7 dBm, and path loss is 8.5 dB, then final conducted output power value is:

$$\text{Conducted Output Power Value (dBm)} = 24.7 \text{ dBm} + 8.5 \text{ dB} = 33.2 \text{ dBm}$$

### **Description of the Transmitter Radiated Power Measurement**

In many cases, the RF output power limits for licensed digital transmission devices is specified in terms of effective radiated power (ERP) or equivalent isotropic radiated power (EIRP). Typically, ERP is specified when the operating frequency is less than or equal to 1 GHz and EIRP is specified when the operating frequency is greater than 1 GHz. Both are determined by adding the transmit antenna gain to the conducted RF output power with the primary difference between the two being that when determining the ERP, the transmit antenna gain is referenced to a dipole antenna (i.e., dBd) whereas when determining the EIRP, the transmit antenna gain is referenced to an isotropic antenna (dBi).

Final measurement calculation as below:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP/EIRP} = P_{\text{Meas}} + \text{GT} - \text{LC}$$

where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as  $P_{\text{Meas}}$ , typically dBW or dBm);

$P_{\text{Meas}}$  = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

dBd (ERP)=dBi (EIRP) -2.15 dB

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

For example:

In the EIRP test, when  $P_{\text{Meas}}$  value for GSM1900 is 30.2 dBm, LC is 0.6 dB, and GT is -3.4 dB, then final EIRP value is:

$$\text{EIRP for GSM1900} = 30.2 \text{ dBm} - 3.4 \text{ dBi} - 0.6 \text{ dB} = 26.2 \text{ dBm}$$

The relevant equation for determining the ERP/EIRP from the radiated RF output power is:

$$\text{ERP/EIRP (dBm)} = \text{SA Read Value (dBm)} + \text{Correction Factor (dB)}$$

where:

ERP/EIRP = effective or equivalent radiated power, in dBm;

SA Read Value = measured transmitter power received by EMI receiver or spectrum analyzer, in dBm;

Correction Factor = total correction factor including cable loss, in dB;

During the test, the data of Correction Factor (dB) is added in the EMI receiver or spectrum analyzer, so SA Read Value (dBm) is the final values which contains the data of Correction Factor (dB).

For example:

In the ERP test, when SA read value for GSM850 is 21dBm, and correction factor is 8dB, then final ERP value for GSM850 is:

$$\text{ERP (dBm)} = 21\text{dBm} + 8\text{dB} = 29\text{dBm}$$

#### 5.1.4 Test Result

Please refer to ANNEX A.1.



## 5.2 Peak to Average Ratio

### 5.2.1 Limit

FCC § 2.1046 & 24.232(d) & 27.50(d)

In addition, when the transmitter power is measured in terms of average value, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

According to FCC section 24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with 24.232 (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

FCC section 24.232(e), peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

According to FCC section 27.50(d) (5), in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13dB.

### 5.2.2 Test Setup

The section 4.4.1 (Diagram 1) test setup description is used for this test. The photo of test setup please refer to ANNEX B.

### 5.2.3 Test Procedure

Here the lowest, middle and highest channels are selected to perform testing to verify the peak-to-average ratio.

According to KDB 971168 D01, there is CCDF procedure for PAPR:

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval as follows:
  - 1) for continuous transmissions, set to 1 ms,
  - 2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- e) Record the maximum PAPR level associated with a probability of 0.1%.

Alternate procedure for PAPR:

Use one of the procedures presented in 4.1 to measure the total peak power and record as  $P_{Pk}$ . Use one of the applicable procedures presented 4.2 to measure the total average power and record as  $P_{Avg}$ . Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm).$$

#### 5.2.4 Test Result

Please refer to ANNEX A.2.

## 5.3 Occupied Bandwidth

### 5.3.1 Limit

FCC § 2.1049

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Many of the individual rule parts specify a relative OBW in lieu of the 99% OBW. In such cases, the OBW is defined as the width of the signal between two points, one below the carrier center frequency and on above the carrier center frequency, outside of which all emissions are attenuated by at least X dB below the transmitter power, where the value of X is typically specified as 26.

### 5.3.2 Test Setup

The section 4.4.1 (Diagram 1) test setup description is used for this test. The photo of test setup please refer to ANNEX B.

### 5.3.3 Test Procedure

The following procedure shall be used for measuring power bandwidth.

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the anticipated OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least  $10\log(\text{OBW} / \text{RBW})$  below the reference level.
- d) NOTE—Steps a) through c) may require iteration to adjust within the specified tolerances.
- e) For -26 dB OBW, the dynamic range of the spectrum analyzer at the selected RBW shall be at least 10dB below the target “-X dB down” requirement, e.g. -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be 36dB below the reference value.
- f) Set the detection mode to peak, and the trace mode to max hold.
- g) For 99% OBW, use the 99 % power bandwidth function of the spectrum analyzer (if available) and report the measured bandwidth.

If the instrument does not have a 99 % power bandwidth function, the trace data points are to be recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99 % power bandwidth is the difference between these two frequencies.

- h) For -26 dB OBW, determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace

to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).

Determine the “-X dB down amplitude” as equal to (reference value -X). Alternatively, this calculation can be performed by the analyzer by using the marker-delta function.

Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below “-X dB down amplitude” determined in step g). If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.

i) The OBW shall be reported by providing plot(s) of the measuring instrument display. The frequency and amplitude axes and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

j) Change variable modulations, coding, or channel bandwidth settings, then repeat above test procedures.

#### 5.3.4 Test Result

Please refer to ANNEX A.3.

## 5.4 Frequency Stability

### 5.4.1 Limit

FCC § 2.1055 & 22.355 & 24.235 & 27.54 & 90.213

FCC § 2.1055

The frequency stability shall be measured with variation of ambient temperature as follows:

(1) The temperature is varied from -30°C to +50°C.

(2) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10°C through the range.

The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating and point which shall be specified by the manufacture.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

FCC § 22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

**Table C-1—Frequency Tolerance for Transmitters in the Public Mobile Services**

Frequency range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10.0	n/a	n/a

FCC § 24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

FCC § 27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

FCC § 90.213

The frequency stability shall not depart from the reference frequency in excess of  $\pm 2.5\text{ppm}$  for mobile stations.

#### 5.4.2 Test Setup

The section 4.4.2 (Diagram 2) test setup description is used for this test. The photo of test setup please refer to ANNEX B.

#### 5.4.3 Test Procedure

1. The EUT is placed in a temperature chamber.
2. The temperature is set to  $25^{\circ}\text{C}$  and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured.
3. The temperature is increased by not more than 10 degrees, allowed to stabilize and soak, and then repeat the frequency error measurement.
4. Repeat procedure 3 until  $+50^{\circ}\text{C}$  and  $-30^{\circ}\text{C}$  is reached.
5. Change supply voltage, and repeat measurement until extreme voltage is reached.

#### 5.4.4 Test Result

Please refer to ANNEX A.4.

## 5.5 Spurious Emission at Antenna Terminals

### 5.5.1 Limit

FCC § 2.1051 & 22.917(a) & 24.238(a) & 27.53(a) & 27.53(c) & 27.53(f) & 27.53(g) & 27.53(h) & 27.53(m) & 90.691 & 90.543

In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC § 22.917(a) & 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. This is calculated to be -13 dBm.

FCC § 27.53(a) (4)

For mobile and portable stations operating in the 2305-2315MHz and 2350-2360MHz bands:

(1) By a factor of not less than:  $43 + 10 \log(P)$  dB on all frequencies between 2305 and 2320MHz and on all frequencies between 2345 and 2360MHz that are outside the licensed band(s) of operation, not less than  $55 + 10 \log(P)$  dB on all frequencies between 2320 and 2324MHz and on all frequencies between 2341 and 2345MHz, not less than  $61 + 10 \log(P)$  dB on all frequencies between 2324 and 2328MHz and on all frequencies between 2337 and 2341MHz, and not less than  $67 + 10 \log(P)$  dB on all frequencies between 2328 and 2337MHz.

(2) By a factor of not less than  $43 + 10 \log(P)$  dB on all frequencies between 2300 and 2305MHz,  $55 + 10 \log(P)$  dB on all frequencies between 2296 and 2300MHz,  $61 + 10 \log(P)$  dB on all frequencies between 2292 and 2296MHz,  $67 + 10 \log(P)$  dB on all frequencies between 2288 and 2292MHz, and  $70 + 10 \log(P)$  dB below 2288MHz.

(3) By a factor of not less than  $43 + 10 \log(P)$  dB on all frequencies between 2360 and 2365MHz, and not less than  $70 + 10 \log(P)$  dB above 2365MHz.

FCC § 27.53(c)

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB;

(2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB;

(3) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than  $76 + 10 \log(P)$  dB in

a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

#### FCC § 27.53(f)

For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to - 70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and - 80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

#### FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log(P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

#### FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

#### FCC § 27.53(m) (4)

For mobile digital stations (BRS and EBS stations), the attenuation factor shall be not less than:

- $40 + 10 \log P$  dB (– 10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge.
- $43 + 10 \log P$  dB (– 13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge,
- $55 + 10 \log P$  dB (– 25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB).

In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz



and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

FCC § 90.691

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power ( $P$ ) in watts by at least  $116 \log_{10}(f/6.1)$  decibels or  $50 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where  $f$  is the frequency removed from the center of the outer channel in the block in kilohertz and where  $f$  is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power ( $P$ ) in watts by at least  $43 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where  $f$  is the frequency removed from the center of the outer channel in the block in kilohertz and where  $f$  is greater than 37.5 kHz.

(b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

FCC § 90.543

(e) For operations in the 758–768 MHz and the 788–798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power ( $P$ ) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations.

(2) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.

(3) On any frequency between 775–788 MHz, above 805 MHz, and below 758 MHz, by at least  $43 + 10 \log (P)$  dB.

(4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/ MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

### 5.5.2 Test Setup

The section 4.4.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

### 5.5.3 Test Procedure

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency blocks a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

1. The EUT is coupled to the system simulator and spectrum analyzer; the RF load attached to EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.
2. CMW500 is used to establish communication with the EUT, and its parameters are set to force the EUT transmitting at maximum output power.
3. The RF output of the transmitter is connected to the input of the spectrum analyzer through sufficient attenuation.
4. Spurious emissions are tested with 0.001MHz RBW for frequency less than 150kHz, 0.01MHz RBW for frequency less than 30MHz, 0.1MHz RBW for frequency less than 1GHz, and 1MHz RBW for frequency above 1GHz. And sweep point number are at least 401, referring to following formula.

$$\text{Sweep point number} = \text{Span/RBW}$$

$$\text{VBW} = 3 * \text{RBW}$$

$$\text{Detector Mode} = \text{mean or average power}$$

5. Record the frequencies and levels of spurious emissions.

### 5.5.4 Test Result

Please refer to ANNEX A.5.

## 5.6 Band Edge

### 5.6.1 Limit

FCC § 2.1051 & 22.917(a) & 24.238(a) & 27.53(a) & 27.53(c) & 27.53(g) & 27.53(h) & 27.53(m) & 90.691 & 90.543

In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC § 22.917(a) & 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. This is calculated to be -13 dBm.

FCC § 27.53(a) (4)

For mobile and portable stations operating in the 2305-2315MHz and 2350-2360MHz bands:

(1) By a factor of not less than:  $43 + 10 \log(P)$  dB on all frequencies between 2305 and 2320MHz and on all frequencies between 2345 and 2360MHz that are outside the licensed band(s) of operation, not less than  $55 + 10 \log(P)$  dB on all frequencies between 2320 and 2324MHz and on all frequencies between 2341 and 2345MHz, not less than  $61 + 10 \log(P)$  dB on all frequencies between 2324 and 2328MHz and on all frequencies between 2337 and 2341MHz, and not less than  $67 + 10 \log(P)$  dB on all frequencies between 2328 and 2337MHz.

(2) By a factor of not less than  $43 + 10 \log(P)$  dB on all frequencies between 2300 and 2305MHz,  $55 + 10 \log(P)$  dB on all frequencies between 2296 and 2300MHz,  $61 + 10 \log(P)$  dB on all frequencies between 2292 and 2296MHz,  $67 + 10 \log(P)$  dB on all frequencies between 2288 and 2292MHz, and  $70 + 10 \log(P)$  dB below 2288MHz.

(3) By a factor of not less than  $43 + 10 \log(P)$  dB on all frequencies between 2360 and 2365MHz, and not less than  $70 + 10 \log(P)$  dB above 2365MHz.

FCC § 27.53(c)

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB;

(2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB;

(3) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than  $76 + 10 \log(P)$  dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

#### FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log(P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

#### FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

#### FCC § 27.53(m) (4)

For mobile digital stations (BRS and EBS stations), the attenuation factor shall be not less than:

- $40 + 10 \log P$  dB (–10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge.
- $43 + 10 \log P$  dB (–13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge,
- $55 + 10 \log P$  dB (–25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB).

In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

## FCC § 90.691

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \log_{10}(f/6.1)$  decibels or  $50 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

(b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

## FCC § 90.543

(e) For operations in the 758–768 MHz and the 788–798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than  $76 + 10 \log(P)$  dB in a 6.25 kHz band segment, for base and fixed stations.

(2) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than  $65 + 10 \log(P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.

(3) On any frequency between 775–788 MHz, above 805 MHz, and below 758 MHz, by at least  $43 + 10 \log(P)$  dB.

(4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

## 5.6.2 Test Setup

The section 4.4.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

## 5.6.3 Test Procedure

The EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

1. The EUT is coupled to the system simulator and spectrum analyzer; the RF load attached to EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.
2. CMW500 is used to establish communication with the EUT, and its parameters are set to force the EUT transmitting at maximum output power.
3. The RF output of the transmitter is connected to the input of the spectrum analyzer through sufficient attenuation.
4. The center of the spectrum analyzer was set to block edge frequency.
5. Band edge are tested with 1%\*cBW (RBW), and sweep point number referred to following formula.

$$\text{Sweep point number} = 2 * \text{Span} / \text{RBW}$$

$$\text{VBW} = 3 \text{RBW}$$

6. Record the frequencies and levels of spurious emissions.

For mobile and portable stations, on all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment. Since it was not possible to set the resolution bandwidth to 6.25 kHz with the available equipment, a bandwidth of 10 kHz was used instead to show compliance. By using a 10 kHz bandwidth on the spectrum analyzer.

$$10 * \log(10 \text{ kHz} / 6.25 \text{ kHz}) = 2.04 \text{ dB}$$

$$\text{Limit Line} = -35 \text{ dBm} + 2.04 \text{ dB} = -32.96 \text{ dBm}$$

#### 5.6.4 Test Result

Please refer to ANNEX A.6.

## 5.7 Field Strength of Spurious Radiation

### 5.7.1 Limit

FCC § 2.1053 & 22.917(a) & 24.238(a) & 27.53(a) & 27.53(c) & 27.53(f) & 27.53(g) & 27.53(h) & 27.53(m) & 90.691 & 90.543

FCC § 22.917(a) & 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. This is calculated to be -13 dBm.

FCC § 27.53(a) (4)

For mobile and portable stations operating in the 2305-2315MHz and 2350-2360MHz bands:

(1) By a factor of not less than:  $43 + 10 \log(P)$  dB on all frequencies between 2305 and 2320MHz and on all frequencies between 2345 and 2360MHz that are outside the licensed band(s) of operation, not less than  $55 + 10 \log(P)$  dB on all frequencies between 2320 and 2324MHz and on all frequencies between 2341 and 2345MHz, not less than  $61 + 10 \log(P)$  dB on all frequencies between 2324 and 2328MHz and on all frequencies between 2337 and 2341MHz, and not less than  $67 + 10 \log(P)$  dB on all frequencies between 2328 and 2337MHz.

(2) By a factor of not less than  $43 + 10 \log(P)$  dB on all frequencies between 2300 and 2305MHz,  $55 + 10 \log(P)$  dB on all frequencies between 2296 and 2300MHz,  $61 + 10 \log(P)$  dB on all frequencies between 2292 and 2296MHz,  $67 + 10 \log(P)$  dB on all frequencies between 2288 and 2292MHz, and  $70 + 10 \log(P)$  dB below 2288MHz.

(3) By a factor of not less than  $43 + 10 \log(P)$  dB on all frequencies between 2360 and 2365MHz, and not less than  $70 + 10 \log(P)$  dB above 2365MHz.

FCC § 27.53(c)

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB;

(2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB;

(3) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than  $76 + 10 \log(P)$  dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than  $65 + 10 \log(P)$  dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be



adjusted to indicate spectral energy in a 6.25 kHz segment.

FCC § 27.53(f)

For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to - 70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and - 80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43+10\log(P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

FCC § 27.53(m) (4)

For mobile digital stations (BRS and EBS stations), the attenuation factor shall be not less than:

- $40+10\log P$  dB (–10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge.
- $43+10\log P$  dB (–13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge,
- $55+10\log P$  dB (–25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB).

In addition, the attenuation factor shall not be less than  $43 + 10 \log(P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log(P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

FCC § 90.691

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \log_{10}(f/6.1)$  decibels or  $50 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the



frequency removed from the center of the outer channel in the block in kilohertz and where  $f$  is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power ( $P$ ) in watts by at least  $43 + 10\log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where  $f$  is the frequency removed from the center of the outer channel in the block in kilohertz and where  $f$  is greater than 37.5 kHz.

(b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

#### FCC § 90.543

(e) For operations in the 758–768 MHz and the 788–798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power ( $P$ ) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations.

(2) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.

(3) On any frequency between 775–788 MHz, above 805 MHz, and below 758 MHz, by at least  $43 + 10 \log (P)$  dB.

(4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559– 1610 MHz shall be limited to -70 dBW/ MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

### 5.7.2 Test Setup

The section 4.4.3 and 4.4.4 (Diagram 3, 4) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

### 5.7.3 Test Procedure

1. On a test site, the EUT shall be placed at 80cm height on a turn table, and in the position close to normal use as declared by the applicant.

2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.

3. The output of the test antenna shall be connected to the measuring receiver and the peak detector is used for the measurement.
4. During the measurement of the EUT, the resolution bandwidth was to 1 MHz and the average bandwidth was set to 1 MHz.
5. The transmitter shall be switched on; the measuring receiver shall be tuned to the frequency of the transmitter under test.
6. The test antenna shall be raised and lowered through the specified range of height until the maximum signal level is detected by the measuring receiver.
7. The transmitter shall be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
8. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
9. The maximum signal level detected by the measuring receiver shall be noted.
10. The EUT was replaced by half-wave dipole (824 ~ 849 MHz) or horn antenna (1 850 ~ 1 910 MHz) connected to a signal generator.
11. In necessary, the input attenuator setting on the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
12. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
13. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, which is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
14. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
15. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.

Final measurement calculation as below:

The relevant equation for determining the ERP/EIRP from the radiated RF output power is:

$$\text{ERP/EIRP (dBm)} = \text{SA Read Value (dBm)} + \text{Correction Factor (dB)}$$

where:

ERP/EIRP = effective or equivalent radiated power, in dBm;

SA Read Value = measured transmitter power received by EMI receiver or spectrum analyzer, in dBm;

Correction Factor = total correction factor including cable loss, in dB;

During the test, the data of Correction Factor (dB) is added in the EMI receiver or spectrum analyzer, so SA Read Value (dBm) is the final values which contains the data of Correction Factor (dB).

For example:

In the ERP test, when SA read value for GSM850 is 21dBm, and correction factor is 8dB, then final ERP value for GSM850 is:

$$\text{ERP (dBm)} = 21\text{dBm} + 8\text{dB} = 29\text{dBm}$$

#### 5.7.4 Test Result

Please refer to ANNEX A.7.

## ANNEX A TEST RESULTS

### A.1 Transmitter Radiated Power (EIRP/ERP)

#### GSM Mode Test Data

Test Band	Test Channel	Conducted Output Peak Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
GSM 850	LCH	31.52	2.5	0.35	31.87	1.538	7.00	Pass
	MCH	31.74	2.5	0.35	32.09	1.618	7.00	Pass
	HCH	31.91	2.5	0.35	<b>32.26</b>	1.683	7.00	Pass
GPRS 850	LCH	31.44	2.5	0.35	31.79	1.510	7.00	Pass
	MCH	31.56	2.5	0.35	31.91	1.552	7.00	Pass
	HCH	31.67	2.5	0.35	32.02	1.592	7.00	Pass
EGPRS 850	LCH	24.77	2.5	0.35	25.12	0.325	7.00	Pass
	MCH	24.53	2.5	0.35	24.88	0.307	7.00	Pass
	HCH	24.75	2.5	0.35	25.10	0.323	7.00	Pass

Test Band	Test Channel	Conducted Output Peak Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
GSM 1900	LCH	29.60	2	<b>31.60</b>	1.445	2.00	Pass
	MCH	29.19	2	31.19	1.315	2.00	Pass
	HCH	29.54	2	31.54	1.426	2.00	Pass
GPRS 1900	LCH	29.53	2	31.53	1.422	2.00	Pass
	MCH	29.08	2	31.08	1.282	2.00	Pass
	HCH	29.44	2	31.44	1.393	2.00	Pass
EGPRS 1900	LCH	24.90	2	26.90	0.489	2.00	Pass
	MCH	24.62	2	26.62	0.459	2.00	Pass
	HCH	24.62	2	26.62	0.459	2.00	Pass

Note 1: For the GPRS and EGPRS mode, all slots were tested and just the worst data were recorded in this table.

Note 2:  $ERP/EIRP = P_{Meas} + GT - LC$

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as  $P_{Meas}$ , typically dBW or dBm);

$P_{Meas}$  = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

$ERP = EIRP - 2.15$ ; where ERP and EIRP are expressed in consistent units.

Note 3: Set PCL to 5 for GSM/GPRS 850 (power class 4) and 0 for GSM/GPRS 1900 (power class 1).

Set PCL to 8 for EGPRS850 (power class E2) and 2 for EGPRS1900 (power class E2).

### GPRS Conducted Output Power

Band	Channel	Conducted Output Peak Power							
		1 Slot (dBm)	1 Slot (W)	2 Slots (dBm)	2 Slots (W)	3 Slots (dBm)	3 Slots (W)	4 Slots (dBm)	4 Slots (W)
GPRS 850	LCH	31.44	1.393	31.18	1.311	29.49	0.889	28.67	0.736
	MCH	31.56	1.432	31.30	1.348	29.66	0.924	28.08	0.642
	HCH	31.67	1.469	31.41	1.384	29.92	0.982	28.26	0.669
GPRS 1900	LCH	29.53	0.897	29.12	0.817	27.38	0.547	25.62	0.365
	MCH	29.08	0.809	28.97	0.789	27.06	0.509	25.95	0.393
	HCH	29.44	0.879	28.89	0.774	26.82	0.481	25.66	0.368

### EGPRS Conducted Output Power

Band	Channel	Conducted Output Peak Power							
		1 Slot (dBm)	1 Slot (W)	2 Slots (dBm)	2 Slots (W)	3 Slots (dBm)	3 Slots (W)	4 Slots (dBm)	4 Slots (W)
EGPRS 850	LCH	23.02	0.200	24.77	0.300	22.92	0.196	21.72	0.149
	MCH	22.79	0.190	24.53	0.284	22.81	0.191	21.46	0.140
	HCH	23.01	0.200	24.75	0.298	22.87	0.194	21.61	0.145
EGPRS 1900	LCH	23.72	0.236	24.90	0.309	22.95	0.197	21.80	0.151
	MCH	23.43	0.220	24.62	0.290	22.65	0.184	21.49	0.141
	HCH	23.40	0.219	24.62	0.289	22.58	0.181	21.42	0.139

## LTE-M1 Mode Test Data

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE-M1 BAND2									
1.4 MHz	LCH	QPSK	RB1#0	18.55	2	20.55	0.114	2.00	Pass
			RB6#0	16.41	2	18.41	0.069	2.00	Pass
		16-QAM	RB1#0	17.62	2	19.62	0.092	2.00	Pass
			RB5#0	16.43	2	18.43	0.070	2.00	Pass
	MCH	QPSK	RB1#0	18.21	2	20.21	0.105	2.00	Pass
			RB6#0	16.19	2	18.19	0.066	2.00	Pass
		16-QAM	RB1#0	17.5	2	19.50	0.089	2.00	Pass
			RB5#0	16.15	2	18.15	0.065	2.00	Pass
	HCH	QPSK	RB1#0	18.44	2	20.44	0.111	2.00	Pass
			RB6#0	16.47	2	18.47	0.070	2.00	Pass
		16-QAM	RB1#5	17.61	2	19.61	0.091	2.00	Pass
			RB5#1	16.45	2	18.45	0.070	2.00	Pass
3 MHz	LCH	QPSK	RB1#0	18.35	2	20.35	0.108	2.00	Pass
			RB6#0	16.26	2	18.26	0.067	2.00	Pass
		16-QAM	RB1#0	17.42	2	19.42	0.087	2.00	Pass
			RB5#0	16.34	2	18.34	0.068	2.00	Pass
	MCH	QPSK	RB1#0	18.27	2	20.27	0.106	2.00	Pass
			RB6#0	16.16	2	18.16	0.065	2.00	Pass
		16-QAM	RB1#0	17.34	2	19.34	0.086	2.00	Pass
			RB5#0	16.21	2	18.21	0.066	2.00	Pass
	HCH	QPSK	RB1#0	<b>18.65</b>	2	<b>20.65</b>	0.116	2.00	Pass
			RB6#0	16.34	2	18.34	0.068	2.00	Pass
		16-QAM	RB1#5	17.7	2	19.70	0.093	2.00	Pass
			RB5#1	16.27	2	18.27	0.067	2.00	Pass
5 MHz	LCH	QPSK	RB1#0	18.28	2	20.28	0.107	2.00	Pass
			RB6#0	17.32	2	19.32	0.086	2.00	Pass
		16-QAM	RB1#0	18.53	2	20.53	0.113	2.00	Pass
			RB5#0	17.38	2	19.38	0.087	2.00	Pass
	MCH	QPSK	RB1#0	18.29	2	20.29	0.107	2.00	Pass
			RB6#0	17.15	2	19.15	0.082	2.00	Pass
		16-QAM	RB1#0	17.92	2	19.92	0.098	2.00	Pass
			RB5#0	17.15	2	19.15	0.082	2.00	Pass
	HCH	QPSK	RB1#0	18.41	2	20.41	0.110	2.00	Pass
			RB6#0	17.48	2	19.48	0.089	2.00	Pass
		16-QAM	RB1#5	18.01	2	20.01	0.100	2.00	Pass
			RB5#1	17.48	2	19.48	0.089	2.00	Pass
10 MHz	LCH	QPSK	RB1#0	18.32	2	20.32	0.108	2.00	Pass
			RB4#0	18.17	2	20.17	0.104	2.00	Pass
		16-QAM	RB1#0	18.59	2	20.59	0.115	2.00	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
<b>LTE-M1 BAND2</b>									
	MCH	QPSK	RB4#0	18.19	2	20.19	0.104	2.00	Pass
			RB1#0	18.08	2	20.08	0.102	2.00	Pass
		16-QAM	RB4#0	18.09	2	20.09	0.102	2.00	Pass
			RB1#0	18.44	2	20.44	0.111	2.00	Pass
			RB4#0	18.00	2	20.00	0.100	2.00	Pass
	HCH	QPSK	RB1#4	18.40	2	20.40	0.110	2.00	Pass
			RB4#2	18.37	2	20.37	0.109	2.00	Pass
		16-QAM	RB1#4	18.15	2	20.15	0.104	2.00	Pass
			RB4#2	18.55	2	20.55	0.114	2.00	Pass
15 MHz	LCH	QPSK	RB1#0	18.28	2	20.28	0.107	2.00	Pass
			RB6#0	18.22	2	20.22	0.105	2.00	Pass
		16-QAM	RB1#0	18.62	2	20.62	0.115	2.00	Pass
			RB5#0	18.51	2	20.51	0.112	2.00	Pass
	MCH	QPSK	RB1#0	18.29	2	20.29	0.107	2.00	Pass
			RB6#0	18.01	2	20.01	0.100	2.00	Pass
		16-QAM	RB1#0	17.91	2	19.91	0.098	2.00	Pass
			RB5#0	17.99	2	19.99	0.100	2.00	Pass
	HCH	QPSK	RB1#5	18.51	2	20.51	0.112	2.00	Pass
			RB6#0	18.36	2	20.36	0.109	2.00	Pass
		16-QAM	RB1#5	18.11	2	20.11	0.103	2.00	Pass
			RB5#1	18.34	2	20.34	0.108	2.00	Pass
20 MHz	LCH	QPSK	RB1#0	18.24	2	20.24	0.106	2.00	Pass
			RB6#0	18.1	2	20.10	0.102	2.00	Pass
		16-QAM	RB1#0	18.55	2	20.55	0.114	2.00	Pass
			RB5#0	18.15	2	20.15	0.104	2.00	Pass
	MCH	QPSK	RB1#0	18.4	2	20.40	0.110	2.00	Pass
			RB6#0	18.13	2	20.13	0.103	2.00	Pass
		16-QAM	RB1#0	17.99	2	19.99	0.100	2.00	Pass
			RB5#0	18.13	2	20.13	0.103	2.00	Pass
	HCH	QPSK	RB1#0	18.49	2	20.49	0.112	2.00	Pass
			RB6#0	18.48	2	20.48	0.112	2.00	Pass
		16-QAM	RB1#5	18.14	2	20.14	0.103	2.00	Pass
			RB5#1	18.36	2	20.36	0.109	2.00	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
<b>LTE-M1 BAND4</b>									
1.4 MHz	LCH	QPSK	RB1#0	18.23	1.8	20.03	0.101	1.00	Pass
			RB6#0	16.12	1.8	17.92	0.062	1.00	Pass
		16-QAM	RB1#0	17.5	1.8	19.30	0.085	1.00	Pass
			RB5#0	16.15	1.8	17.95	0.062	1.00	Pass
	MCH	QPSK	RB1#0	18.49	1.8	20.29	0.107	1.00	Pass
			RB6#0	16.01	1.8	17.81	0.060	1.00	Pass
		16-QAM	RB1#0	16.97	1.8	18.77	0.075	1.00	Pass
			RB5#0	16.12	1.8	17.92	0.062	1.00	Pass
	HCH	QPSK	RB1#5	18.18	1.8	19.98	0.100	1.00	Pass
			RB6#0	15.99	1.8	17.79	0.060	1.00	Pass
		16-QAM	RB1#5	16.8	1.8	18.60	0.072	1.00	Pass
			RB5#1	16.08	1.8	17.88	0.061	1.00	Pass
3 MHz	LCH	QPSK	RB1#0	18.35	1.8	20.15	0.104	1.00	Pass
			RB6#0	16.19	1.8	17.99	0.063	1.00	Pass
		16-QAM	RB1#0	17.58	1.8	19.38	0.087	1.00	Pass
			RB5#0	16.25	1.8	18.05	0.064	1.00	Pass
	MCH	QPSK	RB1#0	18.34	1.8	20.14	0.103	1.00	Pass
			RB6#0	16.07	1.8	17.87	0.061	1.00	Pass
		16-QAM	RB1#0	16.84	1.8	18.64	0.073	1.00	Pass
			RB5#0	16.08	1.8	17.88	0.061	1.00	Pass
	HCH	QPSK	RB1#5	18.07	1.8	19.87	0.097	1.00	Pass
			RB6#0	16.04	1.8	17.84	0.061	1.00	Pass
		16-QAM	RB1#5	17.25	1.8	19.05	0.080	1.00	Pass
			RB5#1	15.9	1.8	17.70	0.059	1.00	Pass
5 MHz	LCH	QPSK	RB1#0	18.16	1.8	19.96	0.099	1.00	Pass
			RB6#0	17.28	1.8	19.08	0.081	1.00	Pass
		16-QAM	RB1#0	17.79	1.8	19.59	0.091	1.00	Pass
			RB5#0	17.23	1.8	19.03	0.080	1.00	Pass
	MCH	QPSK	RB1#0	18.32	1.8	20.12	0.103	1.00	Pass
			RB6#0	17.16	1.8	18.96	0.079	1.00	Pass
		16-QAM	RB1#0	18.08	1.8	19.88	0.097	1.00	Pass
			RB5#0	17.15	1.8	18.95	0.079	1.00	Pass
	HCH	QPSK	RB1#5	17.66	1.8	19.46	0.088	1.00	Pass
			RB6#0	17.08	1.8	18.88	0.077	1.00	Pass
		16-QAM	RB1#5	17.72	1.8	19.52	0.090	1.00	Pass
			RB5#1	17.07	1.8	18.87	0.077	1.00	Pass
10 MHz	LCH	QPSK	RB1#0	18.42	1.8	20.22	0.105	1.00	Pass
			RB4#0	18.25	1.8	20.05	0.101	1.00	Pass
		16-QAM	RB1#0	18.3	1.8	20.10	0.102	1.00	Pass
			RB4#0	18.37	1.8	20.17	0.104	1.00	Pass



Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
<b>LTE-M1 BAND4</b>									
	MCH	QPSK	RB1#0	18.31	1.8	20.11	0.103	1.00	Pass
			RB4#0	18.07	1.8	19.87	0.097	1.00	Pass
		16-QAM	RB1#0	18	1.8	19.80	0.095	1.00	Pass
			RB4#0	18.26	1.8	20.06	0.101	1.00	Pass
	HCH	QPSK	RB1#5	18.08	1.8	19.88	0.097	1.00	Pass
			RB4#2	18.02	1.8	19.82	0.096	1.00	Pass
		16-QAM	RB1#5	17.79	1.8	19.59	0.091	1.00	Pass
			RB4#2	18.29	1.8	20.09	0.102	1.00	Pass
15 MHz	LCH	QPSK	RB1#0	18.16	1.8	19.96	0.099	1.00	Pass
			RB6#0	18.28	1.8	20.08	0.102	1.00	Pass
		16-QAM	RB1#0	18.56	1.8	<b>20.36</b>	0.109	1.00	Pass
			RB5#0	18.25	1.8	20.05	0.101	1.00	Pass
	MCH	QPSK	RB1#0	18.36	1.8	20.16	0.104	1.00	Pass
			RB6#0	18.06	1.8	19.86	0.097	1.00	Pass
		16-QAM	RB1#0	18.11	1.8	19.91	0.098	1.00	Pass
			RB5#0	18.17	1.8	19.97	0.099	1.00	Pass
	HCH	QPSK	RB1#5	18.09	1.8	19.89	0.097	1.00	Pass
			RB6#0	18.08	1.8	19.88	0.097	1.00	Pass
		16-QAM	RB1#5	17.74	1.8	19.54	0.090	1.00	Pass
			RB5#1	18.1	1.8	19.90	0.098	1.00	Pass
20 MHz	LCH	QPSK	RB1#0	18.18	1.8	19.98	0.100	1.00	Pass
			RB6#0	18.26	1.8	20.06	0.101	1.00	Pass
		16-QAM	RB1#0	18.56	1.8	20.36	0.109	1.00	Pass
			RB5#0	18.41	1.8	20.21	0.105	1.00	Pass
	MCH	QPSK	RB1#0	18.40	1.8	20.20	0.105	1.00	Pass
			RB6#0	18.12	1.8	19.92	0.098	1.00	Pass
		16-QAM	RB1#0	18.03	1.8	19.83	0.096	1.00	Pass
			RB5#0	18.13	1.8	19.93	0.098	1.00	Pass
	HCH	QPSK	RB1#5	18.12	1.8	19.92	0.098	1.00	Pass
			RB6#0	18.09	1.8	19.89	0.097	1.00	Pass
		16-QAM	RB1#5	17.77	1.8	19.57	0.091	1.00	Pass
			RB5#1	18.01	1.8	19.81	0.096	1.00	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
<b>LTE-M1 BAND5</b>										
1.4	LCH	QPSK	RB1#0	19.13	2.5	0.35	19.48	0.089	7.00	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
<b>LTE-M1 BAND5</b>										
MHz		16-QAM	RB6#0	17.02	2.5	0.35	17.37	0.055	7.00	Pass
			RB1#0	18.04	2.5	0.35	18.39	0.069	7.00	Pass
			RB5#0	17.16	2.5	0.35	17.51	0.056	7.00	Pass
	MCH	QPSK	RB1#0	19.51	2.5	0.35	<b>19.86</b>	0.097	7.00	Pass
			RB6#0	17.13	2.5	0.35	17.48	0.056	7.00	Pass
		16-QAM	RB1#0	17.62	2.5	0.35	17.97	0.063	7.00	Pass
			RB5#0	17.43	2.5	0.35	17.78	0.060	7.00	Pass
		HCH	RB1#5	19.25	2.5	0.35	19.60	0.091	7.00	Pass
			RB6#0	17.06	2.5	0.35	17.41	0.055	7.00	Pass
			RB1#5	17.37	2.5	0.35	17.72	0.059	7.00	Pass
			RB5#1	17.11	2.5	0.35	17.46	0.056	7.00	Pass
3 MHz	LCH	QPSK	RB1#0	19.04	2.5	0.35	19.39	0.087	7.00	Pass
			RB6#0	16.86	2.5	0.35	17.21	0.053	7.00	Pass
		16-QAM	RB1#0	18.16	2.5	0.35	18.51	0.071	7.00	Pass
			RB5#0	16.97	2.5	0.35	17.32	0.054	7.00	Pass
	MCH	QPSK	RB1#0	19.22	2.5	0.35	19.57	0.091	7.00	Pass
			RB6#0	17.08	2.5	0.35	17.43	0.055	7.00	Pass
		16-QAM	RB1#0	17.72	2.5	0.35	18.07	0.064	7.00	Pass
			RB5#0	17.17	2.5	0.35	17.52	0.056	7.00	Pass
	HCH	QPSK	RB1#5	19.10	2.5	0.35	19.45	0.088	7.00	Pass
			RB6#0	16.94	2.5	0.35	17.29	0.054	7.00	Pass
		16-QAM	RB1#5	18.26	2.5	0.35	18.61	0.073	7.00	Pass
			RB5#1	16.79	2.5	0.35	17.14	0.052	7.00	Pass
5 MHz	LCH	QPSK	RB1#0	18.92	2.5	0.35	19.27	0.085	7.00	Pass
			RB6#0	17.99	2.5	0.35	18.34	0.068	7.00	Pass
		16-QAM	RB1#0	19.21	2.5	0.35	19.56	0.090	7.00	Pass
			RB5#0	17.84	2.5	0.35	18.19	0.066	7.00	Pass
	MCH	QPSK	RB1#0	18.98	2.5	0.35	19.33	0.086	7.00	Pass
			RB6#0	18.21	2.5	0.35	18.56	0.072	7.00	Pass
		16-QAM	RB1#0	19.17	2.5	0.35	19.52	0.090	7.00	Pass
			RB5#0	17.95	2.5	0.35	18.30	0.068	7.00	Pass
	HCH	QPSK	RB1#5	18.83	2.5	0.35	19.18	0.083	7.00	Pass
			RB6#0	18.04	2.5	0.35	18.39	0.069	7.00	Pass
		16-QAM	RB1#5	18.09	2.5	0.35	18.44	0.070	7.00	Pass
			RB5#1	17.75	2.5	0.35	18.10	0.065	7.00	Pass
10 MHz	LCH	QPSK	RB1#0	18.82	2.5	0.35	19.17	0.083	7.00	Pass
			RB4#0	18.90	2.5	0.35	19.25	0.084	7.00	Pass
		16-QAM	RB1#0	18.47	2.5	0.35	18.82	0.076	7.00	Pass
			RB4#0	19.2	2.5	0.35	19.55	0.090	7.00	Pass
	MCH	QPSK	RB1#0	19.21	2.5	0.35	19.56	0.090	7.00	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
<b>LTE-M1 BAND5</b>										
		16-QAM	RB4#0	19.08	2.5	0.35	19.43	0.088	7.00	Pass
			RB1#0	18.34	2.5	0.35	18.69	0.074	7.00	Pass
			RB4#0	19.16	2.5	0.35	19.51	0.089	7.00	Pass
	HCH	QPSK	RB1#5	18.80	2.5	0.35	19.15	0.082	7.00	Pass
			RB4#2	19.06	2.5	0.35	19.41	0.087	7.00	Pass
		16-QAM	RB1#5	18.14	2.5	0.35	18.49	0.071	7.00	Pass
			RB4#2	19.02	2.5	0.35	19.37	0.086	7.00	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
<b>LTE-M1 BAND12</b>										
1.4 MHz	LCH	QPSK	RB1#0	18.35	2.9	0.75	19.10	0.081	3.00	Pass
			RB6#0	16.6	2.9	0.75	17.35	0.054	3.00	Pass
		16-QAM	RB1#0	17.69	2.9	0.75	18.44	0.070	3.00	Pass
			RB5#0	16.52	2.9	0.75	17.27	0.053	3.00	Pass
	MCH	QPSK	RB1#0	18.66	2.9	0.75	19.41	0.087	3.00	Pass
			RB6#0	17.19	2.9	0.75	17.94	0.062	3.00	Pass
		16-QAM	RB1#0	18.04	2.9	0.75	18.79	0.076	3.00	Pass
			RB5#0	17.04	2.9	0.75	17.79	0.060	3.00	Pass
	HCH	QPSK	RB1#5	18.38	2.9	0.75	19.13	0.082	3.00	Pass
			RB6#0	16.97	2.9	0.75	17.72	0.059	3.00	Pass
		16-QAM	RB1#5	17.86	2.9	0.75	18.61	0.073	3.00	Pass
			RB5#1	16.81	2.9	0.75	17.56	0.057	3.00	Pass
3 MHz	LCH	QPSK	RB1#0	18.69	2.9	0.75	19.44	0.088	3.00	Pass
			RB6#0	16.62	2.9	0.75	17.37	0.055	3.00	Pass
		16-QAM	RB1#0	17.63	2.9	0.75	18.38	0.069	3.00	Pass
			RB5#0	16.75	2.9	0.75	17.50	0.056	3.00	Pass
	MCH	QPSK	RB1#0	19.06	2.9	0.75	<b>19.81</b>	0.096	3.00	Pass
			RB6#0	16.97	2.9	0.75	17.72	0.059	3.00	Pass
		16-QAM	RB1#0	18.04	2.9	0.75	18.79	0.076	3.00	Pass
			RB5#0	17.12	2.9	0.75	17.87	0.061	3.00	Pass
	HCH	QPSK	RB1#5	18.86	2.9	0.75	19.61	0.091	3.00	Pass
			RB6#0	16.88	2.9	0.75	17.63	0.058	3.00	Pass
		16-QAM	RB1#5	17.88	2.9	0.75	18.63	0.073	3.00	Pass
			RB5#1	16.89	2.9	0.75	17.64	0.058	3.00	Pass
5 MHz	LCH	QPSK	RB1#0	18.34	2.9	0.75	19.09	0.081	3.00	Pass
			RB6#0	17.56	2.9	0.75	18.31	0.068	3.00	Pass
		16-QAM	RB1#0	18.63	2.9	0.75	19.38	0.087	3.00	Pass
			RB5#0	17.62	2.9	0.75	18.37	0.069	3.00	Pass
	MCH	QPSK	RB1#0	18.56	2.9	0.75	19.31	0.085	3.00	Pass
			RB6#0	17.97	2.9	0.75	18.72	0.074	3.00	Pass
		16-QAM	RB1#0	19.00	2.9	0.75	19.75	0.094	3.00	Pass
			RB5#0	17.95	2.9	0.75	18.70	0.074	3.00	Pass
	HCH	QPSK	RB1#5	18.68	2.9	0.75	19.43	0.088	3.00	Pass
			RB6#0	17.77	2.9	0.75	18.52	0.071	3.00	Pass
		16-QAM	RB1#5	17.91	2.9	0.75	18.66	0.073	3.00	Pass
			RB5#1	17.61	2.9	0.75	18.36	0.069	3.00	Pass
10 MHz	LCH	QPSK	RB1#0	18.62	2.9	0.75	19.37	0.086	3.00	Pass
			RB4#0	18.58	2.9	0.75	19.33	0.086	3.00	Pass
		16-QAM	RB1#0	18.88	2.9	0.75	19.63	0.092	3.00	Pass
			RB4#0	18.41	2.9	0.75	19.16	0.082	3.00	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
<b>LTE-M1 BAND12</b>										
	MCH	QPSK	RB1#0	18.62	2.9	0.75	19.37	0.086	3.00	Pass
			RB4#0	18.72	2.9	0.75	19.47	0.089	3.00	Pass
		16-QAM	RB1#0	18.82	2.9	0.75	19.57	0.091	3.00	Pass
			RB4#0	18.55	2.9	0.75	19.30	0.085	3.00	Pass
	HCH	QPSK	RB1#5	18.72	2.9	0.75	19.47	0.089	3.00	Pass
			RB4#2	18.63	2.9	0.75	19.38	0.087	3.00	Pass
		16-QAM	RB1#5	18.05	2.9	0.75	18.80	0.076	3.00	Pass
			RB4#2	18.68	2.9	0.75	19.43	0.088	3.00	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
<b>LTE-M1 BAND13</b>										
5 MHz	LCH	QPSK	RB1#0	18.79	2.6	0.45	19.24	0.084	3.00	Pass
			RB6#0	18.17	2.6	0.45	18.62	0.073	3.00	Pass
		16-QAM	RB1#0	19.05	2.6	0.45	19.50	0.089	3.00	Pass
			RB5#0	18.29	2.6	0.45	18.74	0.075	3.00	Pass
	MCH	QPSK	RB1#0	18.81	2.6	0.45	19.26	0.084	3.00	Pass
			RB6#0	18.09	2.6	0.45	18.54	0.071	3.00	Pass
		16-QAM	RB1#0	19.10	2.6	0.45	19.55	0.090	3.00	Pass
			RB5#0	18.17	2.6	0.45	18.62	0.073	3.00	Pass
	HCH	QPSK	RB1#5	18.87	2.6	0.45	19.32	0.086	3.00	Pass
			RB6#0	18.24	2.6	0.45	18.69	0.074	3.00	Pass
		16-QAM	RB1#5	19.14	2.6	0.45	<b>19.59</b>	0.091	3.00	Pass
			RB5#1	18.46	2.6	0.45	18.91	0.078	3.00	Pass
10 MHz	MCH	QPSK	RB1#0	18.79	2.6	0.45	19.24	0.084	3.00	Pass
			RB4#0	18.88	2.6	0.45	19.33	0.086	3.00	Pass
		16-QAM	RB1#0	19.03	2.6	0.45	19.48	0.089	3.00	Pass
			RB4#0	18.78	2.6	0.45	19.23	0.084	3.00	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
<b>LTE-M1 BAND26(Part 22)</b>									
1.4 MHz	LCH	QPSK	RB1#0	18.34	2.5	18.69	0.074	7.000	Pass
			RB6#0	16.72	2.5	17.07	0.051	7.000	Pass
		16-QAM	RB1#0	17.95	2.5	18.30	0.068	7.000	Pass
			RB5#0	16.66	2.5	17.01	0.050	7.000	Pass
	MCH	QPSK	RB1#0	18.45	2.5	18.95	0.079	7.000	Pass
			RB6#0	16.77	2.5	18.05	0.064	7.000	Pass
		16-QAM	RB1#0	18.09	2.5	19.21	0.083	7.000	Pass
			RB5#0	16.78	2.5	19.25	0.084	7.000	Pass
	HCH	QPSK	RB1#5	18.41	2.5	18.76	0.075	7.000	Pass
			RB6#0	16.85	2.5	17.20	0.052	7.000	Pass
		16-QAM	RB1#5	18.08	2.5	18.43	0.070	7.000	Pass
			RB5#1	16.68	2.5	17.03	0.050	7.000	Pass
3 MHz	LCH	QPSK	RB1#0	18.59	2.5	18.94	0.078	7.000	Pass
			RB6#0	16.66	2.5	17.01	0.050	7.000	Pass
		16-QAM	RB1#0	17.79	2.5	18.14	0.065	7.000	Pass
			RB5#0	16.64	2.5	16.99	0.050	7.000	Pass
	MCH	QPSK	RB1#0	18.92	2.5	19.27	0.085	7.000	Pass
			RB6#0	16.85	2.5	17.20	0.052	7.000	Pass
		16-QAM	RB1#0	17.48	2.5	17.83	0.061	7.000	Pass
			RB5#0	16.83	2.5	17.18	0.052	7.000	Pass
	HCH	QPSK	RB1#5	18.61	2.5	18.96	0.079	7.000	Pass
			RB6#0	16.78	2.5	17.13	0.052	7.000	Pass
		16-QAM	RB1#5	17.25	2.5	17.60	0.058	7.000	Pass
			RB5#1	16.87	2.5	17.22	0.053	7.000	Pass
5 MHz	LCH	QPSK	RB1#0	18.54	2.5	18.89	0.077	7.000	Pass
			RB6#0	17.56	2.5	17.91	0.062	7.000	Pass
		16-QAM	RB1#0	18.73	2.5	19.08	0.081	7.000	Pass
			RB5#0	17.74	2.5	18.09	0.064	7.000	Pass
	MCH	QPSK	RB1#0	18.59	2.5	18.94	0.078	7.000	Pass
			RB6#0	17.82	2.5	18.17	0.066	7.000	Pass
		16-QAM	RB1#0	18.76	2.5	19.11	0.081	7.000	Pass
			RB5#0	17.99	2.5	18.34	0.068	7.000	Pass
	HCH	QPSK	RB1#5	18.72	2.5	19.07	0.081	7.000	Pass
			RB6#0	17.72	2.5	18.07	0.064	7.000	Pass
		16-QAM	RB1#5	18.72	2.5	19.07	0.081	7.000	Pass
			RB5#1	17.89	2.5	18.24	0.067	7.000	Pass
10 MHz	LCH	QPSK	RB1#0	18.44	2.5	18.79	0.076	7.000	Pass
			RB4#0	18.53	2.5	18.88	0.077	7.000	Pass
		16-QAM	RB1#0	18.76	2.5	19.11	0.081	7.000	Pass
			RB4#0	18.3	2.5	18.65	0.073	7.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
<b>LTE-M1 BAND26(Part 22)</b>									
	MCH	QPSK	RB1#0	18.60	2.5	18.95	0.079	7.000	Pass
			RB4#0	17.70	2.5	18.05	0.064	7.000	Pass
		16-QAM	RB1#0	18.86	2.5	19.21	0.083	7.000	Pass
			RB4#0	18.9	2.5	19.25	0.084	7.000	Pass
	HCH	QPSK	RB1#5	18.37	2.5	18.72	0.074	7.000	Pass
			RB4#2	18.62	2.5	18.97	0.079	7.000	Pass
		16-QAM	RB1#5	18.77	2.5	19.12	0.082	7.000	Pass
			RB4#2	18.48	2.5	18.83	0.076	7.000	Pass
15 MHz	LCH	QPSK	RB1#0	18.51	2.5	18.86	0.077	7.000	Pass
			RB6#0	18.51	2.5	18.86	0.077	7.000	Pass
		16-QAM	RB1#0	18.73	2.5	19.08	0.081	7.000	Pass
			RB5#0	18.82	2.5	19.17	0.083	7.000	Pass
	MCH	QPSK	RB1#0	18.35	2.5	18.70	0.074	7.000	Pass
			RB6#0	18.52	2.5	18.87	0.077	7.000	Pass
		16-QAM	RB1#0	18.68	2.5	19.03	0.080	7.000	Pass
			RB5#0	18.85	2.5	19.20	0.083	7.000	Pass
	HCH	QPSK	RB1#5	18.4	2.5	18.75	0.075	7.000	Pass
			RB6#0	18.64	2.5	18.99	0.079	7.000	Pass
		16-QAM	RB1#5	18.71	2.5	19.06	0.081	7.000	Pass
			RB5#1	19.02	2.5	<b>19.37</b>	0.086	7.000	Pass



Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
<b>LTE-M1 BAND26(Part 90)</b>									
1.4 MHz	LCH	QPSK	RB1#0	18.09	2.5	18.44	0.070	100.00	Pass
			RB6#0	16.43	2.5	16.78	0.048	100.00	Pass
		16-QAM	RB1#0	17.67	2.5	18.02	0.063	100.00	Pass
			RB5#0	16.34	2.5	16.69	0.047	100.00	Pass
	MCH	QPSK	RB1#0	18.60	2.5	18.95	0.079	100.00	Pass
			RB6#0	16.55	2.5	16.90	0.049	100.00	Pass
		16-QAM	RB1#0	16.81	2.5	17.16	0.052	100.00	Pass
			RB5#0	16.40	2.5	16.75	0.047	100.00	Pass
	HCH	QPSK	RB1#5	18.49	2.5	18.84	0.077	100.00	Pass
			RB6#0	16.64	2.5	16.99	0.050	100.00	Pass
		16-QAM	RB1#5	17.55	2.5	17.90	0.062	100.00	Pass
			RB5#1	16.79	2.5	17.14	0.052	100.00	Pass
3 MHz	LCH	QPSK	RB1#0	18.36	2.5	18.71	0.074	100.00	Pass
			RB6#0	16.35	2.5	16.70	0.047	100.00	Pass
		16-QAM	RB1#0	17.01	2.5	17.36	0.054	100.00	Pass
			RB5#0	16.47	2.5	16.82	0.048	100.00	Pass
	MCH	QPSK	RB1#0	18.43	2.5	18.78	0.076	100.00	Pass
			RB6#0	16.46	2.5	16.81	0.048	100.00	Pass
		16-QAM	RB1#0	17.01	2.5	17.36	0.054	100.00	Pass
			RB5#0	16.46	2.5	16.81	0.048	100.00	Pass
	HCH	QPSK	RB1#5	18.41	2.5	18.76	0.075	100.00	Pass
			RB6#0	16.53	2.5	16.88	0.049	100.00	Pass
		16-QAM	RB1#5	17.03	2.5	17.38	0.055	100.00	Pass
			RB5#1	16.55	2.5	16.90	0.049	100.00	Pass
5 MHz	LCH	QPSK	RB1#0	18.36	2.5	18.71	0.074	100.00	Pass
			RB6#0	17.33	2.5	17.68	0.059	100.00	Pass
		16-QAM	RB1#0	18.56	2.5	18.91	0.078	100.00	Pass
			RB5#0	17.52	2.5	17.87	0.061	100.00	Pass
	MCH	QPSK	RB1#0	18.4	2.5	18.75	0.075	100.00	Pass
			RB6#0	17.38	2.5	17.73	0.059	100.00	Pass
		16-QAM	RB1#0	18.7	2.5	19.05	0.080	100.00	Pass
			RB5#0	17.7	2.5	18.05	0.064	100.00	Pass
	HCH	QPSK	RB1#5	18.27	2.5	18.62	0.073	100.00	Pass
			RB6#0	17.51	2.5	17.86	0.061	100.00	Pass
		16-QAM	RB1#5	18.6	2.5	18.95	0.079	100.00	Pass
			RB5#1	17.76	2.5	18.11	0.065	100.00	Pass
10 MHz	MCH	QPSK	RB1#0	18.29	2.5	18.64	0.073	100.00	Pass
			RB4#0	18.26	2.5	18.61	0.073	100.00	Pass
		16-QAM	RB1#0	18.6	2.5	18.95	0.079	100.00	Pass
			RB4#0	18.19	2.5	18.54	0.071	100.00	Pass



Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
<b>LTE-M1 BAND66</b>									
1.4 MHz	LCH	QPSK	RB1#0	18.46	2.4	20.86	0.122	1.00	Pass
			RB6#0	16.30	2.4	18.70	0.074	1.00	Pass
		16-QAM	RB1#0	17.6	2.4	20.00	0.100	1.00	Pass
			RB5#0	16.27	2.4	18.67	0.074	1.00	Pass
	MCH	QPSK	RB1#0	18.13	2.4	20.53	0.113	1.00	Pass
			RB6#0	16.06	2.4	18.46	0.070	1.00	Pass
		16-QAM	RB1#0	17.34	2.4	19.74	0.094	1.00	Pass
			RB5#0	16.05	2.4	18.45	0.070	1.00	Pass
	HCH	QPSK	RB1#5	18.64	2.4	21.04	0.127	1.00	Pass
			RB6#0	16.72	2.4	19.12	0.082	1.00	Pass
		16-QAM	RB1#5	17.73	2.4	20.13	0.103	1.00	Pass
			RB5#1	16.93	2.4	19.33	0.086	1.00	Pass
3 MHz	LCH	QPSK	RB1#0	18.52	2.4	20.92	0.124	1.00	Pass
			RB6#0	16.16	2.4	18.56	0.072	1.00	Pass
		16-QAM	RB1#0	17.6	2.4	20.00	0.100	1.00	Pass
			RB5#0	16.38	2.4	18.78	0.076	1.00	Pass
	MCH	QPSK	RB1#0	18.31	2.4	20.71	0.118	1.00	Pass
			RB6#0	16.06	2.4	18.46	0.070	1.00	Pass
		16-QAM	RB1#0	17.85	2.4	20.25	0.106	1.00	Pass
			RB5#0	16.17	2.4	18.57	0.072	1.00	Pass
	HCH	QPSK	RB1#5	18.61	2.4	21.01	0.126	1.00	Pass
			RB6#0	16.64	2.4	19.04	0.080	1.00	Pass
		16-QAM	RB1#5	17.89	2.4	20.29	0.107	1.00	Pass
			RB5#1	16.45	2.4	18.85	0.077	1.00	Pass
5 MHz	LCH	QPSK	RB1#0	18.54	2.4	20.94	0.124	1.00	Pass
			RB6#0	17.29	2.4	19.69	0.093	1.00	Pass
		16-QAM	RB1#0	18.6	2.4	21.00	0.126	1.00	Pass
			RB5#0	17.51	2.4	19.91	0.098	1.00	Pass
	MCH	QPSK	RB1#0	18.08	2.4	20.48	0.112	1.00	Pass
			RB6#0	17.08	2.4	19.48	0.089	1.00	Pass
		16-QAM	RB1#0	18.37	2.4	20.77	0.119	1.00	Pass
			RB5#0	17.33	2.4	19.73	0.094	1.00	Pass
	HCH	QPSK	RB1#5	18.39	2.4	20.79	0.120	1.00	Pass
			RB6#0	17.74	2.4	20.14	0.103	1.00	Pass
		16-QAM	RB1#5	18.84	2.4	21.24	0.133	1.00	Pass
			RB5#1	18.02	2.4	20.42	0.110	1.00	Pass
10 MHz	LCH	QPSK	RB1#0	18.54	2.4	20.94	0.124	1.00	Pass
			RB4#0	18.38	2.4	20.78	0.120	1.00	Pass
		16-QAM	RB1#0	18.37	2.4	20.77	0.119	1.00	Pass
			RB4#0	18.29	2.4	20.69	0.117	1.00	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
<b>LTE-M1 BAND66</b>									
	MCH	QPSK	RB1#0	18.13	2.4	20.53	0.113	1.00	Pass
			RB4#0	18.1	2.4	20.50	0.112	1.00	Pass
		16-QAM	RB1#0	18.35	2.4	20.75	0.119	1.00	Pass
			RB4#0	18.09	2.4	20.49	0.112	1.00	Pass
	HCH	QPSK	RB1#5	18.5	2.4	20.90	0.123	1.00	Pass
			RB4#2	18.73	2.4	21.13	0.130	1.00	Pass
		16-QAM	RB1#5	18.83	2.4	21.23	0.133	1.00	Pass
			RB5#2	18.55	2.4	20.95	0.124	1.00	Pass
15 MHz	LCH	QPSK	RB1#0	18.31	2.4	20.71	0.118	1.00	Pass
			RB6#0	18.3	2.4	20.70	0.117	1.00	Pass
		16-QAM	RB1#0	18.75	2.4	21.15	0.130	1.00	Pass
			RB5#0	18.58	2.4	20.98	0.125	1.00	Pass
	MCH	QPSK	RB1#0	18.1	2.4	20.50	0.112	1.00	Pass
			RB6#0	18.08	2.4	20.48	0.112	1.00	Pass
		16-QAM	RB1#0	18.38	2.4	20.78	0.120	1.00	Pass
			RB5#0	18.31	2.4	20.71	0.118	1.00	Pass
	HCH	QPSK	RB1#5	18.49	2.4	20.89	0.123	1.00	Pass
			RB6#0	18.67	2.4	21.07	0.128	1.00	Pass
		16-QAM	RB1#5	18.78	2.4	21.18	0.131	1.00	Pass
			RB5#1	18.98	2.4	21.38	0.137	1.00	Pass
20 MHz	LCH	QPSK	RB1#0	18.4	2.4	20.80	0.120	1.00	Pass
			RB6#0	18.26	2.4	20.66	0.116	1.00	Pass
		16-QAM	RB1#0	18.68	2.4	21.08	0.128	1.00	Pass
			RB5#0	18.5	2.4	20.90	0.123	1.00	Pass
	MCH	QPSK	RB1#0	18.08	2.4	20.48	0.112	1.00	Pass
			RB6#0	18	2.4	20.40	0.110	1.00	Pass
		16-QAM	RB1#0	18.44	2.4	20.84	0.121	1.00	Pass
			RB5#0	18.27	2.4	20.67	0.117	1.00	Pass
	HCH	QPSK	RB1#5	17.75	2.4	20.15	0.104	1.00	Pass
			RB6#0	18.74	2.4	21.14	0.130	1.00	Pass
		16-QAM	RB1#5	18.04	2.4	20.44	0.111	1.00	Pass
			RB5#1	19.12	2.4	<b>21.52</b>	0.142	1.00	Pass

## NB-IoT Mode Test Data

Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
NB-IoT BAND2									
3.75kHz	LCH	QPSK	RB1#0	18.01	2	20.01	0.100	2.00	Pass
			RB1#47	17.94	2	19.94	0.099	2.00	Pass
		BPSK	RB1#0	17.97	2	19.97	0.099	2.00	Pass
			RB1#47	17.97	2	19.97	0.099	2.00	Pass
	MCH	QPSK	RB1#0	18.03	2	20.03	0.101	2.00	Pass
			RB1#47	17.93	2	19.93	0.098	2.00	Pass
		BPSK	RB1#0	17.97	2	19.97	0.099	2.00	Pass
			RB1#47	17.88	2	19.88	0.097	2.00	Pass
	HCH	QPSK	RB1#0	18.19	2	20.19	0.104	2.00	Pass
			RB1#47	18.17	2	20.17	0.104	2.00	Pass
		BPSK	RB1#0	18.14	2	20.14	0.103	2.00	Pass
			RB1#47	18.20	2	20.20	0.105	2.00	Pass
15kHz	LCH	QPSK	RB1#0	18.01	2	20.01	0.100	2.00	Pass
			RB1#11	18.15	2	20.15	0.104	2.00	Pass
			RB12#0	16.26	2	18.26	0.067	2.00	Pass
		BPSK	RB1#0	17.95	2	19.95	0.099	2.00	Pass
			RB1#11	18.07	2	20.07	0.102	2.00	Pass
	MCH	QPSK	RB1#0	18.01	2	20.01	0.100	2.00	Pass
			RB1#11	17.98	2	19.98	0.100	2.00	Pass
			RB12#0	16.24	2	18.24	0.067	2.00	Pass
		BPSK	RB1#0	17.86	2	19.86	0.097	2.00	Pass
			RB1#11	17.86	2	19.86	0.097	2.00	Pass
	HCH	QPSK	RB1#0	18.16	2	20.16	0.104	2.00	Pass
			RB1#11	18.05	2	20.05	0.101	2.00	Pass
			RB12#0	16.28	2	18.28	0.067	2.00	Pass
		BPSK	RB1#0	18.03	2	20.03	0.101	2.00	Pass
			RB1#11	17.97	2	19.97	0.099	2.00	Pass

Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
<b>NB-IoT BAND4</b>									
3.75kHz	LCH	QPSK	RB1#0	18.36	1.8	20.16	0.104	1.00	Pass
			RB1#47	18.27	1.8	20.07	0.102	1.00	Pass
		BPSK	RB1#0	18.31	1.8	20.11	0.103	1.00	Pass
			RB1#47	18.3	1.8	20.10	0.102	1.00	Pass
	MCH	QPSK	RB1#0	18.09	1.8	19.89	0.097	1.00	Pass
			RB1#47	18.05	1.8	19.85	0.097	1.00	Pass
		BPSK	RB1#0	18.06	1.8	19.86	0.097	1.00	Pass
			RB1#47	17.95	1.8	19.75	0.094	1.00	Pass
	HCH	QPSK	RB1#0	18.07	1.8	19.87	0.097	1.00	Pass
			RB1#47	17.93	1.8	19.73	0.094	1.00	Pass
		BPSK	RB1#0	17.97	1.8	19.77	0.095	1.00	Pass
			RB1#47	17.95	1.8	19.75	0.094	1.00	Pass
15kHz	LCH	QPSK	RB1#0	18.46	1.8	<b>20.26</b>	0.106	1.00	Pass
			RB1#11	18.36	1.8	20.16	0.104	1.00	Pass
			RB12#0	16.41	1.8	18.21	0.066	1.00	Pass
		BPSK	RB1#0	18.27	1.8	20.07	0.102	1.00	Pass
			RB1#11	18.21	1.8	20.01	0.100	1.00	Pass
	MCH	QPSK	RB1#0	18.02	1.8	19.82	0.096	1.00	Pass
			RB1#11	17.89	1.8	19.69	0.093	1.00	Pass
			RB12#0	16.04	1.8	17.84	0.061	1.00	Pass
		BPSK	RB1#0	17.86	1.8	19.66	0.092	1.00	Pass
			RB1#11	17.82	1.8	19.62	0.092	1.00	Pass
	HCH	QPSK	RB1#0	17.98	1.8	19.78	0.095	1.00	Pass
			RB1#11	17.84	1.8	19.64	0.092	1.00	Pass
			RB12#0	16.05	1.8	17.85	0.061	1.00	Pass
		BPSK	RB1#0	17.82	1.8	19.62	0.092	1.00	Pass
			RB1#11	17.79	1.8	19.59	0.091	1.00	Pass

Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
<b>NB-IoT BAND5</b>										
3.75kHz	LCH	QPSK	RB1#0	18.75	2.5	0.35	19.10	0.081	7.000	Pass
			RB1#47	18.68	2.5	0.35	19.03	0.080	7.000	Pass
		BPSK	RB1#0	18.76	2.5	0.35	19.11	0.081	7.000	Pass
			RB1#47	18.61	2.5	0.35	18.96	0.079	7.000	Pass
	MCH	QPSK	RB1#0	18.71	2.5	0.35	19.06	0.081	7.000	Pass
			RB1#47	18.62	2.5	0.35	18.97	0.079	7.000	Pass
		BPSK	RB1#0	18.67	2.5	0.35	19.02	0.080	7.000	Pass
			RB1#47	18.65	2.5	0.35	19.00	0.079	7.000	Pass
	HCH	QPSK	RB1#0	18.73	2.5	0.35	19.08	0.081	7.000	Pass
			RB1#47	18.74	2.5	0.35	19.09	0.081	7.000	Pass
		BPSK	RB1#0	18.76	2.5	0.35	19.11	0.081	7.000	Pass
			RB1#47	18.69	2.5	0.35	19.04	0.080	7.000	Pass
15kHz	LCH	QPSK	RB1#0	18.96	2.5	0.35	19.31	0.085	7.000	Pass
			RB1#11	18.8	2.5	0.35	19.15	0.082	7.000	Pass
			RB12#0	16.91	2.5	0.35	17.26	0.053	7.000	Pass
		BPSK	RB1#0	18.78	2.5	0.35	19.13	0.082	7.000	Pass
			RB1#11	18.7	2.5	0.35	19.05	0.080	7.000	Pass
	MCH	QPSK	RB1#0	18.86	2.5	0.35	19.21	0.083	7.000	Pass
			RB1#11	18.79	2.5	0.35	19.14	0.082	7.000	Pass
			RB12#0	16.81	2.5	0.35	17.16	0.052	7.000	Pass
		BPSK	RB1#0	18.8	2.5	0.35	19.15	0.082	7.000	Pass
			RB1#11	18.71	2.5	0.35	19.06	0.081	7.000	Pass
	HCH	QPSK	RB1#0	19.05	2.5	0.35	<b>19.40</b>	0.087	7.000	Pass
			RB1#11	18.97	2.5	0.35	19.32	0.086	7.000	Pass
			RB12#0	17.08	2.5	0.35	17.43	0.055	7.000	Pass
		BPSK	RB1#0	18.88	2.5	0.35	19.23	0.084	7.000	Pass
			RB1#11	18.80	2.5	0.35	19.15	0.082	7.000	Pass

Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
<b>NB-IoT BAND12</b>										
3.75kHz	LCH	QPSK	RB1#0	18.31	2.9	0.75	19.06	0.081	3.00	Pass
			RB1#47	18.26	2.9	0.75	19.01	0.080	3.00	Pass
		BPSK	RB1#0	18.33	2.9	0.75	19.08	0.081	3.00	Pass
			RB1#47	18.21	2.9	0.75	18.96	0.079	3.00	Pass
	MCH	QPSK	RB1#0	18.48	2.9	0.75	19.23	0.084	3.00	Pass
			RB1#47	18.45	2.9	0.75	19.20	0.083	3.00	Pass
		BPSK	RB1#0	18.44	2.9	0.75	19.19	0.083	3.00	Pass
			RB1#47	18.41	2.9	0.75	19.16	0.082	3.00	Pass
	HCH	QPSK	RB1#0	18.09	2.9	0.75	18.84	0.077	3.00	Pass
			RB1#47	18.09	2.9	0.75	18.84	0.077	3.00	Pass
		BPSK	RB1#0	18.12	2.9	0.75	18.87	0.077	3.00	Pass
			RB1#47	18.06	2.9	0.75	18.81	0.076	3.00	Pass
15kHz	LCH	QPSK	RB1#0	18.36	2.9	0.75	19.11	0.081	3.00	Pass
			RB1#11	18.3	2.9	0.75	19.05	0.080	3.00	Pass
			RB12#0	16.11	2.9	0.75	16.86	0.049	3.00	Pass
		BPSK	RB1#0	18.32	2.9	0.75	19.07	0.081	3.00	Pass
			RB1#11	18.28	2.9	0.75	19.03	0.080	3.00	Pass
	MCH	QPSK	RB1#0	18.6	2.9	0.75	<b>19.35</b>	0.086	3.00	Pass
			RB1#11	18.48	2.9	0.75	19.23	0.084	3.00	Pass
			RB12#0	16.4	2.9	0.75	17.15	0.052	3.00	Pass
		BPSK	RB1#0	18.49	2.9	0.75	19.24	0.084	3.00	Pass
			RB1#11	18.38	2.9	0.75	19.13	0.082	3.00	Pass
	HCH	QPSK	RB1#0	18.14	2.9	0.75	18.89	0.077	3.00	Pass
			RB1#11	18.06	2.9	0.75	18.81	0.076	3.00	Pass
			RB12#0	15.98	2.9	0.75	16.73	0.047	3.00	Pass
		BPSK	RB1#0	18.1	2.9	0.75	18.85	0.077	3.00	Pass
			RB1#11	18.03	2.9	0.75	18.78	0.076	3.00	Pass



Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
<b>NB-IoT BAND13</b>										
3.75kHz	LCH	QPSK	RB1#0	18.76	2.6	0.45	19.21	0.083	3.00	Pass
			RB1#47	18.7	2.6	0.45	19.15	0.082	3.00	Pass
		BPSK	RB1#0	18.74	2.6	0.45	19.19	0.083	3.00	Pass
			RB1#47	18.68	2.6	0.45	19.13	0.082	3.00	Pass
	MCH	QPSK	RB1#0	18.73	2.6	0.45	19.18	0.083	3.00	Pass
			RB1#47	18.68	2.6	0.45	19.13	0.082	3.00	Pass
		BPSK	RB1#0	18.71	2.6	0.45	19.16	0.082	3.00	Pass
			RB1#47	18.65	2.6	0.45	19.10	0.081	3.00	Pass
	HCH	QPSK	RB1#0	18.87	2.6	0.45	19.32	0.086	3.00	Pass
			RB1#47	18.77	2.6	0.45	19.22	0.084	3.00	Pass
		BPSK	RB1#0	18.85	2.6	0.45	19.30	0.085	3.00	Pass
			RB1#47	18.75	2.6	0.45	19.20	0.083	3.00	Pass
15kHz	LCH	QPSK	RB1#0	19.04	2.6	0.45	<b>19.49</b>	0.089	3.00	Pass
			RB1#11	18.96	2.6	0.45	19.41	0.087	3.00	Pass
			RB12#0	16.97	2.6	0.45	17.42	0.055	3.00	Pass
		BPSK	RB1#0	18.88	2.6	0.45	19.33	0.086	3.00	Pass
			RB1#11	18.86	2.6	0.45	19.31	0.085	3.00	Pass
	MCH	QPSK	RB1#0	18.87	2.6	0.45	19.32	0.086	3.00	Pass
			RB1#11	18.66	2.6	0.45	19.11	0.081	3.00	Pass
			RB12#0	16.74	2.6	0.45	17.19	0.052	3.00	Pass
		BPSK	RB1#0	18.67	2.6	0.45	19.12	0.082	3.00	Pass
			RB1#11	18.67	2.6	0.45	19.12	0.082	3.00	Pass
	HCH	QPSK	RB1#0	18.96	2.6	0.45	19.41	0.087	3.00	Pass
			RB1#11	18.84	2.6	0.45	19.29	0.085	3.00	Pass
			RB12#0	16.87	2.6	0.45	17.32	0.054	3.00	Pass
		BPSK	RB1#0	18.78	2.6	0.45	19.23	0.084	3.00	Pass
			RB1#11	18.74	2.6	0.45	19.19	0.083	3.00	Pass

Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
<b>NB-IoT BAND66</b>									
3.75kHz	LCH	QPSK	RB1#0	18.33	2.4	20.73	0.118	1.00	Pass
			RB1#47	18.21	2.4	20.61	0.115	1.00	Pass
		BPSK	RB1#0	18.18	2.4	20.58	0.114	1.00	Pass
			RB1#47	18.16	2.4	20.56	0.114	1.00	Pass
	MCH	QPSK	RB1#0	17.98	2.4	20.38	0.109	1.00	Pass
			RB1#47	17.91	2.4	20.31	0.107	1.00	Pass
		BPSK	RB1#0	17.9	2.4	20.30	0.107	1.00	Pass
			RB1#47	17.79	2.4	20.19	0.104	1.00	Pass
	HCH	QPSK	RB1#0	18.04	2.4	20.44	0.111	1.00	Pass
			RB1#47	17.92	2.4	20.32	0.108	1.00	Pass
		BPSK	RB1#0	18.02	2.4	20.42	0.110	1.00	Pass
			RB1#47	17.97	2.4	20.37	0.109	1.00	Pass
15kHz	LCH	QPSK	RB1#0	18.37	2.4	<b>20.77</b>	0.119	1.00	Pass
			RB1#11	18.29	2.4	20.69	0.117	1.00	Pass
			RB12#0	16.46	2.4	18.86	0.077	1.00	Pass
		BPSK	RB1#0	18.23	2.4	20.63	0.116	1.00	Pass
			RB1#11	18.21	2.4	20.61	0.115	1.00	Pass
	MCH	QPSK	RB1#0	17.96	2.4	20.36	0.109	1.00	Pass
			RB1#11	17.85	2.4	20.25	0.106	1.00	Pass
			RB12#0	16.22	2.4	18.62	0.073	1.00	Pass
		BPSK	RB1#0	17.83	2.4	20.23	0.105	1.00	Pass
			RB1#11	17.82	2.4	20.22	0.105	1.00	Pass
	HCH	QPSK	RB1#0	18.21	2.4	20.61	0.115	1.00	Pass
			RB1#11	18.19	2.4	20.59	0.115	1.00	Pass
			RB12#0	16.3	2.4	18.70	0.074	1.00	Pass
		BPSK	RB1#0	18.13	2.4	20.53	0.113	1.00	Pass
			RB1#11	18.02	2.4	20.42	0.110	1.00	Pass

## A.2 Peak to Average Ratio

Note 1: LTE-M1&NB-IoT please refer to the report No. R1907A0446-R1V1 & No. R1907A0446-R2 & No. R1907A0446-R4 & No. R1907A0446-R5 & No. R1907A0446-R7 & No. R1907A0446-R8 & No. R1907A0446-R3V1& No. R1907A0446-R6V2 issued by Quectel Wireless Solutions Co., Ltd.

Note 2: Test plots please refer to the document “Annex No.:BL-SZ2160023-501 Data Part 1.pdf”.

### GSM Mode Test Data

Test Band	Test Channel	Peak to Average Ratio (dB)	Limit (dB)	Refer to Plot <sup>Note2</sup>	Verdict
GSM850	LCH	0.281	13	1.1	Pass
	MCH	0.328	13	1.2	Pass
	HCH	0.281	13	1.3	Pass
GSM1900	LCH	0.328	13	2.1	Pass
	MCH	0.281	13	2.2	Pass
	HCH	0.328	13	2.3	Pass
EGPRS 850	LCH	3.234	13	3.1	Pass
	MCH	3.375	13	3.3	Pass
	HCH	3.422	13	3.4	Pass
EGPRS 1900	LCH	3.563	13	4.1	Pass
	MCH	3.516	13	4.2	Pass
	HCH	3.563	13	4.3	Pass

### A.3 Occupied Bandwidth

Note: Please refer to the report No. R1907A0446-R1V1 & No. R1907A0446-R2 & No. R1907A0446-R4 & No. R1907A0446-R5 & No. R1907A0446-R7 & No. R1907A0446-R8 & No. R1907A0446-R3V1& No. R1907A0446-R6V2 issued by Quectel Wireless Solutions Co., Ltd.

### A.4 Frequency Stability

Note: Please refer to the report No. R1907A0446-R1V1 & No. R1907A0446-R2 & No. R1907A0446-R4 & No. R1907A0446-R5 & No. R1907A0446-R7 & No. R1907A0446-R8 & No. R1907A0446-R3V1& No. R1907A0446-R6V2 issued by Quectel Wireless Solutions Co., Ltd.

### A.5 Spurious Emission at Antenna Terminals

Note: Please refer to the report No. R1907A0446-R1V1 & No. R1907A0446-R2 & No. R1907A0446-R4 & No. R1907A0446-R5 & No. R1907A0446-R7 & No. R1907A0446-R8 & No. R1907A0446-R3V1& No. R1907A0446-R6V2 issued by Quectel Wireless Solutions Co., Ltd.

### A.6 Band Edge

Note: Please refer to the report No. R1907A0446-R1V1 & No. R1907A0446-R2 & No. R1907A0446-R4 & No. R1907A0446-R5 & No. R1907A0446-R7 & No. R1907A0446-R8 & No. R1907A0446-R3V1& No. R1907A0446-R6V2 issued by Quectel Wireless Solutions Co., Ltd.

## A.7 Field Strength of Spurious Radiation

Note 1: GSM and EGPRS modes have been verified, only the worst data with different transmit bandwidth for LTE are shown here.

Note 2: The frequencies of verdict which are marked by "N/A" should be ignored because they are UE carrier frequency.

Note 3: Test plots please refer to the document "Annex No.: BL-EC2160023-501 Data Part 2.pdf".

### GSM Test Verdict

Test Band	Test Channel	Refer to Plot <sup>Note3</sup>	Verdict
GSM 850	LCH	1.1	Pass
	MCH	1.2	Pass
	HCH	1.3	Pass
GSM 1900	LCH	2.1	Pass
	MCH	2.2	Pass
	HCH	2.3	Pass
EGPRS 850	LCH	3.1	Pass
	MCH	3.2	Pass
	HCH	3.3	Pass
EGPRS 1900	LCH	4.1	Pass
	MCH	4.2	Pass
	HCH	4.3	Pass

### LTE-M1 Mode Test Data

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Refer to Plot <sup>Note3</sup>	Verdict
LTE-M1 Band 2	1.4 MHz	MCH	QPSK	RB1#0	5.1	Pass
	3 MHz	MCH	QPSK	RB1#0	5.2	Pass
	5 MHz	MCH	QPSK	RB1#0	5.3	Pass
	10 MHz	MCH	QPSK	RB1#0	5.4	Pass
	15 MHz	MCH	QPSK	RB1#0	5.5	Pass
	20 MHz	MCH	QPSK	RB1#0	5.6	Pass
LTE-M1 Band 4	1.4 MHz	MCH	QPSK	RB1#0	6.1	Pass
	3 MHz	MCH	QPSK	RB1#0	6.2	Pass
	5 MHz	MCH	QPSK	RB1#0	6.3	Pass
	10 MHz	MCH	QPSK	RB1#0	6.4	Pass
	15 MHz	MCH	QPSK	RB1#0	6.5	Pass
	20 MHz	MCH	QPSK	RB1#0	6.6	Pass
LTE-M1 Band 5	1.4 MHz	MCH	QPSK	RB1#0	7.1	Pass
	3 MHz	MCH	QPSK	RB1#0	7.2	Pass
	5 MHz	MCH	QPSK	RB1#0	7.3	Pass
	10 MHz	MCH	QPSK	RB1#0	7.4	Pass
LTE-M1 Band 12	1.4 MHz	MCH	QPSK	RB1#0	8.1	Pass
	3 MHz	MCH	QPSK	RB1#0	8.2	Pass
	5 MHz	MCH	QPSK	RB1#0	8.3	Pass
	10 MHz	MCH	QPSK	RB1#0	8.4	Pass
LTE-M1 Band 13	5 MHz	MCH	QPSK	RB1#0	9.1	Pass
	10 MHz	MCH	QPSK	RB1#0	9.2	Pass
LTE-M1 Band 26 (Part90)	1.4 MHz	MCH	QPSK	RB1#0	10.1	Pass
	3 MHz	MCH	QPSK	RB1#0	10.2	Pass
	5 MHz	MCH	QPSK	RB1#0	10.3	Pass
	10 MHz	MCH	QPSK	RB1#0	10.4	Pass
LTE-M1 Band 26 (Part22)	1.4 MHz	MCH	QPSK	RB1#0	11.1	Pass
	3 MHz	MCH	QPSK	RB1#0	11.2	Pass
	5 MHz	MCH	QPSK	RB1#0	11.3	Pass
	10 MHz	MCH	QPSK	RB1#0	11.4	Pass
	15 MHz	MCH	QPSK	RB1#0	11.5	Pass
LTE-M1 Band 66	1.4 MHz	MCH	QPSK	RB1#0	12.1	Pass
	3 MHz	MCH	QPSK	RB1#0	12.2	Pass
	5 MHz	MCH	QPSK	RB1#0	12.3	Pass
	10 MHz	MCH	QPSK	RB1#0	12.4	Pass
	15 MHz	MCH	QPSK	RB1#0	12.5	Pass
	20 MHz	MCH	QPSK	RB1#0	12.6	Pass

### NB-IoT Mode Test Data

Test Band	Test Sub-carrier spacing	Test Channel	Test Mode	Test RB (Size#Offset)	Refer to Plot <sup>Note3</sup>	Verdict
NB-IoT Band 2	3.75kHz	MCH	QPSK	RB1#0	13.1	Pass
			BPSK	RB1#0	13.2	Pass
	15kHz	MCH	QPSK	RB1#0	13.3	Pass
			BPSK	RB1#0	13.4	Pass
NB-IoT Band 4	3.75kHz	MCH	QPSK	RB1#0	14.1	Pass
			BPSK	RB1#0	14.2	Pass
	15kHz	MCH	QPSK	RB1#0	14.3	Pass
			BPSK	RB1#0	14.4	Pass
NB-IoT Band 5	3.75kHz	MCH	QPSK	RB1#0	15.1	Pass
			BPSK	RB1#0	15.2	Pass
	15kHz	MCH	QPSK	RB1#0	15.3	Pass
			BPSK	RB1#0	15.4	Pass
NB-IoT Band 12	3.75kHz	MCH	QPSK	RB1#0	16.1	Pass
			BPSK	RB1#0	16.2	Pass
	15kHz	MCH	QPSK	RB1#0	16.3	Pass
			BPSK	RB1#0	16.4	Pass
NB-IoT Band 13	3.75kHz	MCH	QPSK	RB1#0	17.1	Pass
			BPSK	RB1#0	17.2	Pass
	15kHz	MCH	QPSK	RB1#0	17.3	Pass
			BPSK	RB1#0	17.4	Pass
NB-IoT Band 66	3.75kHz	MCH	QPSK	RB1#0	18.1	Pass
			BPSK	RB1#0	18.2	Pass
	15kHz	MCH	QPSK	RB1#0	18.3	Pass
			BPSK	RB1#0	18.4	Pass

## **ANNEX B TEST SETUP PHOTOS**

Please refer to the document "BL-SZ2160023-AR.PDF".

## **ANNEX C EUT EXTERNAL PHOTOS**

Please refer to the document "BL-SZ2160023-AW.PDF".

## **ANNEX D EUT INTERNAL PHOTOS**

Please refer to the document "BL-SZ2160023-AI.PDF".

--END OF REPORT--