

S

T

S

L

A

B



FCC Part 15B TEST REPORT

Report No: STS1806067E01

Issued for

SOURCENEXT CORPORATION

Shiodome City Center 33F, 1-5-2 Higashi Shinbashi
Minato-ku, Tokyo 105-7133, Japan

Product Name:	POCKETALK
Brand Name:	POCKETALK
Model Name:	W1PGK
Series Model:	W1PGG, W1PGW, W1PWG, W1PWK, W1PWW
FCC ID:	2AOJA-W1P
Test Standard:	FCC Part 15B

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.
1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail: sts@stsapp.com



**TEST RESULT CERTIFICATION****Applicant's Name**: SOURCENEXT CORPORATIONAddress.....: Shiodome City Center 33F, 1-5-2 Higashi Shinbashi Minato-ku,
Tokyo 105-7133, Japan**Manufacture's Name**: JENESIS(SHENZHEN)CO.,LTDAddress.....: 3F,Building A,Dajiahao Plaza,Yuan 2nd Road 362,Baoan 28th
district,Shenzhen, China**Product Description**

Product Name: POCKETALK

Brand Name.....: POCKETALK

Model Name: W1PGK

Series Model W1PGG, W1PGW, W1PWG, W1PWK, W1PWW

Standards.....: FCC Part 15B

Test procedure ANSI C63.4-2014

This device described above has been tested by STS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test.....

Date of Performance of Tests 21 July. 2018~26 July. 2018

Date of Issue 27 July. 2018

Test Result **Pass**

Testing Engineer :

Barry Li

(Barry Li)

Technical Manager :

Chopin. Xiao

(Chopin Xiao)

Authorized Signatory :

Vita Li


(Vita Li)





Table of Contents

1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	5
1.2 MEASUREMENT UNCERTAINTY	5
2. GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	7
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.4 DESCRIPTION OF SUPPORT UNITS	9
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
3. EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.2 RADIATED EMISSION MEASUREMENT	15

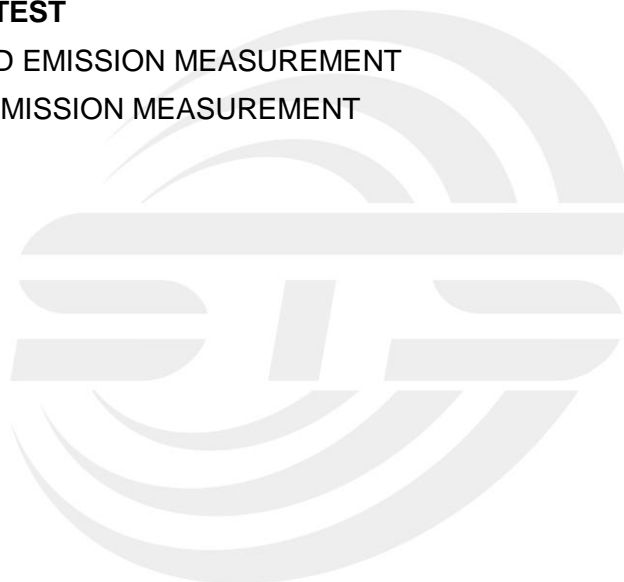

**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	27 July. 2018	STS1806067E01	ALL	Initial Issue





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

EMISSION			
Standard	Item	Result	Remarks
FCC 47 CFR Part 15 Subpart B	Conducted Emission	PASS	Meet Class B limit
	Radiated Emission	PASS	Meet Class B limit

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACTORY

Company Name:	Shenzhen STS Test Services Co. Ltd.
Address:	1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road, Fuyong Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	+86-755 3688 6288
Fax:	+86-755 3688 6277
Registration No.:	CNAS Registration No.: L7649; FCC Registration No.: 625569
	IC Registration No.: 12108A; A2LA Certificate No.: 4338.01;

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	$\pm 2.88\text{dB}$
2	Conducted Emission (150KHz-30MHz)	$\pm 2.67\text{dB}$
3	All emissions, radiated(<30M) (9KHz-30MHz)	$\pm 2.45\text{dB}$
4	All emissions, radiated(<1G) 30MHz-200MHz	$\pm 3.73\text{dB}$
5	All emissions, radiated(<1G) 200MHz-1000MHz	$\pm 3.92\text{dB}$
6	All emissions, radiated(>1G)	$\pm 3.31\text{dB}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name	POCKETALK	
Brand Name	POCKETALK	
Model Name	W1PGK	
Series Model	W1PGG, W1PGW, W1PWG, W1PWK, W1PWW	
Model Difference	The structure of the circuit is the same, only the name of the model is different	
Frequency Bands	WCDMA	Band II: 1852.4~1907.6MHz Band V: 826.4~846.6MHz
	LTE	Band 2: 1850.7~1909.3MHz
	WLAN	2.4GHz IEEE 802.11b/g/n(HT20):2412~2462MHz 2.4GHz IEEE 802.11n(HT40):2422~2452MHz 5GHz IEEE 802.11a (20MHz): 5180 MHz to 5240 MHz
	Bluetooth	2402~2480MHz
Modulation Mode	WCDMA	QPSK; HSDPA:QPSK/16QAM
	LTE	QPSK, 16QAM
	WLAN	2.4GHz: 802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM 5GHz: DBPSK/DAPSK/16QAM/64QAM/256QAM
	Bluetooth	BT(1Mbps): GFSK BT EDR(2Mbps): $\pi/4$ -DQPSK BT EDR(3Mbps): 8DPSK
Battery	Rated Voltage: 3.7V Capacity: 2200mAh Charge Limit: 4.2V	
Hardware Version Number	PT2_MB_V1.0	
Software Version Number	0.2.8P	

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Description
Mode 1	USB port communication with PC

For Conducted Test	
Final Test Mode	Description
Mode 1	USB port communication with PC

For Radiated Test	
Final Test Mode	Description
Mode 1	USB port communication with PC

NOTE: The test modes were carried out for all operation modes. Only worst case will be shown in this report.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

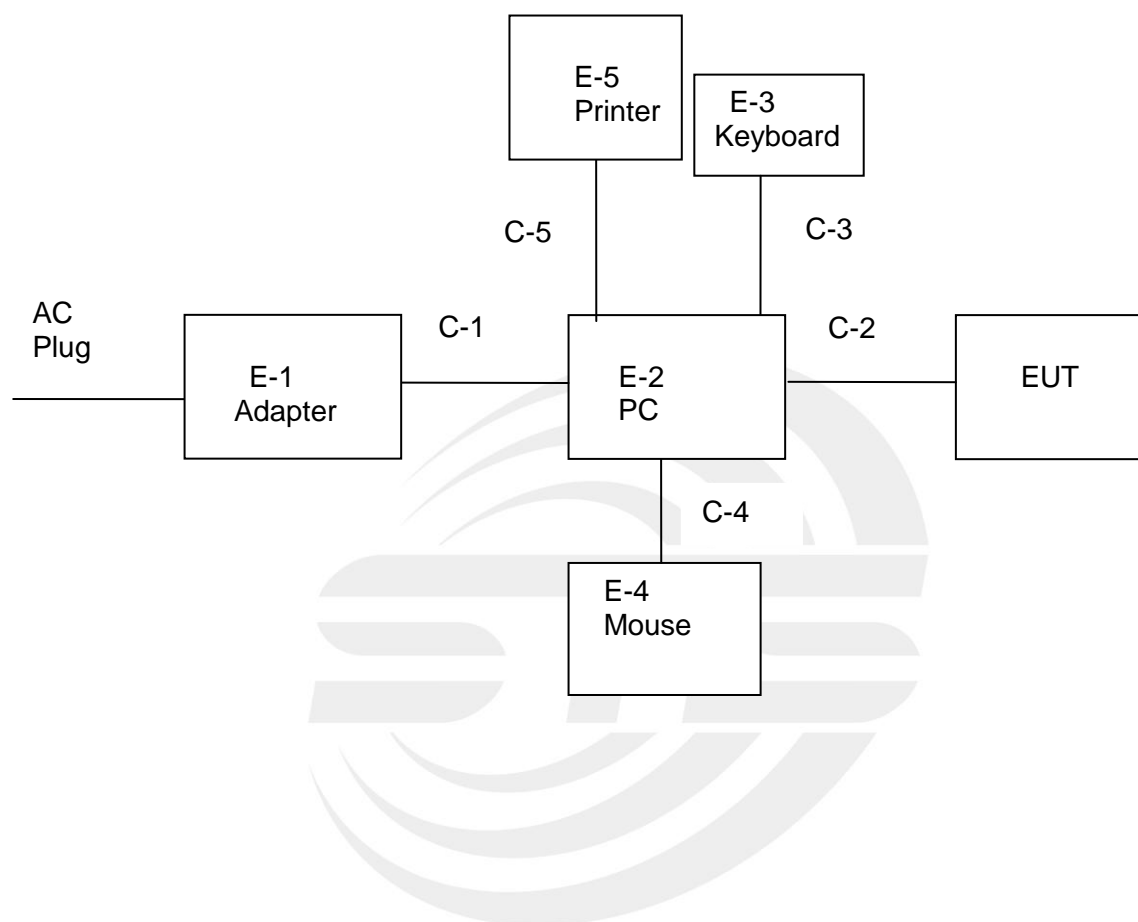



2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.
E-1	Adapter	HP	HSTNN-CA15
E-2	PC	HP	500-320cx
E-3	Keyboard	HP	PR1101U
E-4	Mouse	MOTOSPEED	F66
E-5	Printer	HP	HP1020

Item	Shielded Type	Ferrite Core	Length
C-1	Unshielded	NO	95cm
C-2	USB Cable (FTP)	NO	100cm
C-3	USB Cable (FTP)	NO	105cm
C-4	USB Cable (FTP)	NO	110cm
C-5	USB Cable (FTP)	NO	115cm

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.
- (4) PC is the FCC DOC is approved.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
EMI Test Receiver	R&S	ESCI	102086	2017.10.15	2018.10.14
Bilog Antenna	TESEQ	CBL6111D	34678	2017.11.02	2018.11.01
Horn Antenna	SCHWARZBECK	BBHA 9120D	1343	2017.10.27	2018.10.26
Spectrum Analyzer	Agilent	E4407B	MY50140340	2018.03.08	2019.03.07
Pre-mpplier(1G-18 G)	Agilent	8449B	60538	2017.10.27	2018.10.26
Spectrum Analyzer	Agilent	N9020A	MY49100060	2018.03.08	2019.03.07
Pre-mpplier(0.1M-3 GHz)	EM	EM330	--	2018.03.11	2019.03.10

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
EMI Test Receiver	R&S	ESPI	102086	2017.10.15	2018.10.14
LISN	R&S	ENV216	101242	2017.10.15	2018.10.14
LISN	EMCO	3810/2NM	23625	2017.10.15	2018.10.14
Absorbing Clamp	R&S	MDS-21	100668	2017.10.19	2018.10.18



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Conducted Emission Limits (dBuV)			
	Class A		Class B	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

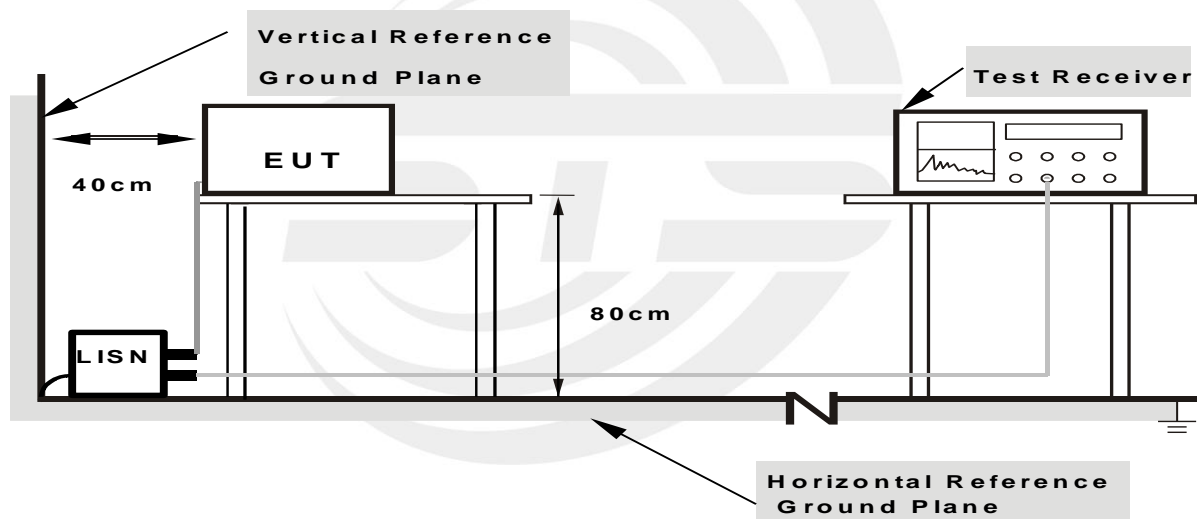

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.6 TEST RESULTS


Temperature:	24 °C	Relative Humidity:	62.5%
Phase:	L	Test Mode:	Mode 1
Test Voltage:	DC 5V From PC		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	45.28	9.79	55.07	66.00	-10.93	QP
2	0.1500	23.51	9.79	33.30	56.00	-22.70	AVG
3	0.1700	41.51	9.79	51.30	64.96	-13.66	QP
4	0.1700	22.76	9.79	32.55	54.96	-22.41	AVG
5	0.2744	28.99	10.11	39.10	60.98	-21.88	QP
6	0.2744	15.91	10.11	26.02	50.98	-24.96	AVG
7	0.4820	27.93	10.03	37.96	56.30	-18.34	QP
8	0.4820	18.40	10.03	28.43	46.30	-17.87	AVG
9	1.3660	22.59	9.79	32.38	56.00	-23.62	QP
10	1.3660	15.03	9.79	24.82	46.00	-21.18	AVG
11	15.1180	21.09	10.24	31.33	60.00	-28.67	QP
12	15.1180	10.14	10.24	20.38	50.00	-29.62	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = Cable Loss + Antenna Factor - Amplifier Gain

100.0 dBuV

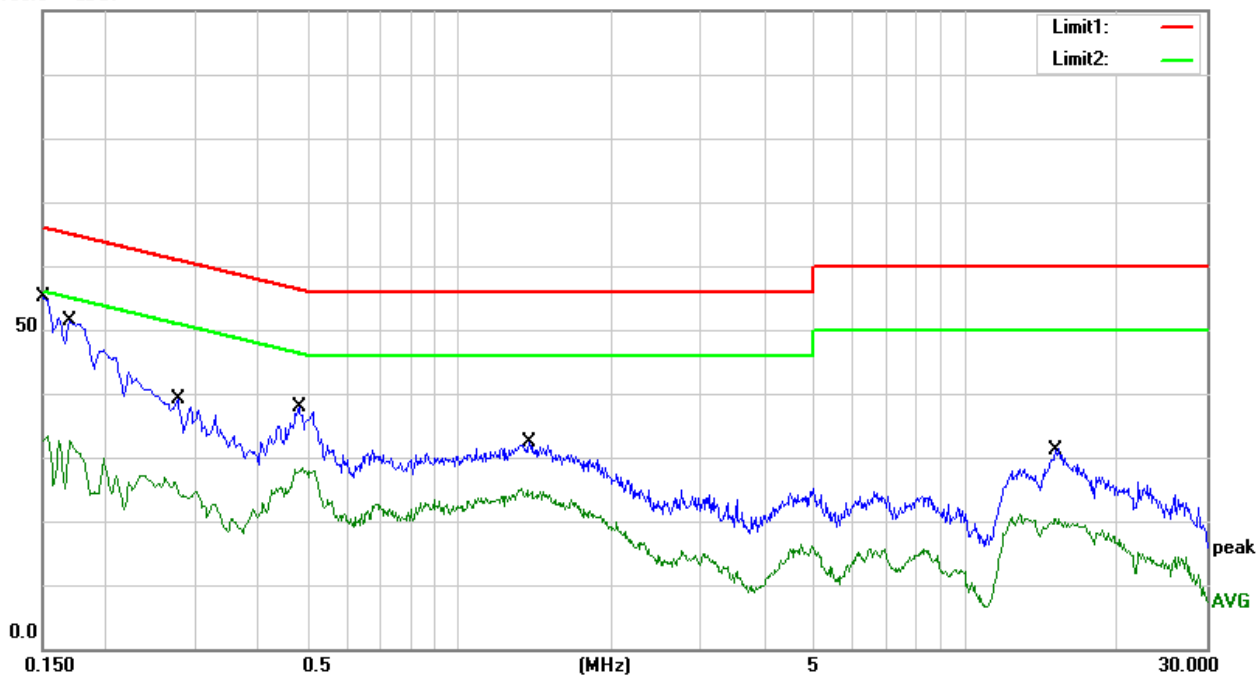




Temperature:	24 °C	Relative Humidity:	62.5%
Phase:	N	Test Mode:	Mode 1
Test Voltage:	DC 5V From PC		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	44.63	9.75	54.38	66.00	-11.62	QP
2	0.1500	25.71	9.75	35.46	56.00	-20.54	AVG
3	0.4860	29.74	9.99	39.73	56.24	-16.51	QP
4	0.4860	22.24	9.99	32.23	46.24	-14.01	AVG
5	1.5060	25.48	9.84	35.32	56.00	-20.68	QP
6	1.5060	18.79	9.84	28.63	46.00	-17.37	AVG
7	3.0100	22.43	9.91	32.34	56.00	-23.66	QP
8	3.0100	15.39	9.91	25.30	46.00	-20.70	AVG
9	11.8580	21.14	9.98	31.12	60.00	-28.88	QP
10	11.8580	13.69	9.98	23.67	50.00	-26.33	AVG
11	14.8460	22.50	10.07	32.57	60.00	-27.43	QP
12	14.8460	10.42	10.07	20.49	50.00	-29.51	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) - Limit
3. Factor = Cable Loss + Antenna Factor - Amplifier Gain

100.0 dBuV

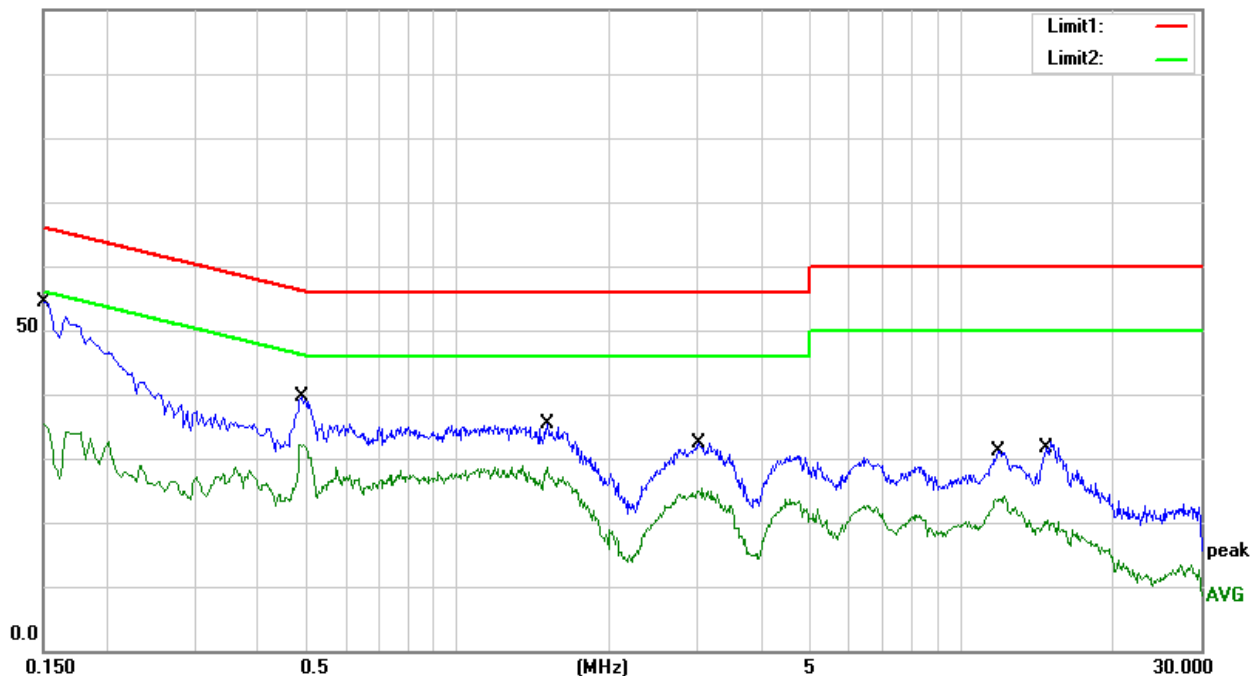

Note: The test voltage is 100-240V, both of which have assessment tests, and the worst test data is in the report.



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 Radiated Emission Limits

In case the emission fall within the restricted band specified on 15.105(a)&109(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Note:

- (1) The limit for radiated test was performed the following: FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower



Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	5th harmonic (Peak/AV)
RB / VB (emission in restricted band)	30MHz to 1000MHz: 100 KHz / 300 KHz Above 1000MHz: 1 MHz / 3 MHz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	30MHz to 1000MHz: 100 KHz / 300 KHz Above 1000MHz: 1 MHz / 3 MHz

3.2.2 TEST PROCEDURE

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.


Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency 30MHz~1GHz

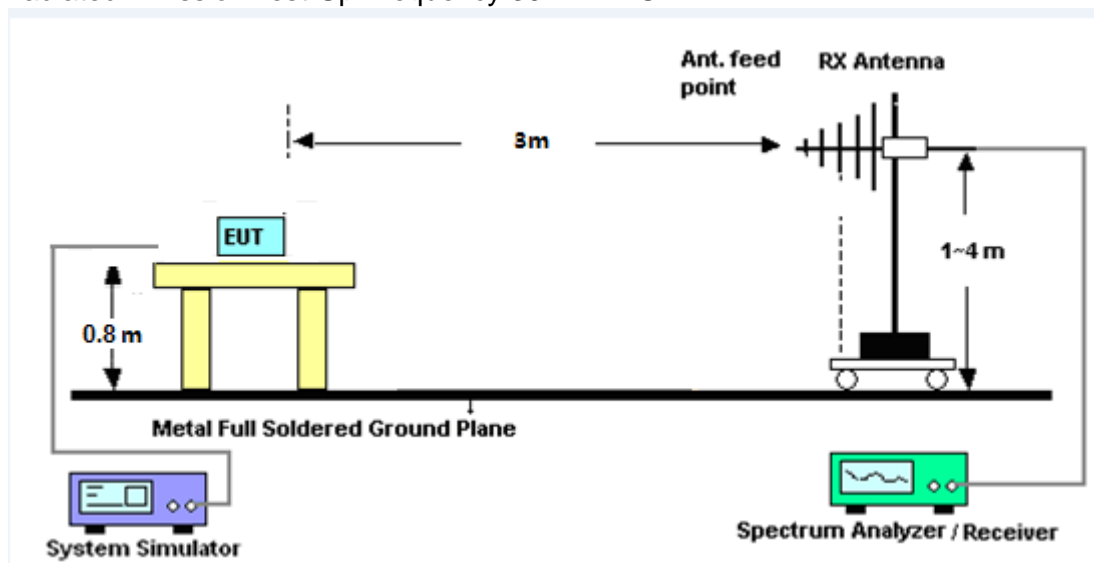

(B) Radiated Emission Test-Up Frequency Above 1GHz

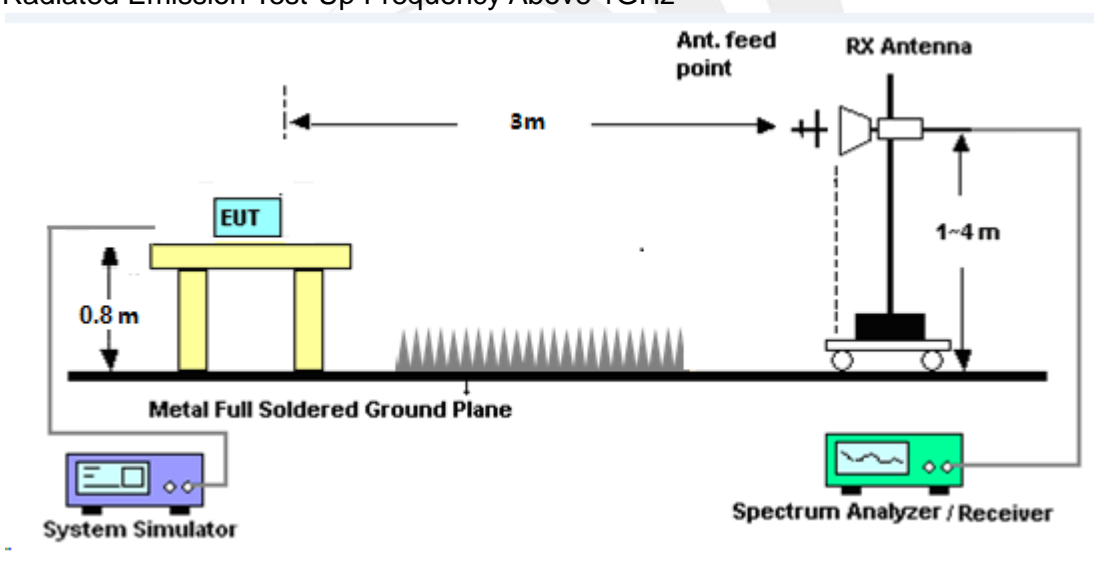

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



3.2.6 TEST RESULTS

30MHz -1000MHz


Temperature:	26.9 °C	Relative Humidity:	60%
Phase:	Horizontal	Test Mode:	Mode 1
Test Voltage:	DC 5V From PC		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	65.5725	52.28	-24.21	28.07	40.00	-11.93	QP
2	102.0014	43.43	-19.02	24.41	43.50	-19.09	QP
3	184.4898	53.69	-19.81	33.88	43.50	-9.62	QP
4	235.8163	52.12	-18.06	34.06	46.00	-11.94	QP
5	475.4990	41.54	-9.71	31.83	46.00	-14.17	QP
6	701.7610	37.34	-5.29	32.05	46.00	-13.95	QP

Remark:

1. Margin = Result (Result = Reading + Factor) – Limit
2. Factor = Cable Loss + Antenna Factor - Amplifier Gain

80.0 dBuV/m

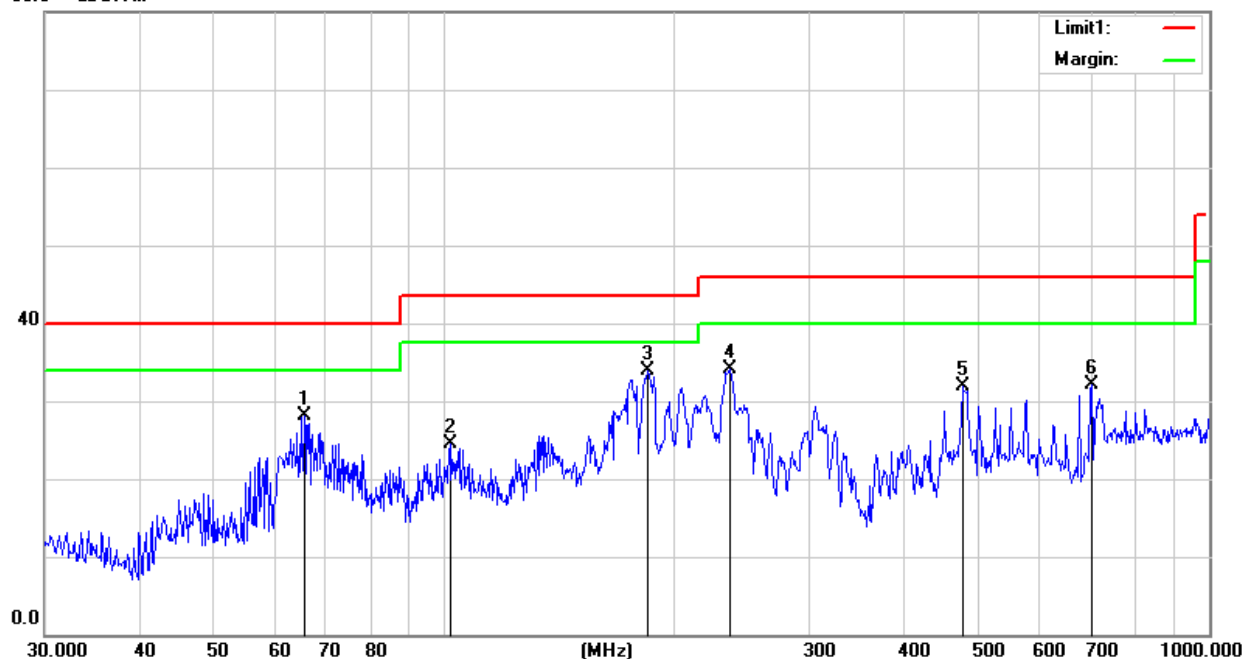




Temperature:	26.9 °C	Relative Humidity:	60%
Phase:	Vertical	Test Mode:	Mode 1
Test Voltage:	DC 5V From PC		

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor (dB)	Results (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	47.8260	49.01	-20.36	28.65	40.00	-11.35	QP
2	66.4990	56.36	-24.19	32.17	40.00	-7.83	QP
3	183.8440	49.58	-19.76	29.82	43.50	-13.68	QP
4	234.1682	47.01	-18.18	28.83	46.00	-17.17	QP
5	480.5276	38.26	-9.38	28.88	46.00	-17.12	QP
6	625.0780	36.59	-6.43	30.16	46.00	-15.84	QP

Remark:

1. $\text{Margin} = \text{Result} (\text{Result} = \text{Reading} + \text{Factor}) - \text{Limit}$
2. $\text{Factor} = \text{Cable Loss} + \text{Antenna Factor} - \text{Amplifier Gain}$

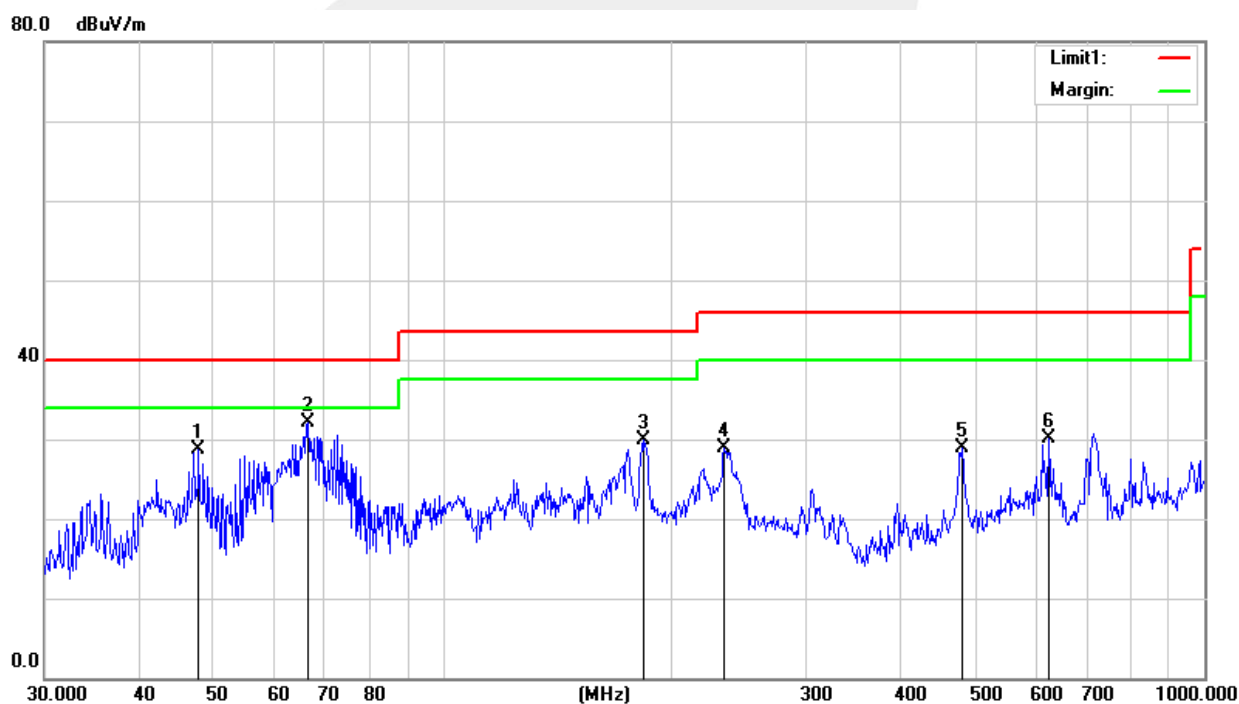



(1 GHz to 25GHz.)

Temperature:	26 °C	Relative Humidity:	54%
Phase:	Vertical/Horizontal	Test Mode:	Mode 1
Test Voltage:	DC 5V From PC		

PK

Freq.	Ant. Pol	Peak	Amplifier	Loss	Antenna Factor	Orrected Factor	Actual Fs	Peak	Peak
(MHz)	H/V	Reading (dBuV)	(dB)	(dB)	(dB/m)	(dB)	Peak (dBuV/m)	Limit (dBuV/m)	margin (dB)
2412.33	H	57.65	43.80	5.40	25.90	-12.50	70.15	74.00	-3.85
2546.65	H	49.62	44.40	6.00	27.60	-10.80	60.42	74.00	-13.58
3354.27	H	56.20	44.70	6.70	28.20	-9.80	66.00	74.00	-8.00
4514.39	H	48.58	44.30	8.42	30.40	-5.48	54.06	74.00	-19.94
2412.33	V	56.54	43.80	5.40	25.90	-12.50	69.04	74.00	-4.96
2546.65	V	47.48	44.40	6.00	27.60	-10.80	58.28	74.00	-15.72
3354.27	V	55.69	44.70	6.70	28.20	-9.80	65.49	74.00	-8.51
4514.39	V	46.52	44.30	8.42	30.40	-5.48	52.00	74.00	-22.00
5612.58	V	40.17	44.20	9.70	32.00	-2.50	42.67	74.00	-31.33

AV

Freq.	Ant. Pol	AV	Amplifier	Loss	Antenna Factor	Orrected Factor		AV	AV
(MHz)	H/V	Reading (dBuV)	(dB)	(dB)	(dB/m)	(dB)	AV (dBuV/m)	Limit (dBuV/m)	margin (dB)
2412.33	H	37.54	43.80	5.40	25.90	-12.50	50.04	54.00	-3.96
2546.65	H	28.52	44.40	6.00	27.60	-10.80	39.32	54.00	-14.68
3354.27	H	36.25	44.70	6.70	28.20	-9.80	46.05	54.00	-7.95
4514.39	H	27.12	44.30	8.42	30.40	-5.48	32.60	54.00	-21.40
2412.33	V	35.46	43.80	5.40	25.90	-12.50	47.96	54.00	-6.04
2546.65	V	26.54	44.40	6.00	27.60	-10.80	37.34	54.00	-16.66
3354.27	V	34.57	44.70	6.70	28.20	-9.80	44.37	54.00	-9.63
4514.39	V	25.33	44.30	8.42	30.40	-5.48	30.81	54.00	-23.19
5612.58	V	20.48	44.20	9.70	32.00	-2.50	22.98	54.00	-31.02



Notes:

1. Measuring frequencies from 1 GHz to 25GHz.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode of the emission shown in Actual FS column.
3. The frequency that above 5.6GHz is mainly from the environment noise.

*****END OF THE REPORT*****

