

TEST REPORT

Report Number: 17080306HKG-001R2

Application for

Original Grant of 47 CFR Part 15 Certification
(DSSS/OFDM modulation)

FCC ID: PIYFGN8417W

Transceiver – WiFi portion

This report supersedes previous report with report number 17080306HKG-001R1 dated August 22, 2017.
Please refer TY-S17-0322 Letter issued on September 27, 2017 for amendment/ supersede notification.

PREPARED AND CHECKED BY:

APPROVED BY:

Signed On File
Lok Chi Hang, Wil
Engineer

Wong Kwok Yeung, Kenneth
Senior Lead Engineer
Date: September 27, 2017

TEST REPORT

GENERAL INFORMATION

Applicant Name:	Mattel Asia Pacific Sourcing Ltd.
Applicant Address:	13/F., South Tower, World Finance Centre, Harbour City, Tsim Sha Tsui, Kowloon, Hong Kong.
FCC Specification Standard:	FCC Part 15, April 5, 2017 Edition
FCC ID:	PIYFGN8417W
FCC Model(s):	FGN84
Type of EUT:	Spread Spectrum Transmitter
Description of EUT:	Hello Barbie Hologram
Serial Number:	N/A
Sample Receipt Date:	August 04, 2017
Date of Test:	August 04, 2017 to August 16, 2017
Report Date:	September 27, 2017
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%

TEST REPORT

TABLE OF CONTENTS

1.0 Test Results Summary & Statement of Compliance	1
1.1 Summary of Test Results	4
1.2 Statement of Compliance	4
2.0 General Description	5
2.1 Product Description	5
2.2 Test Methodology	6
2.3 Test Facility	6
2.4 Related Submittal(s) Grants	6
3.0 System Test Configuration	7
3.1 Justification	7
3.2 EUT Exercising Software	8
3.3 Details of EUT and Description of Accessories	9
3.4 Measurement Uncertainty	9
4.0 Test Results	10
4.1 Maximum Conducted Output Power at Antenna Terminals	10
4.2 Minimum 6dB RF Bandwidth	12
4.3 Maximum Power Spectral Density	21
4.4 Out of Band Conducted Emissions	30
4.5 Field Strength Calculation	47
4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions	48
4.6.1 Radiated Emission Configuration Photograph	48
4.6.2 Radiated Emission Data	48
4.6.3 Radiated Emission Test Setup	59
4.6.4 Transmitter Duty Cycle Calculation	60
4.7 AC Power Line Conducted Emission	61
5.0 Equipment List	65

TEST REPORT

EXHIBIT 1 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE

1.0 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE

1.1 Summary of Test Results

TEST ITEMS	FCC PART 15 SECTION	RESULTS	DETAILS SEE SECTION
Antenna Requirement	15.203	Pass	2.1
Max. Conducted Output Power (Peak)	15.247(b)(3)&(4)	Pass	4.1
Min. 6dB RF Bandwidth	15.247(a)(2)	Pass	4.2
Max. Power Density (average)	15.247(e)	Pass	4.3
Out of Band Antenna Conducted Emission	15.247(d)	Pass	4.4
Radiated Emission in Restricted Bands and Spurious Emissions	15.247(d), 15.209 & 15.109	Pass	4.6
AC Power Line Conducted Emission	15.207 & 15.107	Pass	4.7

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

1.2 Statement of Compliance

The equipment under test is found to be complying with the following standard:

FCC Part 15, April 5, 2017 Edition

TEST REPORT

EXHIBIT 2 GENERAL DESCRIPTION

2.0 GENERAL DESCRIPTION

2.1 Product Description

The Equipment Under Test (EUT) is a portable 2.4GHz WiFi and 2.4GHz Bluetooth Ver.4.2 without LE Barbie House operated at 2412-2462MHz with 5MHz Channel Spacing (WiFi) and 2402-2480MHz with 1MHz channel spacing. The EUT is powered by 1 X 3.7V rechargeable battery and 120VAC 50/60Hz Adaptor. After switch on the EUT and paired with Phone Device with Phone Application through Wifi, the EUT can be connected to Cloud server. By giving voice command, the EUT can be controlled to play music through Bluetooth.

The Equipment Under Test (EUT) operates at frequency range of 2412MHz to 2462MHz with 11 channels.

For 802.11b mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Direct-sequence spread spectrum (DSSS) modulation. Maximum bit rate can be up to 11 Mbps.

For 802.11g mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can be up to 54Mbps.

For 802.11n (20MHz) mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can be up to MCS7Mbps.

For 802.11n (40MHz) mode, it operates at frequency range of 2422.000MHz to 2452.000MHz with 7 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can be up to MCS7Mbps.

The EUT is power by 1 X 3.7V rechargeable battery and 120VAC 50/60Hz Adaptor.

The antenna(s) used in the EUT is an integral.

The circuit description is saved with filename: descri.pdf.

TEST REPORT

2.2 Test Methodology

Radiated emission measurement was performed according to the procedures in ANSI C63.10 (2013). Preliminary radiated scans and all radiated measurements were performed in radiated emission test sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2013) and KDB Publication No.558074 D01 v04 (05-April-2017) All other measurements were made in accordance with the procedures in 47 CFR Part 2.

2.3 Test Facility

The radiated emission test site facility used to collect the radiated data and conductive data are at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been fully placed on file with the FCC.

2.4 Related Submittal(s) Grants

This is a single application for certification of a transceiver (DSSS/OFDM WiFi portion)

TEST REPORT

EXHIBIT 3 SYSTEM TEST CONFIGURATION

3.0 SYSTEM TEST CONFIGURATION

3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by 1 X 3.7V rechargeable battery and 120VAC 50/60Hz Adaptor.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the base unit attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109.

TEST REPORT

3.1 Justification – Cont'd

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.8.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.8.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

Different data rates have been tested. Worst case is reported only.

All relevant operation modes have been tested, and the worst case data is included in this report.

All data rates were tested under normal mode of WiFi. Only the worst-case data is shown in the report for DSSS and OFDM

3.2 EUT Exercising Software

The EUT exercise program (if any) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

TEST REPORT

3.3 Details of EUT and Description of Accessories

Details of EUT:

N/A

Description of Accessories:

There are no accessories for compliance of this product.

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test at a level of confidence of 95% has been considered. The values of the Measurement uncertainty for radiated emission test and RF conducted measurement test are $\pm 5.3\text{dB}$ and $\pm 0.99\text{dB}$ respectively. The value of the Measurement uncertainty for conducted emission test is $\pm 4.2\text{dB}$.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

TEST REPORT


EXHIBIT 4 TEST RESULTS

4.0 TEST RESULTS

4.1 Maximum Conducted (peak) Output Power at Antenna Terminals

RF Conduct Measurement Test Setup

The figure below shows the test setup, which is utilized to make these measurements.



The antenna port of the EUT was connected to the input of a spectrum analyzer.

- ☒ The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals. The measurement procedure 9.1.3 was used.
- ☐ The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

IEEE 802.11b (DSSS, 1 Mbps) Antenna Gain = 0 dBi

Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	14.39	27.48
Middle Channel: 2437	15.11	32.43
High Channel: 2462	14.75	29.85

IEEE 802.11g (OFDM, 6 Mbps) Antenna Gain = 0 dBi

Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	20.45	110.92
Middle Channel: 2437	20.37	108.89
High Channel: 2462	20.42	110.15

IEEE 802.11n (20MHz) (OFDM, MCS0) Antenna Gain = 0 dBi

Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	19.14	82.04
Middle Channel: 2437	19.10	81.28
High Channel: 2462	19.24	83.95

TEST REPORT

4.1 Maximum Conducted Output Power at Antenna Terminals – Cont'd

IEEE 802.11n (40MHz) (OFDM, MCS0) Antenna Gain = 0 dBi

Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2422	17.29	53.58
Middle Channel: 2437	17.31	53.83
High Channel: 2452	17.14	51.76

Cable loss : 0.5 dB External Attenuation : 0 dB

Cable loss, external attenuation: ☒ included in OFFSET function
☐ added to SA raw reading

IEEE 802.11b (DSSS, 1 Mbps)
max. conducted (peak) output level = 15.11dBm

IEEE 802.11g (OFDM, 6 Mbps)
max. conducted (peak) output level = 20.45dBm

IEEE 802.11n (20MHz) (OFDM, MCS0 Mbps)
max. conducted (peak) output level = 19.24dBm

IEEE 802.11n (40MHz) (OFDM, MCS0 Mbps)
max. conducted (peak) output level = 17.31dBm

The plots of conducted output power are saved as below.

Limits:

☒ 1W (30dBm) for antennas with gains of 6dBi or less

☐ ___W (___dBm) for antennas with gains more than 6dBi

TEST REPORT

4.2 Minimum 6dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 6dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

IEEE 802.11b (DSSS, 1 Mbps)

Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2412	9.28
Middle Channel: 2437	9.28
High Channel: 2462	9.28

IEEE 802.11g (OFDM, 6 Mbps)

Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2412	16.72
Middle Channel: 2437	16.68
High Channel: 2462	16.72

IEEE 802.11n (20MHz) (OFDM, MCS0 Mbps)

Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2412	18.00
Middle Channel: 2437	17.88
High Channel: 2462	17.92

IEEE 802.11n (40MHz) (OFDM, MCS0 Mbps)

Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2422	36.24
Middle Channel: 2437	36.36
High Channel: 2452	36.48

Limits


6 dB bandwidth shall be at least 500kHz

The plots of 6dB RF bandwidth are saved as below.


TEST REPORT

PLOTS OF 6dB RF BANDWIDTH

802.11b, Lowest Channel

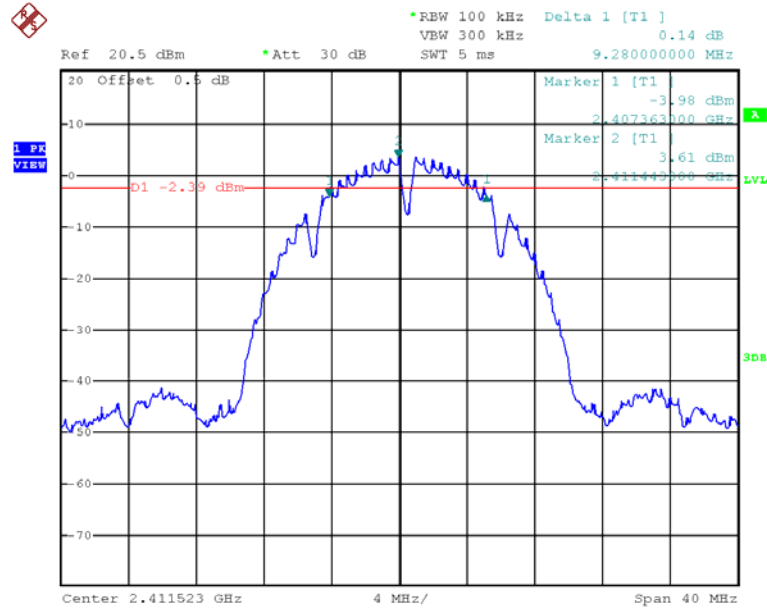


802.11b, Middle Channel

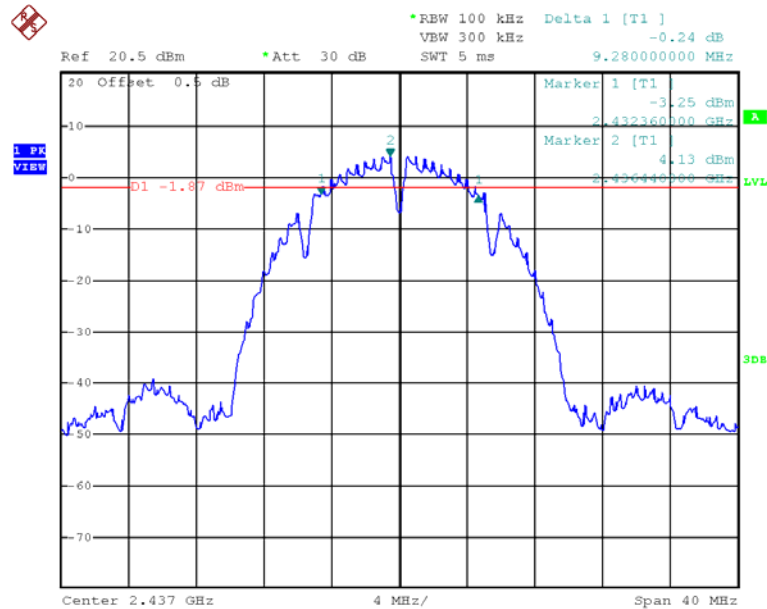

TEST REPORT


PLOTS OF 6dB RF BANDWIDTH
802.11b, Highest Channel

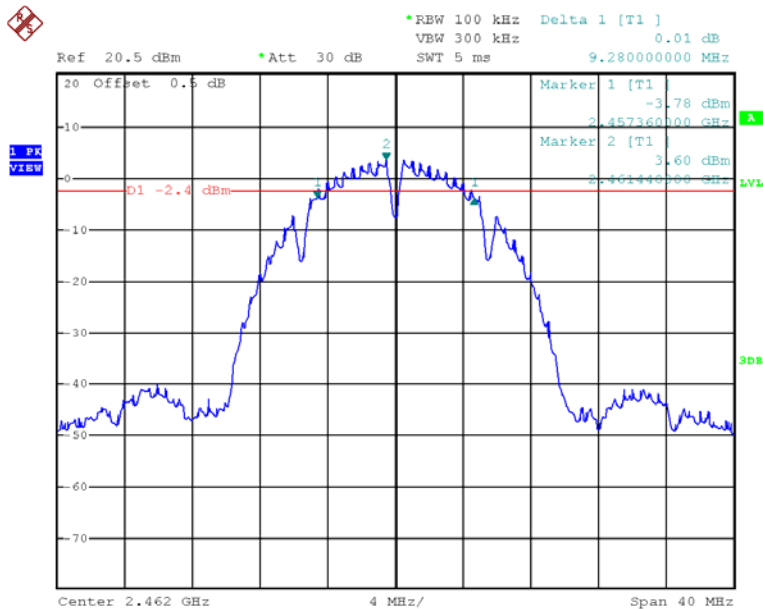


TEST REPORT

PLOTS OF 6dB RF BANDWIDTH

802.11g, Lowest Channel

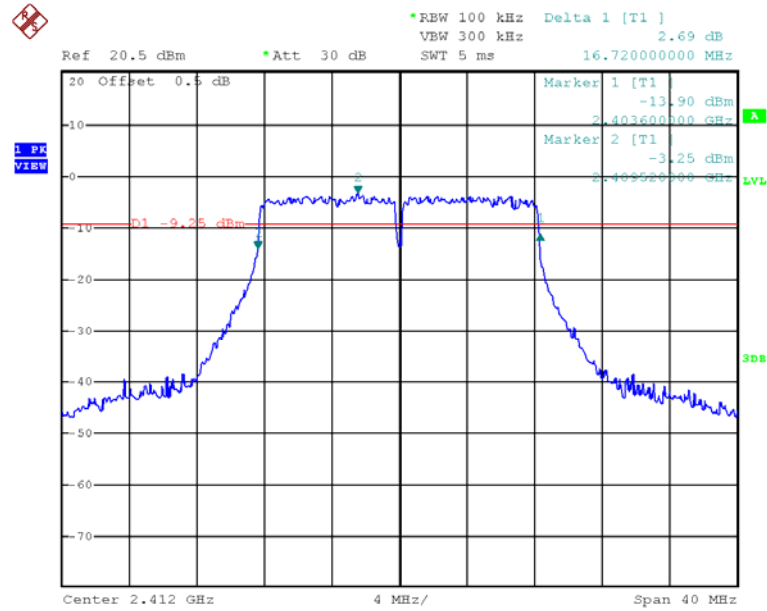


802.11g, Middle Channel

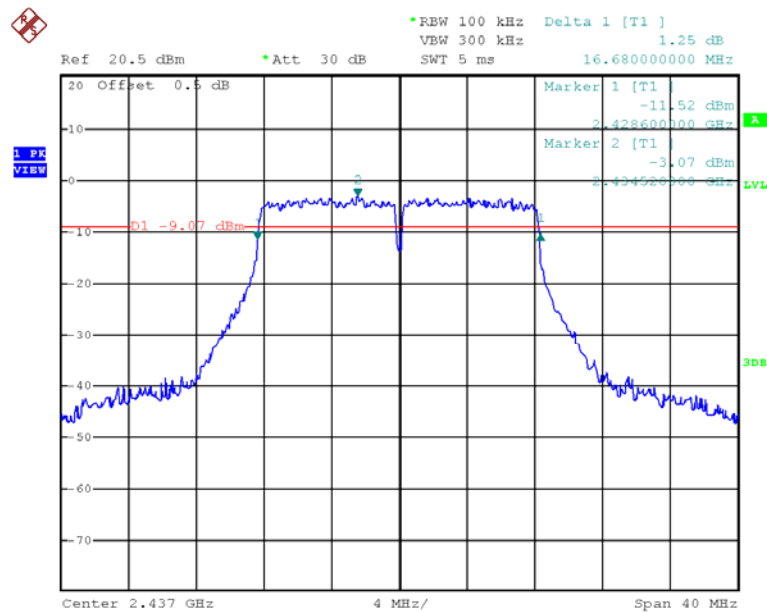

TEST REPORT


PLOTS OF 6dB RF BANDWIDTH
802.11g, Highest Channel

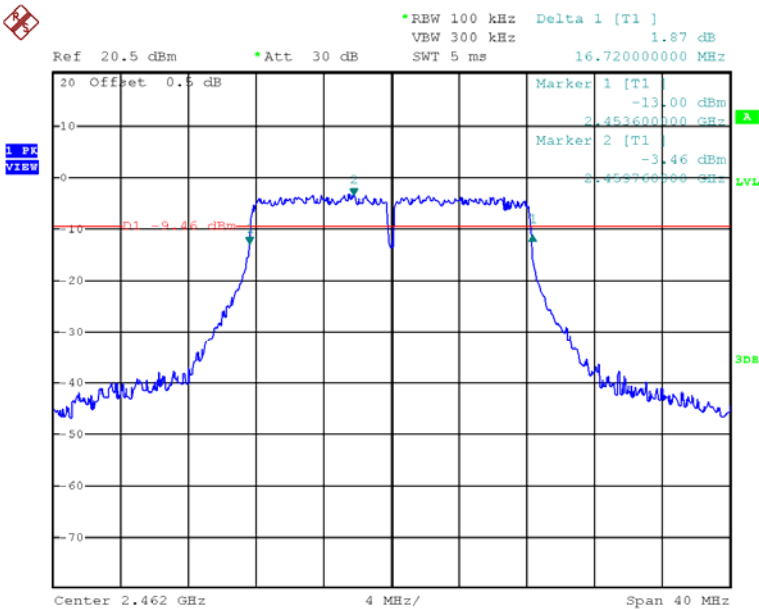


TEST REPORT

PLOTS OF 6dB RF BANDWIDTH

802.11n (20MHz), Lowest Channel

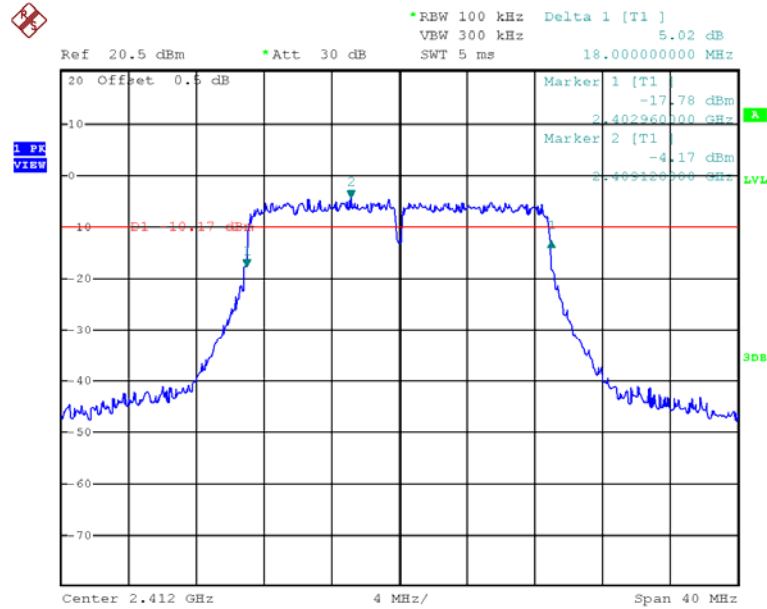


802.11n (20MHz), Middle Channel

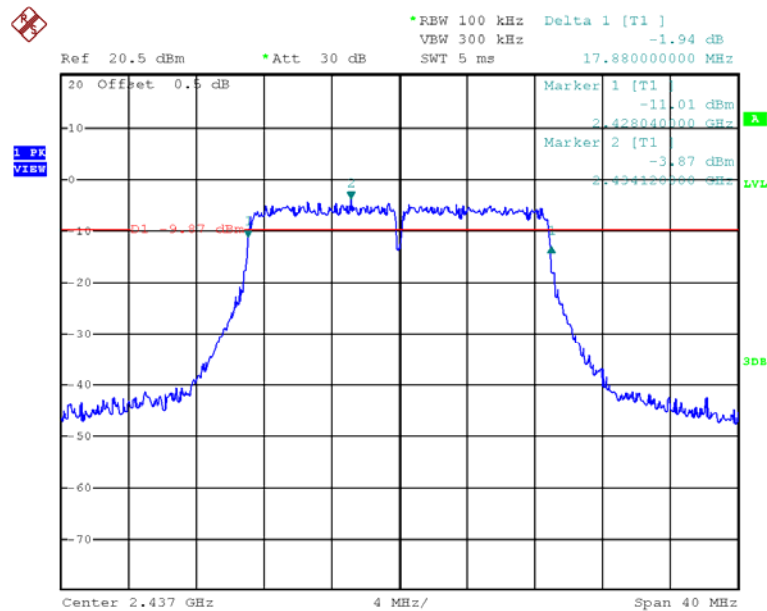


TEST REPORT

PLOTS OF 6dB RF BANDWIDTH
802.11n (20MHz), Highest Channel

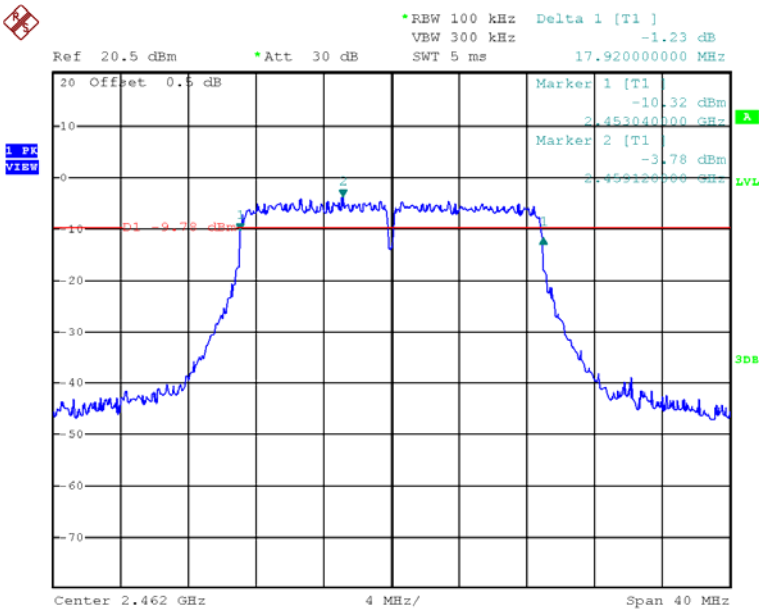


TEST REPORT

PLOTS OF 6dB RF BANDWIDTH
802.11n (40MHz), Lowest Channel

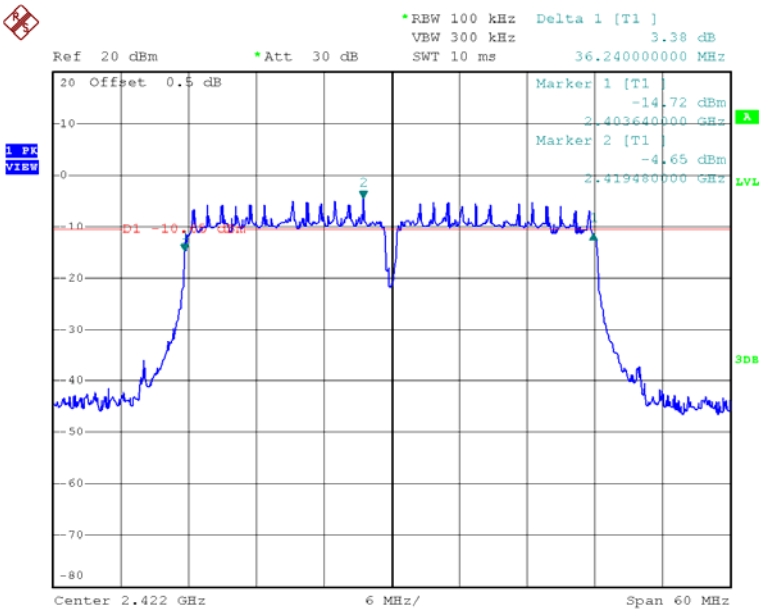


802.11n (40MHz), Middle Channel

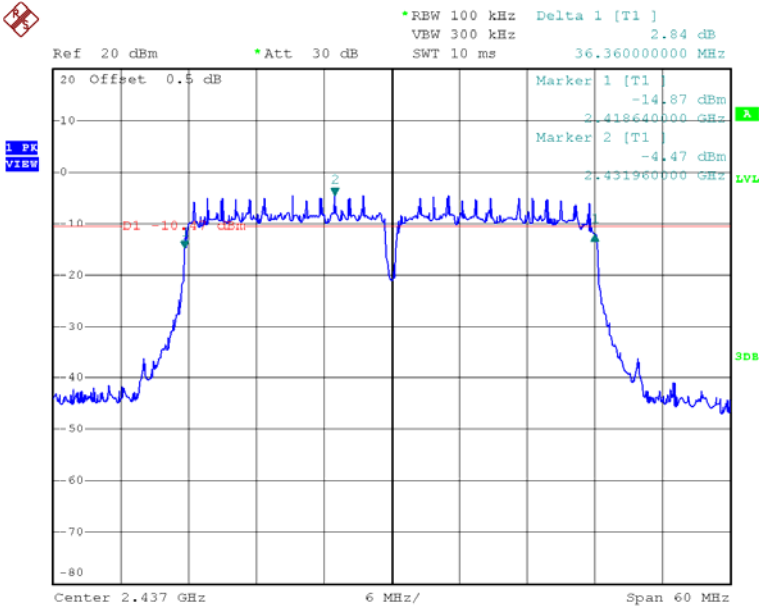

TEST REPORT

PLOTS OF 6dB RF BANDWIDTH
802.11n (40MHz), Highest Channel

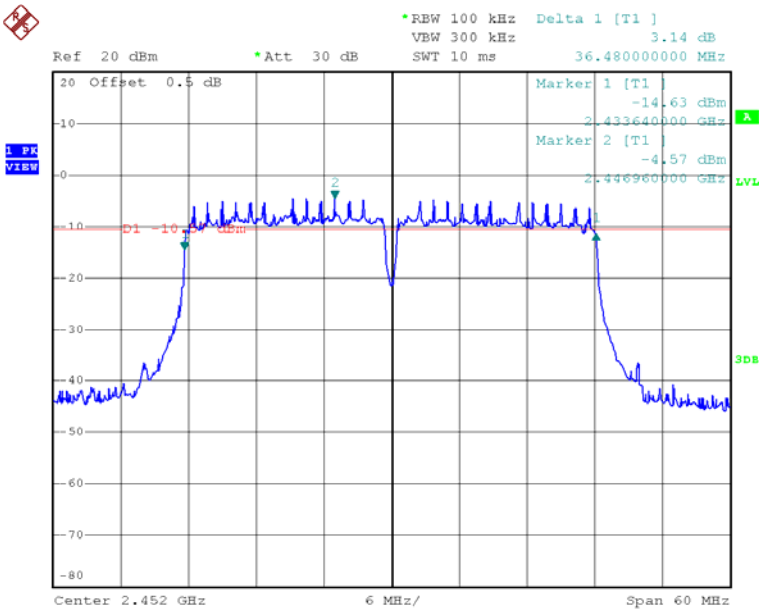

TEST REPORT

4.3 Maximum Power Spectral Density

Antenna output of the EUT was coupled directly to spectrum analyzer. The measurement procedure 10.2 PKPSD was used. If an external attenuator and/or cable was used, these losses are compensated for using the OFFSET function of the analyser.

IEEE 802.11b (DSSS, 1 Mbps)

Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	2.78
Middle Channel: 2437	3.56
High Channel: 2462	3.13

IEEE 802.11g (OFDM, 6 Mbps)

Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	-4.01
Middle Channel: 2437	-3.39
High Channel: 2462	-3.42

IEEE 802.11n (20MHz) (OFDM, MCS0)

Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	-4.50
Middle Channel: 2437	-4.30
High Channel: 2462	-4.24

IEEE 802.11n (40MHz) (OFDM, MCS0)

Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2422	-5.21
Middle Channel: 2437	-4.97
High Channel: 2452	-4.89

Cable Loss: 0.5 dB


Limit:
8dBm

The plots of power spectral density are as below.


TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY

802.11b, Lowest channel

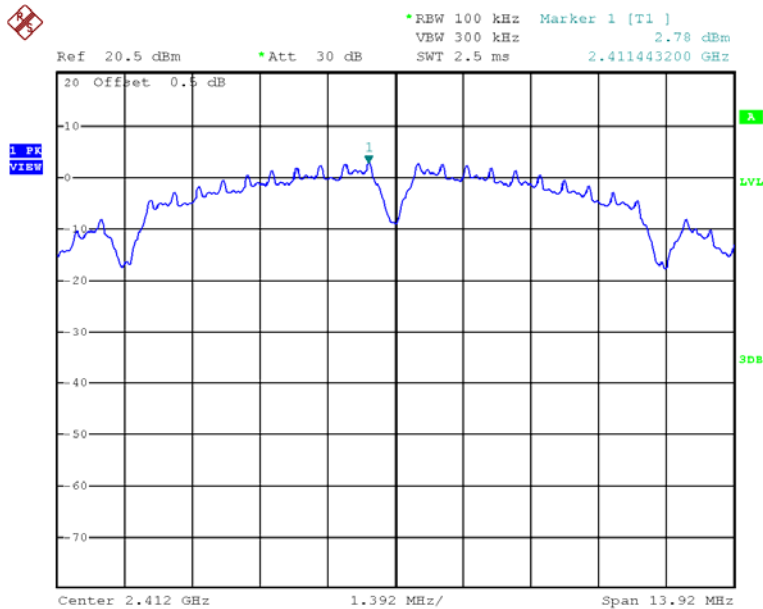


802.11b, Middle channel

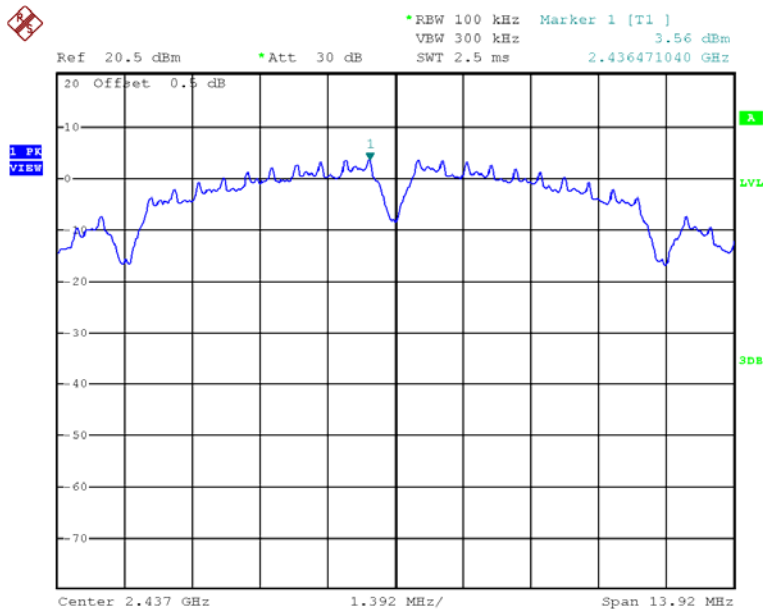

TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY


802.11b, Highest channel

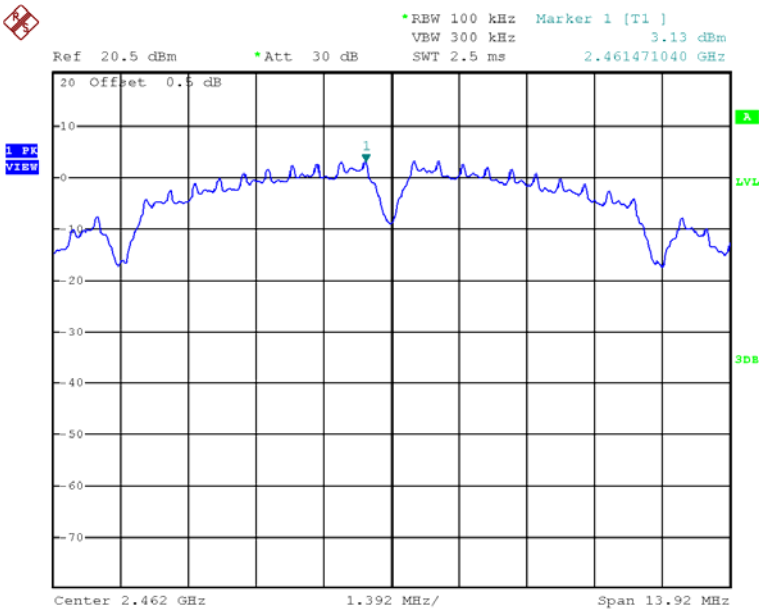


TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY

802.11g, Lowest channel

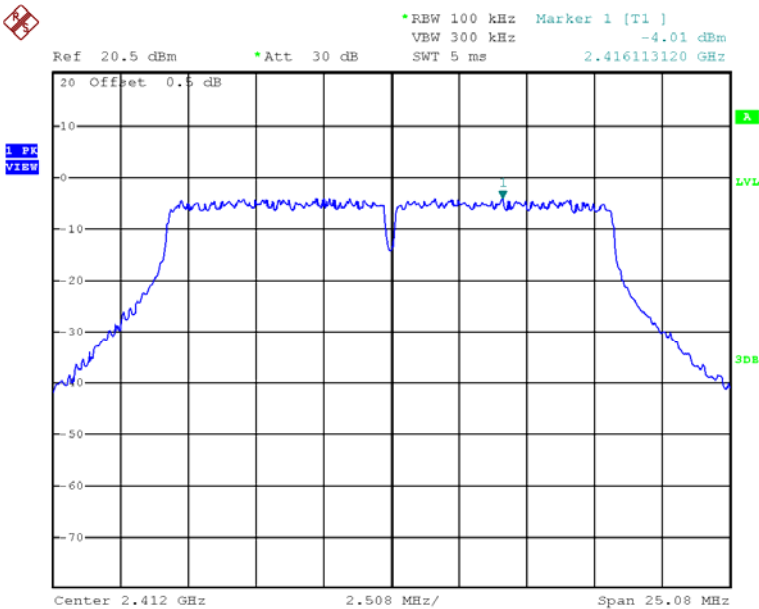


802.11g, Middle channel

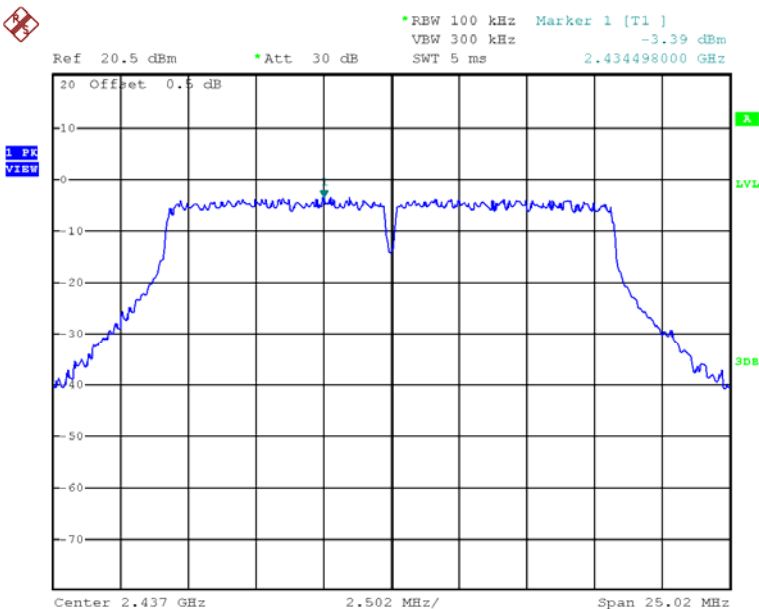

TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY


802.11g, Highest channel

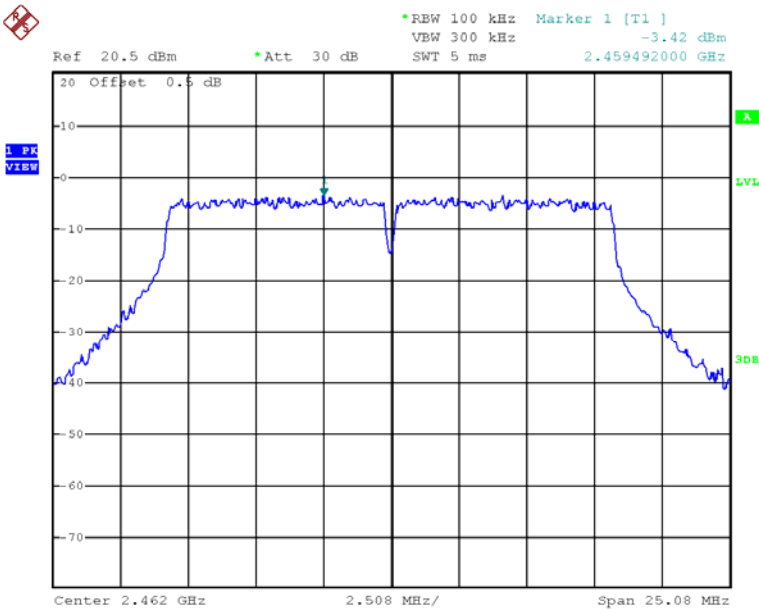


TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY

802.11n (20MHz), Lowest channel

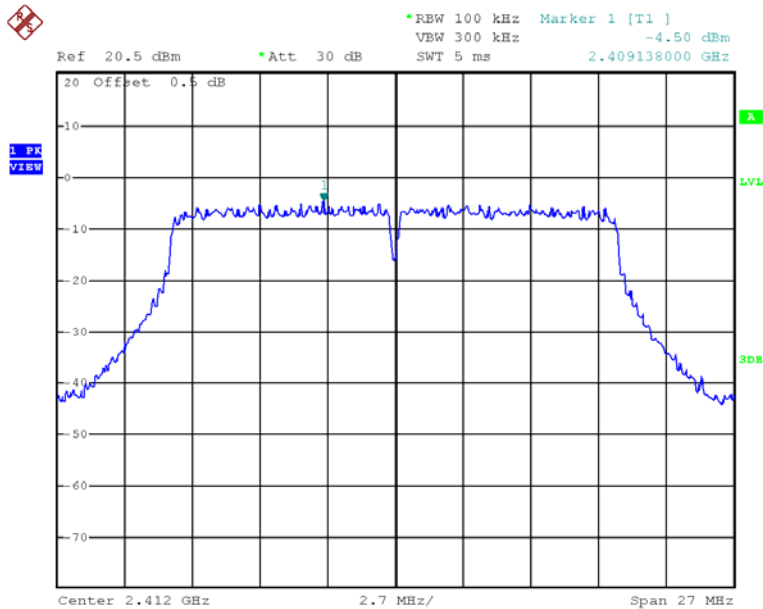


802.11n (20MHz), Middle channel

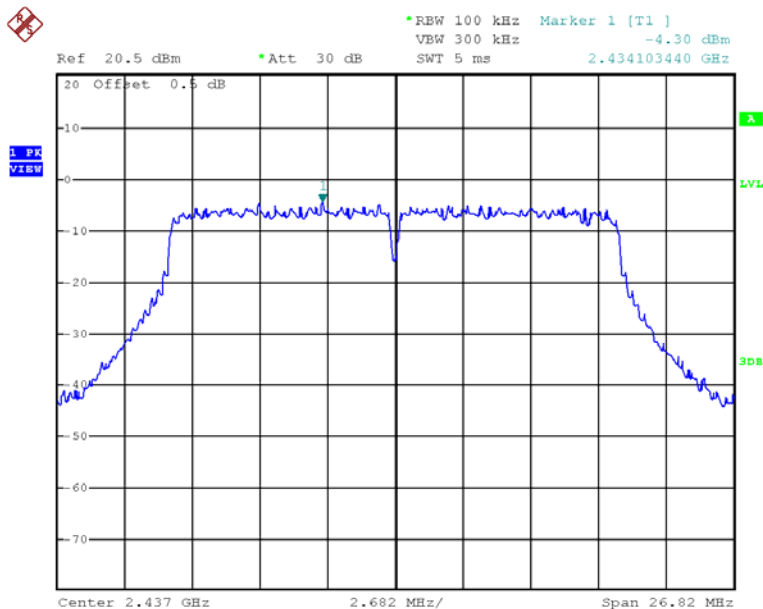

TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY


802.11n (20MHz), Highest channel

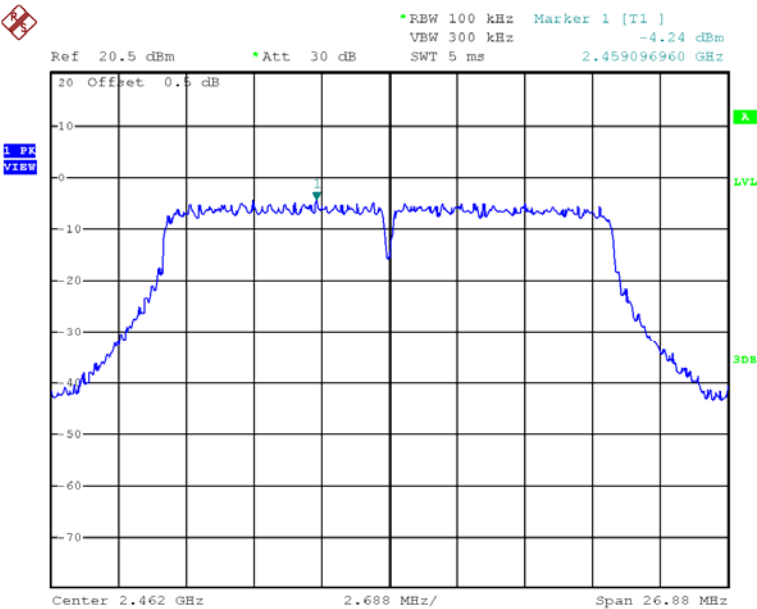


TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY

802.11n (40MHz), Lowest channel

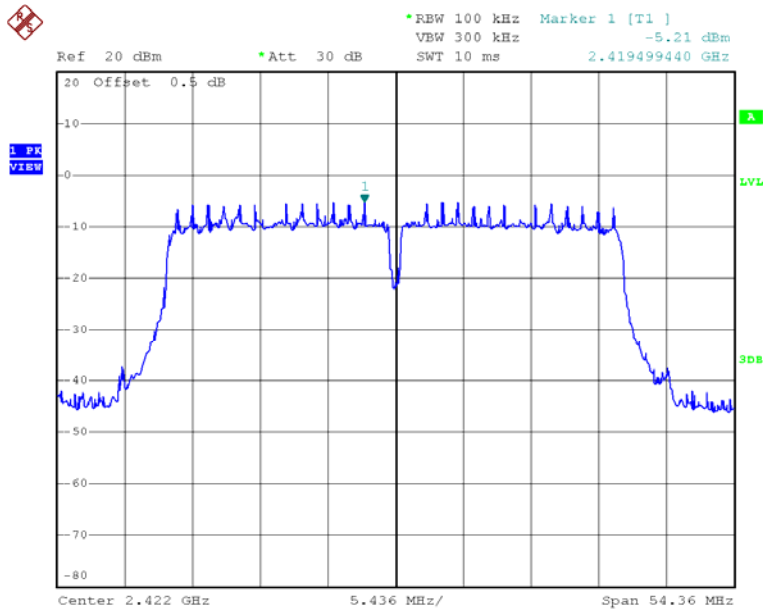


802.11n (40MHz), Middle channel

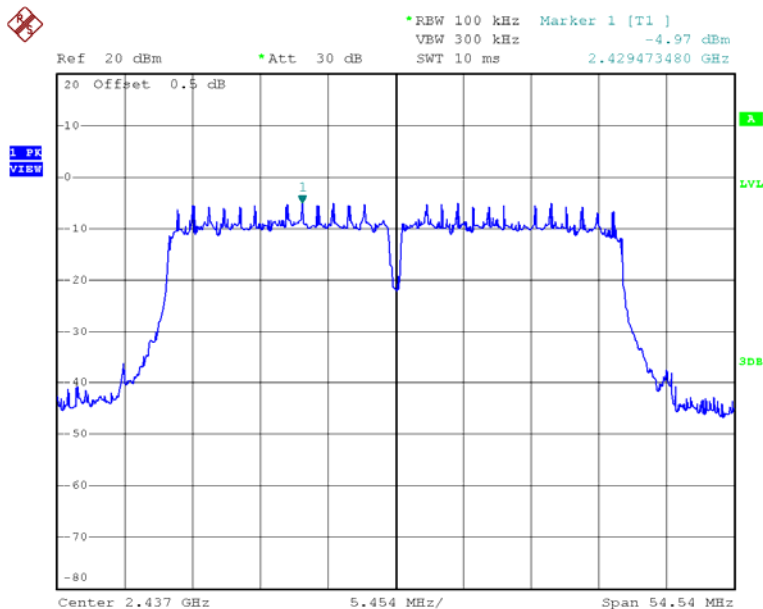

TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY

802.11n (40MHz), Highest channel

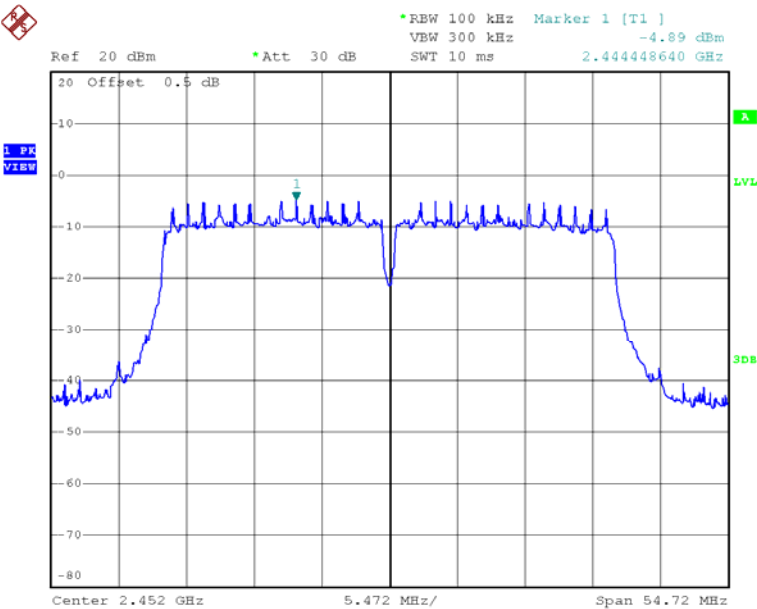

TEST REPORT

4.4 Out of Band Conducted Emissions

For 802.11b/g/n20/n40, the maximum conducted (peak) output power was used to demonstrate compliance as described in 9.1. Then the display line (in red) shown in the following plots denotes the limit at 20dB below maximum measured in-band peak PSD level in 100 KHz bandwidth for 802.11b/g/n20/n40.

The measurement procedures under sections 11 of KDB558074 D01 v04 (05-April-2017) were used.

Furthermore, delta measurement technique for measuring bandedge emissions was incorporated in the test of the edge at 2483.5MHz.

Limits:


All spurious emission and up to the tenth harmonic was measured and they were found to be at least for 802.11b,g,n20MHz, n40MHz below the maximum measured in-band peak PSD level.

The plots of out of band conducted emissions are as below.


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11b, Lowest Channel

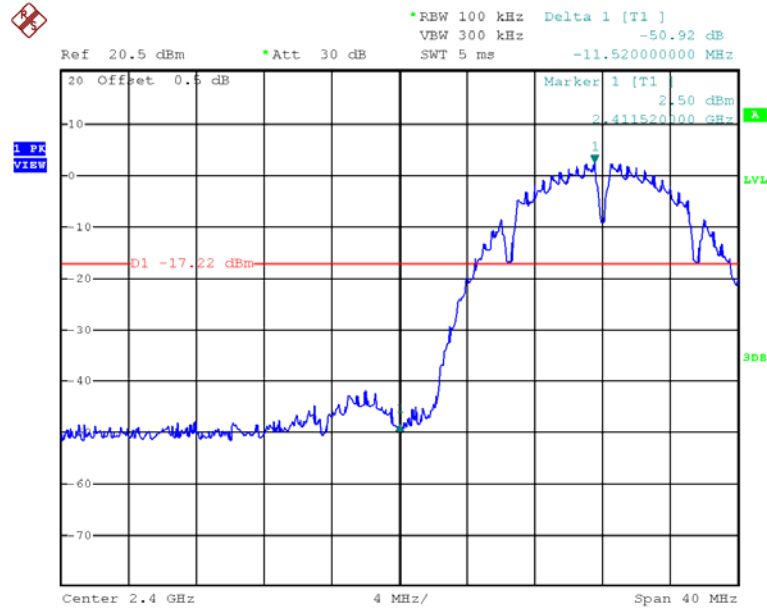


802.11b, Highest Channel

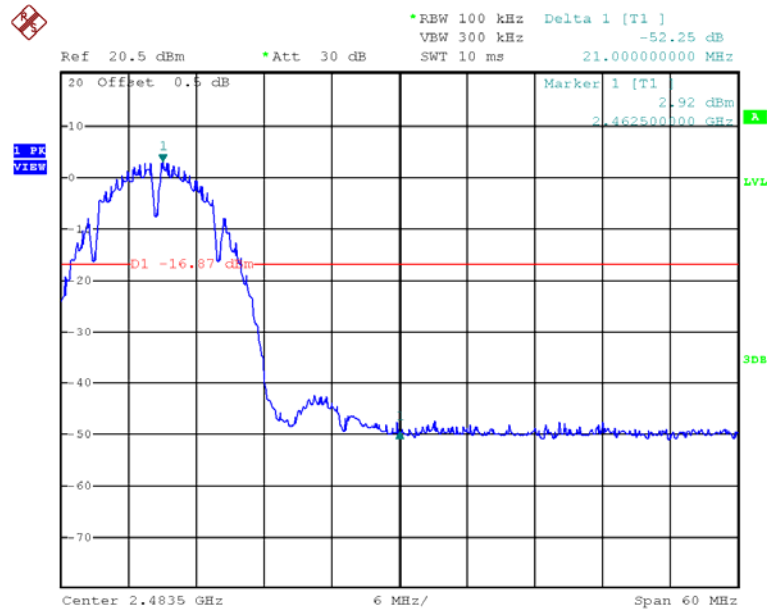


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11b, Lowest Channel, Plot A

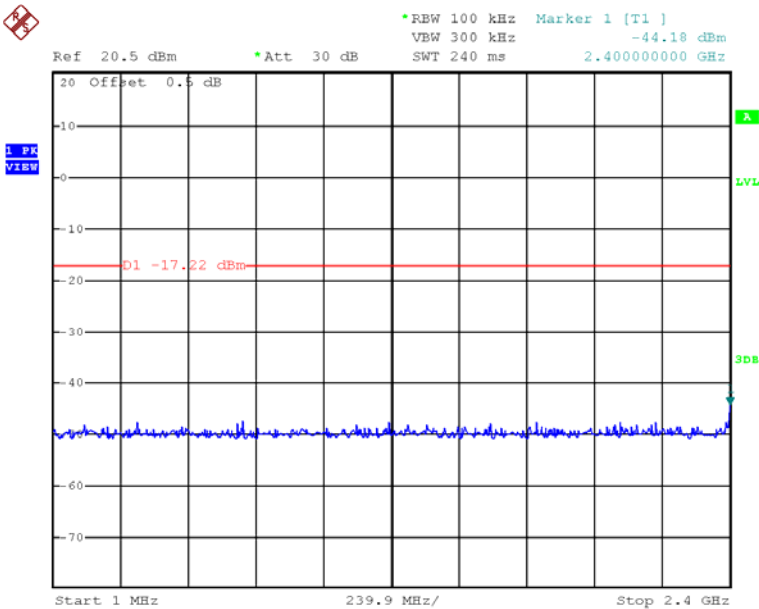


802.11b, Lowest Channel, Plot B

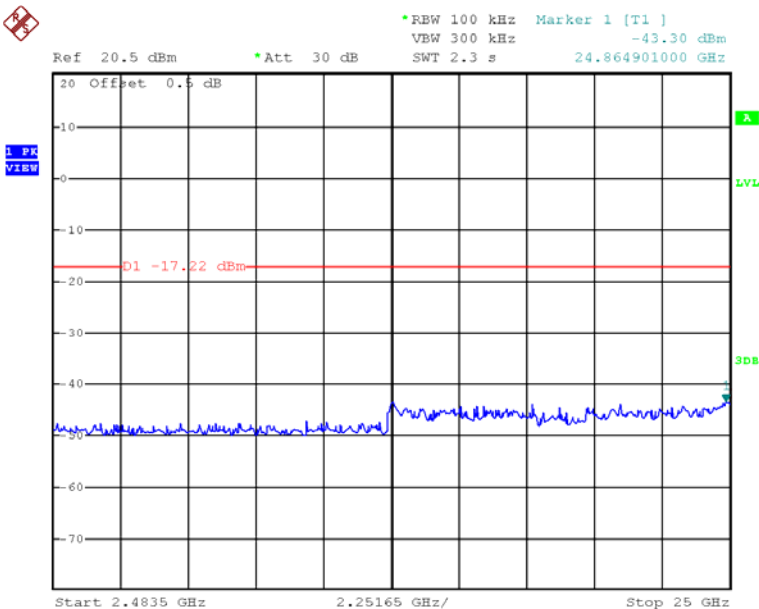


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11b, Middle Channel, Plot A

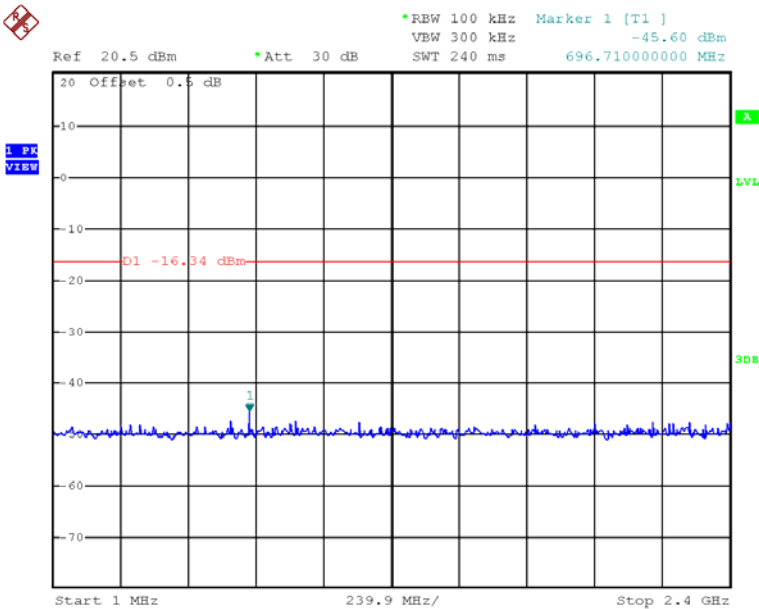


802.11b, Middle Channel, Plot B

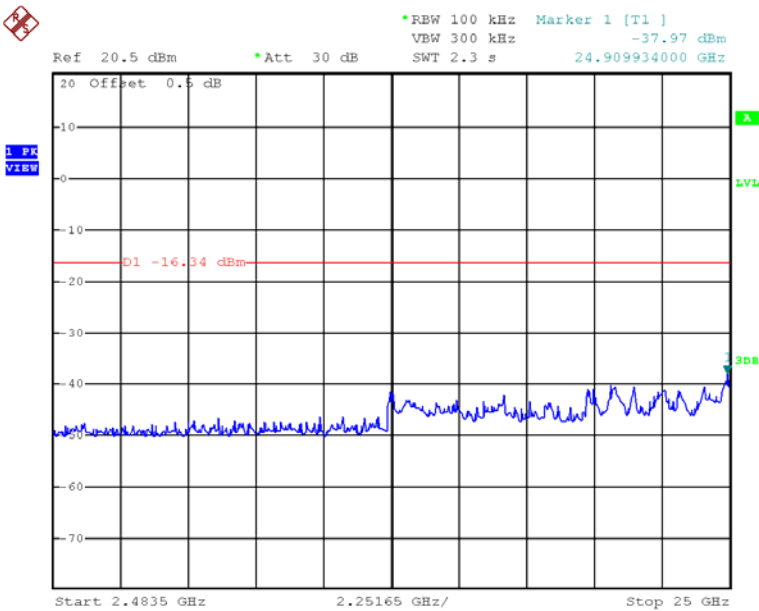


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11b, Highest Channel, Plot A

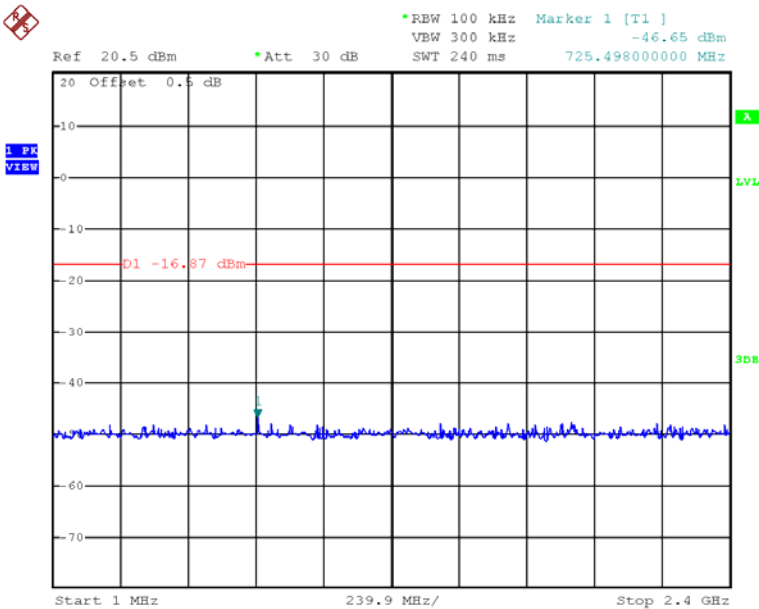


802.11b, Highest Channel, Plot B

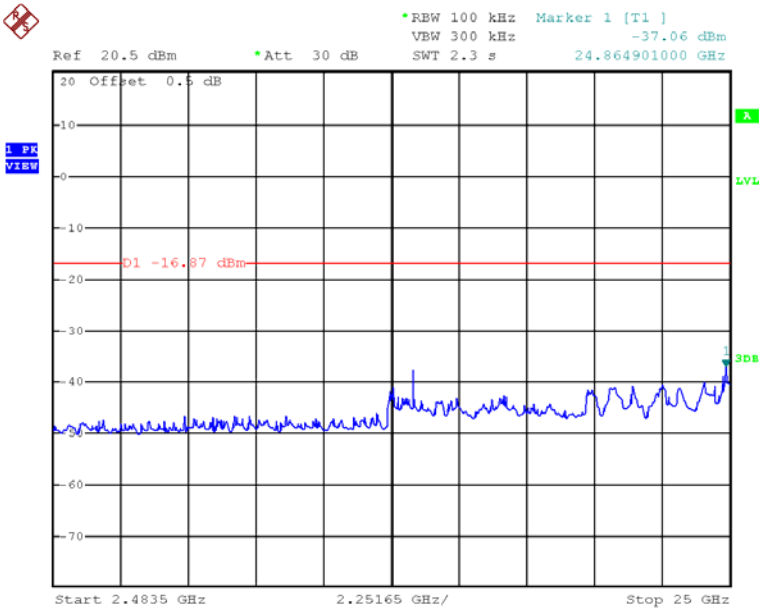


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11g, Lowest Channel

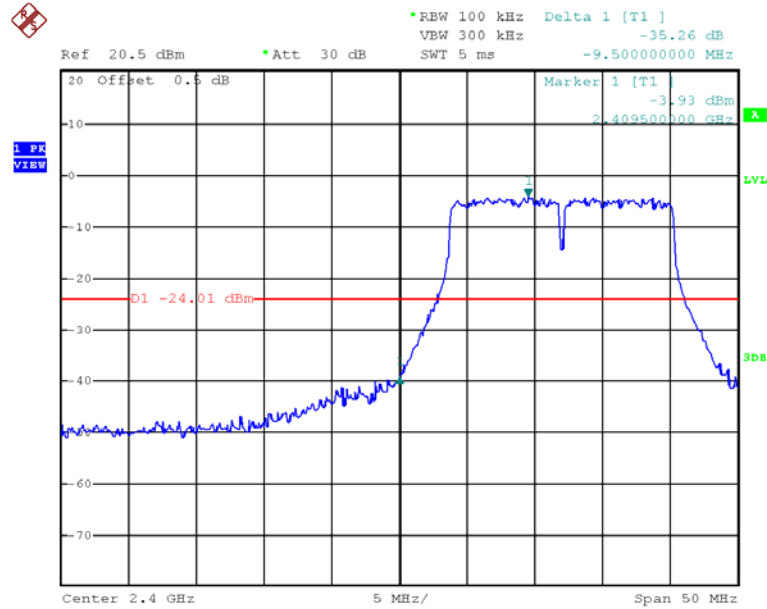


802.11g, Highest Channel

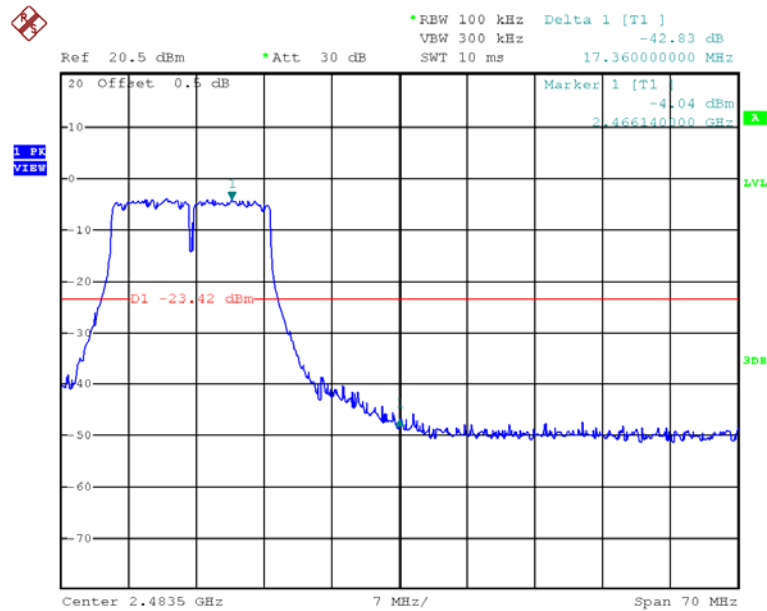


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11g, Lowest Channel, Plot A

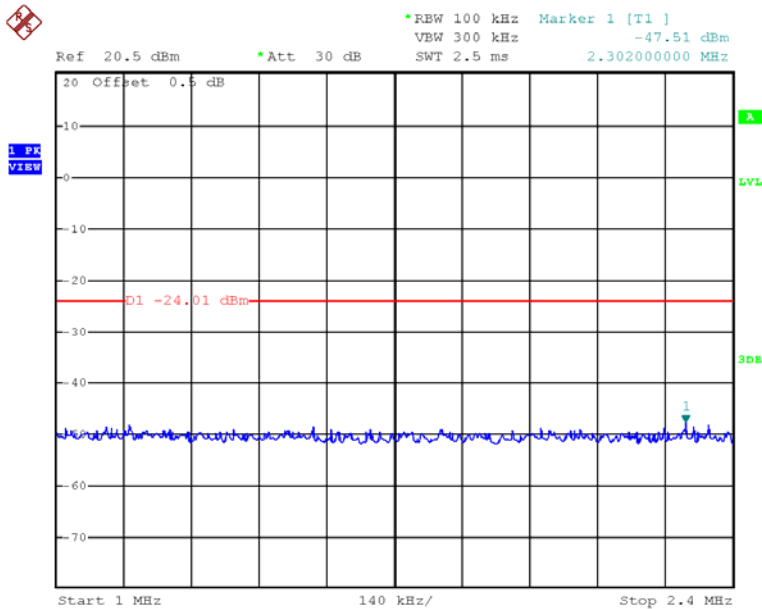


802.11g, Lowest Channel, Plot B

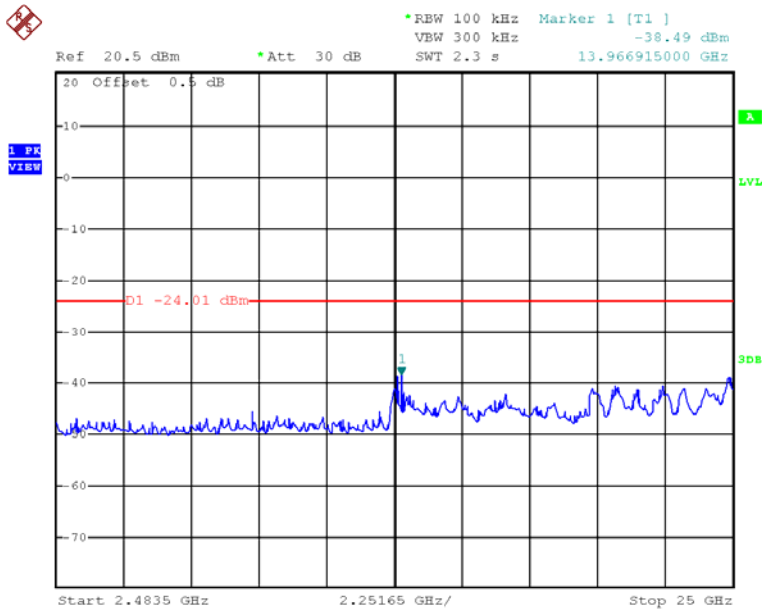


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11g, Middle Channel, Plot A

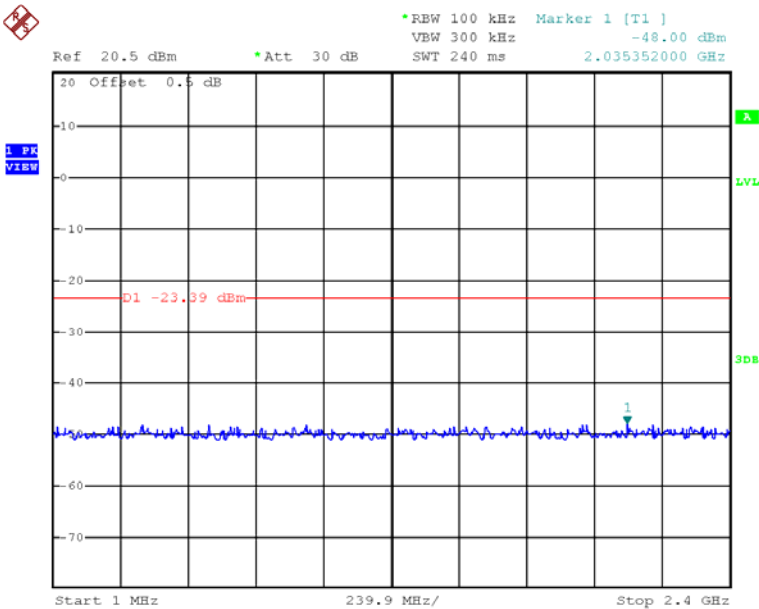


802.11g, Middle Channel, Plot B

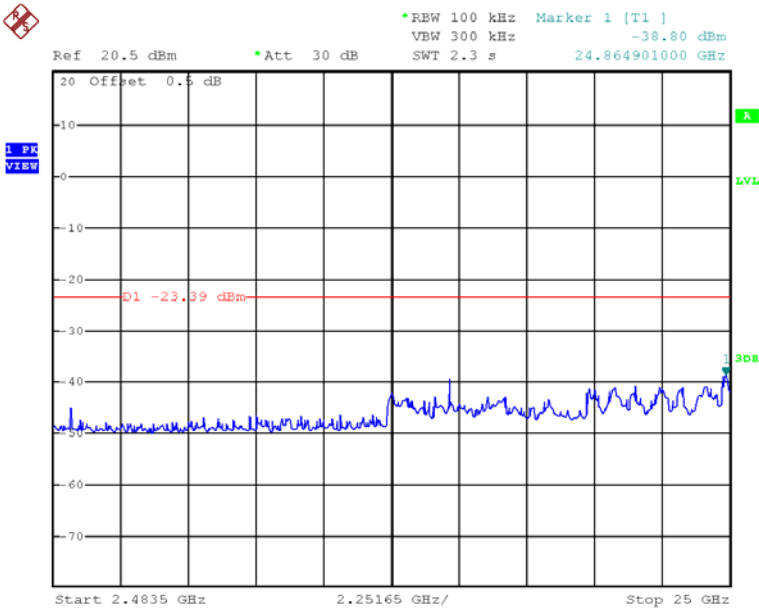


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11g, Highest Channel, Plot A

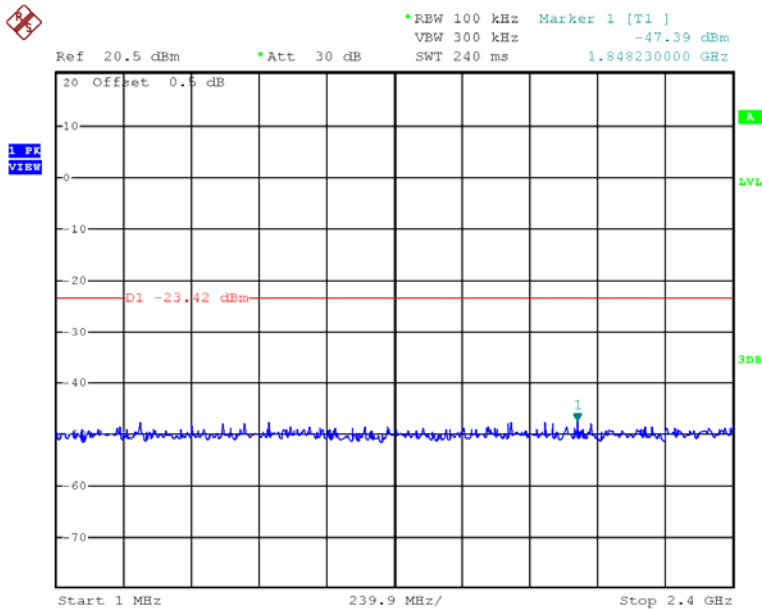


802.11g, Highest Channel, Plot B

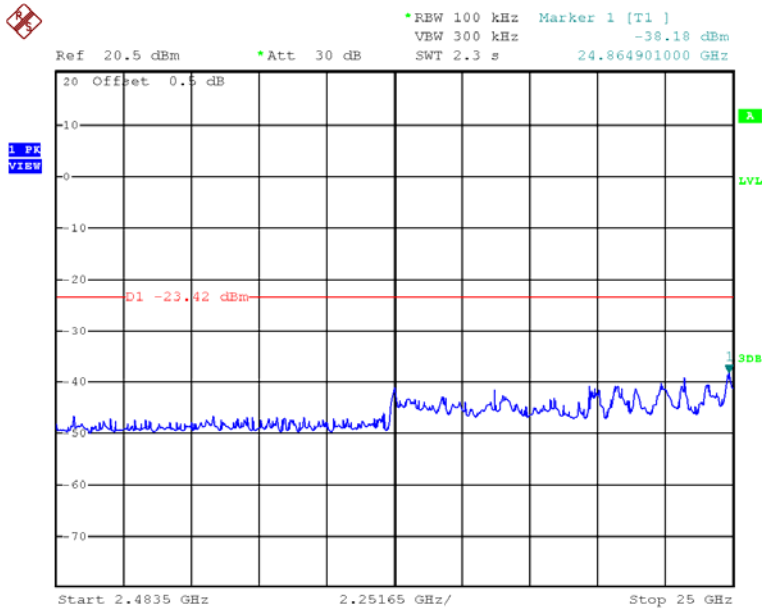


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (20MHz), Lowest Channel

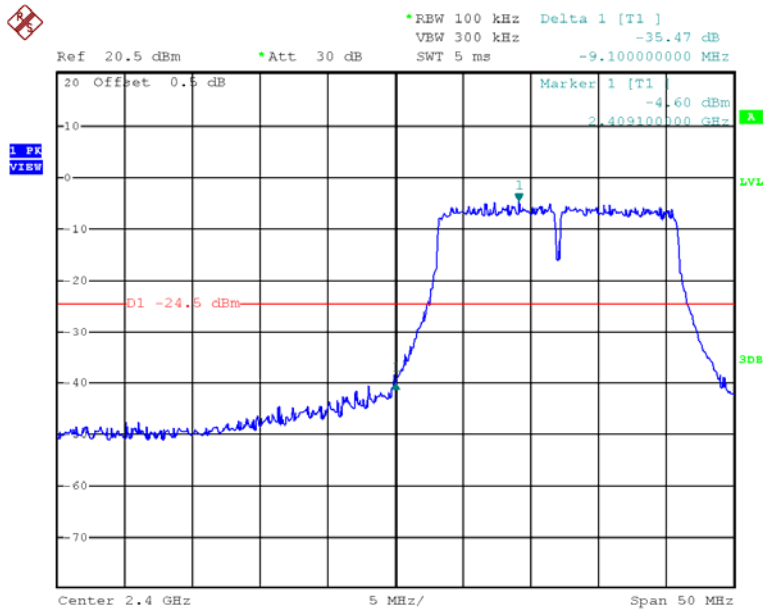


802.11n (20MHz), Highest Channel

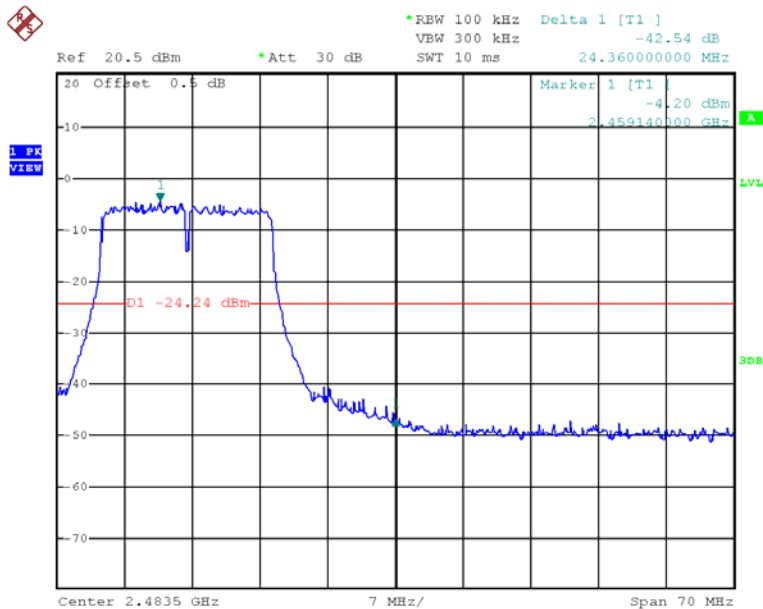


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (20MHz), Lowest Channel, Plot A

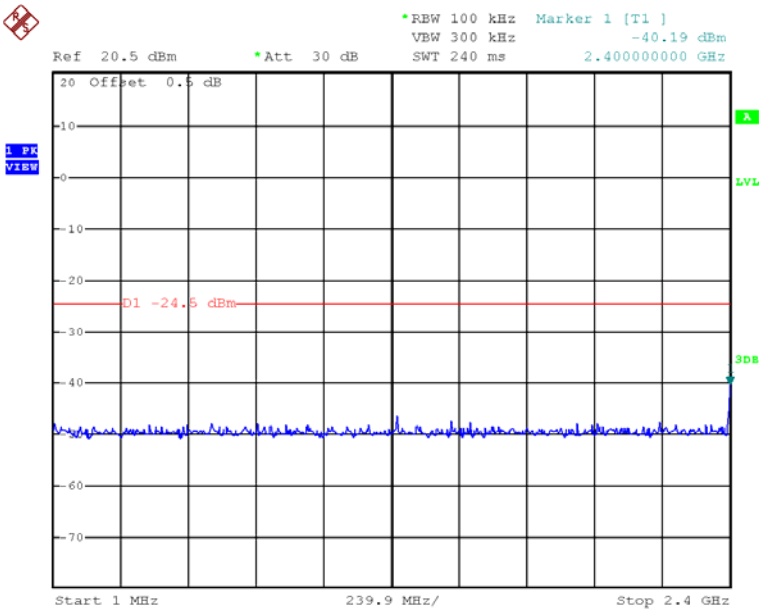


802.11n (20MHz), Lowest Channel, Plot B

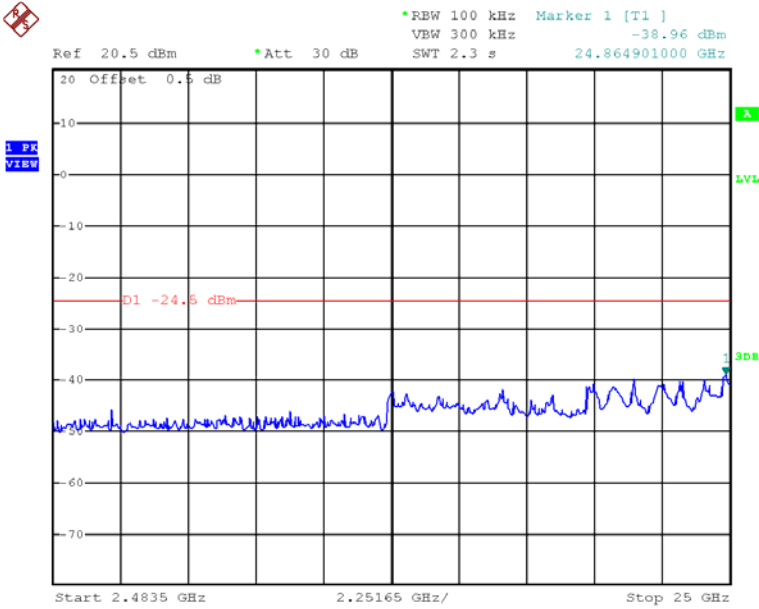


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (20MHz), Middle Channel, Plot A

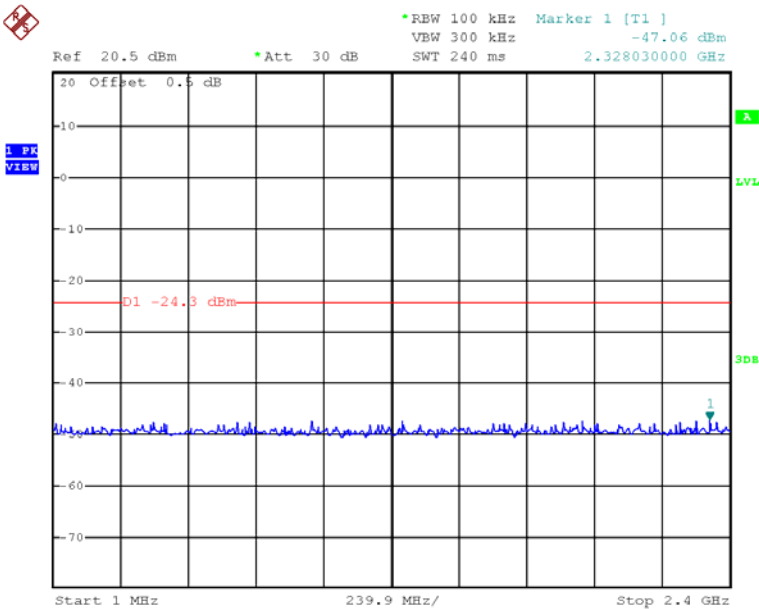


802.11n (20MHz), Middle Channel, Plot B

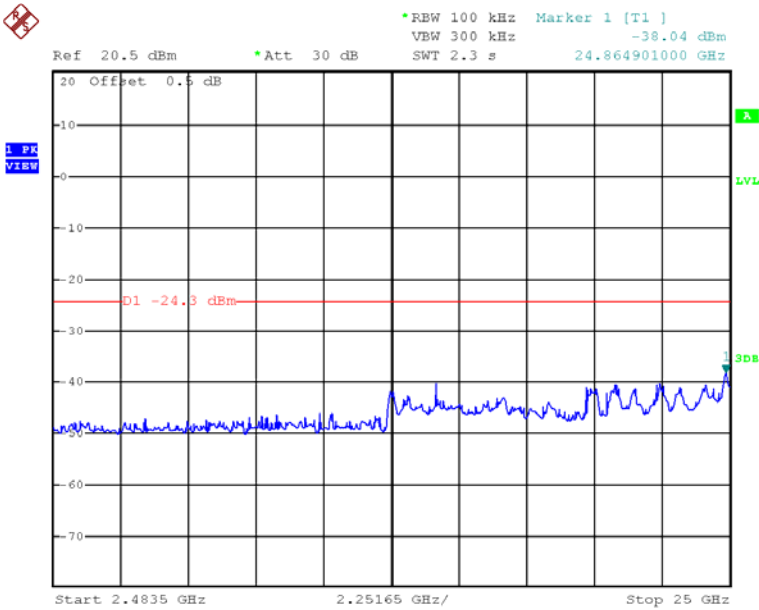


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (20MHz), Highest Channel, Plot A

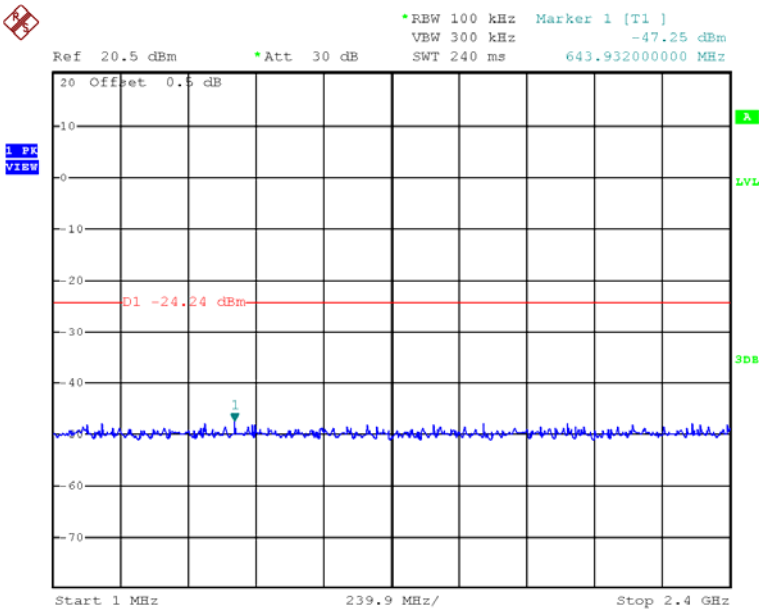


802.11n (20MHz), Highest Channel, Plot B

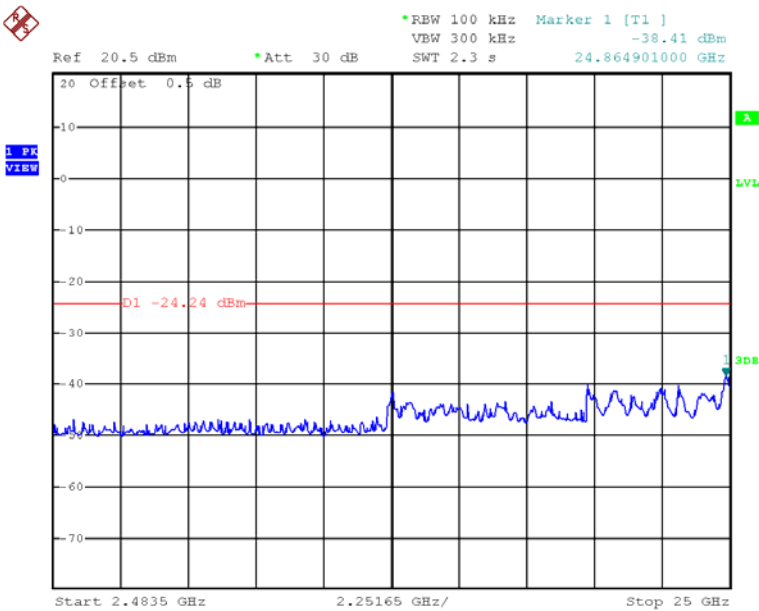


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (40MHz), Lowest Channel

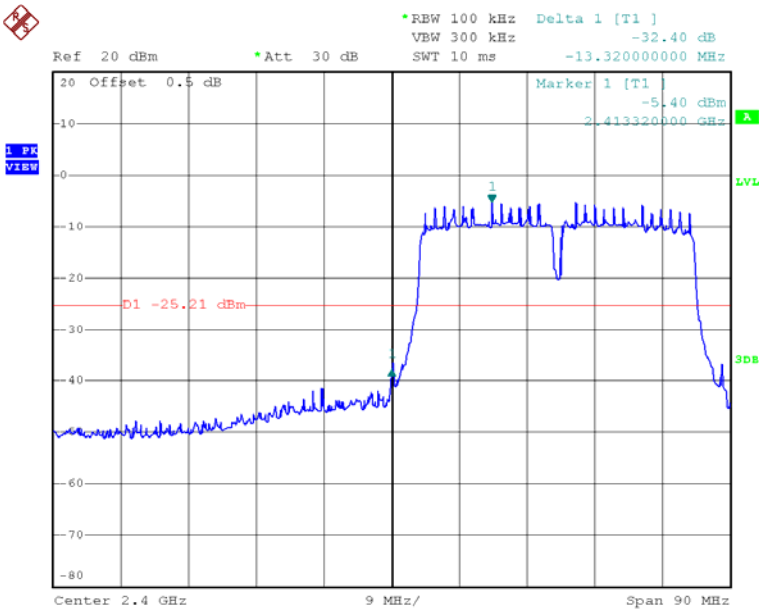


802.11n (40MHz), Highest Channel

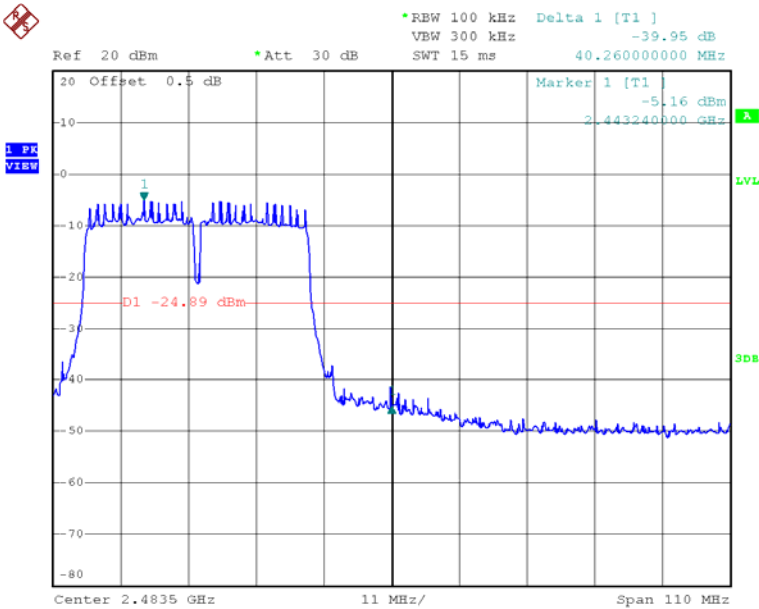


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (40MHz), Lowest Channel, Plot A

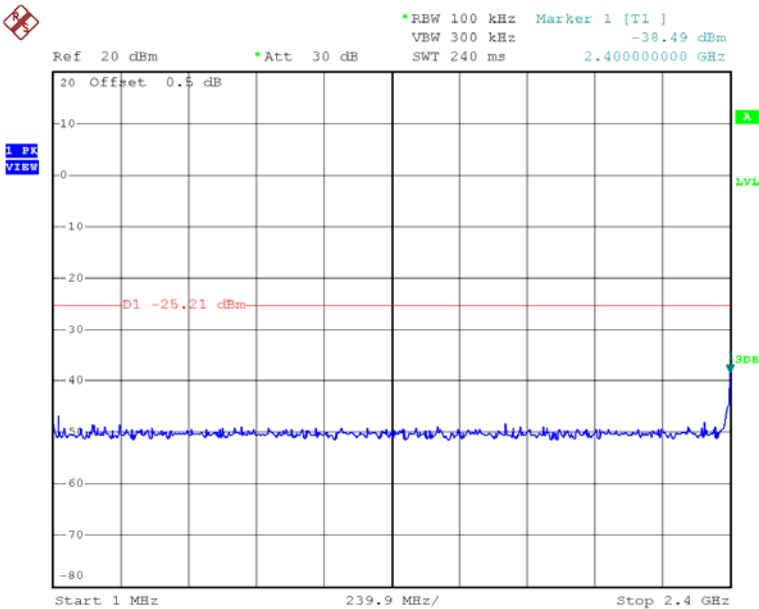


802.11n (40MHz), Lowest Channel, Plot B

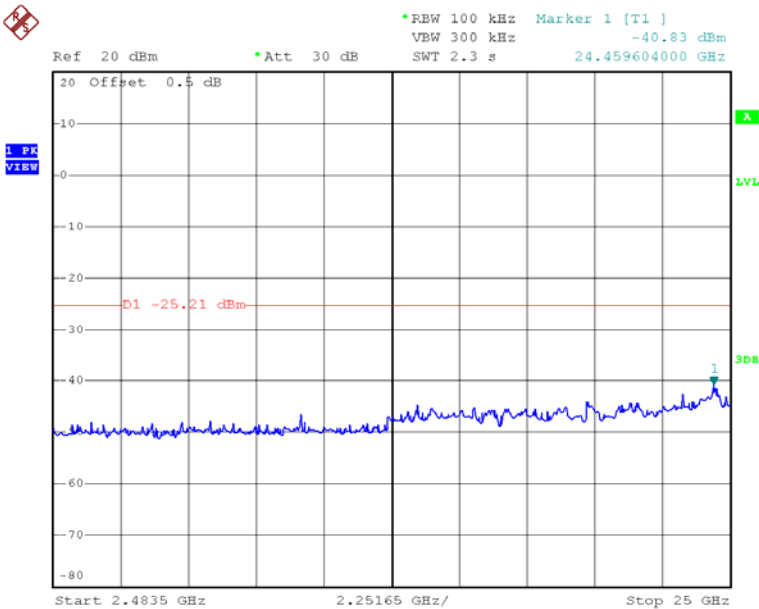


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (40MHz), Middle Channel, Plot A

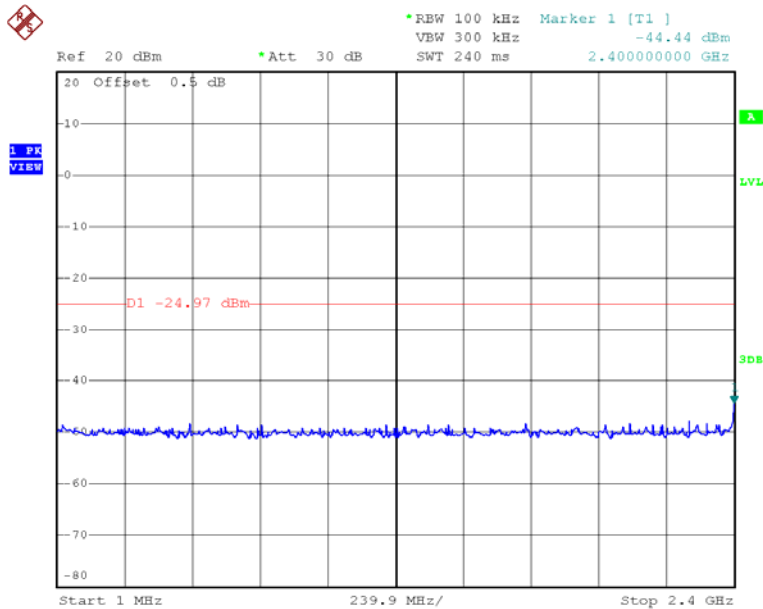


802.11n (40MHz), Middle Channel, Plot B

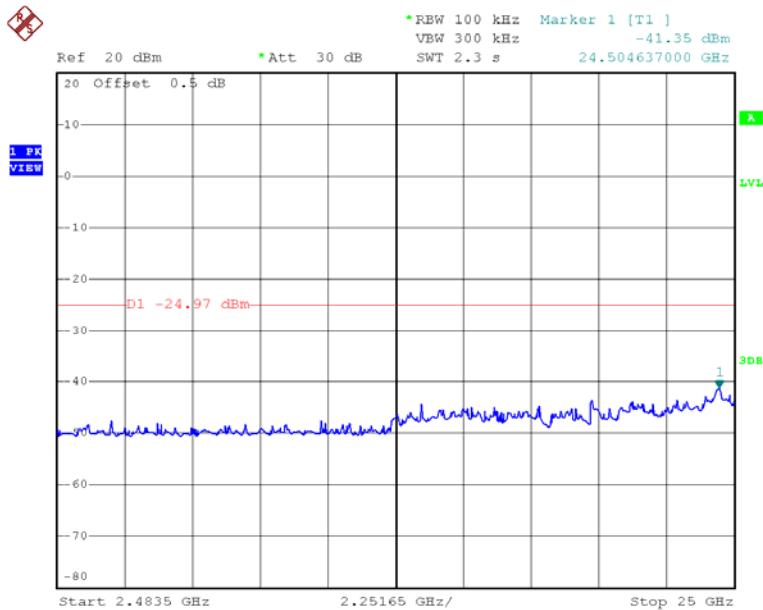


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (40MHz), Highest Channel, Plot A

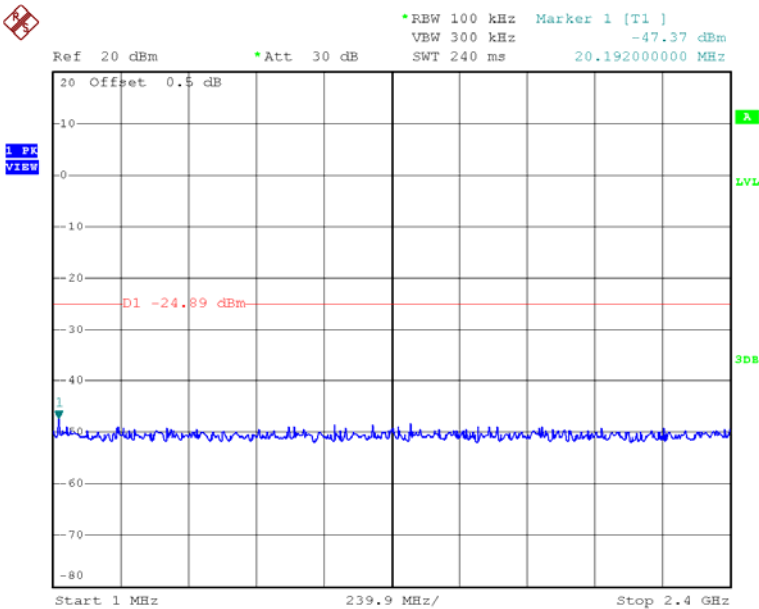

802.11n (40MHz), Highest Channel, Plot B

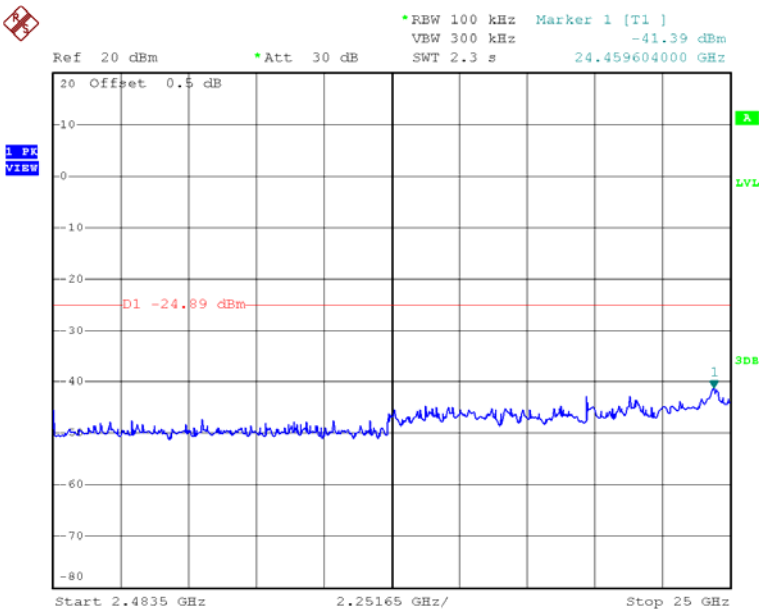

TEST REPORT

4.5 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where FS = Field Strength in dB μ V/m

RA = Receiver Amplitude (including preamplifier) in dB μ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 27.0 dB μ V/m. This value in dB μ V/m is converted to its corresponding level in μ V/m.

$$RA = 62.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$PD = 0.0 \text{ dB}$$

$$AV = -10 \text{ dB}$$

$$FS = 62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

TEST REPORT

4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

4.6.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission
at

100 MHz

The worst case radiated emission configuration photographs are saved with filename: config photos.pdf

4.6.2 Radiated Emission Data

The data in tables 1-10 list the significant emission frequencies, the limit and the margin of compliance.

Judgement -

Passed by 0.5 dB margin

TEST REPORT

RADIATED EMISSION DATA

Mode: TX-Channel 01

Table 1
IEEE 802.11b (DSSS, 11 Mbps)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>4824.000</i>	<i>31.2</i>	<i>33</i>	<i>34.9</i>	<i>33.1</i>	<i>54.0</i>	<i>-20.9</i>
<i>H</i>	<i>12060.000</i>	<i>32.1</i>	<i>33</i>	<i>40.5</i>	<i>39.6</i>	<i>54.0</i>	<i>-14.4</i>
<i>H</i>	<i>14472.000</i>	<i>33.6</i>	<i>33</i>	<i>40.0</i>	<i>40.6</i>	<i>54.0</i>	<i>-13.4</i>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>4824.000</i>	<i>42.8</i>	<i>33</i>	<i>34.9</i>	<i>44.7</i>	<i>74.0</i>	<i>-29.3</i>
<i>H</i>	<i>12060.000</i>	<i>44.1</i>	<i>33</i>	<i>40.5</i>	<i>51.6</i>	<i>74.0</i>	<i>-22.4</i>
<i>H</i>	<i>14472.000</i>	<i>45.6</i>	<i>33</i>	<i>40.0</i>	<i>52.6</i>	<i>74.0</i>	<i>-21.4</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

TEST REPORT

Mode: TX-Channel 06

Table 2
IEEE 802.11b (DSSS, 11 Mbps)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	4874.000	31.0	33	34.9	32.9	54.0	-21.1
H	7311.000	29.7	33	37.9	34.6	54.0	-19.4
H	12185.000	31.9	33	40.5	39.4	54.0	-14.6

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	4874.000	42.5	33	34.9	44.4	74.0	-29.6
H	7311.000	40.5	33	37.9	45.4	74.0	-28.6
H	12185.000	43.8	33	40.5	51.3	74.0	-22.7

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

TEST REPORT

Mode: TX-Channel 11

Table 3
IEEE 802.11b (DSSS, 11 Mbps)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>2483.500</i>	<i>51.6</i>	<i>33</i>	<i>29.4</i>	<i>48.0</i>	<i>94.0</i>	<i>-46.0</i>
<i>H</i>	<i>4924.000</i>	<i>30.8</i>	<i>33</i>	<i>34.9</i>	<i>32.7</i>	<i>54.0</i>	<i>-21.3</i>
<i>H</i>	<i>7386.000</i>	<i>29.9</i>	<i>33</i>	<i>37.9</i>	<i>34.8</i>	<i>54.0</i>	<i>-19.2</i>
<i>H</i>	<i>12310.000</i>	<i>31.8</i>	<i>33</i>	<i>40.5</i>	<i>39.3</i>	<i>54.0</i>	<i>-14.7</i>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>2483.500</i>	<i>62.2</i>	<i>33</i>	<i>29.4</i>	<i>58.6</i>	<i>114.0</i>	<i>-55.4</i>
<i>H</i>	<i>4924.000</i>	<i>42.6</i>	<i>33</i>	<i>34.9</i>	<i>44.5</i>	<i>74.0</i>	<i>-29.5</i>
<i>H</i>	<i>7386.000</i>	<i>40.7</i>	<i>33</i>	<i>37.9</i>	<i>45.6</i>	<i>74.0</i>	<i>-28.4</i>
<i>H</i>	<i>12310.000</i>	<i>43.6</i>	<i>33</i>	<i>40.5</i>	<i>51.1</i>	<i>74.0</i>	<i>-22.9</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

TEST REPORT

Mode: TX-Channel 01

Table 4
IEEE 802.11g (OFDM, 54 Mbps)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>4824.000</i>	<i>31.1</i>	<i>33</i>	<i>34.9</i>	<i>33.0</i>	<i>54.0</i>	<i>-21.0</i>
<i>H</i>	<i>12060.000</i>	<i>31.6</i>	<i>33</i>	<i>40.5</i>	<i>39.1</i>	<i>54.0</i>	<i>-14.9</i>
<i>H</i>	<i>14472.000</i>	<i>33.2</i>	<i>33</i>	<i>40.0</i>	<i>40.2</i>	<i>54.0</i>	<i>-13.8</i>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>4824.000</i>	<i>42.7</i>	<i>33</i>	<i>34.9</i>	<i>44.6</i>	<i>74.0</i>	<i>-29.4</i>
<i>H</i>	<i>12060.000</i>	<i>43.7</i>	<i>33</i>	<i>40.5</i>	<i>51.2</i>	<i>74.0</i>	<i>-22.8</i>
<i>H</i>	<i>14472.000</i>	<i>45.4</i>	<i>33</i>	<i>40.0</i>	<i>52.4</i>	<i>74.0</i>	<i>-21.6</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

TEST REPORT

Mode: TX-Channel 06

Table 5
IEEE 802.11g (OFDM, 54 Mbps)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>4874.000</i>	<i>31.2</i>	<i>33</i>	<i>34.9</i>	<i>33.1</i>	<i>54.0</i>	<i>-20.9</i>
<i>H</i>	<i>7311.000</i>	<i>30.0</i>	<i>33</i>	<i>37.9</i>	<i>34.9</i>	<i>54.0</i>	<i>-19.1</i>
<i>H</i>	<i>12185.000</i>	<i>31.8</i>	<i>33</i>	<i>40.5</i>	<i>39.3</i>	<i>54.0</i>	<i>-14.7</i>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>4874.000</i>	<i>42.9</i>	<i>33</i>	<i>34.9</i>	<i>44.8</i>	<i>74.0</i>	<i>-29.2</i>
<i>H</i>	<i>7311.000</i>	<i>40.3</i>	<i>33</i>	<i>37.9</i>	<i>45.2</i>	<i>74.0</i>	<i>-28.8</i>
<i>H</i>	<i>12185.000</i>	<i>43.9</i>	<i>33</i>	<i>40.5</i>	<i>51.4</i>	<i>74.0</i>	<i>-22.6</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

TEST REPORT

Mode: TX-Channel 11

Table 6
IEEE 802.11g (OFDM, 54 Mbps)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2483.500	51.9	33	29.4	48.3	94.0	-45.7
H	4924.000	31.3	33	34.9	33.2	54.0	-20.8
H	7386.000	29.9	33	37.9	34.8	54.0	-19.2
H	12310.000	32.1	33	40.5	39.6	54.0	-14.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2483.500	62.7	33	29.4	59.1	114.0	-54.9
H	4924.000	42.9	33	34.9	44.8	74.0	-29.2
H	7386.000	40.3	33	37.9	45.2	74.0	-28.8
H	12310.000	44.1	33	40.5	51.6	74.0	-22.4

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

TEST REPORT

Mode: TX-Channel 01

Table 7
IEEE 802.11(20MHz) (OFDM, MCS7 Mbps)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>4824.000</i>	<i>30.6</i>	<i>33</i>	<i>34.9</i>	<i>32.5</i>	<i>54.0</i>	<i>-21.5</i>
<i>H</i>	<i>12060.000</i>	<i>31.4</i>	<i>33</i>	<i>40.5</i>	<i>38.9</i>	<i>54.0</i>	<i>-15.1</i>
<i>H</i>	<i>14472.000</i>	<i>33.5</i>	<i>33</i>	<i>40.0</i>	<i>40.5</i>	<i>54.0</i>	<i>-13.5</i>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>4824.000</i>	<i>42.5</i>	<i>33</i>	<i>34.9</i>	<i>44.4</i>	<i>74.0</i>	<i>-29.6</i>
<i>H</i>	<i>12060.000</i>	<i>43.5</i>	<i>33</i>	<i>40.5</i>	<i>51.0</i>	<i>74.0</i>	<i>-23.0</i>
<i>H</i>	<i>14472.000</i>	<i>45.7</i>	<i>33</i>	<i>40.0</i>	<i>52.7</i>	<i>74.0</i>	<i>-21.3</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

TEST REPORT

Mode: TX-Channel 06

Table 8
IEEE 802.11 n(20MHz) (OFDM, MCS7 Mbps)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>4874.000</i>	<i>31.3</i>	<i>33</i>	<i>34.9</i>	<i>33.2</i>	<i>54.0</i>	<i>-20.8</i>
<i>H</i>	<i>7311.000</i>	<i>30.5</i>	<i>33</i>	<i>37.9</i>	<i>35.4</i>	<i>54.0</i>	<i>-18.6</i>
<i>H</i>	<i>12185.000</i>	<i>31.5</i>	<i>33</i>	<i>40.5</i>	<i>39.0</i>	<i>54.0</i>	<i>-15.0</i>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>4874.000</i>	<i>43.0</i>	<i>33</i>	<i>34.9</i>	<i>44.9</i>	<i>74.0</i>	<i>-29.1</i>
<i>H</i>	<i>7311.000</i>	<i>40.6</i>	<i>33</i>	<i>37.9</i>	<i>45.5</i>	<i>74.0</i>	<i>-28.5</i>
<i>H</i>	<i>12185.000</i>	<i>43.7</i>	<i>33</i>	<i>40.5</i>	<i>51.2</i>	<i>74.0</i>	<i>-22.8</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

TEST REPORT

Mode: TX-Channel 11

Table 9
IEEE 802.11n (20MHz) (OFDM, MCS7 Mbps)

Polari- zation	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>2483.500</i>	<i>51.7</i>	<i>33</i>	<i>29.4</i>	<i>48.1</i>	<i>94.0</i>	<i>-45.9</i>
<i>H</i>	<i>4924.000</i>	<i>31.1</i>	<i>33</i>	<i>34.9</i>	<i>33.0</i>	<i>54.0</i>	<i>-21.0</i>
<i>H</i>	<i>7386.000</i>	<i>30.1</i>	<i>33</i>	<i>37.9</i>	<i>35.0</i>	<i>54.0</i>	<i>-19.0</i>
<i>H</i>	<i>12310.000</i>	<i>31.7</i>	<i>33</i>	<i>40.5</i>	<i>39.2</i>	<i>54.0</i>	<i>-14.8</i>

Polari- zation	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>2483.500</i>	<i>62.5</i>	<i>33</i>	<i>29.4</i>	<i>58.9</i>	<i>114.0</i>	<i>-55.1</i>
<i>H</i>	<i>4924.000</i>	<i>42.8</i>	<i>33</i>	<i>34.9</i>	<i>44.7</i>	<i>74.0</i>	<i>-29.3</i>
<i>H</i>	<i>7386.000</i>	<i>40.4</i>	<i>33</i>	<i>37.9</i>	<i>45.3</i>	<i>74.0</i>	<i>-28.7</i>
<i>H</i>	<i>12310.000</i>	<i>43.9</i>	<i>33</i>	<i>40.5</i>	<i>51.4</i>	<i>74.0</i>	<i>-22.6</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement
 3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

TEST REPORT

Mode: Normal Operation

Table 10


Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	30.118	43.4	16	10.0	37.4	40.0	-2.6
V	34.384	42.0	16	10.0	36.0	40.0	-4.0
V	35.237	41.5	16	10.0	35.5	40.0	-4.5
V	82.037	44.7	16	7.0	35.7	40.0	-4.3
V	98.368	45.2	16	12.0	41.2	43.5	-2.3
V	100.000	47.0	16	12.0	43.0	43.5	-0.5
V	101.659	44.3	16	13.0	41.3	43.5	-2.2
V	103.121	44.1	16	13.0	41.1	43.5	-2.4
V	118.356	42.4	16	14.0	40.4	43.5	-3.1
V	145.046	41.3	16	14.0	39.3	43.5	-4.2
H	189.165	40.2	16	16.0	40.2	43.5	-3.3
H	278.012	30.7	16	22.0	36.7	46.0	-9.3
H	693.118	27.0	16	30.0	41.0	46.0	-5.0

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.


TEST REPORT

4.6.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

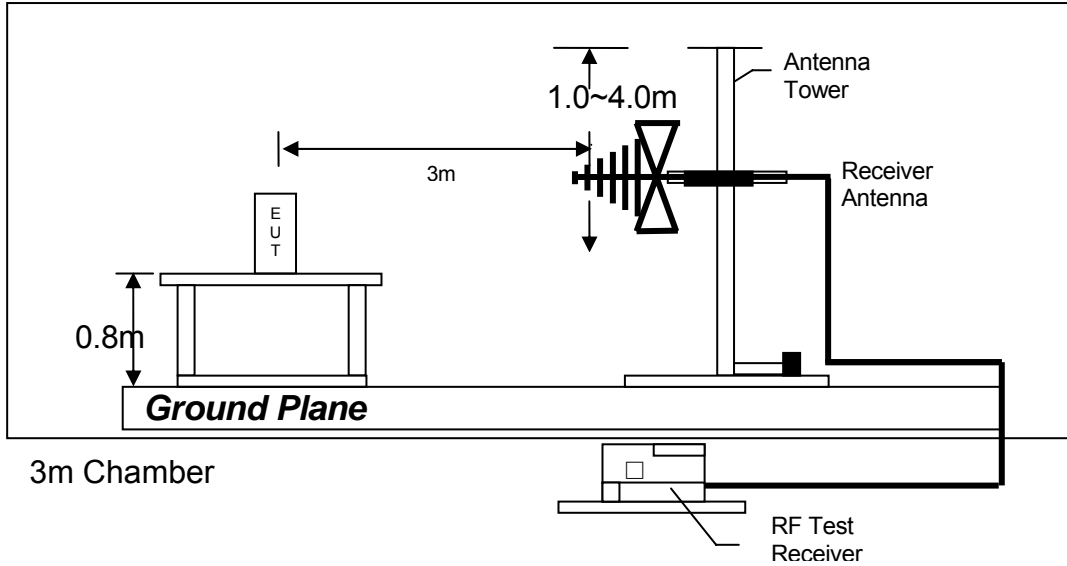

Test setup of radiated emissions up to 1GHz

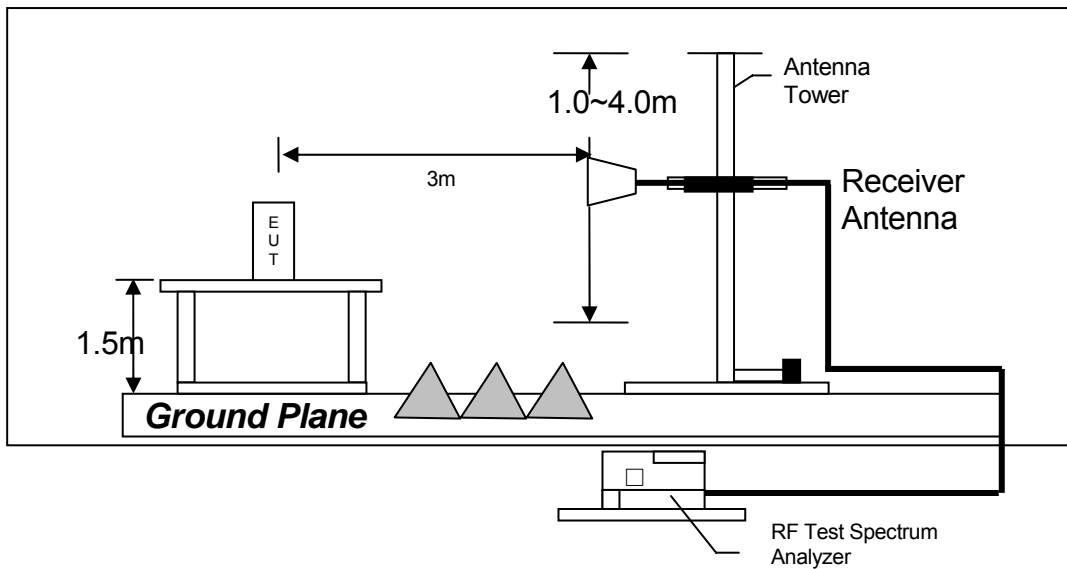

Test setup of radiated emissions above 1GHz

TEST REPORT

4.6.4 Transmitter Duty Cycle Calculation

Not applicable – No average factor is required.

TEST REPORT

4.7 AC Power Line Conducted Emission

- ☐ Not applicable – EUT is only powered by battery for operation.
- ☒ EUT connects to AC power line. Emission Data is listed in following pages.
- ☐ Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

4.7.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration
at

30 MHz

The worst case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

4.7.2 AC Power Line Conducted Emission Data


The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by 12.31 dB margin compare with Quasi-peak limit

TEST REPORT

AC POWER LINE CONDUCTED EMISSION

Worst Case: Transmitting

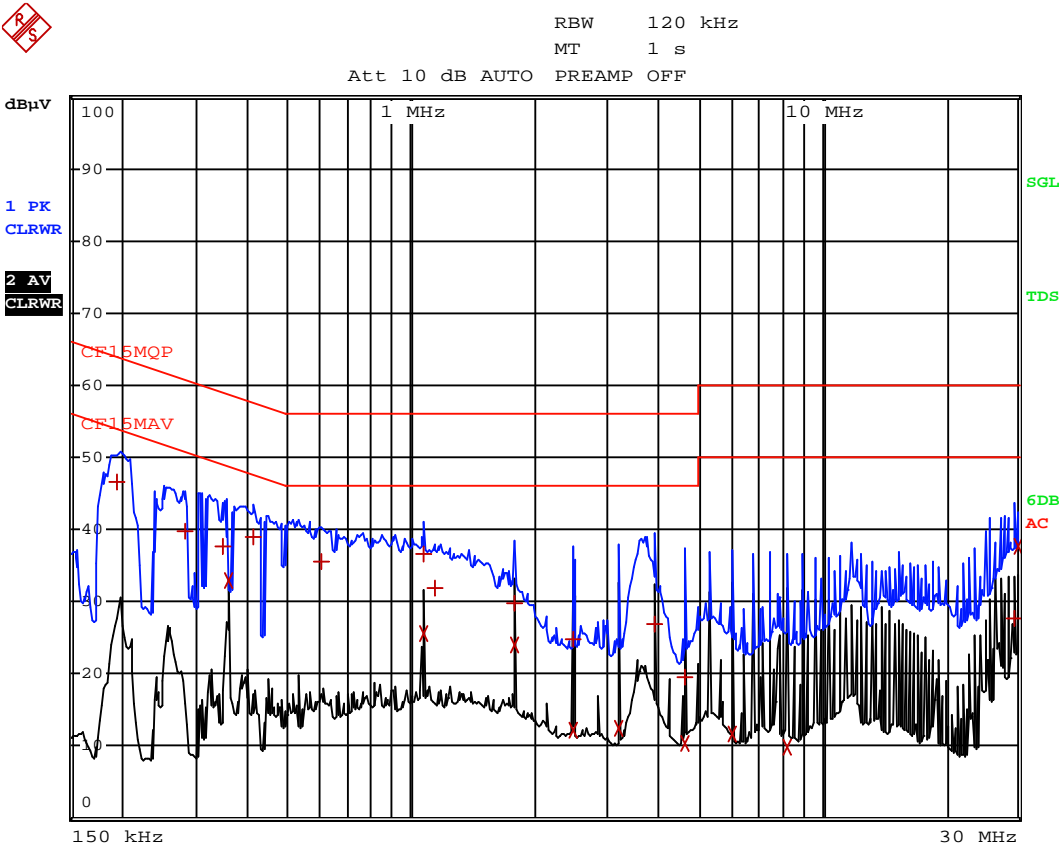

TEST REPORT


Worst Case: Transmitting

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV		DELTA LIMIT dB
1 Quasi Peak	195 kHz	46.50	N	-17.32
1 Quasi Peak	280.5 kHz	39.79	L1	-21.01
1 Quasi Peak	352.5 kHz	37.78	L1	-21.11
2 CISPR Average	357 kHz	32.92	N	-15.87
1 Quasi Peak	411 kHz	38.85	L1	-18.77
1 Quasi Peak	600 kHz	35.59	N	-20.40
2 CISPR Average	1.068 MHz	25.65	N	-20.34
1 Quasi Peak	1.0725 MHz	36.67	L1	-19.32
1 Quasi Peak	1.14 MHz	31.76	N	-24.23
1 Quasi Peak	1.7835 MHz	29.80	L1	-26.19
2 CISPR Average	1.7835 MHz	23.95	L1	-22.04
1 Quasi Peak	2.4945 MHz	24.69	N	-31.30
2 CISPR Average	2.4945 MHz	12.18	L1	-33.81
2 CISPR Average	3.21 MHz	12.50	N	-33.50
1 Quasi Peak	3.921 MHz	26.85	N	-29.14
1 Quasi Peak	4.6365 MHz	19.44	N	-36.55
2 CISPR Average	4.6365 MHz	10.46	L1	-35.53
2 CISPR Average	6.063 MHz	11.71	L1	-38.28
2 CISPR Average	8.205 MHz	9.79	N	-40.20
1 Quasi Peak	29.2875 MHz	27.79	L1	-32.20

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV		DELTA LIMIT dB
2 CISPR Average	30 MHz	37.68	N	-12.31

TEST REPORT

4.7.3 Conducted Emission Test Setup

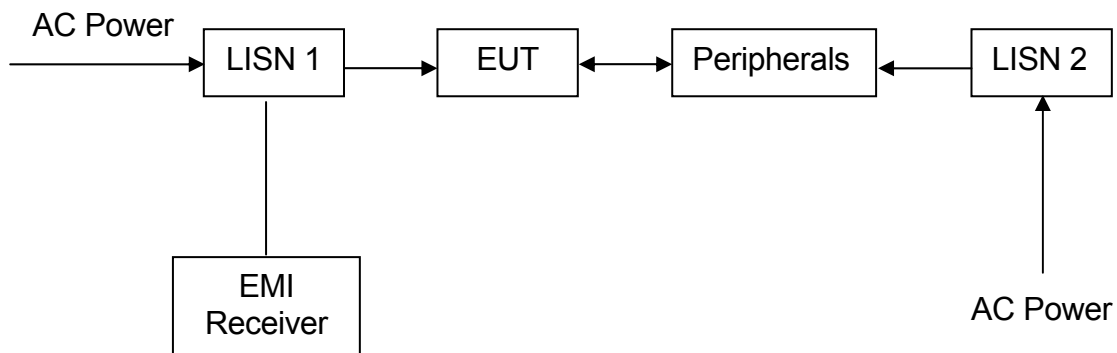

TEST REPORT

EXHIBIT 5 EQUIPMENT LIST

5.0 EQUIPMENT LIST

1) Radiated Emissions Test

EQUIPMENT	EMI TEST RECEIVER	SPECTRUM ANALYZER	LOG PERIODIC ANTENNA
Registration No.	EW-3156	EW-2466	EW-0447
Manufacturer	R&S	R&S	EMCO
Model No.	ESR26	FSP30	3146
Calibration Date	Dec. 06, 2016	Oct. 03, 2016	May 18, 2016
Calibration Due Date	Dec. 06, 2017	Aug. 20, 2017	Nov. 18, 2017

EQUIPMENT	BICONICAL ANTENNA	DOUBLE RIDGED GUIDE ANTENNA	Notch Filter (cutoff frequency 2.4GHz to 2.5GHz) 2 pieces
Registration No.	EW-0571	EW-0194	EW-2213
Manufacturer	EMCO	EMCO	MICROTRONICS
Model No.	3104C	3115	BRM50701-02
Calibration Date	May 18, 2016	Aug. 10, 2016	May 26, 2017
Calibration Due Date	Nov. 18, 2017	Feb. 10, 2018	May 26, 2018

EQUIPMENT	Solid State Low Noise Preamplifier Assembly (1 - 18)GHz	RF Pre-amplifier 3 pcs (9kHz to 40GHz)
Registration No.	EW-3229	EW-3006c
Manufacturer	BONN ELEKTRO	SCHWARZBECK
Model No.	BLMA 0118-5G	BBV 9718
Calibration Date	Oct. 24, 2016	23-Mar-2017
Calibration Due Date	Oct. 24, 2017	23-Mar-2018

EQUIPMENT	12m Double Shield RF Cable	12 metre RF Cable 40GHz
Registration No.	EW-1852	EW-2774
Manufacturer	RADIALL	GREATBILLION
Model No.	N(m)-RG142 - N(m)	SMA m-m ra 12m 40G outdoor
Calibration Date	Nov. 21, 2016	Nov. 24, 2016
Calibration Due Date	Oct. 13, 2017	Nov. 24, 2017

2) Conducted Emissions Test

EQUIPMENT	EMI TEST RECEIVER	LISN	PULSE LIMITER
Registration No.	EW-2251	EW-2874	EW-3248
Manufacturer	R&S	R&S	R&S
Model No.	ESCI	ENV-216	ESH3-Z2
Calibration Date	Mar. 03, 2017	Mar. 16, 2017	Oct. 12, 2016
Calibration Due Date	Mar. 03, 2018	Mar. 16, 2018	Oct. 12, 2017

TEST REPORT

3) Conductive Measurement Test

Equipment	Spectrum Analyzer	RF Power Meter with Power Sensor (N1921A)
Registration No.	EW-2466	EW-2270
Manufacturer	R&S	AGILENTTECH
Model No.	FSP30	N1911A
Calibration Date	Oct. 03, 2016	Jan. 04, 2017
Calibration Due Date	Aug. 20, 2017	Jan. 04, 2018