




FCC SAR TEST REPORT

FCC ID : UZ7PS20J
Equipment : PS20 Personal Shopper
Brand Name : ZEBRA
Model Name : PS20J
Applicant : Zebra Technologies Corporation
1 Zebra Plaza Holtsville, NY 11742
Manufacturer : Zebra Technologies Corporation
1 Zebra Plaza Holtsville, NY 11742
Standard : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

The product was received on Jun. 27, 2018 and testing was started from Aug. 28, 2018 and completed on Sep. 01, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance	4
2. Guidance Applied.....	4
3. Equipment Under Test (EUT) Information	5
3.1 General Information	5
4. RF Exposure Limits.....	6
4.1 Uncontrolled Environment.....	6
4.2 Controlled Environment.....	6
5. Specific Absorption Rate (SAR).....	7
5.1 Introduction	7
5.2 SAR Definition.....	7
6. System Description and Setup	8
6.1 E-Field Probe	9
6.2 Data Acquisition Electronics (DAE)	9
6.3 Phantom.....	10
6.4 Device Holder.....	11
7. Measurement Procedures	12
7.1 Spatial Peak SAR Evaluation.....	12
7.2 Power Reference Measurement.....	13
7.3 Area Scan	13
7.4 Zoom Scan.....	14
7.5 Volume Scan Procedures.....	14
7.6 Power Drift Monitoring.....	14
8. Test Equipment List.....	15
9. System Verification	16
9.1 Tissue Simulating Liquids.....	16
9.2 Tissue Verification	17
9.3 System Performance Check Results.....	18
10. Conducted RF Output Power (Unit: dBm).....	19
11. Bluetooth Body-worn SAR Exclusions Applied	31
12. Antenna Location	32
13. SAR Test Results	33
13.1 Body-worn SAR.....	34
13.2 Extremity SAR.....	35
13.3 Repeated SAR Measurement	37
14. Simultaneous Transmission Analysis.....	38
14.1 Body-Worn Accessory Exposure Conditions	39
14.2 Extremity Exposure Conditions	39
14.3 SPLSR Evaluation and Analysis.....	40
15. Uncertainty Assessment	41
16. References.....	43
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	



History of this test report

Report No.	Version	Description	Issued Date
FA860204	01	Initial issue of report	Sep. 13, 2018

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Zebra Technologies Corporation, PS20 Personal Shopper, PS20J, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary		Highest Simultaneous Transmission 1g SAR (W/kg)	Highest Simultaneous Transmission 10g SAR (W/kg)
		Body-worn (Separation 0mm)	Extremity (Separation 0mm)		
		1g SAR (W/kg)	10g SAR (W/kg)		
DTS	2.4GHz WLAN	0.39	1.34	0.69	2.50
NII	5GHz WLAN	1.12	3.89	1.17	3.91
DSS	Bluetooth		0.02	1.17	3.91
Date of Testing:		2018/8/28 ~ 2018/9/1			

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.(FCC). This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

Reviewed by: Jason Wang

Report Producer: Wan Liu

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02

3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	PS20 Personal Shopper
Brand Name	ZEBRA
Model Name	PS20J
FCC ID	UZ7PS20J
Wireless Technology and Frequency Range	WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	WLAN 2.4GHz : 802.11b/g/n/ac HT20/HT40/VHT20/VHT40 WLAN 5GHz : 802.11a/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
HW Version	EV3
SW Version	91-09-06.00.ON-U00-STD
FW Version	91-09-06.00.ON-U00-STD
MFD	06JUL18
EUT Stage	Engineering sample
Remark:	
1. This device has 2 samples, Plus and Base. RF exposure chose Plus to evaluate full SAR test, and Base verified the worst cases of Plus.	
2. When EUT is placed into the holster, only front face of EUT will toward to the human body.	

Specification of Accessories				
Battery	Brand Name	Zebra	Part Number	BT-000351
Holster	Brand Name	Agora	Part Number	SG-PS20-SFTHLT-01

4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:



- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

6.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE

6.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

6.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

7. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

7.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm $2 - 3$ GHz: ≤ 5 mm*	$3 - 4$ GHz: ≤ 5 mm* $4 - 6$ GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	$3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	$3 - 4$ GHz: ≤ 3 mm $4 - 5$ GHz: ≤ 2.5 mm $5 - 6$ GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	$3 - 4$ GHz: ≥ 28 mm $4 - 5$ GHz: ≥ 25 mm $5 - 6$ GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit	D2450V2	929	Mar. 01, 2018	Feb. 28, 2019
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Sep. 26, 2017	Sep. 25, 2018
SPEAG	Data Acquisition Electronics	DAE4	1424	Jan. 18, 2018	Jan. 17, 2019
SPEAG	Data Acquisition Electronics	DAE4	853	Jul. 24, 2018	Jul. 23, 2019
SPEAG	Dosimetric E-Field Probe	EX3DV4	3976	Jan. 23, 2018	Jan. 22, 2019
SPEAG	Dosimetric E-Field Probe	EX3DV4	7306	Jul. 26, 2018	Jul. 25, 2019
RCPTWN	Thermometer	HTC-1	TM685-1	Mar. 16, 2018	Mar. 15, 2019
RCPTWN	Thermometer	HTC-1	TM281-1	Mar. 16, 2018	Mar. 15, 2019
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Dec. 07, 2017	Dec. 06, 2018
Agilent	ENA Network Analyzer	E5071C	MY46316648	Jan. 17, 2018	Jan. 16, 2019
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 26, 2017	Sep. 25, 2018
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3169	Sep. 06, 2017	Sep. 05, 2018
Anritsu	Power Meter	ML2495A	1419002	May. 18, 2018	May. 17, 2019
Anritsu	Power Sensor	MA2411B	1339124	May. 18, 2018	May. 17, 2019
Anritsu	Power Meter	ML2495A	1218006	Oct. 06, 2017	Oct. 05, 2018
Anritsu	Power Sensor	MA2411B	1207363	Oct. 06, 2017	Oct. 05, 2018
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 28, 2018	Aug. 27, 2019
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 23, 2018	Jun. 22, 2019
Mini-Circuits	Power Amplifier	ZVE-8G+	D120604	Mar. 12, 2018	Mar. 11, 2019
Mini-Circuits	Power Amplifier	ZHL-42W+	QA1344002	Mar. 12, 2018	Mar. 11, 2019
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

9. System Verification

9.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.



Fig 10.1 Photo of Liquid Height for Head SAR



Fig 10.2 Photo of Liquid Height for Body SAR

9.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
2450	MSL	22.5	2.001	52.397	1.95	52.70	2.62	-0.57	±5	2018/8/30
5250	MSL	22.6	5.386	47.823	5.36	48.95	0.49	-2.30	±5	2018/8/28
5250	MSL	22.5	5.356	46.760	5.36	48.95	-0.07	-4.47	±5	2018/8/29
5250	MSL	22.2	5.486	46.795	5.36	48.95	2.35	-4.40	±5	2018/9/1
5600	MSL	22.6	5.839	47.234	5.77	48.50	1.20	-2.61	±5	2018/8/28
5600	MSL	22.5	5.801	46.225	5.77	48.50	0.54	-4.69	±5	2018/8/29
5600	MSL	22.2	5.946	46.178	5.77	48.50	3.05	-4.79	±5	2018/9/1
5750	MSL	22.5	6.033	45.920	5.94	48.28	1.57	-4.89	±5	2018/8/29
5750	MSL	22.2	6.158	46.021	5.94	48.28	3.67	-4.68	±5	2018/9/1

9.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2018/8/30	2450	MSL	250	D2450V2-929	EX3DV4 - SN7306	DAE4 Sn853	13.90	52.30	55.6	6.31
2018/8/28	5250	MSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE4 Sn1424	7.95	77.00	79.5	3.25
2018/8/29	5250	MSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE4 Sn1424	7.58	77.00	75.8	-1.56
2018/9/1	5250	MSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE4 Sn1424	7.98	77.00	79.8	3.64
2018/8/28	5600	MSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE4 Sn1424	7.87	80.10	78.7	-1.75
2018/8/29	5600	MSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE4 Sn1424	7.82	80.10	78.2	-2.37
2018/9/1	5600	MSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE4 Sn1424	8.01	80.10	80.1	0.00
2018/8/29	5750	MSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE4 Sn1424	7.57	75.10	75.7	0.80
2018/9/1	5750	MSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE4 Sn1424	7.80	75.10	78	3.86

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2018/8/30	2450	MSL	250	D2450V2-929	EX3DV4 - SN7306	DAE4 Sn853	6.42	24.40	25.68	5.25
2018/8/28	5250	MSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE4 Sn1424	2.20	21.30	22	3.29
2018/8/29	5250	MSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE4 Sn1424	2.02	21.30	20.2	-5.16
2018/9/1	5250	MSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE4 Sn1424	2.14	21.30	21.4	0.47
2018/8/28	5600	MSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE4 Sn1424	2.17	22.40	21.7	-3.13
2018/8/29	5600	MSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE4 Sn1424	2.15	22.40	21.5	-4.02
2018/9/1	5600	MSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE4 Sn1424	2.21	22.40	22.1	-1.34
2018/8/29	5750	MSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE4 Sn1424	2.07	20.80	20.7	-0.48
2018/9/1	5750	MSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE4 Sn1424	2.17	20.80	21.7	4.33

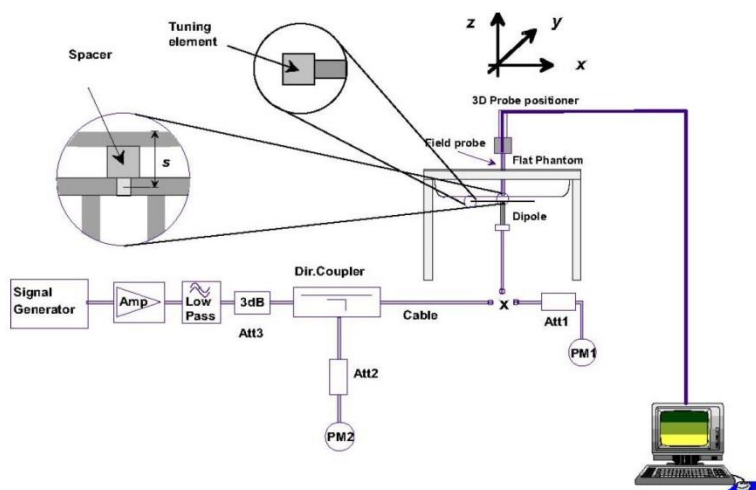


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

10. Conducted RF Output Power (Unit: dBm)

<WLAN Conducted Power>

General Note:

1. For each antenna, transmit power in SISO operation is larger than (or equal to) the power in MIMO operation, RF exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas operating in SISO mode.
2. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is $< 1.6\text{W/kg}$ and SAR peak to location ratio ≤ 0.04 , no additional SAR measurements for MIMO.
3. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
4. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
5. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
6. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.¹⁸ The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is $\leq 0.4\text{ W/kg}$, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is $> 0.4\text{ W/kg}$, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is $\leq 0.8\text{ W/kg}$ or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is $> 0.8\text{ W/kg}$, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is $\leq 1.2\text{ W/kg}$ or all required channels are tested.



<Non-beamforming Power Mode>

<2.4GHz WLAN SISO ANT 1>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	20.67	21.00	99.03
		2	2417	20.72	21.00	
		6	2437	20.94	21.00	
		10	2457	20.65	21.00	
		11	2462	20.80	21.00	
	802.11g 6Mbps	1	2412	18.61	19.00	94.39
		2	2417	18.94	19.00	
		6	2437	18.78	19.00	
		10	2457	18.91	19.00	
		11	2462	17.47	17.50	
	802.11n-HT20 MCS0	1	2412	18.82	19.00	94.00
		2	2417	18.75	19.00	
		6	2437	18.66	19.00	
		10	2457	18.71	19.00	
		11	2462	17.09	17.50	
	802.11n-HT40 MCS0	3	2422	17.08	17.50	91.18
		4	2427	18.23	18.50	
		6	2437	20.24	20.50	
		8	2447	17.72	18.00	
		9	2452	15.72	16.00	
	802.11ac-VHT20 MCS0	1	2412	18.81	19.00	94.00
		2	2417	18.71	19.00	
		6	2437	18.62	19.00	
		10	2457	18.67	19.00	
		11	2462	17.05	17.50	
	802.11ac-VHT40 MCS0	3	2422	17.06	17.50	90.29
		4	2427	18.20	18.50	
		6	2437	20.19	20.50	
		8	2447	17.64	18.00	
		9	2452	15.69	16.00	

<2.4GHz WLAN SISO ANT 2>

2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b 1Mbps	1	2412	20.96	21.00	99.03
		2	2417	20.93	21.00	
		6	2437	20.97	21.00	
		10	2457	20.94	21.00	
		11	2462	20.90	21.00	
	802.11g 6Mbps	1	2412	18.19	18.50	95.33
		2	2417	18.73	19.00	
		6	2437	18.77	19.00	
		10	2457	18.26	18.50	
		11	2462	17.01	17.50	
	802.11n-HT20 MCS0	1	2412	17.98	18.00	94.00
		2	2417	18.64	19.00	
		6	2437	18.70	19.00	
		10	2457	17.58	18.00	
		11	2462	16.87	17.00	
	802.11n-HT40 MCS0	3	2422	18.22	18.50	91.18
		4	2427	19.03	19.50	
		6	2437	20.08	20.50	
		8	2447	16.64	17.00	
		9	2452	15.25	15.50	
	802.11ac-VHT20 MCS0	1	2412	17.97	18.00	94.00
		2	2417	18.62	19.00	
		6	2437	18.66	19.00	
		10	2457	17.47	17.50	
		11	2462	16.81	17.00	
	802.11ac-VHT40 MCS0	3	2422	18.21	18.50	90.29
		4	2427	19.02	19.50	
		6	2437	20.04	20.50	
		8	2447	16.63	17.00	
		9	2452	15.14	15.50	

<2.4GHz WLAN SISO ANT 1+2>

	Mode	Channel	Frequency (MHz)	MIMO SISO Ant 1 Average power (dBm)	MIMO SISO Ant 1 Average power (dBm)	MIMO Per Chain Tune-Up Limit	Combined Average power (dBm)	Combined Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	20.40	20.99	21.00	23.72	24.00	99.02
		2	2417	20.57	20.70	21.00	23.65	24.00	
		6	2437	20.00	20.35	20.50	23.19	23.50	
		10	2457	20.69	20.97	21.00	23.84	24.00	
		11	2462	20.44	20.53	21.00	23.50	24.00	
	802.11g 6Mbps	1	2412	18.06	18.01	18.50	21.05	21.50	94.39
		2	2417	18.23	18.73	19.00	21.50	22.00	
		6	2437	18.15	18.70	19.00	21.44	22.00	
		10	2457	16.61	16.75	17.00	19.69	20.00	
		11	2462	15.23	15.37	15.50	18.33	18.50	
	802.11n-HT 20 MCS0	1	2412	18.41	18.47	18.50	21.45	21.50	95.00
		2	2417	18.19	18.03	18.50	21.12	21.50	
		6	2437	18.56	18.97	19.00	21.78	22.00	
		10	2457	17.17	17.07	17.50	20.13	20.50	
		11	2462	15.17	15.11	15.50	18.15	18.50	
	802.11n-HT 40 MCS0	3	2422	14.71	15.20	15.50	17.97	18.50	91.18
		4	2427	16.68	17.10	17.50	19.91	20.50	
		6	2437	15.50	16.05	16.50	18.79	19.50	
		8	2447	13.96	14.16	14.50	17.07	17.50	
		9	2452	12.43	12.64	13.00	15.55	16.00	
	802.11ac-V HT20 MCS0	1	2412	18.29	18.51	19.00	21.41	22.00	95.00
		2	2417	17.99	18.17	18.50	21.09	21.50	
		6	2437	18.47	19.03	19.50	21.77	22.50	
		10	2457	17.05	17.17	17.50	20.11	20.50	
		11	2462	15.04	15.21	15.50	18.14	18.50	
	802.11ac-V HT40 MCS0	3	2422	14.70	15.14	15.50	17.94	18.50	91.26
		4	2427	16.66	17.10	17.50	19.90	20.50	
		6	2437	15.50	15.90	16.00	18.71	19.00	
		8	2447	13.90	14.20	14.50	17.06	17.50	
		9	2452	12.50	12.55	13.00	15.54	16.00	

<5GHz WLAN ANT1>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	19.66	20.00	95.31
		40	5200	19.62	20.00	
		44	5220	19.76	20.00	
		48	5240	19.77	20.00	
	802.11n-HT20 MCS0	36	5180	19.38	19.50	94.97
		40	5200	19.35	19.50	
		44	5220	19.31	19.50	
		48	5240	19.35	19.50	
	802.11n-HT40 MCS0	38	5190	15.13	15.50	91.18
		46	5230	19.86	20.00	
	802.11ac-VHT20 MCS0	36	5180	19.32	19.50	95.50
		40	5200	19.30	19.50	
		44	5220	19.23	19.50	
		48	5240	19.30	19.50	
	802.11ac-VHT40 MCS0	38	5190	15.12	15.50	90.29
		46	5230	19.83	20.00	
	802.11ac-VHT80 MCS0	42	5210	15.69	16.00	89.09

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	19.88	20.00	95.31
		56	5280	19.85	20.00	
		60	5300	19.95	20.00	
		64	5320	19.94	20.00	
	802.11n-HT20 MCS0	52	5260	19.23	19.50	94.97
		56	5280	19.22	19.50	
		60	5300	19.31	19.50	
		64	5320	19.42	19.50	
	802.11n-HT40 MCS0	54	5270	19.93	20.00	91.18
		62	5310	19.82	20.00	
	802.11ac-VHT20 MCS0	52	5260	19.16	19.50	95.50
		56	5280	19.13	19.50	
		60	5300	19.20	19.50	
		64	5320	19.36	19.50	
	802.11ac-VHT40 MCS0	54	5270	19.89	20.00	90.29
		62	5310	19.79	20.00	
	802.11ac-VHT80 MCS0	58	5290	15.40	15.50	89.09

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	20.15	20.50	95.31
		116	5580	20.13	20.50	
		124	5620	20.10	20.50	
		132	5660	20.05	20.50	
		144	5720	20.49	20.50	
	802.11n-HT20 MCS0	100	5500	20.30	20.50	94.97
		116	5580	20.28	20.50	
		124	5620	20.26	20.50	
		132	5660	20.21	20.50	
		144	5720	20.02	20.50	
	802.11n-HT40 MCS0	102	5510	20.32	20.50	91.18
		110	5550	20.25	20.50	
		126	5630	20.22	20.50	
		134	5670	20.20	20.50	
		142	5710	20.18	20.50	
	802.11ac-VHT20 MCS0	100	5500	20.27	20.50	95.50
		116	5580	20.25	20.50	
		124	5620	20.22	20.50	
		132	5660	20.13	20.50	
		144	5720	20.01	20.50	
	802.11ac-VHT40 MCS0	102	5510	20.26	20.50	90.29
		110	5550	20.24	20.50	
		126	5630	20.20	20.50	
		134	5670	20.16	20.50	
		142	5710	20.14	20.50	
	802.11ac-VHT80 MCS0	106	5530	20.15	20.50	89.09
		122	5610	20.03	20.50	
		138	5690	20.02	20.50	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	20.21	20.50	95.31
		157	5785	20.11	20.50	
		165	5825	20.30	20.50	
	802.11n-HT20 MCS0	149	5745	20.48	20.50	94.97
		157	5785	20.42	20.50	
		165	5825	20.49	20.50	
	802.11n-HT40 MCS0	151	5755	20.17	20.50	91.18
		159	5795	20.49	20.50	
	802.11ac-VHT20 MCS0	149	5745	20.47	20.50	95.50
		157	5785	20.41	20.50	
		165	5825	20.48	20.50	
	802.11ac-VHT40 MCS0	151	5755	20.14	20.50	90.29
		159	5795	20.48	20.50	
	802.11ac-VHT80 MCS0	155	5775	20.45	20.50	89.09

<5GHz WLAN ANT2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	19.79	20.00	95.31
		40	5200	19.75	20.00	
		44	5220	19.61	20.00	
		48	5240	19.94	20.00	
	802.11n-HT20 MCS0	36	5180	19.48	19.50	95.00
		40	5200	19.46	19.50	
		44	5220	19.39	19.50	
		48	5240	19.33	19.50	
	802.11n-HT40 MCS0	38	5190	19.55	20.00	91.09
		46	5230	19.59	20.00	
	802.11ac-VHT20 MCS0	36	5180	19.43	19.50	95.00
		40	5200	19.40	19.50	
		44	5220	19.34	19.50	
		48	5240	19.30	19.50	
	802.11ac-VHT40 MCS0	38	5190	19.52	20.00	90.29
		46	5230	19.55	20.00	
	802.11ac-VHT80 MCS0	42	5210	19.35	19.50	90.24

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	19.98	20.00	95.31
		56	5280	19.97	20.00	
		60	5300	19.95	20.00	
		64	5320	19.41	19.50	
	802.11n-HT20 MCS0	52	5260	19.44	19.50	95.00
		56	5280	19.42	19.50	
		60	5300	19.39	19.50	
		64	5320	19.33	19.50	
	802.11n-HT40 MCS0	54	5270	19.84	20.00	91.09
		62	5310	19.81	20.00	
	802.11ac-VHT20 MCS0	52	5260	19.40	19.50	95.00
		56	5280	19.36	19.50	
		60	5300	19.29	19.50	
		64	5320	19.25	19.50	
	802.11ac-VHT40 MCS0	54	5270	19.74	20.00	90.29
		62	5310	19.69	20.00	
	802.11ac-VHT80 MCS0	58	5290	19.26	19.50	90.24

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	20.29	20.50	95.31
		116	5580	20.18	20.50	
		124	5620	20.15	20.50	
		132	5660	20.10	20.50	
		144	5720	20.00	20.50	
	802.11n-HT20 MCS0	100	5500	20.17	20.50	95.00
		116	5580	20.10	20.50	
		124	5620	20.00	20.50	
		132	5660	19.93	20.00	
		144	5720	20.20	20.50	
	802.11n-HT40 MCS0	102	5510	20.39	20.50	91.09
		110	5550	20.37	20.50	
		126	5630	20.35	20.50	
		134	5670	20.31	20.50	
		142	5710	20.27	20.50	
	802.11ac-VHT20 MCS0	100	5500	20.16	20.50	95.00
		116	5580	20.07	20.50	
		124	5620	19.94	20.00	
		132	5660	19.80	20.00	
		144	5720	20.17	20.50	
	802.11ac-VHT40 MCS0	102	5510	20.36	20.50	90.29
		110	5550	20.32	20.50	
		126	5630	20.30	20.50	
		134	5670	20.28	20.50	
		142	5710	20.24	20.50	
	802.11ac-VHT80 MCS0	106	5530	20.25	20.50	90.24
		122	5610	20.15	20.50	
		138	5690	20.10	20.50	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	20.04	20.50	95.31
		157	5785	20.01	20.50	
		165	5825	20.10	20.50	
	802.11n-HT20 MCS0	149	5745	20.36	20.50	95.00
		157	5785	20.30	20.50	
		165	5825	20.40	20.50	
	802.11n-HT40 MCS0	151	5755	20.43	20.50	91.09
		159	5795	20.14	20.50	
	802.11ac-VHT20 MCS0	149	5745	20.35	20.50	95.00
		157	5785	20.27	20.50	
		165	5825	20.39	20.50	
	802.11ac-VHT40 MCS0	151	5755	20.37	20.50	90.29
		159	5795	20.11	20.50	
	802.11ac-VHT80 MCS0	155	5775	20.25	20.50	90.24

<5GHz WLAN ANT1+2>

	Mode	Channel	Frequency (MHz)	MIMO SISO Ant 1 Average power (dBm)	MIMO SISO Ant 1 Average power (dBm)	MIMO Per Chain Tune-Up Limit	Combined Average power (dBm)	Combined Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	16.99	16.75	17.00	19.88	20.00	95.33
		40	5200	16.98	16.74	17.00	19.87	20.00	
		44	5220	16.96	16.81	17.00	19.89	20.00	
		48	5240	16.98	16.79	17.00	19.89	20.00	
	802.11n-HT 20 MCS0	36	5180	16.77	16.76	17.00	19.78	20.00	94.97
		40	5200	16.76	16.75	17.00	19.77	20.00	
		44	5220	16.99	16.79	17.00	19.90	20.00	
		48	5240	16.97	16.73	17.00	19.87	20.00	
	802.11n-HT 40 MCS0	38	5190	14.49	14.27	14.50	17.39	17.50	90.29
		46	5230	16.99	16.88	17.00	19.95	20.00	
	802.11ac-V HT20 MCS0	36	5180	16.70	16.62	17.00	19.67	20.00	95.00
		40	5200	16.68	16.61	17.00	19.65	20.00	
		44	5220	16.71	16.69	17.00	19.71	20.00	
		48	5240	16.70	16.66	17.00	19.69	20.00	
	802.11ac-V HT40 MCS0	38	5190	14.40	14.24	14.50	17.33	17.50	90.29
		46	5230	16.90	16.84	17.00	19.88	20.00	
	802.11ac-V HT80 MCS0	42	5210	11.49	11.32	11.50	14.41	14.50	87.95

	Mode	Channel	Frequency (MHz)	MIMO SISO Ant 1 Average power (dBm)	MIMO SISO Ant 1 Average power (dBm)	MIMO Per Chain Tune-Up Limit	Combined Average power (dBm)	Combined Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	16.93	16.87	17.00	19.91	20.00	95.33
		56	5280	16.90	16.84	17.00	19.88	20.00	
		60	5300	16.89	16.71	17.00	19.81	20.00	
		64	5320	16.92	16.76	17.00	19.85	20.00	
	802.11n-HT 20 MCS0	52	5260	16.84	16.78	17.00	19.82	20.00	94.97
		56	5280	16.82	16.76	17.00	19.80	20.00	
		60	5300	16.91	16.70	17.00	19.82	20.00	
		64	5320	16.88	16.67	17.00	19.79	20.00	
	802.11n-HT 40 MCS0	54	5270	16.97	16.86	17.00	19.93	20.00	90.29
		62	5310	14.45	14.38	14.50	17.43	17.50	
	802.11ac-V HT20 MCS0	52	5260	16.68	16.68	17.00	19.69	20.00	95.00
		56	5280	16.67	16.67	17.00	19.68	20.00	
		60	5300	16.69	16.62	17.00	19.67	20.00	
		64	5320	16.70	16.57	17.00	19.65	20.00	
	802.11ac-V HT40 MCS0	54	5270	16.85	16.79	17.00	19.83	20.00	90.29
		62	5310	14.30	14.31	14.50	17.32	17.50	
	802.11ac-V HT80 MCS0	58	5290	9.31	9.22	9.50	12.27	12.50	87.95

	Mode	Channel	Frequency (MHz)	MIMO SISO Ant 1 Average power (dBm)	MIMO SISO Ant 1 Average power (dBm)	MIMO Per Chain Tune-Up Limit	Combined Average power (dBm)	Combined Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	17.49	17.30	17.50	20.40	20.50	95.33
		116	5580	17.47	17.06	17.50	20.28	20.50	
		124	5620	17.45	17.03	17.50	20.25	20.50	
		132	5660	17.42	17.01	17.50	20.23	20.50	
		144	5720	17.48	17.15	17.50	20.33	20.50	
	802.11n-HT 20 MCS0	100	5500	17.48	17.26	17.50	20.39	20.50	94.97
		116	5580	17.08	16.64	17.50	19.88	20.50	
		124	5620	17.05	16.61	17.50	19.85	20.50	
		132	5660	16.99	16.57	17.00	19.80	20.00	
		144	5720	17.49	17.03	17.50	20.28	20.50	
	802.11n-HT 40 MCS0	102	5510	17.32	17.01	17.50	20.18	20.50	90.29
		110	5550	17.25	17.05	17.50	20.16	20.50	
		126	5630	17.24	17.04	17.50	20.15	20.50	
		134	5670	17.38	17.04	17.50	20.23	20.50	
		142	5710	17.36	17.01	17.50	20.20	20.50	
	802.11ac-V HT20 MCS0	100	5500	17.24	16.63	17.50	19.96	20.50	95.00
		116	5580	17.04	16.56	17.50	19.82	20.50	
		124	5620	17.02	16.54	17.50	19.80	20.50	
		132	5660	16.93	16.45	17.00	19.71	20.00	
		144	5720	17.48	16.93	17.50	20.23	20.50	
	802.11ac-V HT40 MCS0	102	5510	17.20	16.94	17.50	20.08	20.50	90.29
		110	5550	17.25	16.99	17.50	20.13	20.50	
		126	5630	17.24	16.98	17.50	20.12	20.50	
		134	5670	17.30	16.98	17.50	20.16	20.50	
		142	5710	17.25	16.94	17.50	20.11	20.50	
	802.11ac-V HT80 MCS0	106	5530	15.51	15.10	16.00	18.32	19.00	87.95
		122	5610	17.48	17.15	17.50	20.33	20.50	
		138	5690	17.49	17.37	17.50	20.44	20.50	

	Mode	Channel	Frequency (MHz)	MIMO SISO Ant 1 Average power (dBm)	MIMO SISO Ant 1 Average power (dBm)	MIMO Per Chain Tune-Up Limit	Combined Average power (dBm)	Combined Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	17.43	17.17	17.50	20.31	20.50	95.33
		157	5785	17.26	17.02	17.50	20.15	20.50	
		165	5825	17.21	17.01	17.50	20.12	20.50	
	802.11n-HT 20 MCS0	149	5745	17.14	17.10	17.50	20.13	20.50	94.97
		157	5785	17.33	17.26	17.50	20.31	20.50	
		165	5825	17.41	17.27	17.50	20.35	20.50	
	802.11n-HT 40 MCS0	151	5755	17.48	17.30	17.50	20.40	20.50	90.29
		159	5795	17.37	17.07	17.50	20.24	20.50	
	802.11ac-V HT20 MCS0	149	5745	17.10	17.02	17.50	20.07	20.50	95.00
		157	5785	17.28	17.21	17.50	20.26	20.50	
		165	5825	17.37	17.16	17.50	20.28	20.50	
	802.11ac-V HT40 MCS0	151	5755	17.36	17.24	17.50	20.31	20.50	90.29
		159	5795	17.29	17.04	17.50	20.18	20.50	
	802.11ac-V HT80 MCS0	155	5775	17.28	17.02	17.50	20.16	20.50	87.95

<Beamforming Power Mode>
<2.4GHz WLAN SISO ANT 1+2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	MIMO Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11ac-VHT20 MCS0	1	2412	20.97	21.00	100.00
		2	2417	20.94	21.00	
		6	2437	21.75	22.00	
		10	2457	19.66	20.00	
		11	2462	18.28	18.50	
	802.11ac-VHT40 MCS0	3	2422	18.37	18.50	100.00
		4	2427	18.86	19.00	
		6	2437	18.80	19.00	
		8	2447	16.21	16.50	
		9	2452	14.62	15.00	

<5GHz WLAN ANT1+2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	MIMO Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11ac-VHT20 MCS0	36	5180	19.08	19.50	100.00
		40	5200	19.10	19.50	
		44	5220	19.12	19.50	
		48	5240	19.02	19.50	
	802.11ac-VHT40 MCS0	38	5190	17.30	17.50	100.00
		46	5230	19.24	19.50	
	802.11ac-VHT80 MCS0	42	5210	14.16	14.50	100.00

	Mode	Channel	Frequency (MHz)	Average power (dBm)	MIMO Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11ac-VHT20 MCS0	52	5260	19.04	19.50	100.00
		56	5280	19.06	19.50	
		60	5300	18.98	19.00	
		64	5320	19.08	19.50	
	802.11ac-VHT40 MCS0	54	5270	19.28	19.50	100.00
		62	5310	17.30	17.50	
	802.11ac-VHT80 MCS0	58	5290	13.76	14.00	100.00

5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	MIMO Tune-Up Limit	Duty Cycle %
	802.11ac-VHT20 MCS0	100	5500	18.74	19.00	100.00
		116	5580	18.60	19.00	
		124	5620	18.58	19.00	
		132	5660	18.50	19.00	
		144	5720	19.14	19.50	
	802.11ac-VHT40 MCS0	102	5510	19.10	19.50	100.00
		110	5550	19.90	20.00	
		126	5630	19.84	20.00	
		134	5670	19.89	20.00	
		142	5710	19.88	20.00	
	802.11ac-VHT80 MCS0	106	5530	19.93	20.00	100.00
		122	5610	18.66	19.00	
		138	5690	20.36	20.50	

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	MIMO Tune-Up Limit	Duty Cycle %
	802.11ac-VHT20 MCS0	149	5745	19.67	20.00	100.00
		157	5785	19.52	20.00	
		165	5825	19.47	19.50	
	802.11ac-VHT40 MCS0	151	5755	20.16	20.50	100.00
		159	5795	20.07	20.50	
	802.11ac-VHT80 MCS0	155	5775	19.96	20.00	100.00

<2.4GHz Bluetooth>

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	1.52	-1.87	-1.88
	CH 39	2441	1.28	-2.42	-2.43
	CH 78	2480	0.83	-2.16	-2.16
Tune-up Limit			2.00	-1.00	-1.00

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	2.09	2.08
	CH 19	2440	2.16	2.18
	CH 39	2480	1.60	1.61
Tune-up Limit			2.50	2.50

General Note:

1. Additional 2.4GHz Bluetooth Extremity SAR is for simultaneous transmission analysis and testing was selected LE 2Mbps due to its highest average power.

11. Bluetooth Body-worn SAR Exclusions Applied

Mode Band	Max Average power(dBm)	
	BR/EDR	LE
2.4GHz Bluetooth	2.0	2.5

Note:

1. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:


$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR.}$$
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison

Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
2.5	< 5	2.48	0.56

Note:

Per KDB 447498 D01v06, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 0.56 which is ≤ 3, SAR testing is not required.

12. Antenna Location

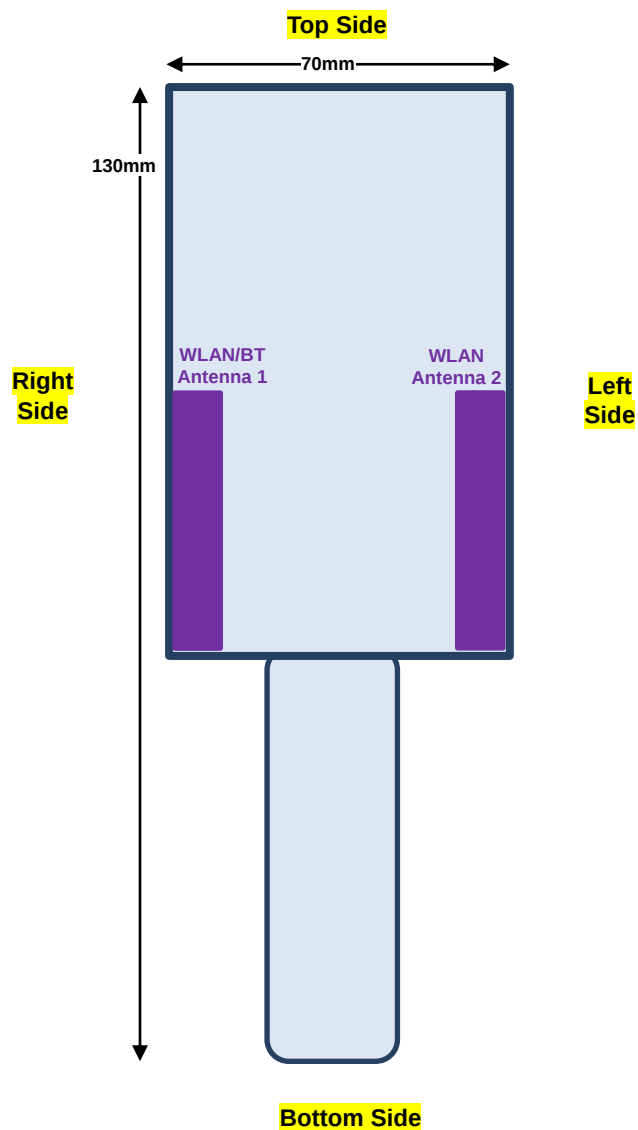

Back View

13. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. When EUT is placed into the holster, only front face of EUT will toward to the human body.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 body-worn SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. Per KDB 248227 D01v02r02, U-NII-1 extremity SAR testing is required when the U-NII-2A band highest reported SAR for a test configuration is > 1.2 W/kg a factor of 2.5 for extremity exposure, extremity SAR is required for U-NII-1 band.
4. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
5. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
6. For 2.4GHz WLAN body-worn and extremity SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
7. Per KDB 248227 D01v02r02, the 2.4GHz WLAN simultaneous body-worn and extremity SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6 W/kg for 1g, < 4.0 W/kg for 10g and SAR peak to location ratio ≤ 0.04 for 1g, ≤ 0.1 for 10g, no additional SAR measurements for MIMO.
8. For 5GHz WLAN body-worn SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
9. Per KDB 248227 D01v02r02, the 5GHz WLAN simultaneous body-worn SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6 W/kg for 1g and SAR peak to location ratio ≤ 0.04 for 1g, no additional SAR measurements for MIMO.
10. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

**13.1 Body-worn SAR****<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Transmit Antenna	Holster	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	SISO Ant 1	Holster	Plus	6	2437	20.94	21.00	1.014	99.03	1.010	0.01	0.293	0.300
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	SISO Ant 1	Holster	Base	6	2437	20.94	21.00	1.014	99.03	1.010	-0.03	0.259	0.265
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	SISO Ant 2	Holster	Plus	6	2437	20.97	21.00	1.007	99.03	1.010	-0.06	0.348	0.354
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	SISO Ant 2	Holster	Plus	1	2412	20.96	21.00	1.009	99.03	1.010	-0.06	0.301	0.307
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	SISO Ant 2	Holster	Plus	2	2417	20.93	21.00	1.016	99.03	1.010	-0.08	0.298	0.306
01	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	SISO Ant 2	Holster	Plus	10	2457	20.94	21.00	1.014	99.03	1.010	-0.06	0.380	0.389
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	SISO Ant 2	Holster	Plus	11	2462	20.90	21.00	1.023	99.03	1.010	-0.11	0.339	0.350
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	SISO Ant 2	Holster	Base	10	2457	20.94	21.00	1.014	99.03	1.010	0.01	0.342	0.350
02	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	SISO Ant 1	Holster	Plus	54	5270	19.93	20.00	1.016	91.18	1.097	0.14	0.741	0.826
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	SISO Ant 1	Holster	Plus	62	5310	19.82	20.00	1.042	91.18	1.097	-0.11	0.713	0.815
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	SISO Ant 1	Holster	Base	54	5270	19.93	20.00	1.016	91.18	1.097	0.1	0.739	0.824
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	SISO Ant 2	Holster	Plus	54	5270	19.84	20.00	1.038	91.09	1.098	-0.06	0.627	0.714
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	SISO Ant 2	Holster	Base	54	5270	19.84	20.00	1.038	91.09	1.098	-0.09	0.663	0.755
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	SISO Ant 1	Holster	Plus	106	5530	20.15	20.50	1.084	89.09	1.122	0.11	0.816	0.992
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	SISO Ant 1	Holster	Plus	122	5610	20.03	20.50	1.114	89.09	1.122	0.11	0.853	1.066
03	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	SISO Ant 1	Holster	Plus	138	5690	20.02	20.50	1.117	89.09	1.122	0.1	0.891	1.117
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	SISO Ant 1	Holster	Base	138	5690	20.02	20.50	1.117	89.09	1.122	-0.12	0.745	0.934
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	SISO Ant 2	Holster	Plus	106	5530	20.25	20.50	1.059	90.24	1.108	0.03	0.712	0.836
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	SISO Ant 2	Holster	Plus	122	5610	20.15	20.50	1.084	90.24	1.108	-0.11	0.914	1.098
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	SISO Ant 2	Holster	Plus	138	5690	20.10	20.50	1.096	90.24	1.108	0.18	0.825	1.002
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	SISO Ant 2	Holster	Base	138	5690	20.10	20.50	1.096	90.24	1.108	0.12	0.664	0.807
04	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	SISO Ant 1	Holster	Plus	155	5775	20.45	20.50	1.011	89.09	1.122	0.02	0.980	1.112
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	SISO Ant 1	Holster	Plus	159	5795	20.49	20.50	1.002	91.18	1.097	0.12	1.010	1.110
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	SISO Ant 1	Holster	Base	155	5775	20.45	20.50	1.011	89.09	1.122	0.03	0.824	0.935
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	SISO Ant 2	Holster	Plus	155	5775	20.25	20.50	1.060	90.24	1.108	0.03	0.931	1.094
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	SISO Ant 2	Holster	Plus	151	5755	20.43	20.50	1.017	91.09	1.098	-0.04	0.834	0.932
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	SISO Ant 2	Holster	Base	155	5775	20.25	20.50	1.060	90.24	1.108	0.12	0.929	1.091

**13.2 Extremity SAR****<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	SISO Ant 1	Plus	6	2437	20.94	21.00	1.014	99.03	1.010	-0.02	1.150	1.178
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	SISO Ant 1	Base	6	2437	20.94	21.00	1.014	99.03	1.010	-0.01	0.939	0.962
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	SISO Ant 2	Plus	6	2437	20.97	21.00	1.007	99.03	1.010	-0.03	1.200	1.220
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	SISO Ant 2	Plus	1	2412	20.96	21.00	1.009	99.03	1.010	-0.05	1.170	1.193
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	SISO Ant 2	Plus	2	2417	20.93	21.00	1.016	99.03	1.010	-0.1	1.050	1.078
05	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	SISO Ant 2	Plus	10	2457	20.94	21.00	1.014	99.03	1.010	-0.04	1.310	1.342
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	SISO Ant 2	Plus	11	2462	20.90	21.00	1.023	99.03	1.010	-0.06	1.290	1.333
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	SISO Ant 2	Base	10	2457	20.94	21.00	1.014	99.03	1.010	-0.04	1.080	1.106
06	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 1	Plus	46	5230	19.86	20.00	1.033	91.18	1.097	0.04	3.430	3.886
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 1	Plus	48	5240	19.77	20.00	1.054	95.31	1.049	0.04	3.510	3.882
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 1	Plus	44	5220	19.76	20.00	1.057	95.31	1.049	-0.01	3.340	3.703
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 1	Plus	36	5180	19.66	20.00	1.081	95.31	1.049	-0.01	3.420	3.880
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 1	Plus	40	5200	19.62	20.00	1.091	95.31	1.049	-0.01	3.300	3.778
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	SISO Ant 1	Plus	42	5210	15.69	16.00	1.074	89.09	1.122	0.06	1.070	1.289
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 1	Plus	38	5190	15.13	15.50	1.089	91.18	1.097	0.09	1.050	1.254
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 1	Base	46	5230	19.86	20.00	1.033	91.18	1.097	0.05	3.400	3.852
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 2	Plus	46	5230	19.59	20.00	1.099	91.09	1.098	-0.06	3.070	3.705
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 2	Plus	38	5190	19.55	20.00	1.109	91.09	1.098	-0.07	3.150	3.836
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 2	Plus	48	5240	19.94	20.00	1.014	95.31	1.049	-0.07	3.570	3.797
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 2	Plus	36	5180	19.79	20.00	1.050	95.31	1.049	-0.06	3.480	3.831
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 2	Plus	40	5200	19.75	20.00	1.059	95.31	1.049	-0.09	3.450	3.833
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 2	Plus	44	5220	19.61	20.00	1.094	95.31	1.049	-0.11	3.340	3.833
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	SISO Ant 2	Plus	42	5210	19.35	19.50	1.035	90.24	1.108	-0.03	2.740	3.143
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 2	Base	38	5190	19.55	20.00	1.109	91.09	1.098	-0.05	3.000	3.654
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	MIMO Ant 1	Plus	46	5230	16.99	17.00	1.001	90.29	1.108	-0.04	1.790	1.986
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	MIMO Ant 1	Base	46	5230	16.99	17.00	1.001	90.29	1.108	0.09	1.770	1.964
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	MIMO Ant 2	Plus	46	5230	16.88	17.00	1.028	90.29	1.108	0	1.690	1.925
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	MIMO Ant 2	Base	46	5230	16.88	17.00	1.028	90.29	1.108	-0.11	1.620	1.845
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 1	Plus	54	5270	19.93	20.00	1.016	91.18	1.097	0.01	3.440	3.835
07	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 1	Plus	62	5310	19.82	20.00	1.042	91.18	1.097	-0.01	3.380	3.865
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 1	Plus	60	5300	19.95	20.00	1.012	95.31	1.049	-0.1	3.630	3.852
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 1	Plus	64	5320	19.94	20.00	1.014	95.31	1.049	-0.1	3.520	3.744
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 1	Plus	52	5260	19.88	20.00	1.028	95.31	1.049	-0.02	3.550	3.828
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 1	Plus	56	5280	19.85	20.00	1.035	95.31	1.049	-0.02	3.470	3.768
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	SISO Ant 1	Plus	58	5290	15.40	15.50	1.023	89.09	1.122	-0.02	1.010	1.160
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 1	Base	62	5310	19.82	20.00	1.042	91.18	1.097	-0.01	3.310	3.785
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 2	Plus	54	5270	19.84	20.00	1.038	91.09	1.098	0.01	3.260	3.714
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 2	Plus	62	5310	19.81	20.00	1.045	91.09	1.098	0	3.310	3.797
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 2	Plus	52	5260	19.98	20.00	1.005	95.31	1.049	-0.11	3.120	3.288
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 2	Plus	56	5280	19.97	20.00	1.007	95.31	1.049	-0.12	3.160	3.338
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 2	Plus	60	5300	19.95	20.00	1.012	95.31	1.049	-0.06	3.190	3.385
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 2	Plus	64	5320	19.41	19.50	1.021	95.31	1.049	-0.08	3.010	3.224
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	SISO Ant 2	Plus	58	5290	19.26	19.50	1.057	90.24	1.108	-0.13	2.430	2.845
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 2	Base	62	5310	19.81	20.00	1.045	91.09	1.098	-0.05	3.180	3.648
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	MIMO Ant 1	Plus	54	5270	16.97	17.00	1.006	90.29	1.108	-0.01	1.780	1.984
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	MIMO Ant 1	Base	54	5270	16.97	17.00	1.006	90.29	1.108	0.06	1.760	1.962
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	MIMO Ant 2	Plus	54	5270	16.86	17.00	1.033	90.29	1.108	-0.02	1.660	1.899
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	MIMO Ant 2	Base	54	5270	16.86	17.00	1.033	90.29	1.108	-0.06	1.520	1.739



FCC SAR TEST REPORT

Report No. : FA860204

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
08	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	SISO Ant 1	Plus	106	5530	20.15	20.50	1.084	89.09	1.122	-0.05	3.200	3.892
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	SISO Ant 1	Plus	122	5610	20.03	20.50	1.114	89.09	1.122	0.03	2.850	3.563
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	SISO Ant 1	Plus	138	5690	20.02	20.50	1.117	89.09	1.122	-0.05	3.060	3.835
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 1	Plus	102	5510	20.32	20.50	1.042	91.09	1.098	0.01	3.360	3.845
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 1	Plus	110	5550	20.25	20.50	1.059	91.09	1.098	-0.04	3.270	3.802
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 1	Plus	126	5630	20.22	20.50	1.067	91.09	1.098	-0.02	3.290	3.853
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 1	Plus	134	5670	20.20	20.50	1.071	91.09	1.098	-0.09	3.290	3.870
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 1	Plus	142	5710	20.18	20.50	1.076	91.09	1.098	-0.01	3.230	3.817
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 1	Plus	100	5500	20.15	20.50	1.084	95.31	1.049	-0.03	2.920	3.321
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 1	Plus	116	5580	20.13	20.50	1.089	95.31	1.049	-0.01	2.840	3.245
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 1	Plus	124	5620	20.10	20.50	1.096	95.31	1.049	-0.03	2.850	3.278
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 1	Plus	132	5660	20.05	20.50	1.109	95.31	1.049	-0.01	2.910	3.386
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 1	Plus	144	5720	20.49	20.50	1.003	95.31	1.049	-0.02	2.890	3.040
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 1	Base	106	5530	20.15	20.50	1.084	89.09	1.122	-0.07	2.870	3.490
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	SISO Ant 2	Plus	106	5530	20.25	20.50	1.059	90.24	1.108	-0.1	3.142	3.688
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	SISO Ant 2	Plus	122	5610	20.15	20.50	1.084	90.24	1.108	-0.14	3.120	3.747
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	SISO Ant 2	Plus	138	5690	20.10	20.50	1.096	90.24	1.108	-0.08	3.180	3.863
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 2	Plus	102	5510	20.39	20.50	1.026	91.09	1.098	0.05	3.290	3.705
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 2	Plus	110	5550	20.37	20.50	1.030	91.09	1.098	0.12	3.360	3.801
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 2	Plus	126	5630	20.35	20.50	1.035	91.09	1.098	0.01	3.280	3.728
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 2	Plus	134	5670	20.31	20.50	1.045	91.09	1.098	0.01	3.340	3.831
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 2	Plus	142	5710	20.27	20.50	1.054	91.09	1.098	-0.04	3.340	3.867
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 2	Plus	100	5500	20.29	20.50	1.050	95.31	1.049	-0.02	2.720	2.995
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 2	Plus	116	5580	20.18	20.50	1.076	95.31	1.049	-0.11	2.840	3.207
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 2	Plus	124	5620	20.15	20.50	1.084	95.31	1.049	0.07	2.820	3.206
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 2	Plus	132	5660	20.10	20.50	1.096	95.31	1.049	-0.1	2.980	3.428
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 2	Plus	144	5720	20.00	20.50	1.122	95.31	1.049	0.15	2.810	3.307
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 2	Base	142	5710	20.27	20.50	1.054	91.09	1.098	0.08	3.310	3.832
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	MIMO Ant 1	Plus	138	5690	17.49	17.50	1.002	87.95	1.137	-0.04	1.680	1.915
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	MIMO Ant 1	Plus	106	5530	15.51	16.00	1.120	87.95	1.137	-0.13	1.090	1.388
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	MIMO Ant 1	Plus	122	5610	17.48	17.50	1.005	87.95	1.137	-0.04	1.620	1.850
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	MIMO Ant 1	Base	138	5690	17.49	17.50	1.002	87.95	1.137	0.06	1.540	1.755
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	MIMO Ant 2	Plus	138	5690	17.37	17.50	1.030	87.95	1.137	-0.09	1.610	1.886
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	MIMO Ant 2	Base	138	5690	17.37	17.50	1.030	87.95	1.137	-0.11	1.520	1.781
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	SISO Ant 1	Plus	155	5775	20.45	20.50	1.011	89.09	1.122	-0.01	3.420	3.880
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 1	Plus	159	5795	20.49	20.50	1.002	91.18	1.097	-0.07	3.520	3.869
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 1	Plus	151	5755	20.17	20.50	1.079	91.18	1.097	-0.01	3.100	3.668
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 1	Plus	165	5825	20.30	20.50	1.047	95.31	1.049	-0.04	3.140	3.450
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 1	Plus	149	5745	20.21	20.50	1.069	95.31	1.049	-0.06	3.340	3.747
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 1	Plus	157	5785	20.11	20.50	1.094	95.31	1.049	-0.11	3.160	3.627
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	SISO Ant 1	Base	155	5775	20.45	20.50	1.011	89.09	1.122	-0.05	3.390	3.846
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	SISO Ant 2	Plus	155	5775	20.25	20.50	1.060	90.24	1.108	-0.05	3.290	3.865
09	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 2	Plus	151	5755	20.43	20.50	1.017	91.09	1.098	0	3.480	3.887
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 2	Plus	159	5795	20.14	20.50	1.088	91.09	1.098	-0.05	3.240	3.869
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 2	Plus	165	5825	20.10	20.50	1.097	95.31	1.049	0.04	3.310	3.808
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 2	Plus	149	5745	20.04	20.50	1.112	95.31	1.049	-0.08	3.140	3.663
	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 2	Plus	157	5785	20.01	20.50	1.120	95.31	1.049	-0.06	3.040	3.571
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 2	Base	151	5755	20.43	20.50	1.017	91.09	1.098	-0.04	3.140	3.508
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	MIMO Ant 1	Plus	155	5775	17.28	17.50	1.053	87.95	1.137	-0.04	1.620	1.939
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	MIMO Ant 1	Base	155	5775	17.28	17.50	1.053	87.95	1.137	0.16	1.550	1.855
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	MIMO Ant 2	Plus	155	5775	17.02	17.50	1.117	87.95	1.137	-0.05	1.490	1.893
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	MIMO Ant 2	Base	155	5775	17.02	17.50	1.117	87.95	1.137	0.11	1.450	1.842

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Transmit Antenna	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
10	Bluetooth	LE 2Mbps	Back	0mm	Ant 1	Plus	19	2440	2.18	2.50	1.076	32.48	3.079	0.15	0.006	0.020
	Bluetooth	LE 2Mbps	Back	0mm	Ant 1	Plus	0	2402	2.08	2.50	1.102	32.48	3.079	0.11	0.005	0.017
	Bluetooth	LE 2Mbps	Back	0mm	Ant 1	Plus	39	2480	1.61	2.50	1.227	32.48	3.079	0.16	0.004	0.016
	Bluetooth	LE 2Mbps	Back	0mm	Ant 1	Base	19	2440	2.18	2.50	1.076	32.48	3.079	0.12	0.004	0.013

13.3 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Transmit Antenna	Holster	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	SISO Ant 2	Holster	Plus	122	5610	20.15	20.50	1.084	90.24	1.108	-0.11	0.914		1.098
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	SISO Ant 2	Holster	Plus	122	5610	20.15	20.50	1.084	90.24	1.108	0.08	0.862	1.06	1.035
1st	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	SISO Ant 1	Holster	Plus	159	5795	20.49	20.50	1.002	91.18	1.097	0.12	1.010		1.110
2nd	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	SISO Ant 1	Holster	Plus	159	5795	20.49	20.50	1.002	91.18	1.097	0.12	0.988	1.02	1.086

No.	Band	Mode	Test Position	Gap (mm)	Transmit Antenna	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 2	Plus	48	5240	19.94	20.00	1.014	95.31	1.049	-0.07	3.570		3.797
2nd	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 2	Plus	48	5240	19.94	20.00	1.014	95.31	1.049	-0.09	3.510	1.02	3.733
1st	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 1	Plus	60	5300	19.95	20.00	1.012	95.31	1.049	-0.1	3.630		3.852
2nd	WLAN5GHz	802.11a 6Mbps	Back	0mm	SISO Ant 1	Plus	60	5300	19.95	20.00	1.012	95.31	1.049	-0.11	3.610	1.01	3.831
1st	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 1	Plus	102	5510	20.32	20.50	1.042	91.09	1.098	0.01	3.360		3.845
2nd	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 1	Plus	102	5510	20.32	20.50	1.042	91.09	1.098	-0.07	3.290	1.02	3.764
1st	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 1	Plus	159	5795	20.49	20.50	1.002	91.18	1.097	-0.07	3.520		3.869
2nd	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SISO Ant 1	Plus	159	5795	20.49	20.50	1.002	91.18	1.097	-0.13	3.430	1.03	3.771

General Note:

- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
- Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
- Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
- The ratio is the difference in percentage between original and repeated *measured* SAR.
- All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

14. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Body-worn	Extremity
1.	WLAN ANT1 + WLAN ANT2	Yes	Yes
2.	Bluetooth ANT1 + WLAN ANT2	Yes	Yes

General Note:

1. WLAN and Bluetooth share the same antenna1, and cannot transmit simultaneously.
2. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
3. The Scaled SAR summation is calculated based on the same configuration and test position.
4. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - v) The SPLSR calculated results please refer to section 14.3.
5. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
 - i) $(\text{max. power of channel, including tune-up tolerance, mW}) / (\min. \text{ test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - ii) When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
 - iii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth Max Power	Exposure Position	Body worn
	Test separation	0 mm
2.5 dBm	Estimated SAR (W/kg)	0.075 W/kg

14.1 Body-Worn Accessory Exposure Conditions

Exposure Position	1	2	3	4	5	1+2 Summed 1g SAR (W/kg)	3+4 Summed 1g SAR (W/kg)	2+5 Summed 1g SAR (W/kg)	4+5 Summed 1g SAR (W/kg)	SPLSR	Case No
	2.4GHz WLAN SISO Ant 1	2.4GHz WLAN SISO Ant 2	5GHz WLAN SISO Ant 1	5GHz WLAN SISO Ant 2	Bluetooth Ant 1						
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)						
Front with Holster	0.300	0.389	1.117	1.098	0.075	0.689	2.215	0.464	1.173	0.04	Case 1

14.2 Extremity Exposure Conditions

Exposure Position	1	2	3	4	5	1+2 Summed 10g SAR (W/kg)	2+5 Summed 10g SAR (W/kg)	4+5 Summed 10g SAR (W/kg)
	2.4GHz WLAN SISO Ant 1	2.4GHz WLAN SISO Ant 2	5GHz WLAN SISO Ant 1	5GHz WLAN SISO Ant 2	Bluetooth Ant 1			
	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)			
Back	1.178	1.342	3.892	3.887	0.020	2.520	1.362	3.907


Exposure Position	1	2	1+2 Summed 10g SAR (W/kg)
	5GHz WLAN MIMO Ant 1	5GHz WLAN MIMO Ant 2	
	10g SAR (W/kg)	10g SAR (W/kg)	
Back	1.986	1.925	3.911

14.3 SPLSR Evaluation and Analysis

General Note:

1. $SPLSR = (SAR_1 + SAR_2)^{1.5} / (min. \text{ separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary

Case 1	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WLAN5GHz_SISO Ant 1	Front	1.117	0	46.8	-18.8	-0.01	80.9	2.22	0.04	Not required
	WLAN5GHz_SISO Ant 2		1.098	0	-34	-22.8	-0.33				

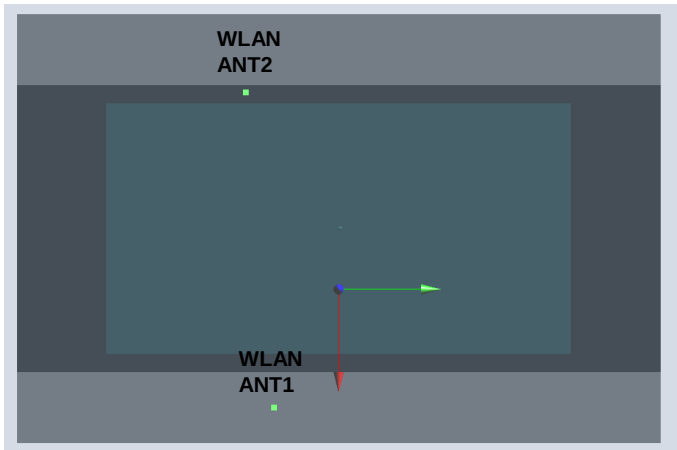

Test Engineer : Galen Chang Kurt Liu Mood Huang Jay Jian Willy Yu and Carter Chuang

15. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	$1/k^{(b)}$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) k is the coverage factor

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.55	N	1	1	1	6.6	6.6
Axial Isotropy	4.70	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.60	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	2.00	R	1.732	1	1	1.2	1.2
Linearity	4.70	R	1.732	1	1	2.7	2.7
System Detection Limits	1.00	R	1.732	1	1	0.6	0.6
Modulation Response	4.68	R	1.732	1	1	2.7	2.7
Readout Electronics	0.30	N	1	1	1	0.3	0.3
Response Time	0.00	R	1.732	1	1	0.0	0.0
Integration Time	2.60	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.00	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.00	R	1.732	1	1	1.7	1.7
Probe Positioner	0.40	R	1.732	1	1	0.2	0.2
Probe Positioning	6.70	R	1.732	1	1	3.9	3.9
Max. SAR Eval.	4.00	R	1.732	1	1	2.3	2.3
Test Sample Related							
Device Positioning	3.03	N	1	1	1	3.0	3.0
Device Holder	3.60	N	1	1	1	3.6	3.6
Power Drift	5.00	R	1.732	1	1	2.9	2.9
Power Scaling	0.00	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.60	R	1.732	1	1	3.8	3.8
SAR correction	0.00	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.03	N	1	0.78	0.71	0.0	0.0
Liquid Conductivity (target)	5.00	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.50	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.68	R	1.732	0.78	0.71	1.7	1.5
Liquid Permittivity Repeatability	0.02	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.00	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.50	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.84	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						12.7%	12.6%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						25.4%	25.3%

Uncertainty Budget for frequency range 3 GHz to 6 GHz



16. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [8] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.