

A

B

C

D


E



FCC ID: QCS28BLE
IC: 7666-X28BLE
MODEL: J0ULE GPS PLUS
MADE IN CHINA
Lithium Polymer 3.7V
5.0V 500mA


018-150034

Bottom case assy A1-4304L06
High gloss Orange 165C



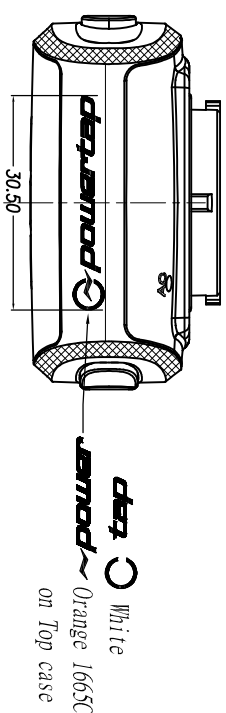


L-Side button black
A2-4301002BK
Button pin: 48-14834T(x1)
O-ring: 38-0160BK(x1)
Click sw: 44-R060N(x2)
E-ring: 87-005T(x1)


Top case assy A0-4300G303
High gloss black

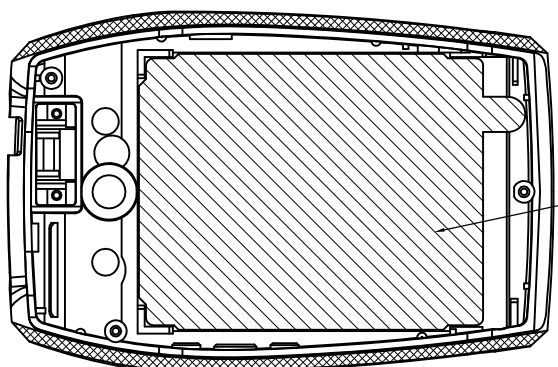

Case + White
Orange 1665C
on Top case
Note 5.
Orange 1665C
on back of top lens
A6-4299A02
Front key black
A2-5118A01BK
button pin: 48-14870T(x1)
O-ring: 38-0160BK(x1)
E-ring: 87-005T(x1)

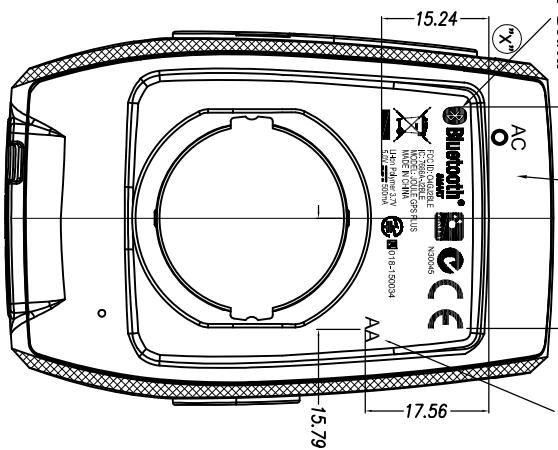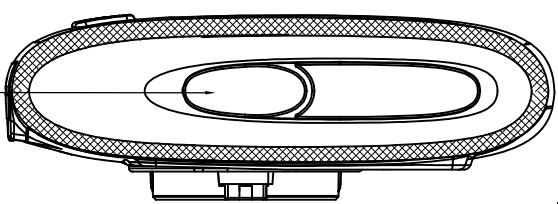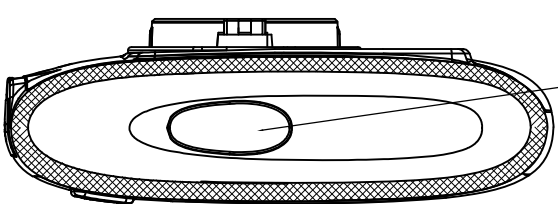

USB cover black

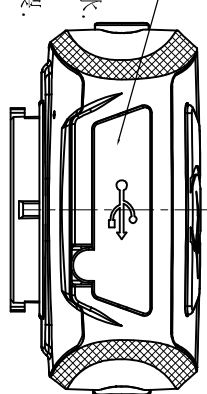

R-side button black
A2-4302002BK
Button pin: 48-14834T(x2)
O-ring: 38-0160BK(x2)
Click sw: 44-R060N(x4)
E-ring: 87-005T(x2)

- Note:
1. 防水測試：成品用0.6bar內壓浸水看汽泡，面壳半成品用0.20bar內壓試水。
 2. 絲印參附力測試：用3M透明膠紙(#600) 壓貼在表面拉3次。
 3. 鏡面壓力測試：用15kg分別壓在3/6/9/12位置觀察超聲處有否爆裂。
 4. 面鏡超聲後只能高出面壳 0.0~0.15mm之內。
 5. 用偏光鏡測試面鏡應力紋即黑影，不能走進斜鏡範圍內。

DAYTON INDUSTRIAL CO. LTD.
KENDY ENTERPRISE LTD.

3rd angle projection
LINEAR ±0.1°
ANGULAR ±1°
UNSPECIFIED TOLERANCE
VERSION NO: 1.4

1.4	changed top case and front key	17/2/2015	TITLE:	Cosmetic	MODEL NAME:	Super Joule	DATE:	17-2-2015
1.3	Add Japan code	21/1/15	PART NO:	B9-GR5570000	MODEL NO:	GR55700	SHEET	1 of 1
1.2	Revise bottom case color	2/12/14	MAT'L:	ABS	SCALE:	1:1	DOC CONTROL NO:	005-2527
1.1	Revise bottom case printing	9/10/14	FINISH:		QTY:	1	CHKD	APPD
REV.	REVISIONS	DATE						

4

3

2

1

4

3

2

1