





FCC PART 15, SUBPART C  
ISED C RSS-247, ISSUE 2, FEBRUARY 2017  
LP0002-2018

TEST REPORT

For  
**Cisco Systems Inc.**

125 West Tasman Drive,  
San Jose, CA 95134 USA

**FCC ID: LDKSLTSP1905**  
**IC:2461N-SLTSP1905**

<b>Report Type:</b> Permissive II Change Report	<b>Product Type:</b> Cisco 802.11ax Access Point
<b>Prepared By</b> Christian McCaig Test Technician	
<b>Report Number</b> R1907017-247	
<b>Report Date</b> 2019-08-23	
<b>Reviewed By</b> Frank Wang RF Lead	
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Ave Sunnyvale, CA 94089, USA Tel: (408) 732-9162, Fax: (408) 732 9164	



**Note:** This test report was prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This test report **shall not** be used by the customer to claim product certification, approval, or endorsement by A2LA or any agency of the United States Government or any foreign government.

\* This test report may contain data and test methods that are not covered by BACL's scope of accreditation as of the test report date shown above. These items are marked within the test report text with an asterisk "\*"

## TABLE OF CONTENTS

<b>1 General Description.....</b>	<b>4</b>
1.1 Product Description for Equipment Under Test (EUT) .....	4
1.2 Mechanical Description of EUT .....	4
1.3 Objective.....	4
1.4 Related Submittal(s)/Grant(s) .....	4
1.5 Test Methodology .....	4
1.6 Measurement Uncertainty .....	5
1.7 Test Facility Registrations .....	5
1.8 Test Facility Accreditations .....	5
<b>2 System Test Configuration.....</b>	<b>8</b>
2.1 Justification .....	8
2.2 EUT Exercise Software.....	8
2.3 Equipment Modifications.....	9
2.4 Local Support Equipment .....	9
2.5 Support Equipment .....	9
2.6 Interface Ports and Cabling.....	9
<b>3 Summary of Test Results .....</b>	<b>10</b>
<b>4 FCC §15.207 &amp; ISEDC RSS-Gen §8.8 and LP0002-2018 § 2.3 - AC Power Line Conducted Emissions .....</b>	<b>11</b>
4.1 Applicable Standards .....	11
4.2 Test Setup .....	11
4.3 Test Procedure .....	11
4.4 Corrected Amplitude and Margin Calculation .....	12
4.5 Test Equipment List and Details.....	12
4.6 Test Environmental Conditions .....	12
4.7 Summary of Test Results .....	13
4.8 Conducted Emissions Test Plots and Data.....	14
<b>5 FCC §15.209, §15.247(d) &amp; ISEDC RSS-247 §5.5, RSS-Gen §8.9, §8.10 AND LP0002-2018 §3.10- Spurious Radiated Emissions.....</b>	<b>16</b>
5.1 Applicable Standards .....	16
5.2 Test Setup .....	17
5.3 Test Procedure .....	17
5.4 Corrected Amplitude and Margin Calculation .....	18
5.5 Test Equipment List and Details.....	18
5.6 Test Environmental Conditions .....	19
5.7 Summary of Test Results .....	19
5.8 Spurious Emissions Test Results .....	20
<b>6 Annex A – Test Setup Photographs.....</b>	<b>26</b>
<b>7 Annex B- EUT External Photographs .....</b>	<b>27</b>
<b>8 Annex C- EUT Internal Photographs .....</b>	<b>28</b>
<b>9 Annex D (Normative) - ISO/IEC 17025 Certificate and Scope of Accreditation .....</b>	<b>29</b>

**DOCUMENT REVISION HISTORY**

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1907017-247	Permissive II Change Report	2019-08-23

## 1 General Description

### 1.1 Product Description for Equipment Under Test (EUT)

This test and measurement report was prepared on behalf of *Cisco Systems Inc.*, and their product model: *C9115AXI-B (USA)*, *A9115AXI-A V03 (Canada)*, *C9115AXI-T (Taiwan)* as referred to as EUT in this report. The product is an 802.11ax Dual Band Access Point.

### 1.2 Mechanical Description of EUT

Length (cm)	Width (cm)	Height (cm)	Weight (g)
20	20	4	1700

### 1.3 Objective

This report is prepared on behalf of *Cisco Systems Inc.*, in accordance with Part 2, Subpart J, and Part 15, Subparts B and C of the Federal Communication Commission's rules and ISED RSS-247 Issue 2 on February 2017 and NCC LP0002-2018.

The objective is to determine compliance with FCC Part 15.247, ISED RSS-247 and NCC LP-0002 rules for Antenna Requirements and Radiated Spurious Emissions.

### 1.4 Related Submittal(s)/Grant(s)

R1907017-407  
FCC ID: LDKSLTSP2905 DTS  
IC: 2461N-SLTSP1905

### 1.5 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 DTS Meas Guidance v04: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247.

## 1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Parameter	Measurement uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.57 dB
Power Spectral Density, conducted	±1.48dB
Unwanted Emissions, conducted	±1.57dB
All emissions, radiated	±4.0 dB
AC power line Conducted Emission	±2.0 dB
Temperature	±2 ° C
Humidity	±5 %
DC and low frequency voltages	±1.0 %
Time	±2 %
Duty Cycle	±3 %

## 1.7 Test Facility Registrations

BACLs test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

## 1.8 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

**A- An independent, 3<sup>rd</sup>-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2005 by A2LA (Test Laboratory Accreditation Certificate Number 3279.02),** in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (\*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2005 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report..

BACL's ISO/IEC 17025:2005 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide

range of product categories. These product categories include Central Office Telecommunications Equipment [including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices, Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

**B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.03) to certify**

- For the USA (Federal Communications Commission):
  - 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
  - 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
  - 3- All Telephone Terminal Equipment within FCC Scope C.
- For the Canada (Industry Canada):
  - 1 All Scope 1-Licence-Exempt Radio Frequency Devices;
  - 2 All Scope 2-Licensed Personal Mobile Radio Services;
  - 3 All Scope 3-Licensed General Mobile & Fixed Radio Services;
  - 4 All Scope 4-Licensed Maritime & Aviation Radio Services;
  - 5 All Scope 5-Licensed Fixed Microwave Radio Services
  - 6 All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.
- For Singapore (Info-Communications Development Authority (IDA)):
  - 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2
  - 2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2
- For the Hong Kong Special Administrative Region:
  - 1 All Radio Equipment, per KHCA 10XX-series Specifications;
  - 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
  - 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.
- For Japan:
  - 1 MIC Telecommunication Business Law (Terminal Equipment):
    - All Scope A1 - Terminal Equipment for the Purpose of Calls;
    - All Scope A2 - Other Terminal Equipment
  - 2 Radio Law (Radio Equipment):
    - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
    - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
    - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

**C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:**

- 1 Electronics and Office Equipment:
  - for Telephony (ver. 3.0)
  - for Audio/Video (ver. 3.0)
  - for Battery Charging Systems (ver. 1.1)
  - for Set-top Boxes & Cable Boxes (ver. 4.1)
  - for Televisions (ver. 6.1)
  - for Computers (ver. 6.0)

- for Displays (ver. 6.0)
- for Imaging Equipment (ver. 2.0)
- for Computer Servers (ver. 2.0)
- 2 Commercial Food Service Equipment
  - for Commercial Dishwashers (ver. 2.0)
  - for Commercial Ice Machines (ver. 2.0)
  - for Commercial Ovens (ver. 2.1)
  - for Commercial Refrigerators and Freezers
- 3 Lighting Products
  - For Decorative Light Strings (ver. 1.5)
  - For Luminaires (including sub-components) and Lamps (ver. 1.2)
  - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
  - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
  - for Residential Ceiling Fans (ver. 3.0)
  - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
  - For Water Coolers (ver. 3.0)

**D- A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:**

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;
- Canada: (Innovation, Science and Economic development Canada - ISED) Foreign Certification Body – FCB – APEC Tel MRA -Phase I & Phase II;
- Chinese Taipei (Republic of China – Taiwan):
  - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
  - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
  - o EMC Directive 2014/30/EU US-EU EMC & Telecom MRA CAB (NB)
  - o Radio Equipment (RE) Directive 2014/53/EU US-EU EMC & Telecom MRA CAB (NB)
  - o Low Voltage Directive (LVD) 2014/35/EU
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA) APEC Tel MRA -Phase I & Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Media Development Authority - IMDA) APEC Tel MRA -Phase I & Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter-
- USA:
  - o ENERGY STAR Recognized Test Laboratory – US EPA
  - o Telecommunications Certification Body (TCB) – US FCC;
  - o Nationally Recognized Test Laboratory (NRTL) – US OSHA
- Vietnam: APEC Tel MRA -Phase I;

## 2 System Test Configuration

### 2.1 Justification

The EUT was configured for testing according to ANSI C63.10-2013 and FCC KDB 558074 D01 DTS Meas Guidance v04.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power, peak power and PPSD across all data rates bandwidths, and modulations.

### 2.2 EUT Exercise Software

The test firmware used was Tera Term and test commands, provided by *Cisco Systems Inc.*, the software is compliant with the standard requirements being tested against.

Modulation	Frequency (MHz)	Power Setting
802.11b	2412	17
	2442	17
	2462	17
802.11g	2412	17
	2442	17
	2462	17
802.11n	2412	17
	2442	17
	2462	17
802.11ax	2412	17
	2442	17
	2462	17
BLE	2402	5
	2440	5
	2480	5

#### Data Rates Tested:

802.11b mode: 1Mbps

802.11g mode: 6Mbps

802.11n/ac mode: m0/m0x1

802.11ax mode: m0h1



## 2.3 Equipment Modifications

No equipment modifications are made to the EUT

## 2.4 Local Support Equipment

Manufacturer	Description	Model	Serial Number
Dell	Laptop	Latitude E6410	3CKRAQ1

## 2.5 Support Equipment

Manufacturer	Description	Model
Cisco	Power supply	AIR-PWRINJ6 V01

## 2.6 Interface Ports and Cabling

Cable Description	Length	To	From
Ethernet cable	2 m	PoE	EUT
Ethernet-serial-USB cable	2 m	EUT	Laptop

### 3 Summary of Test Results

Results reported relate only to the product tested.

<b>FCC, ISEDC, and LP0002 Rules</b>	<b>Description of Test</b>	<b>Results</b>
FCC §15.207, ISEDC RSS GEN §8.8 and LP0002-2018 §2.3	AC Power Line Conducted Emissions	Compliant
FCC §2.1053, §15.35(b), §15.205, §15.209, §15.247 (d) ISEDC RSS-247 §5.5 ISEDC RSS-Gen §8.9 and §8.10 LP0002-2018 §3.10	Radiated Spurious Emissions	Compliant

## 4 FCC §15.207 & ISEDC RSS-Gen §8.8 and LP0002-2018 § 2.3 - AC Power Line Conducted Emissions

### 4.1 Applicable Standards

As per FCC §15.207, ISEDC RSS GEN §8.8 and LP0002-2018 §2.3

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 <sup>1</sup>	56 to 46 <sup>2</sup>
0.5-5	56	46
5-30	60	50

*Note<sup>1</sup>: Decreases with the logarithm of the frequency.*

*Note<sup>2</sup>: A linear average detector is required.*

### 4.2 Test Setup

The measurement was performed at shield room, using the setup per ANSI C63.10-2013 measurement procedure. The specification used was FCC §15.207 limits and ISEDC RSS GEN §8.8.

External I/O cables were draped along the edge of the test table and bundled when necessary.

The AC/DC power adapter of the EUT was connected with LISN-1 which provided 120 V / 60 Hz AC power.

### 4.3 Test Procedure

During the conducted emissions test, the power cord of the EUT host system was connected to the main outlet of the LISN-1 and the power cords of support equipment were connected to LISN-2.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the peak, quasi-peak, and average detection mode. Quasi-Peak readings are distinguished with "QP." Average readings are distinguished with "Ave".

#### 4.4 Corrected Amplitude and Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Cable Loss (CL), the Attenuator Factor (Atten) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = A_i + CL + \text{Atten}$$

For example, a corrected amplitude of 46.2 dBuV = Indicated Reading (32.5 dBuV) + Cable Loss (3.7 dB) + Attenuator (10 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

#### 4.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde and Schwarz	Receiver, EMI Test	ESCI 1166.5950.03	100338	2018-07-05	2 years
Rohde and Schwarz	Impulse Limiter	ESH3-Z2	101964	2019-07-31	1 year
Solar Electronics Company	High Pass Filter	Type 7930-100	7930150204	2019-02-25	1 year
Suirong	30 ft conductive emission cable	LMR 400	-	N/R	N/A
FCC	LISN	FCC-LISN-50-25-2-10-CISPR16	160129	2019-04-11	1 year
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

**Statement of Traceability:** *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 09 June 2016) “A2LA Policy on Metrological Traceability”.

#### 4.6 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	44 %
ATM Pressure:	101.31 kPa

The testing was performed by Alexandrae Duran on 2019-08-20 in 5m chamber 3.

#### 4.7 Summary of Test Results


According to the recorded data in following table, the EUT complied with the FCC Part 15 and RSS-Gen standards’ conducted emissions limits, with the margin reading of:

Connection: AC/DC adapter connected to 120 V/60 Hz, AC			
Margin (dB)	Frequency (MHz)	Conductor Mode (Live/Neutral)	Range (MHz)
-14.86	0.179144	Line	0.15-30

## 4.8 Conducted Emissions Test Plots and Data


*Worst Case Colocation: BLE 2480 MHz, 2.4 GHz Wi-Fi HT/VHT mode 2412 MHz, and 5 GHz Wi-Fi VHT160 mode 5250 MHz*

### 120 V, 60 Hz – Line

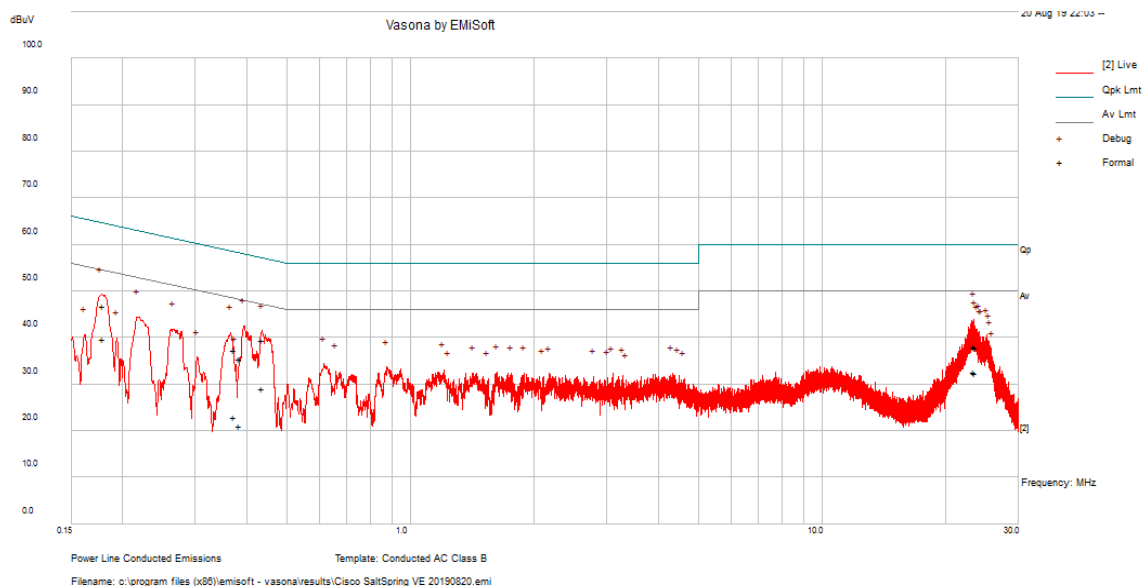

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.179144	46.68	Line	64.53	-17.84	QP
0.385538	35.36	Line	58.16	-22.8	QP
0.436073	39.39	Line	57.14	-17.75	QP
23.370756	38.08	Line	60	-21.92	QP
0.374109	37.31	Line	58.41	-21.1	QP
23.488507	37.85	Line	60	-22.15	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.179144	39.67	Line	54.53	-14.86	Ave.
0.385538	21.08	Line	48.16	-27.08	Ave.
0.436073	29.01	Line	47.14	-18.13	Ave.
23.370756	32.7	Line	50	-17.3	Ave.
0.374109	23.02	Line	48.41	-25.39	Ave.
23.488507	32.32	Line	50	-17.68	Ave.

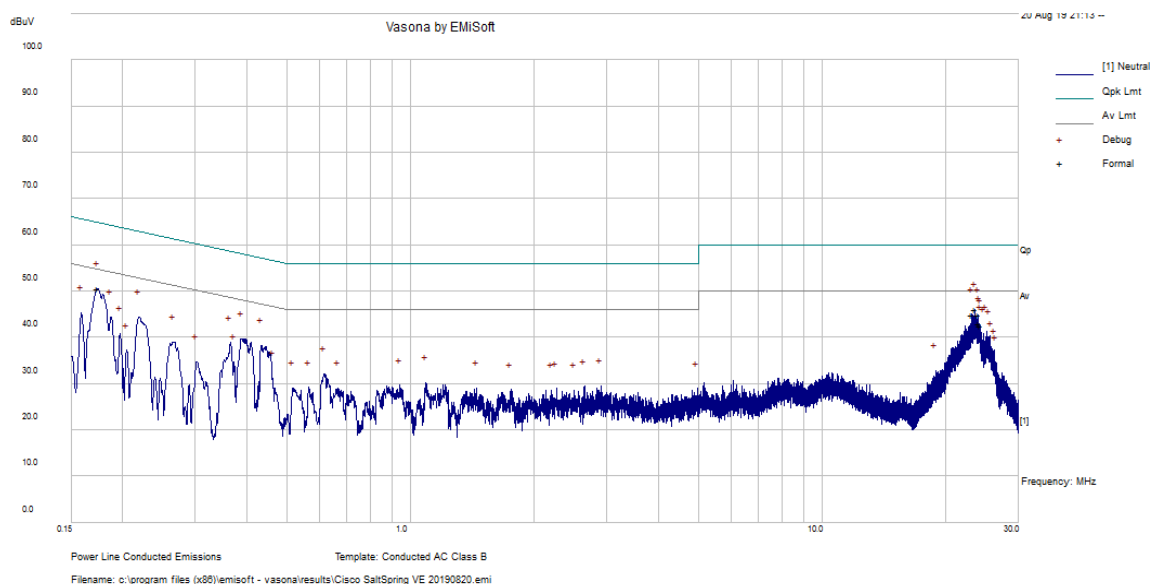**120 V, 60 Hz – Neutral**

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
23.524009	39.79	Neutral	60	-20.21	QP
0.17381	45.81	Neutral	64.78	-18.96	QP
23.129896	39.94	Neutral	60	-20.06	QP
23.939311	37.82	Neutral	60	-22.18	QP
24.057196	36.98	Neutral	60	-23.02	QP
24.26157	36.24	Neutral	60	-23.76	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
23.524009	34.46	Neutral	50	-15.54	Ave.
0.17381	35.28	Neutral	54.78	-19.5	Ave.
23.129896	34.59	Neutral	50	-15.41	Ave.
23.939311	32.3	Neutral	50	-17.7	Ave.
24.057196	31.6	Neutral	50	-18.4	Ave.
24.26157	30.91	Neutral	50	-19.09	Ave.

## 5 FCC §15.209, §15.247(d) & ISEDC RSS-247 §5.5, RSS-Gen §8.9, §8.10 AND LP0002-2018 §3.10- Spurious Radiated Emissions

### 5.1 Applicable Standards

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3.3458 – 3.358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz.



However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

## 5.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.10-2013. The specification used was the FCC 15 Subpart C limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

## 5.3 Test Procedure

The EUT host, and all support equipment power cords were connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

For radiated testing the EUT was set 3 meter away from the testing antenna, which was varied from 1-4 meter, and the EUT was placed on a turntable, which was 0.8 meter and 1.5 meter above the ground plane for below and above 1000 MHz measurements, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna's polarity should be changed between horizontal and vertical.

The spectrum analyzer or receiver was set as:

Below 1000 MHz:

RBW = 100 kHz / VBW = 300 kHz / Sweep = Auto

Above 1000 MHz:

- (1) Peak: RBW = 1MHz / VBW = 3MHz / Sweep = 100 ms
- (2) Average: RBW = 1MHz / VBW = 3MHz / Sweep = Auto

## 5.4 Corrected Amplitude and Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = Ai + AF + CL + Atten - Ga$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

## 5.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde and Schwarz	Receiver, EMI Test	ESCI 1166.5950K03	100044	2018-10-26	2 years
Agilent	Analyzer, Spectrum	E4440A	US45303156	2019-03-19	1 year
Sunol Sciences	System Controller	SC99V	011003-1	N/R	N/A
Sunol Sciences	Antenna, Biconi-Log	JB1	A013105-3	2018-02-26	2 years
EMCO	Antenna, Horn	3115	9511-4627	2018-03-28	2 years
Agilent	Amplifier, Pre	8449B	3147A00400	2019-05-20	1 year
Insulated Wire INC	157 Series 2.92 SM (x2) Armored 33 ft. Cable	KPS-1501AN- 3960-KPS	DC 1807	2018-03-13	2 years
-	SMA cable	-	C0002	Each time <sup>1</sup>	N/A
A.H. Systems	Pre-Amplifier	PAM 1840V	170	2018-09-10	1 Year
HP/Agilent	Pre-Amplifier	8449B	3008A01978	2018-09-18	1 year
Wisewave	Antenna, Horn	ARH-4223-02	10555-01	2018-02-14	2 years
Wisewave	Antenna, Horn	ARH-4223-02	10555-02	2018-02-14	2 years
Sunol Sciences	Antenna, Horn	DRH-118	A052704	2019-04-02	2 years

Note<sup>1</sup>: cable and attenuator included in the test set-up will be checked each time before testing.

**Statement of Traceability:** BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 9 June 2016) “A2LA Policy on Metrological Traceability”.

## 5.6 Test Environmental Conditions

<b>Temperature:</b>	22-25 °C
<b>Relative Humidity:</b>	42-48 %
<b>ATM Pressure:</b>	102.1 kPa

*The testing was performed by Christian McCaig from 2019-08-14 to 2019-08-19 in 5m chamber 3.*

## 5.7 Summary of Test Results

According to the data hereinafter, the EUT complied with FCC Title 47, Part 15C and RSS-247 standard's radiated emissions limits, and had the worst margin of:

2.4GHz Wi-Fi

Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Mode, channel
-6	30.00889	Vertical	2412 MHz, HT/VHT20

BLE


Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Mode, channel
-6	30.00889	Vertical	2480 MHz, BLE

Please refer to the following table and plots for specific test result details

## 5.8 Spurious Emissions Test Results

### 1) 30 MHz – 1 GHz Worst Case, Measured at 3 meters

*Worst Case Colocation: BLE 2480 MHz, 2.4 GHz Wi-Fi HT/VHT mode 2412 MHz, and 5 GHz Wi-Fi VHT160 mode 5250 MHz*

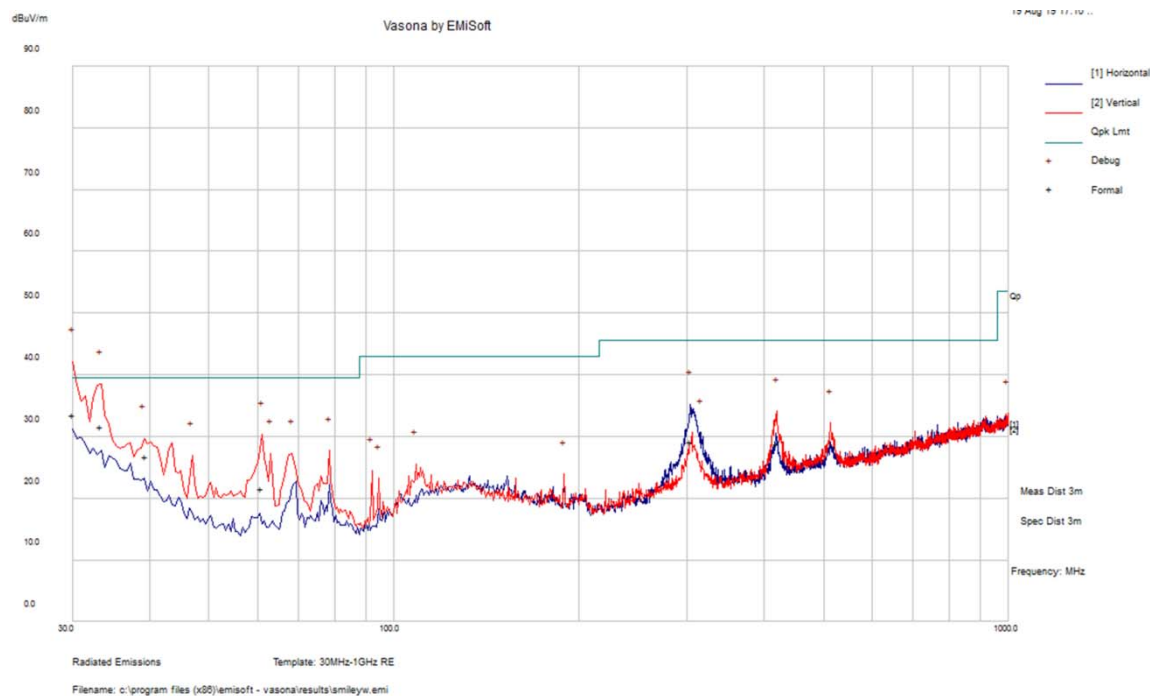

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Comment
30.00889	33.5	117	V	123	39.5	-6	Pass
33.355	31.62	296	V	293	39.5	-7.88	Pass
60.84375	21.59	167	V	121	39.5	-17.91	Pass
39.442	26.81	151	V	16	39.5	-12.69	Pass
303.6775	29.21	132	H	88	45.5	-16.29	Pass
419.821	28.88	111	V	162	45.5	-16.62	Pass

## 2) Above 1 GHz, measured at 3 meters

## 2.4GHz Wi-Fi

Freq. (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2412 MHz CCK mode power setting: 17											
4824	44.53	0	100	H	32.46	8.40	35.90	49.48	74	-24.52	PK
4824	31.33	0	100	H	32.46	8.40	35.90	36.28	54	-17.72	AV
4824	44.66	0	100	V	32.45	8.40	35.90	49.61	74	-24.39	PK
4824	31.24	0	100	V	32.45	8.40	35.90	36.19	54	-17.81	AV
Mid Channel 2442 MHz CCK mode power setting: 17											
4884	44.40	0	100	H	32.46	8.40	35.90	49.35	74	-24.65	PK
4884	30.54	0	100	H	32.46	8.40	35.90	35.49	54	-18.51	AV
4884	44.61	0	100	V	32.45	8.40	35.90	49.56	74	-24.44	PK
4884	30.68	0	100	V	32.45	8.40	35.90	35.63	54	-18.37	AV
High Channel 2462 MHz CCK mode power setting: 17											
4924	44.37	0	100	H	32.46	8.40	35.90	49.32	74	-24.68	PK
4924	30.77	0	100	H	32.46	8.40	35.90	35.72	54	-18.28	AV
4924	45.26	110	273	V	32.45	8.40	35.90	50.21	74	-23.79	PK
4924	31.29	110	273	V	32.45	8.40	35.90	36.24	54	-17.76	AV

Freq. (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2412 MHz Non HT20 mode power setting: 17											
4824	45.00	0	100	H	32.46	8.40	35.90	49.95	74	-24.05	PK
4824	30.97	0	100	H	32.46	8.40	35.90	35.92	54	-18.08	AV
4824	45.10	0	100	V	32.45	8.40	35.90	50.05	74	-23.95	PK
4824	30.94	0	100	V	32.45	8.40	35.90	35.89	54	-18.11	AV
Mid Channel 2442 MHz Non HT20 mode power setting: 17											
4884	44.28	0	100	H	32.46	8.40	35.90	49.23	74	-24.77	PK
4884	30.49	0	100	H	32.46	8.40	35.90	35.44	54	-18.56	AV
4884	44.21	0	100	V	32.45	8.40	35.90	49.16	74	-24.84	PK
4884	30.65	0	100	V	32.45	8.40	35.90	35.60	54	-18.40	AV
High Channel 2462 MHz Non HT20 mode power setting: 17											
4924	44.13	0	100	H	32.46	8.40	35.90	49.08	74	-24.92	PK
4924	30.33	0	100	H	32.46	8.40	35.90	35.28	54	-18.72	AV
4924	44.82	0	100	V	32.45	8.40	35.90	49.77	74	-24.23	PK
4924	30.49	0	100	V	32.45	8.40	35.90	35.44	54	-18.56	AV

Freq. (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2412 MHz HT/VHT20 mode power setting: 17											
4824	44.59	0	100	H	32.46	8.40	35.90	49.54	74	-24.46	PK
4824	30.46	0	100	H	32.46	8.40	35.90	35.41	54	-18.59	AV
4824	43.98	0	100	V	32.45	8.40	35.90	48.93	74	-25.07	PK
4824	30.64	0	100	V	32.45	8.40	35.90	35.59	54	-18.41	AV
Mid Channel 2442 MHz HT/VHT20 mode power setting: 17											
4884	44.13	0	100	H	32.46	8.40	35.90	49.08	74	-24.92	PK
4884	30.58	0	100	H	32.46	8.40	35.90	35.53	54	-18.47	AV
4884	44.18	0	100	V	32.45	8.40	35.90	49.13	74	-24.87	PK
4884	30.57	0	100	V	32.45	8.40	35.90	35.52	54	-18.48	AV
High Channel 2462 MHz HT/VHT20 mode power setting: 17											
4924	44.22	0	100	H	32.46	8.40	35.90	49.17	74	-24.83	PK
4924	30.59	0	100	H	32.46	8.40	35.90	35.54	54	-18.46	AV
4924	44.61	0	100	V	32.45	8.40	35.90	49.56	74	-24.44	PK
4924	30.62	0	100	V	32.45	8.40	35.90	35.57	54	-18.43	AV

Freq. (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2412 MHz HE20 mode power setting: 17											
4824	44.85	0	100	H	32.46	8.40	35.90	49.80	74	-24.20	PK
4824	31.33	0	100	H	32.46	8.40	35.90	36.28	54	-17.72	AV
4824	43.98	0	100	V	32.45	8.40	35.90	48.93	74	-25.07	PK
4824	31.40	0	100	V	32.45	8.40	35.90	36.35	54	-17.65	AV
Mid Channel 2442 MHz HE20 mode power setting: 17											
4884	44.32	0	100	H	32.46	8.40	35.90	49.27	74	-24.73	PK
4884	31.21	0	100	H	32.46	8.40	35.90	36.16	54	-17.84	AV
4884	44.34	0	100	V	32.45	8.40	35.90	49.29	74	-24.71	PK
4884	31.41	0	100	V	32.45	8.40	35.90	36.36	54	-17.64	AV
High Channel 2462 MHz HE20 mode power setting: 17											
4924	44.23	0	100	H	32.46	8.40	35.90	49.18	74	-24.82	PK
4924	31.07	0	100	H	32.46	8.40	35.90	36.02	54	-17.98	AV
4924	43.99	0	100	V	32.45	8.40	35.90	48.94	74	-25.06	PK
4924	31.04	0	100	V	32.45	8.40	35.90	35.99	54	-18.01	AV


**BLE**

Freq. (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2402 MHz											
4804	45.58	0	100	H	33.14	11.34	38.17	51.88	74	-22.12	PK
4804	30.64	0	100	H	33.14	11.34	38.17	36.94	54	-17.06	AV
4804	45.24	0	100	V	33.14	11.34	38.17	51.54	74	-22.46	PK
4804	30.33	0	100	V	33.14	11.34	38.17	36.63	54	-17.37	AV
Mid Channel 2440 MHz											
4880	44.46	0	100	V	33.29	11.99	38.17	51.57	74	-22.44	PK
4880	30.11	0	100	V	33.29	11.99	38.17	37.22	54	-16.79	AV
4880	45.28	0	100	H	33.29	11.99	38.17	52.39	74	-21.62	PK
4880	30.12	0	100	H	33.29	11.99	38.17	37.23	54	-16.78	AV
High Channel 2480 MHz											
4960	44.42	0	100	V	33.37	11.99	38.09	51.69	74	-22.31	PK
4960	29.64	0	100	V	33.37	11.99	38.09	36.91	54	-17.09	AV
4960	44.16	0	100	H	33.37	11.99	38.09	51.43	74	-22.57	PK
4960	29.70	0	100	H	33.37	11.99	38.09	36.97	54	-17.03	AV


### 3) Co-location

*Worst Case Colocation: BLE 2480 MHz, 2.4 GHz Wi-Fi HT/VHT mode 2412 MHz, and 5 GHz Wi-Fi VHT160 mode 5250 MHz*

#### 1 - 18 GHz, measured at 1 meter

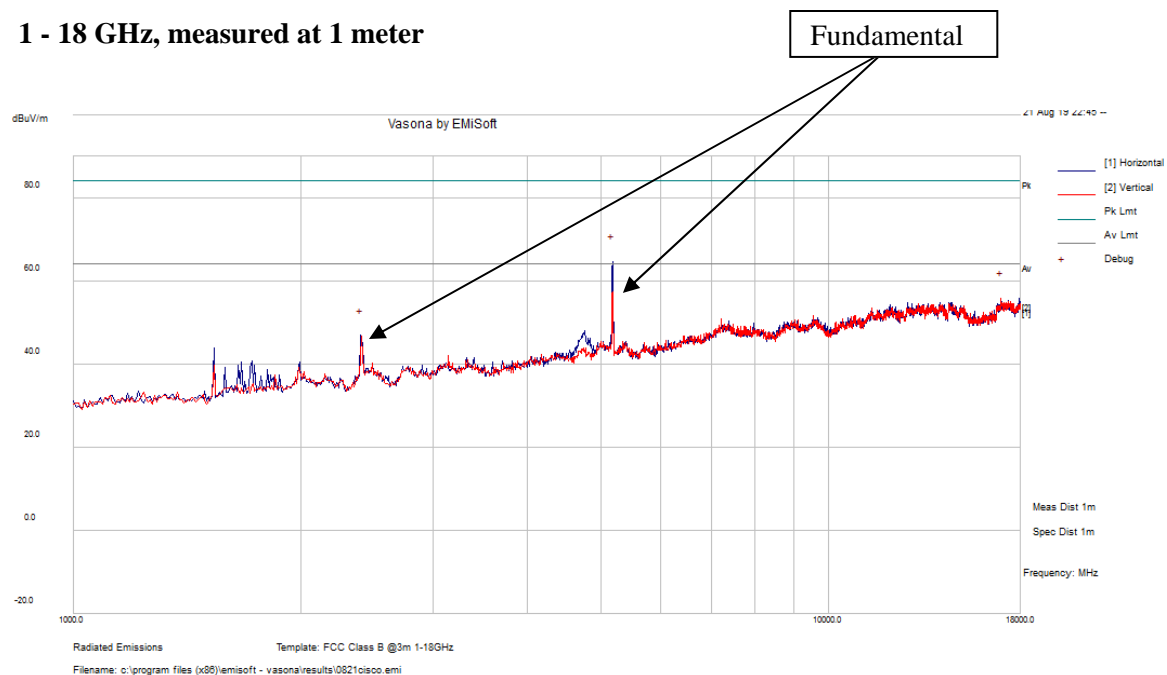

#### 18 GHz-26.5 GHz, measured at 1 meter

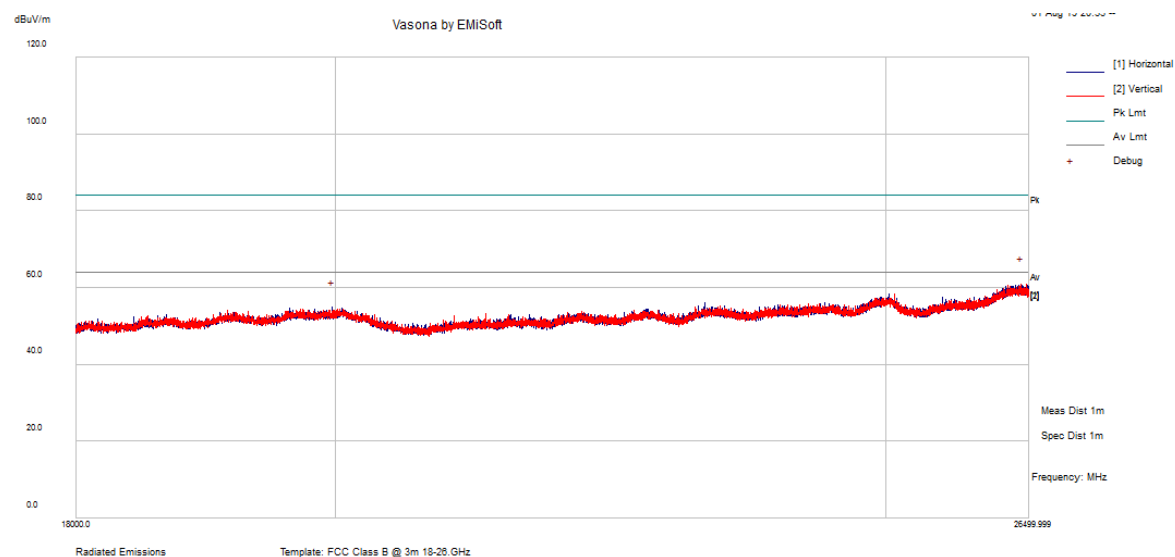



FCC Part 15C/ISED RSS-247/LP0002 Test Report

## **6 Annex A – Test Setup Photographs**

---

Please refer to the attachment

## **7 Annex B- EUT External Photographs**

---

Please refer to the attachment

## **8 Annex C- EUT Internal Photographs**

---

Please refer to the attachment

## 9 Annex D (Normative) - ISO/IEC 17025 Certificate and Scope of Accreditation



**Accredited Laboratory**

A2LA has accredited

**BAY AREA COMPLIANCE LABORATORIES CORP.**

Sunnyvale, CA

for technical competence in the field of

**Electrical Testing**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. This laboratory also meets A2LA R222 - Specific Requirements EPA ENERGY STAR Accreditation Program. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 2<sup>nd</sup> day of October 2018.



Vice President, Accreditation Services  
For the Accreditation Council  
Certificate Number 3297.02  
Valid to September 30, 2020  
Revised June 5, 2019

*For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.*

Please follow the web link below for a full ISO 17025 scope

<https://www.a2la.org/scopepdf/3297-02.pdf>

--- END OF REPORT ---