


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: ThinkPad Stack Wireless Access Point M/N:R123
 Manufacturer: Lenovo
 Operating Condition: TX 5745MHz
 Test Site: 2# Chamber
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Z
 Start of Test: 2015-5-4 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB STD VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

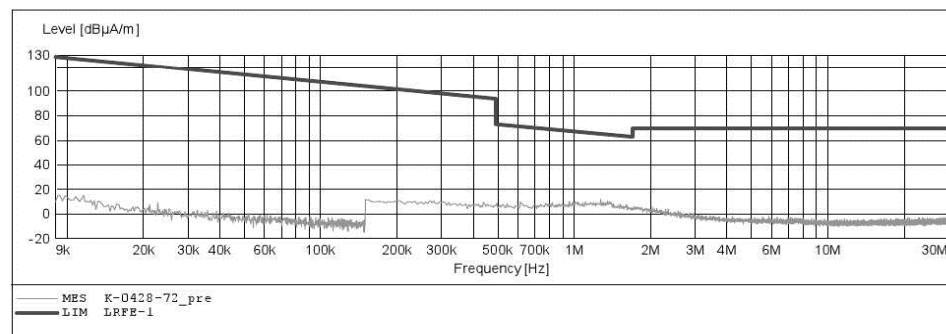

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #805	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/21/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 5745MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	
Note: 802.11a	

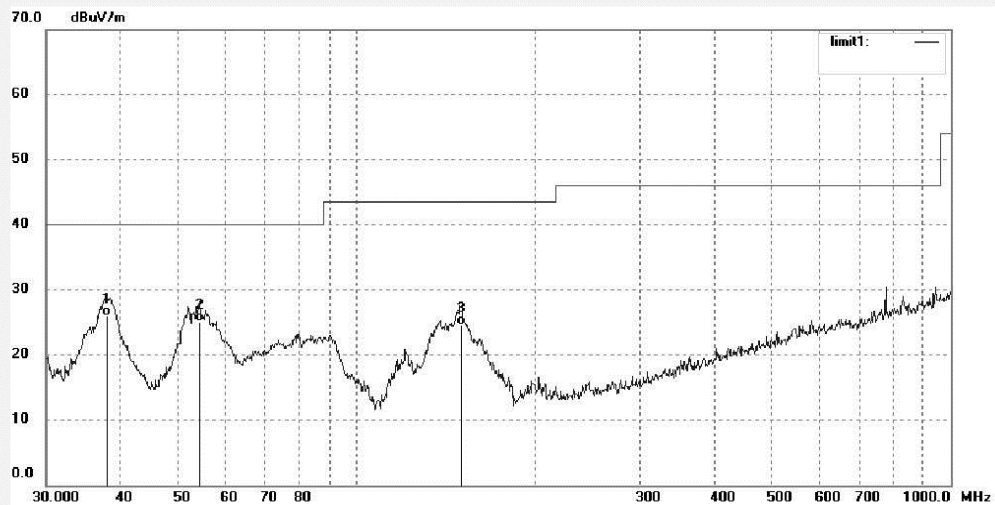

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	37.9450	37.02	-11.08	25.94	40.00	-14.06	QP			
2	54.4515	38.13	-12.94	25.19	40.00	-14.81	QP			
3	150.0107	39.76	-15.16	24.60	43.50	-18.90	QP			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #808	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/21/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 5745MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	

Note: 802.11a

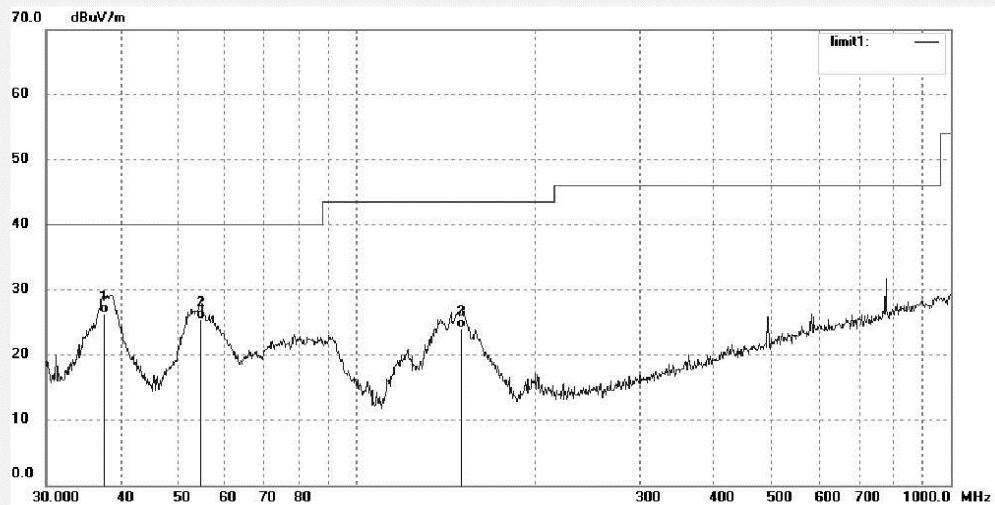

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	37.6798	37.42	-11.02	26.40	40.00	-13.60	QP			
2	54.6428	38.37	-12.95	25.42	40.00	-14.58	QP			
3	150.0107	39.15	-15.16	23.99	43.50	-19.51	QP			

Produkte
Products



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #518
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ThinkPad Stack Wireless Access Point
Mode: TX 5745MHz
Model: R123
Manufacturer: Lenovo

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 15/04/18/
Time:
Engineer Signature:
Distance: 3m

Note: 802.11a

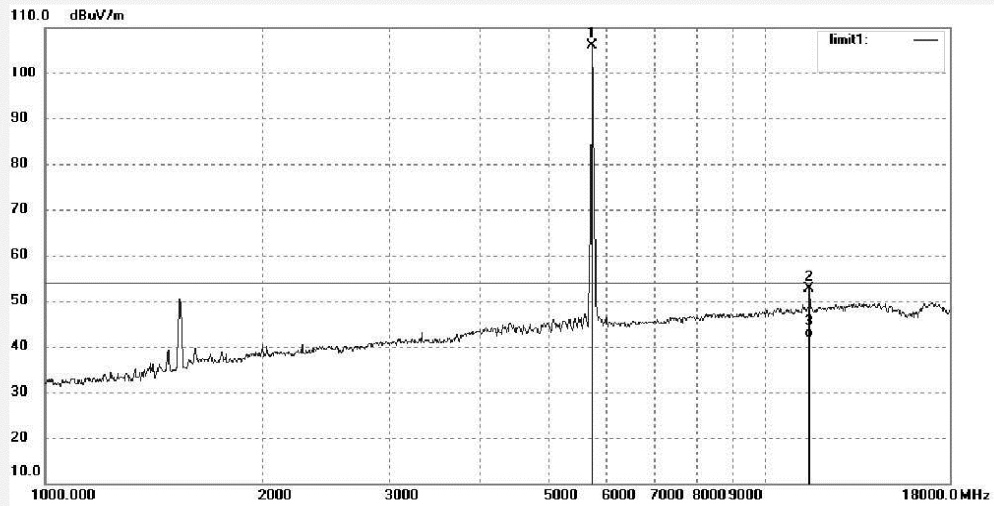

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5745.000	104.75	1.50	106.25	/	/	peak			
2	11490.320	42.17	10.54	52.71	74.00	-21.29	peak			
3	11490.320	31.42	10.54	41.96	54.00	-12.04	AVG			

Produkte
Products



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #519
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ThinkPad Stack Wireless Access Point
Mode: TX 5745MHz
Model: R123
Manufacturer: Lenovo

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 15/04/18/
Time:
Engineer Signature:
Distance: 3m

Note: 802.11a

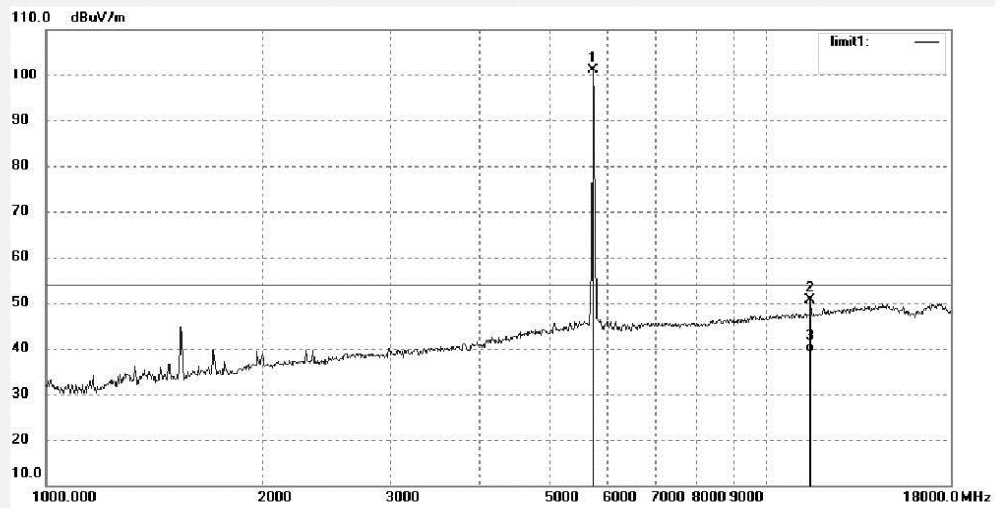

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5745.000	99.62	1.50	101.12	/	/	peak			
2	11490.327	40.19	10.54	50.73	74.00	-23.27	peak			
3	11490.327	28.63	10.54	39.17	54.00	-14.83	AVG			

Produkte
Products



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #1139
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ThinkPad Stack Wireless Access Point
Mode: TX 5745MHz
Model: R123
Manufacturer: Lenovo

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 15/04/28/
Time:
Engineer Signature:
Distance: 3m

Note: 802.11a

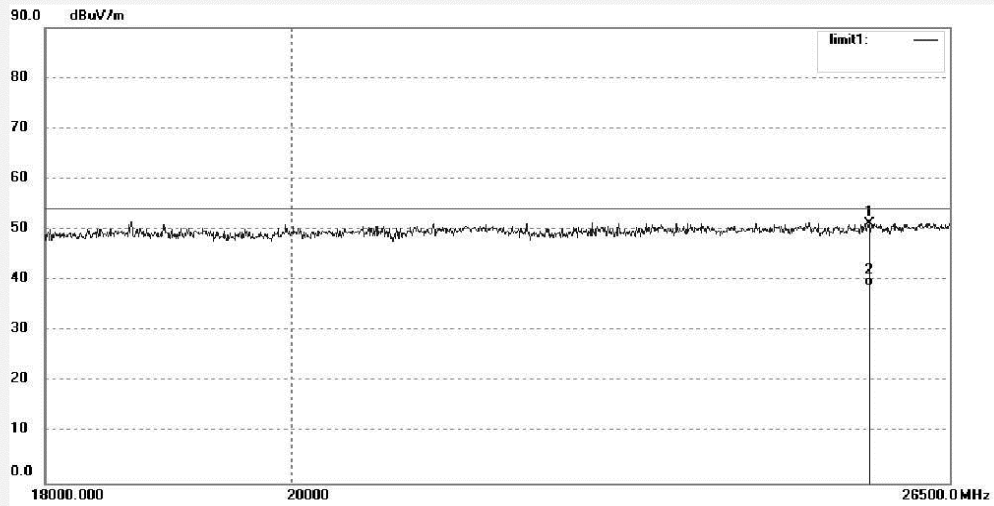

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25601.552	34.62	16.50	51.12	54.00	-2.88	peak			
2	25601.552	22.34	16.50	38.84	54.00	-15.16	AVG			

Produkte
Products



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #1140
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ThinkPad Stack Wireless Access Point
Mode: TX 5745MHz
Model: R123
Manufacturer: Lenovo

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 15/04/28/
Time:
Engineer Signature:
Distance: 3m

Note: 802.11a

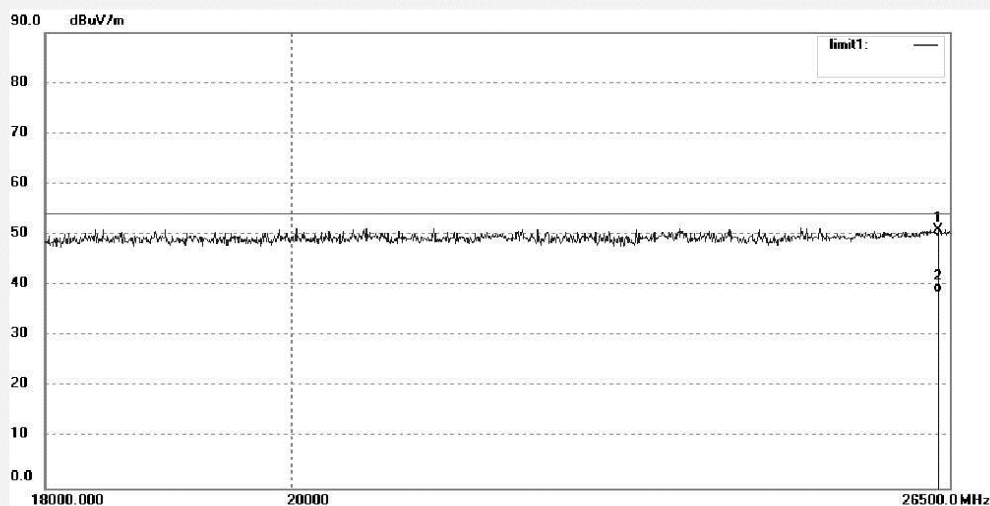

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26377.046	34.43	16.50	50.93	74.00	-23.07	peak			
2	26377.046	22.17	16.50	38.67	54.00	-15.33	AVG			

EMI Sweep(1)

1 / 1

Radiated Emission


EUT Information

EUT Model Name:	ThinkPad Stack Wireless Access Point M/N:R123
Operation mode:	TX 5745MHz
Test Voltage:	AC 120V/60Hz
Comment:	802.11a

Common Information

Test Site:	SMQ EMC Lab.
Environment Conditions:	
Antenna Polarization:	Horizontal
Operator Name:	
Comment:	

Copy of FCC Electric Field Strength 26.5-40GHz

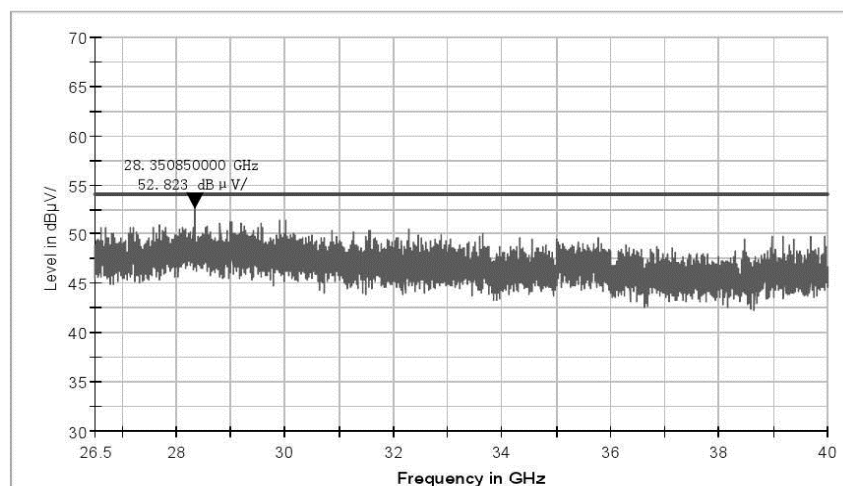

EMI Sweep(1)

1 / 1

Radiated Emission


EUT Information

EUT Model Name:	ThinkPad Stack Wireless Access Point M/N:R123
Operation mode:	TX 5745MHz
Test Voltage:	AC 120V/60Hz
Comment:	802.11a

Common Information

Test Site:	SMQ EMC Lab.
Environment Conditions:	
Antenna Polarization:	Vertical
Operator Name:	
Comment:	

Copy of FCC Electric Field Strength 26.5-40GHz

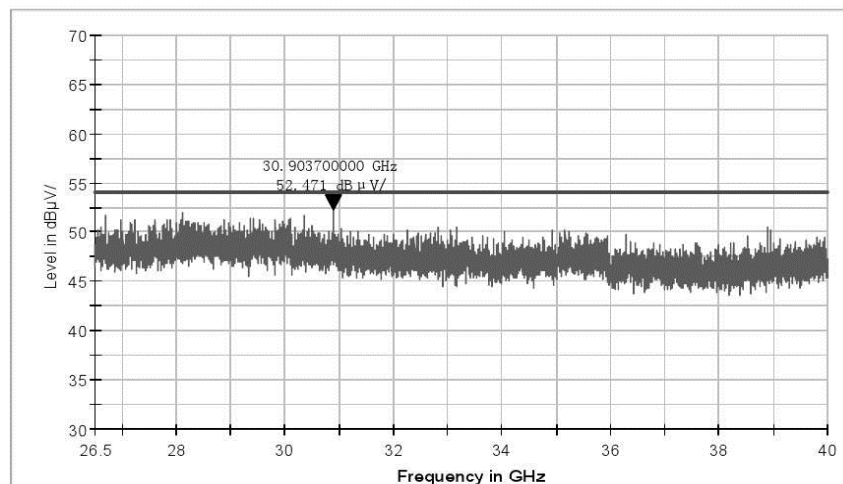

CH157


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: ThinkPad Stack Wireless Access Point M/N:R123
 Manufacturer: Lenovo
 Operating Condition: TX 5785MHz
 Test Site: 2# Chamber
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: X
 Start of Test: 2015-5-4 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB STD VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

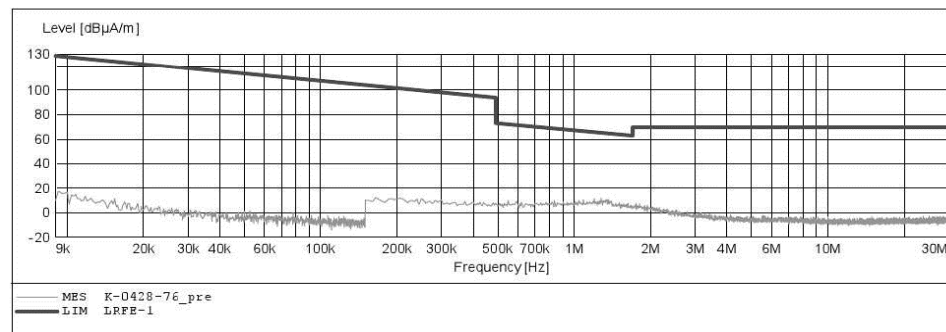


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: ThinkPad Stack Wireless Access Point M/N:R123
 Manufacturer: Lenovo
 Operating Condition: TX 5785MHz
 Test Site: 2# Chamber
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Y
 Start of Test: 2015-5-4 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB STD VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

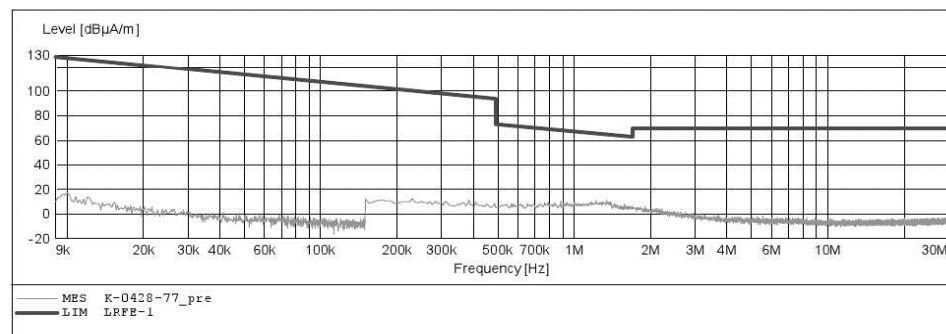


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: ThinkPad Stack Wireless Access Point M/N:R123
 Manufacturer: Lenovo
 Operating Condition: TX 5785MHz
 Test Site: 2# Chamber
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Z
 Start of Test: 2015-5-4 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB STD VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

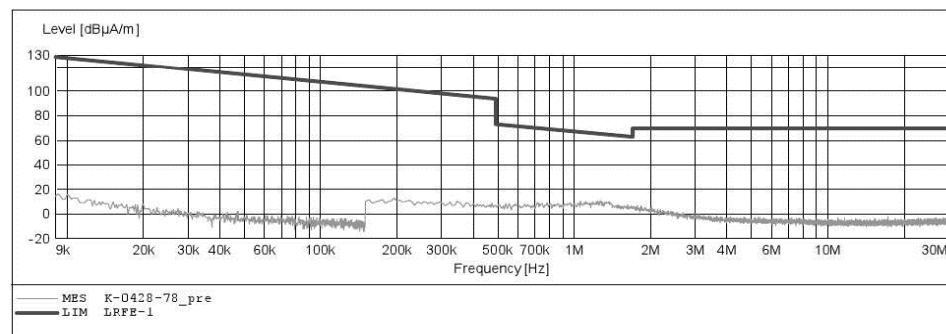

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #811	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/21/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 5785MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	

Note: 802.11a

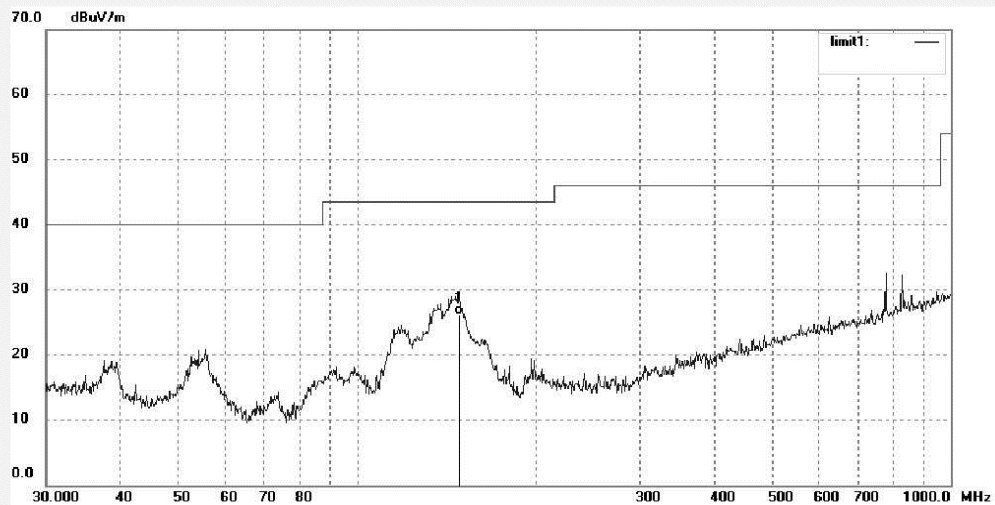

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	148.4410	41.31	-15.18	26.13	43.50	-17.37	QP			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #812	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/21/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 5785MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	
Note: 802.11a	

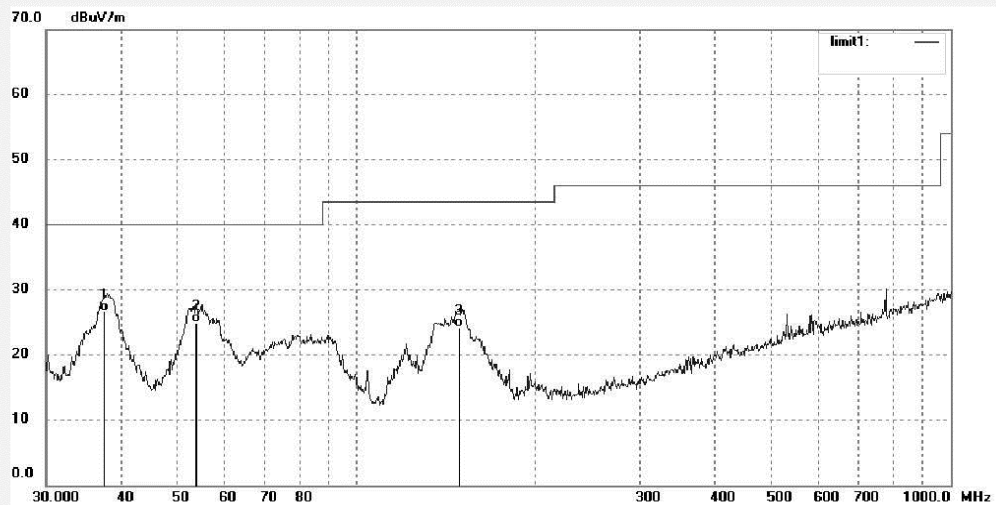

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	37.6798	37.71	-11.02	26.69	40.00	-13.31	QP			
2	53.6931	37.74	-12.88	24.86	40.00	-15.14	QP			
3	148.9625	39.43	-15.17	24.26	43.50	-19.24	QP			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #522	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/18/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 5785MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	

Note: 802.11a

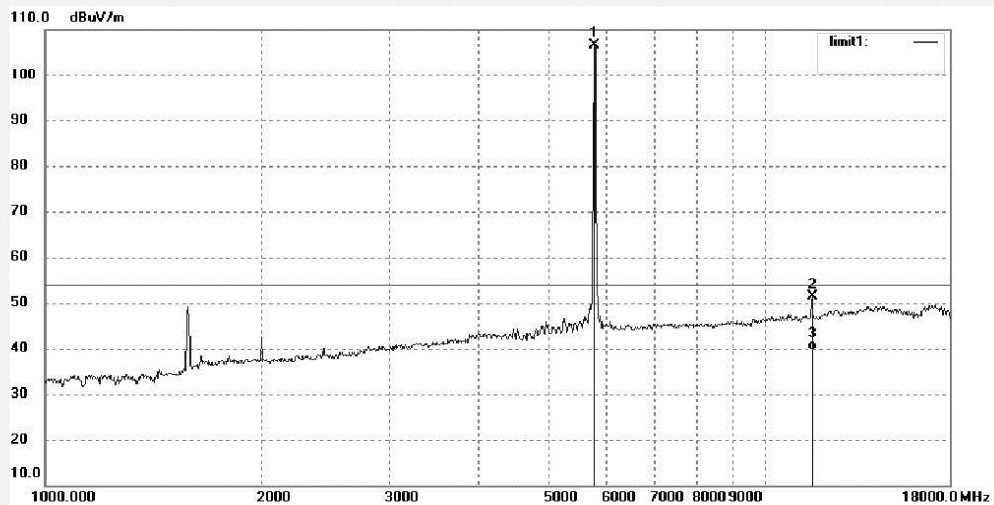

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5785.000	104.67	1.86	106.53	/	/	peak			
2	11570.325	40.73	10.55	51.28	74.00	-22.72	peak			
3	11570.325	29.07	10.55	39.62	54.00	-14.38	AVG			

Produkte
Products



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #523
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ThinkPad Stack Wireless Access Point
Mode: TX 5785MHz
Model: R123
Manufacturer: Lenovo

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 15/04/18/
Time:
Engineer Signature:
Distance: 3m

Note: 802.11a

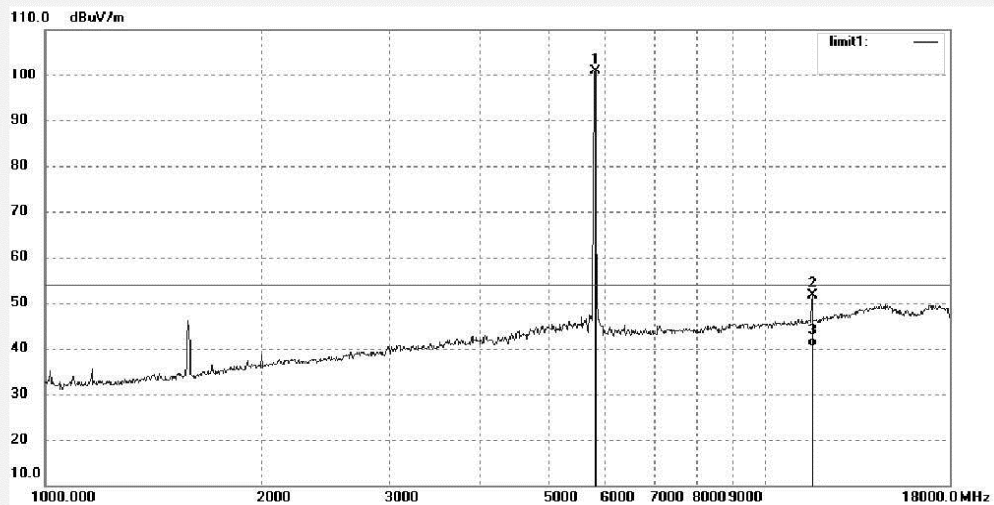

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5785.000	98.95	1.86	100.81	/	/	peak			
2	11570.321	41.00	10.55	51.55	74.00	-22.45	peak			
3	11570.321	29.85	10.55	40.40	54.00	-13.60	AVG			

Produkte
Products



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #1143
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ThinkPad Stack Wireless Access Point
Mode: TX 5785MHz
Model: R123
Manufacturer: Lenovo

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 15/04/28/
Time:
Engineer Signature:
Distance: 3m

Note: 802.11a

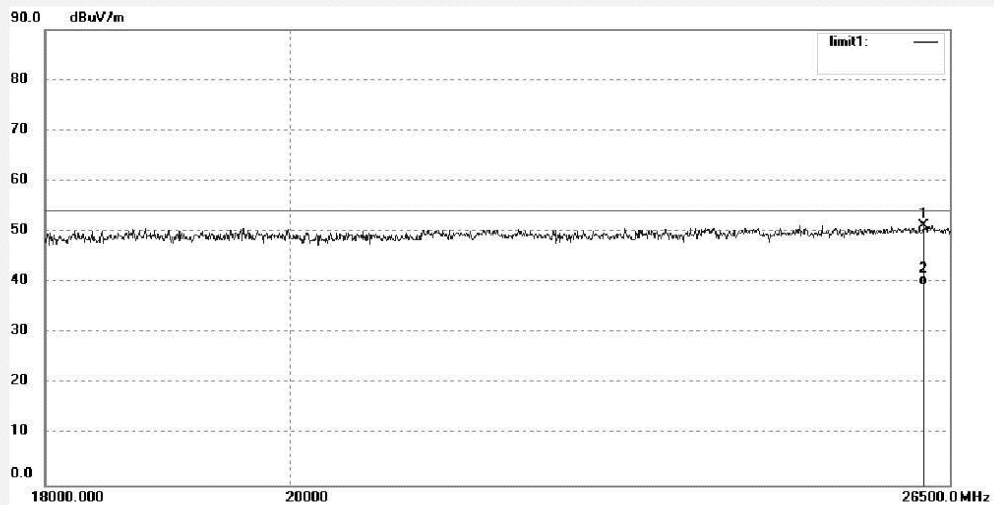

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26203.837	34.63	16.50	51.13	74.00	-22.87	peak			
2	26203.837	22.90	16.50	39.40	54.00	-14.60	AVG			

Produkte
Products



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #1144
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ThinkPad Stack Wireless Access Point
Mode: TX 5785MHz
Model: R123
Manufacturer: Lenovo

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 15/04/28/
Time:
Engineer Signature:
Distance: 3m

Note: 802.11a

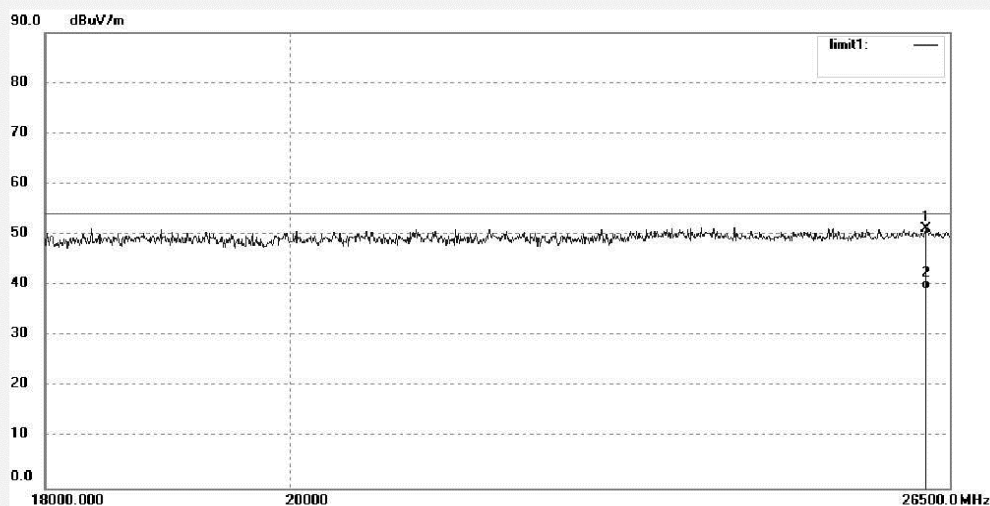

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26234.320	34.58	16.50	51.08	74.00	-22.92	peak			
2	26234.320	22.86	16.50	39.36	54.00	-14.64	AVG			

EMI Sweep(1)

1 / 1

Radiated Emission


EUT Information

EUT Model Name:	ThinkPad Stack Wireless Access Point M/N:R123
Operation mode:	TX 5785MHz
Test Voltage:	AC 120V/60Hz
Comment:	802.11a

Common Information

Test Site:	SMQ EMC Lab.
Environment Conditions:	
Antenna Polarization:	Horizontal
Operator Name:	
Comment:	

Copy of FCC Electric Field Strength 26.5-40GHz

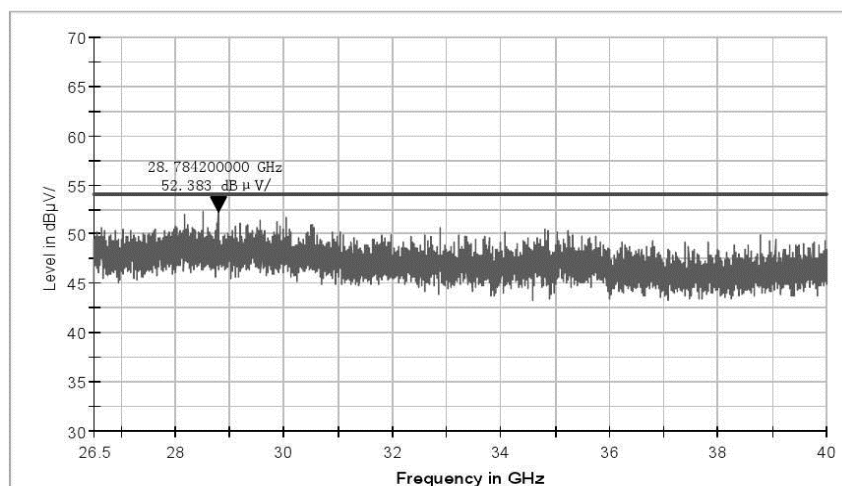

EMI Sweep(1)

1 / 1

Radiated Emission


EUT Information

EUT Model Name:	ThinkPad Stack Wireless Access Point M/N:R123
Operation mode:	TX 5785MHz
Test Voltage:	AC 120V/60Hz
Comment:	802.11a

Common Information

Test Site:	SMQ EMC Lab.
Environment Conditions:	
Antenna Polarization:	Vertical
Operator Name:	
Comment:	

Copy of FCC Electric Field Strength 26.5-40GHz

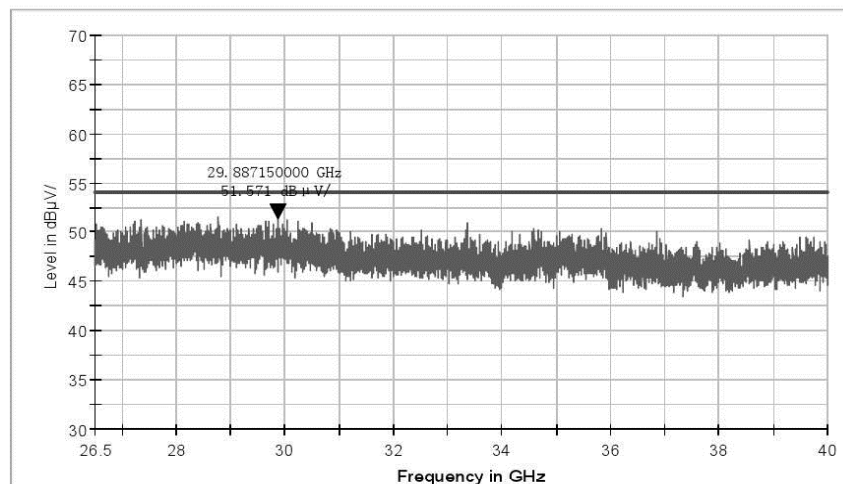

CH165


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: ThinkPad Stack Wireless Access Point M/N:R123
 Manufacturer: Lenovo
 Operating Condition: TX 5825MHz
 Test Site: 2# Chamber
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: X
 Start of Test: 2015-5-4 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB STD VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

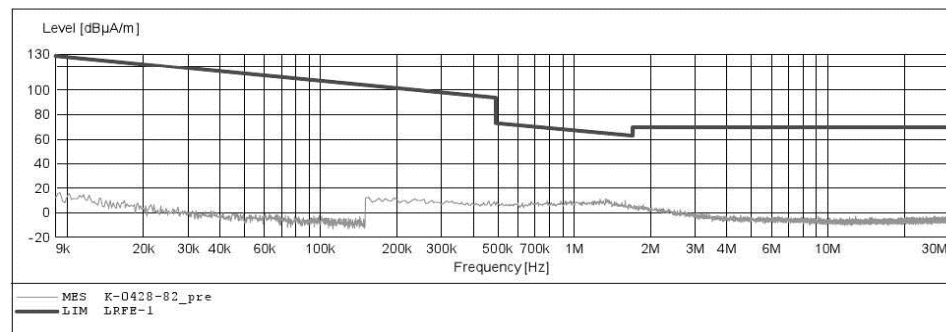


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: ThinkPad Stack Wireless Access Point M/N:R123
 Manufacturer: Lenovo
 Operating Condition: TX 5825MHz
 Test Site: 2# Chamber
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Y
 Start of Test: 2015-5-4 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB STD VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

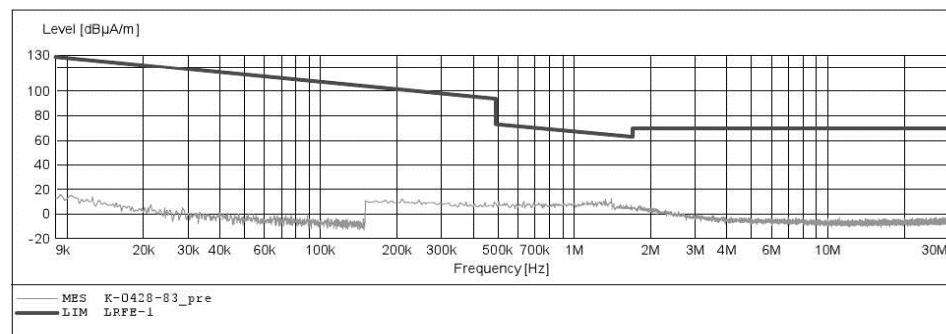


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: ThinkPad Stack Wireless Access Point M/N:R123
 Manufacturer: Lenovo
 Operating Condition: TX 5825MHz
 Test Site: 2# Chamber
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Z
 Start of Test: 2015-5-4 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB STD VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

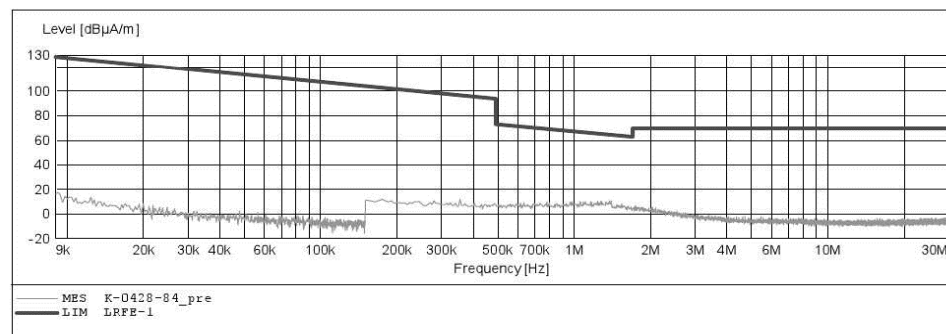

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #815	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/21/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 5825MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	
Note: 802.11a	

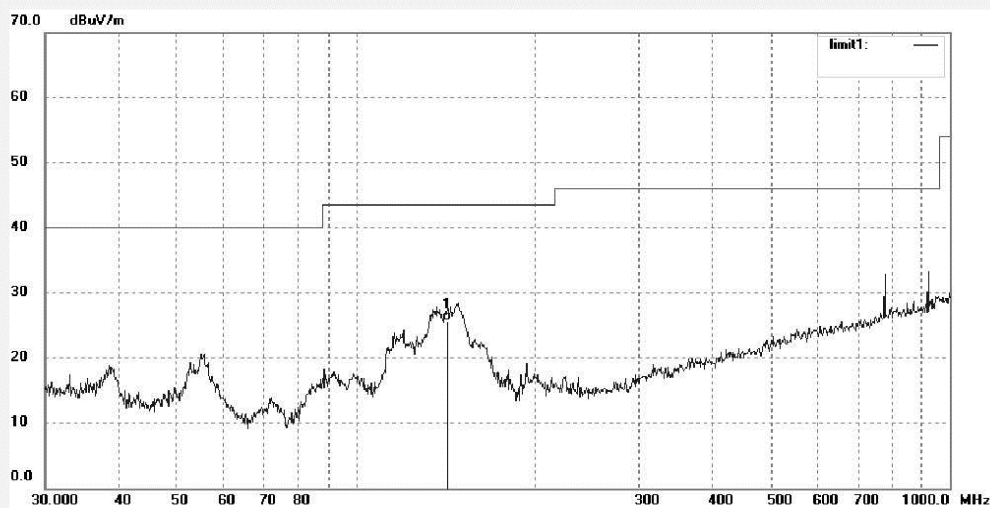

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	142.8240	40.93	-15.23	25.70	43.50	-17.80	QP			

Produkte
Products



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #816
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ThinkPad Stack Wireless Access Point
Mode: TX 5825MHz
Model: R123
Manufacturer: Lenovo

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 15/04/21/
Time:
Engineer Signature:
Distance: 3m

Note: 802.11a

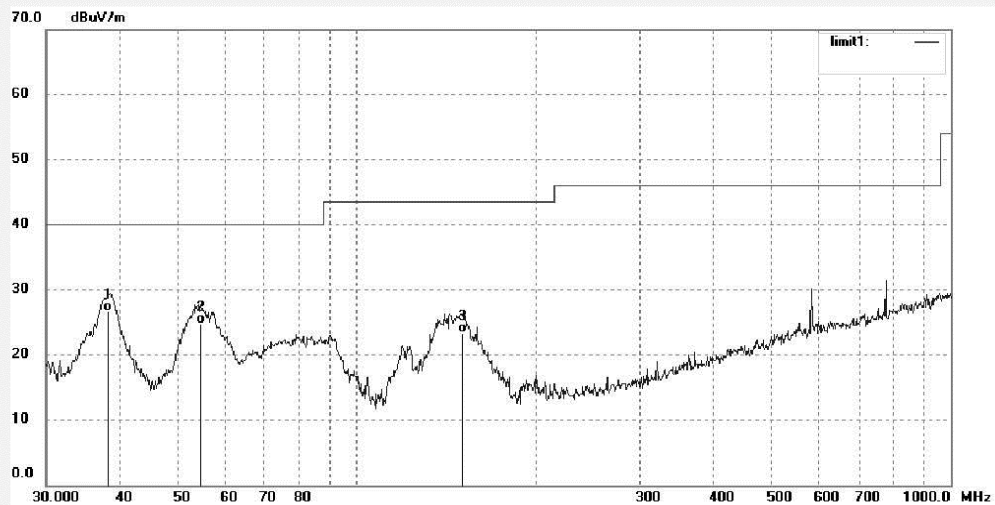

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	38.2120	37.75	-11.14	26.61	40.00	-13.39	QP			
2	54.6428	37.77	-12.95	24.82	40.00	-15.18	QP			
3	151.0663	38.56	-15.14	23.42	43.50	-20.08	QP			

Produkte
Products



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #526
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ThinkPad Stack Wireless Access Point
Mode: TX 5825MHz
Model: R123
Manufacturer: Lenovo

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 15/04/18/
Time:
Engineer Signature:
Distance: 3m

Note: 802.11a

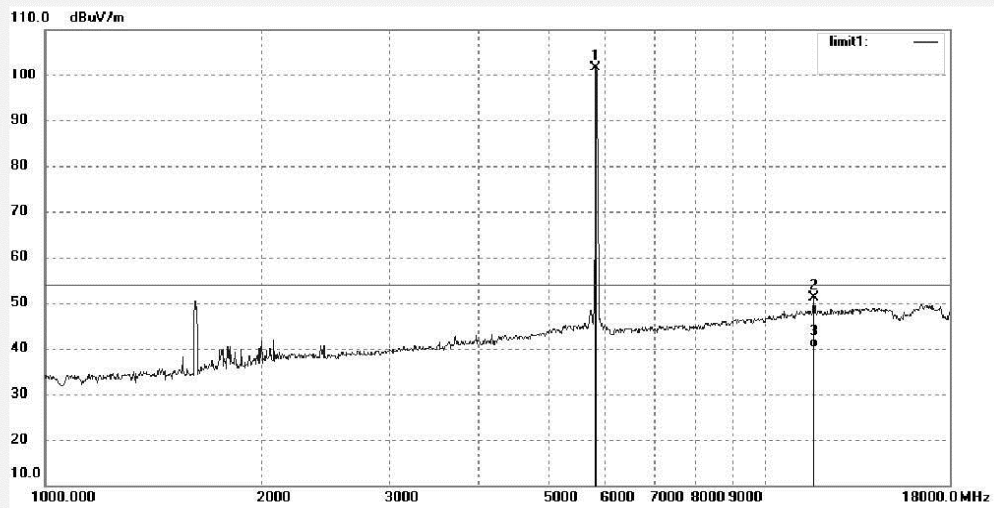

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5825.000	99.77	1.97	101.74	/	/	peak			
2	11650.347	40.29	10.95	51.24	74.00	-22.76	peak			
3	11650.347	29.07	10.95	40.02	54.00	-13.98	AVG			

Produkte
Products



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #527
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ThinkPad Stack Wireless Access Point
Mode: TX 5825MHz
Model: R123
Manufacturer: Lenovo

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 15/04/18/
Time:
Engineer Signature:
Distance: 3m

Note: 802.11a

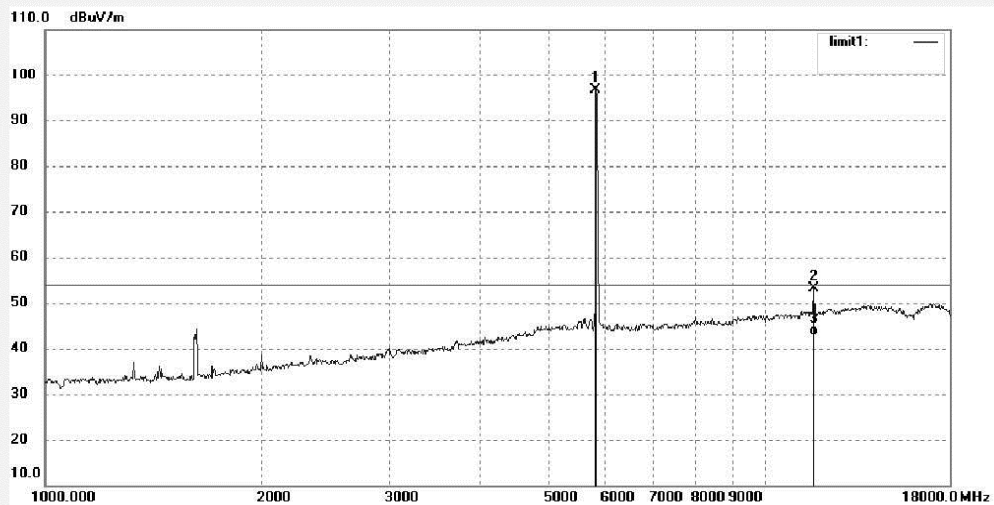

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5825.000	94.69	1.97	96.66	/	/	peak			
2	11650.412	42.28	10.95	53.23	74.00	-20.77	peak			
3	11650.412	31.85	10.95	42.80	54.00	-11.20	AVG			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #1147	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 5825MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	

Note: 802.11a

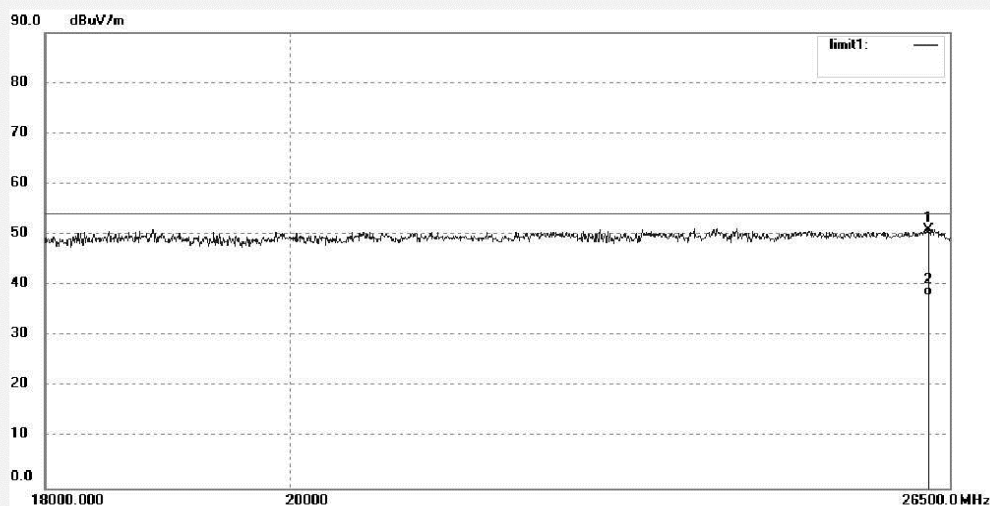

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26264.839	34.57	16.50	51.07	74.00	-22.93	peak			
2	26264.839	21.44	16.50	37.94	54.00	-16.06	AVG			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #1148	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 5825MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	

Note: 802.11a

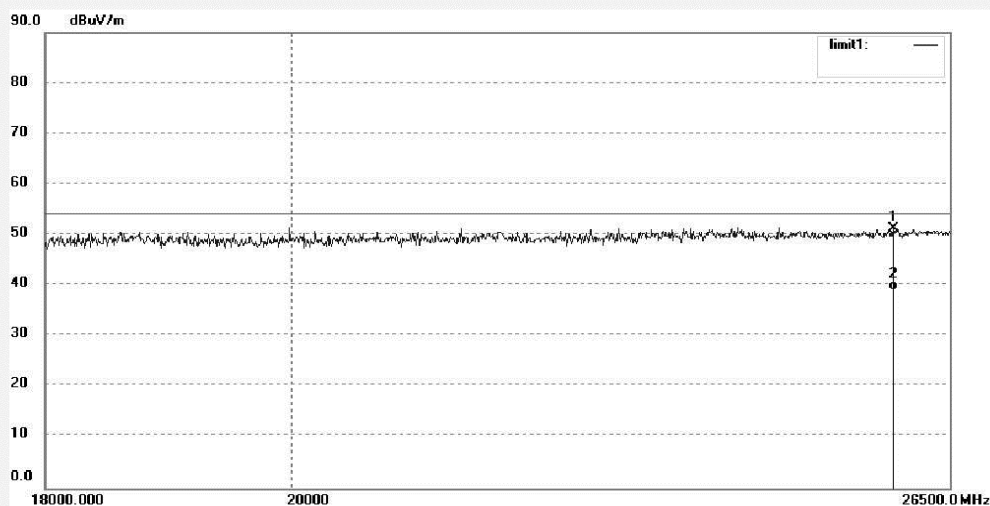

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25870.847	34.76	16.50	51.26	74.00	-22.74	peak			
2	25870.847	22.46	16.50	38.96	54.00	-15.04	AVG			

EMI Sweep(1)

1 / 1

Radiated Emission


EUT Information

EUT Model Name:	ThinkPad Stack Wireless Access Point M/N:R123
Operation mode:	TX 5825MHz
Test Voltage:	AC 120V/60Hz
Comment:	802.11a

Common Information

Test Site:	SMQ EMC Lab.
Environment Conditions:	
Antenna Polarization:	Horizontal
Operator Name:	
Comment:	

Copy of FCC Electric Field Strength 26.5-40GHz

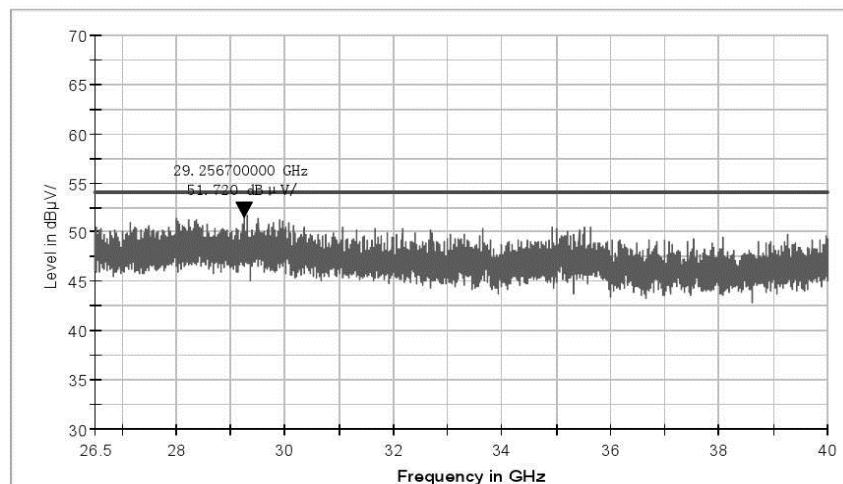

EMI Sweep(1)

1 / 1

Radiated Emission


EUT Information

EUT Model Name:	ThinkPad Stack Wireless Access Point M/N:R123
Operation mode:	TX 5825MHz
Test Voltage:	AC 120V/60Hz
Comment:	802.11a

Common Information

Test Site:	SMQ EMC Lab.
Environment Conditions:	
Antenna Polarization:	Vertical
Operator Name:	
Comment:	

Copy of FCC Electric Field Strength 26.5-40GHz

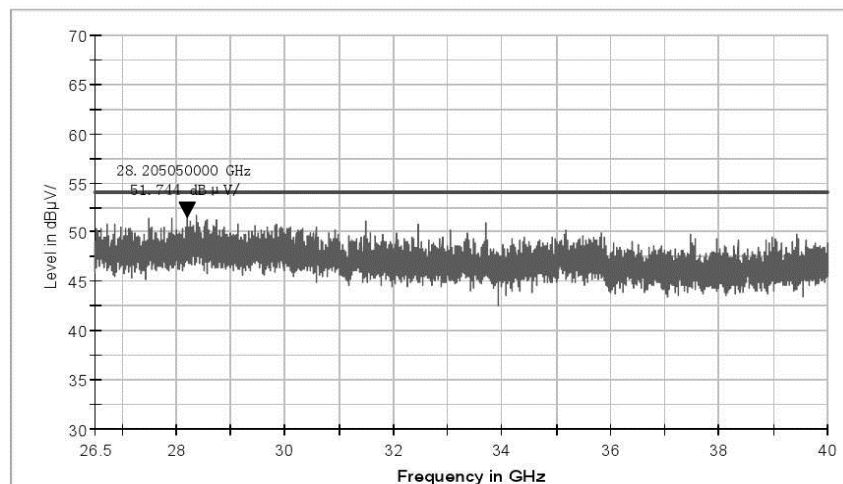

802.11n HT20
CH149


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: ThinkPad Stack Wireless Access Point M/N:R123
 Manufacturer: Lenovo
 Operating Condition: TX 5745MHz
 Test Site: 2# Chamber
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: X
 Start of Test: 2015-5-4 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

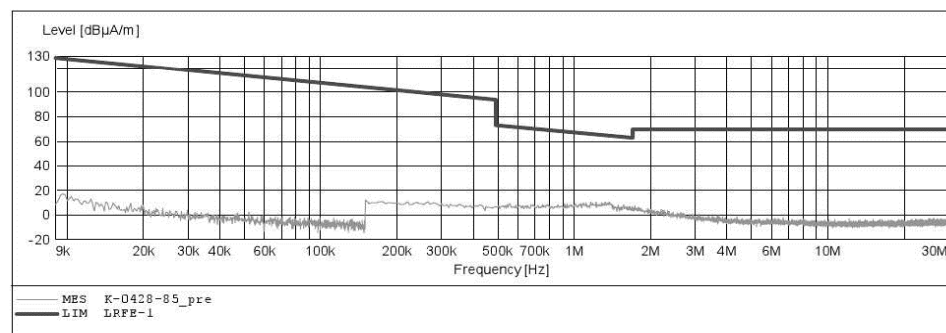


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: ThinkPad Stack Wireless Access Point M/N:R123
 Manufacturer: Lenovo
 Operating Condition: TX 5745MHz
 Test Site: 2# Chamber
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Y
 Start of Test: 2015-5-4 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB STD VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

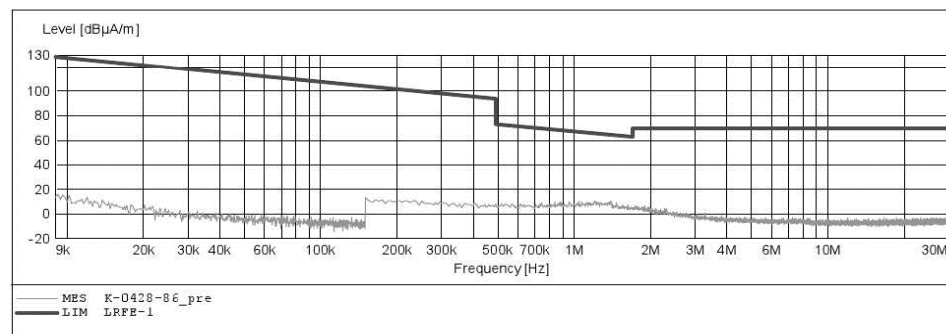


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: ThinkPad Stack Wireless Access Point M/N:R123
 Manufacturer: Lenovo
 Operating Condition: TX 5745MHz
 Test Site: 2# Chamber
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Z
 Start of Test: 2015-5-4 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB STD VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

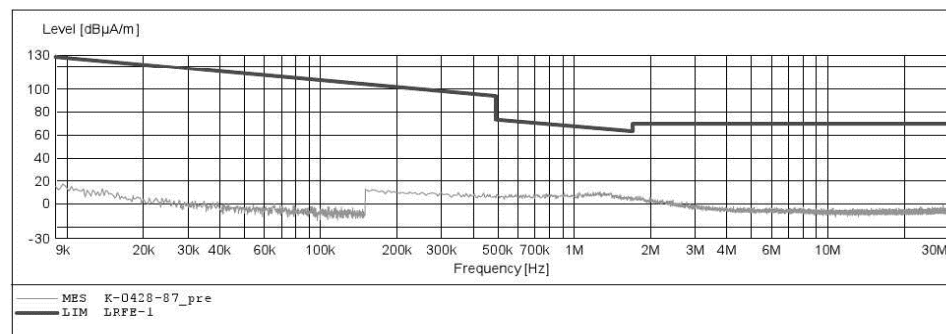

Produkte
Products



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #817
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ThinkPad Stack Wireless Access Point
Mode: TX 5745MHz
Model: R123
Manufacturer: Lenovo

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 15/04/21/
Time:
Engineer Signature:
Distance: 3m

Note: 802.11n HT20

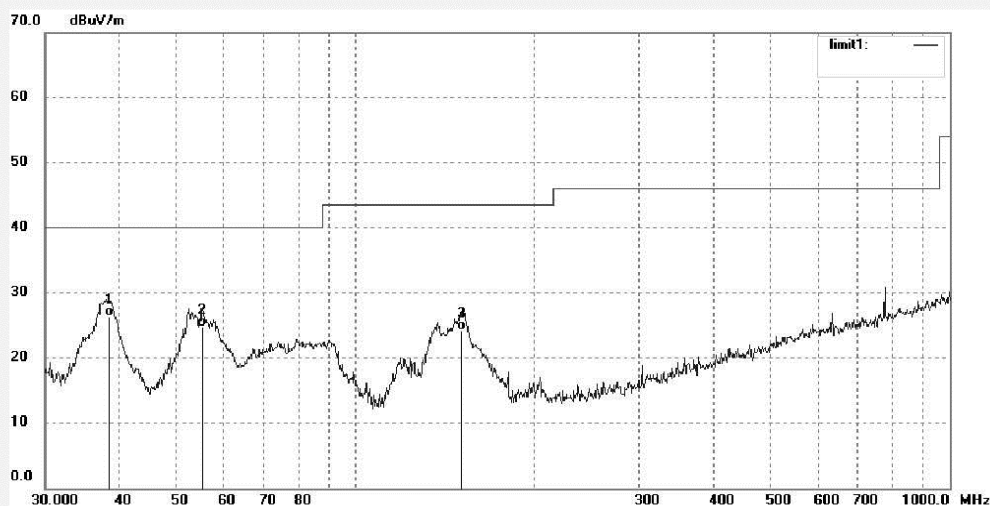

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	38.4808	37.51	-11.21	26.30	40.00	-13.70	QP			
2	55.2207	37.75	-13.02	24.73	40.00	-15.27	QP			
3	150.5378	39.33	-15.15	24.18	43.50	-19.32	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #818	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/21/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 5745MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	
Note: 802.11n HT20	

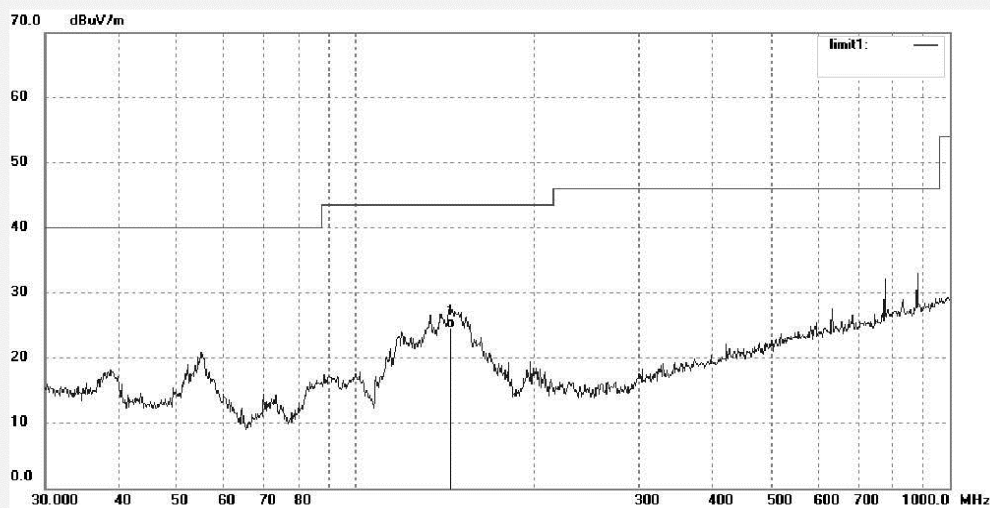

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	144.8418	39.79	-15.23	24.56	43.50	-18.94	QP			

Produkte
Products



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #528
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ThinkPad Stack Wireless Access Point
Mode: TX 5745MHz
Model: R123
Manufacturer: Lenovo

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 15/04/18/
Time:
Engineer Signature:
Distance: 3m

Note: 802.11n HT20

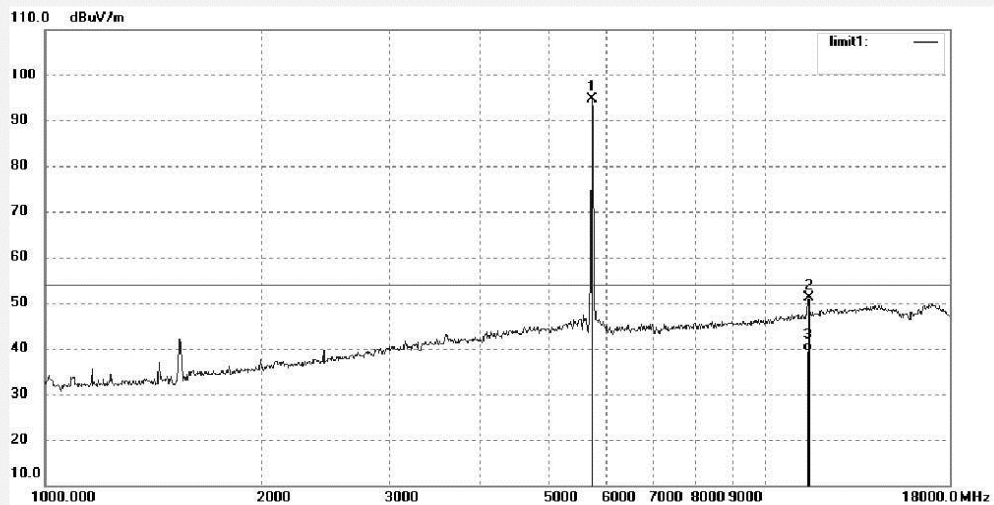

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5745.000	93.01	1.50	94.51	/	/	peak			
2	11490.323	40.63	10.54	51.17	74.00	-22.83	peak			
3	11490.323	28.75	10.54	39.29	54.00	-14.71	AVG			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #529	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/18/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 5745MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	
Note: 802.11n HT20	

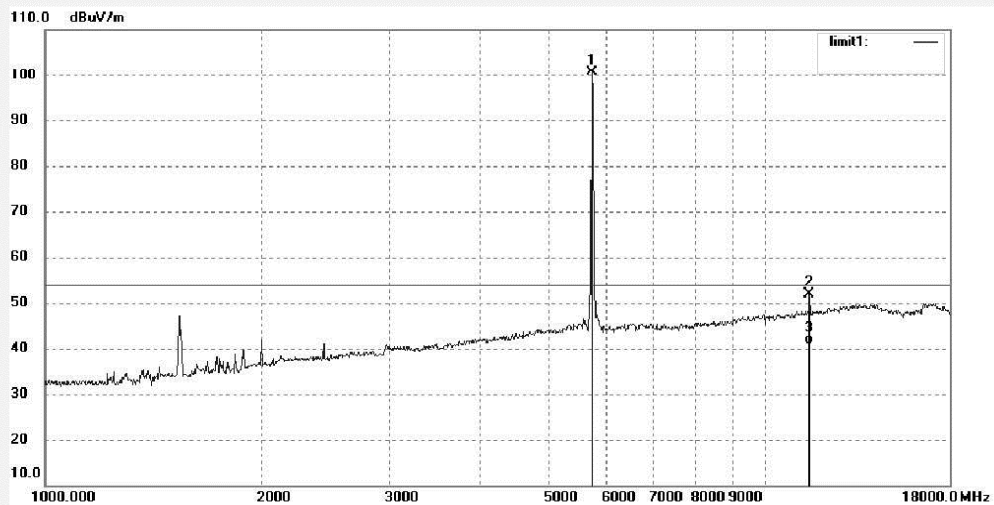

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5745.000	99.06	1.50	100.56	/	/	peak			
2	11490.320	41.36	10.54	51.90	74.00	-22.10	peak			
3	11490.320	30.27	10.54	40.81	54.00	-13.19	AVG			

Produkte
Products



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #1149
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ThinkPad Stack Wireless Access Point
Mode: TX 5745MHz
Model: R123
Manufacturer: Lenovo

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 15/04/28/
Time:
Engineer Signature:
Distance: 3m

Note: 802.11n HT20

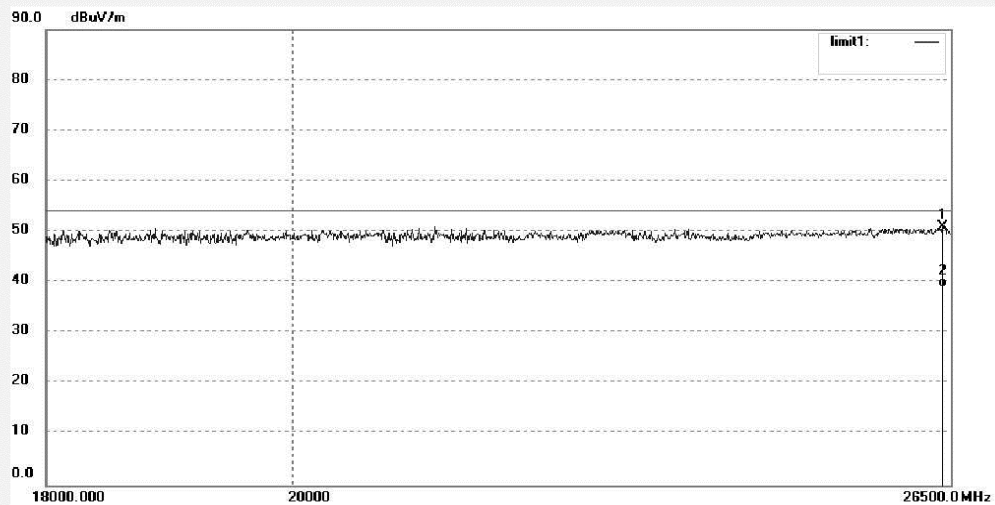

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26407.731	34.08	16.96	51.04	74.00	-22.96	peak			
2	26407.731	22.05	16.96	39.01	54.00	-14.99	AVG			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #1150	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 5745MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	
Note: 802.11n HT20	

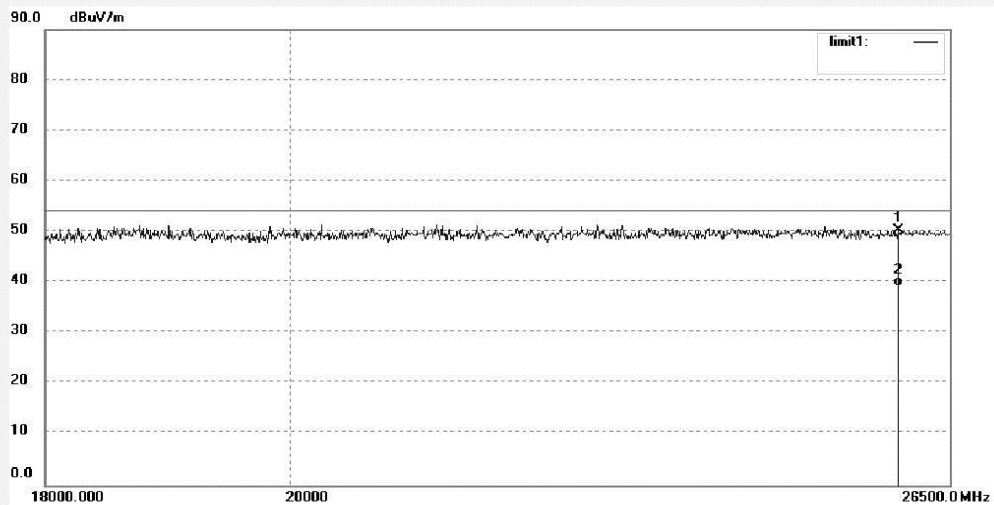

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25921.027	33.03	17.29	50.32	74.00	-23.68	peak			
2	25921.027	22.02	17.29	39.31	54.00	-14.69	AVG			

EMI Sweep(1)

1 / 1

Radiated Emission


EUT Information

EUT Model Name:	ThinkPad Stack Wireless Access Point M/N:R123
Operation mode:	TX 5745MHz
Test Voltage:	AC 120V/60Hz
Comment:	802.11n HT20

Common Information

Test Site:	SMQ EMC Lab.
Environment Conditions:	
Antenna Polarization:	Horizontal
Operator Name:	
Comment:	

Copy of FCC Electric Field Strength 26.5-40GHz

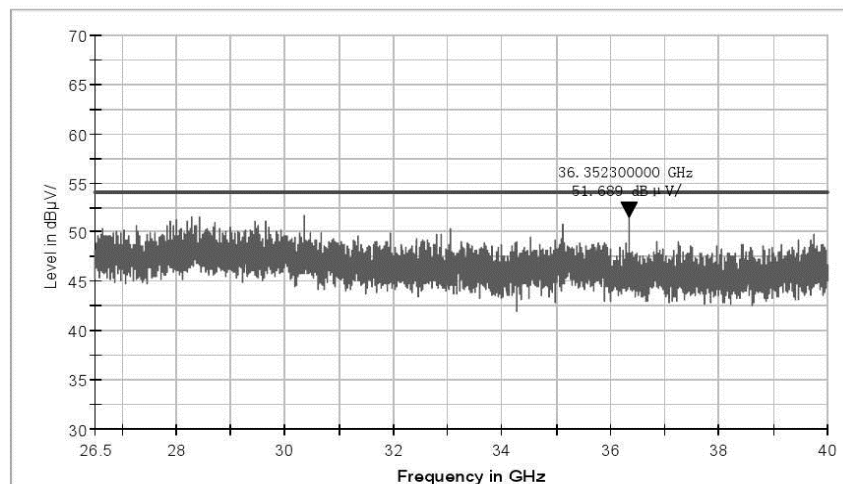

EMI Sweep(1)

1 / 1

Radiated Emission


EUT Information

EUT Model Name:	ThinkPad Stack Wireless Access Point M/N:R123
Operation mode:	TX 5745MHz
Test Voltage:	AC 120V/60Hz
Comment:	802.11n HT20

Common Information

Test Site:	SMQ EMC Lab.
Environment Conditions:	
Antenna Polarization:	Vertical
Operator Name:	
Comment:	

Copy of FCC Electric Field Strength 26.5-40GHz

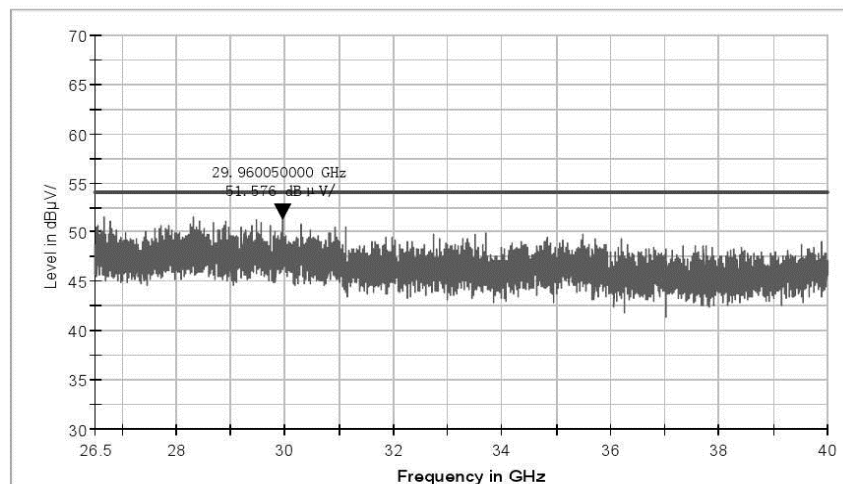

CH157


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: ThinkPad Stack Wireless Access Point M/N:R123
 Manufacturer: Lenovo
 Operating Condition: TX 5785MHz
 Test Site: 2# Chamber
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: X
 Start of Test: 2015-5-5 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB STD VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

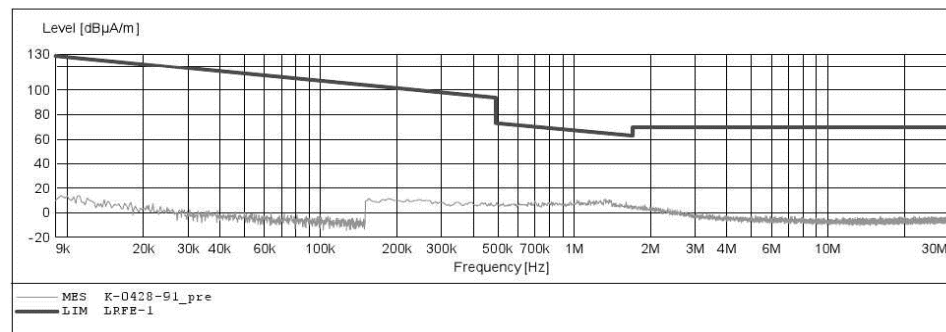


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: ThinkPad Stack Wireless Access Point M/N:R123
 Manufacturer: Lenovo
 Operating Condition: TX 5785MHz
 Test Site: 2# Chamber
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Y
 Start of Test: 2015-5-5 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB STD VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

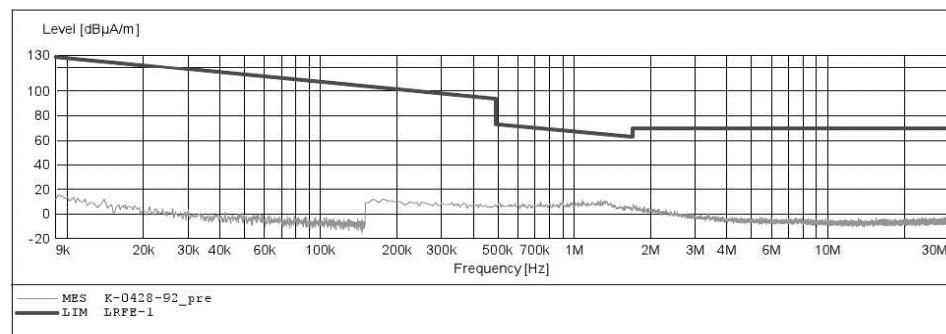


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: ThinkPad Stack Wireless Access Point M/N:R123
 Manufacturer: Lenovo
 Operating Condition: TX 5785MHz
 Test Site: 2# Chamber
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Z
 Start of Test: 2015-5-5 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB STD VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

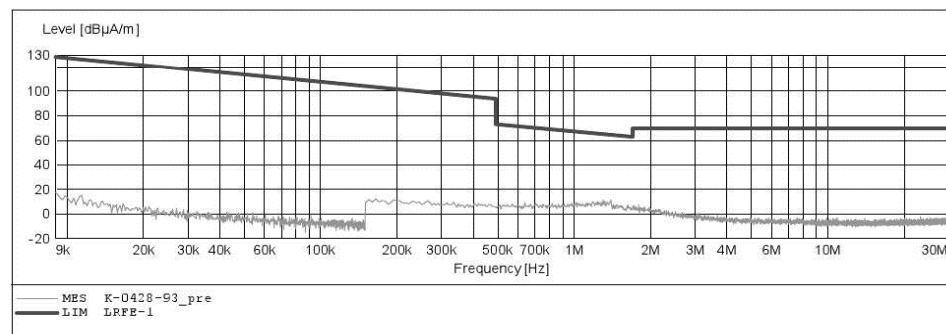

Produkte
Products



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #821
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ThinkPad Stack Wireless Access Point
Mode: TX 5785MHz
Model: R123
Manufacturer: Lenovo

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 15/04/21/
Time:
Engineer Signature:
Distance: 3m

Note: 802.11n HT20

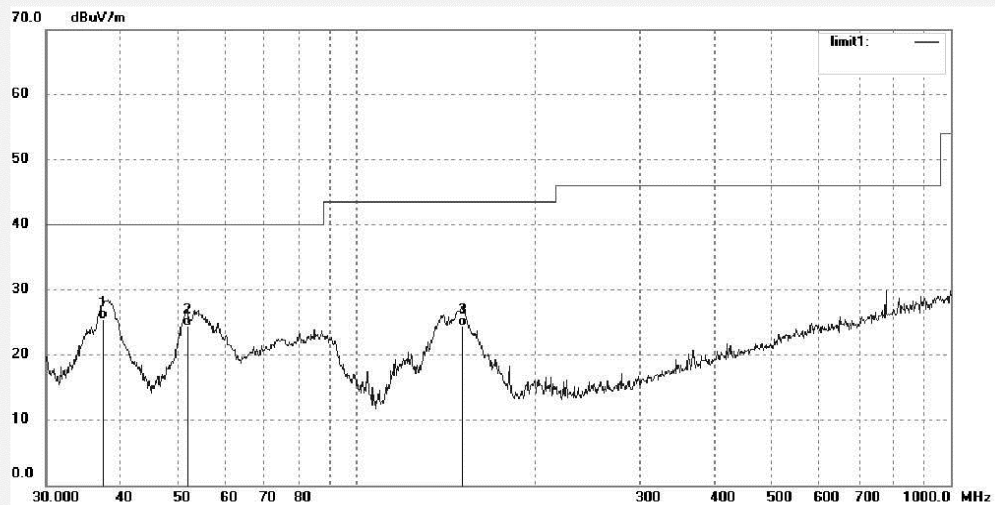

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	37.4164	36.51	-10.96	25.55	40.00	-14.45	QP			
2	51.8430	37.19	-12.74	24.45	40.00	-15.55	QP			
3	151.0663	39.54	-15.14	24.40	43.50	-19.10	QP			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #822	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/21/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 5785MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	
Note: 802.11n HT20	

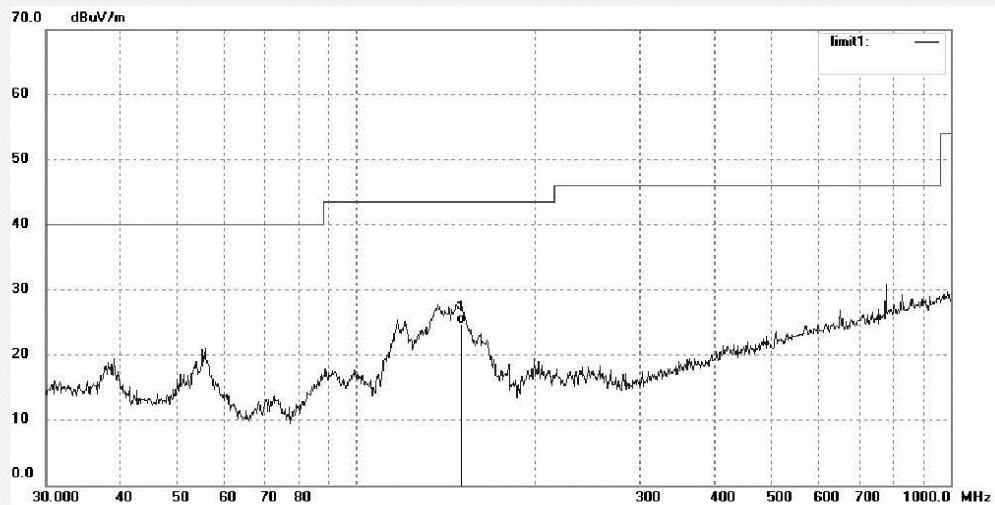

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	150.0107	39.92	-15.16	24.76	43.50	-18.74	QP			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #532	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/18/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 5785MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	
Note: 802.11n HT20	

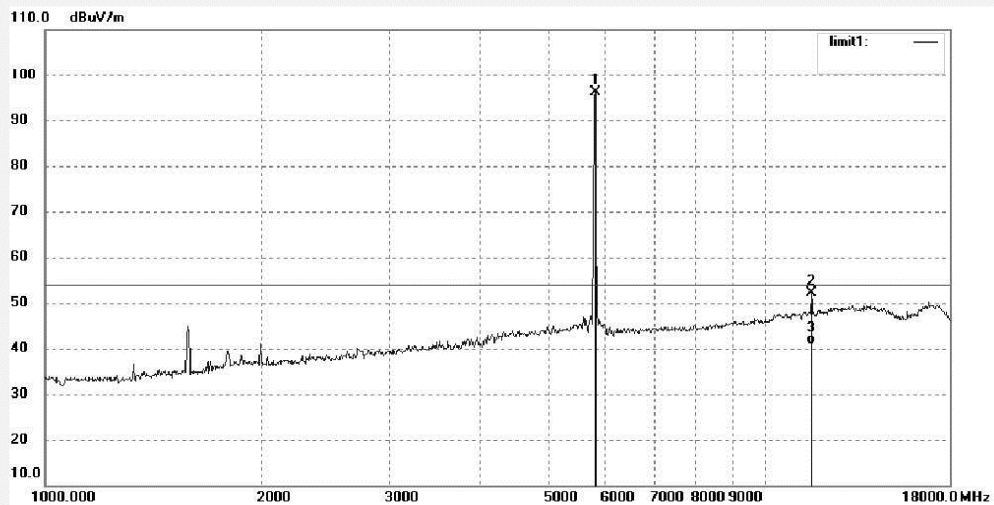

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5785.000	94.15	1.86	96.01	/	/	peak			
2	11570.313	41.53	10.55	52.08	74.00	-21.92	peak			
3	11570.313	30.27	10.55	40.82	54.00	-13.18	AVG			

Produkte
Products



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #533
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ThinkPad Stack Wireless Access Point
Mode: TX 5785MHz
Model: R123
Manufacturer: Lenovo

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 15/04/18/
Time:
Engineer Signature:
Distance: 3m

Note: 802.11n HT20

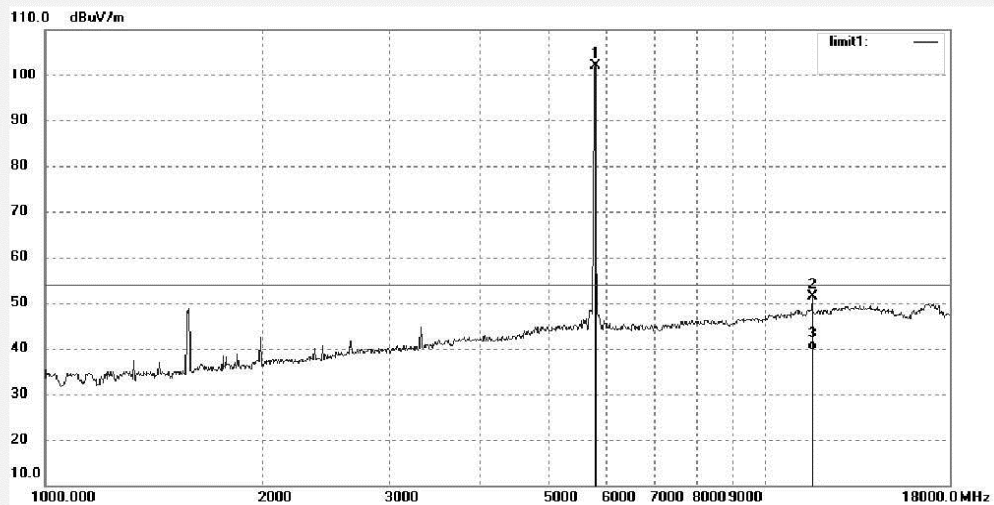

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5805.000	100.08	1.98	102.06	/	/	peak			
2	11610.315	40.70	10.65	51.35	74.00	-22.65	peak			
3	11610.315	28.97	10.65	39.62	54.00	-14.38	AVG			

Produkte
Products



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #1153
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ThinkPad Stack Wireless Access Point
Mode: TX 5785MHz
Model: R123
Manufacturer: Lenovo

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 15/04/28/
Time:
Engineer Signature:
Distance: 3m

Note: 802.11n HT20

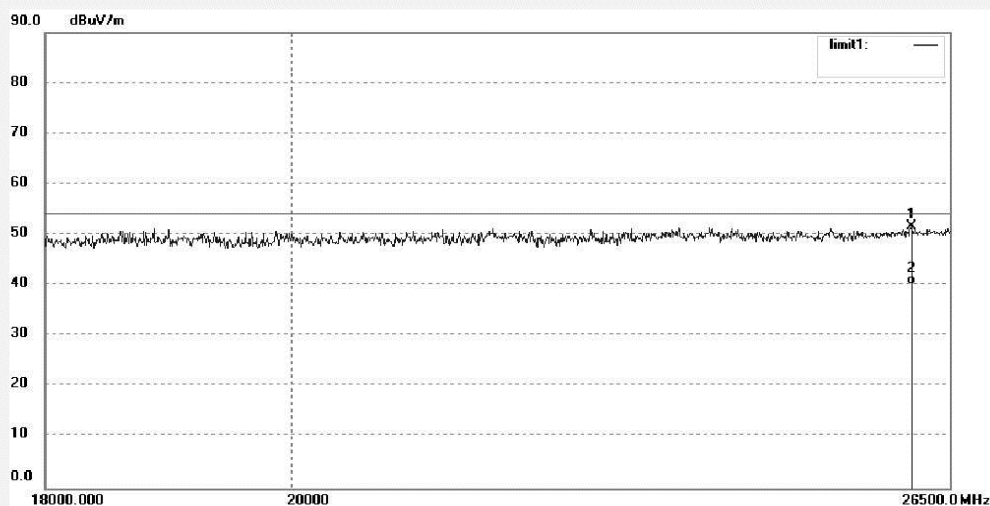

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26072.150	34.48	17.18	51.66	74.00	-22.34	peak			
2	26072.150	22.96	17.18	40.14	54.00	-13.86	AVG			