

## FCC PART 15B

## TEST REPORT

For

### MAXWEST COMMUNICATION LIMITED

ROOM 1802B FORTRESS TOWER 250 KING'S ROAD NORTH POINT, Hong Kong

**FCC ID:2ASP8ASTRO4P**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Mobile Phone
<b>Report Number:</b>	RDG191108017-00D
<b>Report Date:</b>	2019-11-26
<b>Reviewed By:</b>	Jerry Zhang EMC Manager
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

## **TABLE OF CONTENTS**

<b>General Information .....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S) .....	3
TEST METHODOLOGY .....	3
MEASUREMENT UNCERTAINTY .....	4
TEST FACILITY .....	4
DECLARATIONS .....	4
<b>System Test Configuration .....</b>	<b>5</b>
DESCRIPTION OF TEST CONFIGURATION .....	5
EQUIPMENT MODIFICATIONS .....	5
EUT EXERCISE SOFTWARE .....	5
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS .....	5
SUPPORT CABLE LIST AND DETAILS .....	5
BLOCK DIAGRAM OF TEST SETUP .....	6
TEST EQUIPMENT LIST .....	7
ENVIRONMENTAL CONDITIONS .....	7
<b>Summary of Test Results .....</b>	<b>8</b>
<b>Conducted emissions .....</b>	<b>9</b>
EUT SETUP .....	9
EMI TEST RECEIVER SETUP .....	9
TEST PROCEDURE .....	9
TEST DATA .....	11
<b>Radiated emissions .....</b>	<b>13</b>
EUT SETUP .....	13
EMI TEST RECEIVER SETUP .....	14
TEST PROCEDURE .....	14
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	14
TEST DATA .....	15

**GENERAL INFORMATION****Product Description for Equipment under Test (EUT)**

<b>EUT Name:</b>		Mobile Phone
<b>EUT Model:</b>		Astro 4P
<b>Highest Operation Frequency:</b>		2690 MHz
<b>Rated Input Voltage:</b>		3.8Vdc from battery or 5Vdc from Adapter
<b>Adapter Information</b>	<b>Model:</b>	Astro 4P
	<b>Input:</b>	100-240Vac 50/60Hz 0.15A
	<b>Output:</b>	5.0Vac 500mA
<b>Serial Number:</b>		RDG191108017-RF-S1
<b>EUT Received Date:</b>		2019.11.8
<b>EUT Received Status:</b>		Good

**Objective**

This report is prepared on behalf of **MAXWEST COMMUNICATION LIMITED** in accordance with FCC Part 15B Part 2, subpart J, and Part 15, Subpart A and B of the Federal Communications Commission's rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 15 B Class B.

**Related Submittal(s)/Grant(s)**

FCC Part 22H, 24E, 27 PCE submissions with FCC ID: 2ASP8ASTRO4P

FCC Part 15C DSS submissions with FCC ID: 2ASP8ASTRO4P

FCC Part 15C DTS submissions with FCC ID: 2ASP8ASTRO4P

**Test Methodology**

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan).

## Measurement Uncertainty

Parameter	Measurement Uncertainty
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

*Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.*

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

## Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “ $\Delta$ ”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in downloading mode.

### Equipment Modifications

No modification was made to the EUT.

### EUT Exercise Software

The software "Winthrax.exe" was used during test.


### Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
HP	Printer	C3941A	JPTVOB2337
DELL	Keyboard	L100	CNORH656658907BL05DC
SAST	Modem	AEM-2100	293

### Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Serial Cable	yes	No	1.2	Serial Port of Laptop	Modem
Parallel Cable	yes	No	1.2	Parallel Port of Laptop	Printer
Keyboard Cable	yes	No	1.8	USB Port of Laptop	Keyboard
USB Cable	Yes	No	0.8	Adapter	EUT
Earphone	No	No	1.2	EUT	Earphone

## Block Diagram of Test Setup

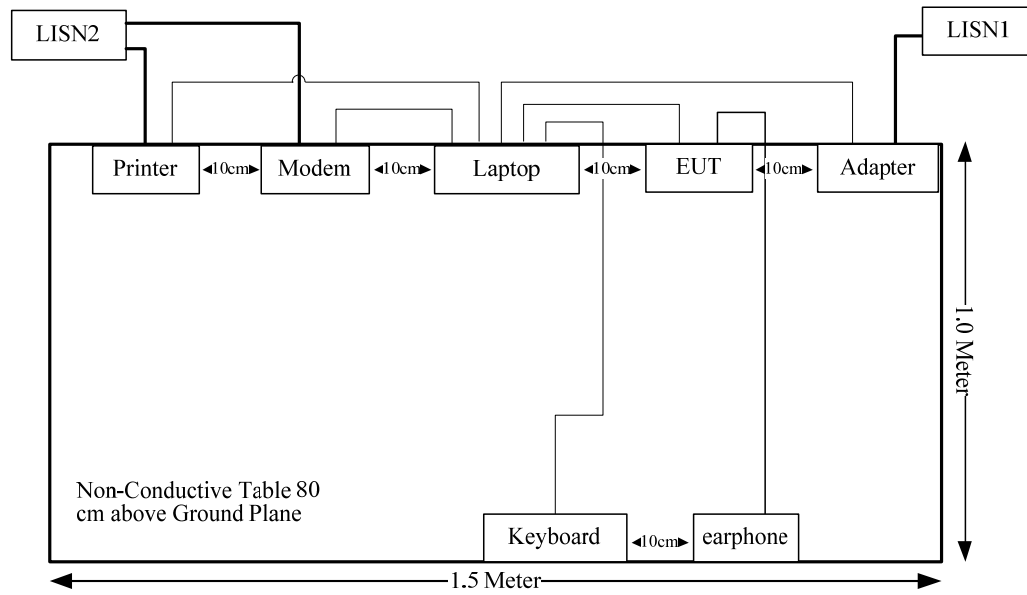

## Test Equipment List

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Conducted emissions</b>					
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2019-09-05	2020-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2018-12-10	2019-12-10
R&S	EMI Test Receiver	ESPI	100120	2019-05-09	2020-05-09
R&S	L.I.S.N	ESH2-Z5	892107/021	2019-09-19	2020-09-19
<b>Radiated emissions Below 1GHz</b>					
R&S	EMI Test Receiver	ESR3	102453	2019-09-12	2020-09-12
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2019-05-06	2020-05-06
HP	Amplifier	8447D	2727A05902	2019-09-05	2020-09-05
<b>Radiated emissions Above 1GHz</b>					
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-05-09	2020-05-09
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2019-09-05	2020-09-05
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2019-09-05	2020-09-05

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Environmental Conditions

Test Item:	Conducted emissions	Radiated emissions Below 1GHz	Radiated emissions Above 1GHz
<b>Test Date:</b>	2019-11-19	2019-11-22	2019-11-18
<b>Tester:</b>	Sem Xiang	Tyler Pan	Neil Liao
<b>Temperature:</b>	25.8. °C	24.9°C	26.3°C
<b>Relative Humidity:</b>	44%	43%	42%
<b>ATM Pressure:</b>	100.5kPa	100.4kPa	100.3kPa

---

**SUMMARY OF TEST RESULTS**


---

Rule and Clause	Description of Test	Test Result
FCC §15.107	Conducted emissions	Compliance
FCC §15.109	Radiated emissions	Compliance



## CONDUCTED EMISSIONS

### EUT Setup

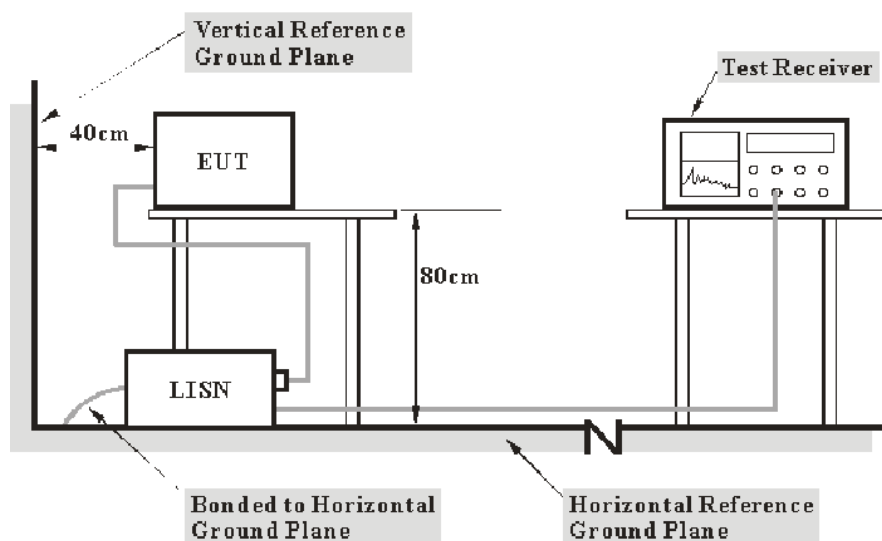

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to the Main LISN with 120V/60Hz AC power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the Adapter of Laptop was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

$V_C$ : corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN


The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Data

Please refer to following table and plots:

Port: L  
 Test Mode: Downloading  
 Power Source: AC 120V/60Hz

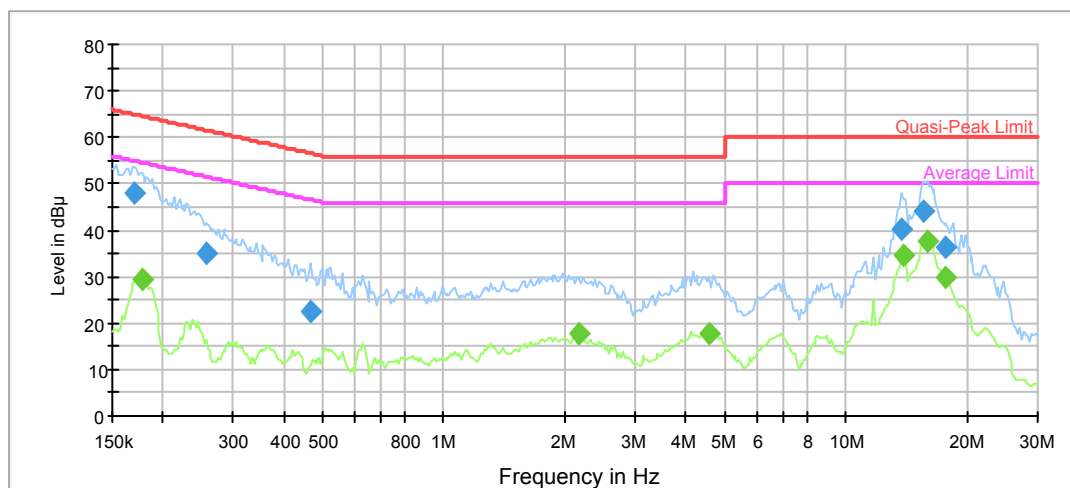


## Final Result 1

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.170714	48.1	9.000	L1	10.9	16.8	64.9
0.256712	34.8	9.000	L1	10.3	26.7	61.5
0.466367	22.6	9.000	L1	9.9	34.0	56.6
13.740269	40.3	9.000	L1	9.9	19.7	60.0
15.637708	43.9	9.000	L1	9.9	16.1	60.0
17.797171	36.4	9.000	L1	10.0	23.6	60.0

## Final Result 2

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.177646	29.5	9.000	L1	10.8	25.1	54.6
2.180425	17.7	9.000	L1	9.7	28.3	46.0
4.598796	17.8	9.000	L1	9.8	28.2	46.0
13.877672	34.6	9.000	L1	9.9	15.4	50.0
15.952026	37.7	9.000	L1	9.9	12.3	50.0
17.797171	30.0	9.000	L1	10.0	20.0	50.0

Port: N  
 Test Mode: Downloading  
 Power Source: AC 120V/60Hz

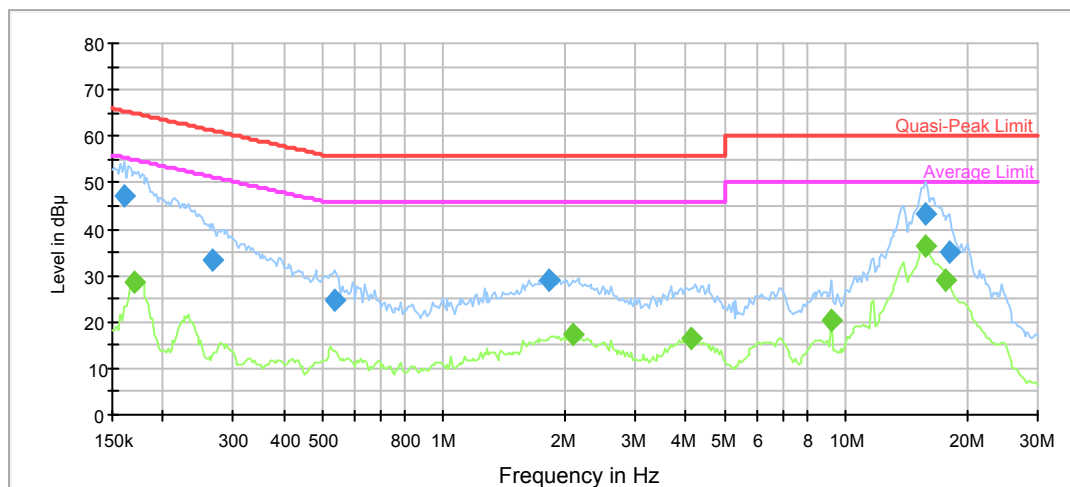

### Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.160820	47.3	9.000	N	11.0	18.1	65.4
0.267135	33.1	9.000	N	10.3	28.1	61.2
0.536077	24.6	9.000	N	9.9	31.4	56.0
1.822873	29.0	9.000	N	9.8	27.0	56.0
15.794085	43.1	9.000	N	9.9	16.9	60.0
18.154894	35.1	9.000	N	10.0	24.9	60.0


### Final Result 2

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.170714	28.5	9.000	N	10.9	26.4	54.9
2.095345	17.1	9.000	N	9.8	28.9	46.0
4.122010	16.4	9.000	N	9.8	29.6	46.0
9.228695	20.2	9.000	N	9.8	29.8	50.0
15.794085	36.5	9.000	N	9.9	13.5	50.0
17.797171	29.2	9.000	N	10.0	20.8	50.0


## RADIATED EMISSIONS

### EUT Setup

Below 1GHz:

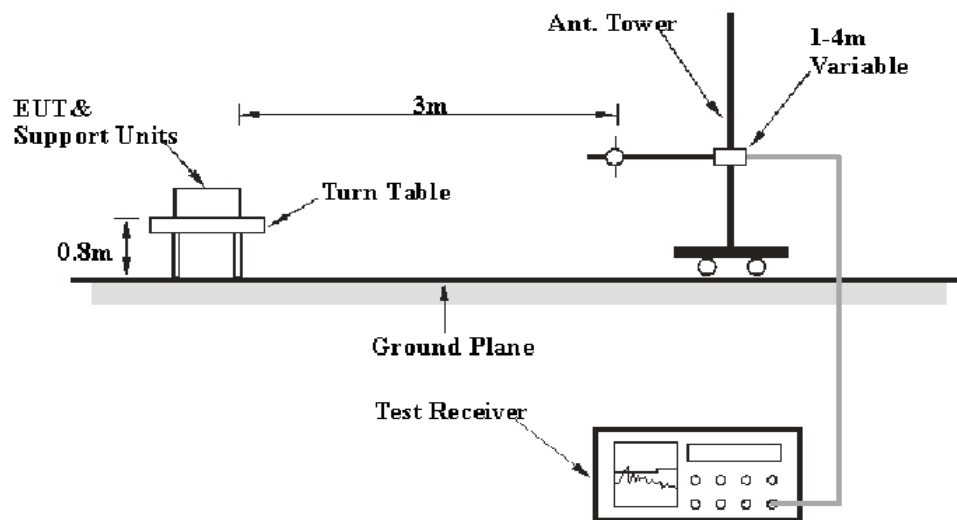

Above 1GHz:

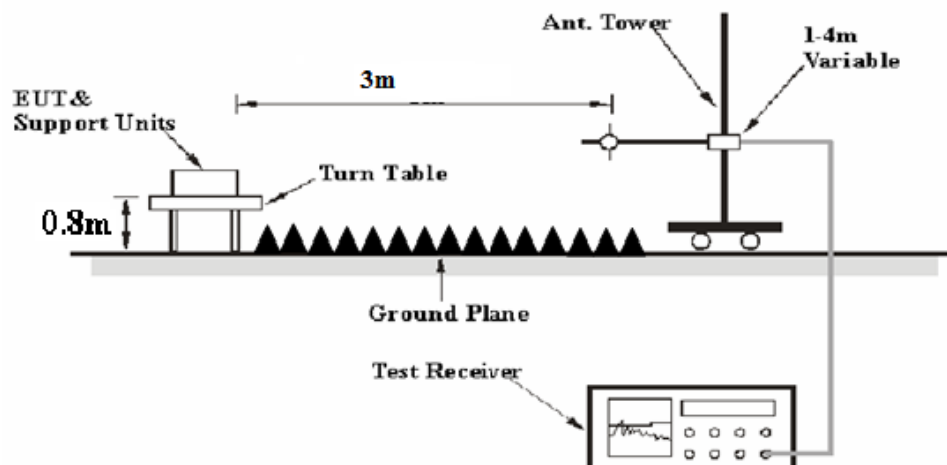

The radiated emission below 1GHz tests were performed in the 3 meters chamber test site A, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.4-2014. The specification used was with the FCC Part 15 B Class B limits.

## EMI Test Receiver Setup

The system was investigated from 30 MHz to 13.5 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	Peak
	1 MHz	Reduced video bandwidth	/	AVG

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

## Test Procedure

During the radiated emissions, the adapter of laptop was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

## Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Meter Reading+ Corrected

Note:

Corrected = Antenna Factor + Cable Loss - Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Limit} - \text{Result}$$

## Test Data

Please refer to following table and plots:

**Condition:** FCC Part 15B Class B  
**EUT:** Mobile Phone  
**Test Mode:** Downloading


**Polarization:** Horizontal  
**Power:** AC 120V/60Hz

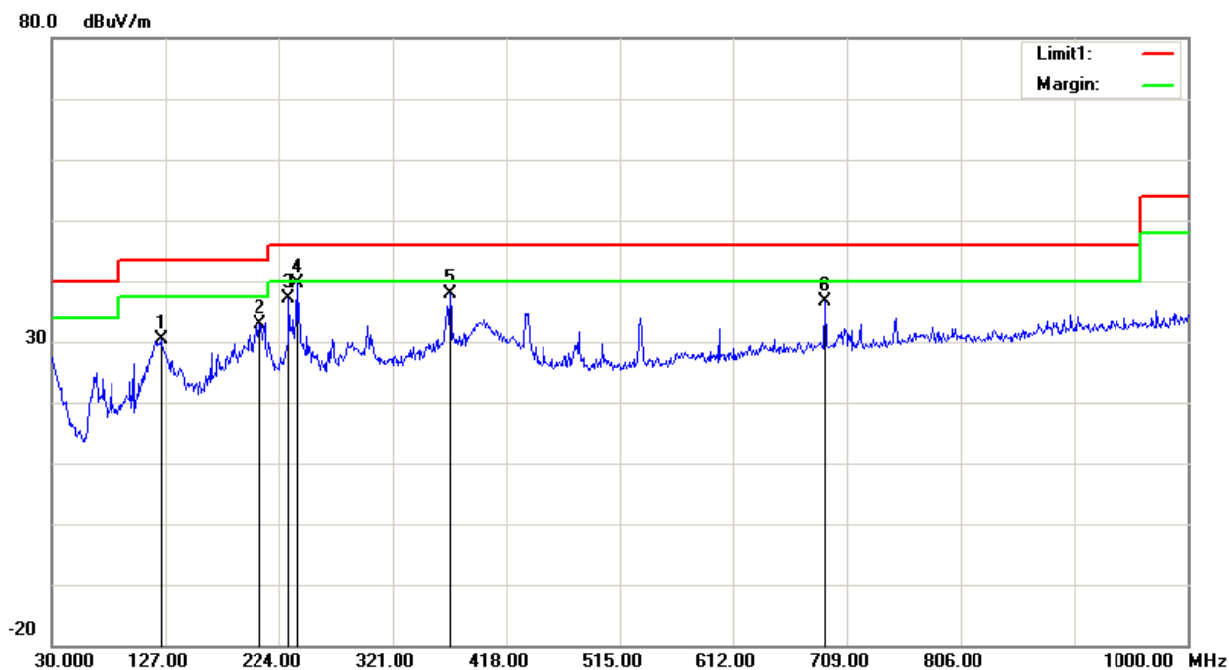

Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
123.1200	35.07	peak	-4.57	30.50	43.50	13.00
207.5100	40.14	peak	-7.25	32.89	43.50	10.61
232.7300	43.54	peak	-6.31	37.23	46.00	8.77
239.5200	45.69	peak	-6.02	39.67	46.00	6.33
370.4700	40.58	peak	-2.76	37.82	46.00	8.18
690.5700	33.87	peak	2.74	36.61	46.00	9.39

Condition: FCC Part 15B Class B  
EUT: Mobile Phone  
Test Mode: Downloading

Polarization: Vertical  
Power: AC 120V/60Hz

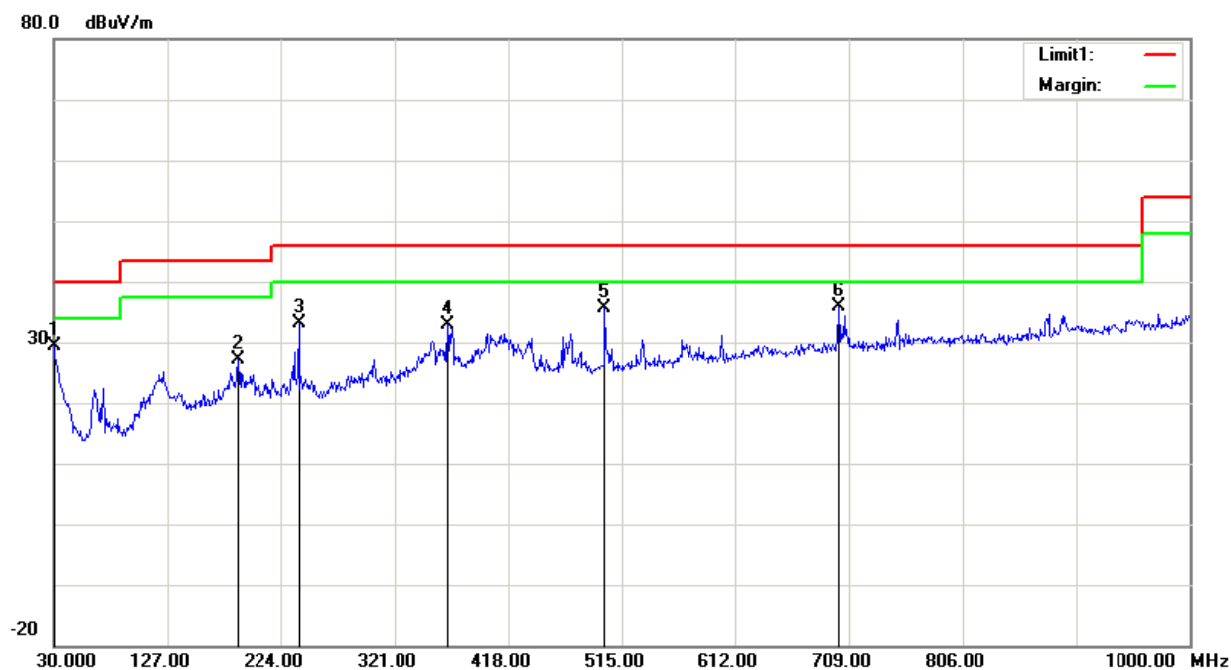


Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	27.67	peak	1.72	29.39	40.00	10.61
187.1400	34.33	peak	-7.29	27.04	43.50	16.46
239.5200	39.19	peak	-6.02	33.17	46.00	12.83
366.5900	35.60	peak	-2.80	32.80	46.00	13.20
500.4500	35.83	peak	-0.32	35.51	46.00	10.49
700.2700	32.84	peak	2.96	35.80	46.00	10.20



Condition: FCC Part 15B Class B  
EUT: Mobile Phone  
Test Mode: Downloading


Polarization: Horizontal  
Power: AC 120V/60Hz

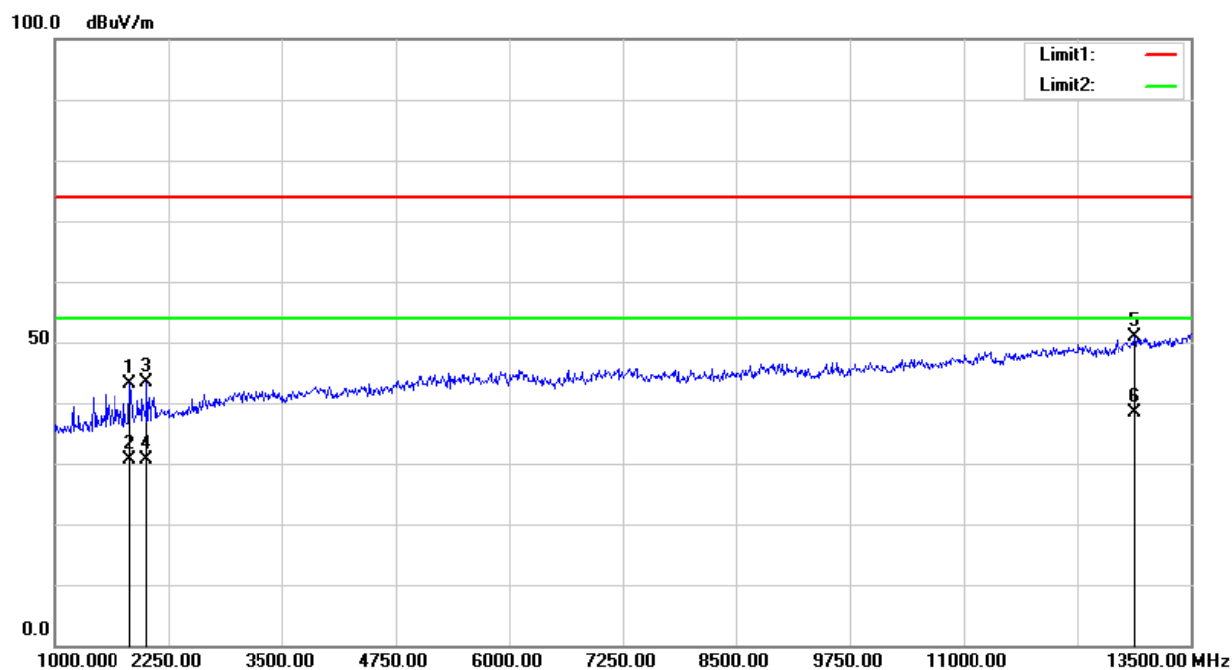

Frequency (MHz)	Reading (dB $\mu$ V)	Detector	Corrected (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1831.250	40.87	peak	2.34	43.21	74.00	30.79
1831.250	28.36	AVG	2.34	30.70	54.00	23.30
2012.500	39.70	peak	3.70	43.40	74.00	30.60
2012.500	27.00	AVG	3.70	30.70	54.00	23.30
12887.500	29.37	peak	21.50	50.87	74.00	23.13
12887.500	17.00	AVG	21.50	38.50	54.00	15.50

Condition: FCC Part 15B Class B  
EUT: Mobile Phone  
Test Mode: Downloading

Polarization: Vertical  
Power: AC 120V/60Hz

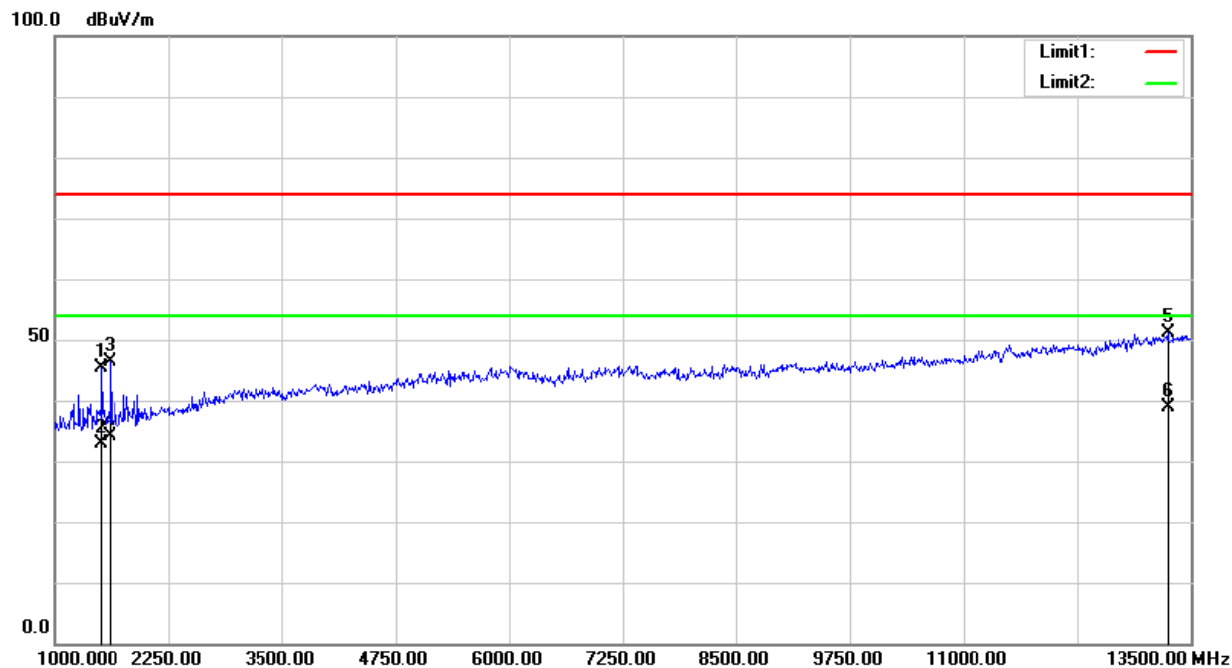

Frequency (MHz)	Reading (dB $\mu$ V)	Detector	Corrected (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1512.500	44.08	peak	1.26	45.34	74.00	28.66
1512.500	31.55	AVG	1.26	32.81	54.00	21.19
1612.500	44.98	peak	1.49	46.47	74.00	27.53
1612.500	32.54	AVG	1.49	34.03	54.00	19.97
13256.250	28.89	peak	22.33	51.22	74.00	22.78
13256.250	16.57	AVG	22.33	38.90	54.00	15.10

\*\*\*\*\*END OF REPORT\*\*\*\*\*