



Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V04

Report Template Revision Date: 2018-07-06

Test Report

Report No.: CQASZ20230500864E-01
Applicant: Shenzhen Hollyland Technology Co.,Ltd
Address of Applicant: 8F, Building 5D, Skyworth Innovation Valley, Tangtou Road. Shiyan Street, Baoan District Shenzhen, China.
Equipment Under Test (EUT):
Product: WIRELESS VIDEO TRANSMISSION SYSTEM
Model No.: Mars M1, Mars M1 Pro, Mars M1 Plus, Mars M1 Lite, Mars M1 Enhanced
Test Model No.: Mars M1
Brand Name: HOLLYLAND
FCC ID: 2ADZC-9803
Standards: 47 CFR Part 15, Subpart E
KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Date of Receipt: 2023-05-23
Date of Test: 2023-05-23 to 2023-06-01
Date of Issue: 2023-06-19
Test Result: **PASS***

*In the configuration tested, the EUT complied with the standards specified above

Tested By: Lewis Zhou
(Lewis Zhou)

Reviewed By: Timo Lei
(Timo Lei)

Approved By: Jack Ai
(Jack Ai)



1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20230500864E-01	Rev.01	Initial report	2023-06-19

Note:

The difference between the new EUT and the original EUT is that the FPGA package has been changed, The bit number U12 becomes the bit number U2010, the mipi screen driver SSD2828 chip(bit number U2016) has been added, and the two DC socket ports have been changed from the original straight port to the threaded port(bit number DC1, bit number DC2), These changes do not affect the RF performance

The report only embodies the test data of the new prototype
original prototype refer to original test report NO.CQASZ20220701184E

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Output Power and transmit power control mechanism	47 CFR Part 15 Subpart E	ANSI C63.10-2013	N/A
Emission Bandwidth	47 CFR Part 15 Subpart E	ANSI C63.10-2013	N/A
Peak Power Spectral Density	47 CFR Part 15 Subpart E	ANSI C63.10-2013	N/A
Frequency stability	47 CFR Part 15 Subpart E	ANSI C63.10-2013	N/A
Operation in the absence of information to the transmit	47 CFR Part 15 Subpart E	47 CFR Part 15 Subpart E	PASS
Radiated Spurious Emissions	47 CFR Part 15 Subpart E	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart E	ANSI C63.10-2013	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application


3 Content

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENT	4
4 TEST REQUIREMENT	5
4.1 TEST SETUP	5
4.1.1 For Conducted test setup	5
4.1.2 For Radiated Emissions test setup	5
4.1.3 For Conducted Emissions test setup	6
4.2 TEST ENVIRONMENT	6
4.3 TEST CONDITION	7
5 GENERAL INFORMATION	9
5.1 CLIENT INFORMATION	9
5.2 GENERAL DESCRIPTION OF EUT	9
5.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	9
5.4 DESCRIPTION OF SUPPORT UNITS	10
5.5 TEST LOCATION	11
5.6 TEST FACILITY	11
5.7 DEVIATION FROM STANDARDS	11
5.8 ABNORMALITIES FROM STANDARD CONDITIONS	11
5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	11
5.10 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	11
6 EQUIPMENT LIST	12
7 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	13
Appendix B): Operation in the absence of information to the transmit	14
Appendix C): AC Power Line Conducted Emission	15
Appendix D): Restricted bands around fundamental frequency (Radiated Emission)	18
Appendix E): Radiated Spurious Emissions	21
8 PHOTOGRAPHS - EUT TEST SETUP	26
8.1 RADIATED SPURIOUS EMISSION	26
8.2 CONDUCTED EMISSION	27
9 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	28

4 Test Requirement

4.1 Test setup

4.1.1 For Conducted test setup

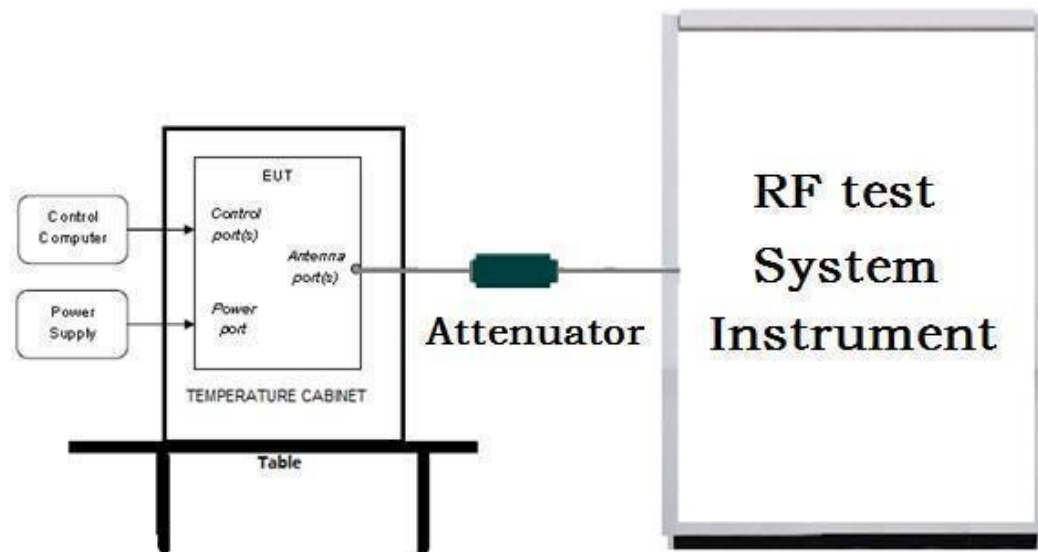

4.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

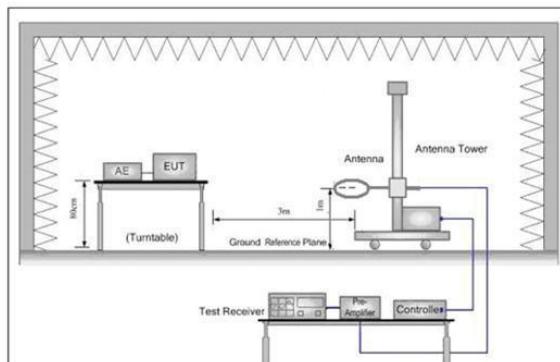


Figure 1. Below 30MHz

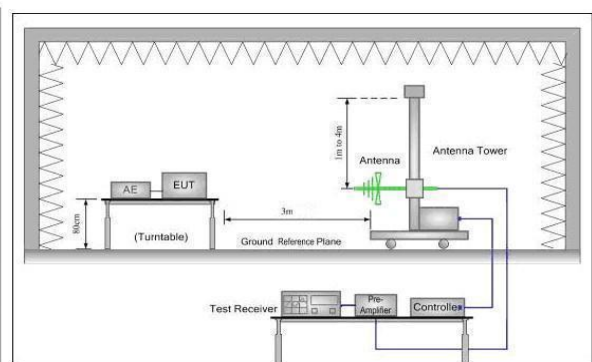


Figure 2. 30MHz to 1GHz


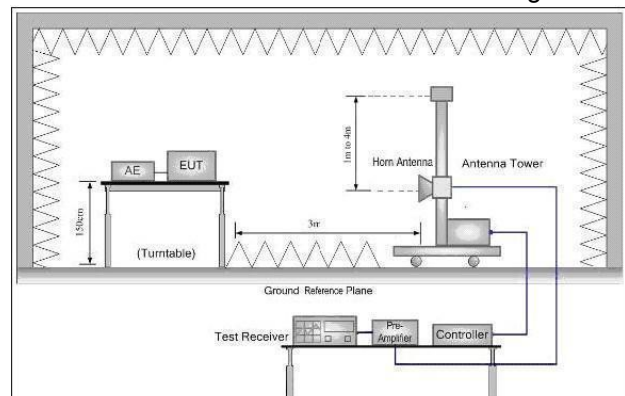


Figure 3. Above 1GHz

4.1.3 For Conducted Emissions test setup

Conducted Emissions setup

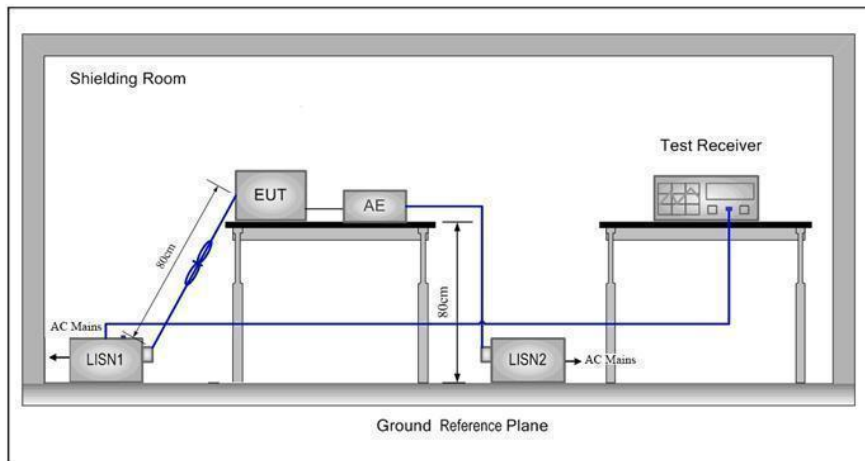

4.2 Test Environment

Operating Environment:		
Conducted Emissions:		
Temperature:	25.6 °C	
Humidity:	60 % RH	
Atmospheric Pressure:	1009 mbar	
Radiated Emissions:		
Temperature:	25.5 °C	
Humidity:	54 % RH	
Atmospheric Pressure:	1009mbar	
Radio conducted item test (RF Conducted test room):		
Temperature:	25.3 °C	
Humidity:	50 % RH	
Atmospheric Pressure:	1009 mbar	
Test Condition	Temperature (°C)	Voltage (V)
TN/VN	+15 to +35	7.6
TL/VL	0	6.84
TH/VL	50	6.84
TL/VH	0	8.36
TH/VH	50	8.36

Remark:

1)The EUT just work in such extreme temperature of 0 °C to 50 °C and the extreme voltage of 6.84V to 8.36V, so here the EUT is tested in the temperature of 0 °C to 50 °C and the voltage of 6.84V to 8.36V.

2)VN: Normal Voltage; TN: Normal Temperature;

TL: Low Extreme Test Temperature; TH: High Extreme Test Temperature;


VL : Low Extreme Test Voltage; VH: High Extreme Test Voltage.

4.3 Test Condition

Test channel:

Tx/Rx	RF Channel		
	Low(L)	Middle(M)	High(H)
5150MHz ~5250 MHz	Channel 0	Channel 2	Channel 3
	5180MHz	5220MHz	5240MHz
5725MHz ~5850 MHz	Channel 4	Channel 6	Channel 8
	5745MHz	5785MHz	5825MHz

Run Software:

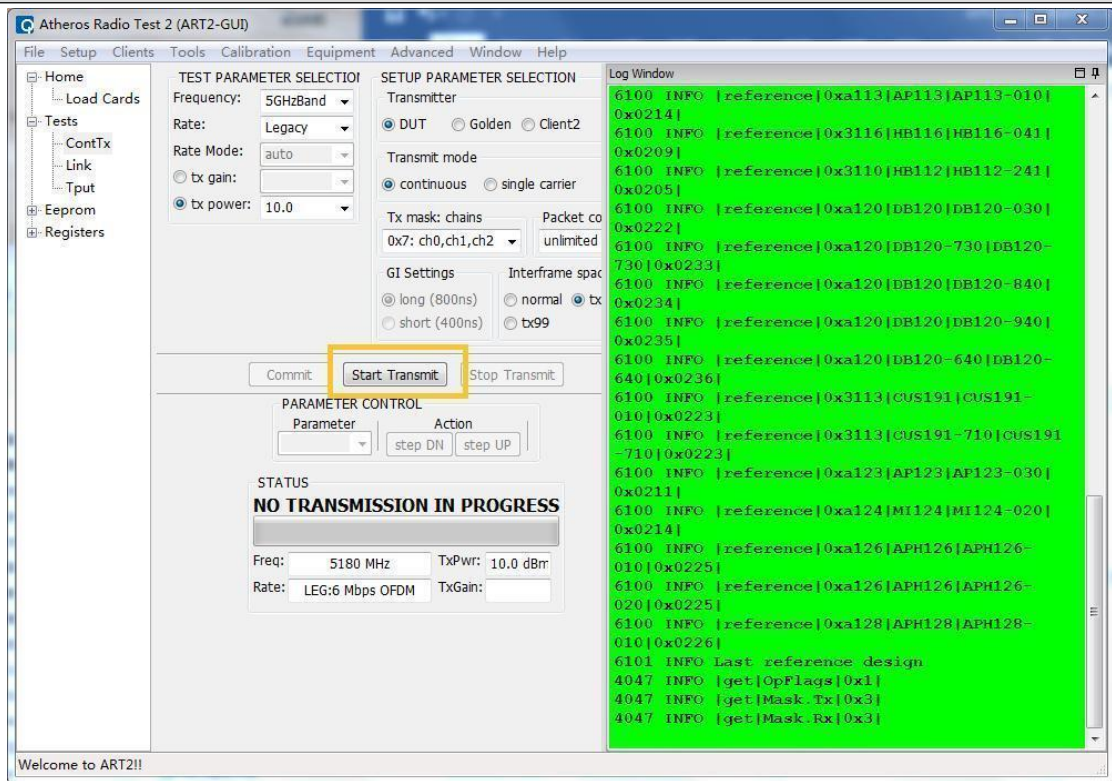

Test mode:

Pre-scan under all rate at lowest channel for Ant1 and Ant2

5 General Information

5.1 Client Information

Applicant:	Shenzhen Hollyland Technology Co.,Ltd
Address of Applicant:	8F, Building 5D, Skyworth Innovation Valley, Tangtou Road. Shiyan Street, Baoan District Shenzhen, China.
Manufacturer:	Shenzhen Hollyland Technology Co.,Ltd
Address of Manufacturer:	8F, Building 5D, Skyworth Innovation Valley, Tangtou Road. Shiyan Street, Baoan District Shenzhen, China.
Factory:	Shenzhen Hollyland Technology Co.,Ltd
Address of Factory:	8F, Building 5D, Skyworth Innovation Valley, Tangtou Road. Shiyan Street, Baoan District Shenzhen, China.

5.2 General Description of EUT

Product Name:	WIRELESS VIDEO TRANSMISSION SYSTEM
Model No.:	Mars M1, Mars M1 Pro, Mars M1 Plus, Mars M1 Lite, Mars M1 Enhanced
Test Model No.:	Mars M1
Trade Mark:	HOLLYLAND
Software Version:	V1.0.1.7
Hardware Version:	H200
Power Supply:	Power by DC7V-16V Type-C: Input 5V/500Ma
EUT Supports Radios application:	5GHz: custom: U-NII-1: 5.15-5.25GHz; U-NII-3: 5.725-5.850GHz

5.3 Product Specification subjective to this standard

Operation Frequency:	5180MHz ~5240 MHz 5745MHz ~5825 MHz
Channel Numbers:	5180MHz ~5240MHz/ 4 channel 5745MHz ~5825MHz/ 5 channel
Type of Modulation:	OFDM
Sample Type:	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Test Power Grade:	N/A
Test Software of EUT:	artgui
Antenna Type:	External antenna
Antenna gain:	3dBi

Operation Frequency each of channel

5150MHz ~5250 MHz			
Channel	Frequency	Channel	Frequency
0	5180MHz	1	5200MHz
2	5220MHz	3	5240MHz
5725MHz ~5850 MHz			
Channel	Frequency	Channel	Frequency
4	5745MHz	5	5765MHz
6	5785MHz	7	5805MHz
8	5825MHz	NA	NA

5.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Certification	Supplied by
PC	Lenovo	ThinkPad E450c	FCC ID	CQA

5.5 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

5.6 Test Facility

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.

5.10 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	3×10^{-8}
2	RF power, conducted	0.86dB
3	Radiated Spurious emission test	5.12dB (Below 1GHz)
		4.6dB (Above 1GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.8°C
6	Humidity test	2.0%
7	DC power voltages	0.5%

6 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2022/9/9	2023/9/8
Spectrum analyzer	R&S	FSU26	CQA-038	2022/9/9	2023/9/8
Spectrum analyzer	R&S	FSU40	CQA-075	2022/9/9	2023/9/8
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2021/9/14	2024/9/13
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2021/9/14	2024/9/13
Preamplifier	EMCI	EMC184055SE	CQA-089	2021/9/14	2024/9/13
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2021/9/14	2024/9/13
Bilog Antenna	R&S	HL562	CQA-011	2022/9/9	2023/9/8
Horn Antenna	R&S	HF906	CQA-012	2022/9/9	2023/9/8
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2022/9/9	2023/9/8
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2022/9/9	2023/9/8
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2022/9/9	2023/9/8
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2022/9/9	2023/9/8
Antenna Connector	CQA	RFC-01	CQA-080	2022/9/9	2023/9/8
Power Sensor	KEYSIGHT	U2021XA	CQA-30	2022/9/9	2023/9/8
N1918A Power Analysis Manager Power Panel	Agilent	N1918A	CQA-074	2021/9/14	2024/9/13
Power meter	R&S	NRVD	CQA-029	2021/9/14	2024/9/13
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2021/9/14	2024/9/13
EMI Test Receiver	R&S	ESR7	CQA-005	2021/9/14	2024/9/13
LISN	R&S	ENV216	CQA-003	2021/9/14	2024/9/13
Coaxial cable	CQA	N/A	CQA-C009	2021/9/14	2024/9/13
DC power	KEYSIGHT	E3631A	CQA-028	2021/9/14	2024/9/13

Test software:

	Manufacturer	Software brand
Radiated Emissions test software	Tonscend	JS1120-3
Conducted Emissions test software	Audix	e3
RF Conducted test software	Audix	e3

7 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15E	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	KDB 789033 D02 General U-NII Test Procedures New Rules v02r01	Guidelines for compliance testing of unlicensed national information infrastructure (U-NII) device part 15, subpart E
4	KDB 662911 D01 Multiple Transmitter Output v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band

Test Results List:

Test Requirement	Test method	Test item	Verdict
Part15E Section 15.407	KDB789033	Emission Bandwidth and Occupied Bandwidth	N/A
Part15E Section 15.407	KDB789033 / KDB 662911	Conducted Output Power and transmit power control mechanism	N/A
Part15E Section 15.407	KDB789033 / KDB 662911	Power Spectral Density	N/A
Part15E Section 15.407	KDB789033 / KDB 662911	Band Edge Measurements	N/A
Part15E Section 15.407	KDB789033	Frequency stability	N/A
Part15C Section 15.203	ANSI C63.10	Antenna Requirement	PASS
Part15E Section 15.407	Section 15.407	Operation in the absence of information to the transmit	PASS
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	PASS
Part15E Section 15.407	KDB789033	Restricted bands around fundamental frequency(Radiated Emission)	PASS
Part15E Section 15.407	KDB789033	Radiated Spurious Emissions	PASS

Appendix A): Antenna Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.407(a)(1) (2) requirement:

The conducted output power limit specified in paragraph (a) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (a) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power and the peak power spectral density shall be reduced by the by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:



The antenna is External antenna with reversed SMA connector. The best case gain of the 5G antenna is 3dBi@Band 1, 3dBi@Band 4

Appendix B): Operation in the absence of information to the transmit

15.407(c) requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signal ling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

Operation in the absence of information to the transmit

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ASK message transmitting from remote device and verify whether it shall resend or discontinue transmission. (manufacturer declare)

Appendix C): AC Power Line Conducted Emission


Test Procedure:	<p>Test frequency range :150KHz-30MHz</p> <p>1)The mains terminal disturbance voltage test was conducted in a shielded room.</p> <p>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</p> <p>3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</p> <p>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</p> <p>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</p>														
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p>	Frequency range (MHz)	Limit (dBμV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBμV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

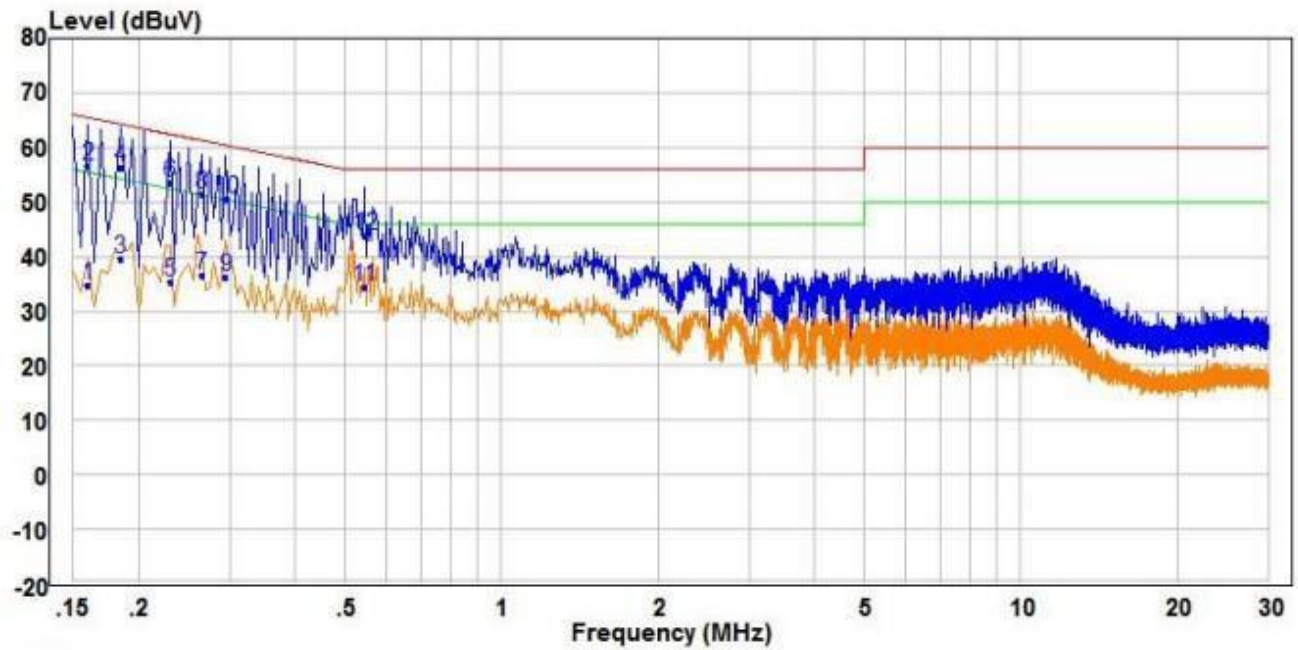

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.160	25.08	9.49	34.57	55.46	-20.89	Average	Line
2	0.160	47.27	9.49	56.76	65.46	-8.70	QP	Line
3	0.185	30.00	9.49	39.49	54.26	-14.77	Average	Line
4 PP	0.185	46.71	9.49	56.20	64.26	-8.06	QP	Line
5	0.230	25.95	9.49	35.44	52.45	-17.01	Average	Line
6	0.230	43.94	9.49	53.43	62.45	-9.02	QP	Line
7	0.265	27.20	9.49	36.69	51.27	-14.58	Average	Line
8	0.265	42.03	9.49	51.52	61.27	-9.75	QP	Line
9	0.295	26.62	9.49	36.11	50.38	-14.27	Average	Line
10	0.295	40.91	9.49	50.40	60.38	-9.98	QP	Line
11 AV	0.545	24.86	9.61	34.47	46.00	-11.53	Average	Line
12	0.545	34.27	9.61	43.88	56.00	-12.12	QP	Line

Neutral line:

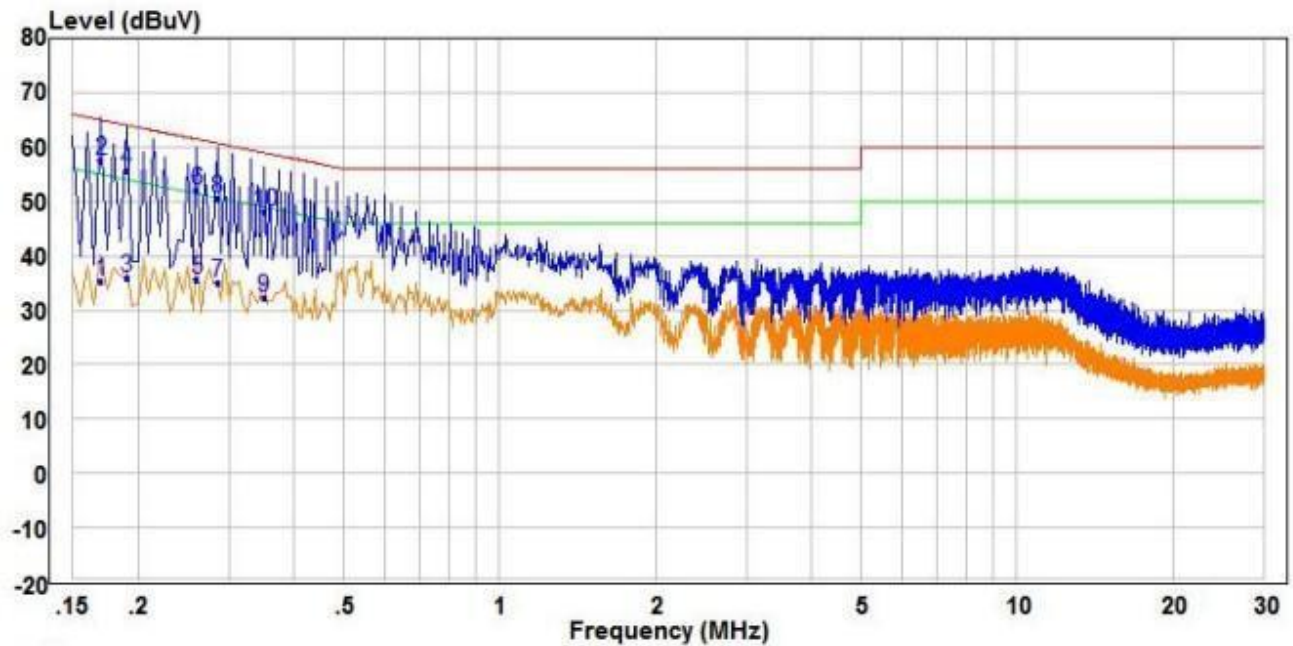


	Freq	Read	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.170	25.76	9.66	35.42	54.96	-19.54	Average	Neutral
2 PP	0.170	47.87	9.66	57.53	64.96	-7.43	QP	Neutral
3	0.190	26.19	9.62	35.81	54.04	-18.23	Average	Neutral
4	0.190	46.21	9.62	55.83	64.04	-8.21	QP	Neutral
5	0.260	26.21	9.53	35.74	51.43	-15.69	Average	Neutral
6	0.260	42.60	9.53	52.13	61.43	-9.30	QP	Neutral
7 AV	0.285	25.52	9.50	35.02	50.67	-15.65	Average	Neutral
8	0.285	41.09	9.50	50.59	60.67	-10.08	QP	Neutral
9	0.350	22.87	9.55	32.42	48.96	-16.54	Average	Neutral
10	0.350	38.70	9.55	48.25	58.96	-10.71	QP	Neutral

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. The 13Mbps of rate of OFDM_5240 is the worst case, only the worst data recorded in the report.

Appendix D): Restricted bands around fundamental frequency (Radiated Emission)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	<p>Below 1GHz test procedure as below:</p> <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel <p>Above 1GHz test procedure as below:</p> <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre). Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 				
Limit:	Frequency	Limit (dBμV/m @3cm)	Remark		
	30MHz-88MHz	40.0	Quasi-peak Value		
	88MHz-216MHz	43.5	Quasi-peak Value		
	216MHz-960MHz	46.0	Quasi-peak Value		
	960MHz-1GHz	54.0	Quasi-peak Value		
	Above 1GHz	54.0	Average Value		
		74.0	Peak Value		

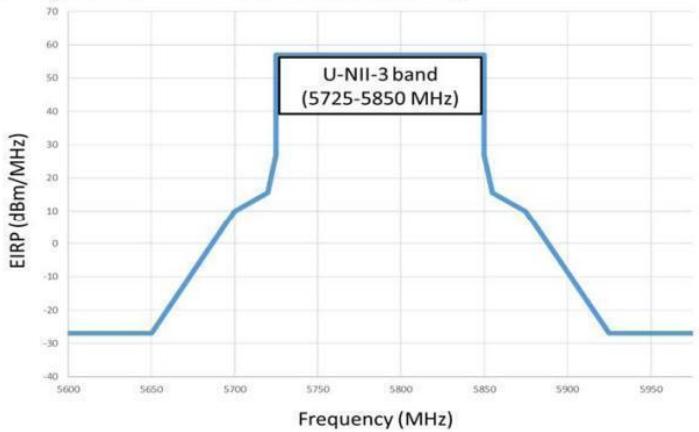Un-restricted band emissions	
Out Operating Band (MHz)	Limit
5150 - 5250	e.i.r.p. -27 dBm (68.2 dBuV/m@3m)
5250 - 5350	e.i.r.p. -27 dBm (68.2 dBuV/m@3m)
5470 - 5725	e.i.r.p. -27 dBm (68.2 dBuV/m@3m)
5725 - 5850	<p>All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.</p>
	 <p>U-NII-3 band (5725-5850 MHz)</p>

Result Table

Test channel:				0			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150.00	61.10	-9.2	51.90	68.2	-16.30	peak	H
5150.00	60.47	-9.2	51.27	68.2	-16.93	peak	V

Test channel:				3			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350.00	46.52	-9.39	37.13	68.2	-31.07	peak	H
5350.00	61.88	-9.39	52.49	68.2	-15.71	peak	V

Test channel:				4			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	60.68	-9.29	51.39	68.2	-16.81	peak	H
5925	46.22	-9.29	36.93	68.2	-31.27	peak	H
5650	62.06	-9.29	52.77	68.2	-15.43	peak	V
5925	62.15	-9.29	52.86	68.2	-15.34	peak	V

Test channel:				8			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	61.53	-9.29	52.24	68.2	-15.96	peak	H
5925	44.26	-9.29	34.97	68.2	-33.23	peak	H
5650	61.04	-9.29	51.75	68.2	-16.45	peak	V
5925	60.10	-9.29	50.81	68.2	-17.39	peak	V

Note:

1) Through Pre-scan transmitting mode with all kind of modulation and data rate, find the 13Mbps is the worst case of OFDM; and then Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor = Preamplifier Factor– Antenna Factor–Cable Factor


Appendix E): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:					
Below 1GHz test procedure as below: a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Above 1GHz test procedure as below: g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre) h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBµV/cm)	Remark	Measurement distance (cm)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				
Test result: PASS					

Test Data:


Radiated Emission below 1GHz

30MHz~1GHz		
Test mode:	Transmitting	Vertical

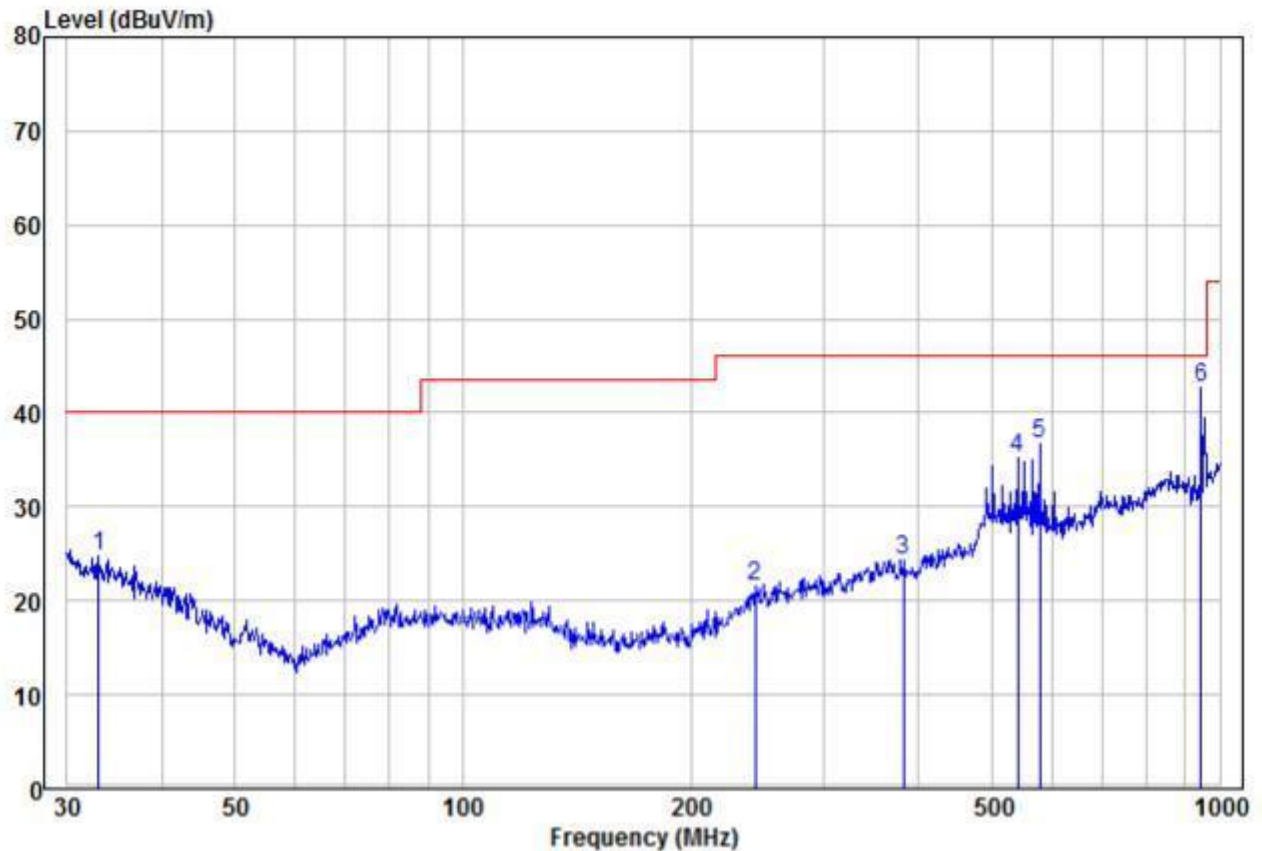

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	32.98	9.69	15.14	24.83	40.00	-15.17	Peak	VERTICAL
2	243.38	9.69	11.80	21.49	46.00	-24.51	Peak	VERTICAL
3	382.59	9.64	14.73	24.37	46.00	-21.63	Peak	VERTICAL
4	541.37	16.53	18.71	35.24	46.00	-10.76	Peak	VERTICAL
5	578.67	18.02	18.72	36.74	46.00	-9.26	Peak	VERTICAL
6 pp	945.44	19.07	23.62	42.69	46.00	-3.31	Peak	VERTICAL

Test mode:	Transmitting	Horizontal
------------	--------------	------------

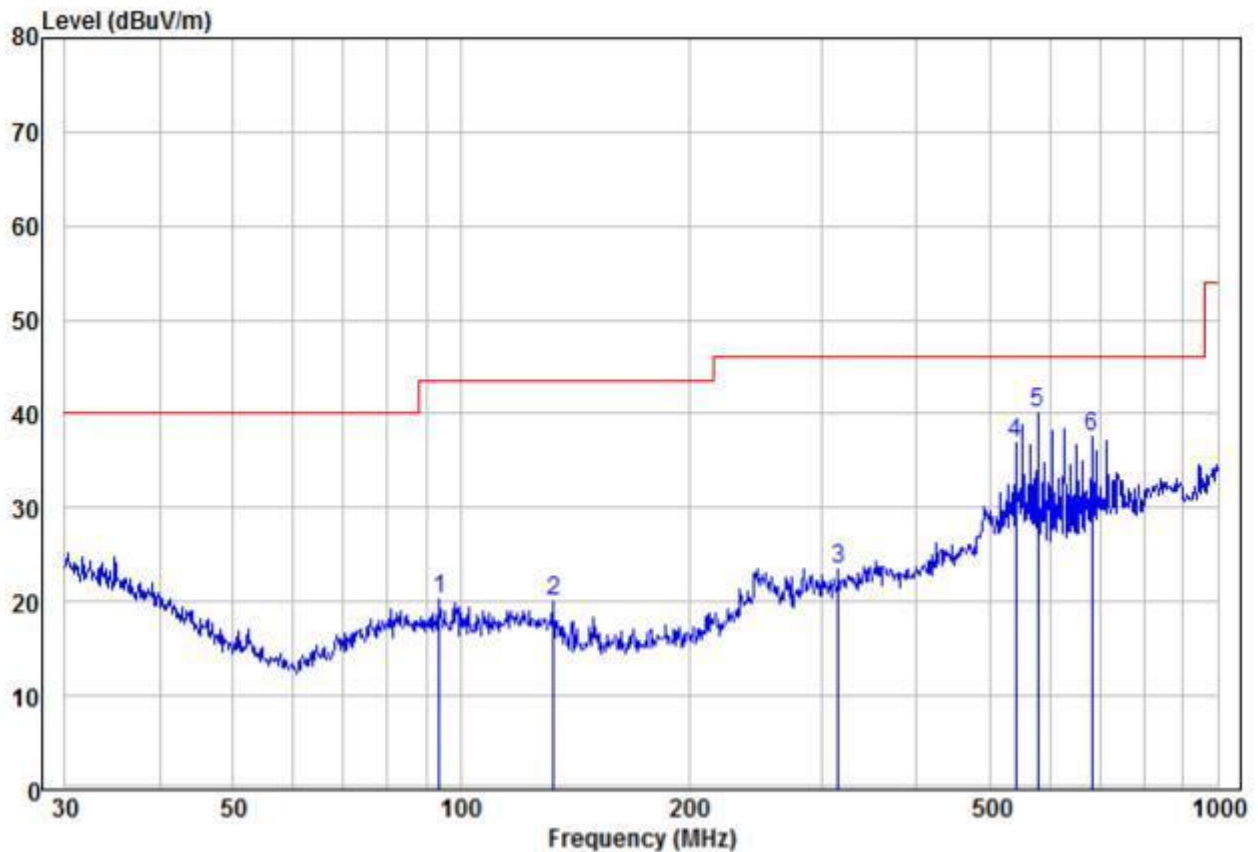

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	93.77	9.96	10.26	20.22	43.50	-23.28	Peak	HORIZONTAL
2	132.69	10.24	9.71	19.95	43.50	-23.55	Peak	HORIZONTAL
3	315.48	9.44	14.11	23.55	46.00	-22.45	Peak	HORIZONTAL
4	541.37	18.27	18.71	36.98	46.00	-9.02	Peak	HORIZONTAL
5 pp	578.67	21.48	18.72	40.20	46.00	-5.80	Peak	HORIZONTAL
6	682.35	17.17	20.27	37.44	46.00	-8.56	Peak	HORIZONTAL

Remark:

- 1) The 13Mbps of rate of OFDM at 1 channel is the worst case, only the worst data recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Meter Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 40GHz, The disturbance above 18GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Transmitter Emission above 1GHz


Test mode:	OFDM(13Mbps)			Test channel:	0		
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
10360	53.85	-4.12	49.73	74	-24.27	peak	H
10360	37.32	-4.12	33.20	54	-20.80	AVG	H
15540	51.89	1.46	53.35	74	-20.65	peak	H
15540	37.70	1.46	39.16	54	-14.84	AVG	H
20720	55.13	-4.12	51.01	74	-22.99	peak	V
20720	38.11	-4.12	33.99	54	-20.01	AVG	V
25900	51.84	1.46	53.30	74	-20.70	peak	V
25900	36.95	1.46	38.41	54	-15.59	AVG	V
Test mode:	OFDM(13Mbps)			Test channel:	2		
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
10440	52.41	-4.12	48.29	74	-25.71	peak	H
10440	37.59	-4.12	33.47	54	-20.53	AVG	H
15660	52.19	1.46	53.65	74	-20.35	peak	H
15660	38.13	1.46	39.59	54	-14.41	AVG	H
20880	55.07	-4.12	50.95	74	-23.05	peak	V
20880	38.84	-4.12	34.72	54	-19.28	AVG	V
26100	51.10	1.46	52.56	74	-21.44	peak	V
26100	36.57	1.46	38.03	54	-15.97	AVG	V
Test mode:	OFDM(13Mbps)			Test channel:	3		
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
10480	53.01	-4.12	48.89	74	-25.11	peak	H
10480	36.28	-4.12	32.16	54	-21.84	AVG	H
15720	52.18	1.46	53.64	74	-20.36	peak	H
15720	38.95	1.46	40.41	54	-13.59	AVG	H
20960	55.16	-4.12	51.04	74	-22.96	peak	V
20960	38.77	-4.12	34.65	54	-19.35	AVG	V
26200	52.21	1.46	53.67	74	-20.33	peak	V
26200	35.75	1.46	37.21	54	-16.79	AVG	V

Test mode:		OFDM(13Mbps)		Test channel:		4	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
11490	52.79	2.31	55.10	74	-18.90	peak	H
11490	36.65	2.31	38.96	54	-15.04	AVG	H
17235	49.52	3.79	53.31	74	-20.69	peak	H
17235	36.17	3.79	39.96	54	-14.04	AVG	H
22980	53.55	2.31	55.86	74	-18.14	peak	V
22980	36.72	2.31	39.03	54	-14.97	AVG	V
28725	49.60	3.79	53.39	74	-20.61	peak	V
28725	36.29	3.79	40.08	54	-13.92	AVG	V
Test mode:		OFDM(13Mbps)		Test channel:		6	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
11570	52.53	2.31	54.84	74	-19.16	peak	H
11570	36.49	2.31	38.80	54	-15.20	AVG	H
17355	48.48	3.79	52.27	74	-21.73	peak	H
17355	36.22	3.79	40.01	54	-13.99	AVG	H
23140	52.87	2.31	55.18	74	-18.82	peak	V
23140	36.91	2.31	39.22	54	-14.78	AVG	V
28925	49.62	3.79	53.41	74	-20.59	peak	V
28925	35.79	3.79	39.58	54	-14.42	AVG	V
Test mode:		OFDM(13Mbps)		Test channel:		8	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
11650	52.92	2.31	55.23	74	-18.77	peak	H
11652	37.82	2.31	40.13	54	-13.87	AVG	H
17481	48.88	3.79	52.67	74	-21.33	peak	H
17484	35.50	3.79	39.29	54	-14.71	AVG	H
23316	52.68	2.31	54.99	74	-19.01	peak	V
23320	37.25	2.31	39.56	54	-14.44	AVG	V
29155	49.86	3.79	53.65	74	-20.35	peak	V
29160	35.77	3.79	39.56	54	-14.44	AVG	V

8 Photographs - EUT Test Setup

8.1 Radiated Spurious Emission

9kHz~30MHz:

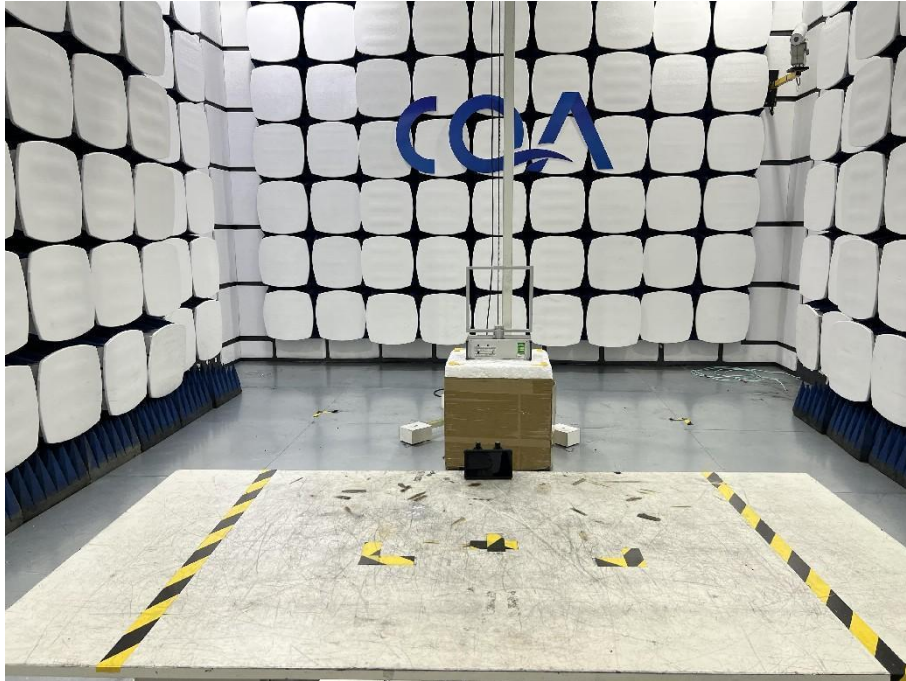

30MHz~1GHz:



Above 1GHz:



8.2 Conducted Emission



9 Photographs - EUT Constructional Details

1#

