


Test Result**ANT1:**

TestMode	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Low	2412	-5.48	-46.09	≤ -35.48	PASS
	High	2462	-5.96	-44.93	≤ -35.96	PASS
11G	Low	2412	-3.22	-39.32	≤ -33.22	PASS
	High	2462	-3.34	-44.91	≤ -33.34	PASS
11N20SISO	Low	2412	-2.97	-37.81	≤ -32.97	PASS
	High	2462	-3.32	-44.55	≤ -33.32	PASS
11N40SISO	Low	2422	-4.72	-41.26	≤ -34.72	PASS
	High	2452	-5.33	-44.13	≤ -35.33	PASS

ANT2:

TestMode	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Low	2412	-5.09	-45.88	≤ -35.09	PASS
	High	2462	-6.30	-45.46	≤ -36.3	PASS
11G	Low	2412	-4.60	-40	≤ -34.6	PASS
	High	2462	-3.33	-44.9	≤ -33.33	PASS
11N20SISO	Low	2412	-2.94	-38.72	≤ -32.94	PASS
	High	2462	-3.90	-45.14	≤ -33.9	PASS
11N40SISO	Low	2422	-4.68	-41.48	≤ -34.68	PASS
	High	2452	-5.52	-44.1	≤ -35.52	PASS


5.6.1 Test Graphs

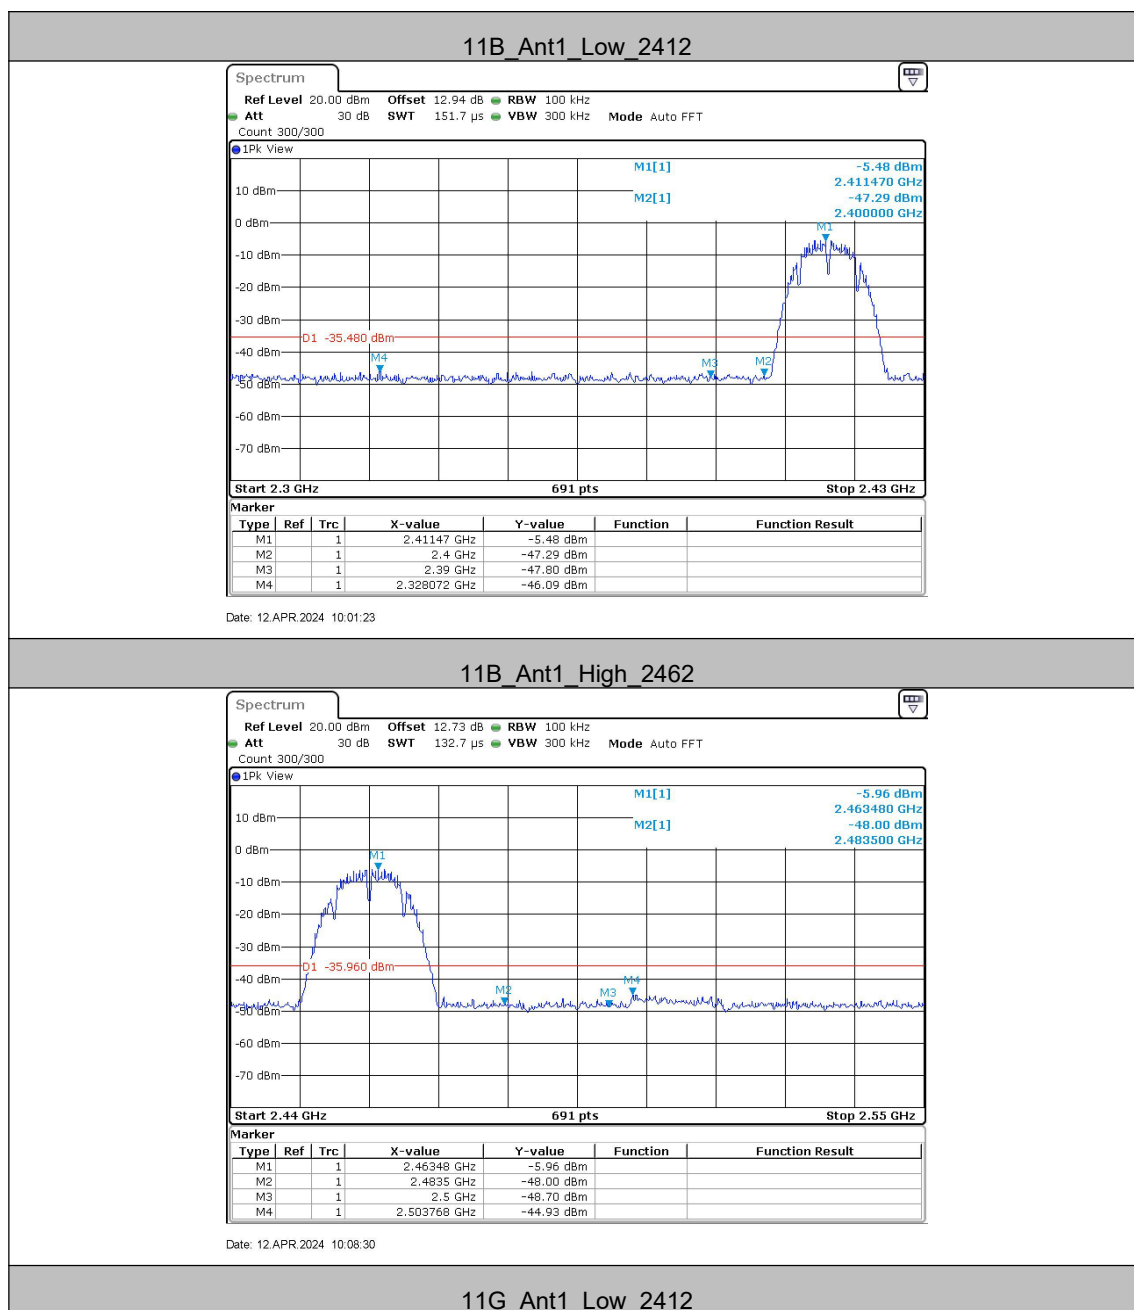




Date: 12 APR 2024 10:11:12

11G_Ant1_High_2462

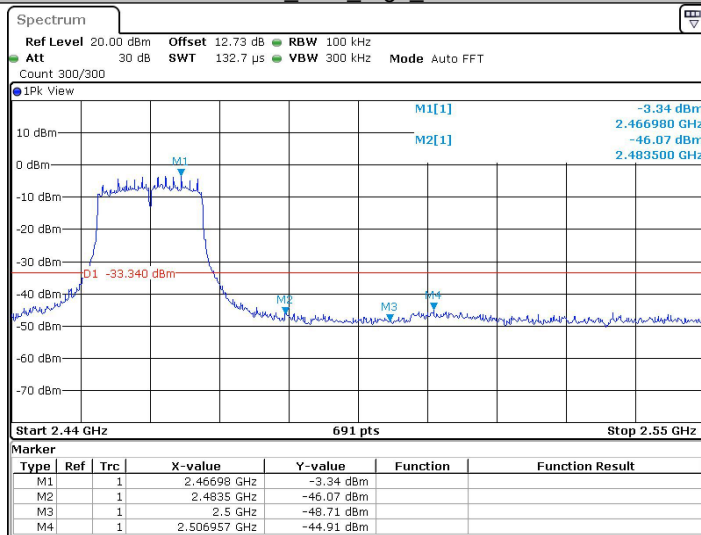


Date: 12 APR 2024 10:16:56

11N20SISO_Ant1_Low_2412

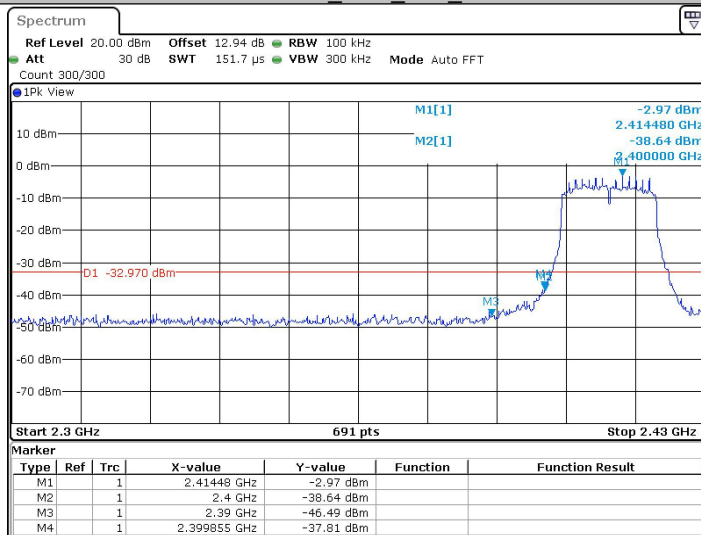


Date: 12 APR 2024 10:21:46

11N20SISO_Ant1_High_2462

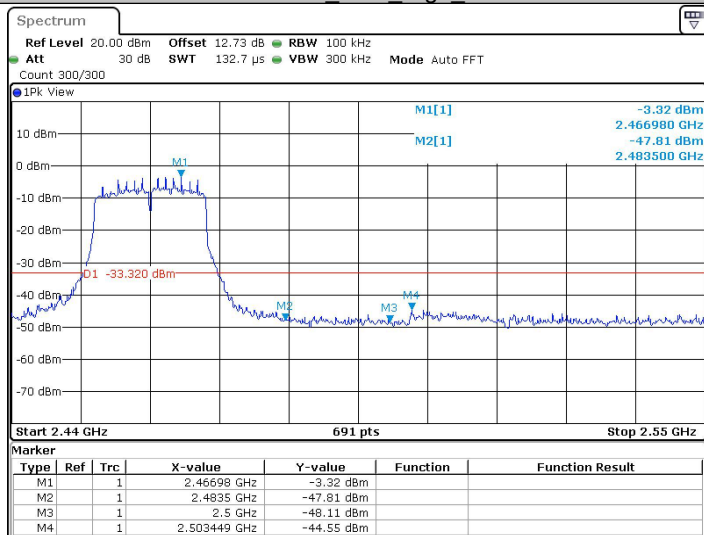


Date: 12 APR 2024 10:30:49

11N40SISO_Ant1_Low_2422

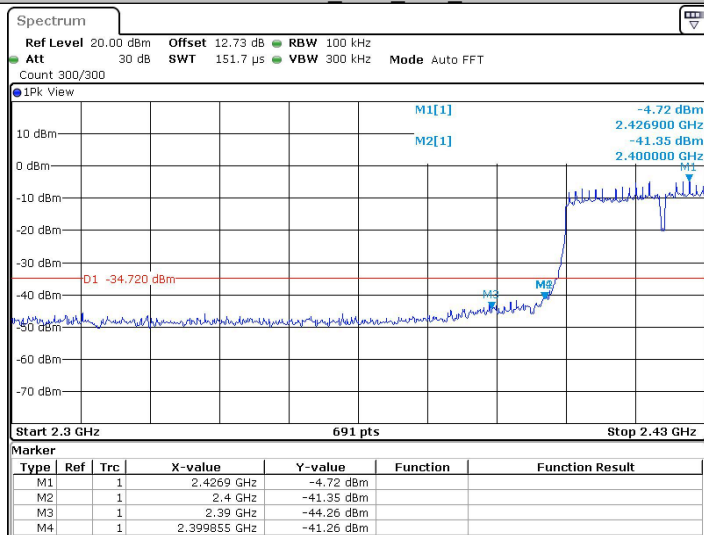


Date: 12 APR 2024 10:33:06

11N40SISO_Ant1_High_2452

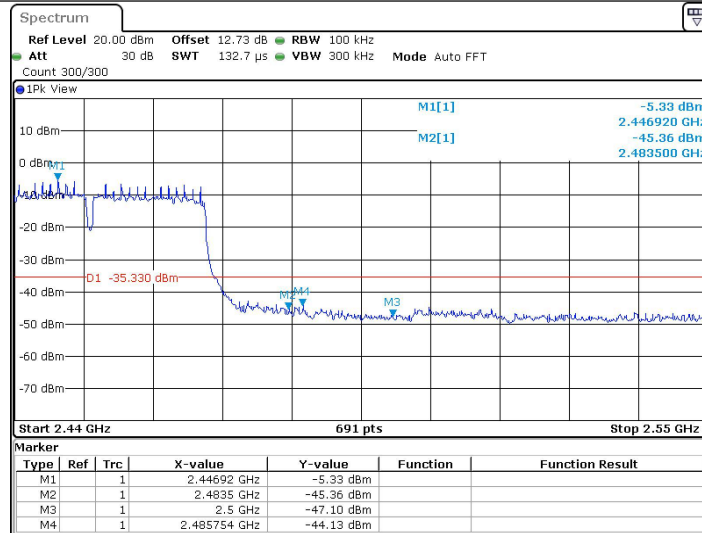


Date: 12 APR 2024 10:38:34

11B_Ant2_Low_2412

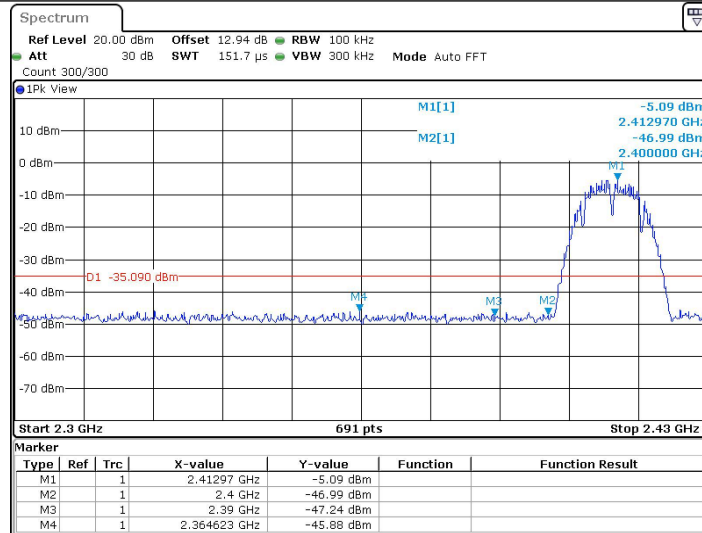


Date: 12 APR 2024 10:41:24

11B_Ant2_High_2462

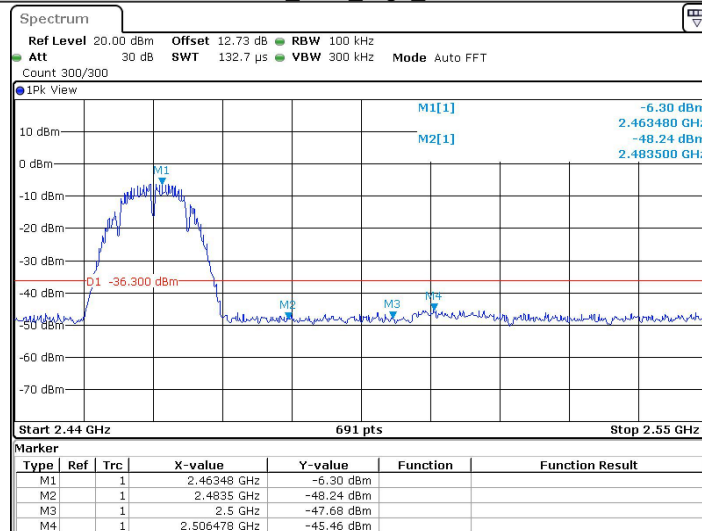


Date: 12 APR 2024 10:48:00

11G_Ant2_Low_2412

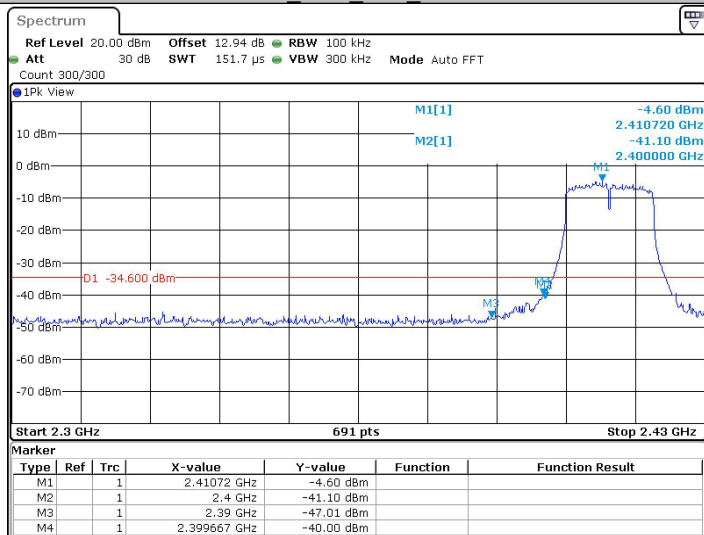


Date: 12 APR 2024 10:50:59

11G_Ant2_High_2462

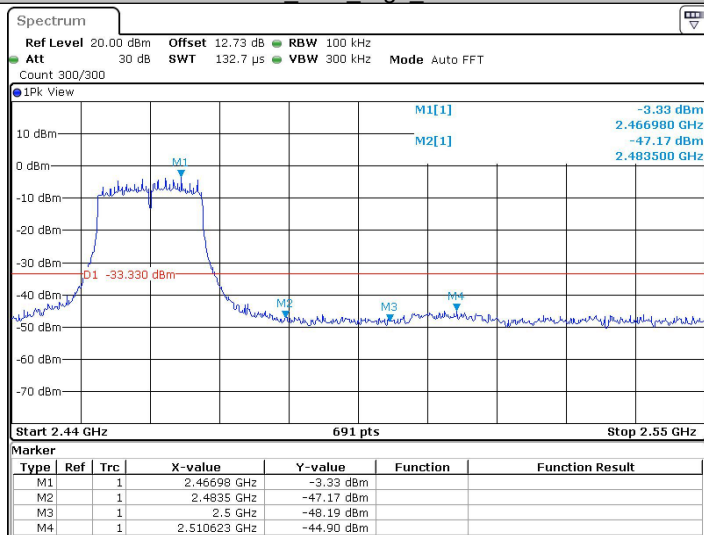


Date: 12 APR 2024 11:36:40

11N20SISO_Ant2_Low_2412

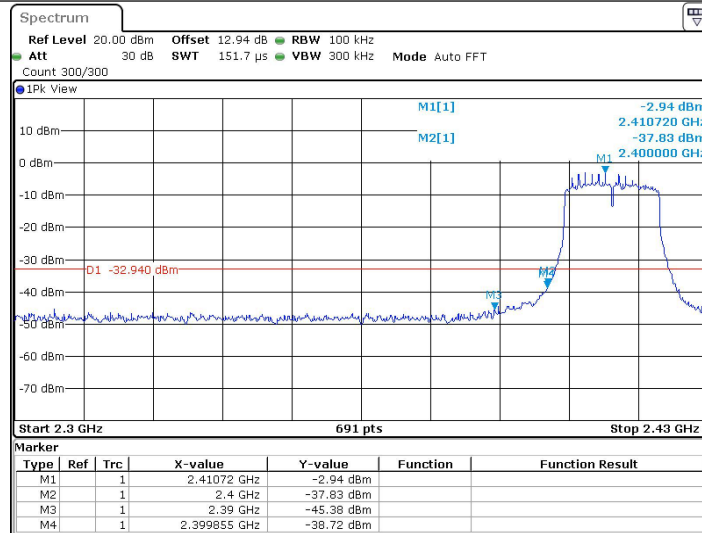


Date: 12 APR 2024 11:38:30

11N20SISO_Ant2_High_2462

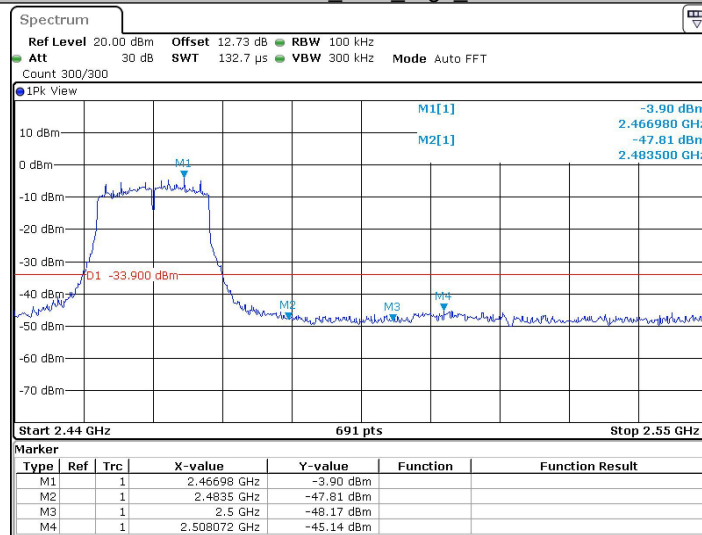


Date: 12 APR 2024 11:46:51


11N40SISO_Ant2_Low_2422

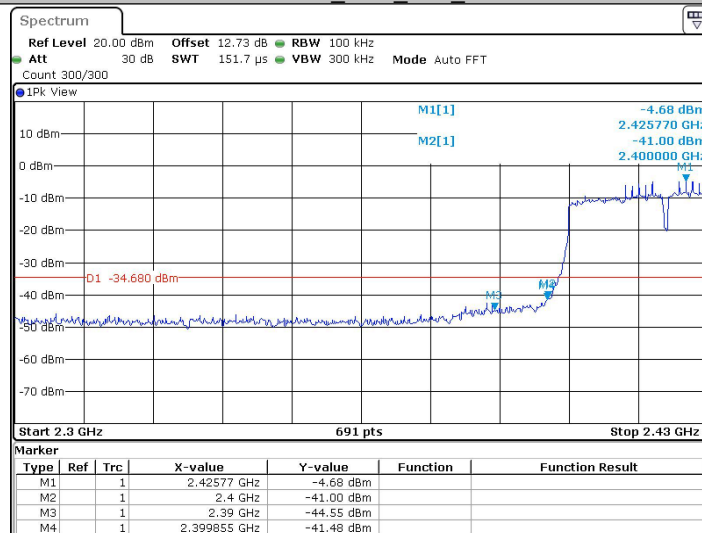

Date: 12 APR 2024 11:48:45

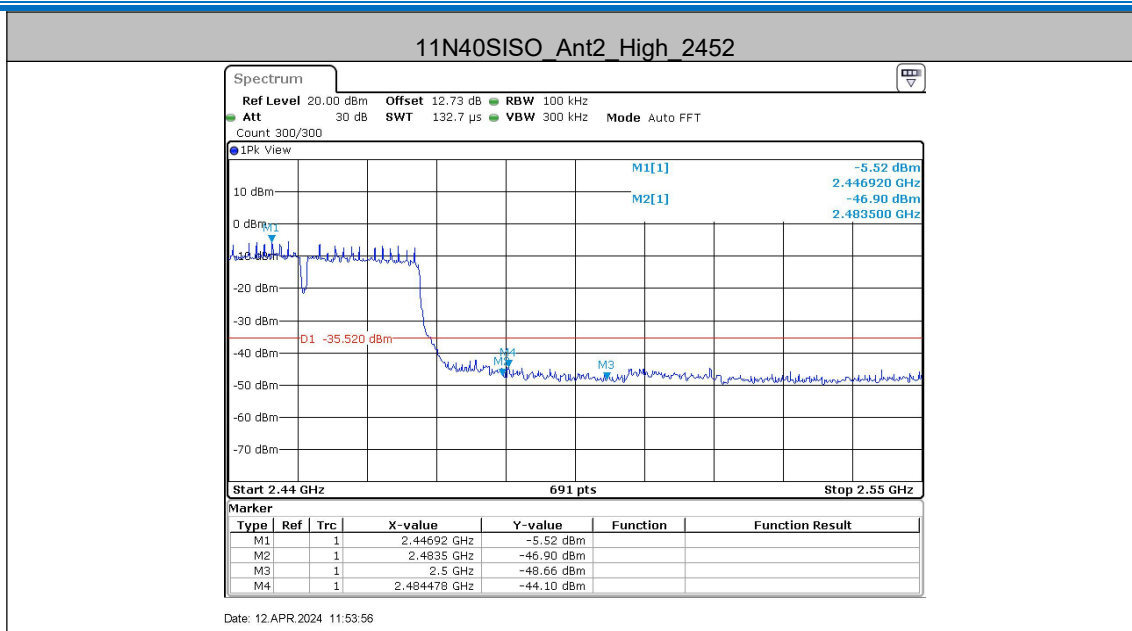

5.7 RF Conducted Spurious Emissions

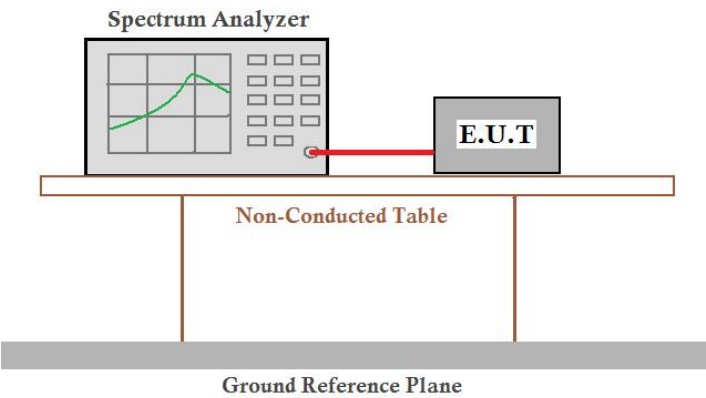Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

Test Result

ANT1:

TestMode	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	Reference	-5.40	-5.40	---	PASS
		30~1000	-5.40	-53.76	≤ -35.4	PASS
		1000~26500	-5.40	-49.86	≤ -35.4	PASS
	2437	Reference	-4.88	-4.88	---	PASS
		30~1000	-4.88	-53.29	≤ -34.88	PASS
		1000~26500	-4.88	-50.27	≤ -34.88	PASS
	2462	Reference	-5.99	-5.99	---	PASS
		30~1000	-5.99	-53.86	≤ -35.99	PASS
		1000~26500	-5.99	-51.09	≤ -35.99	PASS
11G	2412	Reference	-2.94	-2.94	---	PASS
		30~1000	-2.94	-54.18	≤ -32.94	PASS
		1000~26500	-2.94	-50.22	≤ -32.94	PASS
	2437	Reference	-2.71	-2.71	---	PASS
		30~1000	-2.71	-54.27	≤ -32.71	PASS
		1000~26500	-2.71	-49.95	≤ -32.71	PASS
	2462	Reference	-3.40	-3.40	---	PASS
		30~1000	-3.40	-53.69	≤ -33.4	PASS
		1000~26500	-3.40	-50.81	≤ -33.4	PASS
11N20SISO	2412	Reference	-2.84	-2.84	---	PASS
		30~1000	-2.84	-53.79	≤ -32.84	PASS
		1000~26500	-2.84	-49.91	≤ -32.84	PASS
	2437	Reference	-2.49	-2.49	---	PASS
		30~1000	-2.49	-54.45	≤ -32.49	PASS
		1000~26500	-2.49	-50.83	≤ -32.49	PASS
	2462	Reference	-3.31	-3.31	---	PASS
		30~1000	-3.31	-54.26	≤ -33.31	PASS
		1000~26500	-3.31	-50.31	≤ -33.31	PASS
11N40SISO	2422	Reference	-4.65	-4.65	---	PASS
		30~1000	-4.65	-54.29	≤ -34.65	PASS
		1000~26500	-4.65	-50.76	≤ -34.65	PASS
	2437	Reference	-4.67	-4.67	---	PASS
		30~1000	-4.67	-53.64	≤ -34.67	PASS
		1000~26500	-4.67	-50.28	≤ -34.67	PASS


	2452	Reference	-5.58	-5.58	---	PASS
		30~1000	-5.58	-54.04	≤ -35.58	PASS
		1000~26500	-5.58	-50.95	≤ -35.58	PASS


ANT2:

TestMode	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	Reference	-5.27	-5.27	---	PASS
		30~1000	-5.27	-53.68	≤ -35.27	PASS
		1000~26500	-5.27	-50.92	≤ -35.27	PASS
	2437	Reference	-4.59	-4.59	---	PASS
		30~1000	-4.59	-54.47	≤ -34.59	PASS
		1000~26500	-4.59	-50.46	≤ -34.59	PASS
	2462	Reference	-5.76	-5.76	---	PASS
		30~1000	-5.76	-52.22	≤ -35.76	PASS
		1000~26500	-5.76	-50.81	≤ -35.76	PASS
11G	2412	Reference	-3.18	-3.18	---	PASS
		30~1000	-3.18	-53.72	≤ -33.18	PASS
		1000~26500	-3.18	-50.22	≤ -33.18	PASS
	2437	Reference	-2.44	-2.44	---	PASS
		30~1000	-2.44	-53.89	≤ -32.44	PASS
		1000~26500	-2.44	-49.08	≤ -32.44	PASS
	2462	Reference	-3.37	-3.37	---	PASS
		30~1000	-3.37	-54.28	≤ -33.37	PASS
		1000~26500	-3.37	-50.9	≤ -33.37	PASS
11N20SISO	2412	Reference	-2.61	-2.61	---	PASS
		30~1000	-2.61	-53.05	≤ -32.61	PASS
		1000~26500	-2.61	-50.24	≤ -32.61	PASS
	2437	Reference	-2.38	-2.38	---	PASS
		30~1000	-2.38	-53.4	≤ -32.38	PASS
		1000~26500	-2.38	-50.55	≤ -32.38	PASS
	2462	Reference	-3.31	-3.31	---	PASS
		30~1000	-3.31	-53.21	≤ -33.31	PASS
		1000~26500	-3.31	-50.73	≤ -33.31	PASS
11N40SISO	2422	Reference	-4.64	-4.64	---	PASS
		30~1000	-4.64	-54.08	≤ -34.64	PASS
		1000~26500	-4.64	-50.76	≤ -34.64	PASS
	2437	Reference	-4.54	-4.54	---	PASS
		30~1000	-4.54	-53.51	≤ -34.54	PASS
		1000~26500	-4.54	-49.46	≤ -34.54	PASS
	2452	Reference	-5.47	-5.47	---	PASS


		30~1000	-5.47	-54.04	≤ -35.47	PASS
		1000~26500	-5.47	-50.89	≤ -35.47	PASS

Test Graphs

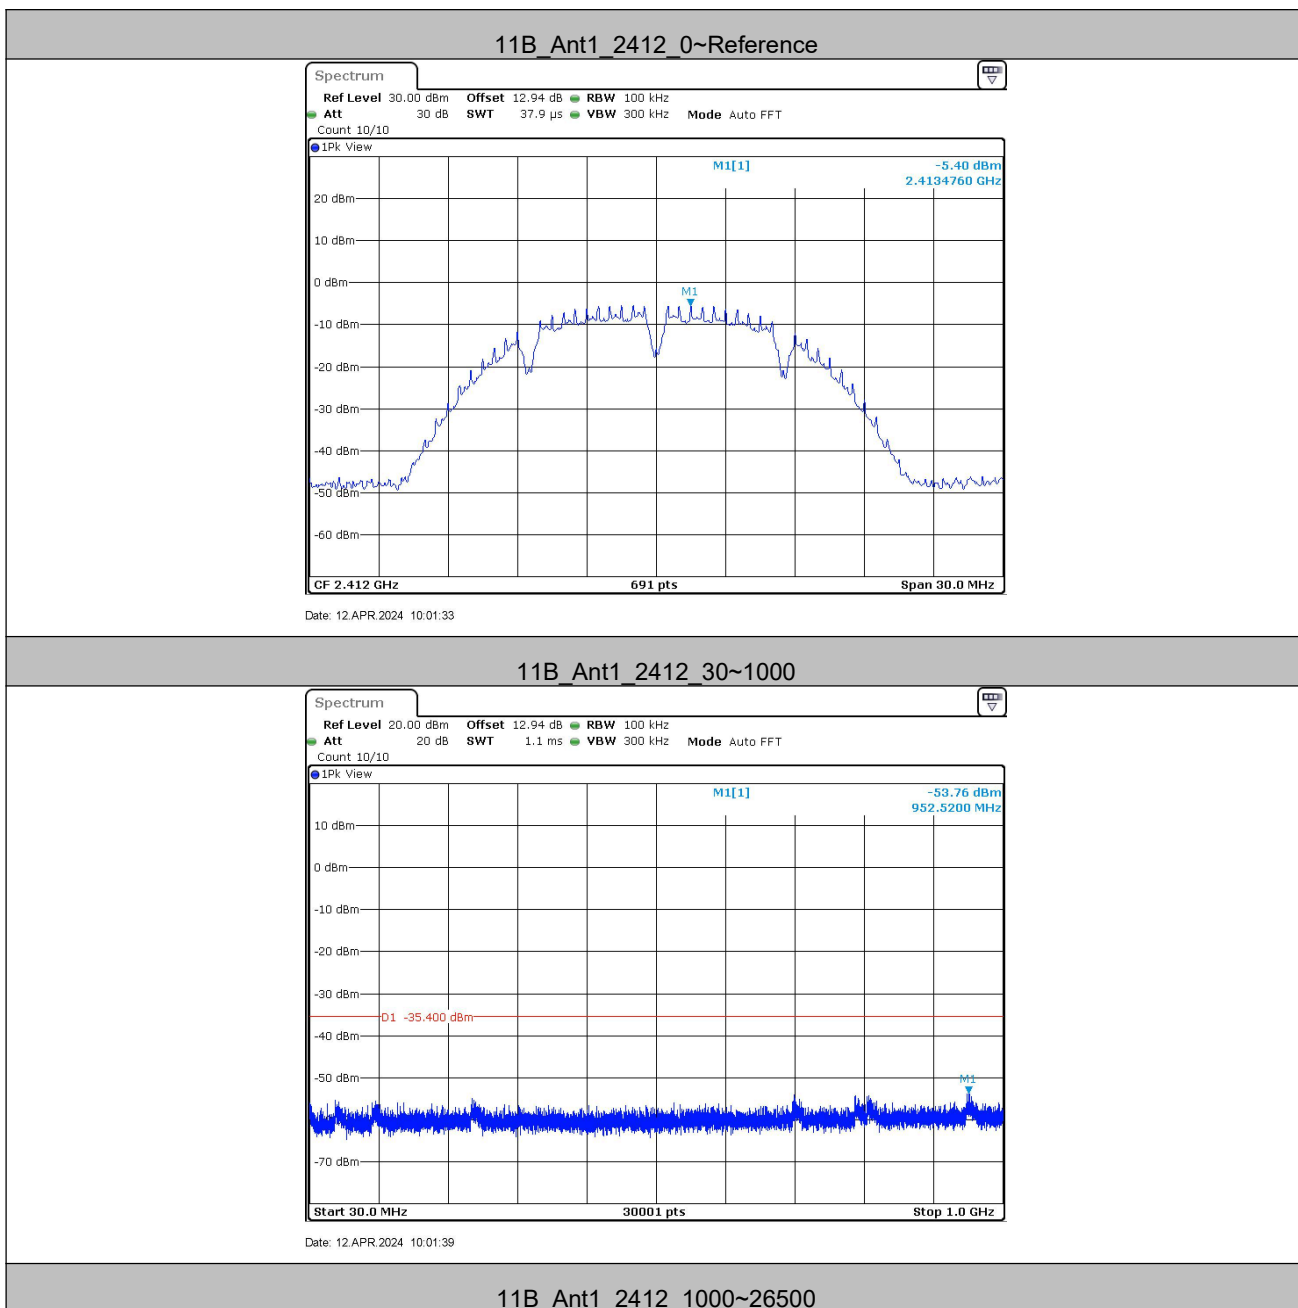

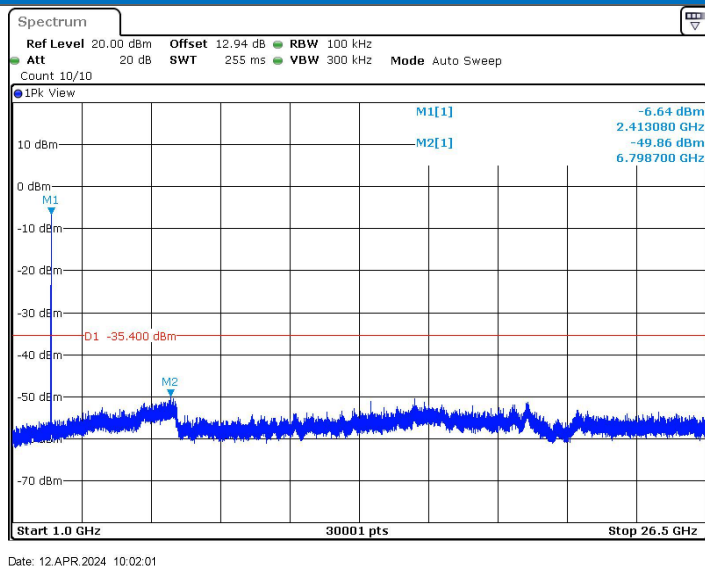

11B_Ant1_2437_0~Reference

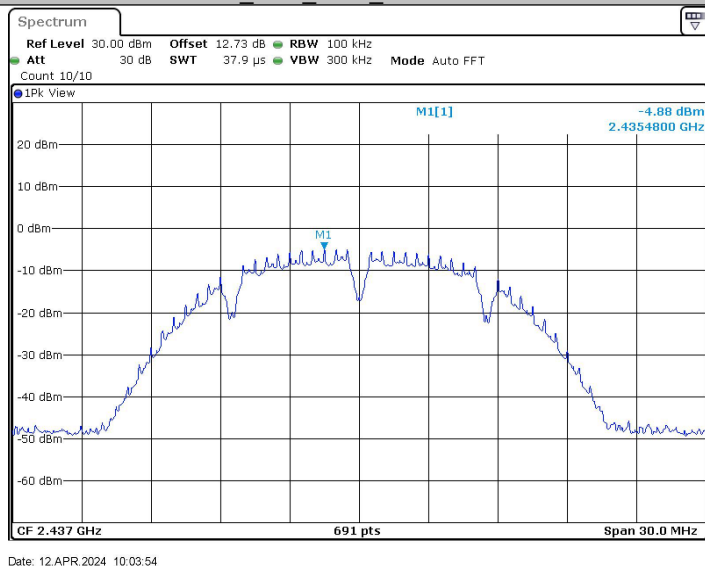

11B_Ant1_2437_30~1000

