



FCC TEST REPORT

FCC ID: 2AYMH-NEBULAR-213D

On Behalf of

HANSHOW TECHNOLOGY CO., LTD.

Electronic shelf label

Model No.: Nebular-213R-N, Nebular-213F-N, Nebular-213-N,

Nebular-213Y-N

Prepared for : HANSHOW TECHNOLOGY CO., LTD.
Address : Building 1 (1F podium building and 4F) and Building 5 (7F) in Jiaxing
Photovoltaic High-tech Park, No. 1288 Kanghe Rd., Xiuzhou District,
Jiaxing, Zhejiang

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,
518103, Shenzhen, Guangdong, China

Report Number : A2111016-C01-R05
Date of Receipt : November 11, 2021
Date of Test : November 11, 2021– November 18, 2021
Date of Report : November 18, 2021
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Summary of Standards and Results	6
1.1. Description of Standards and Results	6
2. General Information	7
2.1. Description of Device (EUT)	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of Connection Between EUT and Simulators	8
2.5. Test Mode Description.....	8
2.6. Test Conditions	9
2.7. Test Facility	9
2.8. Measurement Uncertainty	9
2.9. Test Equipment List.....	10
3. Power Line Conducted Emission Test.....	11
3.1. Block Diagram of Test Setup.....	11
3.2. Test Limits	11
3.3. Configuration of EUT on Test	12
3.4. Operating Condition of EUT	12
3.5. Test Procedure	12
3.6. Test Results	12
4. Radiated Emission Test.....	13
4.1. Block Diagram of Test Setup.....	13
4.2. Test Limit.....	14
4.3. Configuration of EUT on Test	15
4.4. Operating Condition of EUT	15
4.5. Test Procedure	15
4.6. Test Results	16
5. Band Edge Test	22
5.1. Block Diagram of Test Setup.....	22
5.2. Test Limit.....	22
5.3. Configuration of EUT on Test	23
5.4. Operating Condition of EUT	23
5.5. Test Procedure	23
5.6. Test Results	25
5.7. Block Diagram of Test Setup.....	26
5.8. Test Limit.....	26
5.9. Test Procedure	26
5.10. Test Results	26
6. Antenna Requirement	28
6.1. Standard Requirement.....	28
6.2. Antenna Connected Construction	28
6.3. Results.....	28

7. Photograph.....	29
7.1. Photos of Radiated Emission Test	29
8. Photos of The EUT	30

TEST REPORT DECLARATION

Applicant : HANSHOW TECHNOLOGY CO., LTD.
 Building 1 (1F podium building and 4F) and Building 5 (7F) in Jiaxing

Address : Photovoltaic High-tech Park, No. 1288 Kanghe Rd., Xiuzhou District, Jiaxing, Zhejiang

Manufacturer : HANSHOW TECHNOLOGY CO., LTD.
 Building 1 (1F podium building and 4F) and Building 5 (7F) in Jiaxing

Address : Photovoltaic High-tech Park, No. 1288 Kanghe Rd., Xiuzhou District, Jiaxing, Zhejiang

EUT Description : Electronic shelf label

(A) Model No. : Nebular-213R-N, Nebular-213F-N, Nebular-213-N, Nebular-213Y-N

(B) Trademark : 

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.249
ANSI C63.10:2013

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC Part 15 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Yannis Wen
Project Engineer



Approved by (name + signature).....: Simple Guan
Project Manager



Date of issue..... : November 18, 2021

Revision History

Revision	Issue Date	Revisions	Revised By
V0	November 18, 2021	Initial released Issue	Yannis Wen

1. Summary of Standards and Results

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

EMISSION			
Description of Test Item	Test Requirement	Standard Paragraph	Results
Power Line Conducted Emission Test	FCC Part 15	Section 15.207	P
Spurious Emission Test	FCC Part 15	Section 15.249&15.209	P
Occupied bandwidth	FCC Part 15	Section 15. 249	P
Band edge Requirement	FCC Part 15	Section 15.249	P
Antenna Requirement	FCC Part 15	Section 15.203	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.			

2. General Information

2.1. Description of Device (EUT)

EUT Name : Electronic shelf label

Trademark :

The logo for Hanshow, featuring the word "Hanshow" in a blue, sans-serif font. The letter 'H' is stylized with a red dot above it.

Model No. : Nebular-213R-N, Nebular-213F-N, Nebular-213-N, Nebular-213Y-N
DIFF. : There is no difference except the name of the model. All tests are made with the Nebular-213R-N model.

Power supply : DC 3V from battery

2.4G Technology

Operation frequency : 2402-2480MHz
Number of Channel : 157 Channel
Channel Separation : 0.5MHz
Modulation : GFSK
Antenna Type : PCB Antenna, max gain -0.6dBi.

Hardware version : HS_Nebular213_NG_V28
Software version : V1.0

Note: new batteries used during all test.

2.2. Accessories of Device (EUT)

Accessories1 : /
 Manufacturer : /
 Model : /
 Power supply : /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDOC
1.	--	--	--	--	--

2.4. Block Diagram of Connection Between EUT and Simulators



2.5. Test Mode Description

Test mode:

Mode	Channel	Frequency (MHz)
FSK	Low :CH1	2402
FSK	Middle: CH79	2441
FSK	High: CH157	2480

Note:

1. The test was used to control EUT work in Continuous TX mode, and select test channel, wireless mode
2. The EUT has been tested as an independent unit. And Continual Transmitting in maximum power.
3. New battery is used during all tests.
4. For the relevant Conducted Measurement, the temporary antenna connector is used during the measurement. Antenna Connector Impedance: 50Ω , Cable Loss: 1.0 dB

Channel list:

Channel list					
CH1	2402MHz	CH78	2440.5MHz
CH2	2402.5MHz	CH79	2441MHz	CH155	2479MHz
CH3	2403MHz	CH80	2441.5MHz	CH156	2479.5MHz
.....	CH157	2480MHz

2.6. Test Conditions

Temperature range	21-25°C
Humidity range	40-75%
Pressure range	86-106kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd.

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,
518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission
Registration Number: 293961

July 15, 2019 Certificated by IC
Registration Number: CN0085

2.8. Measurement Uncertainty

(95% confidence levels, k=2)


Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V)
	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77 dB (Distance: 3m Polarize: V)
	3.80 dB (Distance: 3m Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.13 dB (Distance: 3m Polarize: V)
	4.16 dB (Distance: 3m Polarize: H)
Uncertainty for radio frequency	5.8×10^{-8}
Uncertainty for conducted RF Power	0.37dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	N/A	2020.09.02	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	102137	2021.08.25	1Year
Spectrum analyzer	Agilent	N9020A	MY499100060	2021.08.25	1Year
Receiver	ROHDE&SCHWARZ	ESR	1316.3003K03-102082-Wa	2021.08.25	1Year
Receiver	R&S	ESCI	101165	2021.08.25	1Year
Bilog Antenna	Schwarzbeck	VULB9168	VULB9168-438	2020.04.12	2Year
Horn Antenna	SCHWARZBECK	BBHA9120 D	BBHA 9120 D(1201)	2020.04.12	2Year
Active Loop Antenna	SCHWARZBECK	FMZB1519B	00059	2021.08.30	2Year
RF Cable	Resenberger	Cable 1	RE1	2021.08.25	1Year
RF Cable	Resenberger	Cable 2	RE2	2021.08.25	1Year
RF Cable	Resenberger	Cable 3	CE1	2021.08.25	1Year
Pre-amplifier	HP	HP8347A	2834A00455	2021.08.25	1Year
Pre-amplifier	Agilent	8449B	3008A02664	2021.08.25	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126-466	2021.08.25	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2021.08.25	1 Year
Horn Antenna	SCHWARZBECK	BBHA9170	00946	2021.08.30	2 Year
Preamplifier	SKET	LNPA_1840-50	SK2018101801	2021.08.25	1 Year
Power Meter	Agilent	E9300A	MY41496628	2021.08.25	1 Year
Power Sensor	DARE	RPR3006W	15100041SNO91	2021.08.25	1 Year
Temp. & Humid. Chamber	Weihuang	WHTH-1000-40-880	100631	2021.04.21	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	20140927-6	2021.08.25	1 Year
Adjustable attenuator	MWRFTest	N/A	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	N/A	N/A	N/A

3. Power Line Conducted Emission Test

3.1. Block Diagram of Test Setup

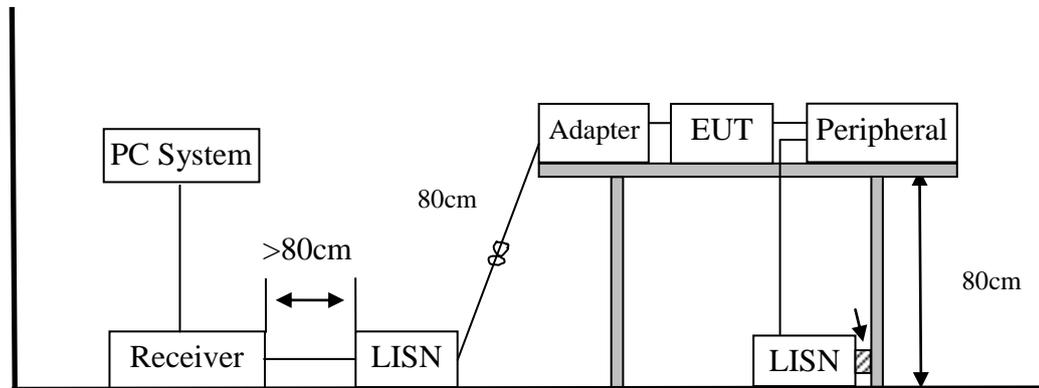

3.2. Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

- Notes:
1. Emission level=Read level + LISN factor-Preamplifier factor + Cable loss
 2. * Decreasing linearly with logarithm of frequency.
 3. The lower limit shall apply at the transition frequencies.

3.3. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 3.1.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode taking the test.

3.5. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013 on conducted Emission test.
- (2) The frequency range from 150kHz to 30MHz is checked, the bandwidth of test receiver is set at 9kHz.
- (3) The frequency range from 30MHz to 1000MHz was pre-scanned with a Peak detector and all final readings of measurement from Test Receiver are Quasi-Peak and Average values.
- (4) The test results are reported on Section 3.6.


3.6. Test Results

Note: The EUT is supplied by battery, so this item does not applicable.


4. Radiated Emission Test

4.1. Block Diagram of Test Setup


In Semi Anechoic Chamber (3m) Test Setup Diagram for 9KHz~30MHz

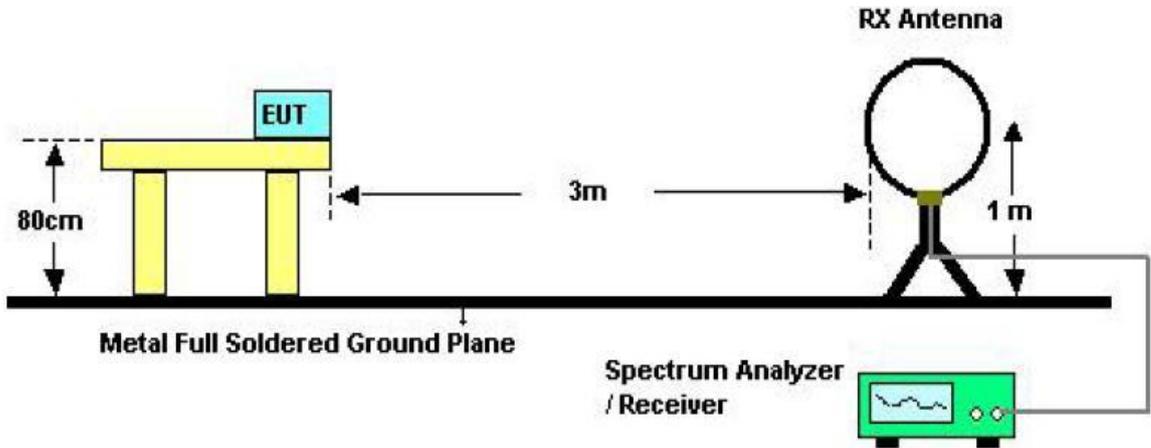

In Semi Anechoic Chamber (3m) Test Setup Diagram for 30MHz~1000MHz

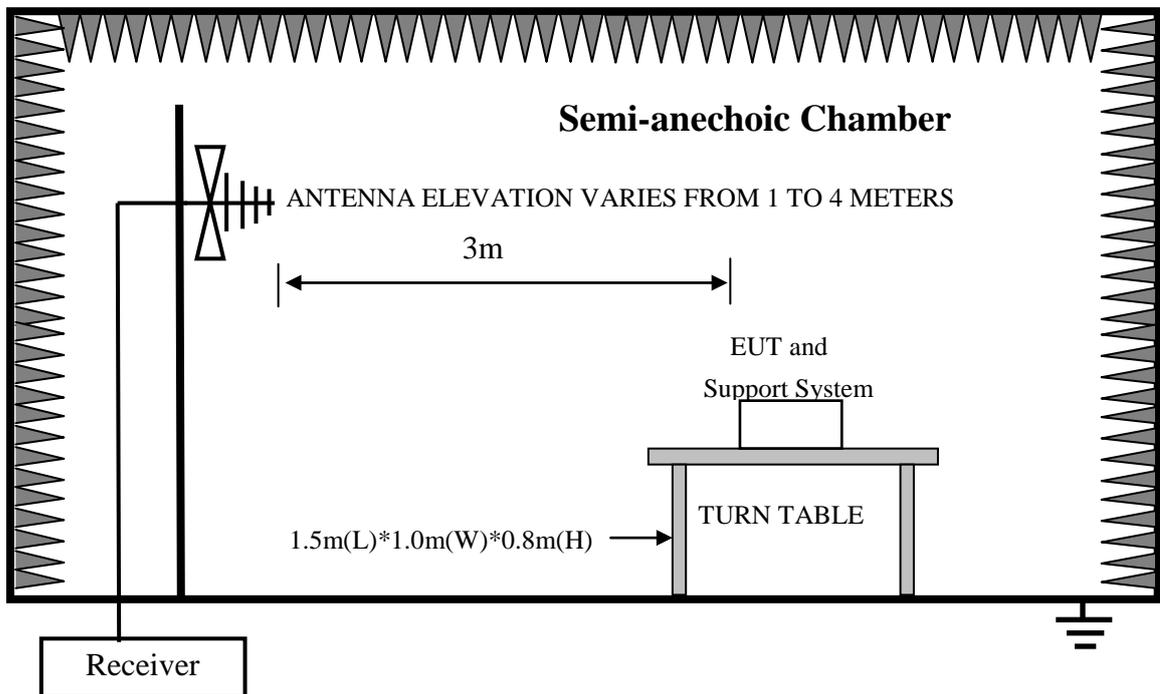

In Semi Anechoic Chamber (3m) Test Setup Diagram for Above 1GHz

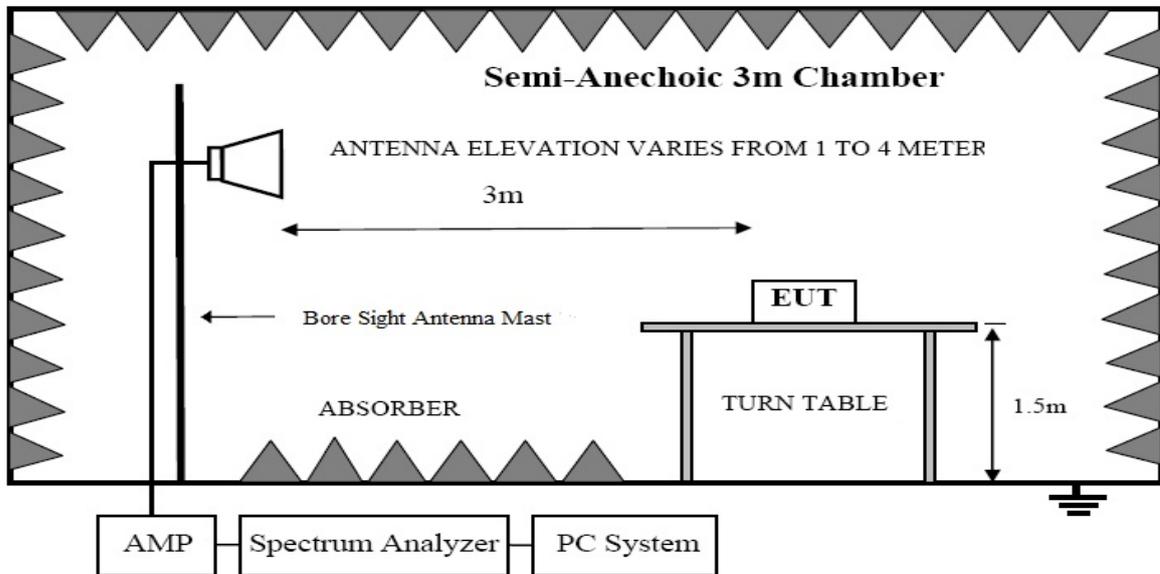

4.2. Test Limit

Frequency MHz	Distance (Meters)	Field Strengths Limits	
		uV/m	dB uV/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	----
1.705 ~ 30	30	30	29.5
30 ~ 88	3	100(3nW)	40
88 ~ 216	3	150(6.8nW)	43.5
216 ~ 960	3	200(12nW)	46
Above 960	3	500(75nW)	54
Carrier frequency	3	50000(avg)	113.97(peak) 93.97(avg)

- Notes:
1. Emission level = Read level + Antenna Factor - Preamp Factor + Cable Loss
 2. The smaller limit shall apply at the cross point between two frequency bands.
 3. Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
 4. For frequencies above 1000 MHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

4.3. Configuration of EUT on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

4.4. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 4.1.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode taking the test.

4.5. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1GHz and 150 cm above the ground plane inside a semi-anechoic chamber for above 1GHz. An antenna was located 3m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10: 2013 on Radiated Emission test.
- (2) For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- (3) Test antenna was located 4m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP
- (5) The frequency range from 9KHz to 150KHz is checked, the bandwidth of test receiver is

set at 200Hz.

The frequency range from 150KHz to 30MHz is checked, the bandwidth of test receiver is set at 9KHz.

The frequency range from 30MHz to 1000MHz is checked, the bandwidth of test receiver is set at 120kHz.


The frequency range from above 1GHz is checked, the bandwidth of Signal Analyzer is set at 1MHz.

- (6) The frequency range from 30MHz to 1000MHz was pre-scanned with a peak detector and all final readings of measurement from Test Receiver are Quasi-Peak values, the frequency range from 1GHz to 6GHz was pre-scanned with a peak detector and all final readings of measurement from Spectrum Analyzer are peak and average values checked, all measurement distance is 3m in 3m semi anechoic chamber.
- (7) Test for all x, y, z axes is performed and only the worst case of X axes was recorded in the test report.
- (8) The test results are reported on Section 4.6.

4.6. Test Results

Frequency Range	: 30MHz~1000MHz
Test Mode	: TX 2402MHz
Test Results	: PASS
<p>Note: 1. The test results are listed in next pages.</p> <p>2. This mode is worst case mode, and this report only reflected the worst mode.</p> <p>3. If the limits for the measurement with the quasi-peak detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.</p>	

Vertical:

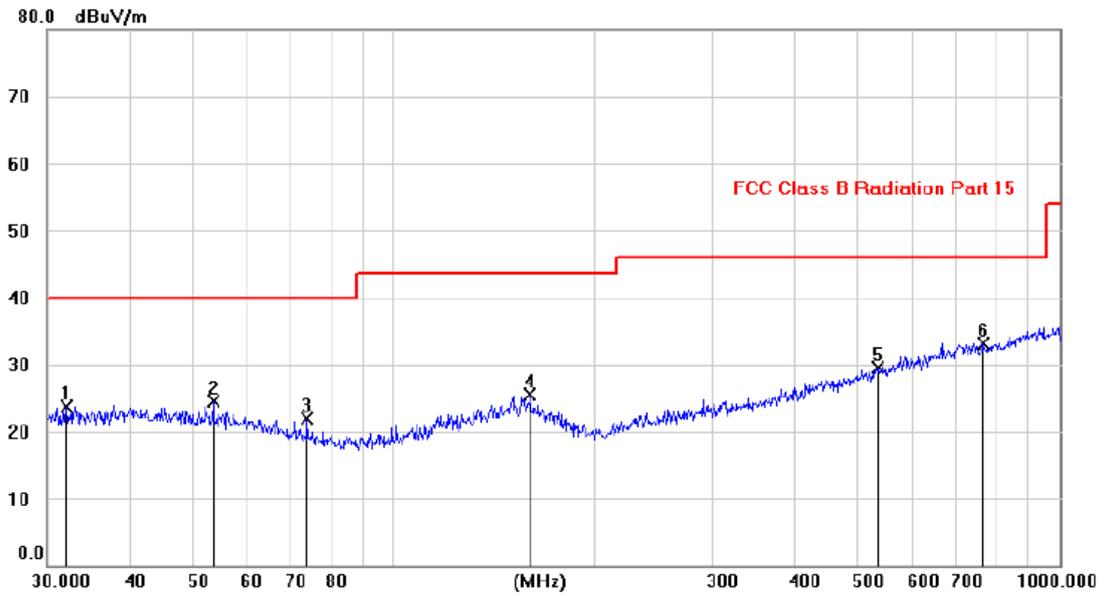


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		32.1381	10.02	13.61	23.63	40.00	-16.37	peak	
2		53.3616	10.70	13.72	24.42	40.00	-15.58	peak	
3		73.8842	11.07	10.81	21.88	40.00	-18.12	peak	
4		160.1022	10.52	15.03	25.55	43.50	-17.95	peak	
5		535.0190	10.60	18.94	29.54	46.00	-16.46	peak	
6	*	770.5474	10.47	22.70	33.17	46.00	-12.83	peak	

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Horizontal:

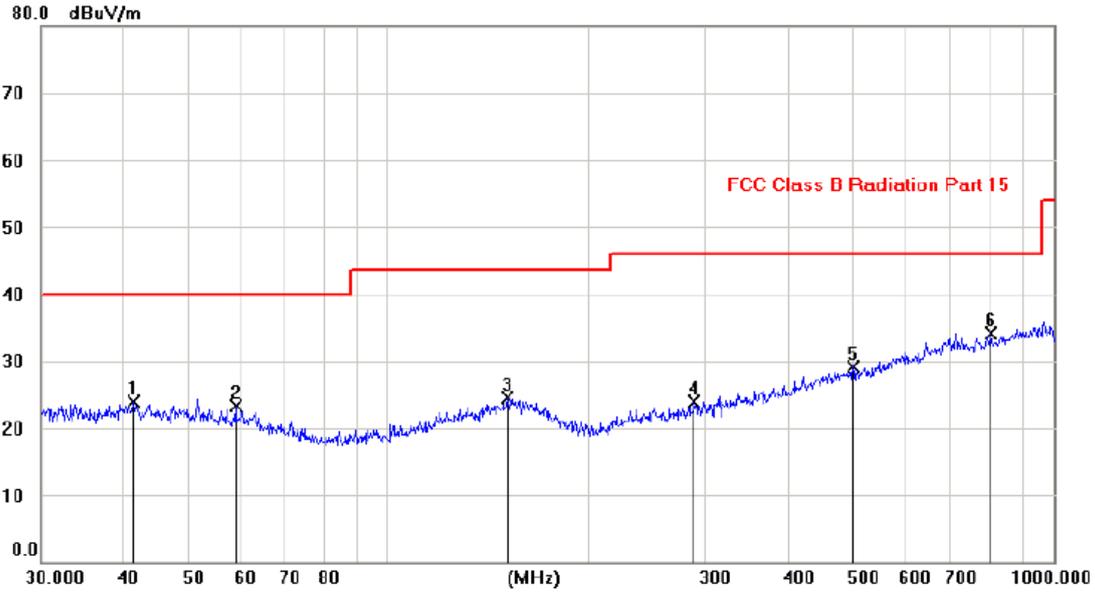

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		41.4021	9.49	14.34	23.83	40.00	-16.17			peak
2		58.9493	10.10	13.26	23.36	40.00	-16.64			peak
3		151.1549	9.49	15.06	24.55	43.50	-18.95			peak
4		288.7657	10.12	13.84	23.96	46.00	-22.04			peak
5		500.5936	10.98	18.22	29.20	46.00	-16.80			peak
6	*	806.4859	11.15	23.01	34.16	46.00	-11.84			peak

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Note: This report only shall the worst case mode for TX 2402MHz.


Frequency Range : 1GHz~25GHz								
EUT : Electronic shelf label					Test Date : 2021.11.12			
M/N : Nebular-213R-N					Temperature : 24°C			
Test Engineer : Yannis Wen					Humidity : 56%			
Test Mode : TX 2402MHz								
Test Results : PASS								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2402	H	95.57	-3.41	92.16	113.97	-21.81	Peak
2	2402	H	--	-3.41	--	93.97	--	Avg
3	4804	H	35.35	3.23	38.58	74	-35.42	Peak
4	4804	H	--	3.23	--	54	--	Avg
1	2402	V	94.81	-3.41	91.40	113.97	-22.57	Peak
2	2402	V	--	-3.41	--	93.97	--	Avg
3	4804	V	37.30	3.23	40.53	74	-33.47	Peak
4	4804	V	--	3.23	--	54	--	Avg
Note:	<p>1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.</p> <p>2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.</p> <p>3. Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK.</p> <p>4. Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: Avg.</p> <p>5. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.</p>							

Frequency Range : 1GHz~25GHz								
EUT : Electronic shelf label					Test Date : 2021.11.12			
M/N : Nebular-213R-N					Temperature : 24℃			
Test Engineer : Yannis Wen					Humidity : 56%			
Test Mode : TX 2441MHz								
Test Results : PASS								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2441	H	91.93	-3.38	88.55	113.97	-25.42	Peak
2	2441	H	--	-3.38	--	93.97	--	Avg
3	4882	H	38.63	3.23	41.86	74	-32.14	Peak
4	4882	H	--	3.23	--	54	--	Avg
1	2441	V	88.70	-3.38	85.32	113.97	-28.65	Peak
2	2441	V	--	-3.38	--	93.97	--	Avg
3	4882	V	41.22	3.23	44.45	74	-29.55	Peak
4	4882	V	--	3.23	--	54	--	Avg
Note:	<p>1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.</p> <p>2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.</p> <p>3. Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK.</p> <p>4. Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: Avg.</p> <p>5. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.</p>							

Frequency Range : 1GHz~25GHz								
EUT : Electronic shelf label					Test Date : 2021.11.12			
M/N : Nebular-213R-N					Temperature : 24°C			
Test Engineer : Yannis Wen					Humidity : 56%			
Test Mode : TX 2480MHz								
Test Results : PASS								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2480	H	94.79	-3.38	91.41	113.97	-22.56	Peak
2	2480	H	--	-3.38	--	93.97	--	Avg
3	4960	H	39.37	3.23	42.60	74	-31.40	Peak
4	4960	H	--	3.23	--	54	--	Avg
1	2480	V	93.72	-3.38	90.34	113.97	-23.63	Peak
2	2480	V	--	-3.38	--	93.97	--	Avg
3	4960	V	39.38	3.23	42.61	74	-31.39	Peak
4	4960	V	--	3.23	--	54	--	Avg
Note:	<p>1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.</p> <p>2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.</p> <p>3. Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK.</p> <p>4. Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: Avg.</p> <p>5. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.</p>							

5. Band Edge Test

5.1. Block Diagram of Test Setup

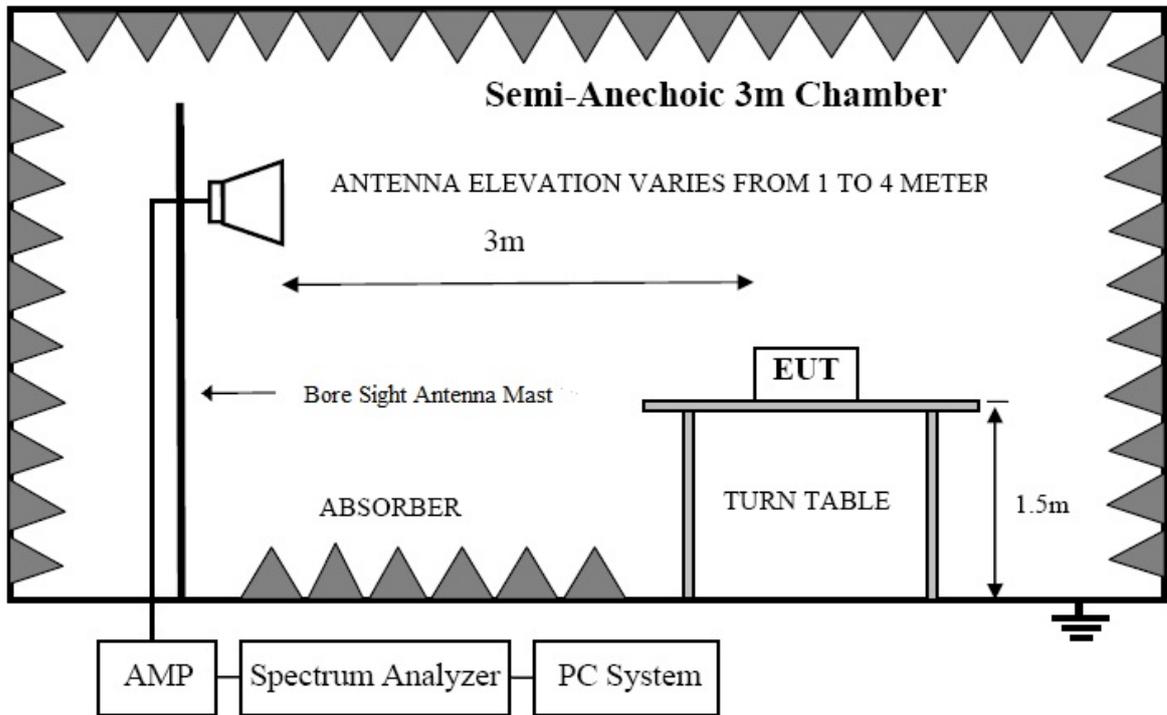

5.2. Test Limit

Please refer section 15.249 and section 15.205.

249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in section 15.209, whichever is the lesser attenuation.

249(e) As show in section 15.35(b), for frequencies above 1000MHz, the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak filed strength shall not exceed 2500 millivolts/meter at 3meters along the antenna azimuth.

5.3. Configuration of EUT on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

5.4. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 5.1.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode taking the test.


5.5. Test Procedure

- (1) The EUT was placed on a non-metallic table, 150 cm above the ground plane inside a semi-anechoic chamber. An antenna was located 3m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10: 2013 on Radiated Emission test.
- (2) For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- (3) Test antenna was located 4m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions


- (5) The frequency range from above 1GHz is checked, the bandwidth of Signal Analyzer is set at 1MHz.
- (6) The frequency range from 1GHz to 6GHz was pre-scanned with a peak detector and all final readings of measurement from Spectrum Analyzer are peak and average values checked, all measurement distance is 3m in 3m semi anechoic chamber.
- (7) Test for all x, y, z axes is performed and only the worst case of X axes was recorded in the test report.
- (8) The test results are reported on Section 5.6.

5.6. Test Results


Test Mode: TX 2402MHz

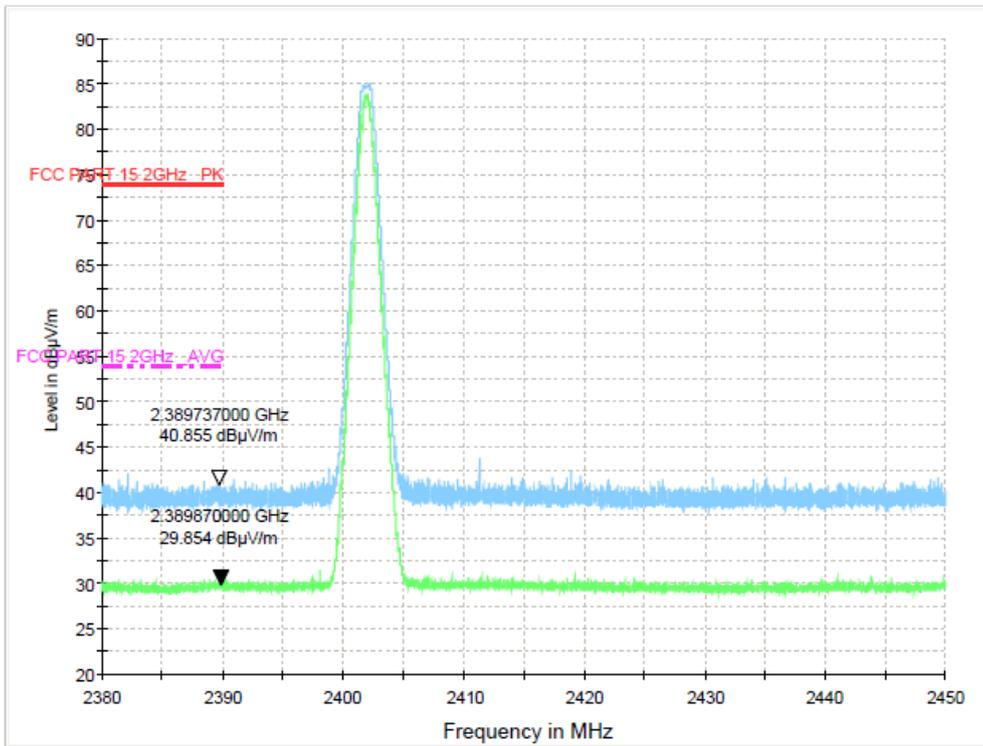

Test Mode: TX 2480MHz

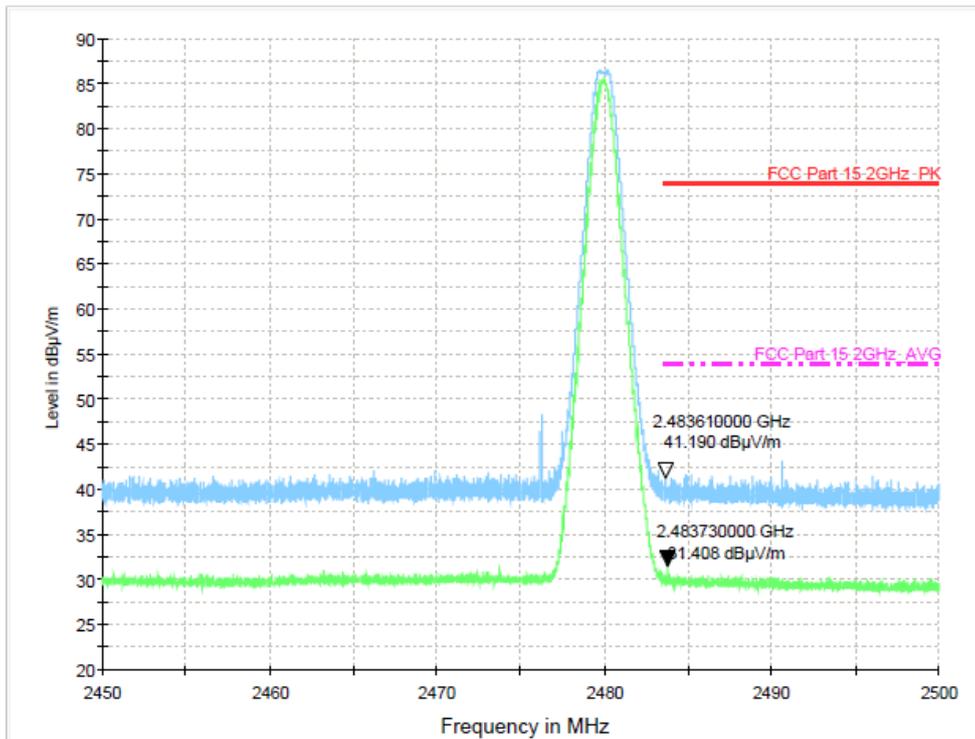

5.7. Block Diagram of Test Setup



5.8. Test Limit

Please refer section 15.249 and section 15.205.

5.9. Test Procedure

- (1) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.
- (2) The test receiver RBW set 30KHz, VBW set 100KHz, Sweep time set auto.

5.10. Test Results

Mode		Frequency MHz	20dB Bandwidth (KHz)	99% Bandwidth (KHz)	Limit (kHz)
FSK	ANT1	2402	588.7	561.66	/
		2441	590.5	567.39	/
		2480	587.4	562.74	/

Note: 1. The test results are listed in next pages.

Frequency: 2402MHz



Frequency: 2441MHz



Frequency: 2480MHz



6. Antenna Requirement

6.1. Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

6.2. Antenna Connected Construction



The directional gains of antenna used for transmitting is -0.6dBi, and the antenna is fixed antenna no consideration of replacement. Please see EUT photo for details.

6.3. Results



The EUT antenna is PCB Antenna. It complies with the standard requirement.



7. Photograph



7.1.Photos of Radiated Emission Test

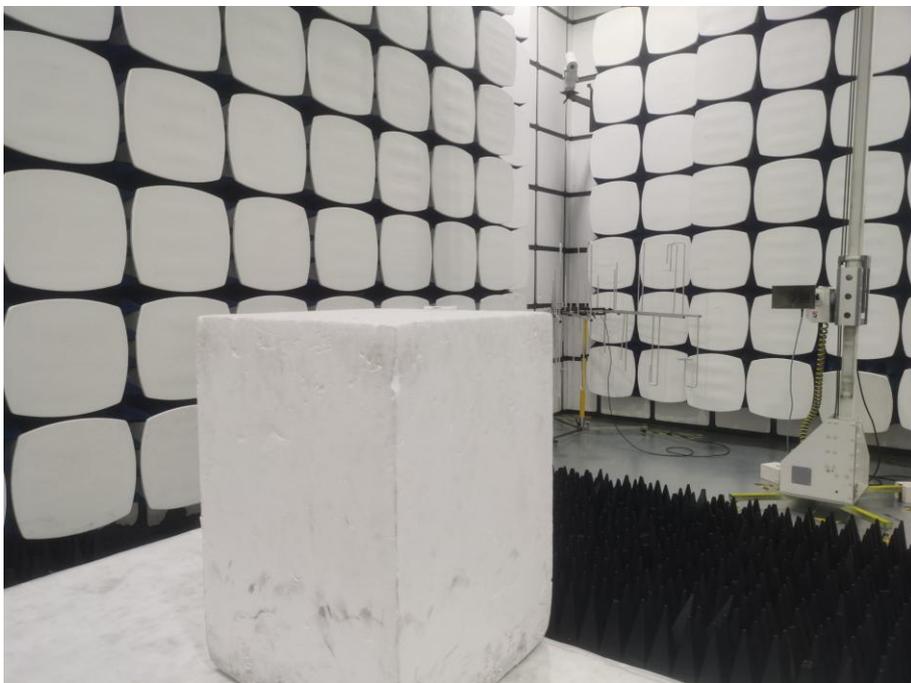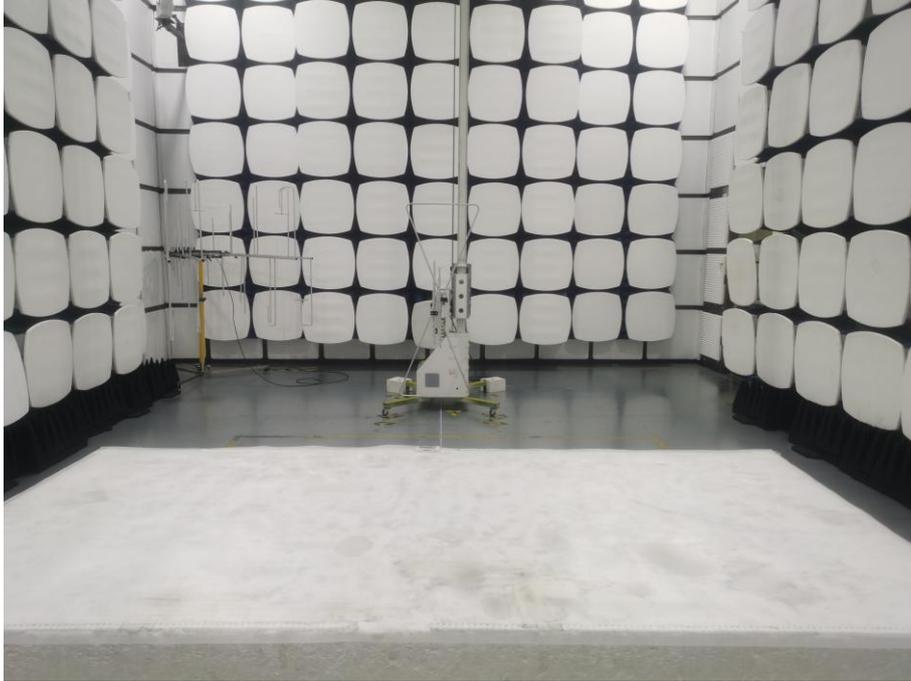



8. Photos of The EUT

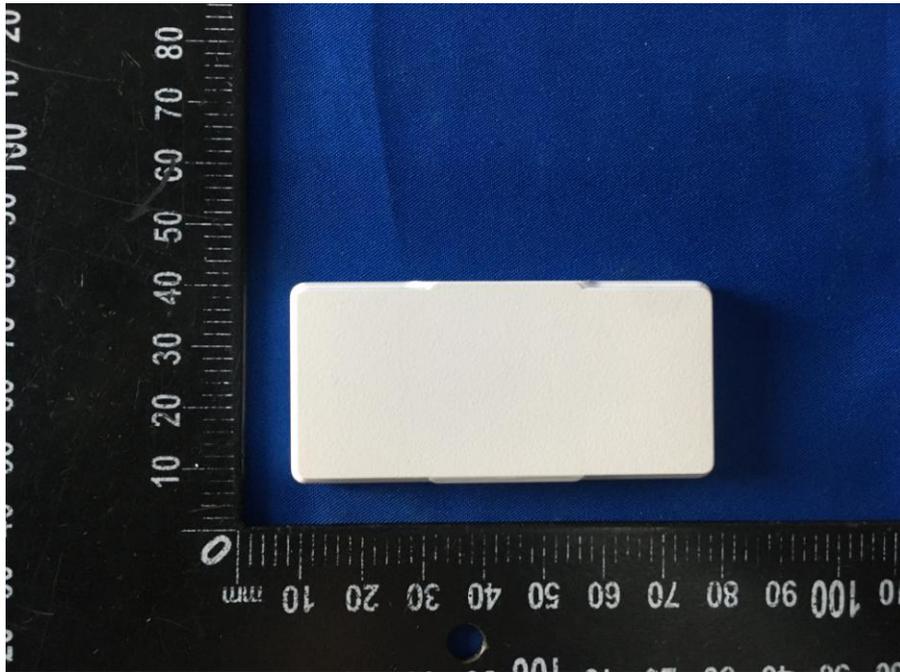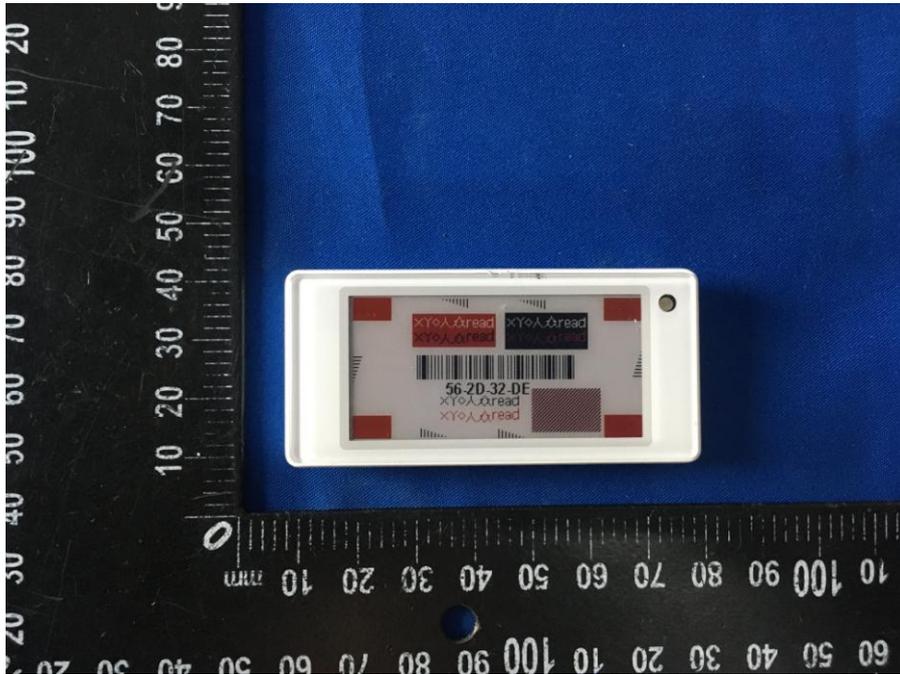


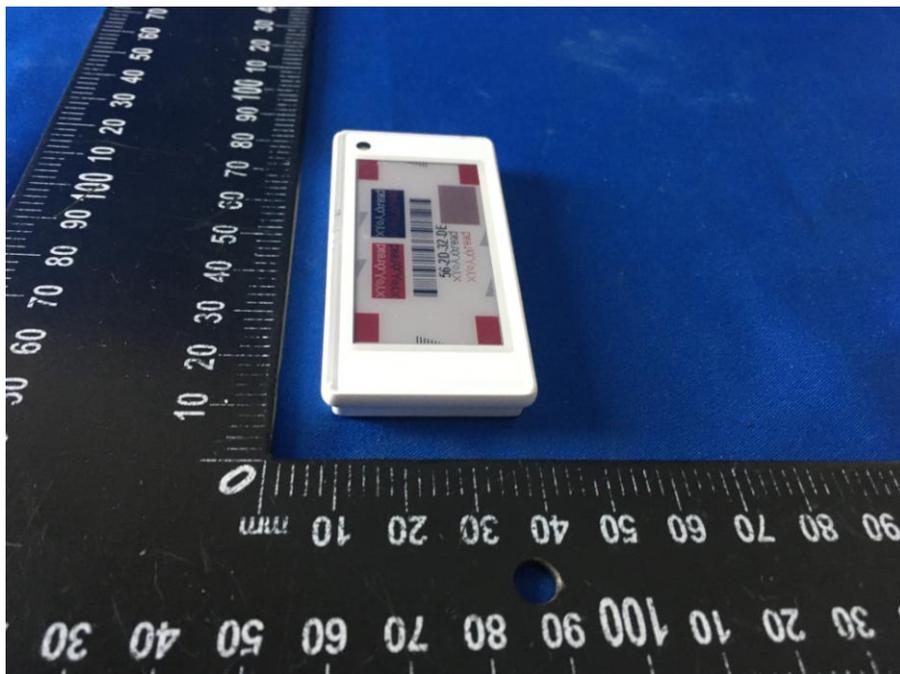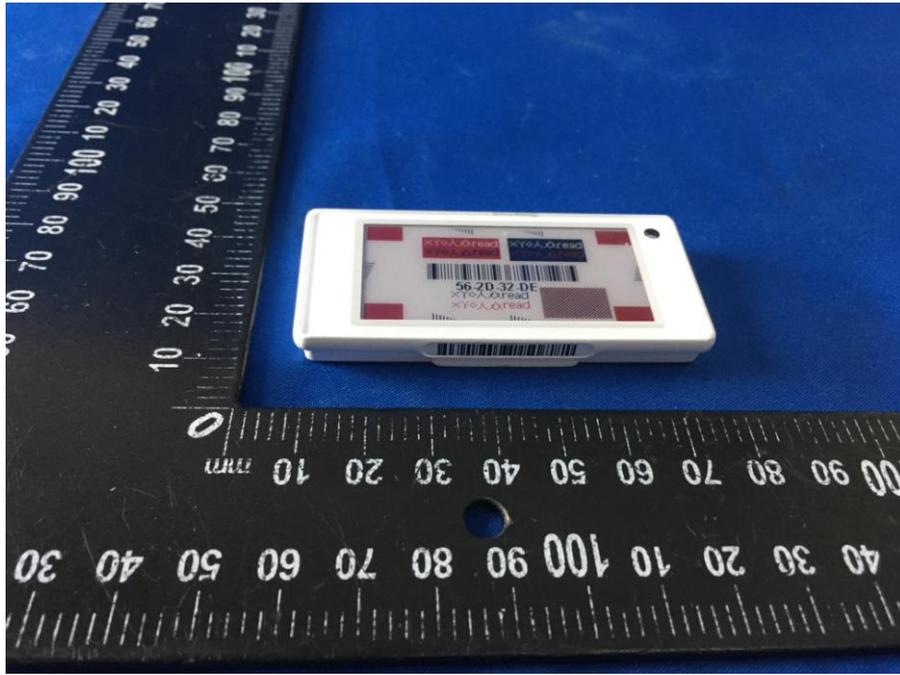

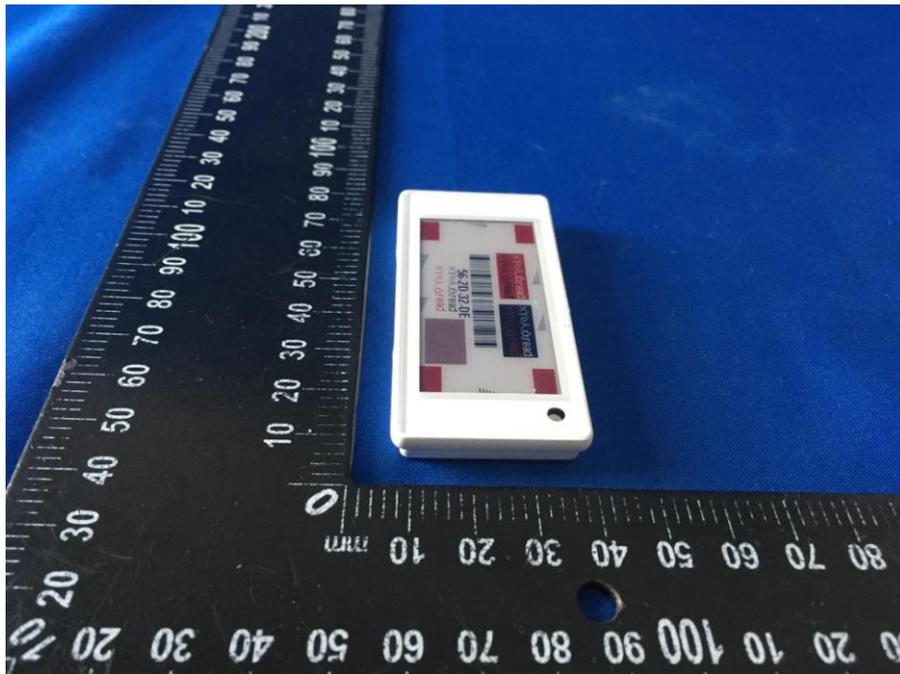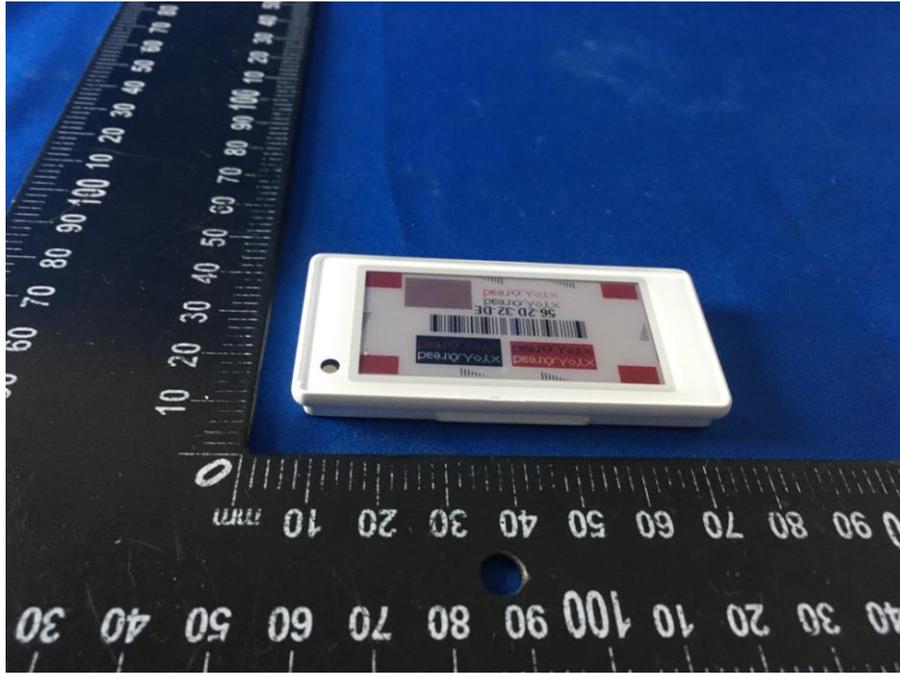



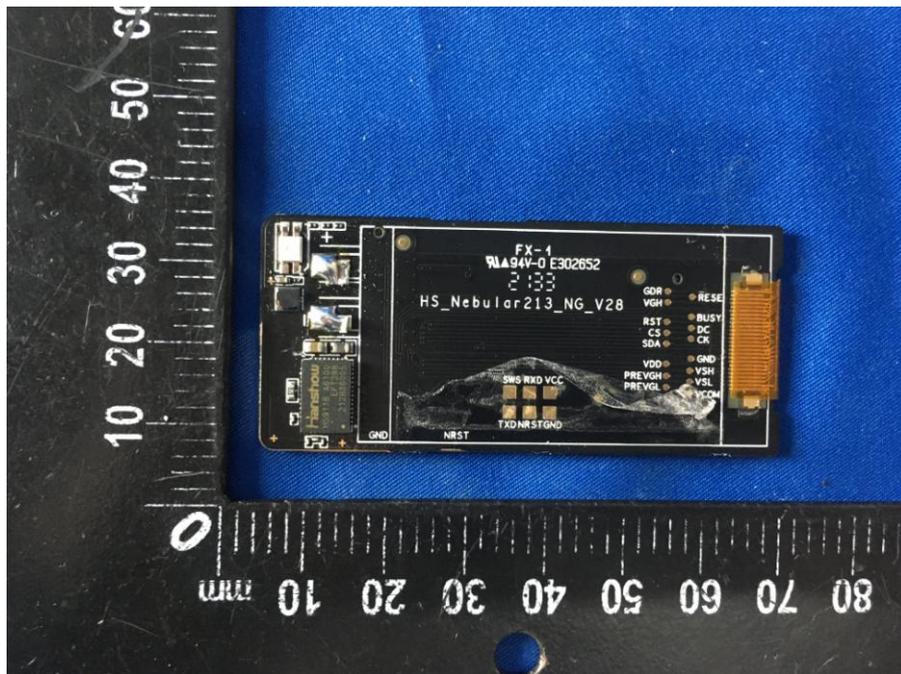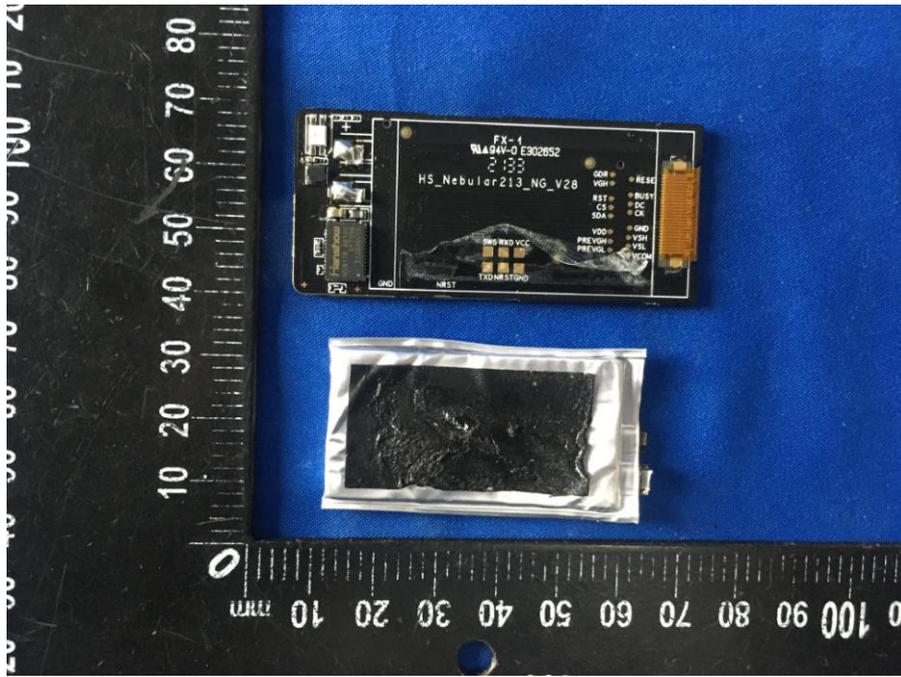

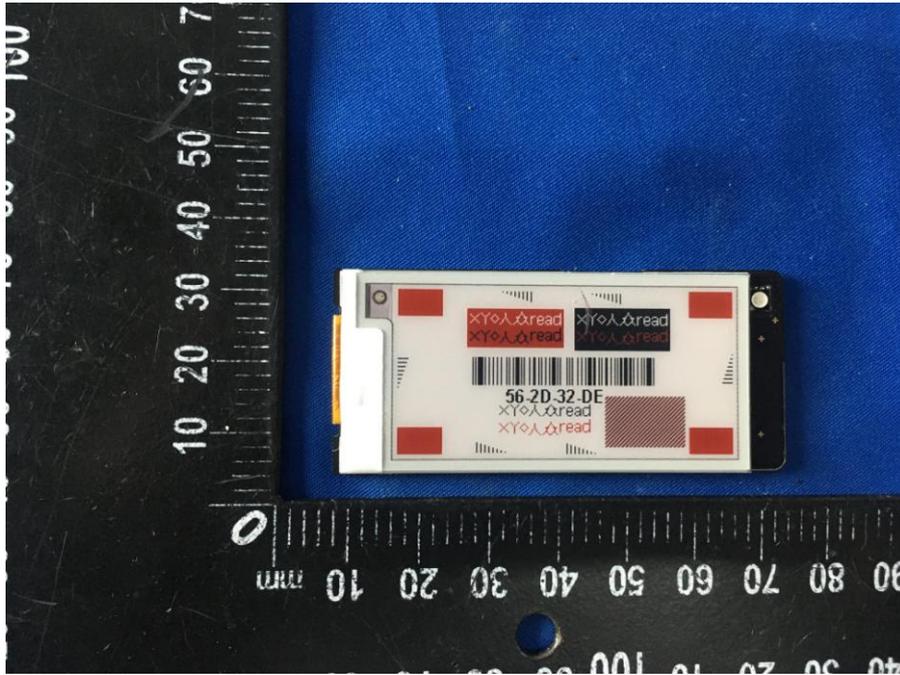

-----THE END OF REPORT-----