



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	AirTies Wireless Networks
Applicant Address	Gülbahar Mah. Avni Dilligil Sok. Celik Is Merkezi ISTANBUL, 34394 Turkey
FCC ID	Z3WAIR4920
Manufacturer's company	SHENZHEN GONGJIN ELECTRONICS CO.,LTD.
Manufacturer Address	2F/3F/4F Baiying Building, 1019#Naihai RD, Nanshan Dist., Shenzhen, Guangdong, CHINA

Product Name	2 Port Gigabit Ethernet 11ac/11n Wireless Router
Brand Name	AirTies
Model No.	Air 4920
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	Oct. 22, 2014
Final Test Date	Jan. 19, 2015
Submission Type	Original Equipment

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01, KDB662911 D01 v02r01, KDB644545 D03 v01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes	7
3.6. Table for Testing Locations.....	8
3.7. Table for Supporting Units	9
3.8. Table for Parameters of Test Software Setting	10
3.9. EUT Operation during Test	10
3.10. Duty Cycle.....	11
3.11. Test Configurations	12
4. TEST RESULT	15
4.1. AC Power Line Conducted Emissions Measurement.....	15
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	19
4.3. Maximum Conducted Output Power Measurement.....	27
4.4. Power Spectral Density Measurement	30
4.5. Radiated Emissions Measurement	35
4.6. Band Edge Emissions Measurement	50
4.7. Frequency Stability Measurement	56
4.8. Antenna Requirements	60
5. LIST OF MEASURING EQUIPMENTS	61
6. MEASUREMENT UNCERTAINTY.....	63
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3
APPENDIX C. RADIATED EMISSION CO-LOCATION REPORT	C1 ~ C3

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR490527-05AB	Rev. 01	Initial issue of report	Feb. 03, 2015



1. CERTIFICATE OF COMPLIANCE

Product Name : 2 Port Gigabit Ethernet 11ac/11n Wireless Router
Brand Name : AirTies
Model No. : Air 4920
Applicant : AirTies Wireless Networks
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 22, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink, appearing to read 'Sam Chen', is written over a horizontal line.

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	10.68 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	4.07 dB
4.4	15.407(a)	Power Spectral Density	Complies	4.02 dB
4.5	15.407(b)	Radiated Emissions	Complies	0.41 dB
4.6	15.407(b)	Band Edge Emissions	Complies	0.04 dB
4.7	15.407(g)	Frequency Stability	Complies	-
4.8	15.203	Antenna Requirements	Complies	-

Note: The test configuration and test mode was written in this test report are designated by the applicant.

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	IEEE 802.11a: WLAN (1TX, 1RX) IEEE 802.11n/ac: WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	IEEE 802.11a: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	IEEE 802.11a: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	5150 ~ 5250MHz
Channel Number	4 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Channel Band Width (99%)	IEEE 802.11a: 28.83 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 27.26 MHz ; IEEE 802.11ac MCS0/Nss1 (VHT40): 37.34 MHz ; IEEE 802.11ac MCS0/Nss1 (VHT80): 75.83 MHz
Maximum Conducted Output Power	IEEE 802.11a: 21.28 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 25.93 dBm ; IEEE 802.11ac MCS0/Nss1 (VHT40): 22.96 dBm ; IEEE 802.11ac MCS0/Nss1 (VHT80): 19.16 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based) <input type="checkbox"/> Frame Based
Beamforming Function	<input checked="" type="checkbox"/> With beamforming for 802.11n/ac in 5GHz. <input type="checkbox"/> Without beamforming
Operating Mode	<input type="checkbox"/> Outdoor access point <input checked="" type="checkbox"/> Indoor access point <input type="checkbox"/> Fixed point-to-point access points <input type="checkbox"/> Mobile and portable client devices

Antenna and Band width

Antenna	Single (TX)			Three (TX)		
Band width Mode	20 MHz	40 MHz	80 MHz	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X	X	X	X
IEEE 802.11n	X	X	X	V	V	X
IEEE 802.11ac	X	X	X	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS 0-23
802.11n (HT40)	3	MCS 0-23
802.11ac (VHT20)	3	MCS 0-9/Nss1-3
802.11ac (VHT40)	3	MCS 0-9/Nss1-3
802.11ac (VHT80)	3	MCS 0-9/Nss1-3
<p>Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40.</p> <p>Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.</p> <p>Note 3: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac</p>		

3.2. Accessories

Power	Brand	Model	Rating
Adapter 1	MOSO	MSP-C1000IC12.0-12B-US	INPUT: 100-240V~50/60Hz, 0.5A max. OUTPUT: 12.0V, 1A
Adapter 2	MOSO	MSP-C1500IC12.0-18W-US	INPUT: 100-240V~50/60Hz, 0.7A max. OUTPUT: 12.0V, 1.5A

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	-	-	PCB Antenna	NA	2.5	-
2	Airgain	N2420S-T-G50U	PIFA Antenna	I-PEX	2.5	-
3	-	-	PCB Antenna	NA	-	0
4	-	-	PCB Antenna	NA	-	0
5	-	-	PCB Antenna	NA	-	0

Note: The EUT has five antennas. There are two antennas for 2.4GHz and three antennas for 5GHz.

<For 2.4GHz band>

For 802.11b/g mode:

Only Ant. 1 can be used as transmitting/receiving antenna.

For 802.11n mode:

Both Ant. 1 and Ant. 2 support transmit and receive functions.

Ant. 1 and Ant. 2 can transmit and receive signal simultaneously.

<For 5GHz band>


For 802.11a mode:

Only Ant. 3 can be used as transmitting/receiving antenna.

For 802.11n/ac mode:

Ant. 3, Ant. 4 and Ant. 5 support transmit and receive functions.

Ant. 3, Ant. 4 and Ant. 5 can transmit and receive signal simultaneously.

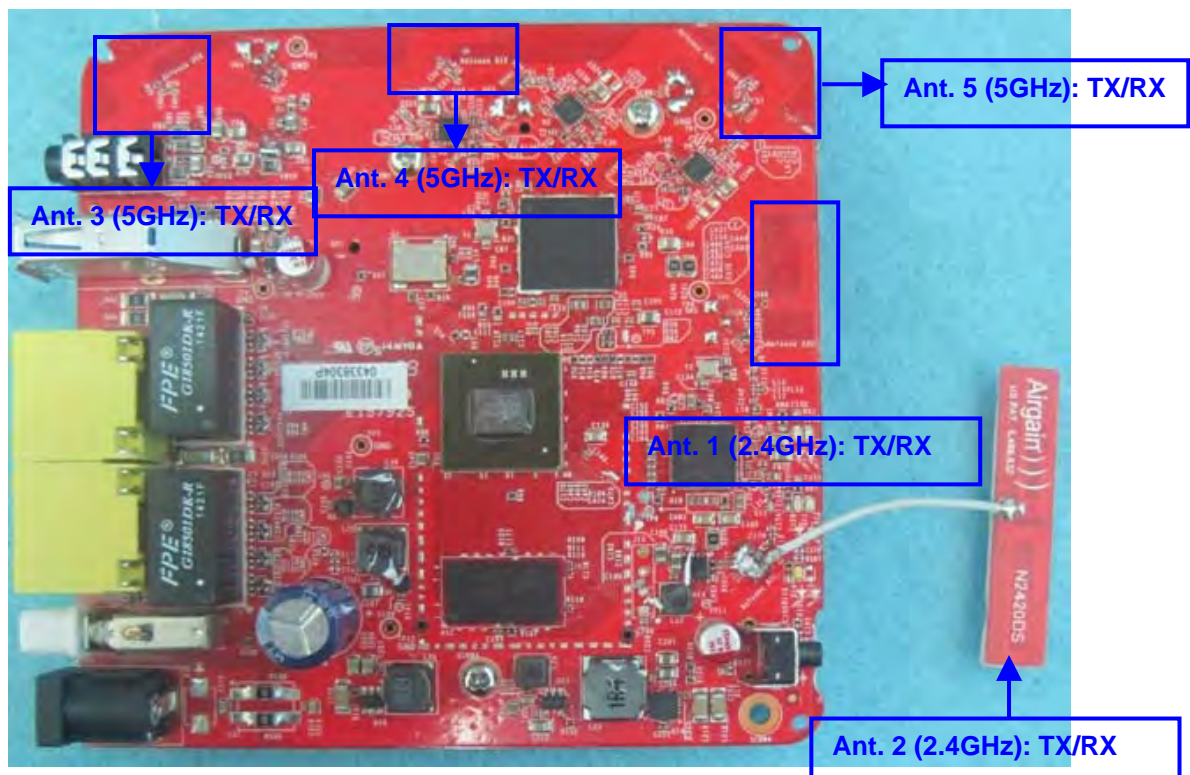

3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal Link		-	-	-
Max. Conducted Output Power	11a/BPSK	Band 1	6Mbps	36/40/48	3
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	3+4+5
	11ac VHT40	Band 1	MCS0/Nss1	38/46	3+4+5
	11ac VHT80	Band 1	MCS0/Nss1	42	3+4+5
Power Spectral Density	11a/BPSK	Band 1	6Mbps	36/40/48	3
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	3+4+5
	11ac VHT40	Band 1	MCS0/Nss1	38/46	3+4+5
	11ac VHT80	Band 1	MCS0/Nss1	42	3+4+5
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	11a/BPSK	Band 1	6Mbps	36/40/48	3
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	3+4+5
	11ac VHT40	Band 1	MCS0/Nss1	38/46	3+4+5
	11ac VHT80	Band 1	MCS0/Nss1	42	3+4+5
Radiated Emission Below 1GHz	Normal Link		-	-	-
Radiated Emission Above 1GHz	11a/BPSK	Band 1	6Mbps	36/40/48	3
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	3+4+5
	11ac VHT40	Band 1	MCS0/Nss1	38/46	3+4+5
	11ac VHT80	Band 1	MCS0/Nss1	42	3+4+5
Band Edge Emission	11a/BPSK	Band 1	6Mbps	36/40/48	3
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	3+4+5
	11ac VHT40	Band 1	MCS0/Nss1	38/46	3+4+5
	11ac VHT80	Band 1	MCS0/Nss1	42	3+4+5
Frequency Stability	20 MHz	Band 1	-	40	3
	40 MHz	Band 1	-	38	3+4+5
	80 MHz	Band 1	-	42	3+4+5

Note 1: VHT20/VHT40 covers HT20/HT40, due to same modulation.

Note 2: There are two modes of EUT, one is beamforming mode, and the other is non-beamforming mode for 802.11n/ac in 5GHz, after evaluating, beamforming mode has been evaluated to be the worst case, so it was selected to test and record in this test report.

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. Normal Link with Adapter 1

Mode 2. Normal Link with Adapter 2

Mode 1 is the worst case, so it was selected to record in this test report.

For Radiated Emission test:

<Below 1G>

Mode 1. Normal Link with Adapter 1

Mode 2. Normal Link with Adapter 2

Mode 2 is the worst case, so it was selected to record in this test report.

<Above 1G>

Mode 1. CTX

For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to Appendix B) and Radiated Emission Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: 03CH01-CB (Below 1G)

Support Unit	Brand	Model	FCC ID
NB	DELL	M1340	E2K4965AGNM
NB	DELL	E6430	QDS-BRCM1049LE
NB	DELL	D420	E2KWM3945ABG
Flash Disk3.0	TDK	TF30	DoC

For Test Site No: 03CH01-CB (Above 1G)

For Non-Beamforming Mode:

Support Unit	Brand	Model	FCC ID
NB	DELL	M1340	E2K4965AGNM

For Beamforming Mode:

Support Unit	Brand	Model	FCC ID
NB	DELL	M1340	E2K4965AGNM
NB	DELL	E6430	QDS-BRCM1049LE
WLAN ac Dongle	Netgear	A6200	PY31220200

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB*3	DELL	E6430	DoC
Flash Disk3.0	TDK	TF30	DoC

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	Mtool_2.0.0.7		
Mode	Test Frequency (MHz)		
	NCB: 20MHz		
	5180 MHz	5200 MHz	5240 MHz
802.11a	88	88	79
802.11ac MCS0/Nss1 VHT20	77	88	77
Mode	NCB: 40MHz		
802.11ac MCS0/Nss1 VHT40	5190 MHz	5230 MHz	
	67	74	
Mode	NCB: 80MHz		
802.11ac MCS0/Nss1 VHT80	5210 MHz		
	58		

3.9. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe " to link with the remote workstation to receive and transmit packet by WLAN ac Dongle and transmit duty cycle no less 98%

3.10. Duty Cycle

For non-beamforming mode:


Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11a	2.05	2.077	98.71%	0.06	0.01

For beamforming mode:

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11ac MCS0/Nss1 VHT20	1.920	1.99	96.48%	0.16	0.52
802.11ac MCS0/Nss1 VHT40	0.900	0.97	92.78%	0.33	1.11
802.11ac MCS0/Nss1 VHT80	0.465	0.54	86.11%	0.65	2.15

3.11. Test Configurations


3.11.1.AC Power Line Conduction Emissions Test and Radiation Emissions Test (Below1G) Configuration

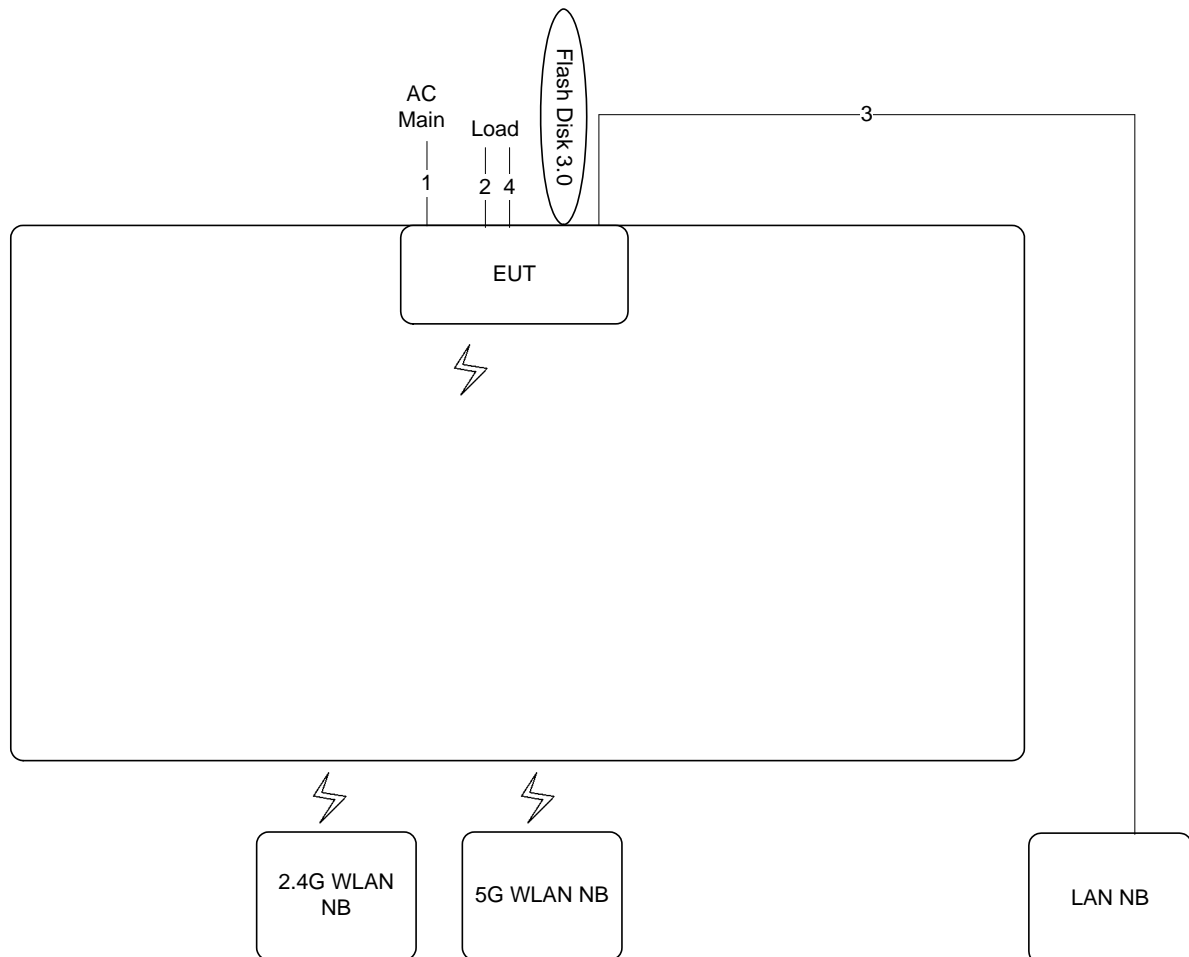

Item	Connection	Shielded	Length	Remark
1	Power cable	No	1.5m	-
2	RJ-45 cable	No	1.5m	Load
3	RJ-45 cable	No	10m	-
4	Audio cable	No	1.6m	Load


3.11.2. Radiation Emissions (Above 1G)Test Configuration

For Non-Beamforming Mode

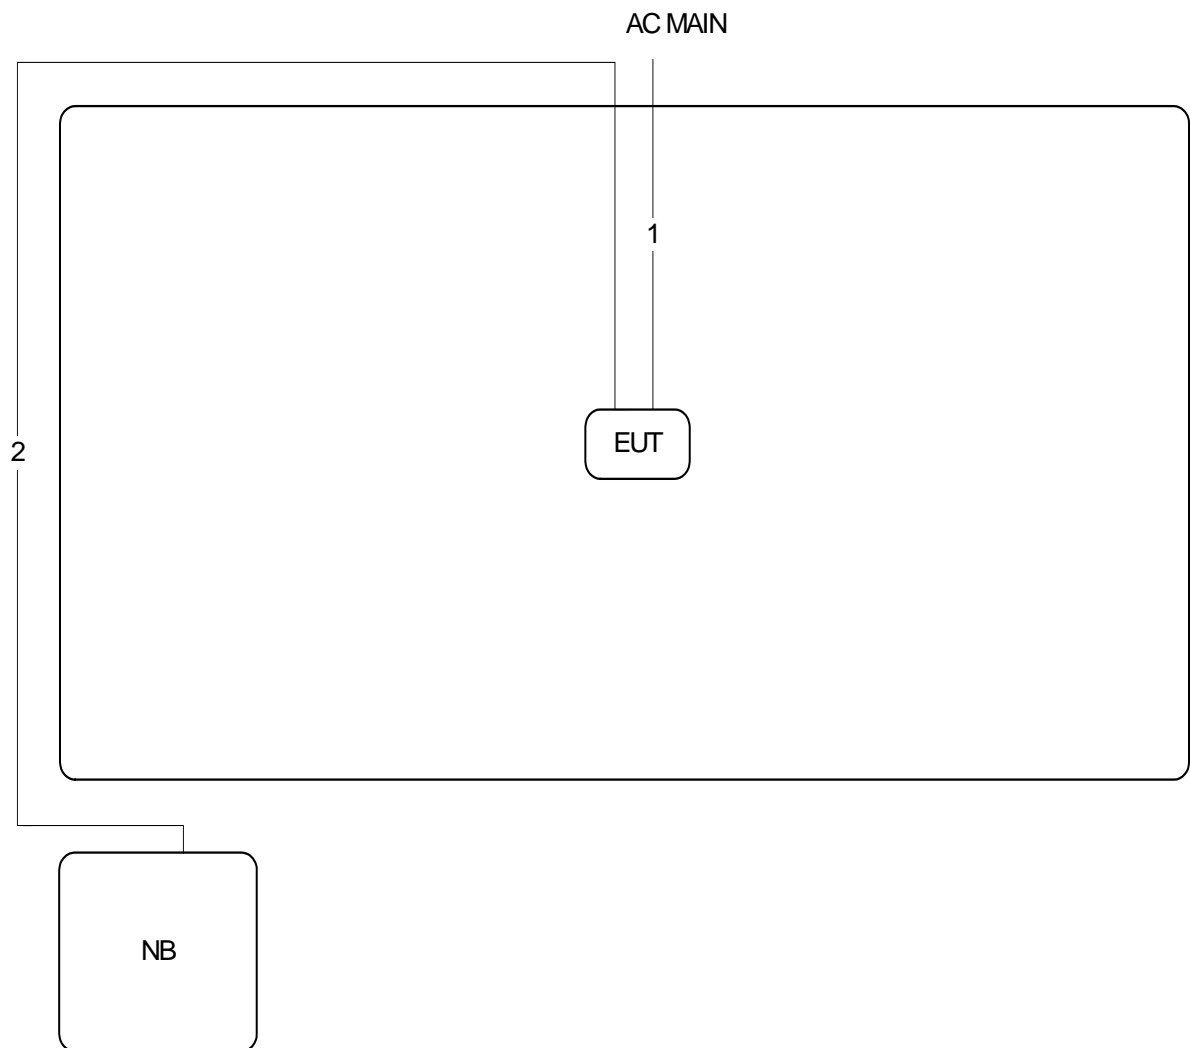

Item	Connection	Shielded	Length(m)
1	Power Cable	No	2m
2	RJ-45 Cable	No	10m

For Beamforming Mode

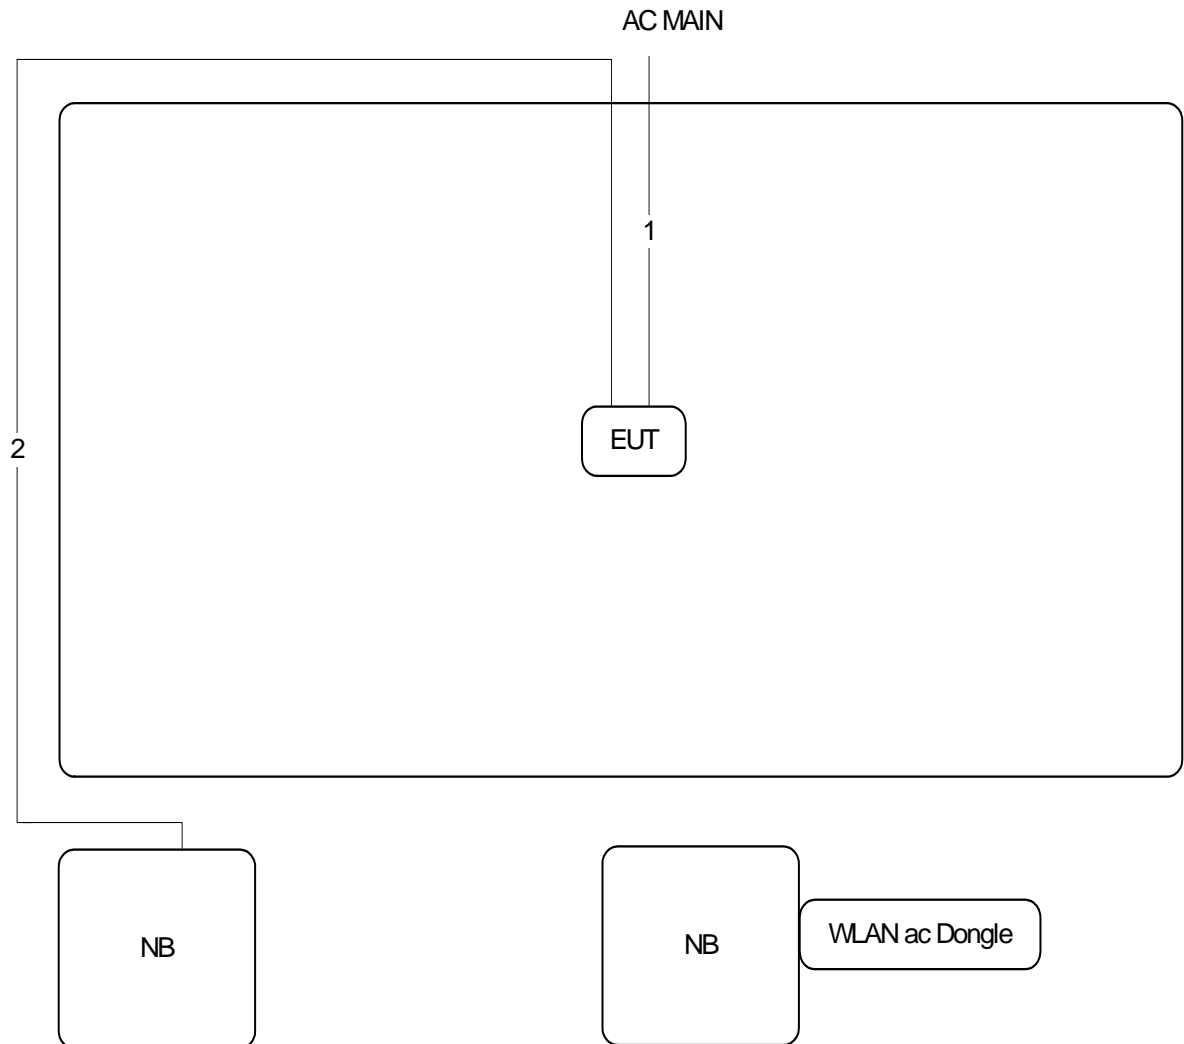

Item	Connection	Shielded	Length(m)
1	Power Cable	No	2m
2	RJ-45 Cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

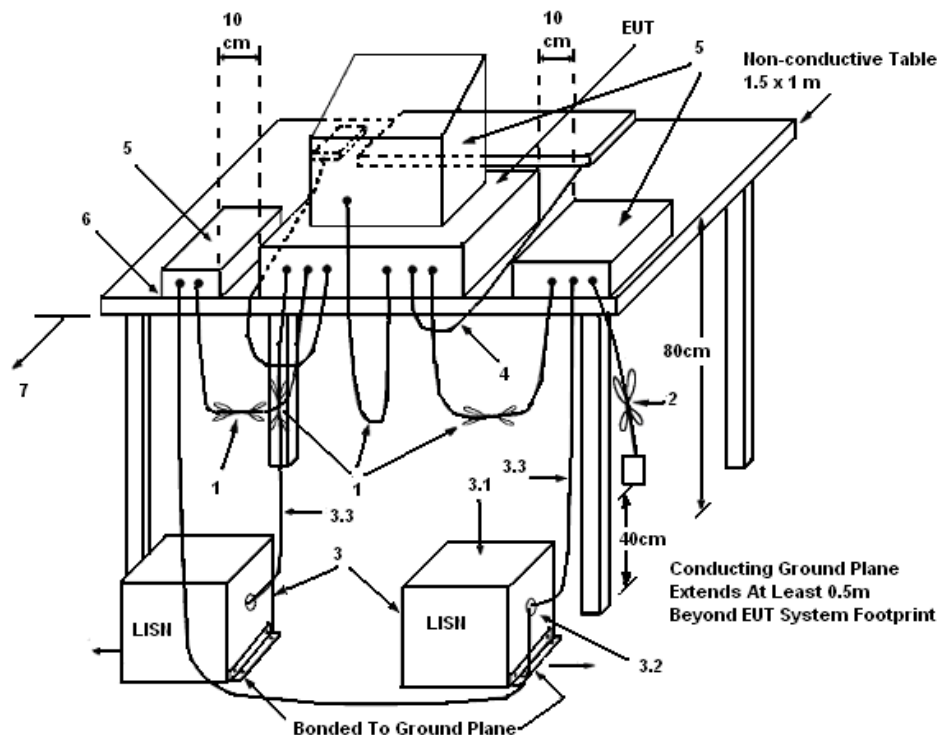

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	22°C	Humidity	63%
Test Engineer	Edison Lin	Phase	Line
Configuration	Normal Link		

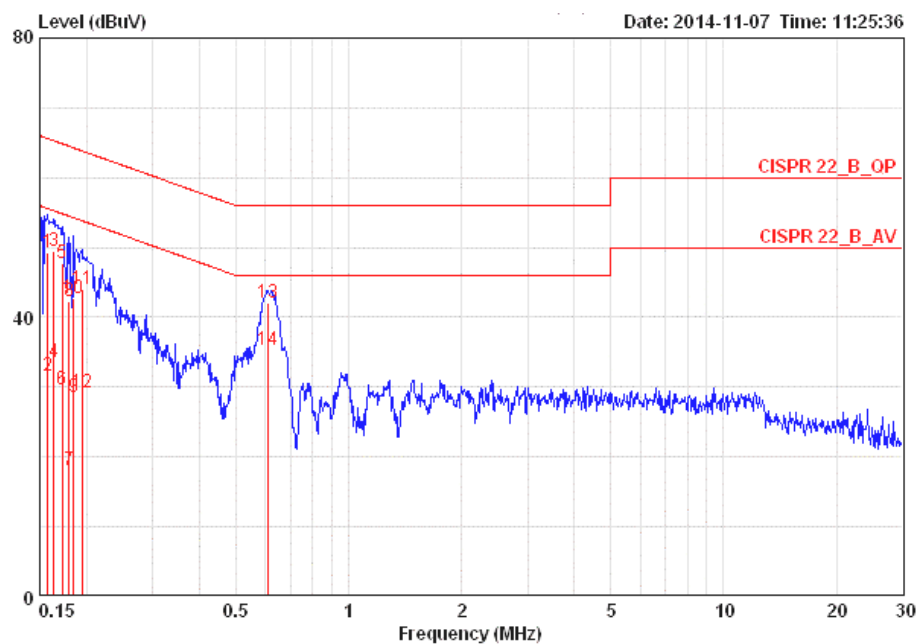

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15733	49.36	-16.24	65.60	39.24	9.96	0.16	QP	LINE
2	0.15733	31.65	-23.95	55.60	21.53	9.96	0.16	AVERAGE	LINE
3	0.16327	49.47	-15.83	65.30	39.35	9.96	0.16	QP	LINE
4	0.16327	33.51	-21.79	55.30	23.39	9.96	0.16	AVERAGE	LINE
5	0.17215	47.79	-17.06	64.86	37.67	9.96	0.16	QP	LINE
6	0.17215	29.62	-25.23	54.86	19.50	9.96	0.16	AVERAGE	LINE
7	0.17961	18.14	-36.36	54.50	8.02	9.96	0.16	AVERAGE	LINE
8	0.17961	42.29	-22.21	64.50	32.17	9.96	0.16	QP	LINE
9	0.18443	28.51	-25.77	54.28	18.39	9.96	0.16	AVERAGE	LINE
10	0.18443	42.79	-21.49	64.28	32.67	9.96	0.16	QP	LINE
11	0.19447	43.98	-19.86	63.84	33.86	9.96	0.16	QP	LINE
12	0.19447	29.27	-24.57	53.84	19.15	9.96	0.16	AVERAGE	LINE
13	0.61075	41.97	-14.03	56.00	31.81	9.97	0.19	QP	LINE
14	0.61075	35.32	-10.68	46.00	25.16	9.97	0.19	AVERAGE	LINE

Temperature	22°C	Humidity	63%
Test Engineer	Edison Lin	Phase	Neutral
Configuration	Normal Link		

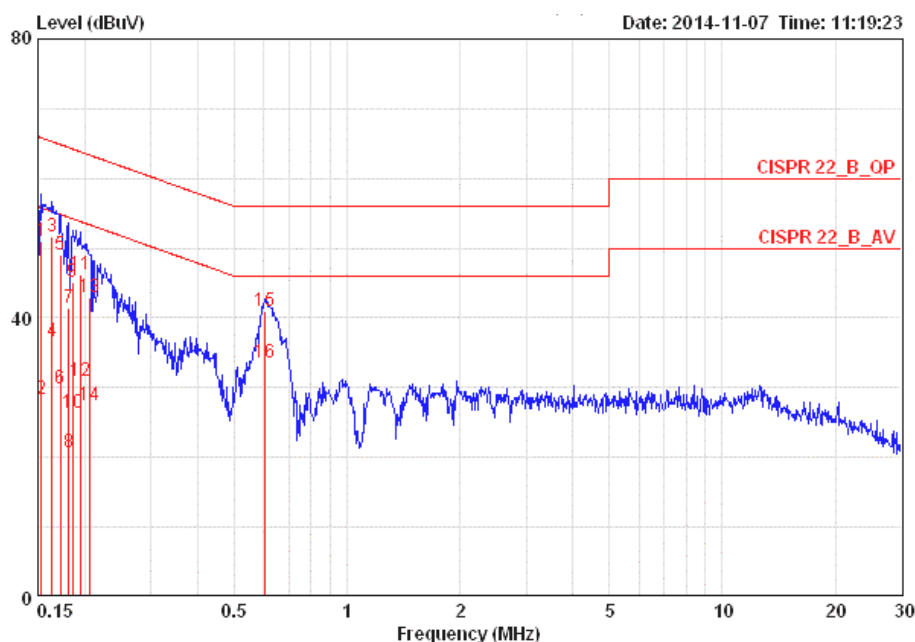

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15321	50.99	-14.83	65.82	40.88	9.95	0.16	QP	NEUTRAL
2	0.15321	28.39	-27.43	55.82	18.28	9.95	0.16	AVERAGE	NEUTRAL
3	0.16327	51.62	-13.68	65.30	41.51	9.95	0.16	QP	NEUTRAL
4	0.16327	36.63	-18.67	55.30	26.52	9.95	0.16	AVERAGE	NEUTRAL
5	0.17215	48.96	-15.89	64.86	38.85	9.95	0.16	QP	NEUTRAL
6	0.17215	29.79	-25.06	54.86	19.68	9.95	0.16	AVERAGE	NEUTRAL
7	0.18152	41.45	-22.96	64.42	31.34	9.95	0.16	QP	NEUTRAL
8	0.18152	20.62	-33.79	54.42	10.51	9.95	0.16	AVERAGE	NEUTRAL
9	0.18541	45.21	-19.03	64.24	35.10	9.95	0.16	QP	NEUTRAL
10	0.18541	26.44	-27.80	54.24	16.33	9.95	0.16	AVERAGE	NEUTRAL
11	0.19447	46.18	-17.66	63.84	36.07	9.95	0.16	QP	NEUTRAL
12	0.19447	30.88	-22.96	53.84	20.77	9.95	0.16	AVERAGE	NEUTRAL
13	0.20614	42.97	-20.39	63.36	32.85	9.95	0.17	QP	NEUTRAL
14	0.20614	27.47	-25.89	53.36	17.35	9.95	0.17	AVERAGE	NEUTRAL
15	0.60112	41.04	-14.96	56.00	30.89	9.96	0.19	QP	NEUTRAL
16	0.60112	33.49	-12.51	46.00	23.34	9.96	0.19	AVERAGE	NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	26°C	Humidity	63%
Test Engineer	Nick Peng, Kenneth Huang		

For Non-Beamforming Mode / Antenna 3


Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180 MHz	42.43	28.05
	5200 MHz	43.22	28.83
	5240 MHz	34.87	19.54

For Beamforming Mode / Antenna 3 + Antenna 4 + Antenna 5

Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11ac MCS0/Nss1 VHT20	5180 MHz	32.96	18.32
	5200 MHz	42.70	27.26
	5240 MHz	32.09	18.23
802.11ac MCS0/Nss1 VHT40	5190 MHz	42.17	36.90
	5230 MHz	70.73	37.34
802.11ac MCS0/Nss1 VHT80	5210 MHz	82.90	75.83


For Non-Beamforming Mode:

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Antenna 3 + Antenna 4 + Antenna 5 / 5180 MHz

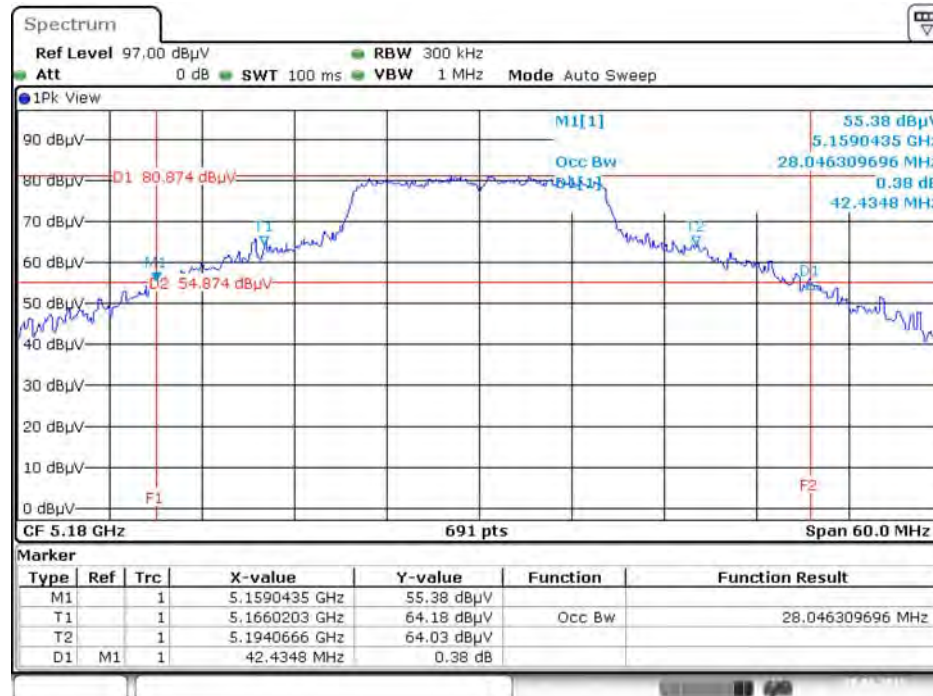


Date: 28.JAN.2015 23:14:30

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Antenna 3 + Antenna 4 + Antenna 5 / 5200 MHz

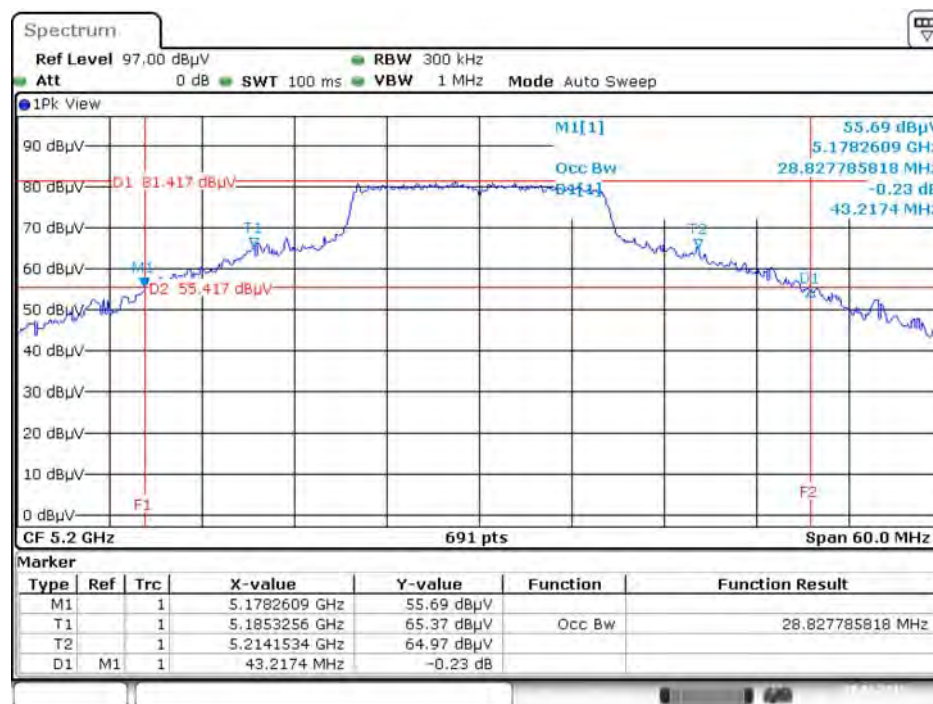

Date: 28.JAN.2015 23:40:02


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Antenna 3 + Antenna 4 + Antenna 5 / 5240 MHz

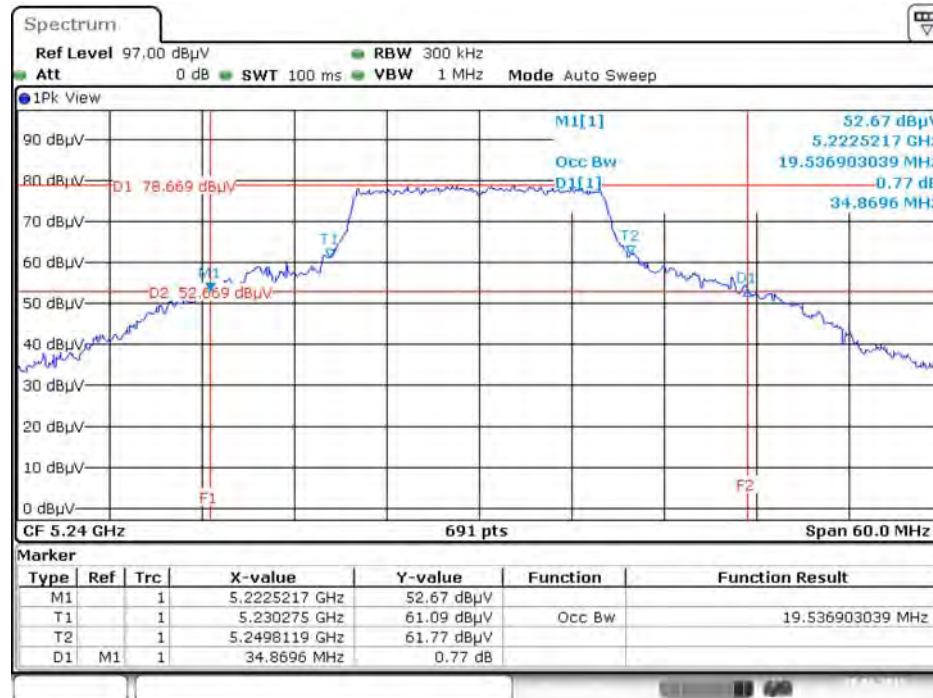

Date: 28. JAN 2015 23:41:21


For Beamforming Mode

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 /
Antenna 3 + Antenna 4 + Antenna 5 / 5180 MHz

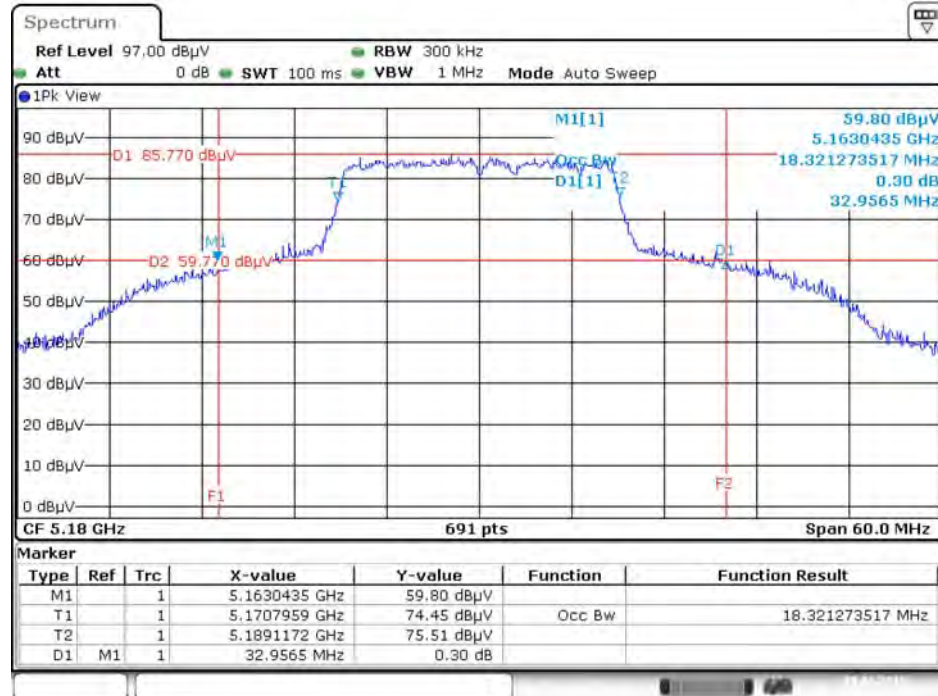


Date: 29.JAN.2015 00:42:07

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 /
Antenna 3 + Antenna 4 + Antenna 5 / 5200 MHz

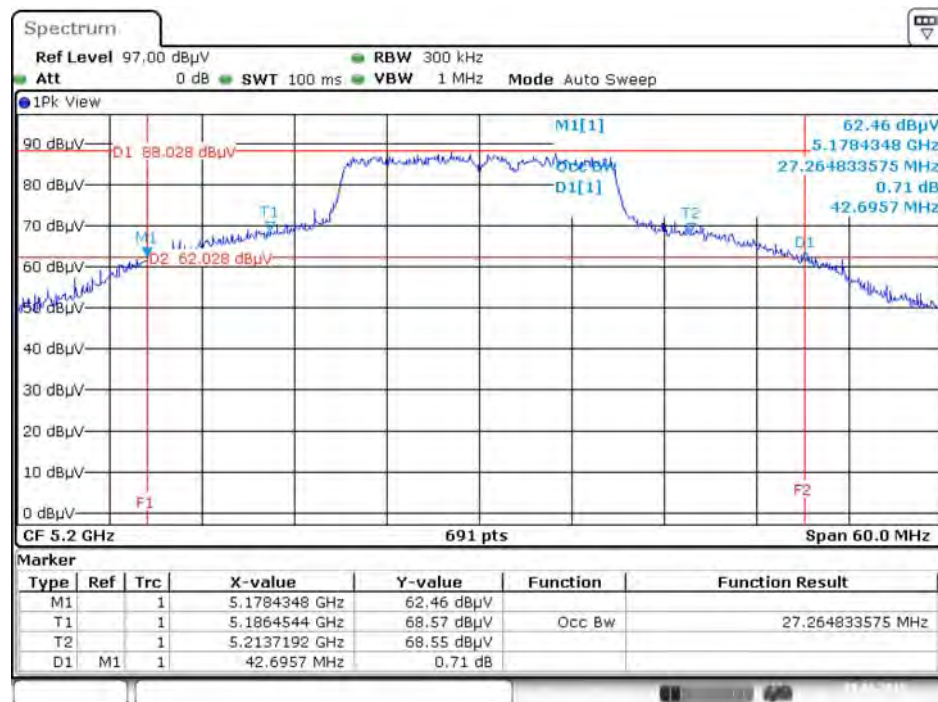


Date: 29.JAN.2015 00:42:44

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 /
Antenna 3 + Antenna 4 + Antenna 5 / 5240 MHz

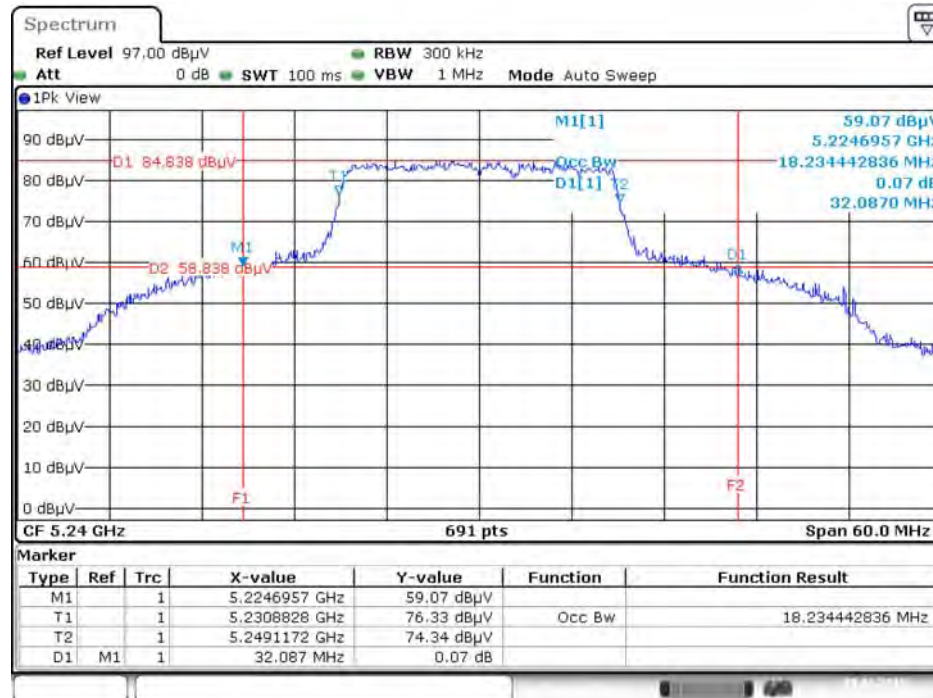


Date: 29. JAN. 2015 00:43:22

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 /
Antenna 3 + Antenna 4 + Antenna 5 / 5190 MHz

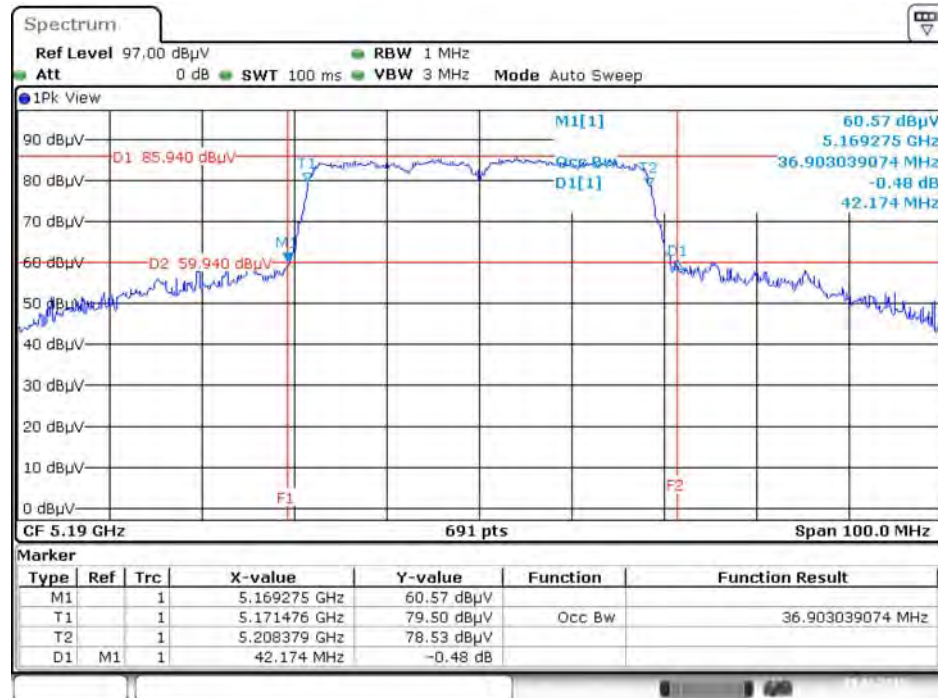


Date: 29.JAN.2015 00:40:09

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 /
Antenna 3 + Antenna 4 + Antenna 5 / 5230 MHz

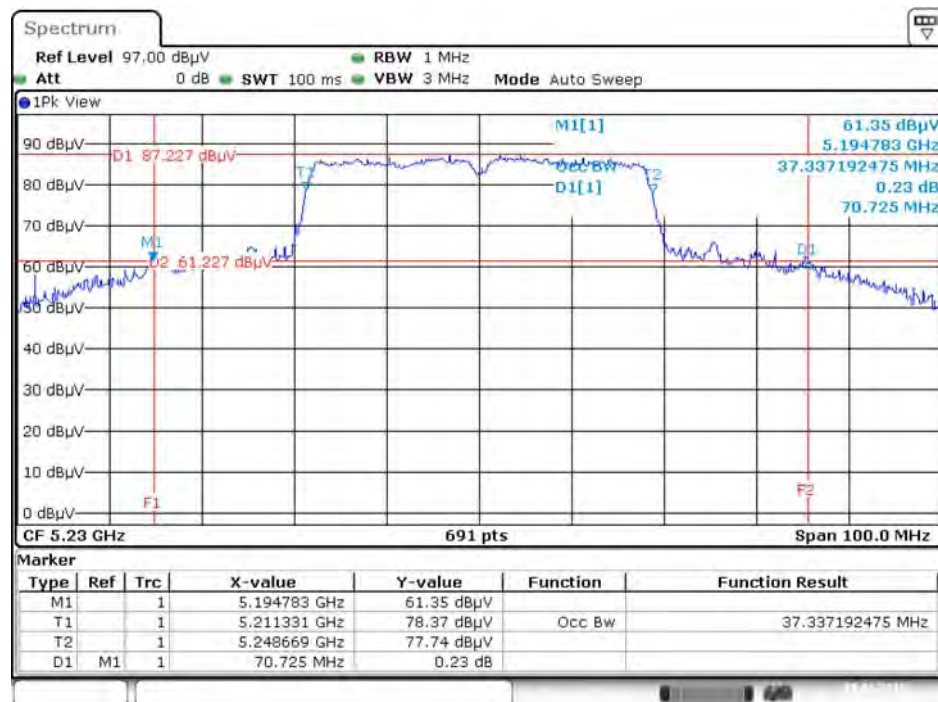

Date: 29.JAN.2015 00:39:29

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 /
Antenna 3 + Antenna 4 + Antenna 5 / 5210 MHz

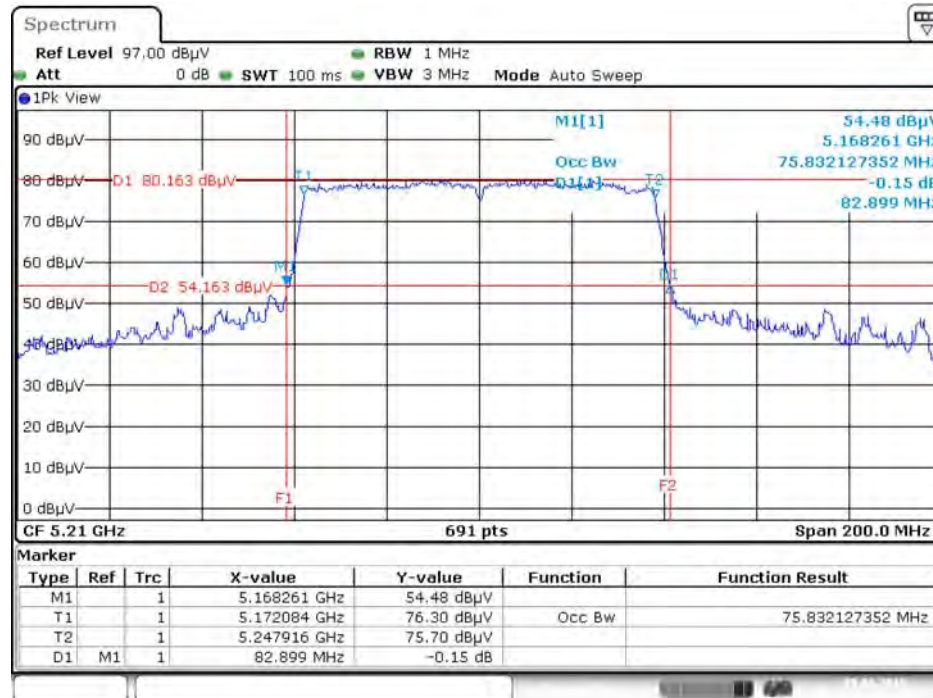

Date: 29.JAN.2015 00:41:11

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

Frequency Band		Limit
5.15~5.25 GHz		
Operating Mode		
<input type="checkbox"/>	Outdoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
<input checked="" type="checkbox"/>	Indoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
<input type="checkbox"/>	Fixed point-to-point access points	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
<input type="checkbox"/>	Mobile and portable client devices	The maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout



4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	26°C	Humidity	63%
Test Engineer	Nick Peng, Kenneth Huang	Test Date	Jan. 28, 2015

For Non-Beamforming Mode / Antenna 3

Mode	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
		Total		
802.11a	5180 MHz	21.14	30.00	Complies
	5200 MHz	21.28	30.00	Complies
	5240 MHz	18.81	30.00	Complies

For Beamforming Mode

Mode	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Antenna 3	Antenna 4	Antenna 5	Total		
802.11ac MCS0/Nss1 VHT20	5180 MHz	18.29	18.98	19.16	23.60	30.00	Complies
	5200 MHz	20.51	21.95	20.88	25.93	30.00	Complies
	5240 MHz	18.41	19.11	19.18	23.68	30.00	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	16.24	16.51	16.61	21.23	30.00	Complies
	5230 MHz	17.97	18.27	18.33	22.96	30.00	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	14.18	14.42	14.55	19.16	30.00	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 4.77 \text{dBi}$, < 6dBi, so the limit doesn't reduce.

4.4. Power Spectral Density Measurement

4.4.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Band		Limit
5.15~5.25 GHz		
Operating Mode		
<input type="checkbox"/>	Outdoor access point	17 dBm/MHz
<input checked="" type="checkbox"/>	Indoor access point	17 dBm/MHz
<input type="checkbox"/>	Fixed point-to-point access points	17 dBm/MHz
<input type="checkbox"/>	Mobile and portable client devices	11 dBm/MHz

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

4.4.4. Test Setup Layout

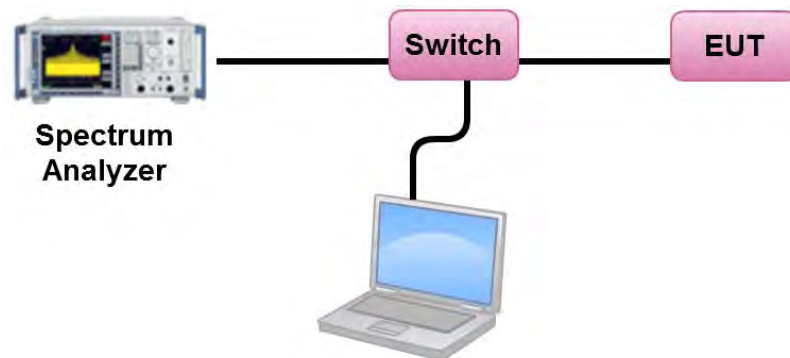

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	26°C	Humidity	63%
Test Engineer	Nick Peng, Kenneth Huang		

For Non-Beamforming Mode / Antenna 3

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5180 MHz	8.44	17.00	Complies
	5200 MHz	8.46	17.00	Complies
	5240 MHz	6.68	17.00	Complies

For Beamforming Mode


Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11ac MCS0/Nss1 VHT20	5180 MHz	10.72	17.00	Complies
	5200 MHz	12.98	17.00	Complies
	5240 MHz	10.75	17.00	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	5.27	17.00	Complies
	5230 MHz	7.02	17.00	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	0.53	17.00	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 4.77\text{dBi}$, <6dBi, so the limit doesn't reduce.


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


Power Density Plot on Configuration IEEE 802.11a / Antenna 3 + Antenna 4 + Antenna 5 / 5200 MHz

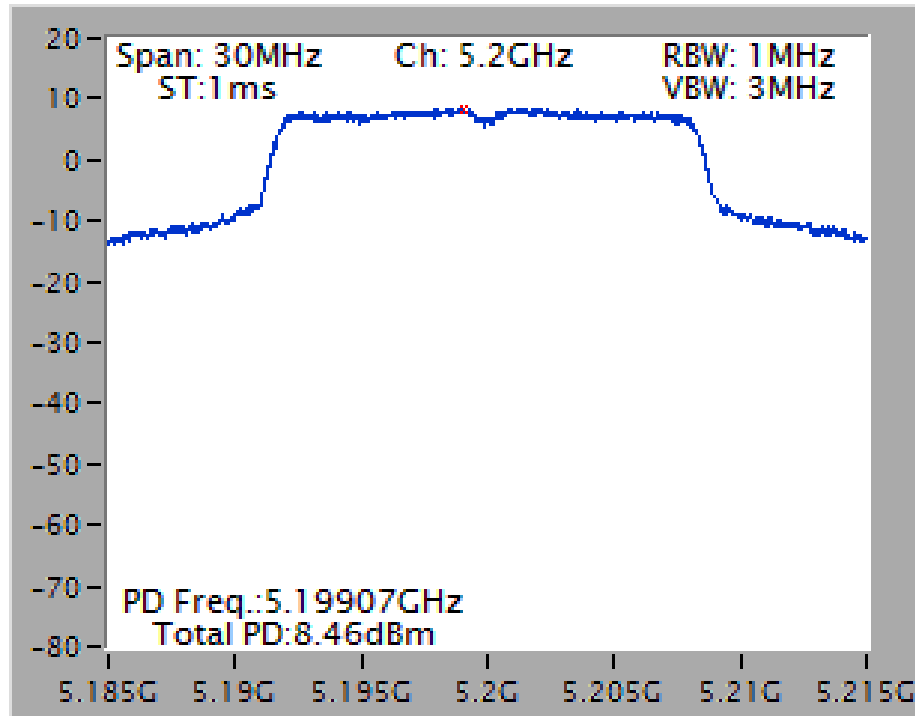


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Antenna 3 + Antenna 4 + Antenna 5 / 5200 MHz

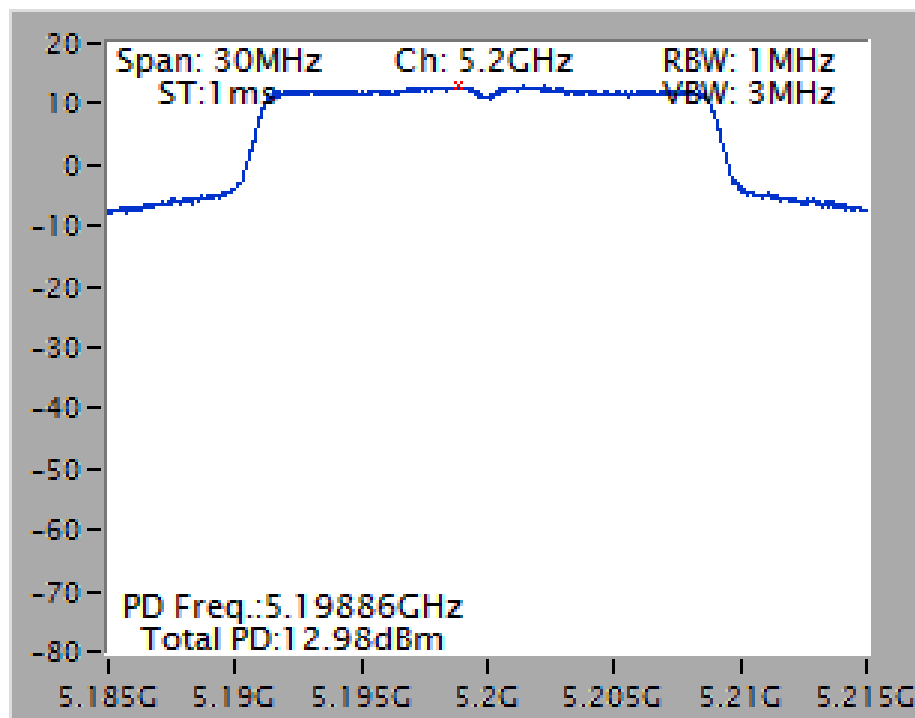

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Antenna 3 + Antenna 4 +
Antenna 5 / 5230 MHz

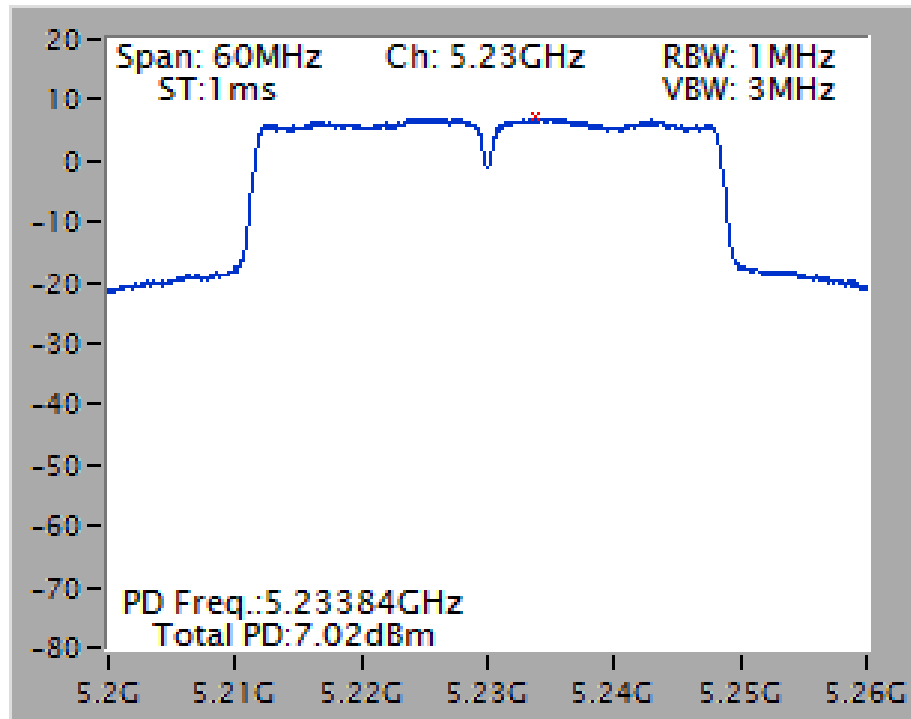

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Antenna 3 + Antenna 4 +
Antenna 5 / 5210 MHz

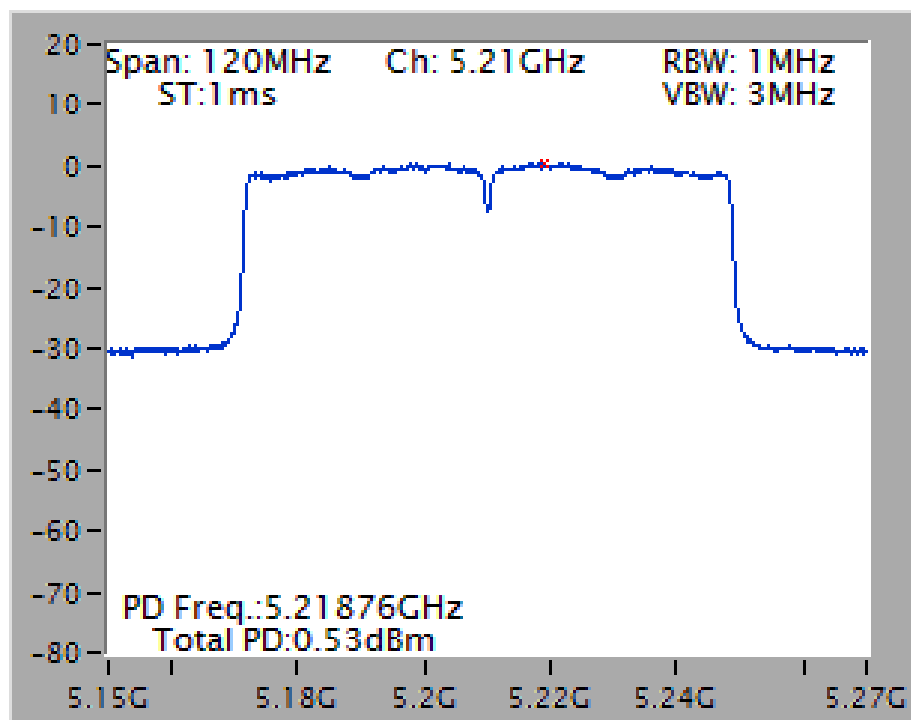

4.5. Radiated Emissions Measurement

4.5.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

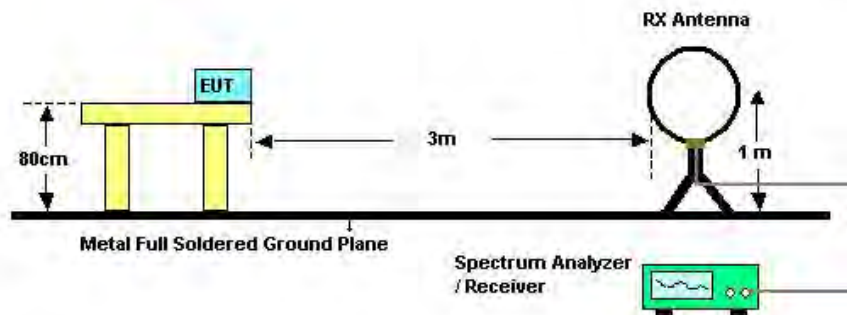

For Radiated Emissions: 30MHz~1GHz

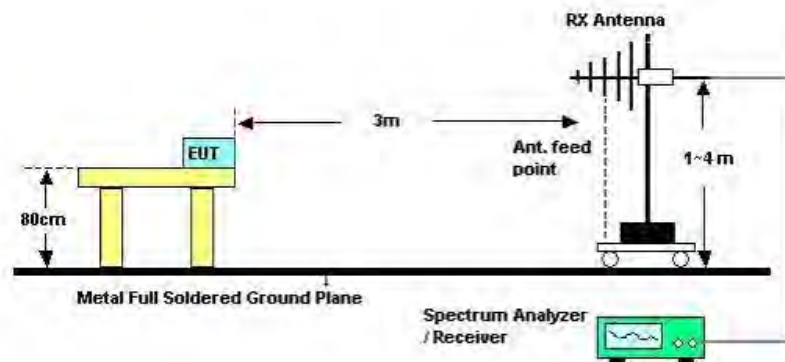

For Radiated Emissions: Above 1GHz

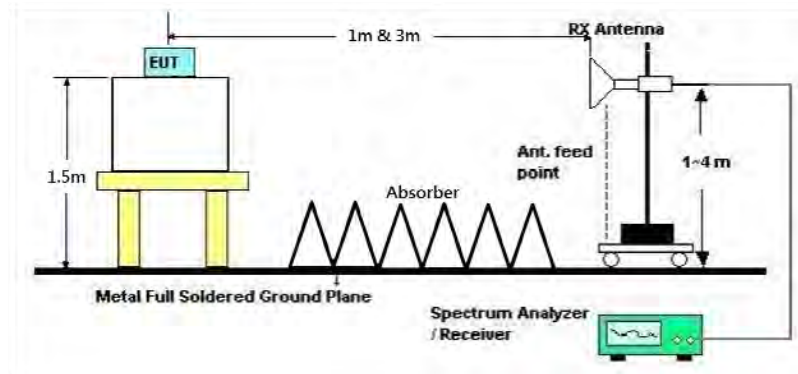

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	26°C	Humidity	63%
Test Engineer	Lucas Huang / Andy Tsai	Configurations	Normal Link / Mode 2
Test Date	Dec. 27, 2014		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	26°C	Humidity	63%
Test Engineer	Lucas Huang / Andy Tsai	Configurations	Normal Link / Mode 2

Horizontal

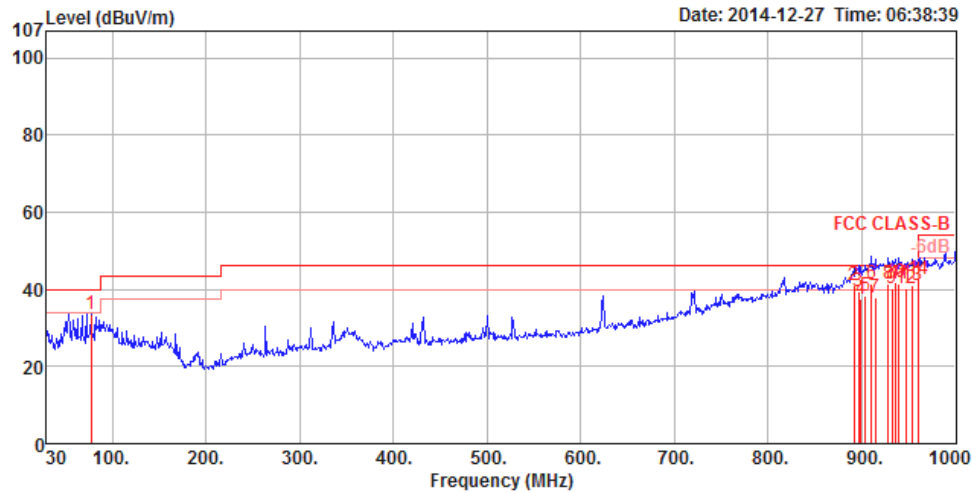

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	77.53	33.61	40.00	-6.39	57.92	0.64	32.36	7.41	HORIZONTAL	238	200	Peak
2	891.36	41.26	46.00	-4.74	49.49	2.15	31.90	21.52	HORIZONTAL	299	125	Peak
3	896.21	39.41	46.00	-6.59	47.53	2.16	31.84	21.56	HORIZONTAL	126	100	QP
4	899.12	37.64	46.00	-8.36	45.68	2.17	31.80	21.59	HORIZONTAL	121	100	QP
5	903.97	38.13	46.00	-7.87	46.05	2.17	31.71	21.62	HORIZONTAL	121	100	QP
6	910.76	41.32	46.00	-4.68	49.02	2.21	31.58	21.67	HORIZONTAL	271	125	QP
7	914.64	37.86	46.00	-8.14	45.47	2.21	31.51	21.69	HORIZONTAL	277	125	QP
8	928.22	41.62	46.00	-4.38	48.98	2.28	31.41	21.77	HORIZONTAL	282	125	QP
9	932.10	40.39	46.00	-5.61	47.74	2.28	31.42	21.79	HORIZONTAL	277	125	QP
10	935.98	41.70	46.00	-4.30	48.99	2.31	31.42	21.82	HORIZONTAL	282	125	QP
11	939.86	41.31	46.00	-4.69	48.58	2.31	31.42	21.84	HORIZONTAL	282	125	QP
12	946.65	40.19	46.00	-5.81	47.32	2.35	31.36	21.88	HORIZONTAL	279	100	QP
13	954.41	40.93	46.00	-5.07	47.91	2.38	31.29	21.93	HORIZONTAL	282	125	QP
14	960.23	42.57	54.00	-11.43	49.45	2.40	31.24	21.96	HORIZONTAL	104	100	QP

Vertical

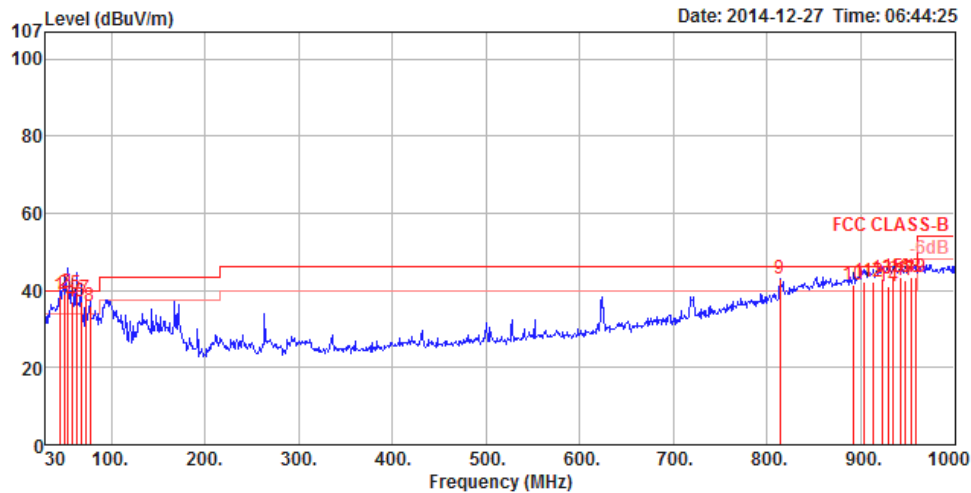

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	44.55	38.77	40.00	-1.23	59.52	0.48	32.43	11.20	VERTICAL	264	100	QP
2	49.40	39.24	40.00	-0.76	61.89	0.50	32.52	9.37	VERTICAL	191	100	QP
3	53.28	39.59	40.00	-0.41	63.24	0.52	32.51	8.34	VERTICAL	360	100	QP
4	58.13	37.14	40.00	-2.86	61.85	0.55	32.50	7.24	VERTICAL	1	150	QP
5	62.98	39.19	40.00	-0.81	64.33	0.57	32.51	6.80	VERTICAL	37	100	QP
6	67.83	37.21	40.00	-2.79	62.33	0.60	32.52	6.80	VERTICAL	360	200	QP
7	72.68	37.89	40.00	-2.11	62.69	0.62	32.44	7.02	VERTICAL	280	100	QP
8	77.53	36.08	40.00	-3.92	60.42	0.64	32.36	7.38	VERTICAL	26	100	QP
9	813.76	42.98	46.00	-3.02	52.45	2.05	32.26	20.74	VERTICAL	198	150	Peak
10	892.33	41.60	46.00	-4.40	49.82	2.15	31.89	21.52	VERTICAL	76	150	QP
11	903.00	42.23	46.00	-3.77	50.17	2.17	31.73	21.62	VERTICAL	356	150	QP
12	913.67	42.36	46.00	-3.64	50.00	2.21	31.53	21.68	VERTICAL	76	150	QP
13	922.40	43.16	46.00	-2.84	50.57	2.26	31.41	21.74	VERTICAL	37	150	QP
14	930.16	41.21	46.00	-4.79	48.57	2.28	31.42	21.78	VERTICAL	87	150	QP
15	935.01	43.37	46.00	-2.63	50.67	2.31	31.42	21.81	VERTICAL	82	150	QP
16	942.77	43.46	46.00	-2.54	50.66	2.33	31.39	21.86	VERTICAL	222	125	QP
17	947.62	42.77	46.00	-3.23	49.88	2.35	31.35	21.89	VERTICAL	71	125	QP
18	953.44	43.45	46.00	-2.55	50.45	2.38	31.30	21.92	VERTICAL	171	125	QP
19	958.29	43.25	46.00	-2.75	50.16	2.40	31.26	21.95	VERTICAL	76	125	QP

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~40GHz)

For Non-Beamforming Mode

Temperature	26°C	Humidity	63%
Test Engineer	Lucas Huang / Andy Tsai	Configurations	IEEE 802.11a CH 36 / Antenna 3
Test Date	Nov. 11, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15539.84	60.57	74.00	-13.43	44.26	12.58	38.45	34.72	0	184	Peak	HORIZONTAL
2	15549.28	47.27	54.00	-6.73	30.99	12.58	38.43	34.73	0	184	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15534.08	60.77	74.00	-13.23	44.46	12.58	38.45	34.72	0	206	Peak	VERTICAL
2	15547.72	47.40	54.00	-6.60	31.12	12.58	38.43	34.73	0	206	Average	VERTICAL

Temperature	26°C	Humidity	63%
Test Engineer	Lucas Huang / Andy Tsai	Configurations	IEEE 802.11a CH 40 / Antenna 3
Test Date	Nov. 11, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	15594.40	60.26	74.00	-13.74	44.05	12.58	38.38	34.75	73	102	Peak	HORIZONTAL
2	15602.28	46.89	54.00	-7.11	30.70	12.58	38.36	34.75	73	102	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	15599.96	45.97	54.00	-8.03	29.78	12.58	38.36	34.75	210	204	Average	VERTICAL
2	15604.40	60.54	74.00	-13.46	44.35	12.58	38.36	34.75	210	204	Peak	VERTICAL

Temperature	26°C	Humidity	63%
Test Engineer	Lucas Huang / Andy Tsai	Configurations	IEEE 802.11a CH 48 / Antenna 3
Test Date	Nov. 11, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	15710.28	46.79	54.00	-7.21	30.80	12.57	38.21	34.79	301	101	Average	HORIZONTAL
2	15713.96	59.80	74.00	-14.20	43.84	12.57	38.19	34.80	301	101	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	15719.50	59.96	74.00	-14.04	44.00	12.57	38.19	34.80	23	207	Peak	VERTICAL
2	15720.40	45.89	54.00	-8.11	29.93	12.57	38.19	34.80	23	207	Average	VERTICAL

For Beamforming Mode

Temperature	26°C	Humidity	63%
Test Engineer	Lucas Huang / Andy Tsai	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Antenna 3 + Antenna 4 + Antenna 5
Test Date	Oct. 22, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm	
1	15538.38	55.78	74.00	-18.22	39.92	12.58	38.45	35.17	21	171 Peak	HORIZONTAL
2	15547.29	43.10	54.00	-10.90	27.26	12.58	38.43	35.17	21	171 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm	
1	15533.08	57.87	74.00	-16.13	42.01	12.58	38.45	35.17	271	167 Peak	VERTICAL
2	15539.59	44.85	54.00	-9.15	28.99	12.58	38.45	35.17	271	167 Average	VERTICAL

Temperature	26°C	Humidity	63%
Test Engineer	Lucas Huang / Andy Tsai	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Antenna 3 + Antenna 4 + Antenna 5
Test Date	Nov. 12, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15605.44	47.93	54.00	-6.07	31.74	12.58	38.36	34.75	191	100	Average	HORIZONTAL
2	15607.32	60.68	74.00	-13.32	44.49	12.58	38.36	34.75	191	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15607.96	48.31	54.00	-5.69	32.12	12.58	38.36	34.75	271	100	Average	VERTICAL
2	15609.00	61.89	74.00	-12.11	45.70	12.58	38.36	34.75	271	100	Peak	VERTICAL

Temperature	26°C	Humidity	63%
Test Engineer	Lucas Huang / Andy Tsai	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Antenna 3 + Antenna 4 + Antenna 5
Test Date	Nov. 12, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15710.24	59.53	74.00	-14.47	43.54	12.57	38.21	34.79	315	101	Peak	HORIZONTAL
2	15710.68	47.24	54.00	-6.76	31.25	12.57	38.21	34.79	315	101	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15712.04	46.46	54.00	-7.54	30.47	12.57	38.21	34.79	254	101	Average	VERTICAL
2	15714.32	60.41	74.00	-13.59	44.45	12.57	38.19	34.80	254	101	Peak	VERTICAL

Temperature	26°C	Humidity	63%
Test Engineer	Lucas Huang / Andy Tsai	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Antenna 3 + Antenna 4 + Antenna 5
Test Date	Oct. 22, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15552.20	55.46	74.00	-18.54	39.62	12.58	38.43	35.17	270	157 Peak	HORIZONTAL
2	15566.96	42.01	54.00	-11.99	26.20	12.58	38.40	35.17	270	157 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15568.26	42.93	54.00	-11.07	27.12	12.58	38.40	35.17	85	195 Average	VERTICAL
2	15616.02	56.04	74.00	-17.96	40.32	12.58	38.33	35.19	85	195 Peak	VERTICAL

Temperature	26°C	Humidity	63%
Test Engineer	Lucas Huang / Andy Tsai	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Antenna 3 + Antenna 4 + Antenna 5
Test Date	Nov. 13, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	15678.32	47.68	54.00	-6.32	31.62	12.58	38.26	34.78	253	100	Average	HORIZONTAL
2	15692.72	59.75	74.00	-14.25	43.73	12.58	38.23	34.79	253	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	15670.88	47.51	54.00	-6.49	31.45	12.58	38.26	34.78	130	101	Average	VERTICAL
2	15694.40	59.65	74.00	-14.35	43.63	12.58	38.23	34.79	130	101	Peak	VERTICAL

Temperature	26°C	Humidity	63%
Test Engineer	Lucas Huang / Andy Tsai	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Antenna 3 + Antenna 4 + Antenna 5
Test Date	Oct. 22, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15625.80	56.45	74.00	-17.55	40.73	12.58	38.33	35.19	85	99	Peak	HORIZONTAL
2	15629.88	43.06	54.00	-10.94	27.36	12.58	38.31	35.19	85	99	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15635.27	43.12	54.00	-10.88	27.42	12.58	38.31	35.19	234	147	Average	VERTICAL
2	15639.58	56.10	74.00	-17.90	40.40	12.58	38.31	35.19	234	147	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

4.6.3. Test Procedures

- The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

For Non-Beamforming Mode

Temperature	26°C	Humidity	63%
Test Engineer	Lucas Huang / Andy Tsai	Configurations	IEEE 802.11a CH 36, 40, 48 / Antenna 3
Test Date	Nov. 11, 2014		

Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			
						dB	dB/m	dB	deg	cm	
1	5150.00	52.30	54.00	-1.70	45.56	6.21	34.11	33.58	181	212 Average	VERTICAL
2	5150.00	67.22	74.00	-6.78	60.48	6.21	34.11	33.58	181	212 Peak	VERTICAL
3	5181.00	99.12			92.29	6.24	34.16	33.57	181	212 Average	VERTICAL
4	5181.00	109.84			103.01	6.24	34.16	33.57	181	212 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			
						dB	dB/m	dB	deg	cm	
1	5112.00	60.81	74.00	-13.19	54.21	6.14	34.06	33.60	186	229 Peak	VERTICAL
2	5118.00	48.86	54.00	-5.14	42.25	6.14	34.06	33.59	186	229 Average	VERTICAL
3	5198.00	110.44			103.55	6.27	34.18	33.56	186	229 Peak	VERTICAL
4	5201.00	99.59			92.70	6.27	34.18	33.56	186	229 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			
						dB	dB/m	dB	deg	cm	
1	5145.00	57.17	74.00	-16.83	50.43	6.21	34.11	33.58	186	229 Peak	VERTICAL
2	5150.00	43.80	54.00	-10.20	37.06	6.21	34.11	33.58	186	229 Average	VERTICAL
3	5238.00	112.12			105.14	6.30	34.23	33.55	186	229 Peak	VERTICAL
4	5239.00	102.06			95.08	6.30	34.23	33.55	186	229 Average	VERTICAL
5	5363.00	59.70	74.00	-14.30	52.32	6.47	34.41	33.50	186	229 Peak	VERTICAL
6	5366.00	47.08	54.00	-6.92	39.70	6.47	34.41	33.50	186	229 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

For Beamforming Mode

Temperature	26°C	Humidity	63%
Test Engineer	Lucas Huang / Andy Tsai	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Antenna 3 + Antenna 4 + Antenna 5
Test Date	Oct. 22, 2014		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5149.36	70.84	74.00	-3.16	65.43	6.21	34.11	34.91	177	232	Peak	VERTICAL
2	5150.00	53.86	54.00	-0.14	48.45	6.21	34.11	34.91	177	232	Average	VERTICAL
3	5186.09	110.77			105.28	6.24	34.16	34.91	177	232	Peak	VERTICAL
4	5187.37	101.55			96.06	6.24	34.16	34.91	177	232	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5128.00	50.42	54.00	-3.58	45.07	6.17	34.09	34.91	181	100	Average	VERTICAL
2	5150.00	65.65	74.00	-8.35	60.24	6.21	34.11	34.91	181	100	Peak	VERTICAL
3	5201.16	112.90			107.36	6.27	34.18	34.91	181	100	Peak	VERTICAL
4	5207.24	103.20			97.66	6.27	34.18	34.91	181	100	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5124.38	58.06	74.00	-15.94	52.71	6.17	34.09	34.91	260	197	Peak	HORIZONTAL
2	5126.99	45.62	54.00	-8.38	40.27	6.17	34.09	34.91	260	197	Average	HORIZONTAL
3	5237.40	115.03			109.41	6.30	34.23	34.91	260	197	Peak	HORIZONTAL
4	5248.25	105.06			99.38	6.34	34.25	34.91	260	197	Average	HORIZONTAL
5	5353.47	47.95	54.00	-6.05	42.00	6.47	34.39	34.91	260	197	Average	HORIZONTAL
6	5354.78	60.23	74.00	-13.77	54.28	6.47	34.39	34.91	260	197	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	26°C	Humidity	63%
Test Engineer	Lucas Huang / Andy Tsai	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Antenna 3 + Antenna 4 + Antenna 5
Test Date	Oct. 22, 2014, Nov. 12, 2014		

Channel 38

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5149.60	70.55	74.00	-3.45	65.14	6.21	34.11	34.91	174	215	Peak	VERTICAL
2	5150.00	53.93	54.00	-0.07	48.52	6.21	34.11	34.91	174	215	Average	VERTICAL
3	5192.80	94.35			88.84	6.24	34.18	34.91	174	215	Average	VERTICAL
4	5195.59	106.88			101.34	6.27	34.18	34.91	174	215	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5145.40	64.75	74.00	-9.25	58.01	6.21	34.11	33.58	193	189	Peak	VERTICAL
2	5147.20	52.74	54.00	-1.26	46.00	6.21	34.11	33.58	193	189	Average	VERTICAL
3	5227.00	103.80			96.82	6.30	34.23	33.55	193	189	Average	VERTICAL
4	5231.80	114.61			107.63	6.30	34.23	33.55	193	189	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	26°C	Humidity	63%
Test Engineer	Lucas Huang / Andy Tsai	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Antenna 3 + Antenna 4 + Antenna 5
Test Date	Oct. 22, 2014		

Channel 42

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5142.47	70.70	74.00	-3.30	65.33	6.17	34.11	34.91	214	200	Peak	HORIZONTAL
2	5149.42	53.96	54.00	-0.04	48.55	6.21	34.11	34.91	214	200	Average	HORIZONTAL
3	5203.63	93.92			88.38	6.27	34.18	34.91	214	200	Average	HORIZONTAL
4	5205.37	103.94			98.40	6.27	34.18	34.91	214	200	Peak	HORIZONTAL
5	5350.00	45.18	54.00	-8.82	39.23	6.47	34.39	34.91	214	200	Average	HORIZONTAL
6	5363.31	58.67	74.00	-15.33	52.70	6.47	34.41	34.91	214	200	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.7. Frequency Stability Measurement

4.7.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.7.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.7.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $0^\circ\text{C} \sim 40^\circ\text{C}$.

4.7.4. Test Setup Layout

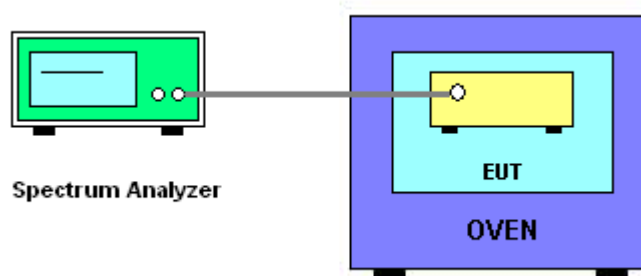

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.7.7. Test Result of Frequency Stability

Temperature	26°C	Humidity	63%
Test Engineer	Nick Peng, Kenneth Huang	Test Date	Jan. 28, 2015

Mode: 20 MHz

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200 MHz
126.50	5199.9958
110.00	5199.9962
93.50	5199.9964
Max. Deviation (MHz)	0.004200
Max. Deviation (ppm)	0.81

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200 MHz
0	5199.9952
10	5199.9956
20	5199.9958
30	5199.9958
40	5199.9960
Max. Deviation (MHz)	0.004800
Max. Deviation (ppm)	0.92

Mode: 40 MHz

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5190 MHz
126.50	5190.0002
110.00	5190.0003
93.50	5190.0004
Max. Deviation (MHz)	0.000358
Max. Deviation (ppm)	0.07

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5190 MHz
0	5190.0005
10	5190.0005
20	5190.0005
30	5190.0005
40	5190.0006
Max. Deviation (MHz)	0.000550
Max. Deviation (ppm)	0.11

Mode: 80 MHz

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5210 MHz
126.50	5210.0005
110.00	5210.0005
93.50	5210.0005
Max. Deviation (MHz)	0.000490
Max. Deviation (ppm)	0.09

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5210 MHz
0	5210.0002
10	5210.0003
20	5210.0003
30	5210.0003
40	5210.0003
Max. Deviation (MHz)	0.000340
Max. Deviation (ppm)	0.07

4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 23, 2014	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 23, 2013	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 17, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Nov. 23, 2013	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 17, 2014	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 04, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 04, 2014	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 26, 2014	Radiation (03CH01-CB)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jul. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Oct. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02009	1GHz ~ 26.5GHz	Dec. 17, 2014	Radiation (03CH01-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Apr. 22, 2014	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100080	9kHz ~ 40GHz	Dec. 30, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
MXE EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 30MHz	Jan. 22, 2014	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO 2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec.12, 2014	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 03, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	1126203	300MHz~40GHz	Oct. 06, 2014	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1210004	300MHz~40GHz	Oct. 06, 2014	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%