



Report No: FCC 1704045-01 File reference No: 2017-04-19

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Product: Tablet PC

Model No: M7057, 3GR, 3G-16, S813G, 3G-32, G10, Xtab 832

Trademark: N/A

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: April 19, 2017

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Date: 2017-04-19



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

Page 2 of 104

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

Page 3 of 104

Report No.: FCC1704045-01

Date: 2017-04-19



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample.	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	8
3.1	Summary of Test Results.	8
3.2	Test Standards.	8
4.0	EUT Modification.	8
5.0	Power Line Conducted Emission Test.	9
5.1	Schematics of the Test.	9
5.2	Test Method and Test Procedure.	9
5.3	Configuration of the EUT	9
5.4	EUT Operating Condition.	10
5.5	Conducted Emission Limit.	10
5.6	Test Result.	10
6.0	Radiated Emission test.	13
5.1	Test Method and Test Procedure.	13
6.2	Configuration of the EUT	13
6.3	EUT Operation Condition.	13
6.4	Radiated Emission Limit	14
7.0	6dB Bandwidth Measurement.	38
8.0	Maximum Output Power	58
9.0	Power Spectral Density Measurement.	61
10.0	Out of Band Measurement.	79
11.0	Antenna Requirement.	90
12.0	FCC ID Label.	91
13.0	Photo of Test Setup and EUT View.	92

Date: 2017-04-19



Page 4 of 104

1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Room 512-519,5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen,

Guangdong China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 4F, Bldg 4, Jinghua Square, No.1 Huafa North Road, Futian District, Shenzhen, China

Telephone: -Fax: -
1.3 Description of EUT

D 1 4

Product: Tablet PC

Manufacturer: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 4F, Bldg 4, Jinghua Square, No.1 Huafa North Road, Futian District,

Shenzhen, China

Brand Name: N/A Model Number: M7057

Additional Model Number: 3GR, 3G-16, S813G, 3G-32, G10, Xtab 832 Type of Modulation IEEE 802.11b: DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20/HT40): OFDM(64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20) : 2412-2462MHz; IEEE 802.11n (HT40) : 2422-2452MHz;

Channel Spacing 5MHz for IEEE 802.11b/g/n(HT20/HT40)

Air Data Rate IEEE 802.11b : 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps IEEE 802.11n HT20/HT40: mcs0-mcs9, mcs32

Frequency Selection By software

Channel Number IEEE 802.11b/g/n (HT20): 11 Channels; IEEE 802.11n (HT40): 7 Channels;

Antenna: Integral Antenna and the maximum Gain of this antenna is 1.4dBi;

Power Adapter Model No.: K-T5A

Input: 100-240V, 50/60Hz, 0.2A Max; Output: 5V, 1.5A

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1704045-01 Page 5 of 104

Date: 2017-04-19



Submitted Sample: 2 Samples

Test Duration 1.5 2017-04-10 to 2017-04-19

1.6 Test Uncertainty Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

Page 6 of 104

Report No.: FCC1704045-01

Date: 2017-04-19



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2016-08-22	2017-08-21
TWO	R&S	EZH3-Z5	100294	2016-08-22	2017-08-21
Line-V-NETW TWO Line-V-NETW	R&S	EZH3-Z5	100253	2016-08-22	2017-08-21
Ultra Broadband ANT	R&S	HL562	100157	2016-08-23	2017-08-22
ESDV Test Receiver	R&S	ESDV	100008	2016-08-22	2017-08-21
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2016-08-22	2017-08-21
System Controller	CT	SC100	-		
Printer	EPSON	РНОТО ЕХЗ	CFNH234850		
Computer	IBM	8434	1S8434KCE99BLXLO*	-	-
Loop Antenna	EMCO	6502	00042960	2016-08-23	2017-08-22
ESPI Test Receiver	R&S	ESI26	838786/013	2016-08-22	2017-08-21
3m OATS		1	N/A	2016-08-24	2017-08-23
Horn Antenna	R&S	BBHA 9170	BBHA9170265	2016-08-24	2017-08-23
Horn Antenna	R&S	BBHA 9120D	9120D-631	2016-08-24	2017-08-23
Power meter	Anritsu	ML2487A	6K00003613	2016-08-22	2017-08-21
Power sensor	Anritsu	MA2491A	32263	2016-08-22	2017-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2016-08-23	2017-08-21
LISN	AFJ	LS16C	10010947251	2016-08-22	2017-08-21
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2016-08-23	2017-08-22
9*6*6 Anechoic		1	N/A	2016-08-24	2017-08-23
EMI Test Receiver	RS	ESCS30	100139	2016-08-22	2017-08-21
RF Cable	SCHWARZBEC K			2016-08-23	2017-08-22
Pre-Amplifier	НР	8447D	2727A05017	2016-08-05	2017-08-04
Pre-Amplifier	EM	EM30265		2016-08-05	2017-08-04

Date: 2017-04-19



Page 7 of 104

3. DESCRIPTION OF TEST MODES

IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 1Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 6Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: mcs0 (worst case) were chosen for full testing

IEEE 802.11n (HT40) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n (HT40) mode: mcs0 (worst case) were chosen for full testing

Page 8 of 104

Report No.: FCC1704045-01

Date: 2017-04-19



3.0 **Technical Details**

3.1 **Summary of test results**

Standard	Test Type	Result	Notes
CC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	bandwidth>500kHz Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit:	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

EUT Modification 4.0


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Date: 2017-04-19



5.0 Power Line Conducted Emission Test

5.1 Schematics of the test

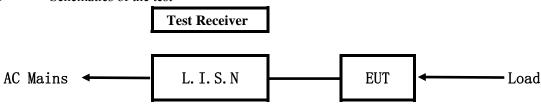


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

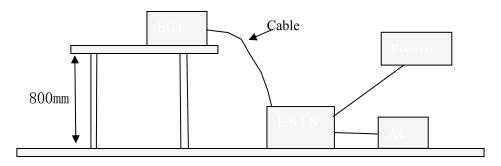

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
Tablet PC	Shenzhen Jingwah Information	M7057, 3GR, 3G-16, S813G,	RBD-M7057
1401011	Technology Co., Ltd.	3G-32, G10, Xtab 832	1000 1117 037

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1704045-01 Page 10 of 104

Date: 2017-04-19



5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207 and 15.107

Frequency	Class A Lim	its (dB µ V)	Class B Lim	nits (dB µ V)
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Page 11 of 104

Report No.: FCC1704045-01

Date: 2017-04-19



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep WIFI Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

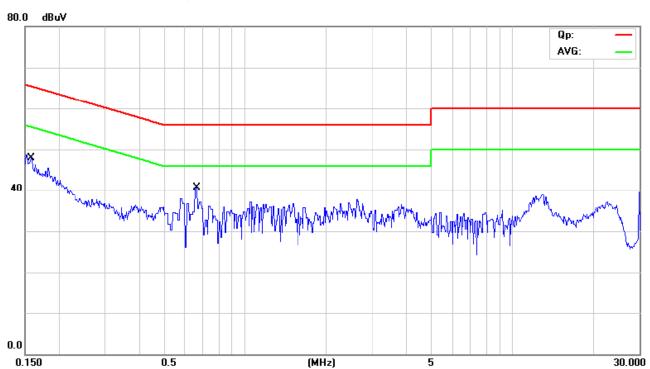

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1587	31.10	9.85	40.95	65.53	-24.58	QP	
2	0.1587	0.70	9.85	10.55	55.53	-44.98	AVG	
3 *	0.6602	27.20	10.48	37.68	56.00	-18.32	QP	
4	0.6602	3.00	10.48	13.48	46.00	-32.52	AVG	

Page 12 of 104

Report No.: FCC1704045-01

Date: 2017-04-19



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep WIFI Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

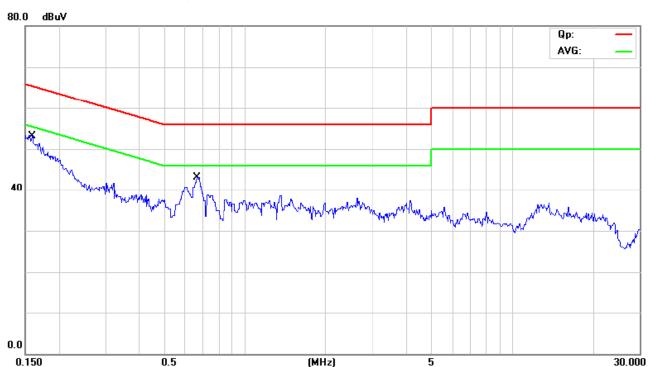

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBu∀	dB	Detector	Comment
1	0.1595	30.80	9.85	40.65	65.49	-24.84	QP	
2	0.1595	15.20	9.85	25.05	55.49	-30.44	AVG	
3 *	0.6642	31.00	10.48	41.48	56.00	-14.52	QP	
4	0.6642	20.70	10.48	31.18	46.00	-14.82	AVG	

Report No.: FCC1704045-01 Page 13 of 104

Date: 2017-04-19



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 8999988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. F For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup Distance = 3m Computer Pre -Amplifier EUT Turn-table Receiver

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC1704045-01 Page 14 of 104

Date: 2017-04-19



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109 and RSS-210

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Report No.: FCC1704045-01 Page 15 of 104

Date: 2017-04-19



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/Vertical (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
30.720	30.73	Н	40.00
991.320	39.68	Н	54.00
157.240	28.86	V	43.50
995.760	39.45	V	54.00
30.320	32.99	V	40.00


Page 16 of 104

Report No.: FCC1704045-01

Date: 2017-04-19



Test Figure:

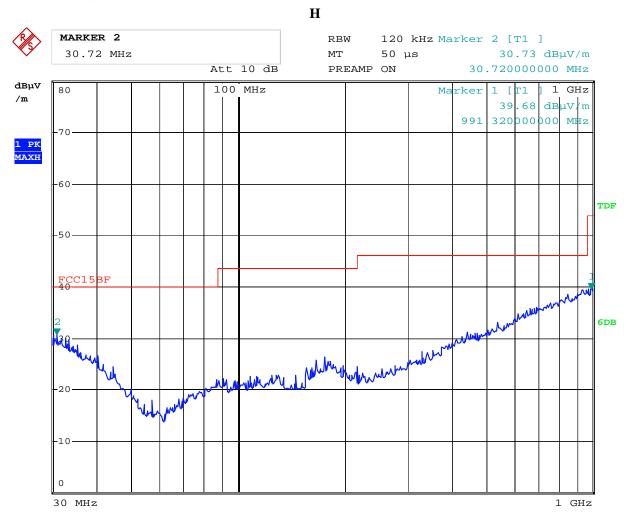

Date: 11.APR.2017 10:04:46


Page 17 of 104

Report No.: FCC1704045-01

Date: 2017-04-19



Test Figure:

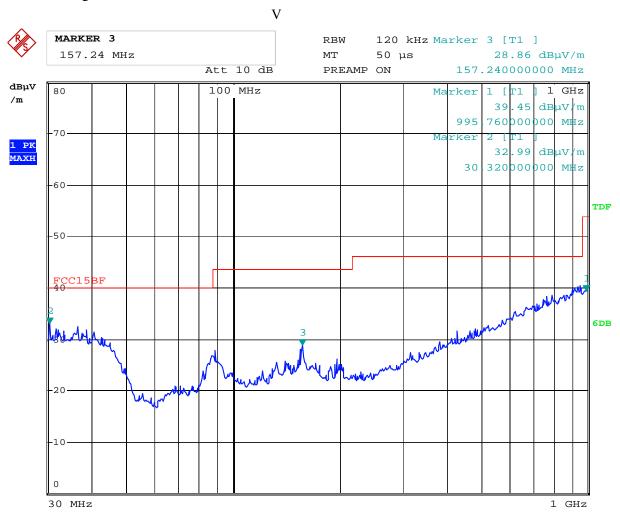

Date: 11.APR.2017 10:09:43 Report No.: FCC1704045-01 Page 18 of 104

Date: 2017-04-19



Operation Mode: Transmitting under CH01 for 11g at 6Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
4824.00	50.78 (PK)	Н	74(Peak)/ 54(AV)
4824.00	52.32 (PK)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16884		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode 6Mbps

Report No.: FCC1704045-01 Page 19 of 104

Date: 2017-04-19



Operation Mode: Transmitting under CH06 for 11g at 6Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
4874.00	52.32 (PK)	V	74(Peak)/ 54(AV)
4874.00	52.47 (PK)	Н	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622		H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

3. For 802.11g mode 6Mbps

Operation Mode: Transmitting under CH11 for 11g at 6Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
4924	50.08 (PK)	Н	74(Peak)/ 54(AV)
4924	51.64 (PK)	V	74(Peak)/ 54(AV)
7368	1	H/V	74(Peak)/ 54(AV)
9848	-	H/V	74(Peak)/ 54(AV)
12310	1	H/V	74(Peak)/ 54(AV)
14772	•	H/V	74(Peak)/ 54(AV)
17234	-	H/V	74(Peak)/ 54(AV)
19696	-	H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24620		H/V	74(Peak)/ 54(AV)

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode at 6Mbps


Date: 2017-04-19



Please refer to the following test plots for details:

CH01 for 11g at 6Mbps: Horizontal

Choi for hig at ombps. He

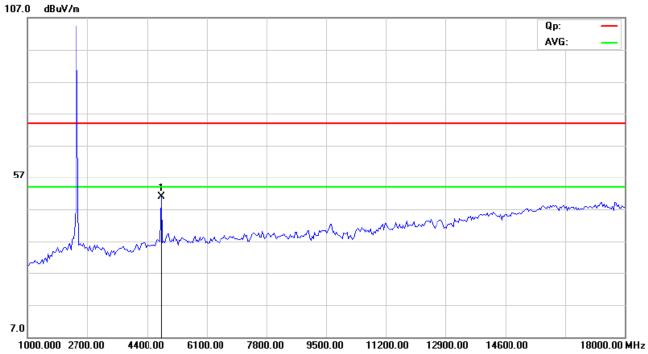

CH01 for 11g at 6Mbps: Vertical

107.0 d8uV/m Qp: AVG: — 57 7.0 1000.000 2700.00 4400.00 6100.00 7800.00 9500.00 1200.00 12900.00 14600.00 18000.00 MHz

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 21 of 104

Report No.: FCC1704045-01

Date: 2017-04-19



CH06 for 11g at 6Mbps: Vertical

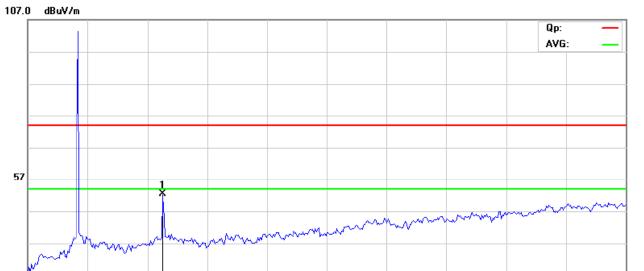

CH06 for 11g at 6Mbps: Horizontal


4400.00

6100.00

7800.00

7.0

1000.000 2700.00

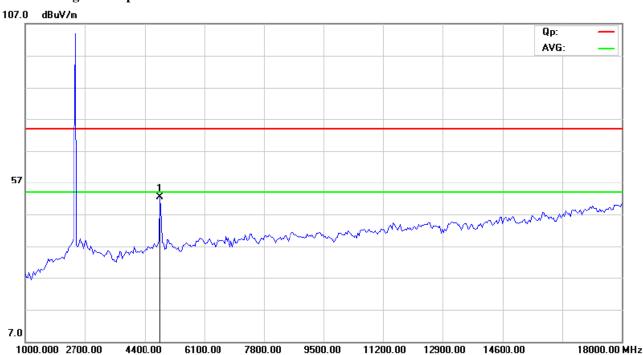

9500.00

11200.00

12900.00

14600.00

18000.00 MHz

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


Page 22 of 104

Report No.: FCC1704045-01


Date: 2017-04-19



CH11 for 11g at 6Mbps: Vertical

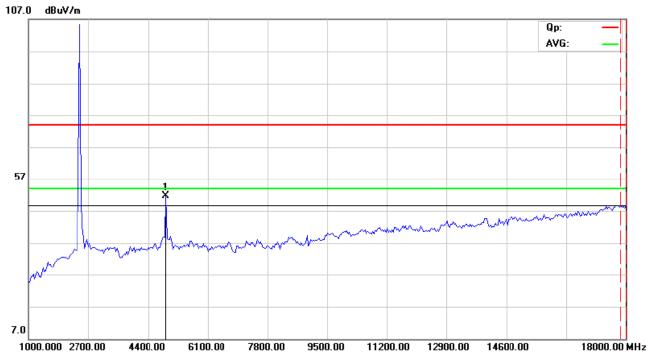

CH11 for 11g at 6Mbps: Horizontal

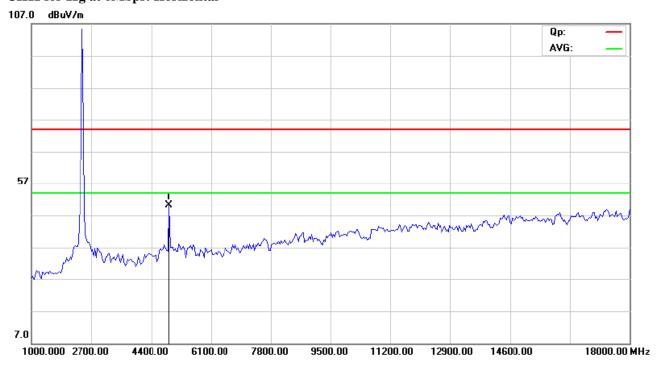

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: FCC1704045-01 Page 23 of 104

Date: 2017-04-19



Operation Mode: Transmitting under CH01 for 11b at 1Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
4824.00	50.82 (PK)	Н	74(Peak)/ 54(AV)
4824.00	50.59 (PK)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16684		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 1Mbps

Operation Mode: Transmitting under CH06 for 11b at 1Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
4874.00	51.12 (PK)	Н	74(Peak)/ 54(AV)
4874.00	51.81 (PK)	V	74(Peak)/ 54(AV)
7311.00	1	H/V	74(Peak)/ 54(AV)
9748.00	-	H/V	74(Peak)/ 54(AV)
12185	1	H/V	74(Peak)/ 54(AV)
14622	•	H/V	74(Peak)/ 54(AV)
17059	-	H/V	74(Peak)/ 54(AV)
19496	-	H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 1Mbps

Report No.: FCC1704045-01 Page 24 of 104

Date: 2017-04-19



Operation Mode: Transmitting under CH11 for 11b at 1Mbps

	8		
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
4924	52.29 (PK)	Н	74(Peak)/ 54(AV)
4924	52.13 (PK)	V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24620		H/V	74(Peak)/ 54(AV)

^{2.} Remark "---" means that the emissions level is too low to be measured


^{3.} For 802.11b mode at 1Mbps


Date: 2017-04-19




Please refer to the following test plots for details:

CH01 for 11b at 1Mbps: Horizontal



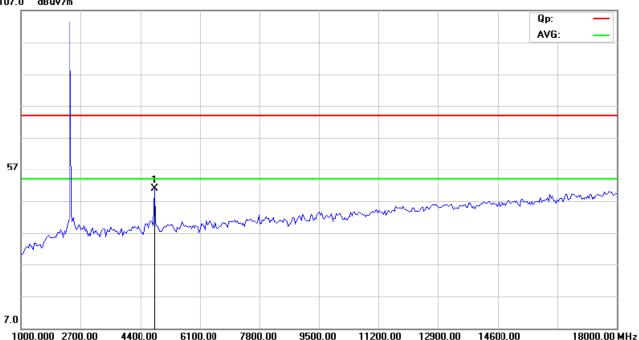

CH01 for 11b at 1Mbps: Vertical

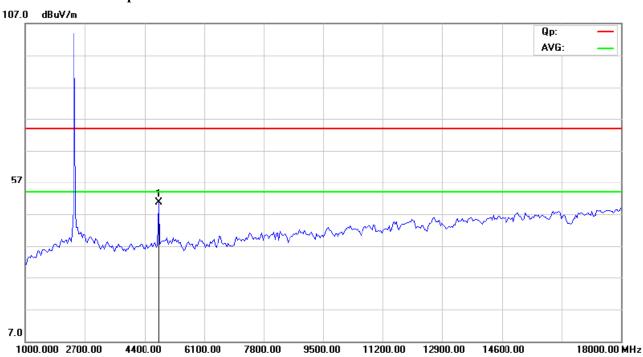

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


Page 26 of 104

Report No.: FCC1704045-01


Date: 2017-04-19



CH06 for 11b at 1Mbps: Vertical

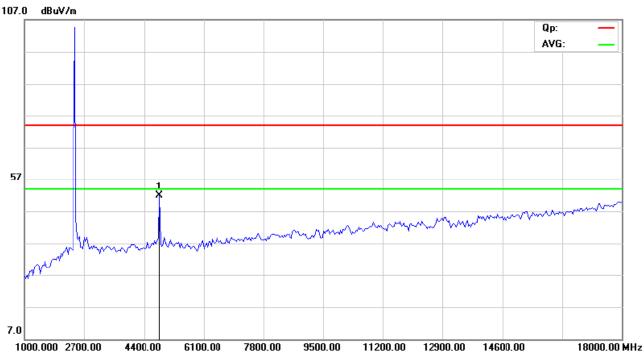

CH06 for 11b at 1Mbps: Horizontal

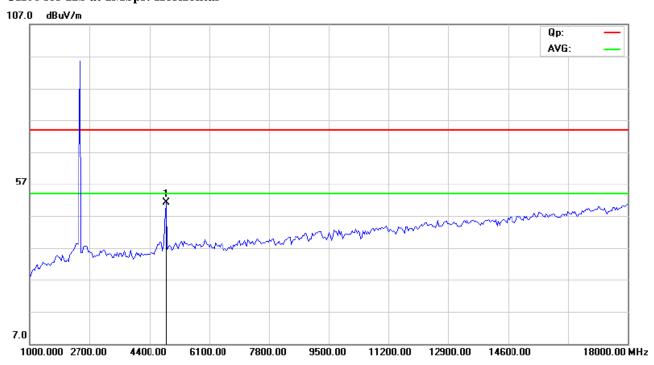

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


Page 27 of 104

Report No.: FCC1704045-01


Date: 2017-04-19



CH11 for 11b at 1Mbps: Vertical

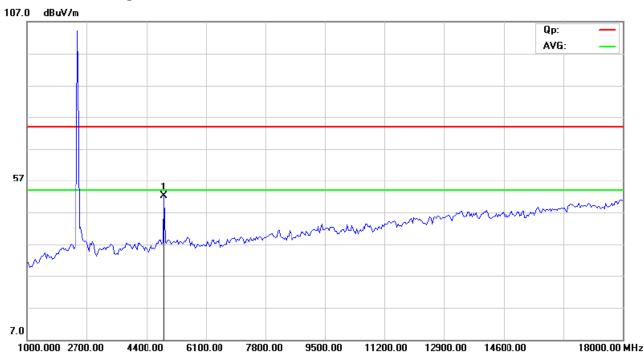

CH11 for 11b at 1Mbps: Horizontal

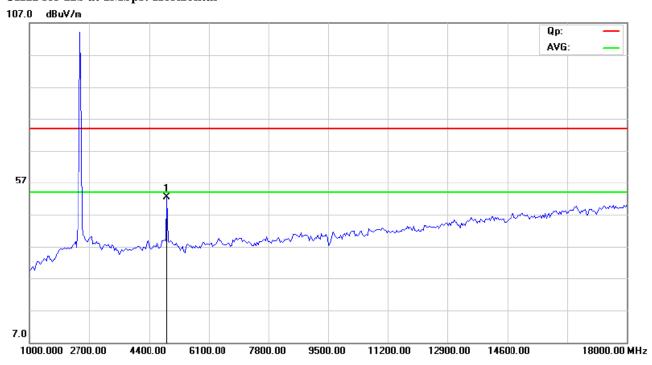

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: FCC1704045-01 Page 28 of 104

Date: 2017-04-19



Operation Mode: Transmitting under CH01 for 11n HT20 at mcs0

		1	T
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
4824.00	51.85 (PK)	Н	74(Peak)/ 54(AV)
4824.00	51.09 (PK)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16684		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode mcs0

Operation Mode: Transmitting under CH06 for 11n HT20 at mcs0

Frequency (MHz)	Level@3m (dB \u03bc V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
4874.00	52.54 (PK)	Н	74(Peak)/ 54(AV)
4874.00	51.19 (PK)	V	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622		H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode mcs0

Report No.: FCC1704045-01 Page 29 of 104

Date: 2017-04-19



Operation Mode: Transmitting under CH11 for 11n HT20 at mcs0

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
4924	50.19 (PK)	Н	74(Peak)/ 54(AV)
4924	50.64 (PK)	V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24620		H/V	74(Peak)/ 54(AV)

^{2.} Remark "---" means that the emissions level is too low to be measured

^{3.} For 802.11n (HT20) mode mcs0


Date: 2017-04-19




Please refer to the following test plots for details:

CH01 for 11n HT20 at mcs0: Horizontal



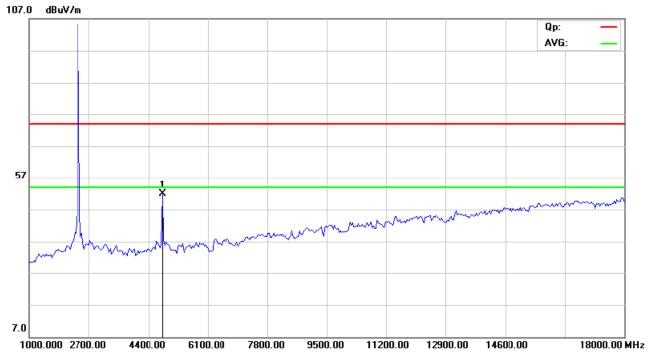

CH01 for 11n HT20 at mcs0: Vertical

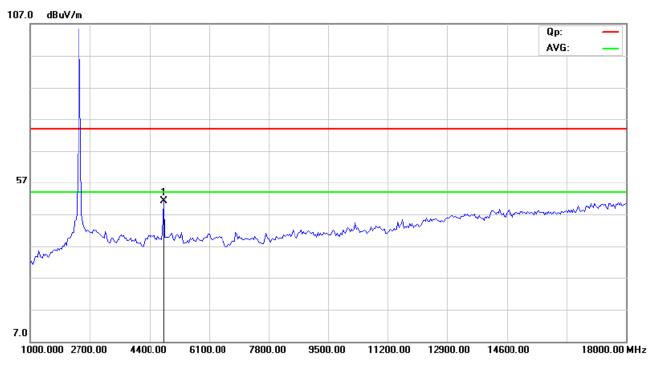

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


Page 31 of 104

Report No.: FCC1704045-01


Date: 2017-04-19



CH06 for 11n HT20 at mcs0: Vertical

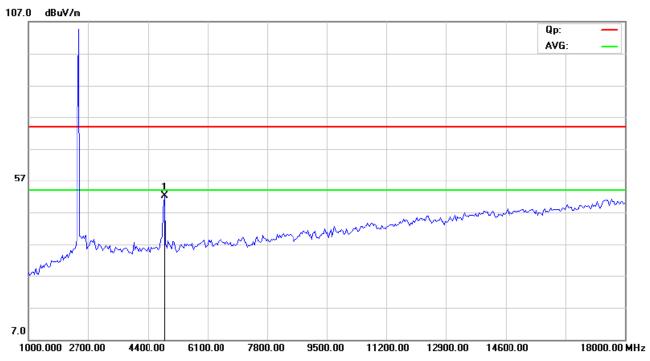

CH06 for 11n HT20 at mcs0: Horizontal

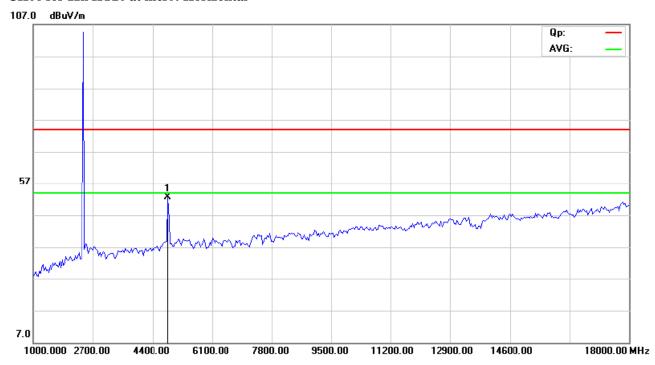

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


Page 32 of 104

Report No.: FCC1704045-01


Date: 2017-04-19



CH11 for 11n HT20 at mcs0: Vertical

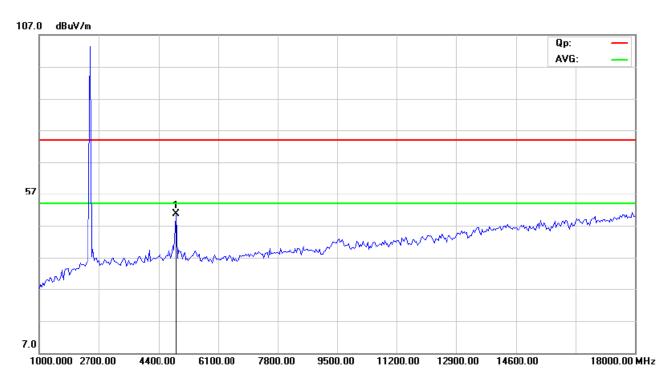

CH11 for 11n HT20 at mcs0: Horizontal

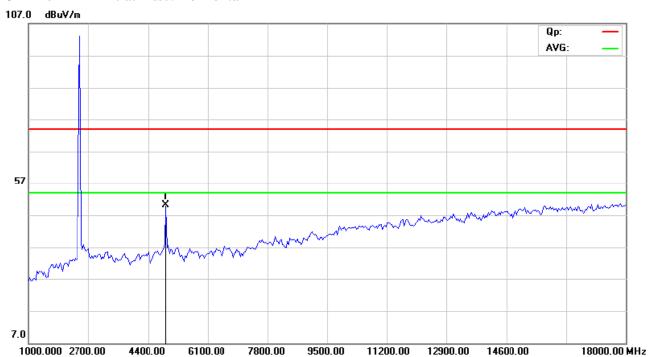

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: FCC1704045-01 Page 33 of 104

Date: 2017-04-19



Operation Mode: Transmitting under CH01 for 11n HT40 at mcs0

	Ü		
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
4844.00	49.51 (PK)	Н	74(Peak)/ 54(AV)
4844.00	49.27 (PK)	V	74(Peak)/ 54(AV)
7266.00		H/V	74(Peak)/ 54(AV)
9688.00		H/V	74(Peak)/ 54(AV)
12110		H/V	74(Peak)/ 54(AV)
14532		H/V	74(Peak)/ 54(AV)
16954		H/V	74(Peak)/ 54(AV)
19376		H/V	74(Peak)/ 54(AV)
21798		H/V	74(Peak)/ 54(AV)
24220		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode mcs0

Operation Mode: Transmitting under CH04 for 11n HT40 at mcs0

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
4874.00	48.66 (PK)	Н	74(Peak)/ 54(AV)
4874.00	48.03 (PK)	V	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622	-	H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode mcs0

Report No.: FCC1704045-01 Page 34 of 104

Date: 2017-04-19



Operation Mode: Transmitting under CH07 for 11n HT40 at mcs0

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
4904	49.73 (PK)	Н	74(Peak)/ 54(AV)
4904	49.58 (PK)	V	74(Peak)/ 54(AV)
7356		H/V	74(Peak)/ 54(AV)
9808	-	H/V	74(Peak)/ 54(AV)
12260		H/V	74(Peak)/ 54(AV)
14712		H/V	74(Peak)/ 54(AV)
17164		H/V	74(Peak)/ 54(AV)
19616		H/V	74(Peak)/ 54(AV)
22068		H/V	74(Peak)/ 54(AV)
24520		H/V	74(Peak)/ 54(AV)


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode mcs0

Date: 2017-04-19




Please refer to the following test plots for details:

CH01 for 11n HT40 at mcs0: Horizontal

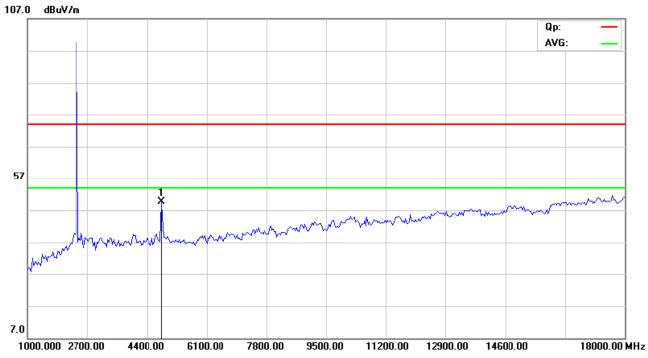

CH01 for 11n HT20 at mcs0: Vertical

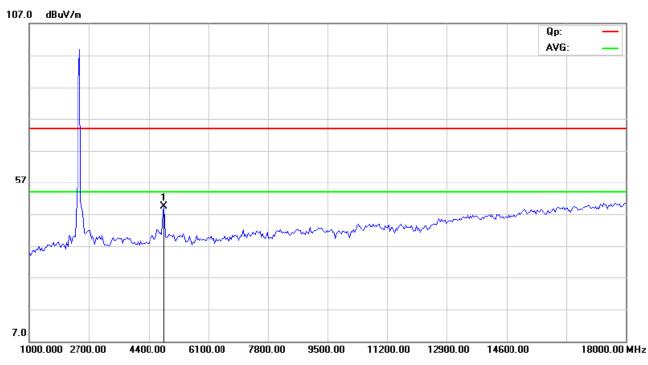

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 36 of 104


Report No.: FCC1704045-01

Date: 2017-04-19




CH04 for 11n HT40 at mcs0: Vertical



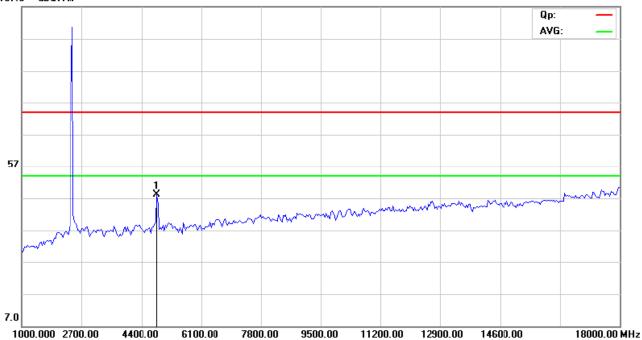

CH04 for 11n HT40 at mcs0: Horizontal



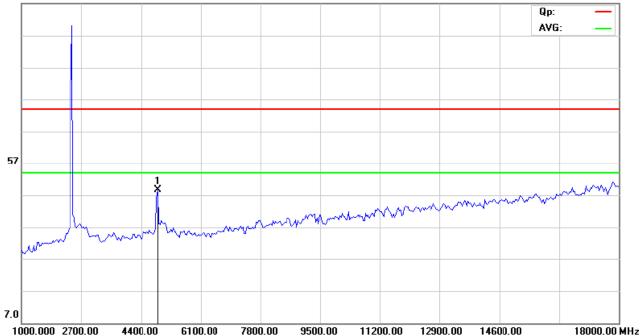


Page 37 of 104

Report No.: FCC1704045-01


Date: 2017-04-19



CH07 for 11n HT40 at mcs0: Vertical

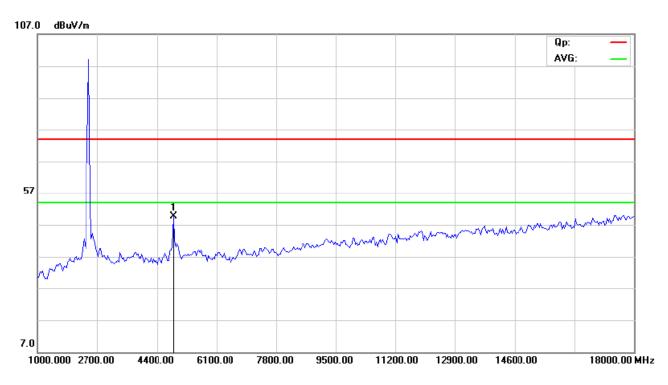

CH07 for 11n HT40 at mcs0: Horizontal

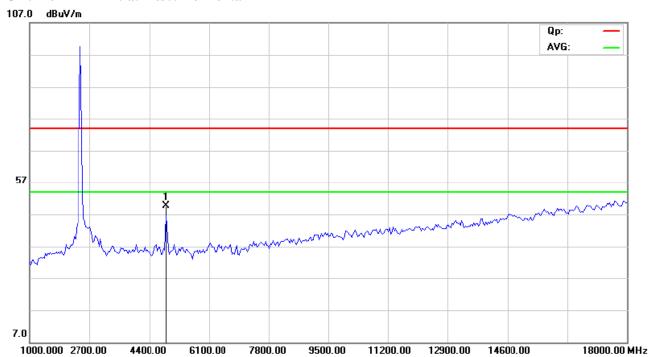

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 38 of 104


Report No.: FCC1704045-01

Date: 2017-04-19



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth $(VBW) \ge 3 \times RBW$.
- 3. Detector = Peak.
- 4. Trace mode = \max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Page 39 of 104 Report No.: FCC1704045-01

Date: 2017-04-19



6dB Occupied Bandwidth

EUT		Ta	ablet PC		Model		M	7057
Mode		8	302.11b		Input Vol	tage	DC	3.7V
Temperat	ure	24	4 deg. C,		Humidity	,	56%	6 RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		6 dB Bandwidth Mi		mum Limit MHz)	Pass/ Fail
1		2412	1	10.04		0.5		Pass
6		2437	1	10	.04		0.5	Pass
11		2462	1	10	.04		0.5	Pass
1		2412	11	10	.04		0.5	Pass
6		2437	11	10	10.04		0.5	Pass
11		2462	11	10.04			0.5	Pass


Page 40 of 104

Report No.: FCC1704045-01

Date: 2017-04-19



1. 802.11b at 1Mbps of CH01

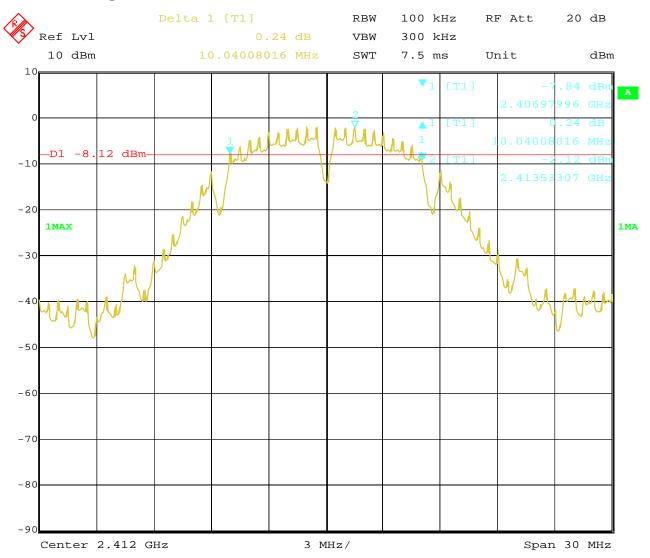


Date: 13.APR.2017 16:23:20 Report No.: FCC1704045-01 Page 41 of 104

Date: 2017-04-19



2. 802.11b at 1Mbps of CH06

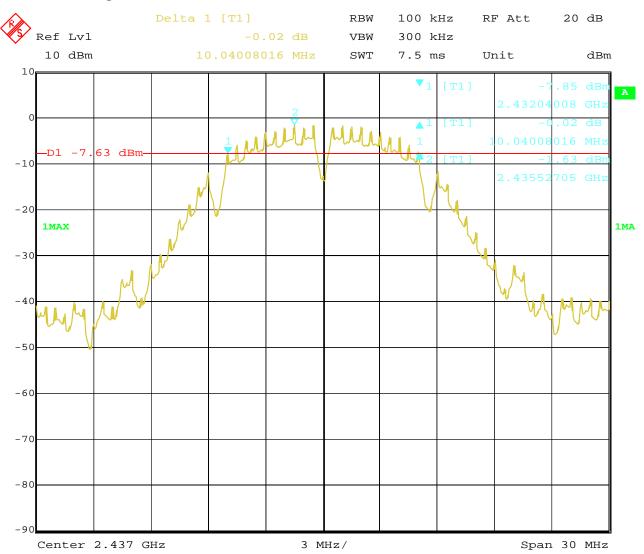


Date: 13.APR.2017 16:42:33 Report No.: FCC1704045-01 Page 42 of 104

Date: 2017-04-19



3. 802.11b at 1Mbps of CH11

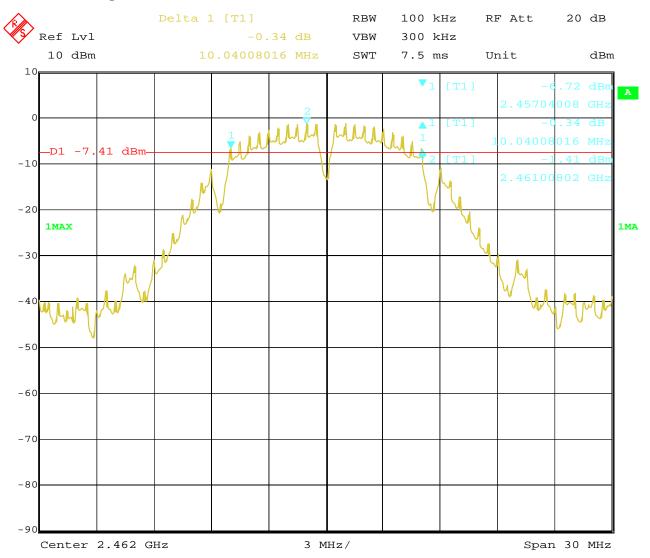


16:46:12 Date: 13.APR.2017

Report No.: FCC1704045-01 Page 43 of 104

Date: 2017-04-19



4. 802.11b at 1Mbps of CH01

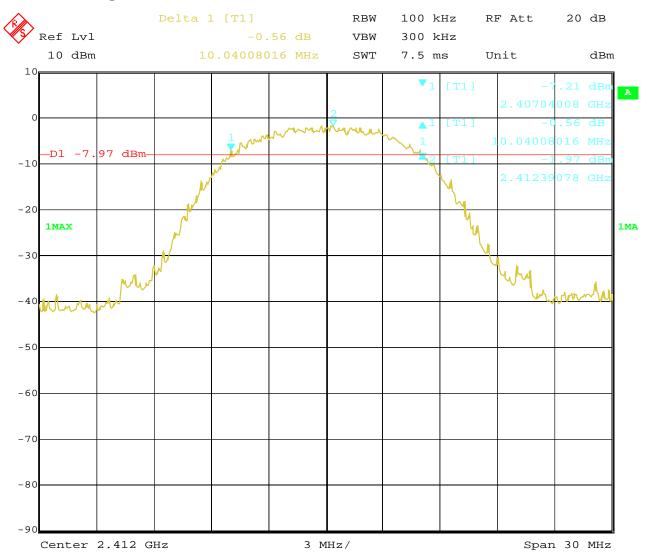


13.APR.2017 16:30:43 Date:

Report No.: FCC1704045-01 Page 44 of 104

Date: 2017-04-19



5. 802.11b at 1Mbps of CH06

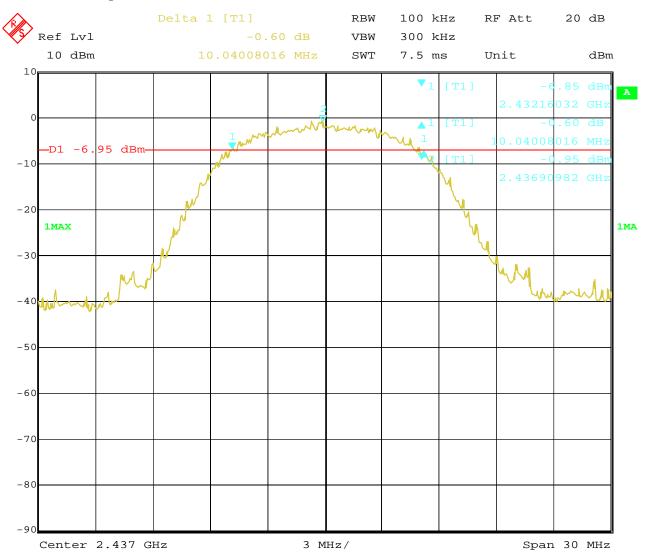


Date: 13.APR.2017 16:35:34 Report No.: FCC1704045-01 Page 45 of 104

Date: 2017-04-19



6. 802.11b at 1Mbps of CH11

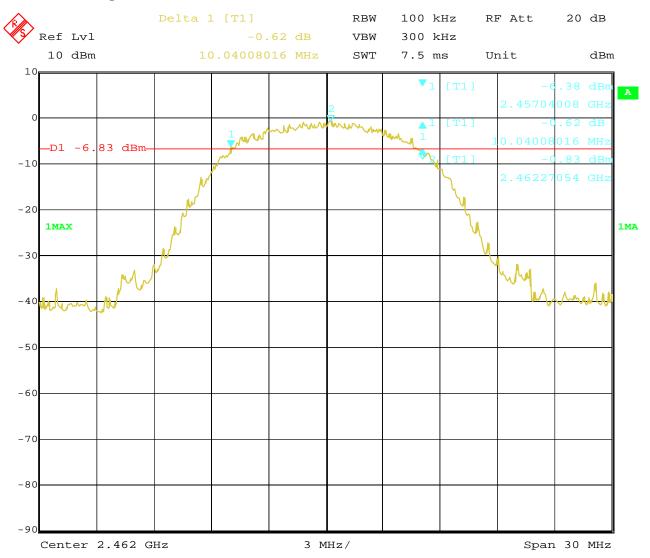

Date: 13.APR.2017 16:54:03

Page 46 of 104 Report No.: FCC1704045-01

Date: 2017-04-19



6dB Occupied Bandwidth

EUT		Ta	ablet PC		Model]	M7057
Mode		8	302.11g		Input Vol	tage	Γ	DC3.7V
Temperat	ure	24	4 deg. C,		Humidity		5	6% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		andwidth [Hz]		num Limit MHz)	Pass/ Fail
1		2412	6	15	5.69		0.5	Pass
6		2437	6	15	5.69	0.5		Pass
11		2462	6	15	5.69		0.5	Pass

Page 47 of 104


Report No.: FCC1704045-01

Date: 2017-04-19



Test Plots:

1. 802.11g at 6Mbps of CH01

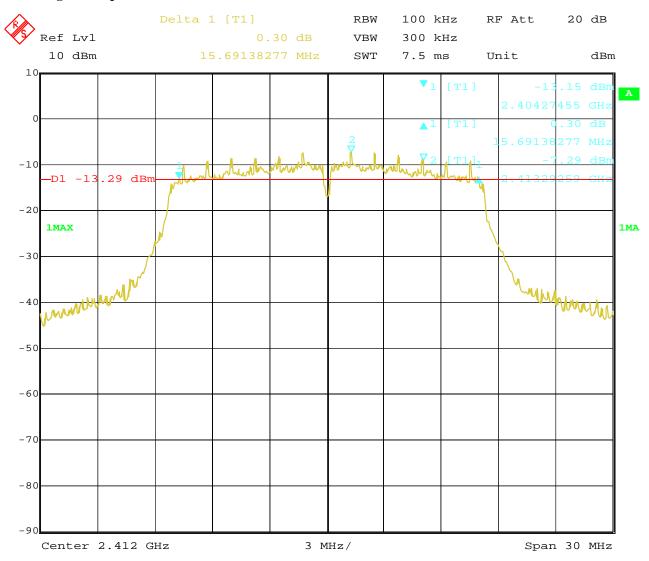


Date: 13.APR.2017 16:27:04 Report No.: FCC1704045-01 Page 48 of 104

Date: 2017-04-19



2. 802.11g at 6Mbps of CH06

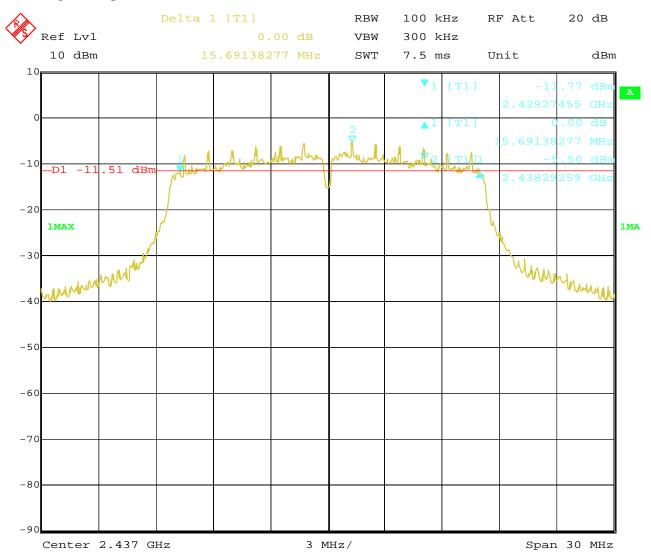


Date: 13.APR.2017 16:38:24 Report No.: FCC1704045-01 Page 49 of 104

Date: 2017-04-19



3. 802.11g at 6Mbps of CH11

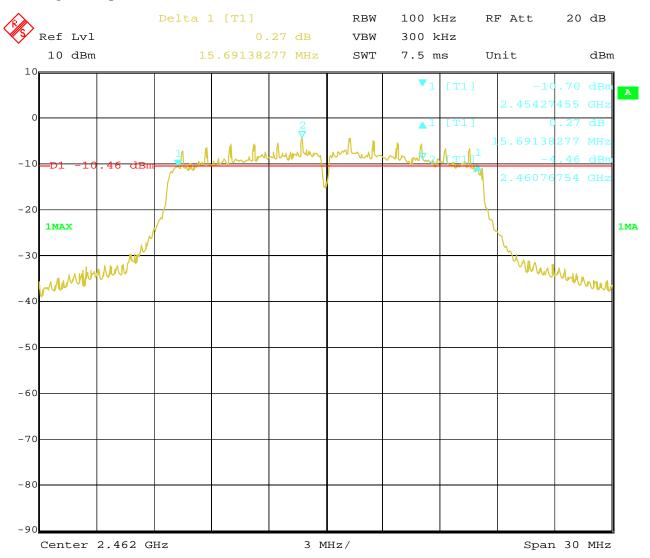

Date: 17.APR.2017 12:32:08

Page 50 of 104 Report No.: FCC1704045-01

Date: 2017-04-19



6dB Occupied Bandwidth

EUT		T	ablet PC		Model		M	7057
Mode		802	.11n HT20		Input Vol	tage	DC	3.7V
Temperat	ure	24	4 deg. C,		Humidity		56%	% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		ndwidth Hz)		mum Limit MHz)	Pass/ Fail
1		2412	mcs0	16	.89		0.5	Pass
6		2437	mcs0	16	.89	0.5		Pass
11		2462	mcs0	16	.89		0.5	Pass


Report No.: FCC1704045-01 Page 51 of 104

Date: 2017-04-19



Test Plots:

1. 802.11n at HT20 of CH01

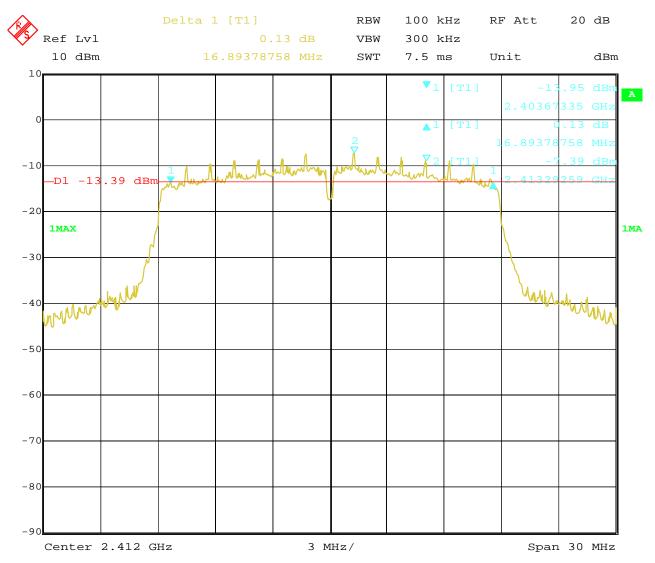


Date: 13.APR.2017 17:09:25 Report No.: FCC1704045-01 Page 52 of 104

Date: 2017-04-19



2. 802.11n at HT20 of CH06

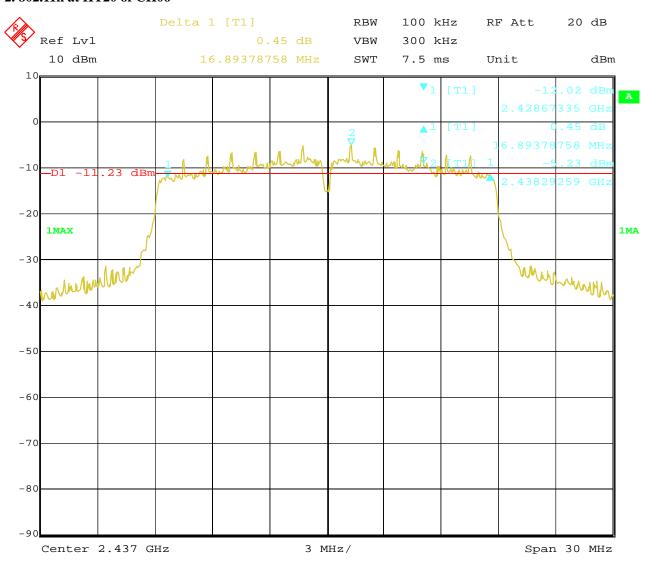


Date: 13.APR.2017 17:04:50 Report No.: FCC1704045-01 Page 53 of 104

Date: 2017-04-19



3. 802.11n at HT20 of CH11

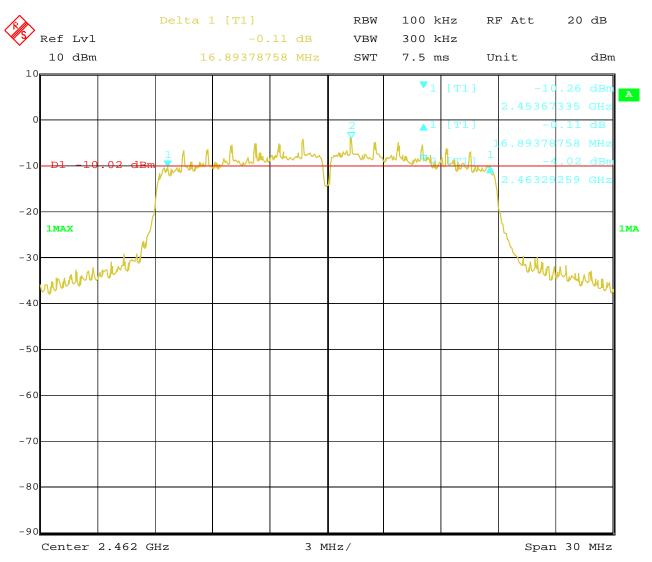

Date: 13.APR.2017 16:56:47

Page 54 of 104 Report No.: FCC1704045-01

Date: 2017-04-19



6dB Occupied Bandwidth

EUT	•	Table	et PC		Model	M7	057
Mode		802.111	n HT40	Input Voltage		DC3	5.7V
Temperat	ure	24 de	eg. C,		Humidity	56%	RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	6	dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail
1		2422	mcs0		35.41	0.5	Pass
4		2437	mcs0		35.41	0.5	Pass
7		2452	mcs0		35.41	0.5	Pass


Report No.: FCC1704045-01 Page 55 of 104

Date: 2017-04-19



Test Plots:

1. 802.11n at HT40 of CH01

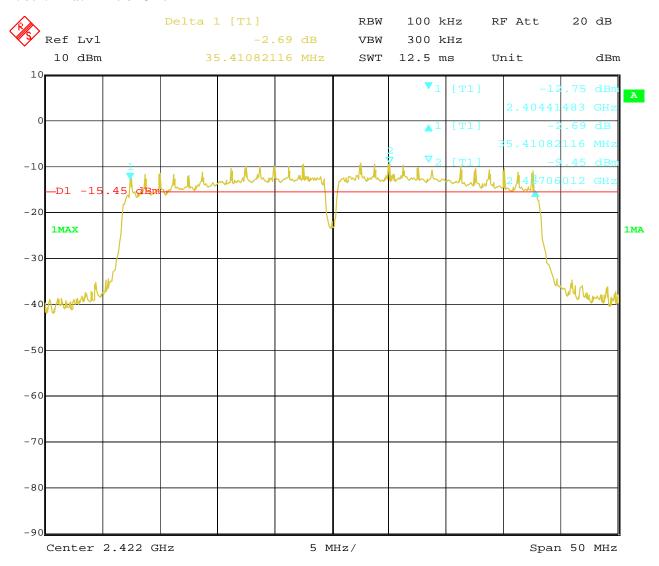


Date: 17.APR.2017 12:38:10

Page 56 of 104 Report No.: FCC1704045-01

Date: 2017-04-19



2. 802.11n at HT40 of CH04

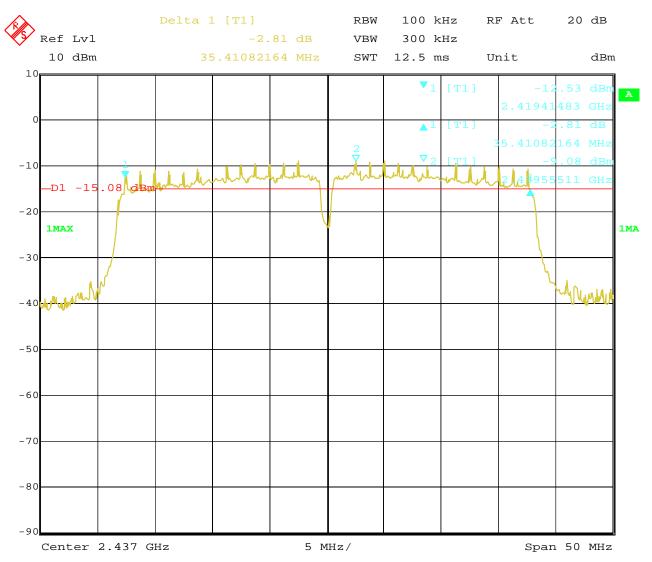


Date: 13.APR.2017 17:18:36 Report No.: FCC1704045-01 Page 57 of 104

Date: 2017-04-19



3. 802.11n at HT40 of CH07

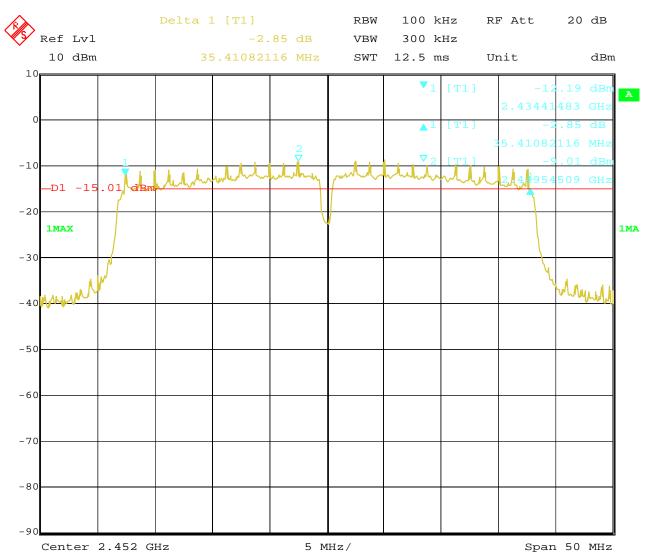

17.APR.2017 12:44:09 Date:

Report No.: FCC1704045-01


Date: 2017-04-19



Page 58 of 104

8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the Average power was measured

Report No.: FCC1704045-01 Page 59 of 104

Date: 2017-04-19



8.4Test Results

EUT		Tablet	: PC	M	odel		M7057
Mode	Mode 802.1		11b	Input Voltage		DC3.7V	
Temperat	Temperature 24 deg		g. C, Hur		midity		56% RH
Channel	Cha	annel Frequency (MHz)	Max. Power (dBm)	Max. Power Output (dBm)		Limit m)	Pass/ Fail
		(WITE)	Average		(ub		
1		2412	7.63		30)	Pass
6		2437	7.83		30		Pass
11		2462	8.70		30)	Pass

Note: 1. At finial test to get the worst-case emission at 1Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT	JT Tablet		PC M		odel		M7057	
Mode		802.1	1g	Input	Voltage		DC3.7V	
Temperat	ure	24 deg	g. C,	Hur	nidity		56% RH	
Channel	Channel Frequency		Max. Power Output (dBm)		Power (dB		Pass/ Fail	
		(MHz)	Average		(GD)	111)		
1		2412	5.41		30		Pass	
6		2437	5.59		30)	Pass	
11		2462	6.41		30)	Pass	

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Page 60 of 104

Report No.: FCC1704045-01

Date: 2017-04-19



EUT	EUT Tablet		PC	M	odel		M7057
Mode	Mode 802.11n (HT20)	Input Voltage		DC3.7V	
Temperat	Temperature 24 deg		g. C, Hur		midity		56% RH
Channel	Channel Frequency		Max. Power Output (dBm)		Power (dB		Pass/ Fail
		(MHz)	Average		(ub	111)	
1		2412	5.93		30		Pass
6	2437		6.19		30		Pass
11		2462	6.06		30)	Pass

Note: 1. At finial test to get the worst-case emission at mcs0 of 11n HT20 for CH01, CH06 and CH11

The result basic equation calculation as follow:
 Max. Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT		Tablet PC		Model			M7057
Mode		802.11n (HT ²	10)	Input Voltage			DC3.7V
Temperati	ure	24 deg. C,		Humidity	y		56% RH
Channel	Channel Frequency		Max.	Max. Power Output (dBm)		Power Limit	Pass/ Fail
		(MHz)	Average			(dBm)	
1		2422		5.52		30	Pass
4		2437		5.21		30	Pass
7		2452		5.78		30	Pass

Note: 1. At finial test to get the worst-case emission at mcs0 of 11n HT40 for CH01, CH04 and CH7

- The result basic equation calculation as follow:
 Max. Power Output = Power Reading + Cable loss + Attenuator
- 3. The worse case was recorded


Report No.: FCC1704045-01 Page 61 of 104

Date: 2017-04-19



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be ≤ 8 dBm.

Page 62 of 104 Report No.: FCC1704045-01

Date: 2017-04-19



9.4Test Result

EUT		Tablet	PC	M	Model		M7057
Mode 802.1		802.11b 1	1Mbps	Input Voltage		DC3.7V	
Temperat	ure	24 deg	24 deg. C,		Humidity		56% RH
Channel	Channel Channel Frequency (MHz)		Final RF Po Level (dBi		Maximur (dB:	-	Pass/ Fail
			11Mbps	S			
1		2412	-12.40		8		Pass
6 2437		-10.36		8		Pass	
11		2462	-11.52		8		Pass

EUT		Tablet	PC	M	Model		M7057
Mode	Mode 802.11b		l Mbps	Input Voltage		DC3.7V	
Temperat	ure	24 deg	g. C,	Humidity			56% RH
Channel	Ch	annel Frequency	Final RF Po	wer	Maximum Limit		Pass/ Fail
Chamie		(MHz)	Level in (dBm)		(dB	m)	
			1Mbps	3			
1		2412	-12.94		8		Pass
6		2437	-12.10		8		Pass
11		2462	-11.93		8		Pass

Page 63 of 104

Report No.: FCC1704045-01

Date: 2017-04-19



EUT	EUT Tablet		PC	M	Model		M7057
Mode	Mode 802.11g		6Mbps	Input Voltage		DC3.7V	
Temperati	Temperature 24 deg		g. C, Hum		midity		56% RH
Channel	Cha	annel Frequency	Final RF Power		Maximum Limit		Pass/ Fail
Chamie		(MHz)	Level in (dl	3m)	(dB	m)	
			6Mbps				
1		2412	-15.68		8		Pass
6	2437		-13.62		8		Pass
11		2462	-12.97		8		Pass

EUT	EUT Tablet		PC	Model			M7057
Mode 802.11n HT		720 mcs0	Input Voltage		DC3.7V		
Temperati	Temperature 24 deg		g. C, Hum		midity		56% RH
Channel	Cha	annel Frequency	Final RF Power		Maximum Limit		Pass/ Fail
Chamiei		(MHz)	Level (dBm)		(dB	m)	
			HT20				
1		2412	-15.99		8		Pass
6	2437		-13.64		8		Pass
11		2462	-12.84	•	8		Pass

EUT		Tablet PC		Model		M7057	
Mode		802.11n HT40 mcs0		Input Voltage		DC3.7V	
Temperature		24 deg. C,		Humidity		56% RH	
Channel	Channel Frequency (MHz)		Final RF Power Level (dBm)		M	Maximum Limit (dBm)	Pass/ Fail
HT40							
1	2422		-17.63			8	Pass
4	2437 -17.43		-17.43		8	Pass	
7	7 2452		-17.51			8	Pass


Report No.: FCC1704045-01 Page 64 of 104

Date: 2017-04-19



9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

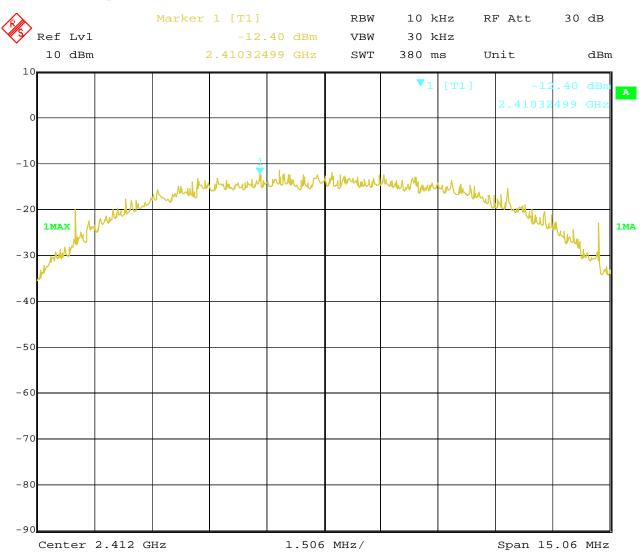

Date: 14.APR.2017 11:10:20


Page 65 of 104

Report No.: FCC1704045-01

Date: 2017-04-19



2. 802.11b at 11Mbps at CH06

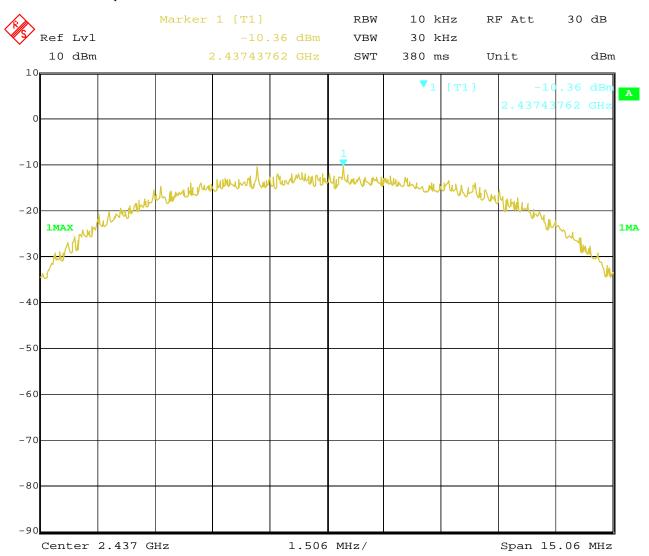

11:09:49 Date: 14.APR.2017


Page 66 of 104

Report No.: FCC1704045-01

Date: 2017-04-19



3. 802.11b at 11Mbps of CH11

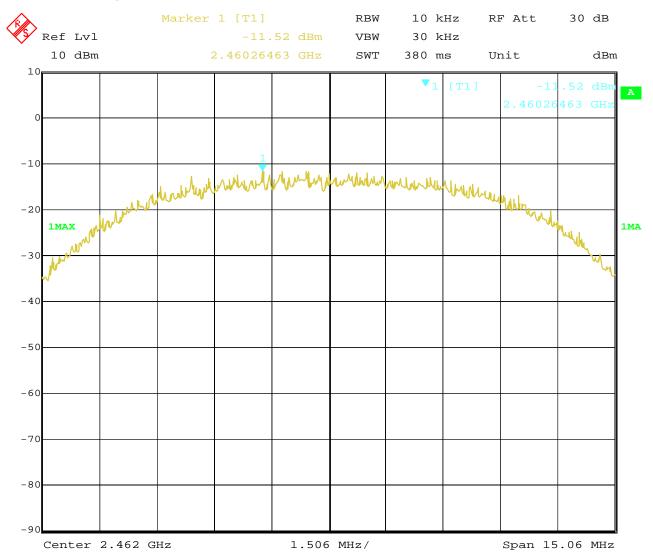

14.APR.2017 11:09:25 Date:


Page 67 of 104

Report No.: FCC1704045-01

Date: 2017-04-19



4. 802.11b at 1Mbps of CH1

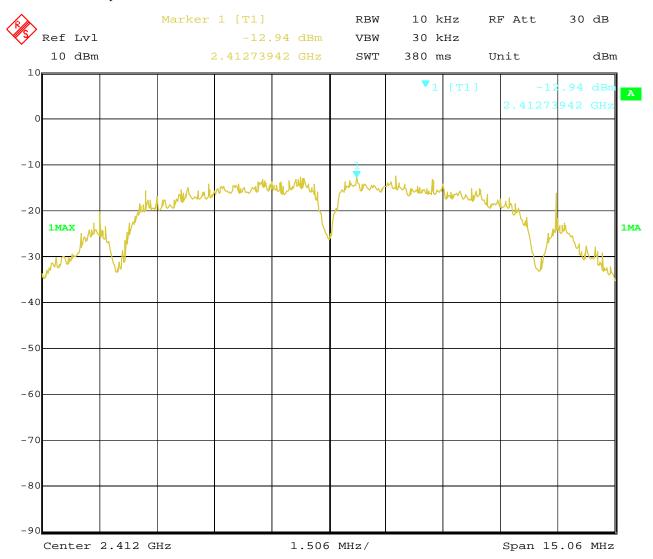

11:02:41 Date: 14.APR.2017


Page 68 of 104

Report No.: FCC1704045-01

Date: 2017-04-19



5. 802.11b at 1Mbps of CH6

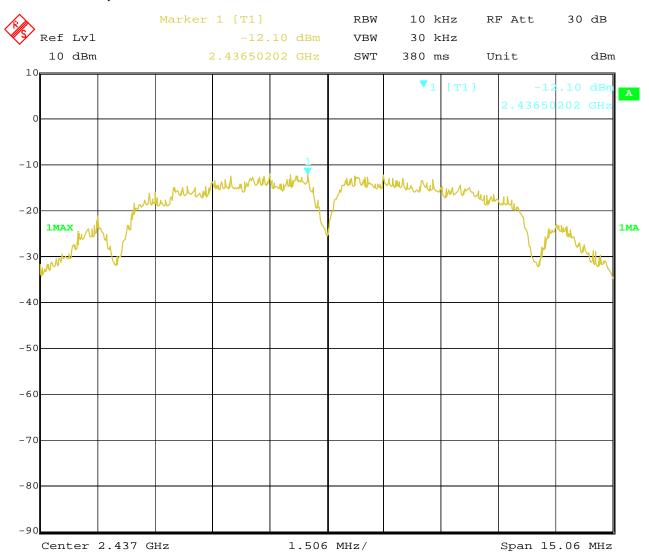

11:02:18 Date: 14.APR.2017


Page 69 of 104

Report No.: FCC1704045-01

Date: 2017-04-19



6. 802.11b at 1Mbps of CH11

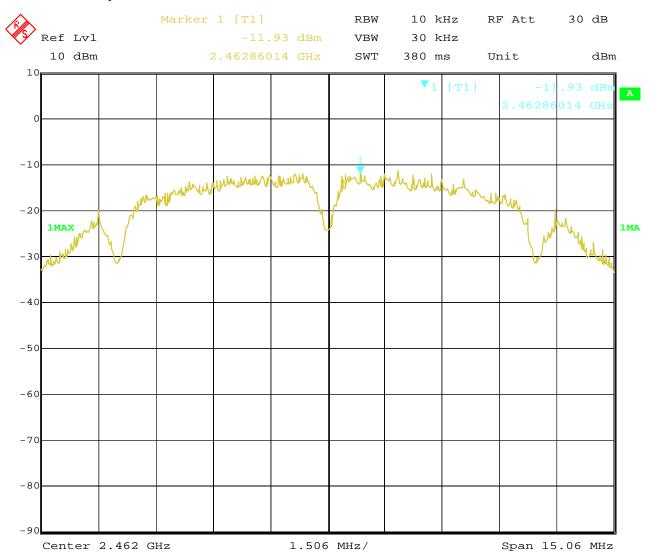

14.APR.2017 11:01:54 Date:


Page 70 of 104

Report No.: FCC1704045-01

Date: 2017-04-19



7. 802.11g at 6Mbps of CH1

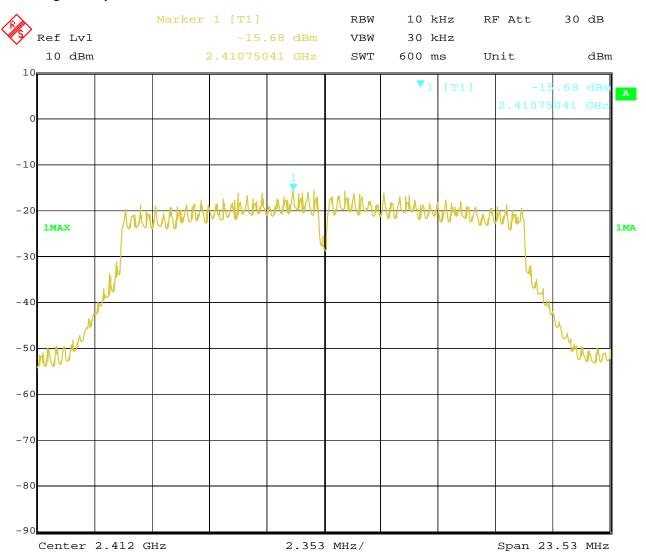


11:05:09 Date: 14.APR.2017

Report No.: FCC1704045-01 Page 71 of 104

Date: 2017-04-19



8. 802.11g at 6Mbps of CH6

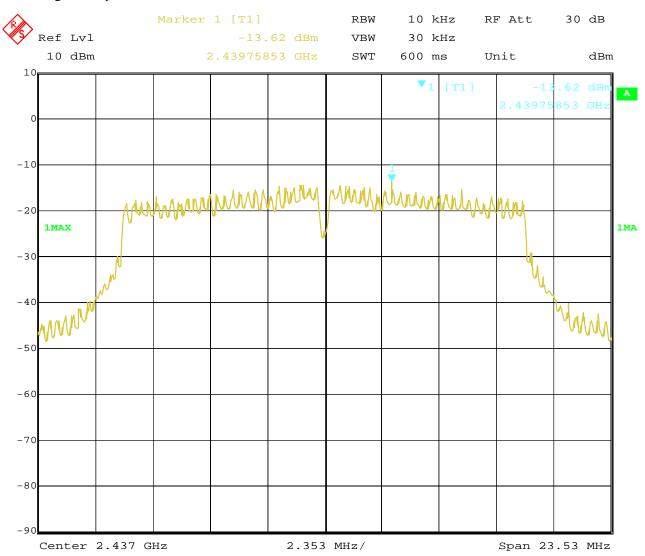


11:06:33 Date: 14.APR.2017

Report No.: FCC1704045-01 Page 72 of 104

Date: 2017-04-19



9. 802.11g at 6Mbps of CH11

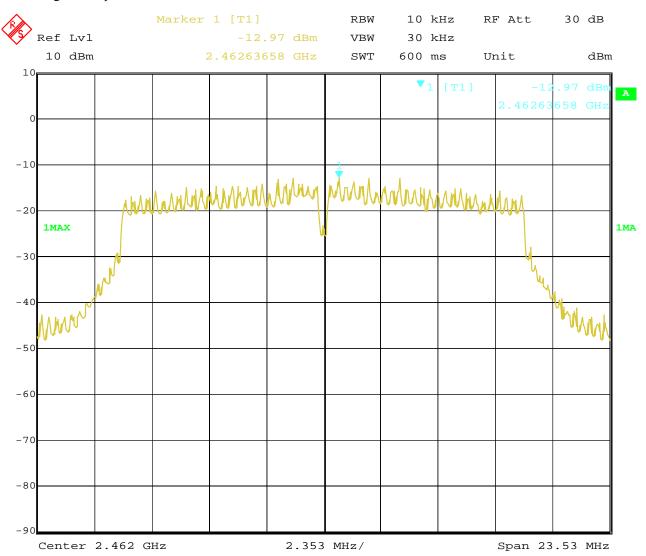


11:08:47 Date: 14.APR.2017

Report No.: FCC1704045-01 Page 73 of 104

Date: 2017-04-19



10. 802.11n at HT20 of CH01

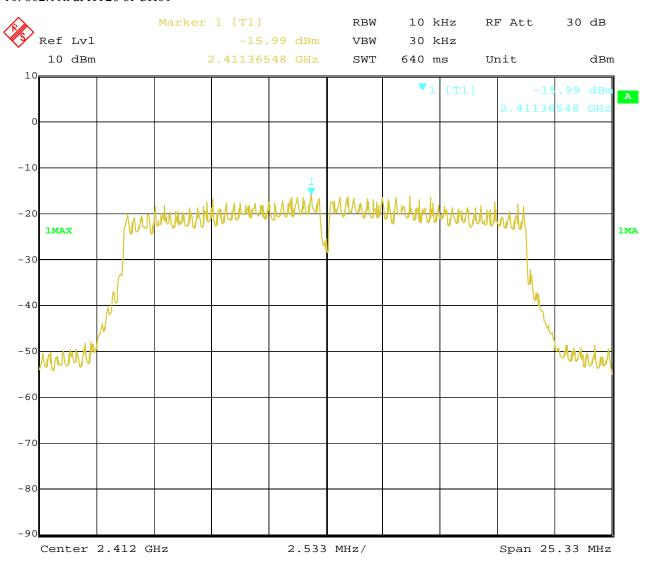


14.APR.2017 11:16:29 Date:

Report No.: FCC1704045-01 Page 74 of 104

Date: 2017-04-19



11. 802.11n at HT20 of CH06

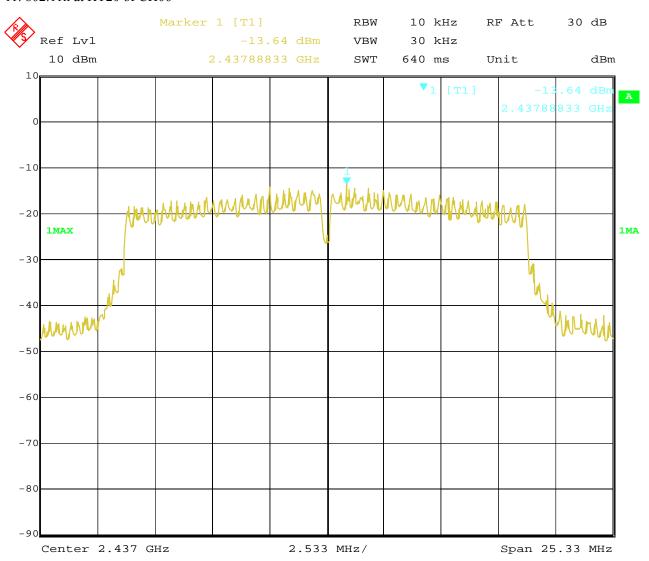


Date: 14.APR.2017 11:17:26 Report No.: FCC1704045-01 Page 75 of 104

Date: 2017-04-19



12. 802.11n at HT20 of CH11

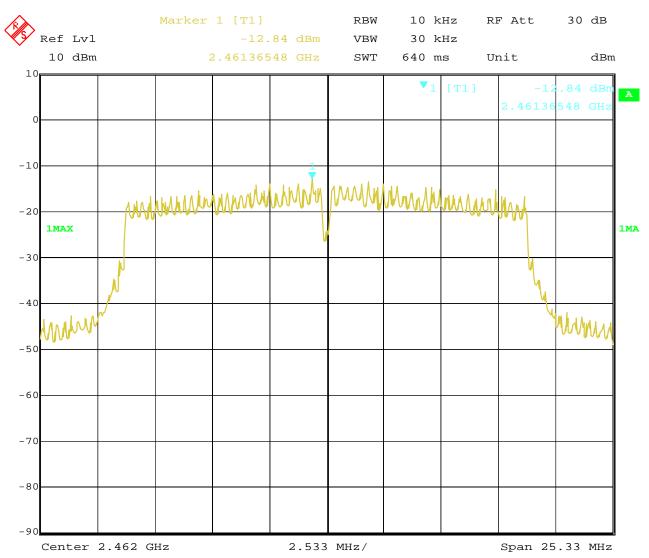


Date: 14.APR.2017 11:19:06 Report No.: FCC1704045-01 Page 76 of 104

Date: 2017-04-19



13. 802.11n at HT40 of CH01

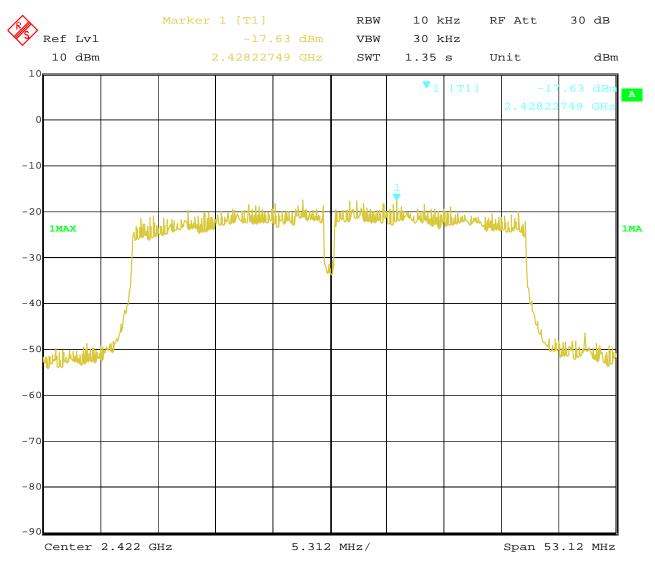


14.APR.2017 11:21:36 Date:

Report No.: FCC1704045-01 Page 77 of 104

Date: 2017-04-19



14. 802.11n at HT40 of CH04

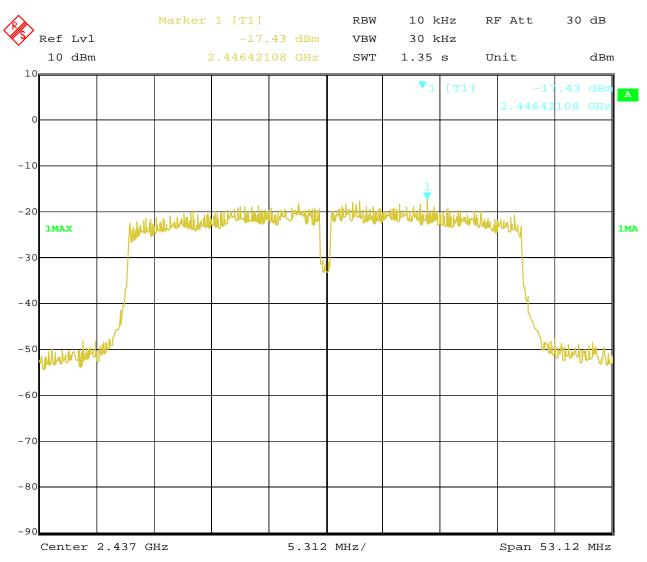

14.APR.2017 11:24:20 Date:


Page 78 of 104

Report No.: FCC1704045-01

Date: 2017-04-19



15. 802.11n at HT40 of CH07

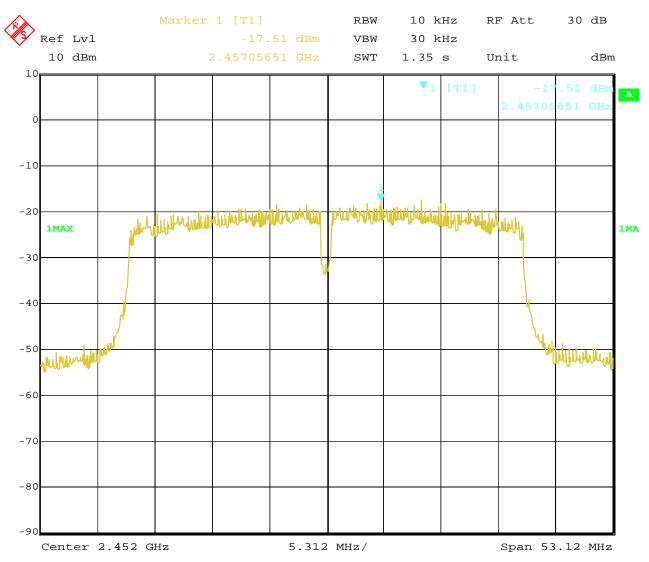

14.APR.2017 11:25:35 Date:


Report No.: FCC1704045-01

Date: 2017-04-19



Page 79 of 104

10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test.(Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector)

For bandage test, the spectrum set as follows: RBW=100, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. this is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), after pre-test. It was found that the worse radiated emission was get at the lying position. the worse case was recorded

2. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 80 of 104

Report No.: FCC1704045-01

Date: 2017-04-19




For 802.11b mode

CH01 at 11Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Tablet PC		Model	M7057
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:		Pass	Detector	PK
2400	PK (dBµV/m)	61.3	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)	42.4	Limit	$54(dB\mu V/m)$
2390	PK (dBµV/m)	43.1	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	54(dBµV/m)

Test Figure:

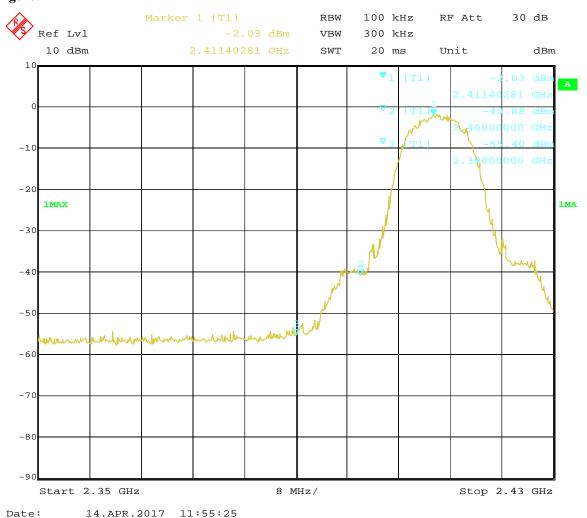

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 81 of 104

Report No.: FCC1704045-01

Date: 2017-04-19




CH11 at 11Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Tablet PC		Model	M7057
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBµV/m)	44.5	T **4	74(dBμV/m)
	AV (dBμV/m)		Limit	54(dBμV/m)

Test Figure:

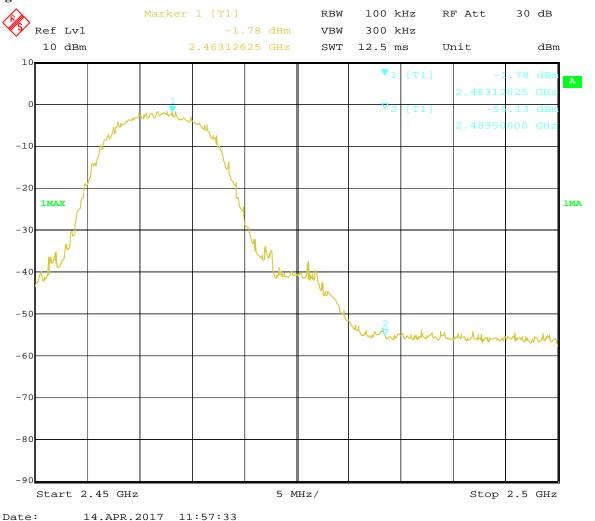

Note: The Max. FS in Restrict Band are measured in conventional method.

Page 82 of 104

Report No.: FCC1704045-01

Date: 2017-04-19




For 802.11b mode

CH01 at 1Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Tablet PC		Model	M7057
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:		Pass	Detector	PK
2400	PK (dBµV/m)	60.7	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)	41.3	Limit	$54(dB\mu V/m)$
2390	PK (dBµV/m)	43.8	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$

Test Figure:

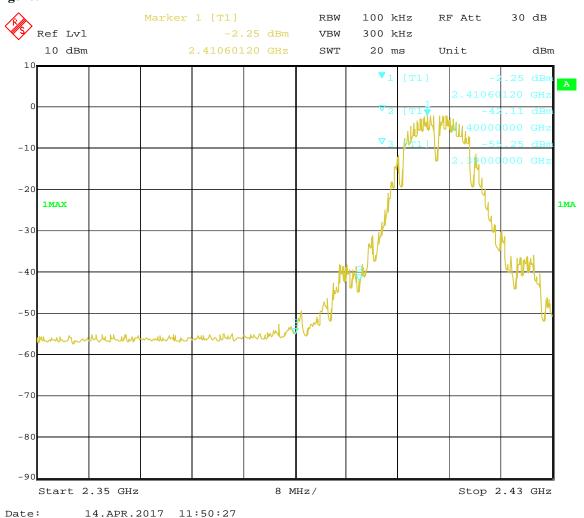

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 83 of 104

Report No.: FCC1704045-01

Date: 2017-04-19




CH11 at 1Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Tablet PC		Model	M7057
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBμV/m)	44.3	T 114	74(dBμV/m)
	AV (dBμV/m)		Limit	54(dBμV/m)

Test Figure:

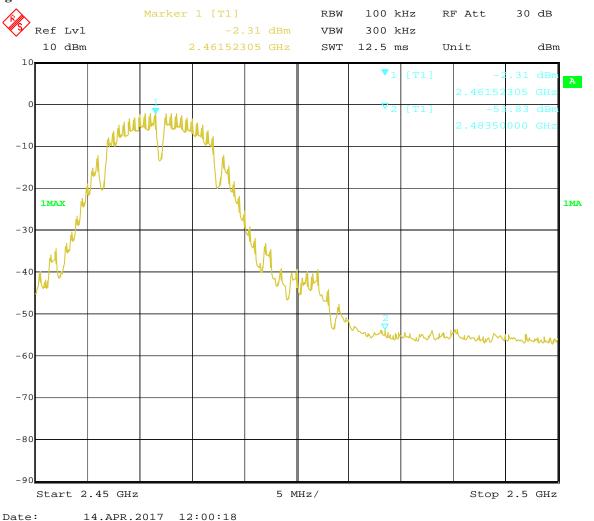

Note: The Max. FS in Restrict Band are measured in conventional method.

Page 84 of 104

Report No.: FCC1704045-01

Date: 2017-04-19




For 802.11g mode

CH01 at 6Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Tablet PC		Model	M7057
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:		Pass	Detector	PK
2400	PK (dBµV/m)	61.8	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)	42.9	Limit	$54(dB\mu V/m)$
2390	PK (dBμV/m)	46.8	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)		Lillit	$54(dB\mu V/m)$

Test Figure:

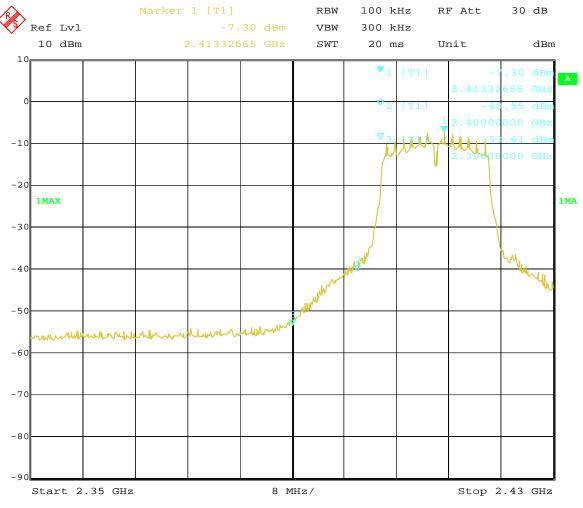

Date: 14.APR.2017 11:52:48

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 85 of 104

Report No.: FCC1704045-01

Date: 2017-04-19




CH11 at 6Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Tablet PC		Mod	lel	M7057
Mode	Keeping Transmitting		Input V	oltage	DC3.7V
Temperature	24 deg. C,		Humi	dity	56% RH
Test Result:	Pass		Detec	ctor	PK
2483.5	PK (dBμV/m)	53.9	T 1 14	$74(dB\mu V/m)$ $54(dB\mu V/m)$	
	AV (dBμV/m)	35.1	Limit		

Test Figure:

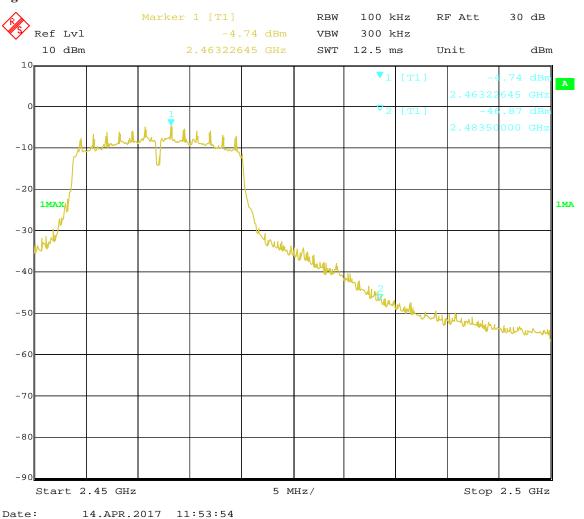

Note: The Max. FS in Restrict Band are measured in conventional method.

Page 86 of 104

Report No.: FCC1704045-01

Date: 2017-04-19




For 802.11n (HT20) mode

CH01 at mcs0

10.4 Band-edge and Restricted band Measurement

EUT	Tablet PC		Model	M7057
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:		Pass		PK
2400	PK (dBμV/m)	62.3	I imit	$74(dB\mu V/m)$
	AV (dBμV/m)	43.2	Limit	$54(dB\mu V/m)$
2390	PK (dBμV/m)	50.2	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)	31.8	Liffill	54(dBμV/m)

Test Figure:

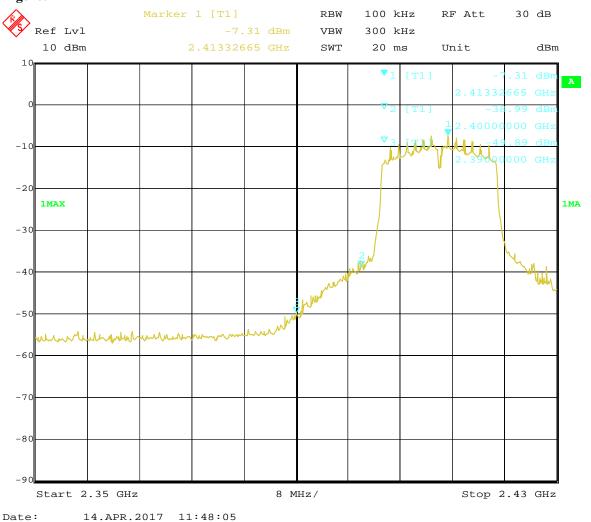

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 87 of 104

Report No.: FCC1704045-01

Date: 2017-04-19




CH11 at mcs0

10.4 Band-edge and Restricted band Measurement

EUT	Tablet PC		Model	M7057
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBµV/m)	54.1	T toota	$74(dB\mu V/m)$
	AV (dBμV/m)	35.6	Limit	$54(dB\mu V/m)$

Test Figure:

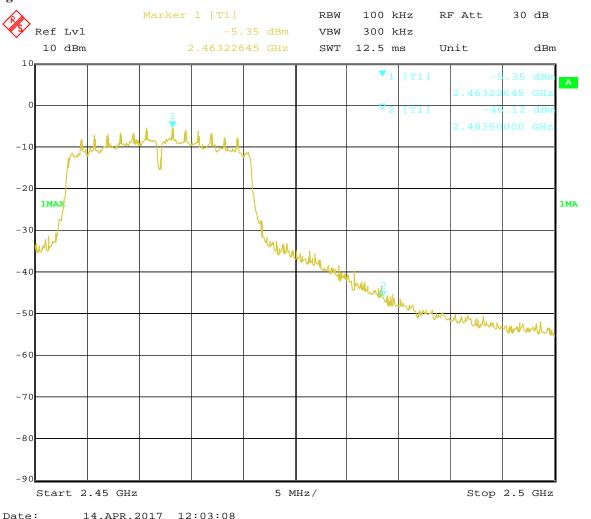

Note: The Max. FS in Restrict Band are measured in conventional method.

Page 88 of 104

Report No.: FCC1704045-01

Date: 2017-04-19




For 802.11n (HT40) mode

CH01 at mcs0

10.4 Band-edge and Restricted band Measurement

EUT	Tablet PC		Model	M7057
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2400	PK (dBµV/m)	62.9	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)	43.6	Limit	$54(dB\mu V/m)$
2390	PK (dBμV/m)	57.1	Limit	74(dBμV/m)
	AV (dBμV/m)	37.8	Lillit	54(dBμV/m)

Test Figure:

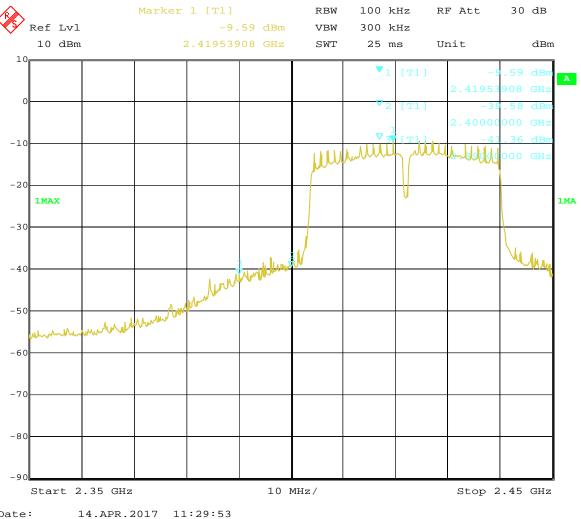

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 89 of 104

Report No.: FCC1704045-01

Date: 2017-04-19




CH7 at mcs0

10.4 Band-edge and Restricted band Measurement

EUT	Tablet PC		Model	M7057
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBµV/m)	60.7	T 10014	$74(dB\mu V/m)$
	AV (dBμV/m)	41.6	Limit	$54(dB\mu V/m)$

Test Figure:

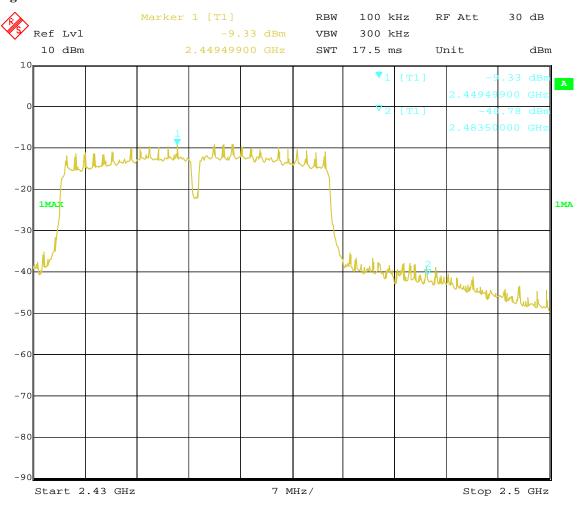

14.APR.2017 11:27:50

Note: The Max. FS in Restrict Band are measured in conventional method.

Report No.: FCC1704045-01

Date: 2017-04-19



Page 90 of 104

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Integral antenna used. The maximum Gain of the antennas is 1.4dBi.

Report No.: FCC1704045-01 Page 91 of 104

Date: 2017-04-19




12.0 FCC ID Label

FCC ID: RBD-M7057

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

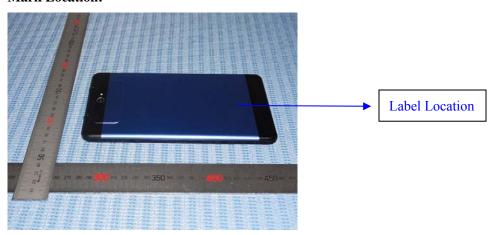


Page 92 of 104 Report No.: FCC1704045-01

Date: 2017-04-19



13.0 Photo of testing

Conducted Emission Test Setup:

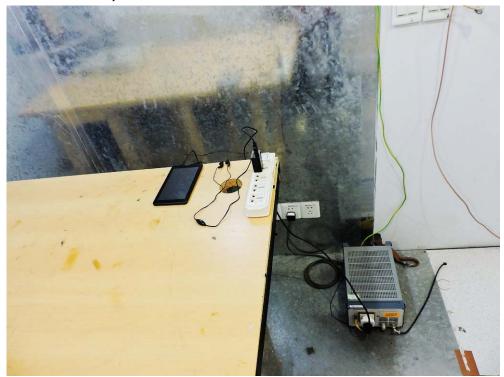

Page 93 of 104


Report No.: FCC1704045-01

Date: 2017-04-19



Radiated Emission Test Setup:



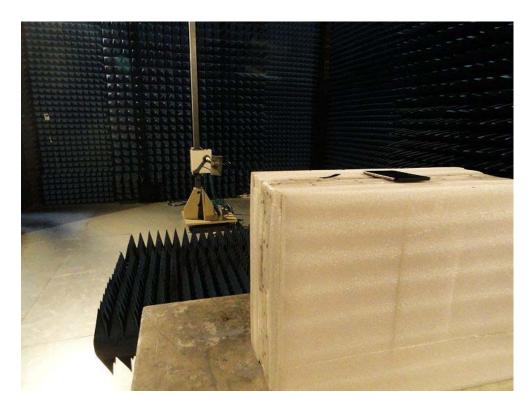

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the propert. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 94 of 104

Report No.: FCC1704045-01

Date: 2017-04-19



Photographs - EUT

Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the property. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 95 of 104

Report No.: FCC1704045-01

Date: 2017-04-19



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the property. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 96 of 104

Report No.: FCC1704045-01

Date: 2017-04-19



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 97 of 104


Report No.: FCC1704045-01

Date: 2017-04-19



Outside view



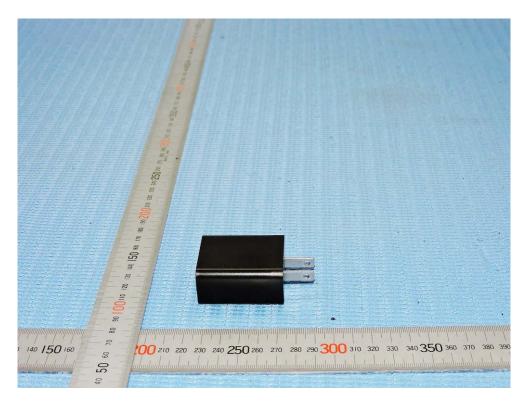

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 98 of 104

Report No.: FCC1704045-01

Date: 2017-04-19



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 99 of 104


Report No.: FCC1704045-01

Date: 2017-04-19



Inside view



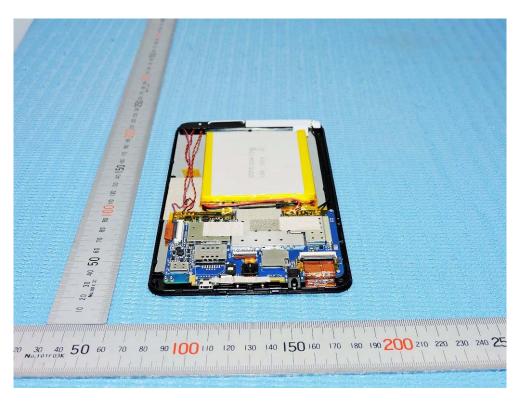

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 100 of 104


Report No.: FCC1704045-01

Date: 2017-04-19



Inside view

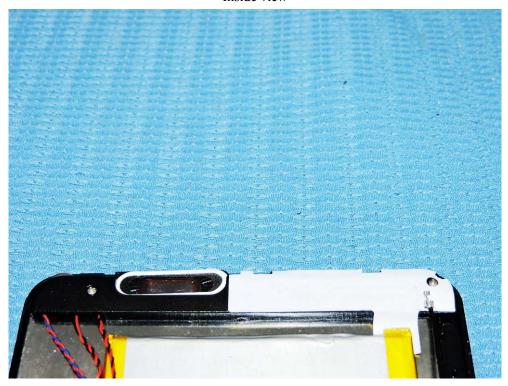

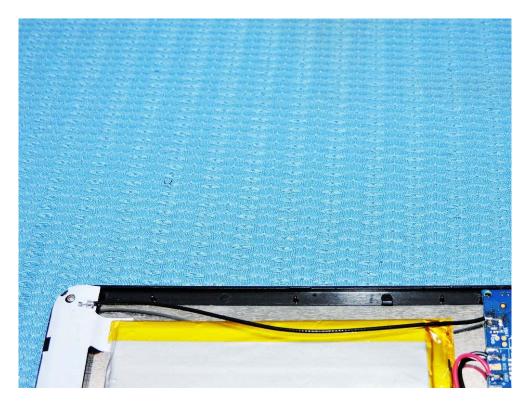

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 101 of 104


Report No.: FCC1704045-01

Date: 2017-04-19



Inside view



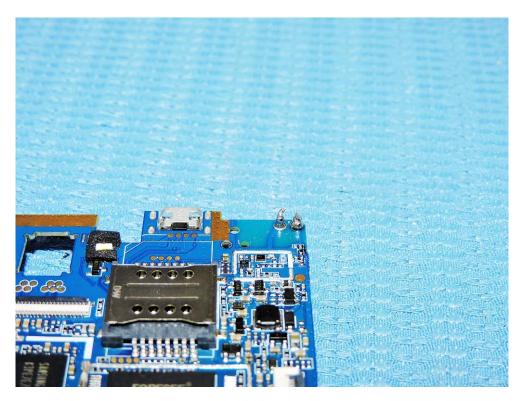

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 102 of 104


Report No.: FCC1704045-01

Date: 2017-04-19



Inside view



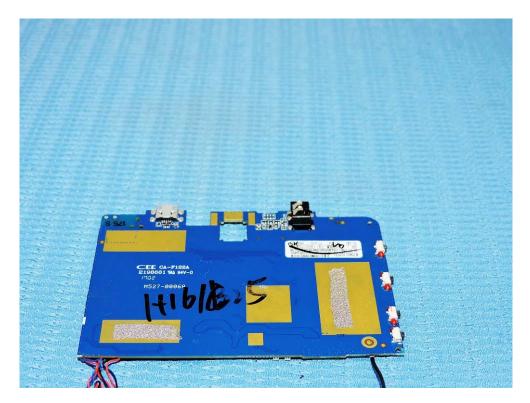

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 103 of 104

Report No.: FCC1704045-01

Date: 2017-04-19



Inside view

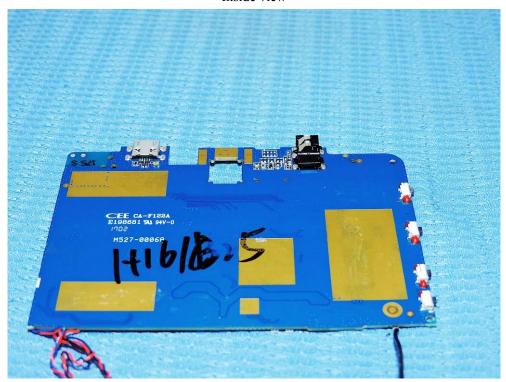



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1704045-01 Page 104 of 104

Date: 2017-04-19



Inside view

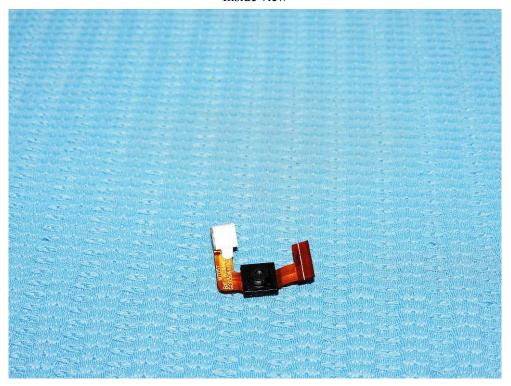

End of the report