



TEST REPORT

No. I19N02705-RF-LTE

for

Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd

smartphone

Model Name: CP3706AS

FCC ID: R38YLCP3706AS

with

Hardware Version: P1

Software Version: 3706AS.SPRINT.191220.2D

Issued Date: 2020-01-20

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

SAICT, Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518026.

Tel: +86(0)755-33322000, Fax: +86(0)755-33322001

Email: yewu@caict.ac.cn, website: www.cszit.com

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I19N02705-RF-LTE	Rev.0	1st edition	2020-01-20

CONTENTS

1. SUMMARY OF TEST REPORT	4
1.1. TEST ITEMS	4
1.2. TEST STANDARDS.....	4
1.3. TEST RESULT	4
1.4. TESTING LOCATION	4
1.5. PROJECT DATA.....	4
1.6. SIGNATURE	4
2. CLIENT INFORMATION.....	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. GENERAL DESCRIPTION	6
4. REFERENCE DOCUMENTS	7
5. LABORATORY ENVIRONMENT	8
6. SUMMARY OF TEST RESULTS.....	9
7. STATEMENT	14
8. TEST EQUIPMENTS UTILIZED.....	15
ANNEX A: MEASUREMENT RESULTS	16
A.1 OUTPUT POWER	16
A.2 FIELD STRENGTH OF SPURIOUS RADIATION	93
A.3 FREQUENCY STABILITY	140
A.4 OCCUPIED BANDWIDTH.....	148
A.5 EMISSION BANDWIDTH.....	286
A.6 BAND EDGE COMPLIANCE.....	424
A.7 CONDUCTED SPURIOUS EMISSION	489
A.8 PEAK-TO-AVERAGE POWER RATIO	498

1. SUMMARY OF TEST REPORT

1.1. Test Items

Description	smartphone
Model Name	CP3706AS
Applicant's name	Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Manufacturer's Name	Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd

1.2. Test Standards

Please refer to "4. Reference Documents"

1.3. Test Result

Pass / Fail / Please refer to "6 Test Results"

1.4. Testing Location

Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China

1.5. Project Data


Testing Start Date:	2019-11-25
Testing End Date:	2019-12-30

1.6. Signature




Lai Minghua

(Prepared this test report)



Huang Qiuqin

(Reviewed this test report)



Zhang Hao

(Approved this test report)

2. CLIENT INFORMATION

2.1. Applicant Information

Company Name: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Address /Post: Building B, Boton Science Park, Chaguang Road, Xili Town, Nanshan
District, Shenzhen
Contact Person: Emily zhang
Contact Email: zhangxuzhu@yulong.com
Telephone: 15089742056
Fax: /

2.2. Manufacturer Information

Company Name: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Address /Post: Building B, Boton Science Park, Chaguang Road, Xili Town, Nanshan
District, Shenzhen
Contact Person: Emily zhang
Contact Email: zhangxuzhu@yulong.com
Telephone: 15089742056
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	smartphone
Model Name	CP3706AS
FCC ID	R38YLCP3706AS
Frequency Bands	LTE Bands 2,4,5,7,12,13,25,26,41,66,71, CA_41C
Antenna	Integrated
Extreme vol. Limits	3.6VDC to 4.3VDC (nominal: 3.85VDC)
Extreme temp. Tolerance	-20°C to +50°C
Condition of EUT as received	No abnormality in appearance

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version	Sample Arrival Date
UT09aa	990015500002410	P1	3706AS.SPRINT.1 91220.2D	2019-11-25
UT01aa	990015570009332	P1	3706AS.SPRINT.1 91220.2D	2019-12-05
UT02aa	990015570002352	P1	3706AS.SPRINT.1 91220.2D	2019-12-05

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE2	Charger
AE1	
Model	3706AS_CA406787G
Manufacturer	CosMX
Capacitance	3980mAh
AE2	
Model	Q3W18-1U-A
Manufacturer	Ruide

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) is a model CDMA/GSM/UMTS/LTE mobile phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test.

4. REFERENCE DOCUMENTS

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-18 Edition
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-18 Edition
FCC Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS	10-1-18 Edition
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-18 Edition
FCC Part 90	PRIVATE LAND MOBILE RADIO SERVICES	10-1-18 Edition
FCC Part 95	PERSONAL RADIO SERVICES	10-1-18 Edition
FCC Part 97	AMATEUR RADIO SERVICE	10-1-18 Edition
FCC Part 101	FIXED MICROWAVE SERVICES	10-1-18 Edition
ANSI C63.26	American National Standard of Procedures for Compliance Testing of Licensed Transmitters Used in Licensed Radio Service	2015
KDB971108 D01	Power Meas License Digital Systems	v03r01

5. LABORATORY ENVIRONMENT

Shielded room did not exceed following limits along the RF testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz>60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	>2 MΩ
Ground system resistance	< 4 Ω

Fully-anechoic chamber did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18 GHz, 3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	F	Fail
	NA	Not applicable
	NM	Not measured
Location Column	A/B/C/D	The test is performed in test location A, B, C or D which are described in section 1.4 of this report

LTE Band 2

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/24.232	A.1	P
2	Field Strength of Spurious Radiation	2.1053/24.238	A.2	P
3	Frequency Stability	2.1055/24.235	A.3	P
4	Occupied Bandwidth	2.1049/24.238	A.4	P
5	Emission Bandwidth	2.1049/24.238	A.5	P
6	Band Edge Compliance	2.1051/24.238	A.6	P
7	Conducted Spurious Emission	2.1051/24.238	A.7	P
8	Peak-to-Average Power Ratio	24.232/ KDB971108 D01	A.8	P

LTE Band 4

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/27.50(d)	A.1	P
2	Field Strength of Spurious Radiation	2.1053/27.53(h)	A.2	P
3	Frequency Stability	2.1055/27.54	A.3	P
4	Occupied Bandwidth	2.1049/27.53(g)	A.4	P
5	Emission Bandwidth	2.1049/27.53(g)	A.5	P
6	Band Edge Compliance	2.1051/27.53(h)	A.6	P
7	Conducted Spurious Emission	2.1051/27.53(h)	A.7	P
8	Peak-to-Average Power Ratio	27.50(d)/ KDB971108 D01	A.8	P

LTE Band 5

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/22.913	A.1	P
2	Field Strength of Spurious Radiation	2.1053/22.917	A.2	P
3	Frequency Stability	2.1055/22.355	A.3	P
4	Occupied Bandwidth	2.1049/22.917	A.4	P
5	Emission Bandwidth	2.1049/22.917	A.5	P
6	Band Edge Compliance	2.1051/22.917	A.6	P
7	Conducted Spurious Emission	2.1051/22.917	A.7	P
8	Peak-to-Average Power Ratio	KDB971108 D01	A.8	P

LTE Band 7

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/27.50(h)	A.1	P
2	Field Strength of Spurious Radiation	2.1053/27.53(m)	A.2	P
3	Frequency Stability	2.1055/27.54	A.3	P
4	Occupied Bandwidth	2.1049/27.53(m)	A.4	P
5	Emission Bandwidth	2.1049/27.53(m)	A.5	P
6	Band Edge Compliance	2.1051/27.53(m)	A.6	P
7	Conducted Spurious Emission	2.1051/27.53(m)	A.7	P
8	Peak-to-Average Power Ratio	27.50(a)/ KDB971108 D01	A.8	P

LTE Band 12

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/27.50(c)	A.1	P
2	Field Strength of Spurious Radiation	2.1053/27.53(g)	A.2	P
3	Frequency Stability	2.1055/27.54	A.3	P
4	Occupied Bandwidth	2.1049/27.53(g)	A.4	P
5	Emission Bandwidth	2.1049/27.53(g)	A.5	P
6	Band Edge Compliance	2.1051/27.53(g)	A.6	P
7	Conducted Spurious Emission	2.1051/27.53(g)	A.7	P
8	Peak-to-Average Power Ratio	27.50(a)/ KDB971108 D01	A.8	P

LTE Band 13

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/27.50(b)	A.1	P
2	Field Strength of Spurious Radiation	2.1053/27.53(c)	A.2	P
3	Frequency Stability	2.1055/27.54	A.3	P
4	Occupied Bandwidth	2.1049/27.53(c)	A.4	P
5	Emission Bandwidth	2.1049/27.53(c)	A.5	P
6	Band Edge Compliance	2.1051/27.53(c)	A.6	P
7	Conducted Spurious Emission	2.1051/27.53(c)	A.7	P
8	Peak-to-Average Power Ratio	27.50(a)/ KDB971108 D01	A.8	P

LTE Band 25

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/24.232	A.1	P
2	Field Strength of Spurious Radiation	2.1053/24.238	A.2	P
3	Frequency Stability	2.1055/24.235	A.3	P
4	Occupied Bandwidth	2.1049/24.238	A.4	P
5	Emission Bandwidth	2.1049/24.238	A.5	P
6	Band Edge Compliance	2.1051/24.238	A.6	P
7	Conducted Spurious Emission	2.1051/24.238	A.7	P
8	Peak-to-Average Power Ratio	24.232/ KDB971108 D01	A.8	P

LTE Band 26(814MHz-824MHz)

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/90.635	A.1	P
2	Field Strength of Spurious Radiation	2.1053/90.691	A.2	P
3	Frequency Stability	2.1055/90.213	A.3	P
4	Occupied Bandwidth	2.1049/90.1215	A.4	P
5	Emission Bandwidth	2.1049/90.1215	A.5	P
6	Band Edge Compliance	2.1051/90.691	A.6	P
7	Conducted Spurious Emission	2.1051/90.691	A.7	P
8	Peak-to-Average Power Ratio	KDB971108 D01	A.8	P

LTE band 26(824MHz-849MHz)

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/22.913	A.1	P
2	Field Strength of Spurious Radiation	2.1053/22.917	A.2	P
3	Frequency Stability	2.1055/22.355	A.3	P
4	Occupied Bandwidth	2.1049/22.917	A.4	P
5	Emission Bandwidth	2.1049/22.917	A.5	P
6	Band Edge Compliance	2.1051/22.917	A.6	P
7	Conducted Spurious Emission	2.1051/22.917	A.7	P
8	Peak-to-Average Power Ratio	KDB971108 D01	A.8	P

LTE Band 41

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/27.50(h)	A.1	P
2	Field Strength of Spurious Radiation	2.1053/27.53(m)	A.2	P
3	Frequency Stability	2.1055/27.54	A.3	P
4	Occupied Bandwidth	2.1049/27.53(m)	A.4	P
5	Emission Bandwidth	2.1049/27.53(m)	A.5	P
6	Band Edge Compliance	2.1051/27.53(m)	A.6	P
7	Conducted Spurious Emission	2.1051/27.53(m)	A.7	P
8	Peak-to-Average Power Ratio	27.50(a)/ KDB971108 D01	A.8	P

LTE Band 66

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/27.50(d)	A.1	P
2	Field Strength of Spurious Radiation	2.1053/27.53(h)	A.2	P
3	Frequency Stability	2.1055/27.54	A.3	P
4	Occupied Bandwidth	2.1049/27.53(h)	A.4	P
5	Emission Bandwidth	2.1049/27.53(h)	A.5	P
6	Band Edge Compliance	2.1051/27.53(h)	A.6	P
7	Conducted Spurious Emission	2.1051/27.53(h)	A.7	P
8	Peak-to-Average Power Ratio	27.50(a)/ KDB971108 D01	A.8	P

LTE Band 71

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/27.50(c)	A.1	P
2	Field Strength of Spurious Radiation	2.1053/27.53(g)	A.2	P
3	Frequency Stability	2.1055/27.54	A.3	P
4	Occupied Bandwidth	2.1049/27.53(g)	A.4	P
5	Emission Bandwidth	2.1049/27.53(g)	A.5	P
6	Band Edge Compliance	2.1051/27.53(g)	A.6	P
7	Conducted Spurious Emission	2.1051/27.53(g)	A.7	P
8	Peak-to-Average Power Ratio	27.50(a)/ KDB971108 D01	A.8	P

LTE Band CA_41C

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/27.50(h)	A.1	P
2	Field Strength of Spurious Radiation	2.1053/27.53(m)	A.2	P
3	Frequency Stability	2.1055/27.54	A.3	P
4	Occupied Bandwidth	2.1049/27.53(m)	A.4	P
5	Emission Bandwidth	2.1049/27.53(m)	A.5	P
6	Band Edge Compliance	2.1051/27.53(m)	A.6	P
7	Conducted Spurious Emission	2.1051/27.53(m)	A.7	P
8	Peak-to-Average Power Ratio	27.50(a)/ KDB971108 D01	A.8	P

7. STATEMENT

Since the information of samples in this report is provided by the client, the laboratory is not responsible for the authenticity of sample information.

This report takes measured values as criterion of test conclusion. The test conclusion meets the limit requirements.

8. TEST EQUIPMENTS UTILIZED

NO.	Description	Type	Manufacture	Series Number	Cal Due Date
1	Test Receiver	ESR7	R&S	101676	2020-11-27
2	BiLog Antenna	3142E	ETS	00224831	2021-05-17
3	Horn Antenna	3117	ETS-lindgren	00066577	2022-04-02
4	Horn Antenna	QSH-SL-18 -26-S-20	Q-par	17013	2023-01-06
5	Antenna	BBHA 9120D	Schwarzbeck	1593	2022-12-05
6	Antenna	VUBA 9117	Schwarzbeck	207	2020-07-16
7	preamplifier	83017A	Agilent	MY39501110	/
8	Signal Generator	SMB100A	R&S	179725	2020-11-27
9	Fully Anechoic Chamber	FACT3-2.0	ETS-Lindgren	1285	2021-07-19
10	Spectrum Analyzer	FSV40	R&S	101192	2021-01-14
11	Universal Radio Communication Tester	CMW500	R&S	152499	2020-07-17
12	Universal Radio Communication Tester	CMW500	R&S	129146	2020-04-24
13	Spectrum Analyzer	FSU	R&S	101506	2020-12-13
14	Temperature Chamber	SH-241	ESPECs	92007516	2020-10-15
15	DC Power Supply	U3606A	Agilent Technologies	MY50450012	2020-11-13

Test software

Item	Name	Vesion
Radiated	EMC32	Version 10.01.00

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

Reference

FCC: CFR Part 2.1046, 22.913, 24.232, 27.50, 90.635.

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation.

This result contains peak output power and ERP/EIRP measurements for the EUT.

In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

A.1.2.2 Measurement result

LTE band 2

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)		
			QPSK	16QAM	64QAM
1.4MHz	1 RB high	1909.3	23.31	22.60	21.58
		1880.0	23.39	22.73	21.71
		1850.7	23.45	22.80	21.77
	1 RB low	1909.3	23.30	22.61	21.58
		1880.0	23.38	22.68	21.72
		1850.7	23.44	22.81	21.77
	50% RB mid	1909.3	23.46	22.46	21.44
		1880.0	23.45	22.55	21.52
		1850.7	23.50	22.62	21.62
	100% RB	1909.3	22.41	21.56	20.55
		1880.0	22.37	21.60	20.61
		1850.7	22.48	21.68	20.67
3MHz	1 RB high	1908.5	23.36	22.72	21.74
		1880.0	23.43	22.76	21.79
		1851.5	23.48	22.80	21.78
	1 RB low	1908.5	23.39	22.67	21.69
		1880.0	23.41	22.81	21.82
		1851.5	23.49	22.82	21.86
	50% RB mid	1908.5	22.48	21.64	20.65
		1880.0	22.49	21.68	20.72
		1851.5	22.55	21.74	20.76

	100% RB	1908.5	22.46	21.58	20.60
		1880.0	22.47	21.63	20.64
		1851.5	22.56	21.69	20.69
5MHz	1 RB high	1907.5	23.37	22.66	21.65
		1880.0	23.42	22.76	21.73
		1852.5	23.40	22.77	21.81
	1 RB low	1907.5	23.44	22.78	21.82
		1880.0	23.43	22.82	21.78
		1852.5	23.51	22.88	21.84
	50% RB mid	1907.5	22.47	21.58	20.57
		1880.0	22.53	21.64	20.60
		1852.5	22.59	21.71	20.71
	100% RB	1907.5	22.53	21.61	20.62
		1880.0	22.47	21.58	20.56
		1852.5	22.44	21.56	20.57
10MHz	1 RB high	1905.0	23.38	22.63	21.66
		1880.0	23.40	22.80	21.84
		1855.0	23.28	22.73	21.69
	1 RB low	1905.0	23.47	22.80	21.80
		1880.0	23.45	22.85	21.84
		1855.0	23.54	22.88	21.84
	50% RB mid	1905.0	22.54	21.62	20.61
		1880.0	22.49	21.62	20.65
		1855.0	22.50	21.60	20.57
	100% RB	1905.0	22.50	21.64	20.60
		1880.0	22.48	21.60	20.62
		1855.0	22.47	21.60	20.65
15MHz	1 RB high	1902.5	23.33	22.62	21.60
		1880.0	23.39	22.75	21.77
		1857.5	23.43	22.86	21.88
	1 RB low	1902.5	23.44	22.72	21.68
		1880.0	23.47	22.94	21.90
		1857.5	23.61	22.96	21.96
	50% RB mid	1902.5	22.51	21.62	20.67
		1880.0	22.50	21.67	20.68
		1857.5	22.45	21.60	20.60
	100% RB	1902.5	22.49	21.59	20.62
		1880.0	22.45	21.58	20.60
		1857.5	22.40	21.56	20.57

20MHz	1 RB high	1900.0	23.29	22.60	21.55
		1880.0	23.32	22.60	21.64
		1860.0	23.38	22.63	21.66
	1 RB low	1900.0	23.38	22.71	21.66
		1880.0	23.53	22.91	21.90
		1860.0	23.55	22.94	21.98
	50% RB mid	1900.0	22.47	21.60	20.56
		1880.0	22.48	21.62	20.62
		1860.0	22.42	21.56	20.52
	100% RB	1900.0	22.44	21.54	20.52
		1880.0	22.46	21.57	20.58
		1860.0	22.38	21.51	20.49

Note: Expanded measurement uncertainty is $U = 0.49$ dB, $k = 1.96$

LTE band 4

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)		
			QPSK	16QAM	64QAM
1.4MHz	1 RB high	1754.3	23.09	22.34	21.39
		1732.5	23.08	22.42	21.43
		1710.7	23.17	22.30	21.30
	1 RB low	1754.3	23.13	22.34	21.37
		1732.5	23.10	22.45	21.43
		1710.7	23.17	22.31	21.34
	50% RB mid	1754.3	23.23	22.22	21.25
		1732.5	23.20	22.27	21.32
		1710.7	23.27	22.21	21.24
	100% RB	1754.3	22.20	21.34	20.38
		1732.5	22.16	21.36	20.35
		1710.7	22.21	21.33	20.31
3MHz	1 RB high	1753.5	23.17	22.39	21.38
		1732.5	23.13	22.45	21.40
		1711.5	23.11	22.25	21.25
	1 RB low	1753.5	23.18	22.40	21.43
		1732.5	23.17	22.46	21.51
		1711.5	23.21	22.39	21.38
	50% RB mid	1753.5	22.25	21.38	20.35
		1732.5	22.25	21.39	20.36
		1711.5	22.16	21.27	20.30
	100% RB	1753.5	22.26	21.35	20.31
		1732.5	22.21	21.35	20.33
		1711.5	22.20	21.26	20.22
5MHz	1 RB high	1752.5	23.15	22.40	21.39
		1732.5	23.11	22.45	21.50
		1712.5	23.08	22.24	21.29
	1 RB low	1752.5	23.18	22.43	21.44
		1732.5	23.17	22.45	21.41
		1712.5	23.21	22.39	21.42
	50% RB mid	1752.5	22.26	21.32	20.36
		1732.5	22.26	21.38	20.38
		1712.5	22.19	21.30	20.29
	100% RB	1752.5	22.27	21.29	20.32
		1732.5	22.21	21.32	20.32
		1712.5	22.19	21.23	20.19
10MHz	1 RB high	1750.0	23.12	22.41	21.42
		1732.5	23.13	22.47	21.47

	1 RB low	1715.0	23.01	22.21	21.24
		1750.0	23.23	22.42	21.40
		1732.5	23.19	22.52	21.51
		1715.0	23.29	22.39	21.42
	50% RB mid	1750.0	22.28	21.36	20.38
		1732.5	22.27	21.36	20.40
		1715.0	22.25	21.28	20.25
	100% RB	1750.0	22.23	21.34	20.37
		1732.5	22.22	21.34	20.30
		1715.0	22.21	21.26	20.27
15MHz	1 RB high	1747.5	23.08	22.34	21.34
		1732.5	23.09	22.40	21.39
		1717.5	23.09	22.38	21.43
	1 RB low	1747.5	23.19	22.46	21.50
		1732.5	23.17	22.49	21.49
		1717.5	23.24	22.40	21.39
	50% RB mid	1747.5	22.27	21.34	20.35
		1732.5	22.26	21.41	20.45
		1717.5	22.23	21.29	20.25
	100% RB	1747.5	22.25	21.31	20.27
		1732.5	22.20	21.34	20.33
		1717.5	22.19	21.27	20.22
20MHz	1 RB high	1745.0	23.08	22.25	21.22
		1732.5	23.08	22.34	21.35
		1720.0	23.09	22.39	21.39
	1 RB low	1745.0	23.18	22.50	21.46
		1732.5	23.16	22.41	21.37
		1720.0	23.20	22.40	21.36
	50% RB mid	1745.0	22.26	21.37	20.36
		1732.5	22.26	21.39	20.37
		1720.0	22.26	21.37	20.41
	100% RB	1745.0	22.21	21.27	20.28
		1732.5	22.21	21.32	20.32
		1720.0	22.22	21.31	20.31

Note: Expanded measurement uncertainty is $U = 0.49 \text{ dB}$, $k = 1.96$

LTE band 5

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)		
			QPSK	16QAM	64QAM
1.4MHz	1 RB high	848.3	22.83	22.28	21.23
		836.5	22.94	22.30	21.27
		824.7	22.86	22.16	21.14
	1 RB low	848.3	22.89	22.31	21.27
		836.5	22.96	22.33	21.36
		824.7	22.89	22.19	21.19
	50% RB mid	848.3	22.97	22.15	21.10
		836.5	23.08	22.14	21.16
		824.7	22.98	22.01	21.03
	100% RB	848.3	22.02	21.16	20.13
		836.5	21.97	21.17	20.17
		824.7	21.93	21.04	20.01
3MHz	1 RB high	847.5	22.93	22.26	21.22
		836.5	23.00	22.39	21.37
		825.5	23.02	22.27	21.24
	1 RB low	847.5	23.05	22.42	21.45
		836.5	23.05	22.44	21.45
		825.5	22.93	22.20	21.18
	50% RB mid	847.5	22.03	21.15	20.17
		836.5	22.09	21.21	20.23
		825.5	21.99	21.08	20.05
	100% RB	847.5	21.98	21.08	20.07
		836.5	22.06	21.15	20.17
		825.5	22.09	21.19	20.14
5MHz	1 RB high	846.5	22.95	22.27	21.30
		836.5	23.00	22.37	21.32
		826.5	22.91	22.21	21.18
	1 RB low	846.5	22.99	22.30	21.35
		836.5	22.95	22.35	21.36
		826.5	22.95	22.18	21.16
	50% RB mid	846.5	22.05	21.14	20.13
		836.5	22.14	21.19	20.17
		826.5	22.13	21.19	20.22
	100% RB	846.5	21.99	21.10	20.14
		836.5	22.09	21.13	20.14
		826.5	22.09	21.14	20.16
10MHz	1 RB high	844.0	23.07	22.30	21.34
		836.5	23.03	22.38	21.41

	1 RB low	829.0	22.99	22.29	21.32
		844.0	23.13	22.37	21.36
		836.5	23.00	22.31	21.28
		829.0	22.96	22.23	21.27
	50% RB mid	844.0	22.17	21.16	20.17
		836.5	22.12	21.18	20.19
		829.0	22.12	21.18	20.15
	100% RB	844.0	22.11	21.12	20.13
		836.5	22.09	21.16	20.17
		829.0	22.09	21.17	20.15

Note: Expanded measurement uncertainty is $U = 0.49\text{dB}$, $k = 1.96$

LTE band 7

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)		
			QPSK	16QAM	64QAM
5MHz	1 RB high	2567.5	23.25	22.58	21.62
		2535.0	23.39	22.76	21.80
		2502.5	23.28	22.55	21.55
	1 RB low	2567.5	23.29	22.59	21.63
		2535.0	23.30	22.64	21.64
		2502.5	23.38	22.66	21.66
	50% RB mid	2567.5	22.38	21.48	20.47
		2535.0	22.47	21.56	20.57
		2502.5	22.46	21.53	20.56
	100% RB	2567.5	22.37	21.43	20.45
		2535.0	22.45	21.49	20.53
		2502.5	22.42	21.49	20.53
10MHz	1 RB high	2565.0	23.29	22.62	21.66
		2535.0	23.38	22.77	21.79
		2505.0	23.28	22.64	21.66
	1 RB low	2565.0	23.20	22.49	21.53
		2535.0	23.26	22.51	21.49
		2505.0	23.37	22.55	21.57
	50% RB mid	2565.0	22.30	21.41	20.45
		2535.0	22.51	21.52	20.54
		2505.0	22.34	21.44	20.47
	100% RB	2565.0	22.32	21.40	20.42
		2535.0	22.44	21.47	20.45
		2505.0	22.43	21.45	20.41
15MHz	1 RB high	2562.5	23.35	22.63	21.68
		2535.0	23.45	22.76	21.73
		2507.5	23.40	22.65	21.61
	1 RB low	2562.5	23.27	22.53	21.56
		2535.0	23.40	22.72	21.75
		2507.5	23.38	22.65	21.66
	50% RB mid	2562.5	22.36	21.44	20.44
		2535.0	22.47	21.62	20.59
		2507.5	22.32	21.46	20.51
	100% RB	2562.5	22.37	21.46	20.42
		2535.0	22.49	21.60	20.64
		2507.5	22.40	21.51	20.53
20MHz	1 RB high	2560.0	23.31	22.65	21.61

		2535.0	23.46	22.77	21.77
		2510.0	23.42	22.68	21.69
	1 RB low	2560.0	23.17	22.46	21.45
		2535.0	23.38	22.71	21.71
		2510.0	23.31	22.61	21.59
	50% RB mid	2560.0	22.39	21.47	20.47
		2535.0	22.49	21.59	20.61
		2510.0	22.40	21.53	20.48
	100% RB	2560.0	22.37	21.46	20.49
		2535.0	22.48	21.57	20.53
		2510.0	22.39	21.46	20.50

Note: Expanded measurement uncertainty is $U = 0.49$ dB, $k = 1.96$

LTE band 12

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)		
			QPSK	16QAM	64QAM
1.4MHz	1 RB high	715.3	22.94	22.16	21.19
		707.5	22.93	22.20	21.19
		699.7	22.94	22.22	21.24
	1 RB low	715.3	22.94	22.12	21.11
		707.5	22.91	22.14	21.15
		699.7	22.86	22.18	21.23
	50% RB mid	715.3	23.03	22.01	20.99
		707.5	23.00	22.04	21.05
		699.7	23.04	22.11	21.11
	100% RB	715.3	21.98	21.08	20.05
		707.5	21.93	21.07	20.10
		699.7	21.97	21.11	20.11
3MHz	1 RB high	714.5	23.03	22.23	21.21
		707.5	22.96	22.25	21.22
		700.5	22.90	22.12	21.12
	1 RB low	714.5	23.02	22.19	21.15
		707.5	22.83	22.12	21.13
		700.5	22.91	22.21	21.20
	50% RB mid	714.5	22.07	21.10	20.11
		707.5	22.02	21.16	20.16
		700.5	22.04	21.17	20.14
	100% RB	714.5	22.07	21.12	20.14
		707.5	22.00	21.08	20.09
		700.5	22.05	21.14	20.13
5MHz	1 RB high	713.5	23.02	22.32	21.45
		707.5	22.98	22.25	21.33
		701.5	22.90	22.11	21.25
	1 RB low	713.5	22.94	22.15	21.28
		707.5	22.95	22.24	21.38
		701.5	22.88	22.17	21.31
	50% RB mid	713.5	21.99	21.01	20.18
		707.5	22.04	21.08	20.25
		701.5	22.09	21.17	20.33
	100% RB	713.5	22.01	20.98	20.02
		707.5	22.04	21.09	20.08
		701.5	22.06	21.11	20.19
10MHz	1 RB high	711.0	23.06	22.29	21.38
		707.5	23.00	22.20	21.36

	1 RB low	704.0	22.99	22.31	21.48
		711.0	22.84	22.11	21.29
		707.5	22.97	22.22	21.36
		704.0	22.89	22.21	21.34
	50% RB mid	711.0	22.05	21.10	20.15
		707.5	22.08	21.12	20.19
		704.0	22.09	21.15	20.26
	100% RB	711.0	22.02	21.06	20.11
		707.5	22.02	21.11	20.23
		704.0	22.06	21.10	20.22

Note: Expanded measurement uncertainty is $U = 0.49$ dB, $k = 1.96$

LTE band 13

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)		
			QPSK	16QAM	64QAM
5MHz	1 RB high	784.5	23.03	22.37	21.37
		782.0	22.91	22.27	21.27
		779.5	22.93	22.35	21.39
	1 RB low	784.5	23.03	22.39	21.39
		782.0	22.96	22.36	21.38
		779.5	22.99	22.37	21.39
	50% RB mid	784.5	22.10	21.13	20.15
		782.0	22.10	21.22	20.26
		779.5	22.13	21.22	20.27
	100% RB	784.5	22.03	21.15	20.13
		782.0	22.07	21.20	20.19
		779.5	22.09	21.19	20.23
10MHz	1 RB high	782.0	22.99	22.36	21.32
	1 RB low	782.0	22.97	22.39	21.34
	50% RB mid	782.0	22.07	21.21	20.22
	100% RB	782.0	22.07	21.16	20.13

Note: Expanded measurement uncertainty is U = 0.49 dB, k = 1.96

LTE band 25

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)		
			QPSK	16QAM	64QAM
1.4MHz	1 RB high	1914.3	23.54	22.48	21.52
		1882.5	23.40	22.71	21.74
		1850.7	23.33	22.73	21.68
	1 RB low	1914.3	23.43	22.55	21.50
		1882.5	23.34	22.69	21.74
		1850.7	23.33	22.67	21.68
	50% RB mid	1914.3	23.51	22.44	21.41
		1882.5	23.49	22.59	21.61
		1850.7	23.43	22.56	21.52
	100% RB	1914.3	22.43	21.55	20.59
		1882.5	22.46	21.65	20.67
		1850.7	22.36	21.62	20.64
3MHz	1 RB high	1913.5	23.50	22.51	21.46
		1882.5	23.52	22.81	21.80
		1851.5	23.30	22.68	21.66
	1 RB low	1913.5	23.45	22.55	21.56
		1882.5	23.44	22.82	21.80
		1851.5	23.40	22.69	21.64
	50% RB mid	1913.5	22.45	21.54	20.54
		1882.5	22.58	21.77	20.74
		1851.5	22.37	21.65	20.65
	100% RB	1913.5	22.47	21.55	20.57
		1882.5	22.60	21.74	20.77
		1851.5	22.37	21.57	20.59
5MHz	1 RB high	1912.5	23.57	22.55	21.60
		1882.5	23.57	22.86	21.87
		1852.5	23.38	22.80	21.80
	1 RB low	1912.5	23.46	22.59	21.58
		1882.5	23.51	22.83	21.86
		1852.5	23.45	22.82	21.77
	50% RB mid	1912.5	22.50	21.55	20.52
		1882.5	22.60	21.73	20.76
		1852.5	22.37	21.64	20.60
	100% RB	1912.5	22.49	21.58	20.62
		1882.5	22.60	21.71	20.71
		1852.5	22.34	21.59	20.58
10MHz	1 RB high	1910.0	23.55	22.52	21.55
		1882.5	23.65	22.96	21.94

	1 RB low	1855.0	23.55	22.92	21.88
		1910.0	23.56	22.71	21.68
		1882.5	23.70	23.06	22.07
		1855.0	23.70	22.96	21.94
	50% RB mid	1910.0	22.54	21.57	20.57
		1882.5	22.64	21.75	20.79
		1855.0	22.43	21.59	20.63
	100% RB	1910.0	22.55	21.58	20.57
		1882.5	22.61	21.75	20.72
		1855.0	22.42	21.61	20.59
15MHz	1 RB high	1907.5	23.56	22.58	21.56
		1882.5	23.44	22.76	21.75
		1857.5	23.49	22.89	21.86
	1 RB low	1907.5	23.55	22.80	21.84
		1882.5	23.60	22.99	22.04
		1857.5	23.69	22.98	21.94
	50% RB mid	1907.5	22.56	21.55	20.57
		1882.5	22.67	21.78	20.83
		1857.5	22.58	21.72	20.68
	100% RB	1907.5	22.57	21.54	20.56
		1882.5	22.63	21.79	20.84
		1857.5	22.57	21.70	20.73
20MHz	1 RB high	1905.0	23.39	22.92	21.95
		1882.5	23.57	22.88	21.86
		1860.0	23.63	22.99	21.95
	1 RB low	1905.0	23.45	22.86	21.86
		1882.5	23.72	23.11	22.11
		1860.0	23.84	23.18	22.20
	50% RB mid	1905.0	22.42	21.65	20.60
		1882.5	22.63	21.78	20.75
		1860.0	22.56	21.72	20.73
	100% RB	1905.0	22.45	21.68	20.64
		1882.5	22.62	21.77	20.73
		1860.0	22.56	21.72	20.70

Note: Expanded measurement uncertainty is $U = 0.49 \text{ dB}$, $k = 1.96$

LTE band 26(814MHz-824MHz)

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)		
			QPSK	16QAM	64QAM
1.4MHz	1 RB high	823.3	22.56	21.62	21.08
		819.0	22.63	21.70	21.11
		814.7	22.64	21.75	21.14
	1 RB low	823.3	22.68	21.73	21.12
		819.0	22.62	21.70	21.10
		814.7	22.56	21.61	21.05
	50% RB mid	823.3	22.75	21.98	21.24
		819.0	22.70	21.97	21.22
		814.7	22.64	21.91	21.18
	100% RB	823.3	21.69	20.66	20.16
		819.0	21.65	20.61	20.11
		814.7	21.66	20.66	20.14
3MHz	1 RB high	822.5	22.65	21.70	21.08
		819.0	22.68	21.82	21.11
		815.5	22.69	21.80	20.98
	1 RB low	822.5	22.67	21.73	20.96
		819.0	22.71	21.87	21.11
		815.5	22.64	21.72	21.04
	50% RB mid	822.5	21.79	20.90	20.24
		819.0	21.74	20.85	20.16
		815.5	21.77	20.90	20.11
	100% RB	822.5	21.74	20.84	20.08
		819.0	21.71	20.82	20.18
		815.5	21.76	20.84	20.12
5MHz	1 RB high	821.5	22.68	21.98	21.28
		819.0	22.71	22.02	21.32
		816.5	22.67	21.84	21.11
	1 RB low	821.5	22.67	22.05	21.22
		819.0	22.74	22.06	21.31
		816.5	22.61	21.76	21.01
	50% RB mid	821.5	21.82	21.04	20.06
		819.0	21.75	20.98	20.11
		816.5	21.77	20.95	20.08
	100% RB	821.5	21.81	20.91	20.03
		819.0	21.78	20.85	20.01
		816.5	21.76	20.84	20.02
10MHz	1 RB high	819.0	22.73	21.92	21.08

	1 RB low	819.0	22.64	21.82	21.07
	50% RB mid	819.0	21.80	20.87	20.18
	100% RB	819.0	21.80	20.91	20.14

Note: Expanded measurement uncertainty is $U = 0.49 \text{ dB}$, $k = 1.96$

LTE band 26(824MHz-849MHz)

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)		
			QPSK	16QAM	64QAM
1.4MHz	1 RB high	848.3	22.60	21.77	20.94
		836.5	22.61	21.82	21.08
		824.7	22.55	21.67	21.01
	1 RB low	848.3	22.64	21.81	21.06
		836.5	22.66	21.81	20.99
		824.7	22.57	21.63	20.88
	50% RB mid	848.3	22.74	21.99	21.11
		836.5	22.76	21.99	21.09
		824.7	22.65	21.88	21.01
	100% RB	848.3	21.66	20.64	20.06
		836.5	21.63	20.65	20.03
		824.7	21.62	20.54	20.01
3MHz	1 RB high	847.5	22.69	21.88	21.11
		836.5	22.69	21.85	21.06
		825.5	22.74	21.79	21.03
	1 RB low	847.5	22.72	21.92	21.08
		836.5	22.69	21.94	21.11
		825.5	22.69	21.74	21.05
	50% RB mid	847.5	21.74	20.90	20.09
		836.5	21.75	20.90	20.08
		825.5	21.80	20.90	20.06
	100% RB	847.5	21.70	20.82	20.02
		836.5	21.73	20.83	20.03
		825.5	21.74	20.82	20.01
5MHz	1 RB high	846.5	22.68	21.82	21.08
		836.5	22.72	22.03	21.18
		826.5	22.67	21.83	21.12
	1 RB low	846.5	22.73	21.82	21.09
		836.5	22.75	22.08	21.26
		826.5	22.66	21.74	21.10
	50% RB mid	846.5	21.79	20.98	20.16
		836.5	21.78	20.94	20.12
		826.5	21.77	20.94	20.13
	100% RB	846.5	21.77	20.90	20.06
		836.5	21.74	20.90	20.08
		826.5	21.75	20.82	20.03
10MHz	1 RB high	844.0	22.69	21.73	21.06

		836.5	22.65	21.89	21.11
		829.0	22.62	21.73	21.05
		844.0	22.69	21.72	21.07
	1 RB low	836.5	22.65	21.89	21.10
		829.0	22.69	21.73	21.06
		844.0	21.69	20.81	20.07
	50% RB mid	836.5	21.76	20.92	20.12
		829.0	21.88	20.94	20.15
		844.0	21.67	20.75	20.08
	100% RB	836.5	21.75	20.83	20.06
		829.0	21.84	20.92	20.11
		841.5	22.69	22.16	21.32
15MHz	1 RB high	836.5	22.73	21.91	21.12
		831.5	22.68	22.13	21.28
		841.5	22.76	22.24	21.36
	1 RB low	836.5	22.79	22.04	21.11
		831.5	22.68	22.06	21.13
		841.5	21.73	20.84	20.13
	50% RB mid	836.5	21.73	20.91	20.16
		831.5	21.78	20.91	20.18
		841.5	21.68	21.15	20.26
	100% RB	836.5	21.81	20.86	20.16
		831.5	21.86	20.88	20.08

Note: Expanded measurement uncertainty is U = 0.49 dB, k = 1.96

LTE band 41
Normal Power

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)		
			QPSK	16QAM	64QAM
5MHz	1 RB high	2687.5	22.94	22.08	21.13
		2593.0	23.05	22.19	21.19
		2498.5	23.19	22.32	21.33
	1 RB low	2687.5	22.96	22.08	21.07
		2593.0	23.10	22.23	21.21
		2498.5	23.23	22.32	21.35
	50% RB mid	2687.5	21.99	21.07	20.10
		2593.0	22.14	21.20	20.23
		2498.5	22.24	21.33	20.35
	100% RB	2687.5	21.97	21.08	20.08
		2593.0	22.08	21.24	20.22
		2498.5	22.20	21.38	20.34
10MHz	1 RB high	2685.0	22.96	22.08	21.13
		2593.0	23.04	22.22	21.25
		2501.0	23.29	22.43	21.45
	1 RB low	2685.0	22.98	22.12	21.16
		2593.0	23.09	22.27	21.25
		2501.0	23.24	22.39	21.37
	50% RB mid	2685.0	22.00	21.17	20.19
		2593.0	22.12	21.23	20.26
		2501.0	22.34	21.47	20.47
	100% RB	2685.0	21.98	21.14	20.12
		2593.0	22.09	21.21	20.17
		2501.0	22.33	21.45	20.46
15MHz	1 RB high	2682.5	22.99	22.19	21.14
		2593.0	23.13	22.19	21.16
		2503.5	23.37	22.48	21.46
	1 RB low	2682.5	23.09	22.17	21.15
		2593.0	23.31	22.35	21.33
		2503.5	23.37	22.44	21.41
	50% RB mid	2682.5	22.16	21.12	20.11
		2593.0	22.23	21.19	20.17
		2503.5	22.44	21.41	20.42
	100% RB	2682.5	22.05	21.10	20.13
		2593.0	22.15	21.22	20.26
		2503.5	22.38	21.45	20.43

20MHz	1 RB high	2680.0	22.92	22.23	21.19
		2593.0	23.09	22.28	21.23
		2506.0	23.27	22.46	21.50
	1 RB low	2680.0	23.09	22.32	21.27
		2593.0	23.26	22.42	21.44
		2506.0	23.33	22.48	21.47
	50% RB mid	2680.0	22.17	21.22	20.22
		2593.0	22.21	21.29	20.26
		2506.0	22.40	21.54	20.56
	100% RB	2680.0	22.12	21.26	20.27
		2593.0	22.20	21.33	20.30
		2506.0	22.38	21.44	20.46

Note: Expanded measurement uncertainty is $U = 0.49 \text{ dB}$, $k = 1.96$

LTE band 41

HPUE

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)		
			QPSK	16QAM	64QAM
5MHz	1 RB high	2687.5	25.12	24.26	23.31
		2593.0	25.19	24.33	23.32
		2498.5	25.29	24.41	23.42
	1 RB low	2687.5	24.99	24.11	23.10
		2593.0	25.24	24.37	23.34
		2498.5	25.27	24.35	23.39
	50% RB mid	2687.5	24.06	23.14	22.17
		2593.0	24.19	23.26	22.29
		2498.5	24.39	23.48	22.50
	100% RB	2687.5	24.14	23.25	22.25
		2593.0	24.30	23.47	22.44
		2498.5	24.37	23.56	22.51
10MHz	1 RB high	2685.0	25.07	24.19	23.24
		2593.0	25.18	24.36	23.39
		2501.0	25.31	24.45	23.47
	1 RB low	2685.0	25.07	24.21	23.25
		2593.0	25.15	24.33	23.30
		2501.0	25.30	24.46	23.43
	50% RB mid	2685.0	24.03	23.19	22.22
		2593.0	24.19	23.30	22.33
		2501.0	24.41	23.54	22.53
	100% RB	2685.0	24.13	23.29	22.26
		2593.0	24.25	23.36	22.32
		2501.0	24.50	23.63	22.63
15MHz	1 RB high	2682.5	25.13	24.33	23.28
		2593.0	25.36	24.42	23.39
		2503.5	25.51	24.62	23.60
	1 RB low	2682.5	25.21	24.29	23.27
		2593.0	25.42	24.47	23.44
		2503.5	25.53	24.60	23.57
	50% RB mid	2682.5	24.32	23.28	22.27
		2593.0	24.33	23.29	22.27
		2503.5	24.59	23.56	22.57
	100% RB	2682.5	24.27	23.32	22.35
		2593.0	24.30	23.37	22.41
		2503.5	24.51	23.58	22.56

20MHz	1 RB high	2680.0	25.08	24.32	23.28
		2593.0	25.25	24.36	23.31
		2506.0	25.36	24.61	23.65
	1 RB low	2680.0	25.17	24.45	23.41
		2593.0	25.31	24.40	23.42
		2506.0	25.38	24.45	23.43
	50% RB mid	2680.0	24.27	23.30	22.30
		2593.0	24.29	23.40	22.37
		2506.0	24.55	23.64	22.67
	100% RB	2680.0	24.32	23.45	22.46
		2593.0	24.35	23.48	22.45
		2506.0	24.52	23.58	22.60

Note: Expanded measurement uncertainty is $U = 0.49$ dB, $k = 1.96$

LTE band 66

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)		
			QPSK	16QAM	64QAM
1.4MHz	1 RB high	1779.3	23.07	22.28	21.28
		1745.0	23.06	22.38	21.44
		1710.7	23.12	22.28	21.25
	1 RB low	1779.3	23.08	22.31	21.26
		1745.0	23.09	22.46	21.53
		1710.7	23.15	22.31	21.28
	50% RB mid	1779.3	23.26	22.17	21.19
		1745.0	23.18	22.24	21.25
		1710.7	23.28	22.21	21.20
	100% RB	1779.3	22.18	21.31	20.29
		1745.0	22.12	21.40	20.36
		1710.7	22.23	21.29	20.28
3MHz	1 RB high	1778.5	23.19	22.34	21.34
		1745.0	23.14	22.45	21.43
		1711.5	23.07	22.28	21.17
	1 RB low	1778.5	23.13	22.43	21.44
		1745.0	23.18	22.44	21.46
		1711.5	23.25	22.37	21.36
	50% RB mid	1778.5	22.24	21.40	20.44
		1745.0	22.27	21.40	20.43
		1711.5	22.11	21.29	20.24
	100% RB	1778.5	22.20	21.38	20.35
		1745.0	22.19	21.29	20.39
		1711.5	22.20	21.29	20.26
5MHz	1 RB high	1777.5	23.17	22.38	21.43
		1745.0	23.06	22.44	21.45
		1712.5	23.02	22.20	21.25
	1 RB low	1777.5	23.19	22.40	21.36
		1745.0	23.16	22.39	21.42
		1712.5	23.25	22.36	21.35
	50% RB mid	1777.5	22.24	21.35	20.29
		1745.0	22.28	21.37	20.34
		1712.5	22.19	21.30	20.36
	100% RB	1777.5	22.27	21.31	20.26
		1745.0	22.22	21.28	20.32
		1712.5	22.18	21.19	20.24
10MHz	1 RB high	1775.0	23.13	22.39	21.41

		1745.0	23.12	22.44	21.43
		1715.0	23.05	22.21	21.18
		1775.0	23.24	22.45	21.40
	1 RB low	1745.0	23.20	22.46	21.50
		1715.0	23.27	22.37	21.42
		1775.0	22.28	21.32	20.37
	50% RB mid	1745.0	22.28	21.32	20.34
		1715.0	22.27	21.29	20.30
		1775.0	22.23	21.38	20.30
	100% RB	1745.0	22.18	21.29	20.36
		1715.0	22.19	21.24	20.35
15MHz	1 RB high	1772.5	23.05	22.36	21.29
		1745.0	23.09	22.35	21.38
		1717.5	23.08	22.38	21.34
	1 RB low	1772.5	23.21	22.50	21.38
		1745.0	23.14	22.51	21.51
		1717.5	23.21	22.36	21.37
	50% RB mid	1772.5	22.24	21.37	20.29
		1745.0	22.25	21.41	20.40
		1717.5	22.26	21.29	20.24
	100% RB	1772.5	22.28	21.29	20.28
		1745.0	22.23	21.31	20.36
		1717.5	22.21	21.27	20.24
20MHz	1 RB high	1770.0	23.11	22.19	21.20
		1745.0	23.04	22.30	21.28
		1720.0	23.08	22.39	21.43
	1 RB low	1770.0	23.13	22.50	21.43
		1745.0	23.12	22.40	21.41
		1720.0	23.15	22.37	21.48
	50% RB mid	1770.0	22.26	21.36	20.42
		1745.0	22.27	21.39	20.41
		1720.0	22.23	21.39	20.34
	100% RB	1770.0	22.21	21.31	20.25
		1745.0	22.23	21.31	20.29
		1720.0	22.24	21.29	20.30

Note: Expanded measurement uncertainty is $U = 0.49 \text{ dB}$, $k = 1.96$

LTE band 71

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)		
			QPSK	16QAM	64QAM
5MHz	1 RB high	695.5	22.99	22.51	21.77
		680.5	22.90	22.30	21.51
		665.5	23.08	22.40	21.68
	1 RB low	695.5	22.91	22.37	21.71
		680.5	22.80	22.19	22.47
		665.5	22.99	22.23	21.45
	50% RB mid	695.5	22.03	21.12	20.11
		680.5	22.08	21.11	20.09
		665.5	22.13	21.10	20.11
	100% RB	695.5	21.98	21.00	20.02
		680.5	22.01	21.03	20.06
		665.5	22.09	21.12	20.08
10MHz	1 RB high	693	23.04	22.56	21.82
		680.5	22.95	22.35	21.56
		668	22.89	22.21	21.49
	1 RB low	693	22.92	22.38	21.72
		680.5	22.90	22.29	22.57
		668	22.87	22.11	21.33
	50% RB mid	693	22.01	21.10	20.09
		680.5	22.14	21.17	20.15
		668	21.97	20.94	19.95
	100% RB	693	21.91	20.93	19.95
		680.5	22.06	21.08	20.11
		668	21.99	21.02	19.98
15MHz	1 RB high	690.5	22.99	22.51	21.77
		680.5	23.01	22.41	21.62
		670.5	23.00	22.32	21.60
	1 RB low	690.5	22.91	22.37	21.71
		680.5	22.88	22.27	22.55
		670.5	22.95	22.19	21.41
	50% RB mid	690.5	21.98	21.07	20.06
		680.5	22.08	21.11	20.09
		670.5	22.09	21.06	20.07
	100% RB	690.5	21.99	21.01	20.03
		680.5	22.01	21.03	20.06
		670.5	22.06	21.09	20.05
20MHz	1 RB high	688	23.07	22.63	21.89

		683	22.93	22.33	21.54
		673	23.00	22.36	21.64
	1 RB low	688	22.94	22.40	21.74
		683	22.85	22.23	22.51
		673	22.95	22.16	21.38
	50% RB mid	688	22.05	21.18	20.17
		683	22.07	21.13	20.11
		673	22.07	21.05	20.06
	100% RB	688	21.99	20.98	20.00
		683	22.06	21.11	20.14
		673	22.08	21.07	20.03

Note: Expanded measurement uncertainty is $U = 0.49 \text{ dB}$, $k = 1.96$

LTE band CA-41C

Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB		SCC RB		Conducted Power(dBm)
				Size	Offset	Size	Offset	
5MHz/20M Hz	2668.3	2680.0	QPSK	1	24	1	0	24.07
				25	0	100	0	22.31
			16QAM	1	24	1	0	23.51
				25	0	100	0	21.27
			64QAM	1	24	1	0	22.82
				25	0	100	0	20.49
	2583.8	2595.5	QPSK	1	24	1	0	23.96
				25	0	100	0	22.36
			16QAM	1	24	1	0	22.89
				25	0	100	0	21.48
			64QAM	1	24	1	0	21.84
				25	0	100	0	20.51
	2499.3	2511.0	QPSK	1	24	1	0	23.84
				25	0	100	0	21.98
			16QAM	1	24	1	0	23.07
				25	0	100	0	20.96
			64QAM	1	24	1	0	22.11
				25	0	100	0	20.06
20MHz/5M Hz	2675.0	2686.7	QPSK	1	99	1	0	24.13
				100	0	25	0	22.14
			16QAM	1	99	1	0	23.04
				100	0	25	0	21.29
			64QAM	1	99	1	0	22.18
				100	0	25	0	20.45
	2590.5	2602.2	QPSK	1	99	1	0	23.66
				100	0	25	0	21.80
			16QAM	1	99	1	0	22.14
				100	0	25	0	20.18
			64QAM	1	99	1	0	21.21
				100	0	25	0	20.02
	2506.0	2517.7	QPSK	1	99	1	0	24.06
				100	0	25	0	22.72
			16QAM	1	99	1	0	23.05
				100	0	25	0	21.81
			64QAM	1	99	1	0	22.08
				100	0	25	0	20.78
10MHz/15 MHz	2670.5	2682.5	QPSK	1	49	1	0	24.25
				50	0	75	0	22.19

	2585.9	2597.9	16QAM	1	49	1	0	23.27
				50	0	75	0	21.36
			64QAM	1	49	1	0	22.32
				50	0	75	0	20.46
			QPSK	1	49	1	0	23.86
				50	0	75	0	21.86
			16QAM	1	49	1	0	22.59
				50	0	75	0	20.78
			64QAM	1	49	1	0	21.64
				50	0	75	0	20.11
	2501.3	2513.3	QPSK	1	49	1	0	23.74
				50	0	75	0	21.90
			16QAM	1	49	1	0	22.67
				50	0	75	0	20.95
			64QAM	1	49	1	0	21.81
				50	0	75	0	20.15
15MHz/10 MHz	2672.7	2684.7	QPSK	1	74	1	0	24.16
				75	0	50	0	22.21
			16QAM	1	74	1	0	23.25
				75	0	50	0	21.41
			64QAM	1	74	1	0	22.32
				75	0	50	0	20.68
	2588.1	2600.1	QPSK	1	74	1	0	23.74
				75	0	50	0	21.83
			16QAM	1	74	1	0	22.76
				75	0	50	0	20.94
			64QAM	1	74	1	0	21.83
				75	0	50	0	20.12
	2503.5	2515.5	QPSK	1	74	1	0	23.84
				75	0	50	0	21.98
			16QAM	1	74	1	0	22.77
				75	0	50	0	20.96
			64QAM	1	74	1	0	21.86
				75	0	50	0	20.16
10MHz/20 MHz	2665.6	2680.0	QPSK	1	49	1	0	24.24
				50	0	100	0	22.19
			16QAM	1	49	1	0	23.15
				50	0	100	0	21.40
			64QAM	1	49	1	0	22.27
				50	0	100	0	20.64
	2583.6	2598.0	QPSK	1	49	1	0	23.77

				16QAM	50	0	100	0	21.77	
					1	49	1	0	22.83	
					50	0	100	0	20.97	
				64QAM	1	49	1	0	21.94	
					50	0	100	0	20.16	
					QPSK	1	49	1	0	23.75
			50	0		100	0	21.94		
			16QAM	1		49	1	0	22.92	
				50	0	100	0	20.61		
				64QAM	1	49	1	0	22.03	
50	0	100	0		20.05					
20MHz/10 MHz	2670.1	2684.5	QPSK		1	99	1	0	23.61	
				100	0	50	0	22.24		
			16QAM	1	99	1	0	23.17		
				100	0	50	0	21.23		
			64QAM	1	99	1	0	22.45		
				100	0	50	0	20.48		
			2588.1	2602.5	QPSK	1	99	1	0	23.57
						100	0	50	0	21.72
					16QAM	1	99	1	0	22.64
						100	0	50	0	20.84
					64QAM	1	99	1	0	21.75
						100	0	50	0	20.11
	2506.0	2520.4	QPSK	1	99	1	0	23.64		
				100	0	50	0	22.51		
			16QAM	1	99	1	0	22.75		
				100	0	50	0	21.45		
			64QAM	1	99	1	0	21.68		
				100	0	50	0	20.55		
15MHz/15 MHz	2667.5	2682.5	QPSK	1	74	1	0	24.11		
				75	0	75	0	22.26		
			16QAM	1	74	1	0	22.69		
				75	0	75	0	21.29		
			64QAM	1	74	1	0	21.81		
				75	0	75	0	20.32		
	2585.5	2600.5	QPSK	1	74	1	0	23.96		
				75	0	75	0	22.49		
			16QAM	1	74	1	0	22.86		
				75	0	75	0	21.44		
			64QAM	1	74	1	0	21.88		
				75	0	75	0	20.32		

	2503.5	2518.5	QPSK	1	74	1	0	23.77
				75	0	75	0	22.52
			16QAM	1	74	1	0	22.64
				75	0	75	0	21.64
			64QAM	1	74	1	0	21.71
				75	0	75	0	20.51
15MHz/20 MHz	2662.9	2680.0	QPSK	1	74	1	0	24.16
				75	0	100	0	22.06
			16QAM	1	74	1	0	23.17
				75	0	100	0	21.26
			64QAM	1	74	1	0	22.28
				75	0	100	0	20.36
	2583.3	2600.4	QPSK	1	74	1	0	23.78
				75	0	100	0	22.50
			16QAM	1	74	1	0	22.54
				75	0	100	0	20.85
			64QAM	1	74	1	0	21.72
				75	0	100	0	20.16
	2503.8	2520.9	QPSK	1	74	1	0	23.86
				75	0	100	0	21.12
			16QAM	1	74	1	0	22.85
				75	0	100	0	20.88
			64QAM	1	74	1	0	21.98
				75	0	100	0	20.08
20MHz/15 MHz	2665.1	2682.2	QPSK	1	99	1	0	24.22
				100	0	75	0	21.67
			16QAM	1	99	1	0	23.22
				100	0	75	0	21.08
			64QAM	1	99	1	0	22.26
				100	0	75	0	20.32
	2585.6	2602.7	QPSK	1	99	1	0	23.61
				100	0	75	0	21.77
			16QAM	1	99	1	0	22.72
				100	0	75	0	20.98
			64QAM	1	99	1	0	21.88
				100	0	75	0	20.18
	2506.0	2523.1	QPSK	1	99	1	0	23.88
				100	0	75	0	22.16
			16QAM	1	99	1	0	22.83
				100	0	75	0	21.18
			64QAM	1	99	1	0	21.88
				1	99	1	0	21.88

				100	0	75	0	20.23
20MHz/20 MHz	2660.2	2680.0	QPSK	1	99	1	0	24.10
				100	0	100	0	22.06
			16QAM	1	99	1	0	23.19
				100	0	100	0	21.18
			64QAM	1	99	1	0	22.27
				100	0	100	0	20.36
	2583.1	2602.9	QPSK	1	99	1	0	23.76
				100	0	100	0	22.36
			16QAM	1	99	1	0	22.64
				100	0	100	0	21.45
			64QAM	1	99	1	0	21.68
				100	0	100	0	20.49
	2506.0	2525.8	QPSK	1	99	1	0	23.99
				100	0	100	0	22.36
			16QAM	1	99	1	0	23.06
				100	0	100	0	21.48
			64QAM	1	99	1	0	22.08
				100	0	100	0	20.56

Note: Expanded measurement uncertainty is $U = 0.49$ dB, $k = 1.96$

A.1.3 Radiated

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 27.50(d) specifies "Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP".


Rule Part 27.50(h)(2) specifies "Mobile stations are limited to 2.0 watts EIRP".

Rule Part 27.50(c) specifies "Portable stations (hand-held de-vices) are limited to 3 watts ERP".


Rule Part 27.50(a)(3) specifies "For mobile and portable stations transmitting in the 2305–2315 MHz band or the 2350–2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth." Rule Part 90.635(b) specifies "The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw)."

A.1.3.2 Method of Measurement

1. For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, EUT was placed on a 80 cm high non-conductive stand at a 3 meter test distance from the receive antenna. For radiated measurements performed at frequencies above 1 GHz, EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. Receiving antenna was placed on the antenna mast 3 meters from the EUT. For emission measurements. The receiving antenna shall be varied from 1 m to 4 m in height above the reference ground in a search for the relative positioning that produces the maximum radiated signal level. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

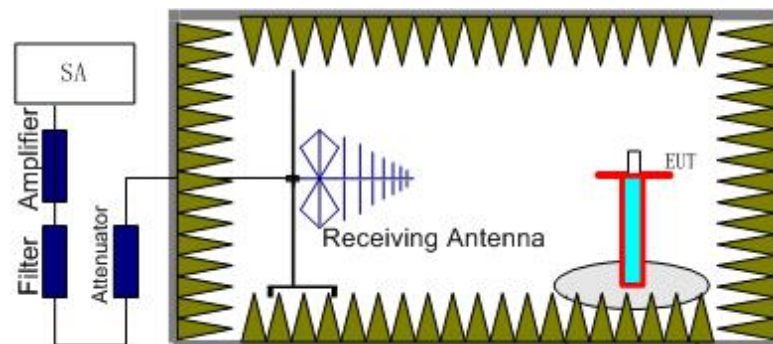

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

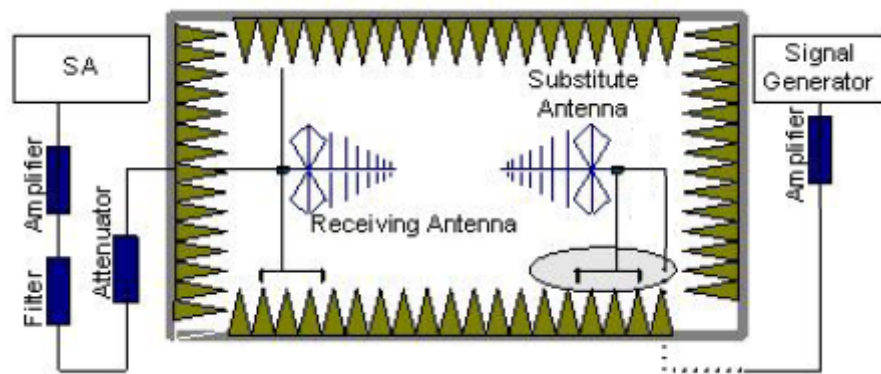

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna and adjusts the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna.

The cable loss (P_{cl}), the substitution Antenna Gain(dBi) (G_a) and the amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{Ag} - P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dB}$.

A.1.3.3 Measurement result

LTE Band 2- EIRP 24. 232(b)

Limits: ≤33dBm (2W)

LTE Band 2_1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1850.70	-15.85	-29.30	9.80	23.25	33.00	H
1880.00	-14.42	-29.40	9.80	24.78	33.00	H
1909.30	-15.80	-29.30	9.80	23.30	33.00	H

LTE Band 2_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1851.50	-15.69	-29.30	9.80	23.41	33.00	H
1880.00	-14.22	-29.40	9.80	24.98	33.00	H
1908.50	-15.77	-29.30	9.80	23.33	33.00	H

LTE Band 2_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1852.50	-15.72	-29.30	9.80	23.38	33.00	H
1880.00	-14.11	-29.40	9.80	25.09	33.00	H
1907.50	-15.82	-29.30	9.80	23.28	33.00	H

LTE Band 2_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1855.00	-15.58	-29.30	9.80	23.52	33.00	H
1880.00	-13.80	-29.40	9.80	25.40	33.00	H
1905.00	-15.46	-29.30	9.80	23.64	33.00	H

LTE Band 2_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1857.50	-16.13	-29.30	9.80	22.97	33.00	H
1880.00	-14.00	-29.40	9.80	25.20	33.00	H
1902.50	-14.84	-29.30	9.80	24.26	33.00	H

LTE Band 2_20 MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1860.00	-15.71	-29.30	9.80	23.39	33.00	H
1880.00	-14.32	-29.40	9.80	24.88	33.00	H
1900.00	-14.58	-29.30	9.80	24.52	33.00	H

LTE Band 2_1.4MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1850.70	-15.89	-29.30	9.80	23.21	33.00	H
1880.00	-14.21	-29.40	9.80	24.99	33.00	H
1909.30	-16.01	-29.30	9.80	23.09	33.00	H

LTE Band 2_3MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1851.50	-15.84	-29.30	9.80	23.26	33.00	H
1880.00	-14.58	-29.40	9.80	24.62	33.00	H
1908.50	-16.12	-29.30	9.80	22.98	33.00	H

LTE Band 2_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1852.50	-16.07	-29.30	9.80	23.03	33.00	H
1880.00	-14.37	-29.40	9.80	24.83	33.00	H
1907.50	-16.21	-29.30	9.80	22.89	33.00	H

LTE Band 2_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1855.00	-16.24	-29.30	9.80	22.86	33.00	H
1880.00	-13.98	-29.40	9.80	25.22	33.00	H
1905.00	-16.27	-29.30	9.80	22.83	33.00	H

LTE Band 2_15MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1857.50	-15.91	-29.30	9.80	23.19	33.00	H
1880.00	-13.90	-29.40	9.80	25.30	33.00	H
1902.50	-15.90	-29.30	9.80	23.20	33.00	H

LTE Band 2_20 MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1860.00	-16.22	-29.30	9.80	22.88	33.00	H
1880.00	-13.81	-29.40	9.80	25.39	33.00	H
1900.00	-15.36	-29.30	9.80	23.74	33.00	H

LTE Band 2_1.4MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1850.70	-13.87	-29.30	9.80	25.23	33.00	H
1880.00	-14.47	-29.40	9.80	24.73	33.00	H
1909.30	-14.87	-29.30	9.80	24.23	33.00	H

LTE Band 2_3MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1851.50	-14.24	-29.30	9.80	24.86	33.00	H
1880.00	-13.28	-29.40	9.80	25.92	33.00	H
1908.50	-15.11	-29.30	9.80	23.99	33.00	H

LTE Band 2_5MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1852.50	-14.48	-29.30	9.80	24.62	33.00	H
1880.00	-12.74	-29.40	9.80	26.46	33.00	H
1907.50	-14.99	-29.30	9.80	24.11	33.00	H

LTE Band 2_10MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1855.00	-13.94	-29.30	9.80	25.16	33.00	H
1880.00	-13.35	-29.40	9.80	25.85	33.00	H
1905.00	-14.95	-29.30	9.80	24.15	33.00	H

LTE Band 2_15MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1857.50	-14.27	-29.30	9.80	24.83	33.00	H
1880.00	-13.40	-29.40	9.80	25.80	33.00	H
1902.50	-14.06	-29.30	9.80	25.04	33.00	H

LTE Band 2_20 MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1860.00	-14.92	-29.30	9.80	24.18	33.00	H
1880.00	-13.41	-29.40	9.80	25.79	33.00	H
1900.00	-14.06	-29.30	9.80	25.04	33.00	H

Peak EIRP (dBm)=P_{Mea}(-12.74dBm)-(P_{cl}+P_{Ag})(-29.40dB)+G_a(9.80dB) =26.46dBm

LTE Band 4- EIRP 27.50(d)

Limits: ≤30dBm (1W)

LTE Band 4_1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1710.70	-13.25	-29.60	8.10	24.45	30.00	H
1732.50	-14.25	-29.60	8.10	23.45	30.00	H
1754.30	-14.92	-29.50	8.10	22.68	30.00	H

LTE Band 4_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1711.50	-13.82	-29.60	8.10	23.88	30.00	H
1732.50	-14.23	-29.60	8.10	23.47	30.00	H
1753.50	-14.66	-29.50	8.10	22.94	30.00	H

LTE Band 4_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1712.50	-13.78	-29.60	8.10	23.92	30.00	H
1732.50	-14.24	-29.60	8.10	23.46	30.00	H
1752.50	-15.00	-29.50	8.10	22.60	30.00	H

LTE Band 4_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1715.00	-14.00	-29.60	8.10	23.70	30.00	H
1732.50	-14.76	-29.60	8.10	22.94	30.00	H
1750.00	-14.85	-29.50	8.10	22.75	30.00	H

LTE Band 4_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1717.50	-13.97	-29.60	8.10	23.73	30.00	H
1732.50	-14.44	-29.60	8.10	23.26	30.00	H
1747.50	-14.68	-29.50	8.10	22.92	30.00	H

LTE Band 4_20MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1720.00	-13.98	-29.60	8.10	23.72	30.00	H
1732.50	-14.89	-29.60	8.10	22.81	30.00	H
1745.00	-14.26	-29.50	8.10	23.34	30.00	H

LTE Band 4_1.4MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1710.70	-13.72	-29.60	8.10	23.98	30.00	H
1732.50	-13.94	-29.60	8.10	23.76	30.00	H
1754.30	-14.38	-29.50	8.10	23.22	30.00	H

LTE Band 4_3MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1711.50	-13.40	-29.60	8.10	24.30	30.00	H
1732.50	-14.46	-29.60	8.10	23.24	30.00	H
1753.50	-14.70	-29.50	8.10	22.90	30.00	H

LTE Band 4_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1712.50	-13.46	-29.60	8.10	24.24	30.00	H
1732.50	-14.00	-29.60	8.10	23.70	30.00	H
1752.50	-14.77	-29.50	8.10	22.83	30.00	H

LTE Band 4_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1715.00	-13.79	-29.60	8.10	23.91	30.00	H
1732.50	-13.54	-29.60	8.10	24.16	30.00	H
1750.00	-14.74	-29.50	8.10	22.86	30.00	H

LTE Band 4_15MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1717.50	-13.97	-29.60	8.10	23.73	30.00	H
1732.50	-13.98	-29.60	8.10	23.72	30.00	H
1747.50	-14.43	-29.50	8.10	23.17	30.00	H

LTE Band 4_20MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1720.00	-13.74	-29.60	8.10	23.96	30.00	H
1732.50	-14.85	-29.60	8.10	22.85	30.00	H
1745.00	-13.99	-29.50	8.10	23.61	30.00	H

LTE Band 4_1.4MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1710.70	-13.92	-29.60	8.10	23.78	30.00	H
1732.50	-14.21	-29.60	8.10	23.49	30.00	H
1754.30	-14.10	-29.50	8.10	23.50	30.00	H

LTE Band 4_3MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1711.50	-14.18	-29.60	8.10	23.52	30.00	H
1732.50	-14.55	-29.60	8.10	23.15	30.00	H
1753.50	-14.83	-29.50	8.10	22.77	30.00	H

LTE Band 4_5MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1712.50	-14.40	-29.60	8.10	23.30	30.00	H
1732.50	-13.79	-29.60	8.10	23.91	30.00	H
1752.50	-14.66	-29.50	8.10	22.94	30.00	H

LTE Band 4_10MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1715.00	-13.63	-29.60	8.10	24.07	30.00	H
1732.50	-13.83	-29.60	8.10	23.87	30.00	H
1750.00	-15.00	-29.50	8.10	22.60	30.00	H

LTE Band 4_15MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1717.50	-14.76	-29.60	8.10	22.94	30.00	H
1732.50	-15.02	-29.60	8.10	22.68	30.00	H
1747.50	-14.69	-29.50	8.10	22.91	30.00	H

LTE Band 4_20MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1720.00	-14.08	-29.60	8.10	23.62	30.00	H
1732.50	-14.54	-29.60	8.10	23.16	30.00	H
1745.00	-14.14	-29.50	8.10	23.46	30.00	H

Peak EIRP (dBm)=P_{Mea}(-13.25dBm)-(P_{cl}+P_{Ag})(-29.60dB)+G_a(8.10dB) =24.45dBm

LTE Band 5- ERP 22.913(a)

Limits: ≤38.45dBm (7W)

LTE Band 5_1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
824.70	-13.68	-33.60	-0.30	2.15	17.47	38.45	H
836.50	-12.85	-33.50	-0.30	2.15	18.20	38.45	H
848.30	-12.32	-33.50	-0.30	2.15	18.73	38.45	H

LTE Band 5_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
825.50	-13.39	-33.60	-0.30	2.15	17.76	38.45	H
836.50	-12.99	-33.50	-0.30	2.15	18.06	38.45	H
847.50	-12.33	-33.50	-0.30	2.15	18.72	38.45	H

LTE Band 5_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
826.50	-13.40	-33.60	-0.30	2.15	17.75	38.45	H
836.50	-12.97	-33.50	-0.30	2.15	18.08	38.45	H
846.50	-12.14	-33.50	-0.30	2.15	18.91	38.45	H

LTE Band 5_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
829.00	-13.92	-33.60	-0.30	2.15	17.23	38.45	H
836.50	-13.17	-33.50	-0.30	2.15	17.88	38.45	H
844.00	-12.52	-33.50	-0.30	2.15	18.53	38.45	H

LTE Band 5_1.4MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
824.70	-13.58	-33.60	-0.30	2.15	17.57	38.45	H
836.50	-13.05	-33.50	-0.30	2.15	18.00	38.45	H
848.30	-12.27	-33.50	-0.30	2.15	18.78	38.45	H

LTE Band 5_3MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
825.50	-13.42	-33.60	-0.30	2.15	17.73	38.45	H
836.50	-12.55	-33.50	-0.30	2.15	18.50	38.45	H
847.50	-12.60	-33.50	-0.30	2.15	18.45	38.45	H

LTE Band 5_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
826.50	-13.60	-33.60	-0.30	2.15	17.55	38.45	H
836.50	-12.62	-33.50	-0.30	2.15	18.43	38.45	H
846.50	-12.01	-33.50	-0.30	2.15	19.04	38.45	H

LTE Band 5_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
829.00	-12.88	-33.60	-0.30	2.15	18.27	38.45	H
836.50	-12.94	-33.50	-0.30	2.15	18.11	38.45	H
844.00	-12.26	-33.50	-0.30	2.15	18.79	38.45	H

LTE Band 5_1.4MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
824.70	-13.78	-33.60	-0.30	2.15	17.37	38.45	H
836.50	-13.74	-33.50	-0.30	2.15	17.31	38.45	H
848.30	-13.34	-33.50	-0.30	2.15	17.71	38.45	H

LTE Band 5_3MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
825.50	-14.44	-33.60	-0.30	2.15	16.71	38.45	H
836.50	-13.70	-33.50	-0.30	2.15	17.35	38.45	H
847.50	-12.62	-33.50	-0.30	2.15	18.43	38.45	H

LTE Band 5_5MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
826.50	-14.22	-33.60	-0.30	2.15	16.93	38.45	H
836.50	-13.93	-33.50	-0.30	2.15	17.12	38.45	H
846.50	-13.00	-33.50	-0.30	2.15	18.05	38.45	H

LTE Band 5_10MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
829.00	-14.20	-33.60	-0.30	2.15	16.95	38.45	H
836.50	-13.13	-33.50	-0.30	2.15	17.92	38.45	H
844.00	-13.03	-33.50	-0.30	2.15	18.02	38.45	H

Peak ERP (dBm)=P_{Mea}(-12.01dBm)-(P_{cl}+P_{Ag})(-33.50dB)+G_a(-0.30dB) -2.15dB =19.04dBm

LTE Band 7- EIRP 27.50(h)(2)

Limits: ≤33 dBm (2W)

LTE Band 7_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2502.50	-14.43	-28.70	10.70	24.97	33.00	H
2535.00	-14.30	-28.60	10.70	25.00	33.00	H
2567.50	-15.65	-28.60	10.70	23.65	33.00	H

LTE Band 7_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2505.00	-15.96	-28.70	10.70	23.44	33.00	H
2535.00	-15.86	-28.60	10.70	23.44	33.00	H
2565.00	-16.45	-28.60	10.70	22.85	33.00	H

LTE Band 7_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2507.50	-16.33	-28.70	10.70	23.07	33.00	H
2535.00	-16.06	-28.60	10.70	23.24	33.00	H
2562.50	-16.68	-28.60	10.70	22.62	33.00	H

LTE Band 7_20MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2510.00	-15.74	-28.70	10.70	23.66	33.00	H
2535.00	-15.82	-28.60	10.70	23.48	33.00	H
2560.00	-16.06	-28.60	10.70	23.24	33.00	H

LTE Band 7_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2502.50	-15.07	-28.70	10.70	24.33	33.00	H
2535.00	-16.38	-28.60	10.70	22.92	33.00	H
2567.50	-16.40	-28.60	10.70	22.90	33.00	H

LTE Band 7_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2505.00	-15.03	-28.70	10.70	24.37	33.00	H
2535.00	-15.87	-28.60	10.70	23.43	33.00	H
2565.00	-15.82	-28.60	10.70	23.48	33.00	H

LTE Band 7_15MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2507.50	-15.84	-28.70	10.70	23.56	33.00	H
2535.00	-15.54	-28.60	10.70	23.76	33.00	H
2562.50	-16.26	-28.60	10.70	23.04	33.00	H

LTE Band 7_20MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2510.00	-15.58	-28.70	10.70	23.82	33.00	H
2535.00	-15.10	-28.60	10.70	24.20	33.00	H
2560.00	-14.90	-28.60	10.70	24.40	33.00	H

LTE Band 7_5MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2502.50	-16.26	-28.70	10.70	23.14	33.00	H
2535.00	-16.50	-28.60	10.70	22.80	33.00	H
2567.50	-16.67	-28.60	10.70	22.63	33.00	H

LTE Band 7_10MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2505.00	-16.01	-28.70	10.70	23.39	33.00	H
2535.00	-16.65	-28.60	10.70	22.65	33.00	H
2565.00	-15.66	-28.60	10.70	23.64	33.00	H

LTE Band 7_15MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2507.50	-15.07	-28.70	10.70	24.33	33.00	H
2535.00	-16.90	-28.60	10.70	22.40	33.00	H
2562.50	-16.07	-28.60	10.70	23.23	33.00	H

LTE Band 7_20MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2510.00	-16.41	-28.70	10.70	22.99	33.00	H
2535.00	-16.20	-28.60	10.70	23.10	33.00	H
2560.00	-15.20	-28.60	10.70	24.10	33.00	H

Peak EIRP (dBm)=P_{Mea}(-14.30dBm)-(P_{cl}+P_{Ag})(-28.60dB)+G_a(10.70dB) =25.00dBm

LTE Band 12 - ERP 27.50(c)(10)

Limits: ≤34.77dBm (3W)

LTE Band 12_1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
699.70	-20.49	-34.80	-0.80	2.15	11.36	34.77	H
707.50	-18.79	-34.70	-0.80	2.15	12.96	34.77	H
715.30	-17.46	-34.70	-0.80	2.15	14.29	34.77	H

LTE Band 12_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
700.50	-20.19	-34.80	-0.80	2.15	11.66	34.77	H
707.50	-18.92	-34.70	-0.80	2.15	12.83	34.77	H
714.50	-17.70	-34.70	-0.80	2.15	14.05	34.77	H

LTE Band 12_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
701.50	-20.25	-34.80	-0.80	2.15	11.60	34.77	H
707.50	-19.08	-34.70	-0.80	2.15	12.67	34.77	H
713.50	-17.95	-34.70	-0.80	2.15	13.80	34.77	H

LTE Band 12_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
704.00	-20.28	-34.80	-0.80	2.15	11.57	34.77	H
707.50	-19.73	-34.70	-0.80	2.15	12.02	34.77	H
711.00	-18.90	-34.70	-0.80	2.15	12.85	34.77	H

LTE Band 12_1.4MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
699.70	-20.00	-34.80	-0.80	2.15	11.85	34.77	H
707.50	-18.37	-34.70	-0.80	2.15	13.38	34.77	H
715.30	-17.37	-34.70	-0.80	2.15	14.38	34.77	H

LTE Band 12_3MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
700.50	-19.96	-34.80	-0.80	2.15	11.89	34.77	H
707.50	-18.68	-34.70	-0.80	2.15	13.07	34.77	H
714.50	-17.79	-34.70	-0.80	2.15	13.96	34.77	H

LTE Band 12_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
701.50	-19.94	-34.80	-0.80	2.15	11.91	34.77	H
707.50	-18.86	-34.70	-0.80	2.15	12.89	34.77	H
713.50	-18.20	-34.70	-0.80	2.15	13.55	34.77	H

LTE Band 12_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
704.00	-20.06	-34.80	-0.80	2.15	11.79	34.77	H
707.50	-19.58	-34.70	-0.80	2.15	12.17	34.77	H
711.00	-18.24	-34.70	-0.80	2.15	13.51	34.77	H

LTE Band 12_1.4MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
699.70	-20.77	-34.80	-0.80	2.15	11.08	34.77	H
707.50	-19.32	-34.70	-0.80	2.15	12.43	34.77	H
715.30	-17.64	-34.70	-0.80	2.15	14.11	34.77	H

LTE Band 12_3MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
700.50	-20.63	-34.80	-0.80	2.15	11.22	34.77	H
707.50	-19.54	-34.70	-0.80	2.15	12.21	34.77	H
714.50	-18.64	-34.70	-0.80	2.15	13.11	34.77	H

LTE Band 12_5MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
701.50	-20.79	-34.80	-0.80	2.15	11.06	34.77	H
707.50	-19.60	-34.70	-0.80	2.15	12.15	34.77	H
713.50	-18.51	-34.70	-0.80	2.15	13.24	34.77	H

LTE Band 12_10MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
704.00	-20.55	-34.80	-0.80	2.15	11.30	34.77	H
707.50	-20.51	-34.70	-0.80	2.15	11.24	34.77	H
711.00	-19.20	-34.70	-0.80	2.15	12.55	34.77	H

Peak ERP (dBm)=P_{Mea}(-17.37dBm)-(P_{cl}+P_{Ag})(-34.70dB)+G_a(-0.80dB) -2.15dB =14.38dBm

LTE Band 13- ERP 27.50(b)(10)

Limits: ≤34.77dBm (3W)

LTE Band 13_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
779.50	-14.57	-34.00	-0.30	2.15	16.98	34.77	H
782.00	-14.54	-34.00	-0.30	2.15	17.01	34.77	H
784.50	-14.51	-34.00	-0.30	2.15	17.04	34.77	H

LTE Band 13_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
782.00	-14.55	-34.00	-0.30	2.15	17.00	34.77	H
782.00	-14.52	-34.00	-0.30	2.15	17.03	34.77	H
782.00	-14.56	-34.00	-0.30	2.15	16.99	34.77	H

LTE Band 13_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
779.50	-14.35	-34.00	-0.30	2.15	17.20	34.77	H
782.00	-14.74	-34.00	-0.30	2.15	16.81	34.77	H
784.50	-14.66	-34.00	-0.30	2.15	16.89	34.77	H

LTE Band 13_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
782.00	-14.16	-34.00	-0.30	2.15	17.39	34.77	H
782.00	-14.31	-34.00	-0.30	2.15	17.24	34.77	H
782.00	-14.17	-34.00	-0.30	2.15	17.38	34.77	H

LTE Band 13_5MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
779.50	-14.91	-34.00	-0.30	2.15	16.64	34.77	H
782.00	-15.52	-34.00	-0.30	2.15	16.03	34.77	H
784.50	-15.51	-34.00	-0.30	2.15	16.04	34.77	H

LTE Band 13_10MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
782.00	-15.20	-34.00	-0.30	2.15	16.35	34.77	H
782.00	-14.98	-34.00	-0.30	2.15	16.57	34.77	H
782.00	-15.21	-34.00	-0.30	2.15	16.34	34.77	H

Peak ERP (dBm)=P_{Mea}(-14.16dBm)-(P_{cl}+P_{Ag})(-34.00dB)+G_a(-0.30dB) -2.15dB =17.39dBm

LTE Band 25- EIRP 24. 232(c)

Limits: ≤33dBm (2W)

LTE Band 25_1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1850.70	-16.56	-29.30	9.80	22.54	33.00	H
1882.50	-14.66	-29.40	9.80	24.54	33.00	H
1914.30	-15.31	-29.30	9.80	23.79	33.00	H

LTE Band 25_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1851.50	-16.78	-29.30	9.80	22.32	33.00	H
1882.50	-14.53	-29.40	9.80	24.67	33.00	H
1913.50	-14.91	-29.30	9.80	24.19	33.00	H

LTE Band 25_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1852.50	-16.93	-29.30	9.80	22.17	33.00	H
1882.50	-15.26	-29.40	9.80	23.94	33.00	H
1912.50	-15.14	-29.30	9.80	23.96	33.00	H

LTE Band 25_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1855.00	-16.63	-29.30	9.80	22.47	33.00	H
1882.00	-14.44	-29.40	9.80	24.76	33.00	H
1910.00	-14.40	-29.30	9.80	24.70	33.00	H

LTE Band 25_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1857.50	-14.55	-29.30	9.80	24.55	33.00	H
1882.50	-14.53	-29.40	9.80	24.67	33.00	H
1907.50	-15.15	-29.30	9.80	23.95	33.00	H

LTE Band 25_20 MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1860.00	-15.18	-29.30	9.80	23.92	33.00	H
1882.50	-15.05	-29.40	9.80	24.15	33.00	H
1905.00	-15.46	-29.30	9.80	23.64	33.00	H

LTE Band 25_1.4MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1850.70	-14.33	-29.30	9.80	24.77	33.00	H
1882.50	-15.68	-29.40	9.80	23.52	33.00	H
1914.30	-15.08	-29.30	9.80	24.02	33.00	H

LTE Band 25_3MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1851.50	-15.15	-29.30	9.80	23.95	33.00	H
1882.50	-14.93	-29.40	9.80	24.27	33.00	H
1913.50	-14.74	-29.30	9.80	24.36	33.00	H

LTE Band 25_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1852.50	-15.47	-29.30	9.80	23.63	33.00	H
1882.50	-15.44	-29.40	9.80	23.76	33.00	H
1912.50	-14.69	-29.30	9.80	24.41	33.00	H

LTE Band 25_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1855.00	-14.33	-29.30	9.80	24.77	33.00	H
1882.00	-14.47	-29.40	9.80	24.73	33.00	H
1910.00	-15.06	-29.30	9.80	24.04	33.00	H

LTE Band 25_15MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1857.50	-14.86	-29.30	9.80	24.24	33.00	H
1882.50	-14.10	-29.40	9.80	25.10	33.00	H
1907.50	-14.72	-29.30	9.80	24.38	33.00	H

LTE Band 25_20 MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1860.00	-14.46	-29.30	9.80	24.64	33.00	H
1882.50	-14.54	-29.40	9.80	24.66	33.00	H
1905.00	-14.66	-29.30	9.80	24.44	33.00	H

LTE Band 25_1.4MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1850.70	-15.06	-29.30	9.80	24.04	33.00	H
1882.50	-15.64	-29.40	9.80	23.56	33.00	H
1914.30	-16.07	-29.30	9.80	23.03	33.00	H

LTE Band 25_3MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1851.50	-15.52	-29.30	9.80	23.58	33.00	H
1882.50	-16.49	-29.40	9.80	22.71	33.00	H
1913.50	-15.69	-29.30	9.80	23.41	33.00	H

LTE Band 25_5MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1852.50	-15.77	-29.30	9.80	23.33	33.00	H
1882.50	-15.90	-29.40	9.80	23.30	33.00	H
1912.50	-14.97	-29.30	9.80	24.13	33.00	H

LTE Band 25_10MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1855.00	-14.75	-29.30	9.80	24.35	33.00	H
1882.00	-14.46	-29.40	9.80	24.74	33.00	H
1910.00	-16.24	-29.30	9.80	22.86	33.00	H

LTE Band 25_15MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1857.50	-15.75	-29.30	9.80	23.35	33.00	H
1882.50	-14.31	-29.40	9.80	24.89	33.00	H
1907.50	-14.97	-29.30	9.80	24.13	33.00	H

LTE Band 25_20 MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1860.00	-15.51	-29.30	9.80	23.59	33.00	H
1882.50	-15.04	-29.40	9.80	24.16	33.00	H
1905.00	-15.55	-29.30	9.80	23.55	33.00	H

Peak EIRP (dBm)=P_{Mea}(-14.10dBm)-(P_{cl}+P_{Ag})(-29.40dB)+G_a(9.80dB)=25.10dBm

LTE band 26(814MHz-824MHz)- ERP 90.635(b)

Limits: ≤50.00dBm (100W)

LTE band 26(814MHz-824MHz)_1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
814.70	-14.27	-33.70	-0.30	2.15	16.98	50.00	H
819.00	-14.37	-33.60	-0.30	2.15	16.78	50.00	H
823.30	-14.38	-33.60	-0.30	2.15	16.77	50.00	H

LTE band 26(814MHz-824MHz)_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
815.50	-14.29	-33.70	-0.30	2.15	16.96	50.00	H
819.00	-14.68	-33.60	-0.30	2.15	16.47	50.00	H
822.50	-14.30	-33.60	-0.30	2.15	16.85	50.00	H

LTE band 26(814MHz-824MHz)_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
816.50	-14.64	-33.70	-0.30	2.15	16.61	50.00	H
819.00	-14.24	-33.60	-0.30	2.15	16.91	50.00	H
821.50	-14.28	-33.60	-0.30	2.15	16.87	50.00	H

LTE band 26(814MHz-824MHz)_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
819.00	-14.09	-33.60	-0.30	2.15	17.06	50.00	H
819.00	-14.03	-33.60	-0.30	2.15	17.12	50.00	H
819.00	-13.90	-33.60	-0.30	2.15	17.25	50.00	H

LTE band 26(814MHz-824MHz)_1.4MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
814.70	-13.87	-33.70	-0.30	2.15	17.38	50.00	H
819.00	-14.50	-33.60	-0.30	2.15	16.65	50.00	H
823.30	-13.48	-33.60	-0.30	2.15	17.67	50.00	H

LTE band 26(814MHz-824MHz)_3MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
815.50	-13.75	-33.70	-0.30	2.15	17.50	50.00	H
819.00	-13.90	-33.60	-0.30	2.15	17.25	50.00	H
822.50	-13.74	-33.60	-0.30	2.15	17.41	50.00	H

LTE band 26(814MHz-824MHz)_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
816.50	-13.84	-33.70	-0.30	2.15	17.41	50.00	H
819.00	-14.18	-33.60	-0.30	2.15	16.97	50.00	H
821.50	-13.46	-33.60	-0.30	2.15	17.69	50.00	H

LTE band 26(814MHz-824MHz)_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
819.00	-13.49	-33.60	-0.30	2.15	17.66	50.00	H
819.00	-13.35	-33.60	-0.30	2.15	17.80	50.00	H
819.00	-13.04	-33.60	-0.30	2.15	18.11	50.00	H

LTE band 26(814MHz-824MHz)_1.4MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
814.70	-14.52	-33.70	-0.30	2.15	16.73	50.00	H
819.00	-14.82	-33.60	-0.30	2.15	16.33	50.00	H
823.30	-14.32	-33.60	-0.30	2.15	16.83	50.00	H

LTE band 26(814MHz-824MHz)_3MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
815.50	-14.31	-33.70	-0.30	2.15	16.94	50.00	H
819.00	-14.96	-33.60	-0.30	2.15	16.19	50.00	H
822.50	-14.63	-33.60	-0.30	2.15	16.52	50.00	H

LTE band 26(814MHz-824MHz)_5MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
816.50	-14.89	-33.70	-0.30	2.15	16.36	50.00	H
819.00	-14.59	-33.60	-0.30	2.15	16.56	50.00	H
821.50	-14.11	-33.60	-0.30	2.15	17.04	50.00	H

LTE band 26(814MHz-824MHz)_10MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
819.00	-14.62	-33.60	-0.30	2.15	16.53	50.00	H
819.00	-14.54	-33.60	-0.30	2.15	16.61	50.00	H
819.00	-14.07	-33.60	-0.30	2.15	17.08	50.00	H

Peak ERP (dBm)=P_{Mea}(-13.04dBm)-(P_{cl}+P_{Ag})(-33.60dB)+G_a(-0.30dB) -2.15 =18.11dBm

LTE band 26(824MHz-849MHz)- ERP 22.913(a)

Limits: ≤38.45dBm (7W)

LTE band 26(824MHz-849MHz)_1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
824.70	-12.60	-33.60	-0.30	2.15	18.55	38.45	H
836.50	-13.23	-33.50	-0.30	2.15	17.82	38.45	H
848.30	-14.07	-33.50	-0.30	2.15	16.98	38.45	H

LTE band 26(824MHz-849MHz)_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
825.50	-12.68	-33.60	-0.30	2.15	18.47	38.45	H
836.50	-13.63	-33.50	-0.30	2.15	17.42	38.45	H
847.50	-14.08	-33.50	-0.30	2.15	16.97	38.45	H

LTE band 26(824MHz-849MHz)_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
826.50	-12.75	-33.60	-0.30	2.15	18.40	38.45	H
836.50	-13.70	-33.50	-0.30	2.15	17.35	38.45	H
846.50	-14.09	-33.50	-0.30	2.15	16.96	38.45	H

LTE band 26(824MHz-849MHz)_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
829.00	-12.97	-33.60	-0.30	2.15	18.18	38.45	H
836.50	-13.61	-33.50	-0.30	2.15	17.44	38.45	H
844.00	-14.07	-33.50	-0.30	2.15	16.98	38.45	H

LTE band 26(824MHz-849MHz)_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
831.50	-13.55	-33.60	-0.30	2.15	17.60	38.45	H
836.50	-13.29	-33.50	-0.30	2.15	17.76	38.45	H
841.50	-13.93	-33.50	-0.30	2.15	17.12	38.45	H

LTE band 26(824MHz-849MHz)_1.4MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
824.70	-12.49	-33.60	-0.30	2.15	18.66	38.45	H
836.50	-13.04	-33.50	-0.30	2.15	18.01	38.45	H
848.30	-13.60	-33.50	-0.30	2.15	17.45	38.45	H

LTE band 26(824MHz-849MHz)_3MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
825.50	-12.17	-33.60	-0.30	2.15	18.98	38.45	H
836.50	-13.04	-33.50	-0.30	2.15	18.01	38.45	H
847.50	-13.73	-33.50	-0.30	2.15	17.32	38.45	H

LTE band 26(824MHz-849MHz)_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
826.50	-12.66	-33.60	-0.30	2.15	18.49	38.45	H
836.50	-13.47	-33.50	-0.30	2.15	17.58	38.45	H
846.50	-13.62	-33.50	-0.30	2.15	17.43	38.45	H

LTE band 26(824MHz-849MHz)_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
829.00	-12.79	-33.60	-0.30	2.15	18.36	38.45	H
836.50	-12.77	-33.50	-0.30	2.15	18.28	38.45	H
844.00	-13.49	-33.50	-0.30	2.15	17.56	38.45	H

LTE band 26(824MHz-849MHz)_15MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
831.50	-13.51	-33.60	-0.30	2.15	17.64	38.45	H
836.50	-12.71	-33.50	-0.30	2.15	18.34	38.45	H
841.50	-13.81	-33.50	-0.30	2.15	17.24	38.45	H

LTE band 26(824MHz-849MHz)_1.4MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
824.70	-13.38	-33.60	-0.30	2.15	17.77	38.45	H
836.50	-13.78	-33.50	-0.30	2.15	17.27	38.45	H
848.30	-14.30	-33.50	-0.30	2.15	16.75	38.45	H

LTE band 26(824MHz-849MHz)_3MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
825.50	-12.81	-33.60	-0.30	2.15	18.34	38.45	H
836.50	-13.69	-33.50	-0.30	2.15	17.36	38.45	H
847.50	-14.07	-33.50	-0.30	2.15	16.98	38.45	H

LTE band 26(824MHz-849MHz)_5MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
826.50	-13.16	-33.60	-0.30	2.15	17.99	38.45	H
836.50	-14.25	-33.50	-0.30	2.15	16.80	38.45	H
846.50	-14.18	-33.50	-0.30	2.15	16.87	38.45	H

LTE band 26(824MHz-849MHz)_10MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
829.00	-13.48	-33.60	-0.30	2.15	17.67	38.45	H
836.50	-13.90	-33.50	-0.30	2.15	17.15	38.45	H
844.00	-14.25	-33.50	-0.30	2.15	16.80	38.45	H

LTE band 26(824MHz-849MHz)_15MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
831.50	-13.92	-33.60	-0.30	2.15	17.23	38.45	H
836.50	-13.85	-33.50	-0.30	2.15	17.20	38.45	H
841.50	-14.28	-33.50	-0.30	2.15	16.77	38.45	H

Peak ERP (dBm)=P_{Mea}(-12.17dBm)-(P_{cl}+P_{Ag})(-33.60dB)+G_a(-0.30dB) -2.15=18.98dBm

Normal Power

LTE Band 41 - EIRP Part27.50(h)(2)

Limits: ≤33dBm (2W)

LTE Band 41_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2498.50	-16.48	-28.70	10.70	22.92	33.00	H
2593.00	-16.59	-28.60	10.70	22.71	33.00	H
2687.50	-15.15	-28.50	10.70	24.05	33.00	H

LTE Band 41_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2501.00	-15.92	-28.70	10.70	23.48	33.00	H
2593.00	-15.04	-28.60	10.70	24.26	33.00	H
2685.00	-15.07	-28.50	10.70	24.13	33.00	H

LTE Band 41_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2503.00	-14.65	-28.70	10.70	24.75	33.00	H
2593.00	-15.99	-28.60	10.70	23.31	33.00	H
2682.50	-15.76	-28.50	10.70	23.44	33.00	H

LTE Band 41_20MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2506.00	-15.11	-28.70	10.70	24.29	33.00	H
2593.00	-15.20	-28.60	10.70	24.10	33.00	H
2680.00	-15.15	-28.50	10.70	24.05	33.00	H

LTE Band 41_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2498.50	-15.82	-28.70	10.70	23.58	33.00	H
2593.00	-15.17	-28.60	10.70	24.13	33.00	H
2687.50	-16.04	-28.50	10.70	23.16	33.00	H

LTE Band 41_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2501.00	-14.32	-28.70	10.70	25.08	33.00	H
2593.00	-15.98	-28.60	10.70	23.32	33.00	H
2685.00	-15.91	-28.50	10.70	23.29	33.00	H

LTE Band 41_15MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2503.00	-14.62	-28.70	10.70	24.78	33.00	H
2593.00	-15.40	-28.60	10.70	23.90	33.00	H
2682.50	-15.75	-28.50	10.70	23.45	33.00	H

LTE Band 41_20 MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2506.00	-14.56	-28.70	10.70	24.84	33.00	H
2593.00	-15.19	-28.60	10.70	24.11	33.00	H
2680.00	-16.22	-28.50	10.70	22.98	33.00	H

LTE Band 41_5MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2498.50	-15.15	-28.70	10.70	24.25	33.00	H
2593.00	-16.24	-28.60	10.70	23.06	33.00	H
2687.50	-15.93	-28.50	10.70	23.27	33.00	H

LTE Band 41_10MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2501.00	-14.26	-28.70	10.70	25.14	33.00	H
2593.00	-14.90	-28.60	10.70	24.40	33.00	H
2685.00	-16.03	-28.50	10.70	23.17	33.00	H

LTE Band 41_15MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2503.00	-13.71	-28.70	10.70	25.69	33.00	H
2593.00	-15.30	-28.60	10.70	24.00	33.00	H
2682.50	-16.18	-28.50	10.70	23.02	33.00	H

LTE Band 41_20 MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2506.00	-14.17	-28.70	10.70	25.23	33.00	H
2593.00	-15.11	-28.60	10.70	24.19	33.00	H
2680.00	-15.28	-28.50	10.70	23.92	33.00	H

Peak EIRP (dBm)=P_{Mea}(-13.71dBm)-(P_{cl}+P_{Ag}) (-28.70dB)+G_a(10.70dB) =25.69dBm

HPUE

LTE Band 41 - EIRP Part27.50(h)(2)

Limits: ≤33dBm (2W)

LTE Band 41_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2498.50	-14.55	-28.70	10.70	24.85	33.00	H
2593.00	-14.78	-28.60	10.70	24.52	33.00	H
2687.50	-15.03	-28.60	10.70	24.27	33.00	H

LTE Band 41_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2501.00	-14.36	-28.70	10.70	25.04	33.00	H
2593.00	-14.08	-28.60	10.70	25.22	33.00	H
2685.00	-15.14	-28.60	10.70	24.16	33.00	H

LTE Band 41_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2503.00	-13.78	-28.70	10.70	25.62	33.00	H
2593.00	-14.87	-28.60	10.70	24.43	33.00	H
2682.50	-15.53	-28.60	10.70	23.77	33.00	H

LTE Band 41_20MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2506.00	-13.52	-28.70	10.70	25.88	33.00	H
2593.00	-15.14	-28.60	10.70	24.16	33.00	H
2680.00	-15.11	-28.60	10.70	24.19	33.00	H

LTE Band 41_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2498.50	-14.38	-28.70	10.70	25.02	33.00	H
2593.00	-14.42	-28.60	10.70	24.88	33.00	H
2687.50	-14.82	-28.60	10.70	24.48	33.00	H

LTE Band 41_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2501.00	-14.03	-28.70	10.70	25.37	33.00	H
2593.00	-14.47	-28.60	10.70	24.83	33.00	H
2685.00	-15.28	-28.60	10.70	24.02	33.00	H

LTE Band 41_15MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2503.00	-13.16	-28.70	10.70	26.24	33.00	H
2593.00	-14.71	-28.60	10.70	24.59	33.00	H
2682.50	-16.10	-28.60	10.70	23.20	33.00	H

LTE Band 41_20 MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2506.00	-13.87	-28.70	10.70	25.53	33.00	H
2593.00	-14.83	-28.60	10.70	24.47	33.00	H
2680.00	-14.99	-28.60	10.70	24.31	33.00	H

LTE Band 41_5MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2498.50	-14.69	-28.70	10.70	24.71	33.00	H
2593.00	-15.43	-28.60	10.70	23.87	33.00	H
2687.50	-15.86	-28.60	10.70	23.44	33.00	H

LTE Band 41_10MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2501.00	-13.62	-28.70	10.70	25.78	33.00	H
2593.00	-15.07	-28.60	10.70	24.23	33.00	H
2685.00	-16.58	-28.60	10.70	22.72	33.00	H

LTE Band 41_15MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2503.00	-14.03	-28.70	10.70	25.37	33.00	H
2593.00	-15.13	-28.60	10.70	24.17	33.00	H
2682.50	-15.10	-28.60	10.70	24.20	33.00	H

LTE Band 41_20 MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2506.00	-13.04	-28.70	10.70	26.36	33.00	H
2593.00	-15.74	-28.60	10.70	23.56	33.00	H
2680.00	-14.18	-28.60	10.70	25.12	33.00	H

Peak EIRP (dBm)=P_{Mea}(-13.04dBm)-(P_{cl}+P_{Ag}) (-28.70dB)+G_a(10.70dB) =26.36dBm

LTE Band 66- EIRP 27.50(d)

Limits: ≤30dBm (1W)

LTE Band 66_1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1710.70	-12.72	-29.60	8.10	24.98	30.00	H
1745.00	-12.50	-29.50	8.10	25.10	30.00	H
1779.30	-13.91	-29.50	8.10	23.69	30.00	H

LTE Band 66_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1711.50	-13.00	-29.60	8.10	24.70	30.00	H
1745.00	-13.14	-29.50	8.10	24.46	30.00	H
1778.50	-13.40	-29.50	8.10	24.20	30.00	H

LTE Band 66_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1712.50	-12.99	-29.60	8.10	24.71	30.00	H
1745.00	-12.85	-29.50	8.10	24.75	30.00	H
1777.50	-13.08	-29.50	8.10	24.52	30.00	H

LTE Band 66_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1715.00	-12.96	-29.60	8.10	24.74	30.00	H
1745.00	-12.52	-29.50	8.10	25.08	30.00	H
1775.00	-12.91	-29.50	8.10	24.69	30.00	H

LTE Band 66_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1717.50	-12.52	-29.60	8.10	25.18	30.00	H
1745.00	-12.53	-29.50	8.10	25.07	30.00	H
1772.53	-12.33	-29.50	8.10	25.27	30.00	H

LTE Band 66_20MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1720.00	-12.79	-29.60	8.10	24.91	30.00	H
1745.00	-12.54	-29.50	8.10	25.06	30.00	H
1770.00	-11.53	-29.50	8.10	26.07	30.00	H

LTE Band 66_1.4MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1710.70	-12.44	-29.60	8.10	25.26	30.00	H
1745.00	-12.65	-29.50	8.10	24.95	30.00	H
1779.30	-13.07	-29.50	8.10	24.53	30.00	H

LTE Band 66_3MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1711.50	-12.56	-29.60	8.10	25.14	30.00	H
1745.00	-12.51	-29.50	8.10	25.09	30.00	H
1778.50	-13.19	-29.50	8.10	24.41	30.00	H

LTE Band 66_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1712.50	-12.48	-29.60	8.10	25.22	30.00	H
1745.00	-12.98	-29.50	8.10	24.62	30.00	H
1777.50	-12.79	-29.50	8.10	24.81	30.00	H

LTE Band 66_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1715.00	-11.94	-29.60	8.10	25.76	30.00	H
1745.00	-12.71	-29.50	8.10	24.89	30.00	H
1775.00	-11.98	-29.50	8.10	25.62	30.00	H

LTE Band 66_15MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1717.50	-12.74	-29.60	8.10	24.96	30.00	H
1745.00	-11.24	-29.50	8.10	26.36	30.00	H
1772.53	-12.69	-29.50	8.10	24.91	30.00	H

LTE Band 66_20MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1720.00	-12.38	-29.60	8.10	25.32	30.00	H
1745.00	-11.67	-29.50	8.10	25.93	30.00	H
1770.00	-11.95	-29.50	8.10	25.65	30.00	H

LTE Band 66_1.4MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1710.70	-12.06	-29.60	8.10	25.64	30.00	H
1745.00	-13.98	-29.50	8.10	23.62	30.00	H
1779.30	-14.29	-29.50	8.10	23.31	30.00	H

LTE Band 66_3MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1711.50	-12.88	-29.60	8.10	24.82	30.00	H
1745.00	-13.90	-29.50	8.10	23.70	30.00	H
1778.50	-13.59	-29.50	8.10	24.01	30.00	H

LTE Band 66_5MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1712.50	-12.85	-29.60	8.10	24.85	30.00	H
1745.00	-13.87	-29.50	8.10	23.73	30.00	H
1777.50	-12.68	-29.50	8.10	24.92	30.00	H

LTE Band 66_10MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1715.00	-13.29	-29.60	8.10	24.41	30.00	H
1745.00	-13.49	-29.50	8.10	24.11	30.00	H
1775.00	-12.40	-29.50	8.10	25.20	30.00	H

LTE Band 66_15MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1717.50	-12.19	-29.60	8.10	25.51	30.00	H
1745.00	-12.99	-29.50	8.10	24.61	30.00	H
1772.53	-11.74	-29.50	8.10	25.86	30.00	H

LTE Band 66_20MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1720.00	-12.90	-29.60	8.10	24.80	30.00	H
1745.00	-12.61	-29.50	8.10	24.99	30.00	H
1770.00	-11.68	-29.50	8.10	25.92	30.00	H

Peak EIRP (dBm)=P_{Mea}(-11.24dBm)-(P_{cl}+P_{Ag})(-29.50dB)+G_a(8.10dB) =26.36dBm

LTE Band 71- ERP 27.50(c)(10)

Limits: ≤34.77 dBm (3W)

LTE Band 71_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
665.50	-18.03	-36.70	-0.80	665.50	15.72	34.77	H
680.50	-19.31	-36.80	-0.80	680.50	14.54	34.77	H
695.50	-19.55	-34.80	-0.80	695.50	12.30	34.77	H

LTE Band 71_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
668.00	-17.91	-36.70	-0.80	2.15	15.84	34.77	H
680.50	-18.95	-36.80	-0.80	2.15	14.90	34.77	H
693.00	-18.64	-34.80	-0.80	2.15	13.21	34.77	H

LTE Band 71_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
670.50	-17.77	-36.70	-0.80	2.15	15.98	34.77	H
680.50	-19.17	-36.80	-0.80	2.15	14.68	34.77	H
690.50	-19.11	-34.80	-0.80	2.15	12.74	34.77	H

LTE Band 71_20MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
673.00	-18.25	-36.70	-0.80	2.15	15.50	34.77	H
683.00	-19.30	-36.80	-0.80	2.15	14.55	34.77	H
688.00	-18.64	-34.80	-0.80	2.15	13.21	34.77	H

LTE Band 71_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
665.50	-18.21	-36.70	-0.80	2.15	15.54	34.77	H
680.50	-20.51	-36.80	-0.80	2.15	13.34	34.77	H
695.50	-20.47	-34.80	-0.80	2.15	11.38	34.77	H

LTE Band 71_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
668.00	-17.85	-36.70	-0.80	2.15	15.90	34.77	H
680.50	-19.66	-36.80	-0.80	2.15	14.19	34.77	H
693.00	-19.67	-34.80	-0.80	2.15	12.18	34.77	H

LTE Band 71_15MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
670.50	-17.71	-36.70	-0.80	2.15	16.04	34.77	H
680.50	-19.65	-36.80	-0.80	2.15	14.20	34.77	H
690.50	-19.11	-34.80	-0.80	2.15	12.74	34.77	H

LTE Band 71_20MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
673.00	-18.09	-36.70	-0.80	2.15	15.66	34.77	H
683.00	-19.34	-36.80	-0.80	2.15	14.51	34.77	H
688.00	-18.76	-34.80	-0.80	2.15	13.09	34.77	H

LTE Band 71_5MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
665.50	-18.15	-36.70	-0.80	2.15	15.60	34.77	H
680.50	-20.82	-36.80	-0.80	2.15	13.03	34.77	H
695.50	-20.61	-34.80	-0.80	2.15	11.24	34.77	H

LTE Band 71_10MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
668.00	-18.00	-36.70	-0.80	2.15	15.75	34.77	H
680.50	-19.56	-36.80	-0.80	2.15	14.29	34.77	H
693.00	-19.87	-34.80	-0.80	2.15	11.98	34.77	H

LTE Band 71_15MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
670.50	-17.84	-36.70	-0.80	2.15	15.91	34.77	H
680.50	-19.19	-36.80	-0.80	2.15	14.66	34.77	H
690.50	-19.42	-34.80	-0.80	2.15	12.43	34.77	H

LTE Band 71_20MHz_64QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
673.00	-17.92	-36.70	-0.80	2.15	15.83	34.77	H
683.00	-19.11	-36.80	-0.80	2.15	14.74	34.77	H
688.00	-18.53	-34.80	-0.80	2.15	13.32	34.77	H

Peak ERP (dBm)=P_{Mea}(-17.71dBm)-(P_{cl}+P_{Ag})(-36.70dB)+G_a(-0.80dB) -2.15dB =16.04dBm

LTE Band CA_41C - EIRP Part27.50(h)(2)

Limits: ≤33dBm (2W)

LTE Band CA_41C_5MHz+20MHz_QPSK

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2499.30	2511.00	-17.29	-28.70	10.70	22.11	33.00	H
2583.80	2595.50	-18.38	-28.60	10.70	20.92	33.00	H
2668.30	2680.00	-20.86	-28.50	10.70	18.34	33.00	H

LTE Band CA_41C_10MHz+20MHz_QPSK

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2501.50	2515.90	-17.54	-28.70	10.70	21.86	33.00	H
2583.60	2598.00	-18.61	-28.60	10.70	20.69	33.00	H
2665.60	2680.00	-20.64	-28.60	10.70	18.66	33.00	H

LTE Band CA_41C_15MHz+20MHz_QPSK

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2503.80	2520.90	-17.26	-28.70	10.70	22.14	33.00	H
2583.30	2600.40	-18.53	-28.60	10.70	20.77	33.00	H
2662.90	2680.00	-20.76	-28.60	10.70	18.54	33.00	H

LTE Band CA_41C_20MHz+5MHz_QPSK

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2506.00	2517.70	-12.87	-28.70	10.70	26.53	33.00	H
2590.50	2602.20	-13.72	-28.60	10.70	25.58	33.00	H
2675.00	2686.70	-15.79	-28.60	10.70	23.51	33.00	H

LTE Band CA_41C_20MHz+10MHz_QPSK

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2506.00	2520.40	-21.33	-28.70	10.70	18.07	33.00	H
2588.10	2602.50	-22.95	-28.60	10.70	16.35	33.00	H
2670.10	2684.50	-24.86	-28.60	10.70	14.44	33.00	H

LTE Band CA_41C_20MHz+15MHz_QPSK

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2506.00	2523.10	-18.97	-28.70	10.70	20.43	33.00	H
2585.60	2602.70	-20.25	-28.60	10.70	19.05	33.00	H
2665.10	2682.20	-22.38	-28.60	10.70	16.92	33.00	H

LTE Band CA_41C_15MHz+15MHz_QPSK

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2503.50	2518.50	-17.47	-28.70	10.70	21.93	33.00	H
2585.50	2600.50	-18.74	-28.60	10.70	20.56	33.00	H
2667.50	2682.50	-20.89	-28.60	10.70	18.41	33.00	H

LTE Band CA_41C_20MHz+20MHz_QPSK

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2506.00	2525.80	-17.46	-28.70	10.70	21.94	33.00	H
2583.10	2602.90	-18.71	-28.60	10.70	20.59	33.00	H
2660.20	2680.00	-20.82	-28.60	10.70	18.48	33.00	H

LTE Band CA_41C_15MHz+10MHz_QPSK

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2503.50	2515.50	-19.01	-28.70	10.70	20.39	33.00	H
2588.10	2600.10	-20.25	-28.60	10.70	19.05	33.00	H
2672.70	2684.70	-22.44	-28.60	10.70	16.86	33.00	H

LTE Band CA_41C_10MHz+15MHz_QPSK

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2501.30	2513.30	-17.40	-28.70	10.70	22.00	33.00	H
2585.90	2597.90	-18.61	-28.60	10.70	20.69	33.00	H
2670.50	2682.50	-20.98	-28.60	10.70	18.32	33.00	H

LTE Band CA_41C_5MHz+20MHz_16QAM

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2499.30	2511.00	-14.79	-28.70	10.70	24.61	33.00	H
2583.80	2595.50	-14.44	-28.60	10.70	24.86	33.00	H
2668.30	2680.00	-18.45	-28.50	10.70	20.75	33.00	H

LTE Band CA_41C_10MHz+20MHz_16QAM

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2501.50	2515.90	-15.61	-28.70	10.70	23.79	33.00	H
2583.60	2598.00	-17.48	-28.60	10.70	21.82	33.00	H
2665.60	2680.00	-17.84	-28.60	10.70	21.46	33.00	H

LTE Band CA_41C_15MHz+20MHz_16QAM

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2503.80	2520.90	-15.94	-28.70	10.70	23.46	33.00	H
2583.30	2600.40	-17.48	-28.60	10.70	21.82	33.00	H
2662.90	2680.00	-17.93	-28.60	10.70	21.37	33.00	H

LTE Band CA_41C_20MHz+5MHz_16QAM

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2506.00	2517.70	-13.38	-28.70	10.70	26.02	33.00	H
2590.50	2602.20	-14.60	-28.60	10.70	24.70	33.00	H
2675.00	2686.70	-14.55	-28.60	10.70	24.75	33.00	H

LTE Band CA_41C_20MHz+10MHz_16QAM

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2506.00	2520.40	-19.93	-28.70	10.70	19.47	33.00	H
2588.10	2602.50	-21.43	-28.60	10.70	17.87	33.00	H
2670.10	2684.50	-22.27	-28.60	10.70	17.03	33.00	H

LTE Band CA_41C_20MHz+15MHz_16QAM

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2506.00	2523.10	-16.52	-28.70	10.70	22.88	33.00	H
2585.60	2602.70	-19.03	-28.60	10.70	20.27	33.00	H
2665.10	2682.20	-19.62	-28.60	10.70	19.68	33.00	H

LTE Band CA_41C_15MHz+15MHz_16QAM

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2503.50	2518.50	-16.05	-28.70	10.70	23.35	33.00	H
2585.50	2600.50	-17.54	-28.60	10.70	21.76	33.00	H
2667.50	2682.50	-18.11	-28.60	10.70	21.19	33.00	H

LTE Band CA_41C_20MHz+20MHz_16QAM

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2506.00	2525.80	-15.92	-28.70	10.70	23.48	33.00	H
2583.10	2602.90	-17.47	-28.60	10.70	21.83	33.00	H
2660.20	2680.00	-18.32	-28.60	10.70	20.98	33.00	H

LTE Band CA_41C_15MHz+10MHz_16QAM

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2503.50	2515.50	-19.79	-28.70	10.70	19.61	33.00	H
2588.10	2600.10	-21.03	-28.60	10.70	18.27	33.00	H
2672.70	2684.70	-21.69	-28.60	10.70	17.61	33.00	H

LTE Band CA_41C_10MHz+15MHz_16QAM

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2501.30	2513.30	-16.07	-28.70	10.70	23.33	33.00	H
2585.90	2597.90	-16.49	-28.60	10.70	22.81	33.00	H
2670.50	2682.50	-19.03	-28.60	10.70	20.27	33.00	H

LTE Band CA_41C_5MHz+20MHz_64QAM

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2499.30	2511.00	-14.84	-28.70	10.70	24.56	33.00	H
2583.80	2595.50	-14.78	-28.60	10.70	24.52	33.00	H
2668.30	2680.00	-18.95	-28.50	10.70	20.25	33.00	H

LTE Band CA_41C_10MHz+20MHz_64QAM

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2501.50	2515.90	-16.83	-28.70	10.70	22.57	33.00	H
2583.60	2598.00	-19.22	-28.60	10.70	20.08	33.00	H
2665.60	2680.00	-19.28	-28.60	10.70	20.02	33.00	H

LTE Band CA_41C_15MHz+20MHz_64QAM

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2503.80	2520.90	-16.20	-28.70	10.70	23.20	33.00	H
2583.30	2600.40	-17.54	-28.60	10.70	21.76	33.00	H
2662.90	2680.00	-19.15	-28.60	10.70	20.15	33.00	H

LTE Band CA_41C_20MHz+5MHz_64QAM

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2506.00	2517.70	-14.89	-28.70	10.70	24.51	33.00	H
2590.50	2602.20	-15.83	-28.60	10.70	23.47	33.00	H
2675.00	2686.70	-15.93	-28.60	10.70	23.37	33.00	H

LTE Band CA_41C_20MHz+10MHz_64QAM

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2506.00	2520.40	-24.48	-28.70	10.70	14.92	33.00	H
2588.10	2602.50	-22.30	-28.60	10.70	17.00	33.00	H
2670.10	2684.50	-23.16	-28.60	10.70	16.14	33.00	H

LTE Band CA_41C_20MHz+15MHz_64QAM

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2506.00	2523.10	-17.12	-28.70	10.70	22.28	33.00	H
2585.60	2602.70	-20.43	-28.60	10.70	18.87	33.00	H
2665.10	2682.20	-20.55	-28.60	10.70	18.75	33.00	H

LTE Band CA_41C_15MHz+15MHz_64QAM

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2503.50	2518.50	-16.82	-28.70	10.70	22.58	33.00	H
2585.50	2600.50	-18.89	-28.60	10.70	20.41	33.00	H
2667.50	2682.50	-18.90	-28.60	10.70	20.40	33.00	H

LTE Band CA_41C_20MHz+20MHz_64QAM

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2506.00	2525.80	-17.00	-28.70	10.70	22.40	33.00	H
2583.10	2602.90	-18.01	-28.60	10.70	21.29	33.00	H
2660.20	2680.00	-19.07	-28.60	10.70	20.23	33.00	H

LTE Band CA_41C_15MHz+10MHz_64QAM

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2503.50	2515.50	-20.72	-28.70	10.70	18.68	33.00	H
2588.10	2600.10	-22.04	-28.60	10.70	17.26	33.00	H
2672.70	2684.70	-22.96	-28.60	10.70	16.34	33.00	H

LTE Band CA_41C_10MHz+15MHz_64QAM

Frequency(MHz)	Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2501.30	2513.30	-17.19	-28.70	10.70	22.21	33.00	H
2585.90	2597.90	-17.69	-28.60	10.70	21.61	33.00	H
2670.50	2682.50	-20.05	-28.60	10.70	19.25	33.00	H

Peak EIRP (dBm)=P_{Mea}(-12.87dBm)-(P_{cl}+P_{Ag})(-28.70dB)+G_a(10.70dB)=26.53dBm

ANALYZER SETTINGS:

RBW = VBW = 8MHz for occupied bandwidths equal to or less than 5MHz.

RBW = VBW = 20MHz for occupied bandwidths equal to or greater than 10MHz.

Note: The maximum value of expanded measurement uncertainty for this test item is U =

2.90dB(30MHz-3GHz)/3.50dB(3GHz-18GHz)/3.90dB(18GHz-26.5GHz), k = 2

Note: Both of Vertical and Horizontal polarizations are evaluated, but only the worst case is recorded in this report.

A.2 FIELD STRENGTH OF SPURIOUS RADIATION

Reference

FCC: CFR 2.1053, 22.917, 24.238, 27.53, 90.691.


A.2.1 Measurement Method

This measurement is carried out in fully-anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz as outlined in Part 22.917, 24.238, 27.53(h) and 90.691. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE Bands 2, 4, 5, 7,12,13,25,26,41,66,71,CA_41C.

The procedure of radiated spurious emissions is as follows:

1. For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, EUT was placed on a 80 cm high non-conductive stand at a 3 meter test distance from the receive antenna. For radiated measurements performed at frequencies above 1 GHz, EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. Receiving antenna was placed on the antenna mast 3 meters from the EUT. For emission measurements. The receiving antenna shall be varied from 1 m to 4 m in height above the reference ground in a search for the relative positioning that produces the maximum radiated signal level. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

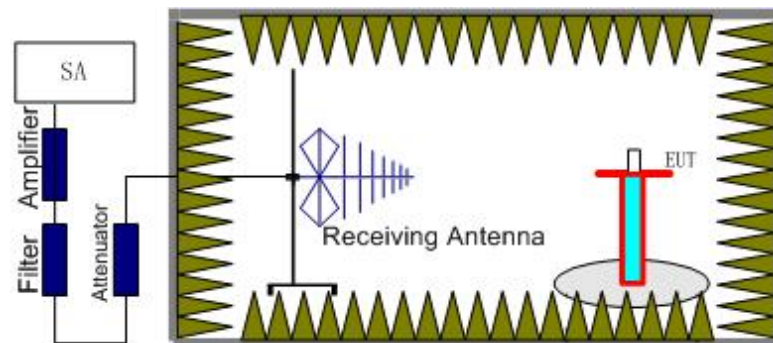

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

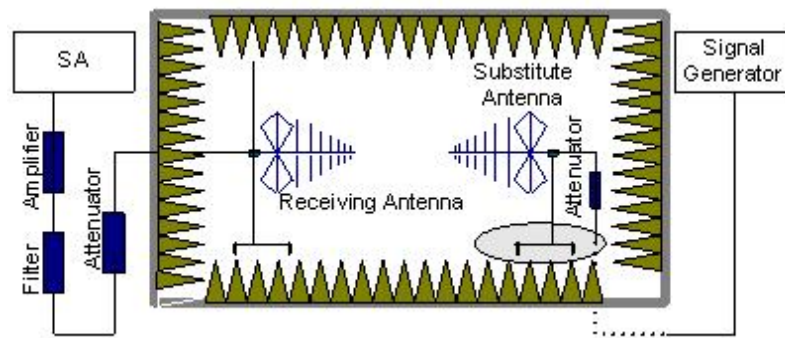

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna and adjusts the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain(dBi) (G_a) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dB}$.

A.2.2 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the LTE Bands 2, 4, 5, 7, 12, 13, 25, 26, 41, 66, 71, CA_41C. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the LTE Bands 2, 4, 5, 7, 12, 13, 25, 26, 41, 66, 71, CA_41C into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

Only worst case result is given below.

LTE Band 2, 1.4MHz, QPSK, Channel 18607

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2950.40	-47.59	1.00	11.50	-37.09	-13.00	H
5550.50	-47.25	1.40	13.10	-35.55	-13.00	H
9251.50	-42.58	2.00	11.20	-33.38	-13.00	H
11101.50	-41.13	2.50	10.50	-33.13	-13.00	H
12951.50	-42.58	2.50	13.30	-31.78	-13.00	V
14802.00	-40.38	2.70	12.40	-30.68	-13.00	H

LTE Band 2, 1.4MHz, QPSK, Channel 18900

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2964.80	-47.89	1.00	11.50	-37.39	-13.00	H
5638.50	-45.25	1.30	13.10	-33.45	-13.00	H
9397.50	-45.53	2.10	11.20	-36.43	-13.00	H
11277.00	-43.14	2.50	10.50	-35.14	-13.00	H
13157.50	-38.83	2.40	13.30	-27.93	-13.00	H
15036.50	-35.84	2.40	12.40	-25.84	-13.00	H

LTE Band 2, 1.4MHz, QPSK, Channel 19193

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2978.40	-48.05	1.00	11.50	-37.55	-13.00	V
5726.50	-47.07	1.50	13.10	-35.47	-13.00	H
9544.00	-42.92	2.50	10.50	-34.92	-13.00	H
11453.50	-44.32	2.60	11.00	-35.92	-13.00	H
13362.50	-37.81	2.30	12.40	-27.71	-13.00	V
15271.00	-43.62	2.70	15.60	-30.72	-13.00	H

LTE Band 2, 1.4MHz, 16QAM, Channel 18607

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2929.60	-47.93	1.00	11.50	-37.43	-13.00	H
5550.50	-48.13	1.40	13.10	-36.43	-13.00	H
7401.50	-45.94	1.90	11.30	-36.54	-13.00	H
11102.00	-39.99	2.50	10.50	-31.99	-13.00	H
12951.50	-41.75	2.50	13.30	-30.95	-13.00	H
14802.00	-42.66	2.70	12.40	-32.96	-13.00	H

LTE Band 2, 1.4MHz, 16QAM, Channel 18900

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2948.00	-47.45	1.00	11.50	-36.95	-13.00	H
5639.50	-47.90	1.30	13.10	-36.10	-13.00	H
7518.00	-45.51	1.80	11.30	-36.01	-13.00	H
9397.50	-41.66	2.10	11.20	-32.56	-13.00	H
13157.00	-38.37	2.40	13.30	-27.47	-13.00	V
15036.50	-38.56	2.40	12.40	-28.56	-13.00	H

LTE Band 2, 1.4MHz, 16QAM, Channel 19193

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2897.33	-47.22	1.00	11.50	-36.72	-13.00	H
5726.50	-49.10	1.50	13.10	-37.50	-13.00	H
9544.50	-41.71	2.10	11.20	-32.61	-13.00	H
11453.00	-45.63	2.60	11.00	-37.23	-13.00	H
13362.50	-41.56	2.50	12.40	-31.66	-13.00	V
15271.00	-47.61	2.70	15.60	-34.71	-13.00	H

LTE Band 2, 1.4MHz, 64QAM, Channel 18607

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2957.07	-47.86	1.00	11.50	-37.36	-13.00	H
5551.00	-45.57	1.30	13.10	-33.77	-13.00	H
9251.00	-45.63	2.00	11.20	-36.43	-13.00	H
11101.50	-44.82	2.50	10.50	-36.82	-13.00	H
12952.00	-43.78	2.50	13.30	-32.98	-13.00	V
14802.00	-44.27	2.70	12.40	-34.57	-13.00	H

LTE Band 2, 1.4MHz, 64QAM, Channel 18900

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2926.67	-46.70	1.00	11.50	-36.20	-13.00	H
5639.00	-47.51	1.30	13.10	-35.71	-13.00	H
9398.00	-44.94	2.10	11.20	-35.84	-13.00	H
11277.50	-46.50	2.60	10.50	-38.60	-13.00	V
13157.50	-45.64	2.40	13.30	-34.74	-13.00	H
15036.50	-38.21	2.40	12.40	-28.21	-13.00	V

LTE Band 2, 1.4MHz, 64QAM, Channel 19193

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2908.80	-47.69	1.00	11.50	-37.19	-13.00	H
5726.50	-48.15	1.50	13.10	-36.55	-13.00	H
9544.00	-46.10	2.10	11.20	-37.00	-13.00	H
11453.00	-46.28	2.60	11.00	-37.88	-13.00	H
13362.50	-39.70	2.50	12.40	-29.80	-13.00	V
15271.50	-47.07	2.70	15.60	-34.17	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.90\text{dB}(30\text{MHz}-3\text{GHz})/3.50\text{dB}(3\text{GHz}-18\text{GHz})/3.90\text{dB}(18\text{GHz}-26.5\text{GHz})$, $k = 2$

LTE Band 4, 1.4MHz QPSK, Channel 19957

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2964.80	-47.41	1.00	11.50	-36.91	-13.00	H
6841.00	-50.77	1.40	13.10	-39.07	-13.00	H
8551.00	-46.33	2.00	12.00	-36.33	-13.00	H
10261.50	-46.54	2.10	10.80	-37.84	-13.00	H
13682.50	-42.64	2.50	12.40	-32.74	-13.00	V
15392.50	-50.03	2.40	15.60	-36.83	-13.00	H

LTE Band 4, 1.4MHz, QPSK, Channel 20175

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2905.33	-47.23	1.00	11.50	-36.73	-13.00	V
8660.50	-41.82	2.00	12.00	-31.82	-13.00	H
10392.50	-46.26	2.30	10.80	-37.76	-13.00	H
12125.00	-46.05	2.60	12.60	-36.05	-13.00	V
13857.00	-43.58	2.20	11.90	-33.88	-13.00	H
15589.50	-50.49	2.70	15.60	-37.59	-13.00	H

LTE Band 4, 1.4MHz, QPSK, Channel 20393

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2930.13	-47.56	1.00	11.50	-37.06	-13.00	H
7015.50	-53.73	1.80	12.00	-43.53	-13.00	H
8769.50	-48.49	1.90	11.60	-38.79	-13.00	H
10523.00	-47.16	2.20	10.80	-38.56	-13.00	H
12277.50	-50.14	2.60	13.80	-38.94	-13.00	V
14031.50	-46.94	2.50	11.90	-37.54	-13.00	H

LTE Band 4, 1.4MHz, 16QAM, Channel 19957

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2917.07	-48.24	1.00	11.50	-37.74	-13.00	V
6841.00	-50.67	1.80	12.00	-40.47	-13.00	H
8552.00	-47.07	2.00	12.00	-37.07	-13.00	H
10262.00	-47.13	2.10	10.80	-38.43	-13.00	H
13682.00	-43.23	2.50	12.40	-33.33	-13.00	H
15393.00	-51.35	2.40	15.60	-38.15	-13.00	V

LTE Band 4, 1.4MHz, 16QAM, Channel 20175

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2930.93	-47.75	1.00	11.50	-37.25	-13.00	H
5196.00	-49.10	1.60	12.50	-38.20	-13.00	H
8660.00	-45.11	2.00	12.00	-35.11	-13.00	H
12124.50	-47.88	2.50	12.40	-37.98	-13.00	V
13857.00	-45.55	2.20	11.90	-35.85	-13.00	H
15589.00	-49.68	2.70	15.60	-36.78	-13.00	V

LTE Band 4, 1.4MHz, 16QAM, Channel 20393

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2980.80	-47.74	1.00	11.50	-37.24	-13.00	V
8769.50	-48.76	1.90	11.60	-39.06	-13.00	H
10523.00	-50.12	2.20	10.80	-41.52	-13.00	V
12277.00	-52.09	2.60	13.80	-40.89	-13.00	V
14031.00	-46.97	2.50	11.90	-37.57	-13.00	H
15785.50	-53.66	2.40	15.60	-40.46	-13.00	H

LTE Band 4, 1.4MHz, 64QAM, Channel 19957

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2925.07	-47.85	1.00	11.50	-37.35	-13.00	H
5131.00	-53.12	1.60	12.50	-42.22	-13.00	H
6841.00	-54.46	1.80	12.00	-44.26	-13.00	H
8551.50	-48.62	2.00	12.00	-38.62	-13.00	H
10262.00	-49.36	2.10	10.80	-40.66	-13.00	H
13682.00	-46.13	2.50	12.40	-36.23	-13.00	H

LTE Band 4, 1.4MHz, 64QAM, Channel 20175

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2949.87	-47.34	1.00	11.50	-36.84	-13.00	H
5196.50	-50.57	1.60	12.50	-39.67	-13.00	H
8660.50	-46.57	2.00	12.00	-36.57	-13.00	H
12124.50	-49.53	2.50	12.40	-39.63	-13.00	V
13856.50	-46.01	2.20	11.90	-36.31	-13.00	H
15589.00	-52.08	2.70	15.60	-39.18	-13.00	V

LTE Band 4, 1.4MHz, 64QAM, Channel 20393

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2815.73	-46.75	1.00	11.50	-36.25	-13.00	V
8769.00	-50.62	1.90	11.60	-40.92	-13.00	V
10522.50	-46.44	2.20	10.80	-37.84	-13.00	H
12277.00	-52.54	2.60	13.80	-41.34	-13.00	H
14030.50	-50.76	2.50	11.90	-41.36	-13.00	H
15784.50	-53.07	2.40	15.60	-39.87	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.90\text{dB}(30\text{MHz}-3\text{GHz})/3.50\text{dB}(3\text{GHz}-18\text{GHz})/3.90\text{dB}(18\text{GHz}-26.5\text{GHz})$, $k = 2$

LTE Band 5, 1.4MHz, QPSK, Channel 20407

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2948.00	-47.98	1.00	11.50	-39.63	-13.00	H
3296.50	-62.10	1.10	12.20	-53.15	-13.00	H
5720.00	-65.16	1.50	13.10	-55.71	-13.00	H
7070.50	-63.70	1.90	12.00	-55.75	-13.00	H
8420.50	-62.14	1.80	12.00	-54.09	-13.00	V
9661.00	-61.20	2.20	11.20	-54.35	-13.00	H

LTE Band 5, 1.4MHz, QPSK, Channel 20525

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2904.53	-47.32	1.00	11.50	-38.97	-13.00	V
3343.50	-61.47	1.10	12.20	-52.52	-13.00	H
6397.50	-63.62	1.60	12.40	-54.97	-13.00	V
7130.00	-63.79	1.80	12.00	-55.74	-13.00	V
8038.50	-62.23	1.80	11.30	-54.88	-13.00	V
9212.50	-62.06	2.10	11.60	-54.71	-13.00	V

LTE Band 5, 1.4MHz, QPSK, Channel 20643

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2952.00	-47.44	1.00	11.50	-39.09	-13.00	H
3391.00	-56.98	1.10	12.20	-48.03	-13.00	H
4239.00	-63.76	1.20	12.40	-54.71	-13.00	H
5935.00	-63.34	1.50	13.10	-53.89	-13.00	H
8349.00	-62.75	1.80	12.00	-54.70	-13.00	V
9251.50	-59.83	2.10	11.60	-52.48	-13.00	V

LTE Band 5, 1.4MHz, 16QAM, Channel 20407

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2962.13	-47.64	1.00	11.50	-39.29	-13.00	H
6399.50	-63.73	1.60	12.40	-55.08	-13.00	H
7219.00	-62.45	1.90	12.00	-54.50	-13.00	H
7930.50	-60.76	1.90	11.30	-53.51	-13.00	V
8656.50	-63.00	2.00	12.00	-55.15	-13.00	V
9568.50	-61.09	2.20	11.20	-54.24	-13.00	V

LTE Band 5, 1.4MHz, 16QAM, Channel 20525

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2927.73	-47.75	1.00	11.50	-39.40	-13.00	V
3344.00	-58.97	1.10	12.20	-50.02	-13.00	H
6479.00	-63.06	1.70	12.40	-54.51	-13.00	H
7505.00	-62.44	1.80	11.30	-55.09	-13.00	H
8377.00	-62.33	1.80	12.00	-54.28	-13.00	V
9454.00	-60.91	2.10	11.20	-53.96	-13.00	V

LTE Band 5, 1.4MHz, 16QAM, Channel 20643

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2954.13	-47.97	1.00	11.50	-39.62	-13.00	H
3391.00	-57.14	1.10	12.20	-48.19	-13.00	H
4239.00	-63.45	1.20	12.40	-54.40	-13.00	H
7472.50	-61.90	1.90	11.30	-54.65	-13.00	V
8436.00	-62.66	2.10	12.00	-54.91	-13.00	H
9621.50	-60.59	2.20	11.20	-53.74	-13.00	V

LTE Band 5, 1.4MHz, 64QAM, Channel 20407

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2924.80	-48.34	1.00	11.50	-39.99	-13.00	V
3297.00	-63.30	1.10	12.20	-54.35	-13.00	H
6281.50	-63.76	1.60	12.40	-55.11	-13.00	V
7204.00	-62.46	1.90	12.00	-54.51	-13.00	V
8420.50	-62.15	1.80	12.00	-54.10	-13.00	V
9666.50	-60.19	2.20	11.20	-53.34	-13.00	V

LTE Band 5, 1.4MHz, 64QAM, Channel 20525

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2878.13	-47.41	1.00	11.50	-39.06	-13.00	V
3344.00	-60.42	1.10	12.20	-51.47	-13.00	H
6142.00	-64.68	1.60	13.10	-55.33	-13.00	V
7350.00	-62.19	1.90	11.30	-54.94	-13.00	H
8549.50	-62.36	2.00	12.00	-54.51	-13.00	V
9576.50	-61.12	2.10	11.20	-54.17	-13.00	H

LTE Band 5, 1.4MHz, 64QAM, Channel 20643

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2938.13	-47.60	1.00	11.50	-39.25	-13.00	H
3391.50	-57.96	1.10	12.20	-49.01	-13.00	H
6324.00	-63.79	1.60	12.40	-55.14	-13.00	H
7226.00	-62.08	1.90	12.00	-54.13	-13.00	V
8415.50	-61.63	1.80	12.00	-53.58	-13.00	V
9566.00	-61.24	2.10	11.20	-54.29	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is U = 2.90dB(30MHz-3GHz)/3.50dB(3GHz-18GHz)/3.90dB(18GHz-26.5GHz), k = 2

LTE Band 7, 5 MHz, QPSK, Channel 20775

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2952.27	-48.03	1.00	11.50	-37.53	-25.00	H
7501.00	-52.92	1.80	11.30	-43.42	-25.00	H
10002.00	-45.57	2.00	11.30	-36.27	-25.00	H
12502.00	-49.82	2.40	13.80	-38.42	-25.00	H
15002.50	-45.23	2.50	12.40	-35.33	-25.00	H
17502.50	-47.29	3.30	12.80	-37.79	-25.00	V

LTE Band 7, 5 MHz, QPSK, Channel 21100

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2949.60	-47.59	1.00	11.50	-37.09	-25.00	H
7599.00	-53.69	1.80	11.30	-44.19	-25.00	H
10131.50	-41.23	2.20	11.30	-32.13	-25.00	H
12664.50	-49.93	2.60	13.80	-38.73	-25.00	H
15197.00	-51.96	2.50	12.40	-42.06	-25.00	H
17730.50	-49.31	3.60	12.80	-40.11	-25.00	V

LTE Band 7, 5 MHz, QPSK, Channel 21425

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2944.00	-47.48	1.00	11.50	-36.98	-25.00	V
7696.00	-52.55	1.80	11.30	-43.05	-25.00	H
10262.00	-43.48	2.10	10.80	-34.78	-25.00	H
12827.00	-47.88	2.70	13.30	-37.28	-25.00	H
15393.00	-58.53	2.40	15.60	-45.33	-25.00	H
17958.00	-43.38	3.20	6.20	-40.38	-25.00	V

LTE Band 7, 5 MHz, 16QAM, Channel 20775

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2956.53	-47.66	1.00	11.50	-37.16	-25.00	H
7500.50	-51.93	1.80	11.30	-42.43	-25.00	H
10001.50	-45.31	2.00	11.30	-36.01	-25.00	H
12502.00	-49.29	2.40	13.80	-37.89	-25.00	H
15002.00	-43.20	2.40	12.40	-33.20	-25.00	H
17503.00	-47.39	3.30	12.80	-37.89	-25.00	V

LTE Band 7, 5 MHz, 16QAM, Channel 21100

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2964.80	-48.04	1.00	11.50	-37.54	-25.00	V
5065.50	-58.51	1.20	12.50	-47.21	-25.00	H
10131.50	-43.26	2.20	11.30	-34.16	-25.00	H
12664.50	-50.00	2.60	13.80	-38.80	-25.00	H
15197.00	-46.79	2.40	12.40	-36.79	-25.00	H
17730.50	-50.23	3.60	12.80	-41.03	-25.00	V

LTE Band 7, 5 MHz, 16QAM, Channel 21425

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2957.60	-47.45	1.00	11.50	-36.95	-25.00	H
7696.50	-58.06	2.40	15.60	-44.86	-25.00	V
10261.50	-44.22	2.10	10.80	-35.52	-25.00	H
12827.00	-49.99	2.70	13.30	-39.39	-25.00	H
15392.00	-53.97	2.40	15.60	-40.77	-25.00	H
17957.50	-40.28	3.20	6.20	-37.28	-25.00	V

LTE Band 7, 5 MHz, 64QAM, Channel 20775

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2955.20	-47.82	1.00	11.50	-37.32	-25.00	H
5001.00	-58.55	1.30	12.50	-47.35	-25.00	H
10002.00	-51.50	2.40	13.80	-40.10	-25.00	H
12502.00	-52.05	2.40	13.80	-40.65	-25.00	H
15002.00	-52.08	2.50	12.40	-42.18	-25.00	H
17503.50	-53.37	2.90	14.50	-41.77	-25.00	V

LTE Band 7, 5 MHz, 64QAM, Channel 21100

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2906.67	-47.76	1.00	11.50	-37.26	-25.00	H
5065.50	-59.24	1.30	12.50	-48.04	-25.00	H
10131.50	-47.33	2.20	11.30	-38.23	-25.00	H
12664.50	-51.47	2.60	13.80	-40.27	-25.00	H
15198.00	-54.02	2.50	12.40	-44.12	-25.00	H
17731.00	-50.16	3.60	12.80	-40.96	-25.00	V

LTE Band 7, 5 MHz, 64QAM, Channel 21425

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2952.00	-48.12	1.00	11.50	-37.62	-25.00	V
7696.00	-55.41	1.90	11.30	-46.01	-25.00	V
10261.50	-42.55	2.10	10.80	-33.85	-25.00	H
12827.00	-48.75	2.70	13.30	-38.15	-25.00	H
15393.00	-57.08	2.40	15.60	-43.88	-25.00	H
17957.50	-43.02	3.20	6.20	-40.02	-25.00	V

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.90\text{dB}(30\text{MHz}-3\text{GHz})/3.50\text{dB}(3\text{GHz}-18\text{GHz})/3.90\text{dB}(18\text{GHz}-26.5\text{GHz})$, $k = 2$

LTE Band 12, 1.4MHz, QPSK, Channel 23017

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2908.53	-47.97	1.00	11.50	-39.62	-13.00	H
3574.50	-63.58	1.10	12.20	-54.63	-13.00	H
4698.00	-65.03	1.30	12.50	-55.98	-13.00	H
6456.50	-62.39	1.70	12.40	-53.84	-13.00	H
8130.50	-60.27	2.20	11.30	-53.32	-13.00	H
9194.00	-61.47	2.10	11.60	-54.12	-13.00	V

LTE Band 12, 1.4MHz, QPSK, Channel 23095

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2948.27	-47.74	1.00	11.50	-39.39	-13.00	H
3534.50	-62.70	1.20	12.20	-53.85	-13.00	H
4087.00	-65.19	1.30	12.40	-56.24	-13.00	H
4629.00	-65.39	1.30	12.50	-56.34	-13.00	H
6739.00	-63.11	1.60	12.00	-54.86	-13.00	V
9212.50	-60.36	2.10	11.60	-53.01	-13.00	V

LTE Band 12, 1.4MHz, QPSK, Channel 23173

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2903.20	-47.04	1.00	11.50	-38.69	-13.00	V
3495.50	-61.89	1.10	12.20	-52.94	-13.00	H
4631.50	-65.15	1.30	12.50	-56.10	-13.00	V
5962.50	-64.89	1.50	13.10	-55.44	-13.00	H
7091.00	-63.30	1.90	12.00	-55.35	-13.00	V
8308.00	-62.58	1.80	12.00	-54.53	-13.00	V

LTE Band 12, 1.4MHz, 16QAM, Channel 23017

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2948.00	-47.82	1.00	11.50	-39.47	-13.00	H
3496.50	-62.53	1.10	12.20	-53.58	-13.00	H
4026.50	-65.61	1.20	12.40	-56.56	-13.00	V
5330.50	-65.31	1.30	13.10	-55.66	-13.00	H
6493.00	-63.42	1.70	12.40	-54.87	-13.00	V
7530.00	-61.98	1.80	11.30	-54.63	-13.00	H

LTE Band 12, 1.4MHz 16QAM, Channel 23095

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2964.27	-47.49	1.00	11.50	-39.14	-13.00	H
4065.50	-64.70	1.30	12.40	-55.75	-13.00	V
4949.50	-62.78	1.30	12.50	-53.73	-13.00	H
6469.50	-62.89	1.70	12.40	-54.34	-13.00	V
7703.00	-62.01	1.80	11.30	-54.66	-13.00	V
8717.00	-60.93	1.90	11.60	-53.38	-13.00	V

LTE Band 12, 1.4MHz, 16QAM, Channel 23173

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2954.13	-47.21	1.00	11.50	-38.86	-13.00	H
3574.00	-64.68	1.10	12.20	-55.73	-13.00	H
4094.50	-65.49	1.20	12.40	-56.44	-13.00	H
5017.50	-64.86	1.30	12.50	-55.81	-13.00	V
6455.50	-62.80	1.70	12.40	-54.25	-13.00	V
7314.50	-62.02	1.70	11.30	-54.57	-13.00	V

LTE Band 12, 1.4MHz, 64QAM, Channel 23017

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2963.73	-47.96	1.00	11.50	-39.61	-13.00	H
3574.50	-63.73	1.10	12.20	-54.78	-13.00	H
4631.00	-64.50	1.30	12.50	-55.45	-13.00	H
6318.50	-63.13	1.60	12.40	-54.48	-13.00	H
7684.00	-61.50	1.80	11.30	-54.15	-13.00	V
8764.00	-61.79	1.90	11.60	-54.24	-13.00	V

LTE Band 12, 1.4MHz 64QAM, Channel 23095

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2968.00	-45.92	1.00	11.50	-37.57	-13.00	V
3535.00	-63.89	1.10	12.20	-54.94	-13.00	H
4949.50	-64.17	1.30	12.50	-55.12	-13.00	H
6419.00	-62.61	1.60	12.40	-53.96	-13.00	H
7381.00	-62.09	1.90	11.30	-54.84	-13.00	H
7925.00	-61.54	1.90	11.30	-54.29	-13.00	V

LTE Band 12, 1.4MHz, 64QAM, Channel 23173

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2902.67	-47.64	1.00	11.50	-39.29	-13.00	H
3310.50	-64.21	1.10	12.20	-55.26	-13.00	V
4172.00	-66.05	1.20	12.40	-57.00	-13.00	V
6300.50	-62.56	1.60	12.40	-53.91	-13.00	V
7986.00	-61.79	1.90	11.30	-54.54	-13.00	V
9034.00	-61.22	2.20	11.60	-53.97	-13.00	V

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.90\text{dB}(30\text{MHz}-3\text{GHz})/3.50\text{dB}(3\text{GHz}-18\text{GHz})/3.90\text{dB}(18\text{GHz}-26.5\text{GHz})$, $k = 2$

LTE Band 13, 5 MHz, QPSK, Channel 23205

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1604.17	-54.99	0.70	8.10	-49.74	-40.00	V
4017.50	-65.12	1.20	12.40	-56.07	-13.00	V
5807.50	-64.14	1.40	13.10	-54.59	-13.00	H
7134.00	-63.38	1.80	12.00	-55.33	-13.00	V
8763.50	-60.85	1.90	11.60	-53.30	-13.00	V
9424.50	-60.77	2.10	11.20	-53.82	-13.00	V

LTE Band 13, 5 MHz, QPSK, Channel 23230

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1559.43	-51.01	0.70	8.10	-45.76	-40.00	V
4010.00	-64.92	1.20	12.40	-55.87	-13.00	V
4679.00	-65.14	1.30	12.50	-56.09	-13.00	V
5878.50	-64.40	1.50	13.10	-54.95	-13.00	H
7122.50	-61.55	1.90	12.00	-53.60	-13.00	H
8243.00	-61.34	1.90	11.30	-54.09	-13.00	V

LTE Band 13, 5 MHz, QPSK, Channel 23255

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1564.57	-51.89	0.70	8.10	-46.64	-40.00	V
3129.00	-61.77	1.00	11.50	-53.42	-13.00	H
4448.00	-65.54	1.20	12.50	-56.39	-13.00	V
5228.00	-63.98	1.80	12.50	-55.43	-13.00	V
6365.00	-64.65	1.60	12.40	-56.00	-13.00	V
7314.50	-62.17	1.70	11.30	-54.72	-13.00	V

LTE Band 13, 5 MHz, 16QAM, Channel 23205

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1606.37	-55.21	0.70	8.10	-49.96	-40.00	H
3886.50	-64.01	1.20	12.40	-54.96	-13.00	H
4743.50	-65.13	1.30	12.50	-56.08	-13.00	V
5529.00	-64.51	1.40	13.10	-54.96	-13.00	V
6428.00	-62.28	1.60	12.40	-53.63	-13.00	V
7282.00	-61.84	1.90	12.00	-53.89	-13.00	V

LTE Band 13, 5 MHz, 16QAM, Channel 23230

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1559.43	-52.00	0.70	8.10	-46.75	-40.00	V
4679.00	-64.00	1.30	12.50	-54.95	-13.00	V
5459.00	-64.50	1.40	13.10	-54.95	-13.00	H
6431.00	-63.32	1.60	12.40	-54.67	-13.00	V
7309.50	-60.85	1.70	11.30	-53.40	-13.00	V
8459.00	-62.72	2.10	12.00	-54.97	-13.00	H

LTE Band 13, 5 MHz, 16QAM, Channel 23255

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1564.57	-52.38	0.70	8.10	-47.13	-40.00	V
4694.50	-63.87	1.30	12.50	-54.82	-13.00	H
5298.50	-64.74	1.60	13.10	-55.39	-13.00	H
6280.50	-62.85	1.60	12.40	-54.20	-13.00	V
7387.00	-61.40	1.70	11.30	-53.95	-13.00	V
8387.50	-62.44	1.80	12.00	-54.39	-13.00	V

LTE Band 13, 5 MHz, 64QAM, Channel 23205

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1608.93	-55.14	0.70	8.10	-49.89	-40.00	V
4728.50	-64.78	1.30	12.50	-55.73	-13.00	V
5524.00	-65.58	1.40	13.10	-56.03	-13.00	H
6411.00	-62.54	1.60	12.40	-53.89	-13.00	H
7935.50	-61.26	1.90	11.30	-54.01	-13.00	V
9429.50	-60.86	2.10	11.20	-53.91	-13.00	V

LTE Band 13, 5 MHz, 64QAM, Channel 23230

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1609.67	-54.89	0.70	8.10	-49.64	-40.00	H
4594.00	-64.67	1.30	12.50	-55.62	-13.00	V
5192.50	-64.34	1.60	12.50	-55.59	-13.00	H
6433.00	-63.56	1.60	12.40	-54.91	-13.00	H
7390.50	-62.66	1.90	11.30	-55.41	-13.00	V
8390.50	-62.14	1.80	12.00	-54.09	-13.00	V

LTE Band 13, 5 MHz, 64QAM, Channel 23255

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1564.20	-52.47	0.70	8.10	-47.22	-40.00	V
3129.00	-60.88	1.10	11.50	-52.63	-13.00	H
4694.00	-61.67	1.30	12.50	-52.62	-13.00	H
5746.50	-65.65	1.50	13.10	-56.20	-13.00	H
6826.50	-62.66	1.80	12.00	-54.61	-13.00	H
8668.50	-61.76	2.00	12.00	-53.91	-13.00	V

Note: The maximum value of expanded measurement uncertainty for this test item is U = 2.90dB(30MHz-3GHz)/3.50dB(3GHz-18GHz)/3.90dB(18GHz-26.5GHz), k = 2

LTE Band 25, 1.4MHz, QPSK, Channel 26047

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2945.60	-47.74	1.00	11.50	-37.24	-13.00	H
5551.00	-44.39	1.40	13.10	-32.69	-13.00	H
7401.50	-49.01	1.90	11.30	-39.61	-13.00	H
9251.50	-45.17	2.00	11.20	-35.97	-13.00	H
11102.00	-41.23	2.50	10.50	-33.23	-13.00	H
14802.50	-44.10	2.70	12.40	-34.40	-13.00	H

LTE Band 25, 1.4MHz, QPSK, Channel 26365

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2917.60	-47.92	1.00	11.50	-37.42	-13.00	H
5646.00	-47.31	1.30	13.10	-35.51	-13.00	H
9410.50	-45.51	2.10	11.20	-36.41	-13.00	H
11292.50	-35.87	2.60	10.50	-27.97	-13.00	H
13174.50	-47.93	2.40	13.30	-37.03	-13.00	H
15057.00	-45.57	2.50	12.40	-35.67	-13.00	H

LTE Band 25, 1.4MHz, QPSK, Channel 26683

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2942.93	-48.00	1.00	11.50	-37.50	-13.00	H
5741.00	-48.45	1.50	13.10	-36.85	-13.00	H
9569.50	-46.96	2.10	11.20	-37.86	-13.00	H
11483.00	-38.12	2.60	11.00	-29.72	-13.00	H
13397.00	-43.20	2.50	12.40	-33.30	-13.00	H
15311.50	-48.37	2.70	15.60	-35.47	-13.00	H

LTE Band 25, 1.4MHz, 16QAM, Channel 26047

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2974.13	-47.36	1.00	11.50	-36.86	-13.00	H
5551.00	-45.53	1.40	13.10	-33.83	-13.00	H
7401.00	-49.04	1.90	11.30	-39.64	-13.00	H
9251.00	-46.38	2.00	11.20	-37.18	-13.00	H
11101.50	-42.63	2.50	10.50	-34.63	-13.00	H
14802.50	-44.52	2.70	12.40	-34.82	-13.00	H

LTE Band 25, 1.4MHz, 16QAM, Channel 26365

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2956.80	-47.99	1.00	11.50	-37.49	-13.00	V
5646.00	-47.95	1.30	13.10	-36.15	-13.00	H
9410.50	-47.52	2.10	11.20	-38.42	-13.00	H
11292.50	-39.13	2.60	10.50	-31.23	-13.00	H
13175.00	-49.57	2.40	13.30	-38.67	-13.00	H
15056.50	-47.54	2.40	12.40	-37.54	-13.00	H

LTE Band 25, 1.4MHz, 16QAM, Channel 26683

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2984.53	-47.69	1.00	11.50	-37.19	-13.00	V
5741.50	-46.41	1.50	13.10	-34.81	-13.00	V
9569.00	-45.92	2.10	11.20	-36.82	-13.00	H
11483.00	-39.48	2.60	11.00	-31.08	-13.00	H
13397.00	-44.01	2.50	12.40	-34.11	-13.00	H
15311.00	-50.99	2.70	15.60	-38.09	-13.00	H

LTE Band 25, 1.4MHz, 64QAM, Channel 26047

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2956.27	-47.48	1.00	11.50	-36.98	-13.00	H
5551.00	-46.78	1.40	13.10	-35.08	-13.00	H
9251.50	-46.65	2.00	11.20	-37.45	-13.00	H
11102.00	-41.62	2.50	10.50	-33.62	-13.00	H
12952.50	-51.41	2.50	13.30	-40.61	-13.00	H
14802.50	-47.09	2.70	12.40	-37.39	-13.00	H

LTE Band 25, 1.4MHz, 64QAM, Channel 26365

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2960.00	-47.93	1.00	11.50	-37.43	-13.00	H
5646.00	-53.15	1.30	13.10	-41.35	-13.00	V
9410.00	-48.14	2.10	11.20	-39.04	-13.00	H
11292.50	-44.82	2.60	10.50	-36.92	-13.00	H
13174.50	-55.00	2.40	13.30	-44.10	-13.00	H
15056.50	-47.27	2.50	12.40	-37.37	-13.00	H

LTE Band 25, 1.4MHz, 64QAM, Channel 26683

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2965.87	-47.88	1.00	11.50	-37.38	-13.00	H
5646.50	-50.20	1.30	13.10	-38.40	-13.00	H
9410.00	-48.20	2.10	11.20	-39.10	-13.00	H
11292.50	-41.33	2.60	10.50	-33.43	-13.00	H
13174.50	-50.98	2.40	13.30	-40.08	-13.00	H
15057.00	-47.87	2.50	12.40	-37.97	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is U = 2.90dB(30MHz-3GHz)/3.50dB(3GHz-18GHz)/3.90dB(18GHz-26.5GHz), k = 2

LTE Band 26(814MHz-824MHz), 1.4MHz, QPSK, Channel 26783

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
2937.87	-47.95	1.00	11.50	-39.60	-13.00	V
3291.00	-61.34	1.10	12.20	-52.39	-13.00	H
4639.00	-65.29	1.30	12.50	-56.24	-13.00	V
6029.00	-65.13	1.60	13.10	-55.78	-13.00	H
7363.00	-60.66	1.90	11.30	-53.41	-13.00	V
9043.00	-61.03	2.20	11.60	-53.78	-13.00	H

LTE Band 26(814MHz-824MHz), 1.4MHz, QPSK, Channel 26740

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
2964.80	-47.03	1.00	11.50	-38.68	-13.00	H
3839.50	-65.28	1.20	12.40	-56.23	-13.00	H
4623.00	-63.98	1.30	12.50	-54.93	-13.00	V
6195.50	-65.00	1.60	13.10	-55.65	-13.00	H
8088.00	-61.20	1.80	11.30	-53.85	-13.00	V
8747.50	-62.06	1.90	11.60	-54.51	-13.00	V

LTE Band 26(814MHz-824MHz), 1.4MHz, QPSK, Channel 26697

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
2962.40	-47.40	1.00	11.50	-39.05	-13.00	H
4632.50	-64.43	1.30	12.50	-55.38	-13.00	H
5442.50	-64.87	1.30	13.10	-55.22	-13.00	V
6013.00	-65.04	1.60	13.10	-55.69	-13.00	V
7384.00	-61.13	1.90	11.30	-53.88	-13.00	V
9192.00	-60.88	2.10	11.60	-53.53	-13.00	V

LTE Band 26(814MHz-824MHz), 1.4MHz, 16QAM, Channel 26783

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
2902.67	-47.25	1.00	11.50	-38.90	-13.00	V
4059.50	-65.01	1.30	12.40	-56.06	-13.00	H
4989.50	-63.88	1.40	12.50	-54.93	-13.00	H
6564.00	-61.28	1.70	12.40	-52.73	-13.00	H
7247.50	-62.25	1.90	12.00	-54.30	-13.00	V
8381.50	-61.97	1.80	12.00	-53.92	-13.00	V

LTE Band 26(814MHz-824MHz), 1.4MHz, 16QAM, Channel 26740

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
2958.13	-46.56	1.00	11.50	-38.21	-13.00	H
3599.50	-65.13	1.10	12.20	-56.18	-13.00	V
4930.00	-64.95	1.30	12.50	-55.90	-13.00	V
6372.50	-63.59	1.60	12.40	-54.94	-13.00	V
7349.50	-61.30	1.90	11.30	-54.05	-13.00	V
8059.50	-60.94	1.80	11.30	-53.59	-13.00	V

LTE Band 26(814MHz-824MHz), 1.4MHz, 16QAM, Channel 26697

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
2999.73	-46.62	1.00	11.50	-38.27	-13.00	V
5067.00	-64.93	1.20	12.50	-55.78	-13.00	H
5735.50	-64.88	1.50	13.10	-55.43	-13.00	V
6475.50	-63.43	1.70	12.40	-54.88	-13.00	H
7068.50	-62.85	1.80	12.00	-54.80	-13.00	V
8389.00	-61.62	1.80	12.00	-53.57	-13.00	V

LTE Band 26(814MHz-824MHz), 1.4MHz, 64QAM, Channel 26783

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
2973.07	-47.78	1.00	11.50	-39.43	-13.00	H
3291.00	-63.56	1.10	12.20	-54.61	-13.00	H
4636.50	-64.92	1.30	12.50	-55.87	-13.00	H
6004.50	-65.37	1.50	13.10	-55.92	-13.00	V
7913.00	-61.13	1.90	11.30	-53.88	-13.00	V
9349.50	-60.38	2.10	11.20	-53.43	-13.00	H

LTE Band 26(814MHz-824MHz), 1.4MHz, 64QAM, Channel 26740

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
2892.80	-47.76	1.00	11.50	-39.41	-13.00	H
4579.50	-64.47	1.30	12.50	-55.42	-13.00	H
4996.00	-64.73	1.30	12.50	-55.68	-13.00	V
5655.50	-65.03	1.30	13.10	-55.38	-13.00	H
6416.50	-63.67	1.60	12.40	-55.02	-13.00	H
7297.50	-62.78	1.90	12.00	-54.83	-13.00	V

LTE Band 26(814MHz-824MHz), 1.4MHz, 64QAM, Channel 26697

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
2920.27	-48.02	1.00	11.50	-39.67	-13.00	H
4585.00	-65.10	1.30	12.50	-56.05	-13.00	V
5879.00	-65.11	1.50	13.10	-55.66	-13.00	V
6463.00	-62.69	1.60	12.40	-54.04	-13.00	H
7278.00	-61.62	1.90	12.00	-53.67	-13.00	V
9166.50	-61.22	2.10	11.60	-53.87	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 4.92\text{dB}(30\text{MHz}-3\text{GHz})/4.88\text{dB}(3\text{GHz}-18\text{GHz})/5.66\text{dB}(18\text{GHz}-40\text{GHz})$, $k = 2$

LTE band 26(824MHz-849MHz), 1.4MHz, QPSK, Channel 27033

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2990.40	-48.09	1.00	11.50	-39.74	-13.00	V
3391.00	-56.92	1.20	12.20	-48.07	-13.00	H
4640.00	-64.87	1.30	12.50	-55.82	-13.00	V
6312.50	-64.03	1.60	12.40	-55.38	-13.00	V
7268.50	-61.28	1.90	12.00	-53.33	-13.00	V
8392.50	-63.20	1.80	12.00	-55.15	-13.00	V

LTE band 26(824MHz-849MHz), 1.4MHz, QPSK, Channel 26915

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2992.53	-47.48	1.00	11.50	-39.13	-13.00	V
3343.50	-60.34	1.10	12.20	-51.39	-13.00	H
6430.50	-63.05	1.60	12.40	-54.40	-13.00	H
7314.50	-61.08	1.70	11.30	-53.63	-13.00	V
8110.50	-61.71	1.80	11.30	-54.36	-13.00	V
9472.00	-61.00	2.10	11.20	-54.05	-13.00	V

LTE band 26(824MHz-849MHz), 1.4MHz, QPSK, Channel 26797

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2997.33	-48.22	1.00	11.50	-39.87	-13.00	V
3297.00	-63.14	1.10	12.20	-54.19	-13.00	H
5553.50	-64.89	1.40	13.10	-55.34	-13.00	V
6546.00	-62.71	1.70	12.40	-54.16	-13.00	V
7918.50	-62.05	1.90	11.30	-54.80	-13.00	V
9049.00	-60.40	2.20	11.60	-53.15	-13.00	V

LTE band 26(824MHz-849MHz), 1.4MHz, 16QAM, Channel 27033

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2959.47	-47.79	1.00	11.50	-39.44	-13.00	H
3391.00	-57.11	1.20	12.20	-48.26	-13.00	H
4239.50	-63.82	1.20	12.40	-54.77	-13.00	H
5063.00	-64.82	1.20	12.50	-55.67	-13.00	H
6366.00	-62.68	1.60	12.40	-54.03	-13.00	V
7349.00	-61.60	1.90	11.30	-54.35	-13.00	H

LTE band 26(824MHz-849MHz), 1.4MHz, 16QAM, Channel 26915

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2915.20	-48.37	1.00	11.50	-40.02	-13.00	H
3344.00	-60.49	1.20	12.20	-51.64	-13.00	H
4180.50	-64.10	1.20	12.40	-55.05	-13.00	V
5072.00	-65.25	1.20	12.50	-56.10	-13.00	V
6081.50	-64.65	1.60	13.10	-55.30	-13.00	V
7267.00	-62.12	1.90	12.00	-54.17	-13.00	V

LTE band 26(824MHz-849MHz), 1.4MHz, 16QAM, Channel 26797

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2948.27	-48.04	1.00	11.50	-39.69	-13.00	H
4395.00	-64.65	1.30	12.50	-55.60	-13.00	V
4878.50	-65.34	1.40	12.50	-56.39	-13.00	H
5662.00	-65.05	1.30	13.10	-55.40	-13.00	H
6859.50	-63.08	1.80	12.00	-55.03	-13.00	V
7955.50	-61.16	1.90	11.30	-53.91	-13.00	V

LTE band 26(824MHz-849MHz), 1.4MHz, 64QAM, Channel 27033

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2975.20	-47.60	1.00	11.50	-39.25	-13.00	H
3391.00	-57.39	1.10	12.20	-48.44	-13.00	H
4588.50	-64.71	1.30	12.50	-55.66	-13.00	V
5592.50	-65.22	1.40	13.10	-55.67	-13.00	V
6843.50	-61.85	1.80	12.00	-53.80	-13.00	H
8006.00	-60.99	2.00	11.30	-53.84	-13.00	V

LTE band 26(824MHz-849MHz), 1.4MHz, 64QAM, Channel 26915

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2939.47	-47.51	1.00	11.50	-39.16	-13.00	H
3344.00	-58.52	1.10	12.20	-49.57	-13.00	H
5046.00	-64.82	1.20	12.50	-55.67	-13.00	H
6009.00	-64.06	1.60	13.10	-54.71	-13.00	V
6850.50	-62.40	1.80	12.00	-54.35	-13.00	V
7306.50	-61.55	1.70	11.30	-54.10	-13.00	V

LTE band 26(824MHz-849MHz), 1.4MHz, 64QAM, Channel 26797

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2958.40	-47.48	1.00	11.50	-39.13	-13.00	H
3296.50	-62.48	1.10	12.20	-53.53	-13.00	H
3920.00	-64.92	1.30	12.40	-55.97	-13.00	V
4969.50	-63.33	1.30	12.50	-54.28	-13.00	V
6267.50	-64.45	1.60	13.10	-55.10	-13.00	V
7910.00	-61.38	1.90	11.30	-54.13	-13.00	V

Note: The maximum value of expanded measurement uncertainty for this test item is U = 2.90dB(30MHz-3GHz)/3.50dB(3GHz-18GHz)/3.90dB(18GHz-26.5GHz), k = 2

Normal Power

LTE Band 41, 5MHz, QPSK, Channel 40165

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2917.87	-47.32	1.00	11.50	-36.82	-25.00	H
4992.50	-55.45	1.30	12.50	-44.25	-25.00	H
9985.50	-45.13	2.20	11.30	-36.03	-25.00	H
12482.00	-51.75	2.40	13.80	-40.35	-25.00	H
14978.50	-47.65	2.40	12.40	-37.65	-25.00	H
17475.00	-48.11	2.90	12.80	-38.21	-25.00	V

LTE Band 41, 5MHz, QPSK, Channel 40690

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2915.20	-47.77	1.00	11.50	-37.27	-25.00	V
5182.00	-55.05	1.60	12.50	-44.15	-25.00	H
10364.00	-42.65	2.30	10.80	-34.15	-25.00	V
12954.00	-49.45	2.50	13.30	-38.65	-25.00	H
15546.00	-53.27	2.70	15.60	-40.37	-25.00	H
16973.00	-56.39	2.90	14.50	-44.79	-25.00	V

LTE Band 41, 5MHz, QPSK, Channel 41215

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2934.40	-48.01	1.00	11.50	-37.51	-25.00	V
5370.50	-51.93	1.20	13.10	-40.03	-25.00	H
8056.00	-50.20	1.80	11.30	-40.70	-25.00	V
10742.00	-41.87	2.30	10.50	-33.67	-25.00	H
13427.50	-45.35	2.50	12.40	-35.45	-25.00	H
17036.50	-55.61	2.90	14.50	-44.01	-25.00	V

LTE Band 41, 5MHz, 16QAM, Channel 40165

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2958.67	-46.50	1.00	11.50	-36.00	-25.00	H
9985.50	-45.78	2.20	11.30	-36.68	-25.00	H
12482.00	-50.44	2.40	13.80	-39.04	-25.00	H
14978.50	-44.55	2.40	12.40	-34.55	-25.00	H
17475.50	-49.30	2.90	12.80	-39.40	-25.00	V
17922.50	-47.56	3.20	6.20	-44.56	-25.00	V

LTE Band 41, 5MHz, 16QAM, Channel 40690

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2927.73	-48.21	1.00	11.50	-37.71	-25.00	H
5182.00	-55.62	1.60	12.50	-44.72	-25.00	H
7772.50	-53.76	1.80	11.30	-44.26	-25.00	H
10363.50	-47.15	2.30	10.80	-38.65	-25.00	V
12954.50	-48.53	2.50	13.30	-37.73	-25.00	H
15545.50	-51.08	2.70	15.60	-38.18	-25.00	H

LTE Band 41, 5MHz, 16QAM, Channel 41215

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2926.13	-47.24	1.00	11.50	-36.74	-25.00	H
5371.00	-55.68	1.20	13.10	-43.78	-25.00	H
8056.00	-50.48	1.80	11.30	-40.98	-25.00	V
10741.50	-44.95	2.30	10.50	-36.75	-25.00	H
13427.00	-45.88	2.50	12.40	-35.98	-25.00	H
16112.00	-60.05	2.60	17.40	-45.25	-25.00	H

LTE Band 41, 5MHz, 64QAM, Channel 40165

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2947.47	-47.88	1.00	11.50	-37.38	-25.00	H
7489.50	-58.34	1.90	11.30	-48.94	-25.00	V
9985.50	-44.87	2.20	11.30	-35.77	-25.00	H
12482.50	-53.22	2.40	13.80	-41.82	-25.00	V
14978.00	-47.69	2.40	12.40	-37.69	-25.00	H
17474.50	-48.57	3.30	12.80	-39.07	-25.00	V

LTE Band 41, 5MHz, 64QAM, Channel 40690

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2965.87	-47.02	1.00	11.50	-36.52	-25.00	H
7773.00	-55.88	1.80	11.30	-46.38	-25.00	H
10363.50	-47.31	2.30	10.80	-38.81	-25.00	V
12954.50	-46.88	2.50	13.30	-36.08	-25.00	H
15545.00	-54.61	2.70	15.60	-41.71	-25.00	H
16890.50	-56.84	2.90	14.50	-45.24	-25.00	V

LTE Band 41, 5MHz, 64QAM, Channel 41215

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2974.40	-47.90	1.00	11.50	-37.40	-25.00	H
8056.50	-53.32	1.80	11.30	-43.82	-25.00	H
10742.00	-49.94	2.30	10.50	-41.74	-25.00	V
13427.50	-43.07	2.50	12.40	-33.17	-25.00	H
16334.50	-59.95	2.70	16.50	-46.15	-25.00	V
17148.50	-57.33	2.90	14.50	-45.73	-25.00	V

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.90\text{dB}(30\text{MHz}-3\text{GHz})/3.50\text{dB}(3\text{GHz}-18\text{GHz})/3.90\text{dB}(18\text{GHz}-26.5\text{GHz})$, $k = 2$

HPUE

LTE Band 41, 5MHz, QPSK, Channel 40165

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2997.60	-47.32	1.00	11.50	-36.82	-25.00	V
7489.50	-52.06	1.90	11.30	-42.66	-25.00	H
9985.50	-44.23	2.20	11.30	-35.13	-25.00	H
12482.00	-47.67	2.40	13.80	-36.27	-25.00	H
14978.50	-45.19	2.40	12.40	-35.19	-25.00	H
17475.00	-47.75	2.90	12.80	-37.85	-25.00	V

LTE Band 41, 5MHz, QPSK, Channel 40690

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2977.87	-48.06	1.00	11.50	-37.56	-25.00	V
5181.00	-57.06	1.60	12.50	-46.16	-25.00	H
7773.00	-52.49	1.80	11.30	-42.99	-25.00	H
10364.00	-43.04	2.30	10.80	-34.54	-25.00	H
12954.50	-44.39	2.50	13.30	-33.59	-25.00	H
15546.00	-50.87	2.70	15.60	-37.97	-25.00	H

LTE Band 41, 5MHz, QPSK, Channel 41215

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2958.13	-48.02	1.00	11.50	-37.52	-25.00	H
5371.00	-54.33	1.20	13.10	-42.43	-25.00	H
8056.50	-48.22	1.80	11.30	-38.72	-25.00	V
10741.50	-45.50	2.30	10.50	-37.30	-25.00	V
13427.00	-43.07	2.50	12.40	-33.17	-25.00	H
17011.50	-55.91	2.90	14.50	-44.31	-25.00	H

LTE Band 41, 5MHz, 16QAM, Channel 40165

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2905.07	-47.19	1.00	11.50	-36.69	-25.00	H
7489.00	-56.16	1.90	11.30	-46.76	-25.00	H
9985.00	-47.58	2.20	11.30	-38.48	-25.00	H
12482.50	-50.06	2.40	13.80	-38.66	-25.00	H
14978.00	-47.14	2.40	12.40	-37.14	-25.00	H
17475.00	-49.04	3.30	12.80	-39.54	-25.00	V

LTE Band 41, 5MHz, 16QAM, Channel 40690

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2947.47	-47.81	1.00	11.50	-37.31	-25.00	H
7773.00	-53.90	1.80	11.30	-44.40	-25.00	H
10364.00	-45.27	2.30	10.80	-36.77	-25.00	V
12954.50	-45.97	2.50	13.30	-35.17	-25.00	H
15546.00	-51.39	2.70	15.60	-38.49	-25.00	H
17083.50	-57.08	2.90	14.50	-45.48	-25.00	H

LTE Band 41, 5MHz, 16QAM, Channel 41215

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2971.73	-46.62	1.00	11.50	-36.12	-25.00	H
5371.00	-55.68	1.20	13.10	-43.78	-25.00	H
8056.00	-50.48	1.80	11.30	-40.98	-25.00	V
10741.50	-44.95	2.30	10.50	-36.75	-25.00	H
13427.00	-45.88	2.50	12.40	-35.98	-25.00	H
16112.00	-60.05	2.60	17.40	-45.25	-25.00	H

LTE Band 41, 5MHz, 64QAM, Channel 40165

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2925.87	-47.01	1.00	11.50	-36.51	-25.00	H
7489.00	-57.57	1.90	11.30	-48.17	-25.00	H
9985.50	-45.05	2.20	11.30	-35.95	-25.00	H
12482.00	-48.49	2.40	13.80	-37.09	-25.00	H
14978.50	-46.67	2.40	12.40	-36.67	-25.00	H
17475.00	-51.72	2.90	12.80	-41.82	-25.00	H

LTE Band 41, 5MHz, 64QAM, Channel 40690

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2903.20	-48.27	1.00	11.50	-37.77	-25.00	H
7772.50	-54.47	1.80	11.30	-44.97	-25.00	H
10363.50	-45.84	2.30	10.80	-37.34	-25.00	V
12954.50	-47.36	2.50	13.30	-36.56	-25.00	H
15545.50	-55.33	2.70	15.60	-42.43	-25.00	H
17111.50	-56.83	2.90	14.50	-45.23	-25.00	H

LTE Band 41, 5MHz, 64QAM, Channel 41215

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2933.33	-47.39	1.00	11.50	-36.89	-25.00	H
5370.00	-55.75	1.30	13.10	-43.95	-25.00	H
8056.00	-51.20	1.80	11.30	-41.70	-25.00	V
10741.50	-45.69	2.30	10.50	-37.49	-25.00	H
13427.00	-46.98	2.50	12.40	-37.08	-25.00	H
16847.50	-56.46	2.90	14.50	-44.86	-25.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.90\text{dB}(30\text{MHz}-3\text{GHz})/3.50\text{dB}(3\text{GHz}-18\text{GHz})/3.90\text{dB}(18\text{GHz}-26.5\text{GHz})$, $k = 2$

LTE Band 66, 1.4MHz QPSK, Channel 131979

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2904.27	-47.84	1.00	11.50	-37.34	-13.00	H
5130.50	-47.90	1.60	12.50	-37.00	-13.00	H
8551.00	-47.83	2.00	12.00	-37.83	-13.00	V
10262.00	-47.22	2.10	10.80	-38.52	-13.00	H
13682.00	-44.58	2.50	12.40	-34.68	-13.00	H
15392.00	-51.18	2.40	15.60	-37.98	-13.00	H

LTE Band 66, 1.4MHz, QPSK, Channel 132322

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2938.67	-48.16	1.00	11.50	-37.66	-13.00	H
5233.50	-48.40	1.80	12.50	-37.70	-13.00	H
8723.00	-49.71	1.90	11.60	-40.01	-13.00	H
12212.00	-54.50	2.60	13.80	-43.30	-13.00	H
13957.00	-47.78	2.50	11.90	-38.38	-13.00	H
15701.00	-55.02	2.40	15.60	-41.82	-13.00	H

LTE Band 66, 1.4MHz, QPSK, Channel 132665

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2959.47	-47.90	1.00	11.50	-37.40	-13.00	H
5336.50	-51.46	1.30	13.10	-39.66	-13.00	H
8894.50	-53.14	2.00	11.60	-43.54	-13.00	H
10673.50	-53.41	2.40	10.80	-45.01	-13.00	H
14231.00	-50.13	2.60	11.90	-40.83	-13.00	H
17178.00	-56.45	3.20	14.50	-45.15	-13.00	V

LTE Band 66, 1.4MHz, 16QAM, Channel 131979

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2991.20	-47.77	1.00	11.50	-37.27	-13.00	V
5130.50	-50.50	1.30	12.50	-39.30	-13.00	H
8551.50	-44.29	2.00	12.00	-34.29	-13.00	V
10261.00	-49.79	2.10	10.80	-41.09	-13.00	H
13682.00	-49.46	2.50	12.40	-39.56	-13.00	H
15392.00	-52.23	2.40	15.60	-39.03	-13.00	H

LTE Band 66, 1.4MHz, 16QAM, Channel 132322

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2912.27	-48.33	1.00	11.50	-37.83	-13.00	H
5233.50	-49.84	1.60	13.10	-38.34	-13.00	H
8723.50	-46.90	1.90	11.60	-37.20	-13.00	V
10468.00	-50.90	2.30	10.80	-42.40	-13.00	H
12212.50	-54.86	2.60	13.80	-43.66	-13.00	H
13957.00	-50.92	2.50	11.90	-41.52	-13.00	V

LTE Band 66, 1.4MHz, 16QAM, Channel 132665

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2998.93	-47.87	1.00	11.50	-37.37	-13.00	V
5336.50	-53.12	1.20	13.10	-41.22	-13.00	H
8894.50	-50.09	1.90	11.60	-40.39	-13.00	H
10673.50	-50.87	2.40	10.80	-42.47	-13.00	H
14231.50	-50.85	2.60	11.90	-41.55	-13.00	H
17159.00	-56.73	2.90	14.50	-45.13	-13.00	V

LTE Band 66, 1.4MHz, 64QAM, Channel 131979

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2942.40	-47.98	1.00	11.50	-37.48	-13.00	H
5130.50	-50.69	1.60	12.50	-39.79	-13.00	H
8551.00	-46.07	2.00	12.00	-36.07	-13.00	V
10261.50	-49.41	2.10	10.80	-40.71	-13.00	H
11972.00	-51.33	2.60	12.60	-41.33	-13.00	H
15392.00	-53.40	2.40	15.60	-40.20	-13.00	H

LTE Band 66, 1.4MHz, 64QAM, Channel 132322

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2752.80	-47.94	1.00	11.50	-37.44	-13.00	V
5233.50	-50.27	1.60	13.10	-38.77	-13.00	H
8723.00	-48.14	1.90	11.60	-38.44	-13.00	V
10467.00	-47.96	2.30	10.80	-39.46	-13.00	H
13957.00	-52.05	2.50	11.90	-42.65	-13.00	V
15701.50	-55.38	2.40	15.60	-42.18	-13.00	H

LTE Band 66, 1.4MHz, 64QAM, Channel 132665

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2915.73	-47.72	1.00	11.50	-37.22	-13.00	H
5336.50	-52.54	1.60	13.10	-41.04	-13.00	H
8894.50	-48.10	1.90	11.60	-38.40	-13.00	H
10673.50	-51.95	2.40	10.80	-43.55	-13.00	H
14231.00	-51.12	2.60	11.20	-42.52	-13.00	H
16350.00	-59.00	2.70	16.50	-45.20	-13.00	V

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.90\text{dB}(30\text{MHz}-3\text{GHz})/3.50\text{dB}(3\text{GHz}-18\text{GHz})/3.90\text{dB}(18\text{GHz}-26.5\text{GHz})$, $k = 2$

LTE Band 71, 5MHz QPSK, Channel 133147

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2957.87	-47.48	1.00	11.50	-39.13	-13.00	H
4599.00	-65.12	1.30	12.50	-56.07	-13.00	V
5264.50	-65.21	1.60	13.10	-55.86	-13.00	V
6188.00	-64.66	1.60	13.10	-55.31	-13.00	V
6881.50	-62.87	1.80	12.00	-54.82	-13.00	H
7791.50	-60.76	1.80	11.30	-53.41	-13.00	V

LTE Band 71, 5MHz, QPSK, Channel 133297

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2956.80	-47.57	1.00	11.50	-39.22	-13.00	H
4569.00	-64.55	1.30	12.50	-55.50	-13.00	V
5546.50	-64.88	1.40	13.10	-55.33	-13.00	V
6414.00	-61.64	1.60	12.40	-52.99	-13.00	H
8334.50	-61.73	1.80	12.00	-53.68	-13.00	V
10009.00	-59.67	2.00	11.30	-52.52	-13.00	V

LTE Band 71, 5MHz, QPSK, Channel 133447

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2882.40	-47.84	1.00	11.50	-39.49	-13.00	V
4648.50	-64.60	1.30	12.50	-55.55	-13.00	H
5468.50	-66.20	1.40	13.10	-56.65	-13.00	H
6372.00	-63.84	1.60	12.40	-55.19	-13.00	V
7894.50	-62.26	1.70	11.30	-54.81	-13.00	V
8997.00	-61.18	2.20	11.60	-53.93	-13.00	H

LTE Band 71, 5MHz, 16QAM, Channel 133147

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2931.20	-48.27	1.00	11.50	-39.92	-13.00	V
4643.00	-64.18	1.30	12.50	-55.13	-13.00	V
5572.00	-63.51	1.40	13.10	-53.96	-13.00	V
6415.00	-63.28	1.60	12.40	-54.63	-13.00	V
7908.50	-60.19	1.90	11.30	-52.94	-13.00	V
8397.50	-61.44	1.80	12.00	-53.39	-13.00	V

LTE Band 71, 5MHz, 16QAM, Channel 133297

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2900.80	-47.68	1.00	11.50	-39.33	-13.00	H
4354.00	-65.07	1.30	12.50	-56.02	-13.00	H
5115.00	-64.44	1.30	12.50	-55.39	-13.00	H
6413.50	-63.20	1.60	12.40	-54.55	-13.00	V
7360.50	-61.78	1.90	11.30	-54.53	-13.00	H
8034.50	-61.85	1.80	11.30	-54.50	-13.00	H

LTE Band 71, 5MHz, 16QAM, Channel 133447

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2925.07	-48.30	1.00	11.50	-39.95	-13.00	H
4064.00	-64.82	1.30	12.40	-55.87	-13.00	V
4703.50	-64.89	1.30	12.50	-55.84	-13.00	V
5577.50	-65.72	1.30	13.10	-56.07	-13.00	H
6326.50	-63.34	1.60	12.40	-54.69	-13.00	V
7572.00	-61.70	1.80	11.30	-54.35	-13.00	H

LTE Band 71, 5MHz, 64QAM, Channel 133147

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2956.27	-47.98	1.00	11.50	-39.63	-13.00	H
4175.00	-64.57	1.20	12.40	-55.52	-13.00	V
4635.00	-63.69	1.30	12.50	-54.64	-13.00	H
6444.50	-63.17	1.60	12.40	-54.52	-13.00	V
7429.50	-61.73	1.90	11.30	-54.48	-13.00	V
9212.00	-60.23	2.10	11.60	-52.88	-13.00	V

LTE Band 71, 5MHz, 64QAM, Channel 133297

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2906.13	-47.35	1.00	11.50	-39.00	-13.00	H
4752.00	-65.24	1.30	12.50	-56.19	-13.00	H
5243.00	-64.75	1.60	13.10	-55.40	-13.00	V
6060.00	-63.52	1.60	13.10	-54.17	-13.00	H
7480.50	-60.69	1.90	11.30	-53.44	-13.00	V
9148.50	-60.19	2.10	11.60	-52.84	-13.00	H

LTE Band 71, 5MHz, 64QAM, Channel 133447

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2906.67	-47.70	1.00	11.50	-39.35	-13.00	H
3876.00	-64.86	1.20	12.40	-55.81	-13.00	H
4636.50	-63.88	1.30	12.50	-54.83	-13.00	V
5339.00	-63.57	1.20	13.10	-53.82	-13.00	V
7250.50	-61.48	1.90	12.00	-53.53	-13.00	V
8968.00	-60.19	2.00	11.60	-52.74	-13.00	V

Note: The maximum value of expanded measurement uncertainty for this test item is U = 2.90dB(30MHz-3GHz)/3.50dB(3GHz-18GHz)/3.90dB(18GHz-26.5GHz), k = 2

LTE Band CA_41C, 20MHz+5MHz, QPSK, CH39750+CH39867

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2986.00	-41.03	1.00	11.50	-41.03	-25.00	V
4994.40	-42.37	1.30	12.50	-42.37	-25.00	H
5012.80	-45.51	1.30	12.50	-45.51	-25.00	H
9988.40	-39.39	2.20	11.30	-39.39	-25.00	H
14189.10	-40.39	2.50	11.90	-40.39	-25.00	V
17846.70	-36.78	3.20	6.20	-36.78	-25.00	V

LTE Band CA_41C, 20MHz+5MHz, QPSK, CH40595+CH40712

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2980.40	-42.00	1.00	11.50	-42.00	-25.00	V
5164.40	-45.93	1.60	12.50	-45.93	-25.00	H
5181.20	-47.84	1.60	12.50	-47.84	-25.00	H
10326.80	-38.64	2.30	10.80	-38.64	-25.00	V
13568.55	-42.04	2.40	12.40	-42.04	-25.00	V
17957.10	-37.49	3.20	6.20	-37.49	-25.00	V

LTE Band CA_41C, 20MHz+5MHz, QPSK, CH41440+CH41557

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2980.40	-41.55	1.00	11.50	-41.55	-25.00	V
5332.40	-50.79	1.30	13.10	-50.79	-25.00	H
9948.00	-42.74	2.20	11.30	-42.74	-25.00	V
10664.40	-36.09	2.40	10.80	-36.09	-25.00	H
14572.50	-40.88	2.60	11.20	-40.88	-25.00	V
17844.60	-37.42	3.20	6.20	-37.42	-25.00	V

LTE Band CA_41C, 20MHz+5MHz, 16QAM, CH39750+CH39867

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2977.20	-41.84	1.00	11.50	-41.84	-25.00	V
4994.40	-44.31	1.30	12.50	-44.31	-25.00	V
5011.60	-48.82	1.30	12.50	-48.82	-25.00	H
9988.40	-40.56	2.20	11.30	-40.56	-25.00	H
14304.30	-41.31	2.60	11.20	-41.31	-25.00	V
17831.70	-38.09	3.60	12.80	-38.09	-25.00	V

LTE Band CA_41C, 20MHz+5MHz, 16QAM, CH40595+CH40712

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2991.60	-41.99	1.00	11.50	-41.99	-25.00	V
5163.20	-37.16	1.60	12.50	-37.16	-25.00	H
10327.20	-39.93	2.30	10.80	-39.93	-25.00	V
13489.80	-43.32	2.50	12.40	-43.32	-25.00	V
14702.10	-40.37	2.50	11.20	-40.37	-25.00	V
17853.30	-38.01	3.60	12.80	-38.01	-25.00	V

LTE Band CA_41C, 20MHz+5MHz, 16QAM, CH41440+CH41557

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2996.00	-41.74	1.00	11.50	-41.74	-25.00	V
7998.00	-43.47	2.00	12.30	-43.47	-25.00	H
9886.80	-42.44	2.20	11.30	-42.44	-25.00	V
10665.60	-39.93	2.40	10.80	-39.93	-25.00	V
14695.80	-40.74	2.50	11.20	-40.74	-25.00	H
17812.80	-37.83	3.60	12.80	-37.83	-25.00	V

LTE Band CA_41C, 20MHz+5MHz, 64QAM, CH39750+CH39867

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2989.60	-41.90	1.00	11.50	-41.90	-25.00	V
4994.00	-41.43	1.30	12.50	-41.43	-25.00	H
5012.00	-45.62	1.30	12.50	-45.62	-25.00	H
9988.00	-42.21	2.20	11.30	-42.21	-25.00	H
14448.30	-41.13	2.60	11.20	-41.13	-25.00	V
17755.20	-37.46	3.60	12.80	-37.46	-25.00	V

LTE Band CA_41C, 20MHz+5MHz, 64QAM, CH40595+CH40712

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2963.20	-40.52	1.00	11.50	-40.52	-25.00	V
5163.20	-36.46	1.60	12.50	-36.46	-25.00	H
10326.80	-38.32	2.30	10.80	-38.32	-25.00	V
13333.65	-42.51	2.30	12.40	-42.51	-25.00	V
14250.30	-41.21	2.60	11.90	-41.21	-25.00	V
17679.30	-38.41	3.60	12.80	-38.41	-25.00	V

LTE Band CA_41C, 20MHz+5MHz, 64QAM, CH41440+CH41557

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2996.80	-42.07	1.00	11.50	-42.07	-25.00	V
5332.00	-45.66	1.30	13.10	-45.66	-25.00	H
10664.00	-37.97	2.40	10.80	-37.97	-25.00	H
13330.50	-41.47	2.30	12.40	-41.47	-25.00	V
14703.00	-39.64	2.50	11.20	-39.64	-25.00	V
17814.30	-37.41	3.60	12.80	-37.41	-25.00	V

Note: The maximum value of expanded measurement uncertainty for this test item is U = 2.90dB(30MHz-3GHz)/3.50dB(3GHz-18GHz)/3.90dB(18GHz-26.5GHz), k = 2

LTE Band CA_41C, 20MHz+20MHz, QPSK, CH39750+CH39948

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2978.00	-41.49	1.00	11.50	-41.49	-25.00	V
4994.00	-40.45	1.30	12.50	-40.45	-25.00	H
5013.60	-41.49	1.30	12.50	-41.49	-25.00	H
9963.60	-42.92	2.20	11.30	-42.92	-25.00	V
14176.05	-40.72	2.50	11.90	-40.72	-25.00	V
17845.20	-36.62	3.20	6.20	-36.62	-25.00	V

LTE Band CA_41C, 20MHz+20MHz, QPSK, CH40521+CH40719

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2971.60	-41.51	1.00	11.50	-41.51	-25.00	H
5147.60	-45.71	1.60	12.50	-45.71	-25.00	H
5167.60	-46.01	1.60	12.50	-46.01	-25.00	H
9916.00	-42.08	2.20	11.30	-42.08	-25.00	V
14239.50	-40.69	2.60	11.90	-40.69	-25.00	V
17756.40	-37.61	3.60	12.80	-37.61	-25.00	V

LTE Band CA_41C, 20MHz+20MHz, QPSK, CH41292+CH41490

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2989.60	-42.12	1.00	11.50	-42.12	-25.00	V
9938.80	-42.61	2.20	11.30	-42.61	-25.00	V
10605.20	-39.30	2.40	10.80	-39.30	-25.00	V
10624.80	-39.60	2.40	10.80	-39.60	-25.00	V
14166.15	-40.58	2.50	11.90	-40.58	-25.00	V
17804.10	-37.42	3.60	12.80	-37.42	-25.00	H

LTE Band CA_41C, 20MHz+20MHz, 16QAM, CH39750+CH39948

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2996.40	-41.73	1.00	11.50	-41.73	-25.00	V
4995.20	-40.33	1.30	12.50	-40.33	-25.00	H
5013.60	-41.75	1.30	12.50	-41.75	-25.00	H
9988.00	-40.85	2.20	11.30	-40.85	-25.00	H
14130.60	-41.62	2.50	11.90	-41.62	-25.00	V
17835.60	-38.08	3.60	12.80	-38.08	-25.00	V

LTE Band CA_41C, 20MHz+20MHz, 16QAM, CH40521+CH40719

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2982.00	-41.69	1.00	11.50	-41.69	-25.00	H
5148.40	-41.81	1.60	12.50	-41.81	-25.00	H
5168.40	-48.36	1.60	12.50	-48.36	-25.00	H
10316.40	-41.88	2.30	10.80	-41.88	-25.00	V
14103.60	-41.15	2.50	11.90	-41.15	-25.00	V
17811.90	-37.84	3.60	12.80	-37.84	-25.00	H

LTE Band CA_41C, 20MHz+20MHz, 16QAM, CH41292+CH41490

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2975.60	-40.91	1.00	11.50	-40.91	-25.00	V
9893.60	-41.80	2.20	11.30	-41.80	-25.00	V
10605.20	-35.31	2.40	10.80	-35.31	-25.00	V
10625.20	-37.86	2.40	10.80	-37.86	-25.00	V
14119.80	-40.63	2.50	11.90	-40.63	-25.00	V
17788.50	-37.62	3.60	12.80	-37.62	-25.00	V

LTE Band CA_41C, 20MHz+20MHz, 64QAM, CH39750+CH39948

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2993.60	-41.27	1.00	11.50	-41.27	-25.00	V
4994.80	-42.86	1.30	12.50	-42.86	-25.00	H
5013.60	-44.89	1.30	12.50	-44.89	-25.00	H
9988.40	-39.01	2.20	11.30	-39.01	-25.00	H
14718.30	-40.32	2.50	11.20	-40.32	-25.00	V
17692.80	-38.45	3.60	12.80	-38.45	-25.00	V

LTE Band CA_41C, 20MHz+20MHz, 64QAM, CH40521+CH40719

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2996.00	-41.94	1.00	11.50	-41.94	-25.00	V
5148.80	-45.47	1.60	12.50	-45.47	-25.00	H
5168.80	-50.25	1.60	12.50	-50.25	-25.00	H
9995.60	-41.99	2.20	11.30	-41.99	-25.00	V
14134.65	-41.17	2.50	11.90	-41.17	-25.00	V
17767.80	-37.17	3.60	12.80	-37.17	-25.00	V

LTE Band CA_41C, 20MHz+20MHz, 64QAM, CH41292+CH41490

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
2997.60	-41.35	1.00	11.50	-41.35	-25.00	V
9934.00	-42.24	2.20	11.30	-42.24	-25.00	V
10605.60	-38.78	2.40	10.80	-38.78	-25.00	V
10626.40	-39.70	2.40	10.80	-39.70	-25.00	V
14103.60	-40.72	2.50	11.90	-40.72	-25.00	V
17939.70	-37.81	3.20	6.20	-37.81	-25.00	V

Note: The maximum value of expanded measurement uncertainty for this test item is U = 2.90dB(30MHz-3GHz)/3.50dB(3GHz-18GHz)/3.90dB(18GHz-26.5GHz), k = 2

A.3 FREQUENCY STABILITY

Reference

FCC: CFR Part 2.1055, 22.355, 24.235, 27.54, 90.213.

A.3.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -20°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -20°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -20°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.3.2 Measurement Limit

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d) (2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6VDC and 4.3VDC, with a nominal voltage of 3.85VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance from -5.4% to 10.8%. For the purposes of measuring frequency stability these voltage limits are to be used.

A.4.3 Measurement results

LTE Band 2, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
3.6	33	29	23	0.018	0.015	0.012
3.85	42	38	51	0.022	0.020	0.027
4.3	26	42	43	0.014	0.022	0.023

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
-20	45	44	16	0.024	0.023	0.009
-10	39	24	29	0.021	0.013	0.015
0	41	26	39	0.022	0.014	0.021
10	22	31	26	0.012	0.016	0.014
20	38	33	28	0.020	0.018	0.015
30	31	38	42	0.016	0.020	0.022
40	27	39	35	0.014	0.021	0.019
50	25	29	19	0.013	0.015	0.010

Expanded measurement uncertainty is 10 Hz, $k = 2$

LTE Band 4, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
3.6	28	24	25	0.016	0.014	0.014
3.85	26	33	16	0.015	0.019	0.009
4.3	39	27	38	0.023	0.016	0.022

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
-20	47	24	29	0.027	0.014	0.017
-10	18	33	16	0.010	0.019	0.009
0	22	26	24	0.013	0.015	0.014
10	31	18	28	0.018	0.010	0.016
20	35	28	37	0.020	0.016	0.021
30	29	22	35	0.017	0.013	0.020
40	26	16	22	0.015	0.009	0.013
50	35	31	46	0.020	0.018	0.027

Expanded measurement uncertainty is 10Hz, $k = 2$

LTE Band 5, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
3.6	23	35	29	0.027	0.042	0.035
3.85	27	26	34	0.032	0.031	0.041
4.3	31	17	22	0.037	0.020	0.026

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
-20	28	34	26	0.033	0.041	0.031
-10	35	25	23	0.042	0.030	0.027
0	17	27	25	0.020	0.032	0.030
10	26	26	28	0.031	0.031	0.033
20	29	19	24	0.035	0.023	0.029
30	41	28	31	0.049	0.033	0.037
40	33	24	29	0.039	0.029	0.035
50	32	26	18	0.038	0.031	0.022

Expanded measurement uncertainty is 10Hz, $k = 2$

LTE Band 7, 5MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
3.6	22	29	22	0.009	0.011	0.009
3.85	15	18	27	0.006	0.007	0.011
4.3	26	25	18	0.010	0.010	0.007

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
-20	26	21	25	0.010	0.008	0.010
-10	29	18	27	0.011	0.007	0.011
0	25	27	18	0.010	0.011	0.007
10	34	26	16	0.013	0.010	0.006
20	18	34	24	0.007	0.013	0.009
30	16	15	28	0.006	0.006	0.011
40	25	33	23	0.010	0.013	0.009
50	24	29	37	0.009	0.011	0.015

Expanded measurement uncertainty is 10 Hz, $k = 2$

LTE Band 12, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
3.6	28	26	17	0.040	0.037	0.024
3.85	15	34	18	0.021	0.048	0.025
4.3	22	27	24	0.031	0.038	0.034

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
-20	23	25	24	0.033	0.035	0.034
-10	26	27	28	0.037	0.038	0.040
0	27	19	19	0.038	0.027	0.027
10	18	18	13	0.025	0.025	0.018
20	26	25	26	0.037	0.035	0.037
30	31	36	27	0.044	0.051	0.038
40	34	41	33	0.048	0.058	0.047
50	28	28	9	0.040	0.040	0.013

Expanded measurement uncertainty is 10Hz, k = 2

LTE Band 13, 5MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
3.6	28	26	16	0.036	0.033	0.020
3.85	24	34	11	0.031	0.043	0.014
4.3	24	17	21	0.031	0.022	0.027

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
-20	27	22	12	0.035	0.028	0.015
-10	14	25	18	0.018	0.032	0.023
0	13	31	27	0.017	0.040	0.035
10	18	18	14	0.023	0.023	0.018
20	24	14	16	0.031	0.018	0.020
30	27	19	31	0.035	0.024	0.040
40	21	15	9	0.027	0.019	0.012
50	26	22	11	0.033	0.028	0.014

Expanded measurement uncertainty is 10Hz, k = 2

LTE Band 25, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
3.6	24	25	31	0.013	0.013	0.016
3.85	37	28	34	0.020	0.015	0.018
4.3	18	26	9	0.010	0.014	0.005

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
-20	19	20	30	0.010	0.011	0.016
-10	18	21	21	0.010	0.011	0.011
0	11	28	26	0.006	0.015	0.014
10	21	19	24	0.011	0.010	0.013
20	16	15	18	0.008	0.008	0.010
30	24	10	11	0.013	0.005	0.006
40	23	32	15	0.012	0.017	0.008
50	30	19	25	0.016	0.010	0.013

Expanded measurement uncertainty is 10Hz, k = 2

LTE Band 26(814MHz-824MHz), 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
3.6	12	13	19	0.015	0.016	0.023
3.85	20	16	24	0.024	0.020	0.029
4.3	31	22	29	0.038	0.027	0.035

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
-20	27	33	20	0.033	0.040	0.024
-10	14	15	27	0.017	0.018	0.033
0	16	28	15	0.020	0.034	0.018
10	21	16	18	0.026	0.020	0.022
20	10	17	16	0.012	0.021	0.020
30	25	24	11	0.031	0.029	0.013
40	36	23	24	0.044	0.028	0.029
50	40	29	29	0.049	0.035	0.035

Expanded measurement uncertainty is 10Hz, k = 2

LTE band 26(824MHz-849MHz), 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
3.6	28	25	18	0.033	0.030	0.022
3.85	15	20	14	0.018	0.024	0.017
4.3	17	31	26	0.020	0.037	0.031

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
-20	10	30	10	0.012	0.036	0.012
-10	14	25	15	0.017	0.030	0.018
0	15	26	17	0.018	0.031	0.020
10	18	27	22	0.022	0.032	0.026
20	20	18	16	0.024	0.022	0.019
30	26	11	13	0.031	0.013	0.016
40	23	16	11	0.027	0.019	0.013
50	24	19	29	0.029	0.023	0.035

Expanded measurement uncertainty is 10Hz, k = 2

LTE Band 41 (Normal Power) , 5MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
3.6	22	23	11	0.008	0.009	0.004
3.85	15	30	26	0.006	0.012	0.010
4.3	28	26	22	0.011	0.010	0.008

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
-20	24	31	13	0.009	0.012	0.005
-10	30	33	14	0.012	0.013	0.005
0	16	25	27	0.006	0.010	0.010
10	25	21	34	0.010	0.008	0.013
20	18	26	18	0.007	0.010	0.007
30	17	24	29	0.007	0.009	0.011
40	29	31	26	0.011	0.012	0.010
50	23	12	35	0.009	0.005	0.013

Expanded measurement uncertainty is 10 Hz, k = 2