



Intermodulation Close Upper GSM PCS 1900 MHz DBE Band

Center: 1957.5 MHz Span: 30 MHz


RBW/VBW: 100 kHz



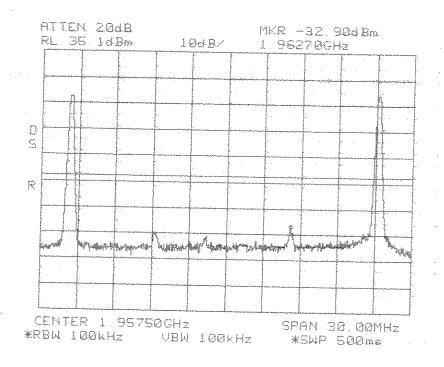

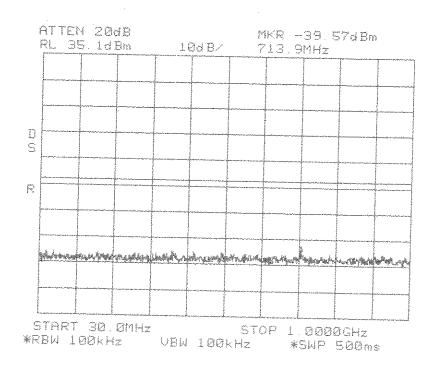


Intermodulation Apart GSM PCS 1900 MHz DBE Band

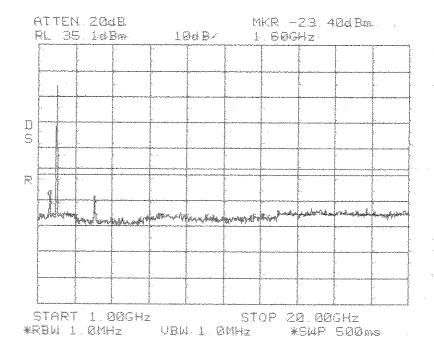



Intermodulation Apart GSM PCS 1900 MHz DBE Band

Center: 1957.5 MHz Span: 30 MHz


RBW/VBW: 100 kHz



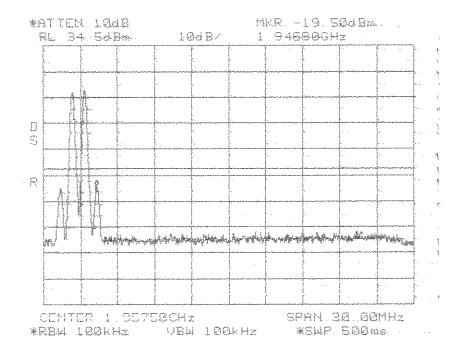

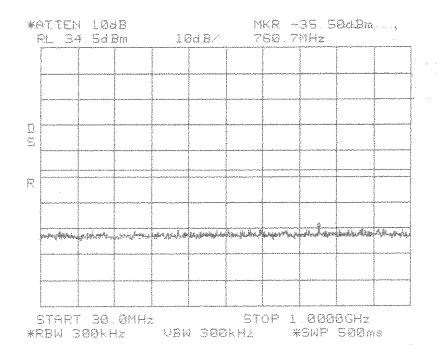


Intermodulation Close Lower **EDGE PCS 1900 MHz DBE Band** 

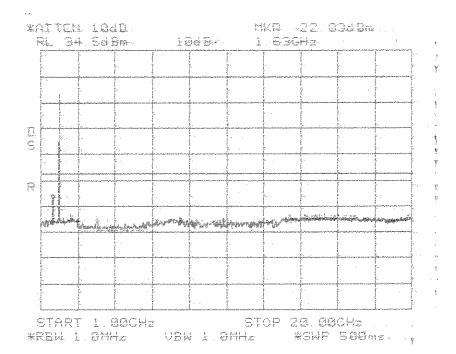



Intermodulation
Close
Lower
EDGE
PCS 1900 MHz
DBE Band

Center: 1957.5 MHz Span: 30 MHz


RBW/VBW: 100 kHz



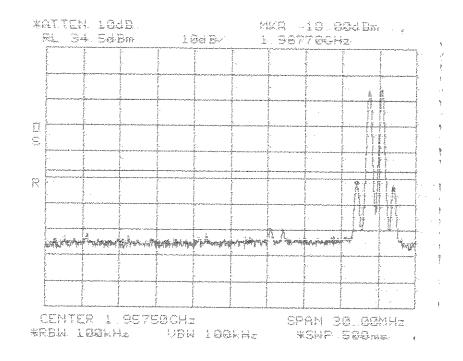

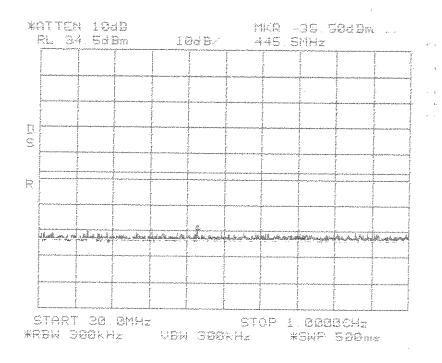



Intermodulation Close Upper **EDGE PCS 1900 MHz DBE Band** 

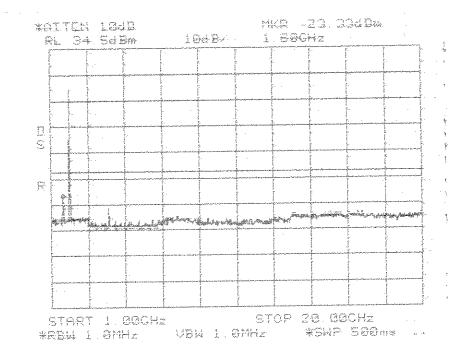


Intermodulation
Close
Upper
EDGE
PCS 1900 MHz
DBE Band

Intermodulation
Apart
EDGE
PCS 1900 MHz
DBE Band

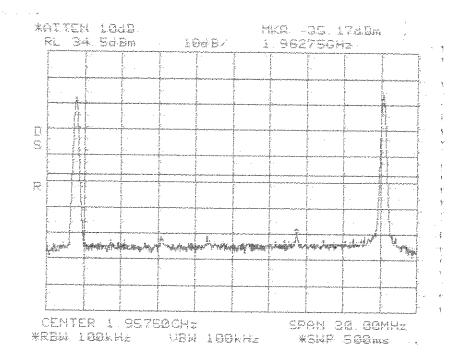

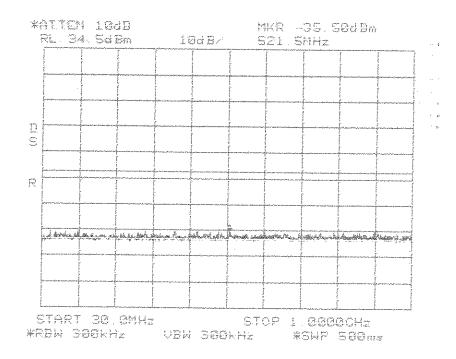

Intermodulation Apart EDGE PCS 1900 MHz DBE Band

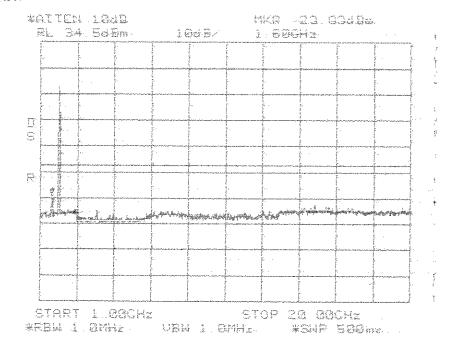



Intermodulation Apart EDGE PCS 1900 MHz DBE Band

ा का स्ट्रिक्ट्राच्या व्यवस्थाता हो।

CONTRACTOR OF


Intermodulation
Close
Lower
CDMA
PCS 1900 MHz
DBE Band

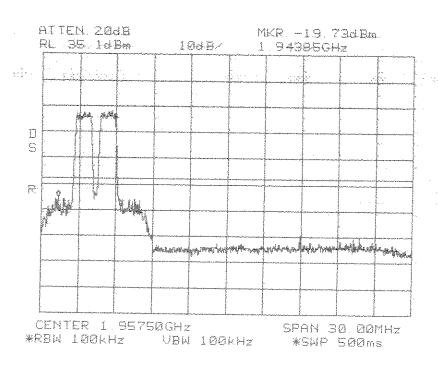


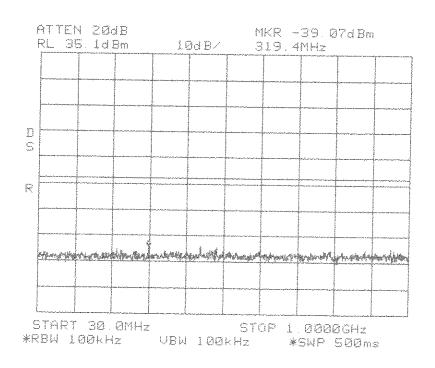


Intermodulation Close Lower CDMA PCS 1900 MHz DBE Band


Span: 30 MHz to 1 GHz RBW/VBW: 100 kHz



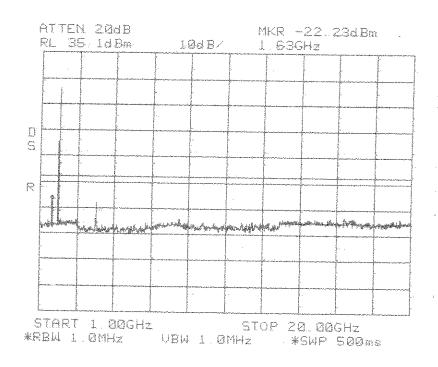

Intermodulation
Close
Upper
CDMA
PCS 1900 MHz
DBE Band

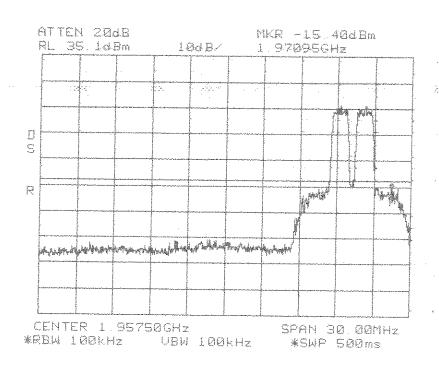


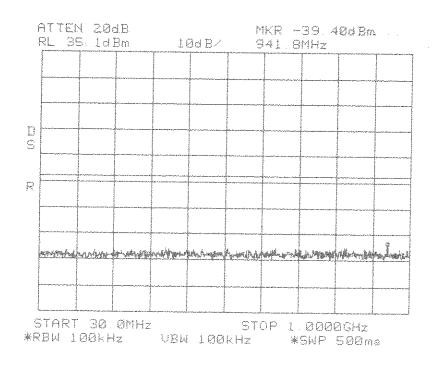


Intermodulation Close Upper CDMA PCS 1900 MHz DBE Band

Span: 30 MHz to 1 GHz RBW/VBW: 100 kHz

the state of the s




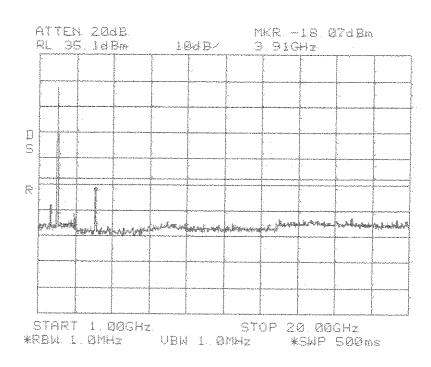


Control of the Contro

10


www.

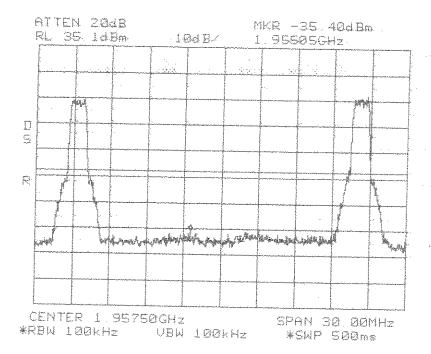


Intermodulation
Apart
CDMA
PCS 1900 MHz
DBE Band

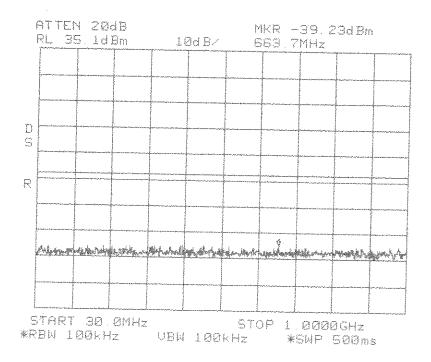


Intermodulation Apart CDMA PCS 1900 MHz DBE Band



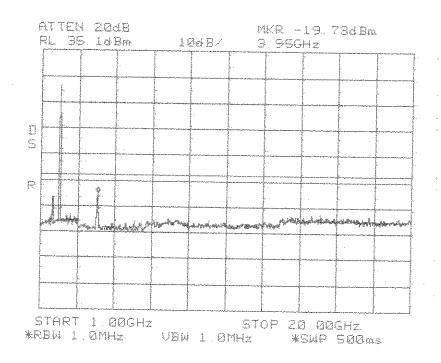


4440.000

Intermodulation Close Lower **TDMA PCS 1900 MHz BEF Band** 

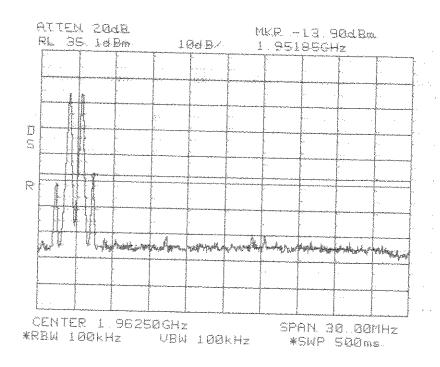


and the second second second

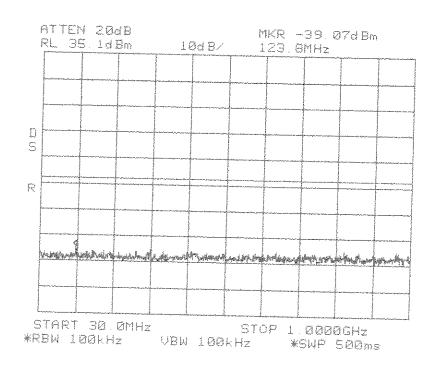

Intermodulation Close Lower **TDMA PCS 1900 MHz BEF Band** 


Span: 30 MHz to 1 GHz


RBW/VBW: 100 kHz

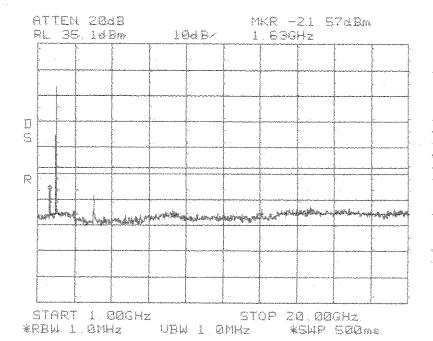

Intermodulation
Close
Lower
TDMA
PCS 1900 MHz
BEF Band


Intermodulation
Close
Upper
TDMA
PCS 1900 MHz
BEF Band

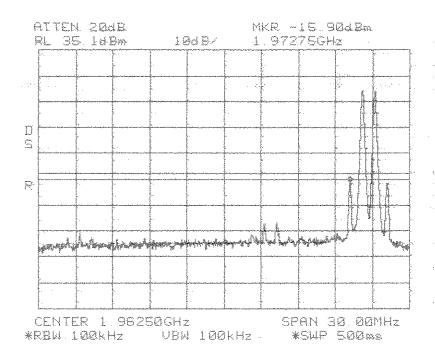

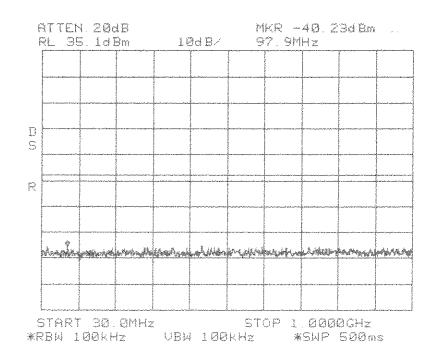



Intermodulation Close Upper TDMA PCS 1900 MHz BEF Band


AND THE STATE OF T

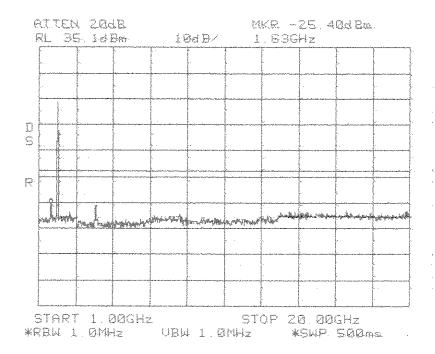


Intermodulation
Close
Upper
TDMA
PCS 1900 MHz
BEF Band




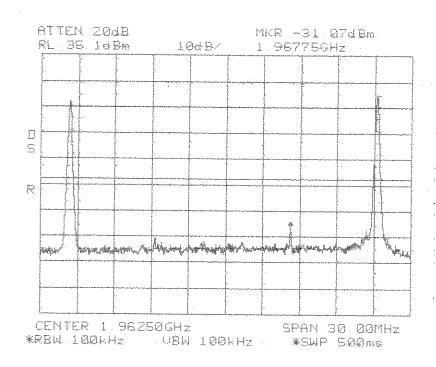


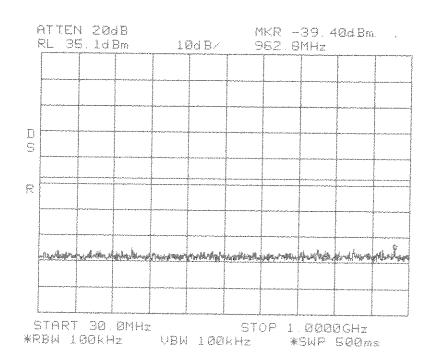


Intermodulation Apart TDMA PCS 1900 MHz BEF Band



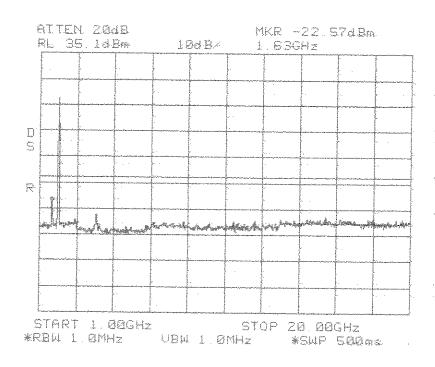


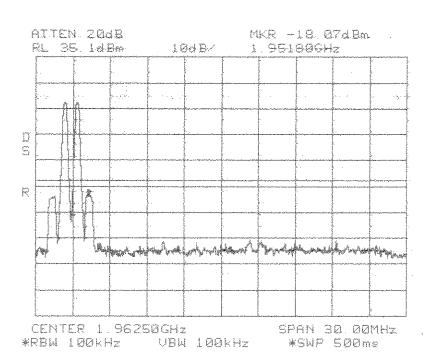


Intermodulation
Close
Lower
GSM
PCS 1900 MHz
BEF Band

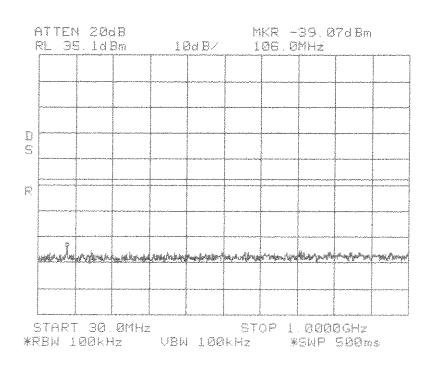



Intermodulation Close Lower GSM PCS 1900 MHz BEF Band



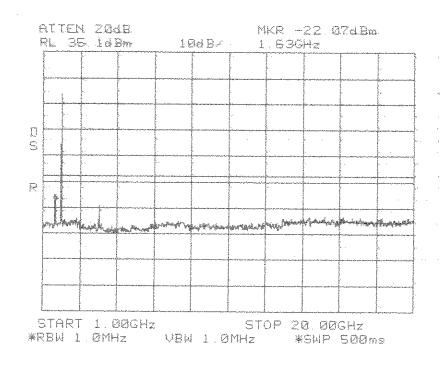


Intermodulation
Close
Upper
GSM
PCS 1900 MHz
BEF Band

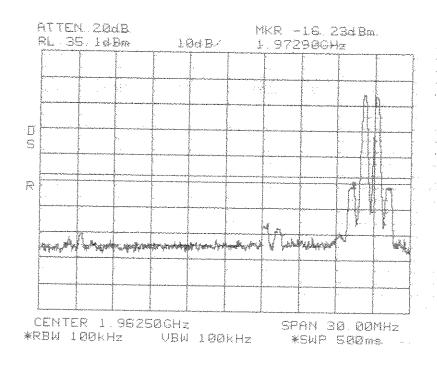


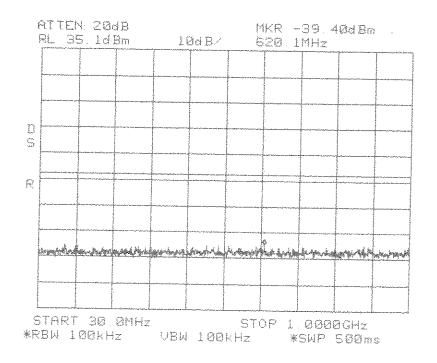



Intermodulation Close Upper GSM PCS 1900 MHz BEF Band



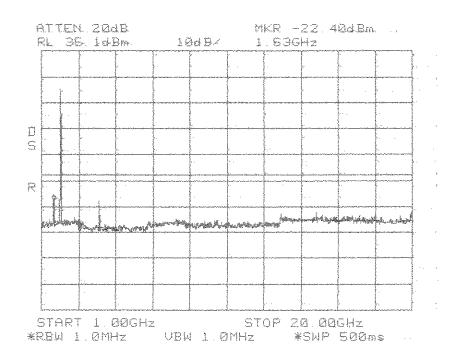




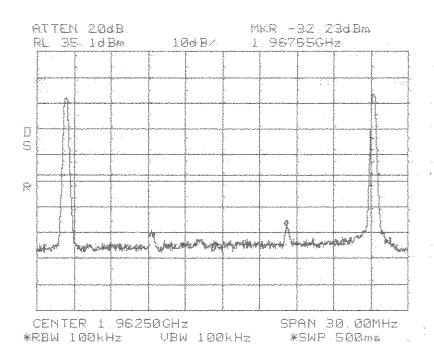

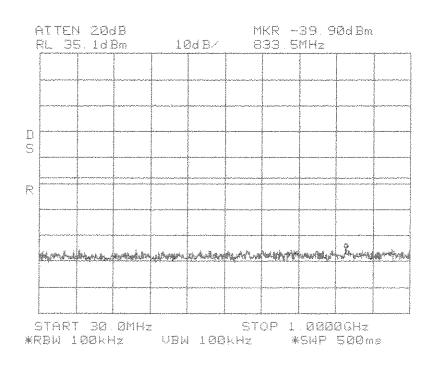


Intermodulation Apart GSM PCS 1900 MHz BEF Band


Span: 30 MHz to 1 GHz RBW/VBW: 100 kHz

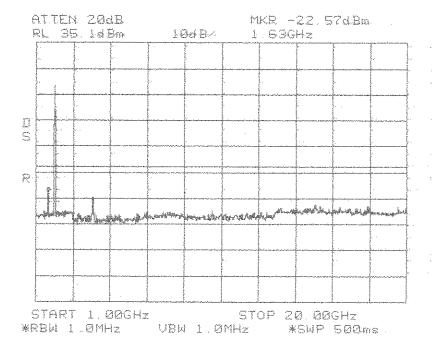


Intermodulation Apart GSM PCS 1900 MHz BEF Band

Intermodulation
Close
Lower
EDGE
PCS 1900 MHz
BEF Band

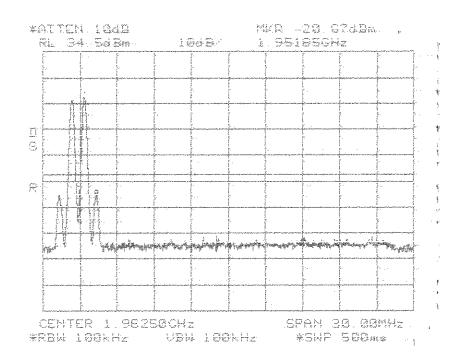

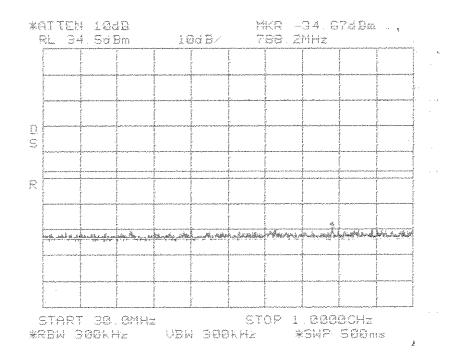



Intermodulation Close Lower EDGE PCS 1900 MHz BEF Band

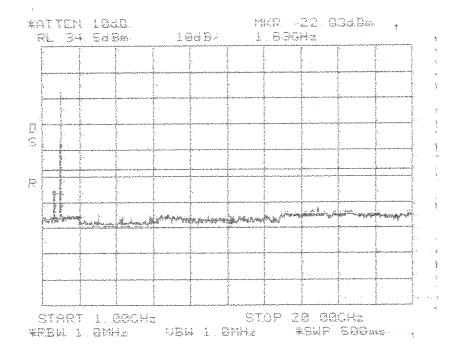


Intermodulation
Close
Lower
EDGE
PCS 1900 MHz
BEF Band

Intermodulation
Close
Upper
EDGE
PCS 1900 MHz
BEF Band

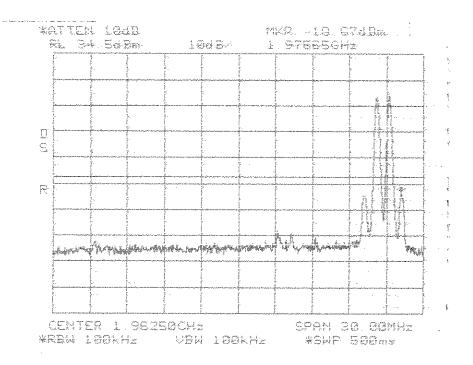

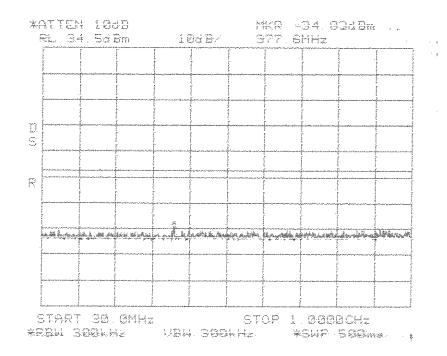


Intermodulation
Close
Upper
EDGE
PCS 1900 MHz
BEF Band

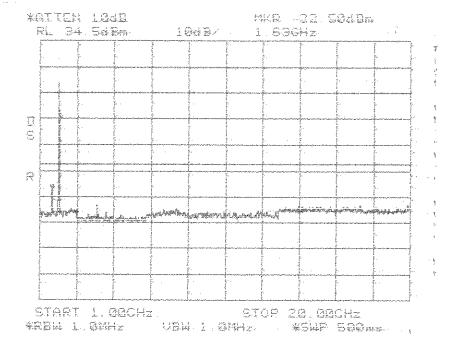


Intermodulation
Close
Upper
EDGE
PCS 1900 MHz
BEF Band

Center: 1962.5 MHz Span: 30 MHz


RBW/VBW: 100 kHz

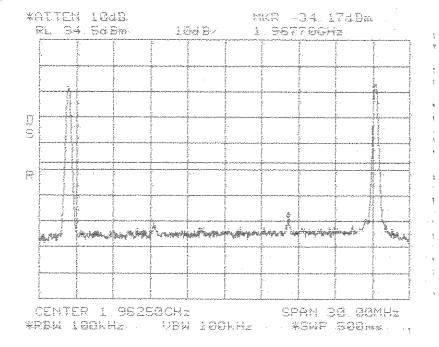

Intermodulation Apart EDGE PCS 1900 MHz BEF Band

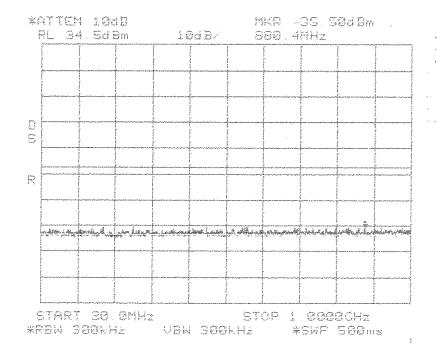



Intermodulation Apart EDGE PCS 1900 MHz BEF Band

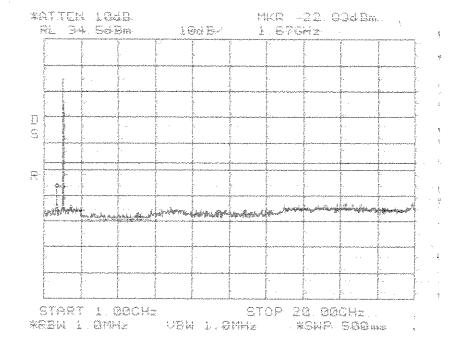

Intermodulation Apart EDGE PCS 1900 MHz BEF Band


Intermodulation
Close
Lower
CDMA
PCS 1900 MHz
BEF Band

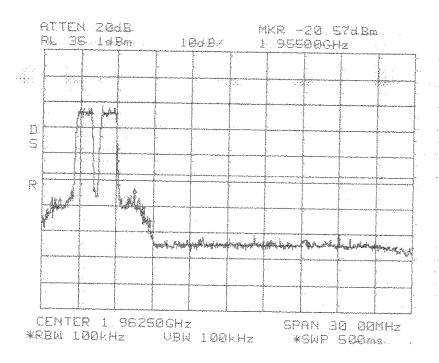


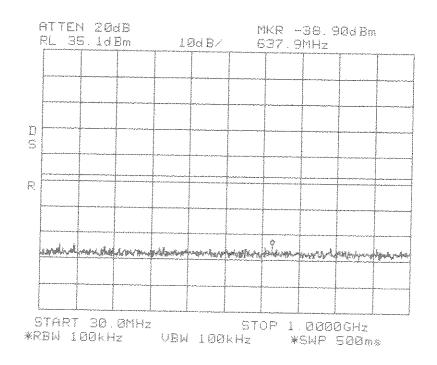


Intermodulation Close Lower CDMA PCS 1900 MHz BEF Band

A SECURE OF




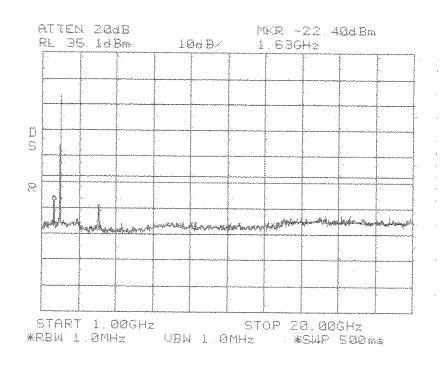


Calendario Calendario

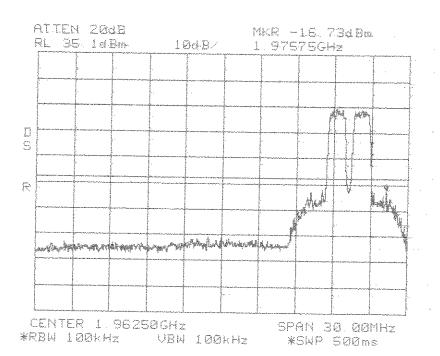


Intermodulation
Close
Upper
CDMA
PCS 1900 MHz
BEF Band

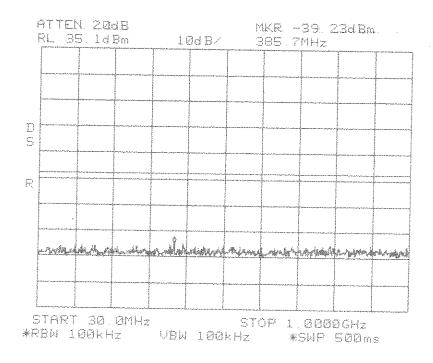

Intermodulation Close Upper CDMA PCS 1900 MHz BEF Band




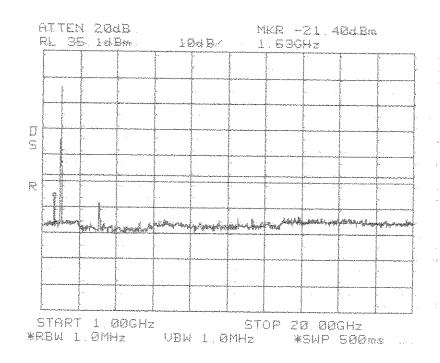


Center: 1962.5 MHz Span: 30 MHz RBW/VBW: 100 kHz

Intermodulation Apart CDMA PCS 1900 MHz BEF Band


365 J. 6

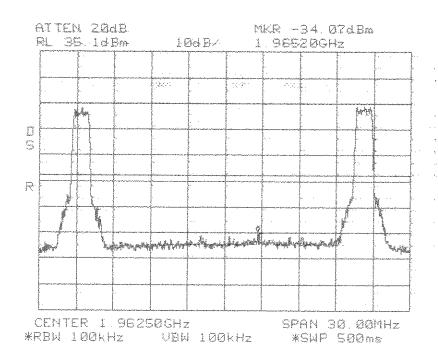


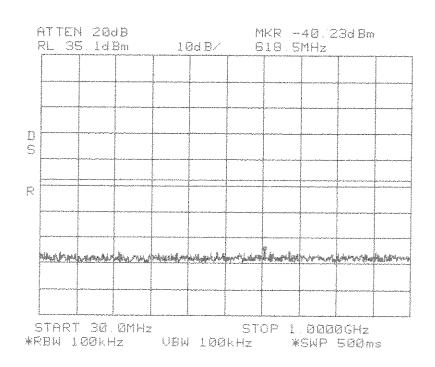

Intermodulation Apart CDMA PCS 1900 MHz BEF Band

8 625 (85 m) 8 825 (25 m)



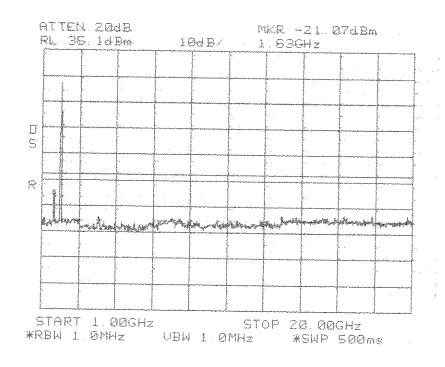

ATTEN 20dB MKR -15.90dBm PL 35.1dBm 10dB/ 1.96385GHz

SPAN 30 00MHz


\*SWF 500ms

CENTER 1. 97.750GHz


\*RBW 100kHz UBW 100kHz


Center: 1977.5 MHz Span: 30 MHz RBW/VBW: 100 kHz

Intermodulation
Close
Lower
TDMA
PCS 1900 MHz
EFC Band

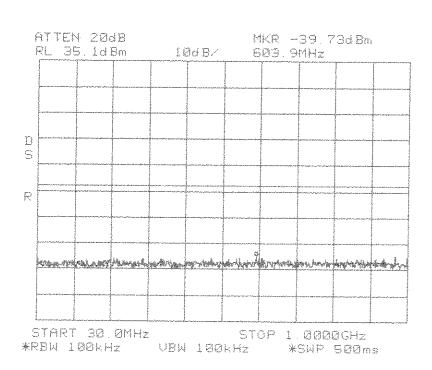


Intermodulation Close Lower TDMA PCS 1900 MHz EFC Band




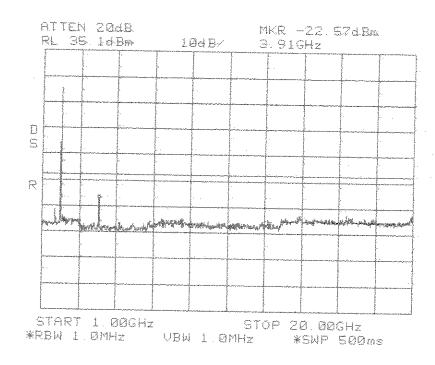

Center: 1977.5 MHz Span: 30 MHz RBW/VBW: 100 kHz


Intermodulation
Close
Upper
TDMA
PCS 1900 MHz
EFC Band

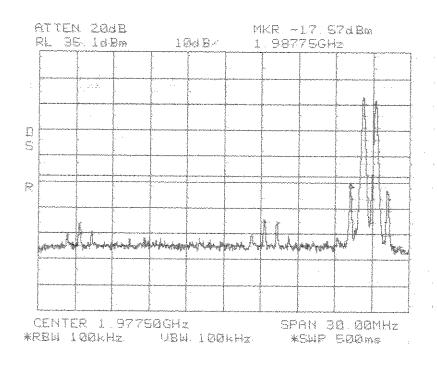

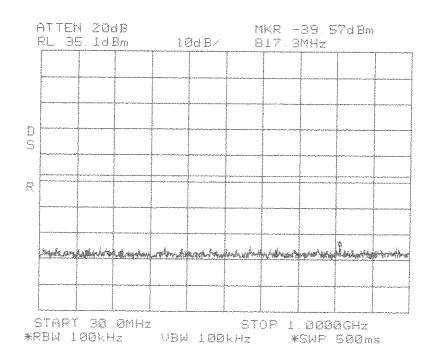



Intermodulation Close Upper TDMA PCS 1900 MHz EFC Band




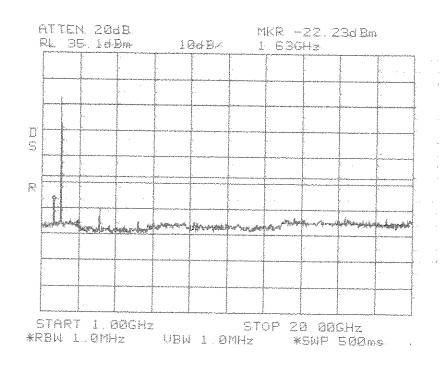


Center: 1977.5 MHz Span: 30 MHz RBW/VBW: 100 kHz




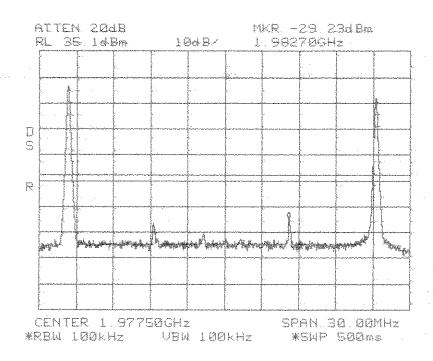

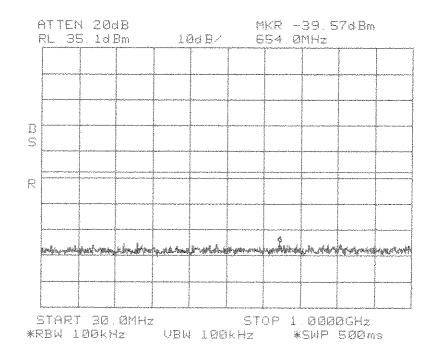

Intermodulation Apart TDMA PCS 1900 MHz EFC Band




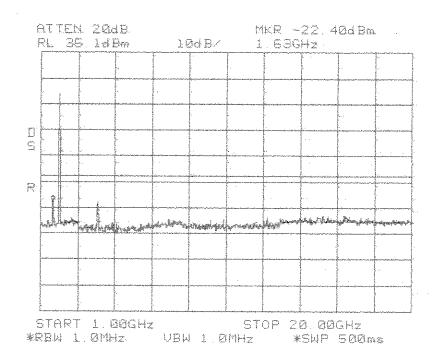



The state of the s

Center: 1977.5 MHz Span: 30 MHz RBW/VBW: 100 kHz

ou peparti i notas supera 2000. El 1. Prima karan




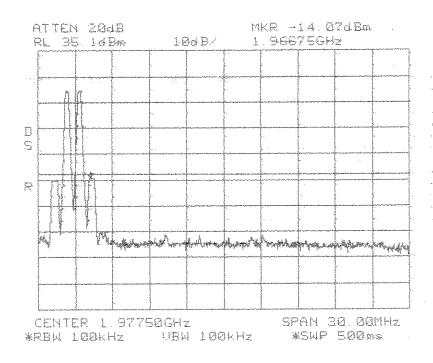


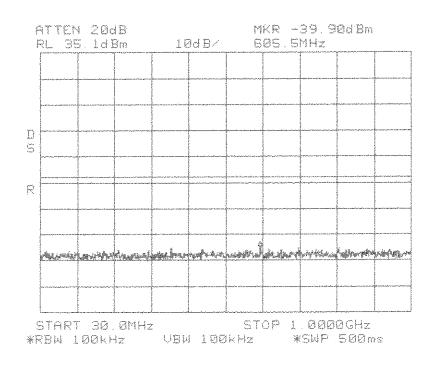


Intermodulation
Close
Lower
GSM
PCS 1900 MHz
EFC Band


Span: 30 MHz to 1 GHz RBW/VBW: 100 kHz




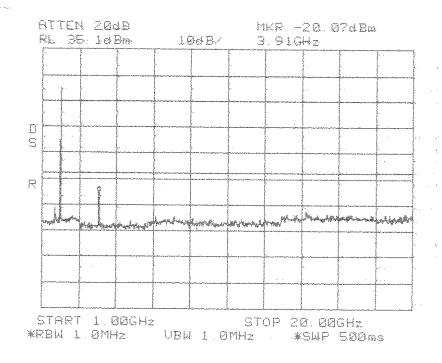


Center: 1977.5 MHz Span: 30 MHz RBW/VBW: 100 kHz




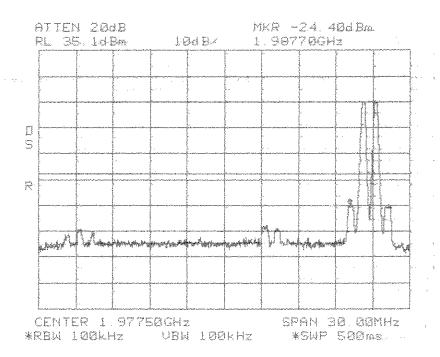

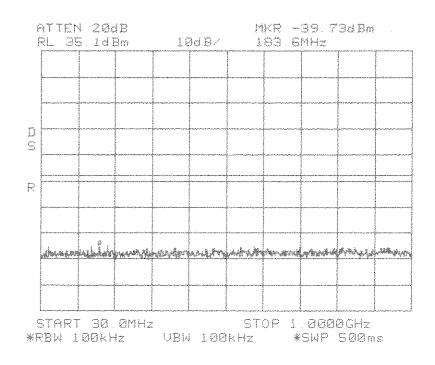



Intermodulation Close Upper GSM PCS 1900 MHz EFC Band




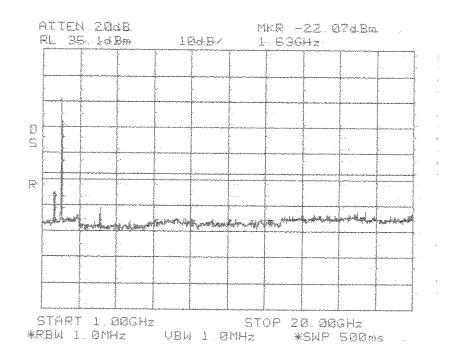

Center: 1977.5 MHz Span: 30 MHz RBW/VBW: 100 kHz




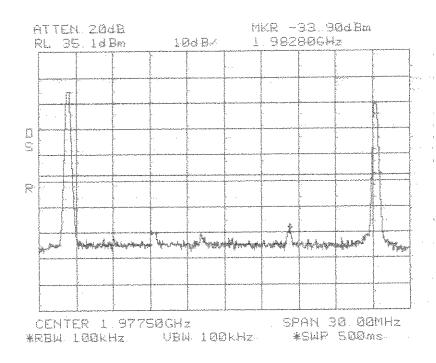

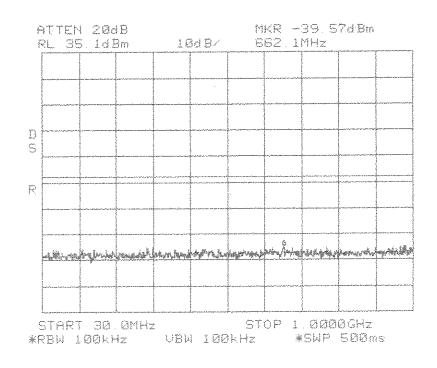


Intermodulation Apart GSM PCS 1900 MHz EFC Band


Intermodulation Apart GSM PCS 1900 MHz EFC Band

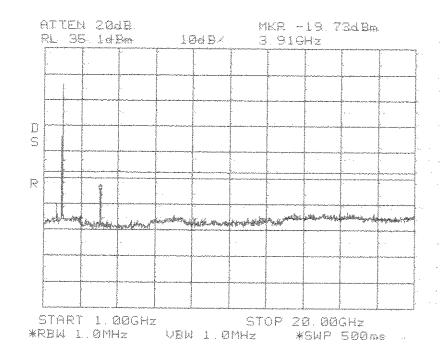


Center: 1977.5 MHz Span: 30 MHz RBW/VBW: 100 kHz



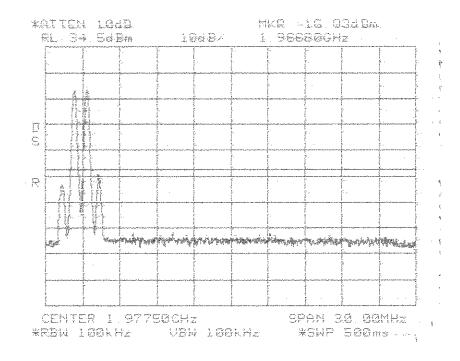

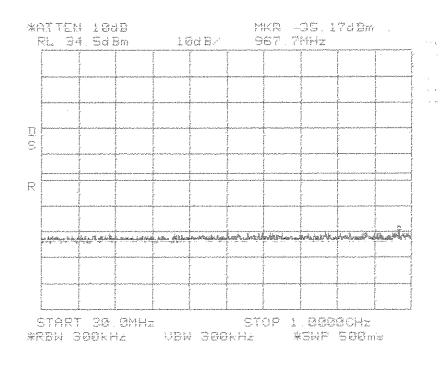


Intermodulation
Close
Lower
EDGE
PCS 1900 MHz
EFC Band

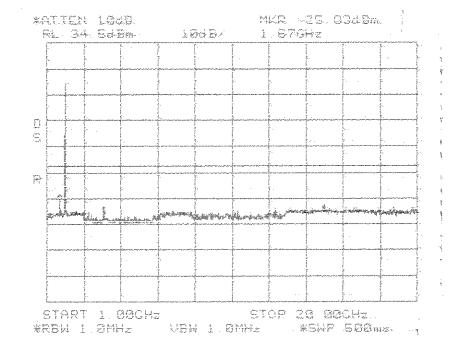


Intermodulation
Close
Lower
EDGE
PCS 1900 MHz
EFC Band

Center: 1977.5 MHz Span: 30 MHz


RBW/VBW: 100 kHz

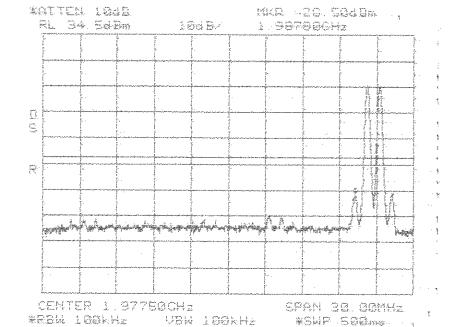

Intermodulation Close **Upper EDGE PCS 1900 MHz EFC Band** 

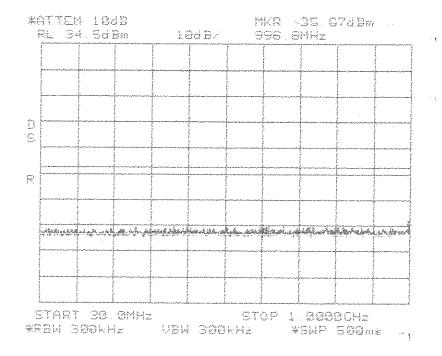


Intermodulation Close Upper **EDGE PCS 1900 MHz EFC Band** 

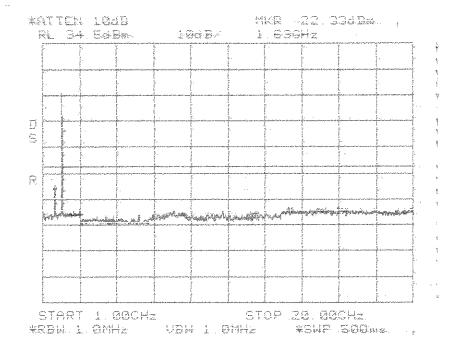


Intermodulation
Close
Upper
EDGE
PCS 1900 MHz
EFC Band

Center: 1977.5 MHz Span: 30 MHz


RBW/VBW: 100 kHz

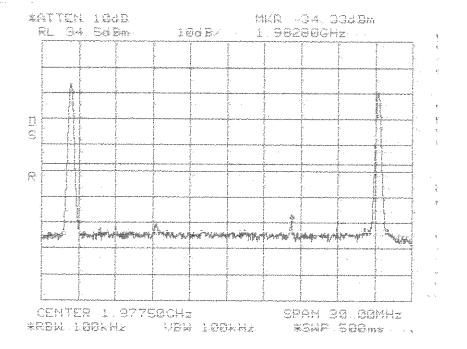

Intermodulation Apart EDGE PCS 1900 MHz EFC Band

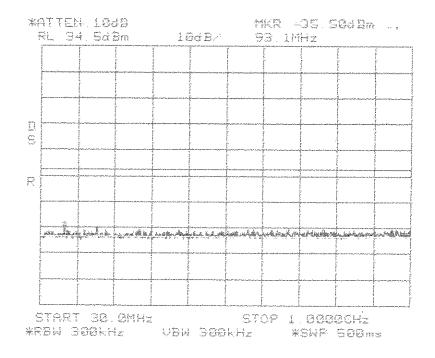


Intermodulation Apart EDGE PCS 1900 MHz EFC Band

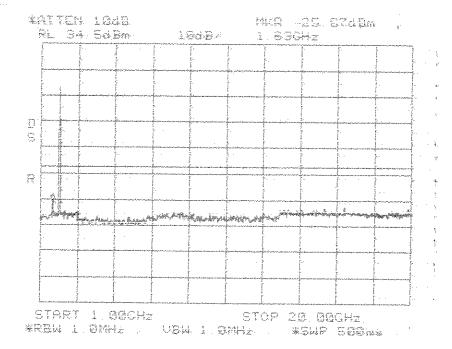


Intermodulation Apart EDGE PCS 1900 MHz EFC Band


Center: 1977.5 MHz Span: 30 MHz RBW/VBW: 100 kHz


Intermodulation
Close
Lower
CDMA
PCS 1900 MHz
EFC Band

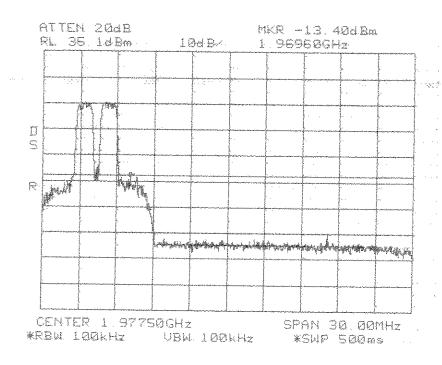

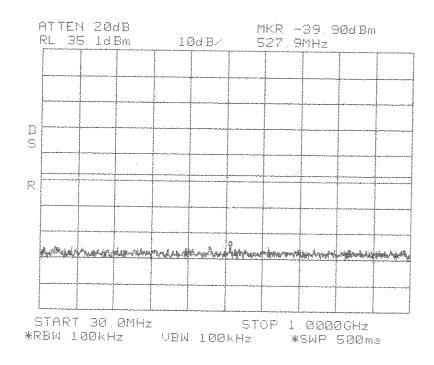


Intermodulation Close Lower CDMA PCS 1900 MHz EFC Band



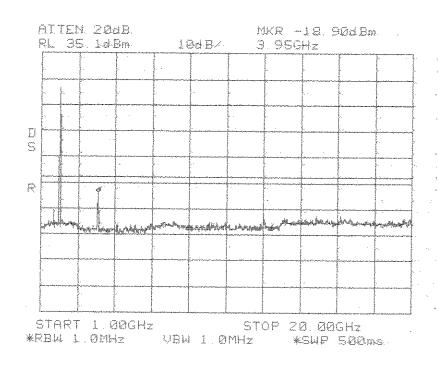


Center: 1977.5 MHz Span: 30 MHz


RBW/VBW: 100 kHz

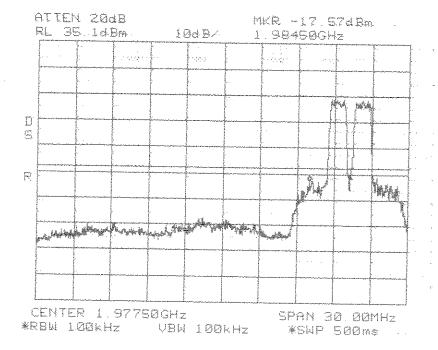

Intermodulation
Close
Upper
CDMA
PCS 1900 MHz
EFC Band

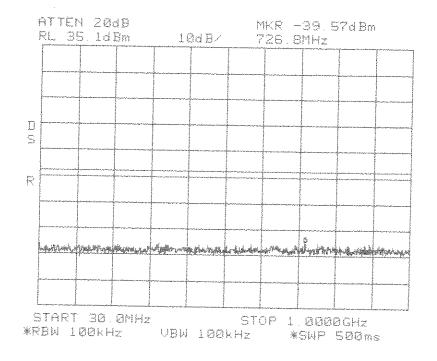

Intermodulation Close Upper CDMA PCS 1900 MHz EFC Band

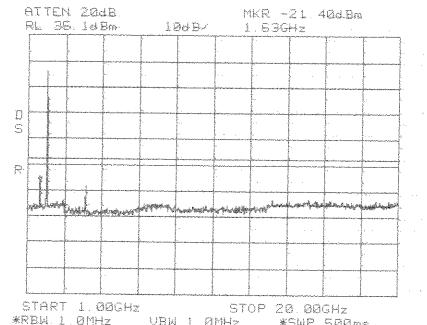


VBW 1 0MHz


\*SWP 500ms .

Intermodulation Close Upper **CDMA PCS 1900 MHz EFC Band** 


Center: 1977.5 MHz Span: 30 MHz RBW/VBW: 100 kHz


Intermodulation
Apart
CDMA
PCS 1900 MHz
EFC Band

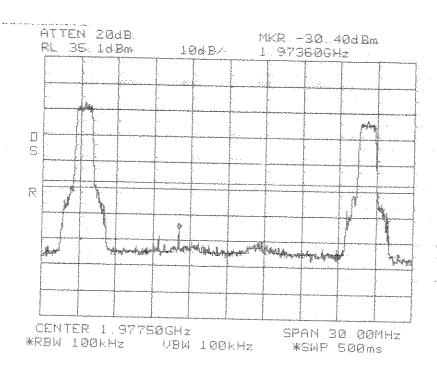

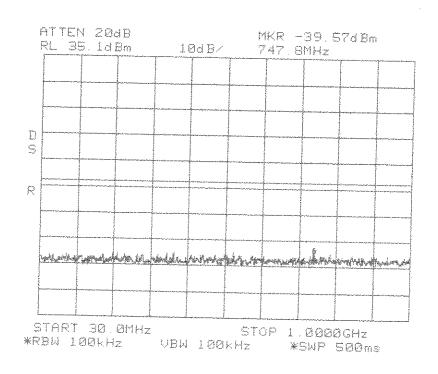

Intermodulation Apart CDMA PCS 1900 MHz EFC Band




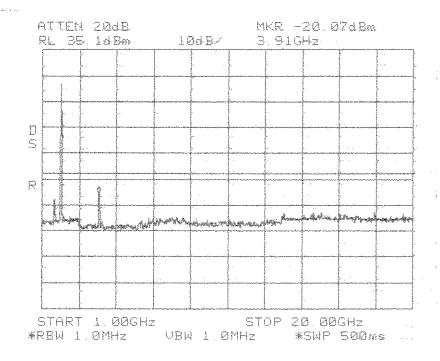




# **Test Set-ups**

### **Conducted Emission Limits,** Effective Isotropic Radiated Power Limits, Occupied Bandwidth Modulation

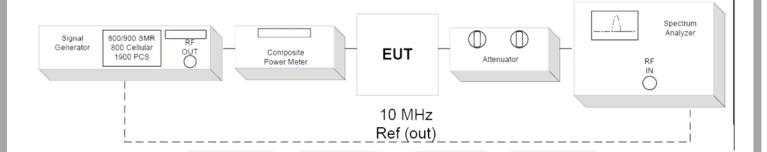

# **Frequency Tolerance**

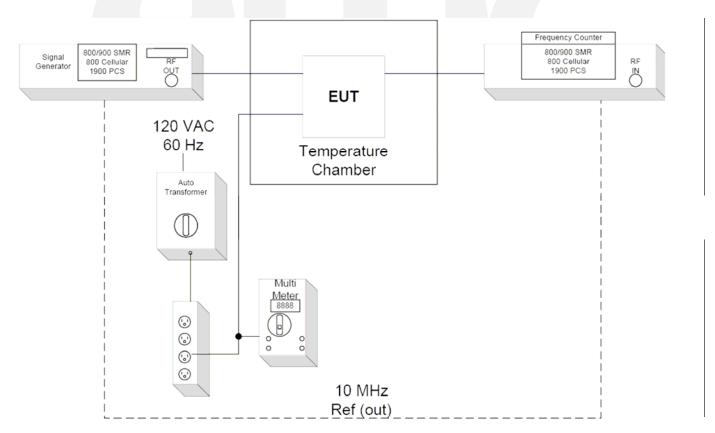



# Inter-Modulation Test Set-up Signal 800/900 SMR 800 Cellular 1900 PCS Signal 800/900 SMR 8F 8F 800 Cellular 1900 PCS Tomposite Power Meter 10 MHz Ref (out)





# Test setup photo, radiated emissions





# Test setup photo, radiated emissions





#### **Test Operation Mode:**

The device under test was operated under the following conditions during emissions testing:

- □ Standby
- □ Test program (H Pattern)
- ☐ Test program (color bar)
- □ Test program (customer specific)
- ☐ Practice operation
- - Max composite in and out

#### Configuration of the device under test:

■ - See diagrams & photos; pages 120 - 123



/I A T			DARD:
 .,.,.	11 1KIC		
VIAI	IL JIN.3	IJIAIN	DARD.

None.

#### **GENERAL REMARKS:**

Modifications required to pass:

- None
- ☐ As indicated on the data sheet(s)

Test Specification Deviations: Additions to or Exclusions from:

- None
- ☐ As indicated in the Test Plan

#### SUMMARY:

The requirements according to the technical regulations are

- - met
- ☐ **not** met.

The device under test does

- - fulfill the general approval requirements mentioned on page 3.
- □ **not** fulfill the general approval requirements mentioned on page 3.

**EUT Received Date:** 21 July 2006

Condition of EUT: Normal

**Testing Start Date:** 21 July 2006

Testing End Date: 26 July 2006

- TÜV AMERICA INC -

Date: 04 August 2006

Location: Taylors Falls MN

**USA** 

Joe C. Sausen

**EMC Senior Technician** 

Joel T. Schneider Senior EMC Engineer

Spel T. Sohneise

IC Sausan



# Appendix A

Constructional Data Form

and

**Block Diagrams** 



# **EMC Test Plan and Constructional Data Form**



PLEASE COMPLETE TH	PLEASE COMPLETE THIS DOCUMENT IN FULL, ENTERING N/A IF THE FIELD IS NOT APPLICABLE.								
Applicant NOTE: This information will be input into your test report as shown below.  Press the F1 key at any time to get HELP for the current field selected.									
Company:	ADC								
Address:	P.O. Box 1101								
	Minneapolis, MN 55440-11	101							
Contact:	Mark F. Miska		Positio	n:	Compli	iance E	Engi	neer	
Phone:	952-403-8340		Fax:		952-40	3-8858	3		
E-mail Address:	mark.miska@adc.com								
General Equipment	Description NOTE: This in	forma	tion will be in	put int	o your te:	st repor	t as s	shown	below.
EUT Description	In-building wireless comm								
EUT Name	Digivance® 1900 MHz Ind			lution					
Model No.:	DGVIH3110000000000 and Serial No.: None DGVIR330000000000								
Product Options:	None			•					
Configurations to be t	ested: Typical Digita	al Hos	t Unit with D	Digital	Remote	· Unit			
Test Objective									
☐ EMC Directive 89/	(336/EEC (EMC)		FCC:	Clas	s 📙	A 🗌	В	Part	24
Std:			VCCI:	Clas	ss 🗌	A 🗌	В		
Machinery Directiv	/e 89/392/EEC (EMC		BCIQ:	Clas	ss 🗌	A 🗌	В		
Std:			Canada:	Clas	ss 🗌	A 🗌	В		
☐ Medical Device Di	rective 93/42/EEC (EMC)		Australia:	Clas	ss 🗌	A 🗌	В		
Std:	72/245/EEC (EMC) uidance for Premarket		Other: _						
riotineation Sub	THOUSING (LIVIO)								

# **EMC Test Plan and Constructional Data Form**



TÜV Product Service Certification Requested						
☐ Attestation of Conformity (AoC) ☐ International EMC Mark (IEM)						
☐ Certificate of Conformity (CoC) ☐ Compliance Document						
Protection Class (N/A for vehicles)						
(Press F1 when field is selected to show additional information on Protection Class.)						
Attendance						
Test will be: Attended by the customer Unattended by the customer						
Failure - Complete this section if testing will not be attended by the customer.						
If a failure occurs, TUV Product Service should:						
<ul><li>Call contact listed above, if not available then stop testing. (After hrs phone):</li><li>Continue testing to complete test series.</li></ul>						
☐ Continue testing to complete test series. ☐ Continue testing to define corrective action.						
Stop testing.						
EUT O 15 C 15						
EUT Specifications and Requirements						
Length:         12"         Width:         17"         Height:         4"         Weight:         17 LBS						
Power Requirements						
Regulations require testing to be performed at typical power ratings in the countries of intended use. (i.e.,						
European power is typically 230 VAC 50 Hz or 400 VAC 50 Hz, single and three phase, respectively)						
Voltage: 115 VAC (If battery powered, make sure battery life is sufficient to complete testing.)						
# of Phases: _ 1						
Current Current						
(Amps/phase(max)): 3 (Amps/phase(nominal)): 2						
Other						
Other Special Requirements						
none						
Typical Installation and/or Operating Environment						
(ie. Hospital, Small Business, Industrial/Factory, etc.)						

FILE: EMCU\_F09.02E, REVISION 0, Effective: October 26, 1999

#### Form



# **EMC Test Plan and Constructional Data Form**

EUT Power Cable								
	Permanent	OR	$\boxtimes$	Removable	Length (in meters):	< 3		
	Shielded	OR	$\boxtimes$	Unshielded				
	☐ Not Applicable							

# **EMC Test Plan and Constructional Data Form**



EUT Interface	Ро	rts	and (	Cab	les							
Interface				Shi	eldir	ng			_			
Туре	Analog	Digital	Qty	Yes	Š	Туре	Termination	Connector Type	Port Termination	Length (in meters)	Removable	Permanent
EXAMPLE: RS232		×	2	×		Foil over braid	Coaxial	Metallized 9- pin D-Sub	Characteristic Impedance	6	×	П
RF "N" type			2		Ī	Braid	Coaxial	N	50 Ohms	3		
AC Power			1			Not Specified				>3		
Fiber			1			N/A	N/A	L/C		9		
DC Power			1			Cat 5	N/A	RJ-45		3		
RF "SMA" type			1			Braid	Coaxial	SMA	50 Ohms	3		

**Form** 





FI	III	ΓS	۸f	Ť\A	ıaı	r۵
	_	ıo	υı	LW	a	ıe.

Revision Level: N/A

Description: N/A

**EUT Operating Modes to be Tested --** list the operating modes to be used during test. It is recommended the equipment be tested while operating in a typical operation mode. FCC testing of personal computers and/or peripherals requires that a simple program generate a complete line of upper case H's. Provide a general description of all software, firmware, and PLD algorithms used in the equipment. List all code modules as described above, with the revision level used during testing. Consult with your TÜV Product Service Representative if additional assistance is required.

- 1. Max composite in and out
- 2.
- 3.

**EUT System Components --** List and describe all components which are part of the EUT. For FCC testing a minimum configuration is required. (ie. Mouse, Printer, Monitor, External Disk Drive, Motherboard, etc.)

	, ,	, ,	
Description	Model #	Serial #	FCC ID#
Digital Host Unit	DGVIH3110000000 000	None	
Digital Remote Unit	DGVIR3300000000 000	None	

# **EMC Test Plan and Constructional Data Form**




Support Equip	oment List and	describe all support equipme	nt which is not part	of the EUT. (i.e. peripherals, simulators, etc)
Description			Serial #	FCC ID #
Signal Generat	or	Agilent E4436B	963739	
Spectrum Analyzer		HP 8563E	MC27690	
Oscillator Free	•			
Frequency	Derived Frequency	Component # / Location		Description of Use
				,
Power Supply  Manufacturer	Model #	Serial #	T	
Manutacturer	IVIOGEI #	Seriai #	Type	
			Switched-	mode: (Frequency) Other:
			<del>  -</del>	
			Switched-	
			Linear	Other:
Power Line Fi	Iters			
Manufacturer	Mod	el#	Location in EUT	
None		<del></del>		
INOTIC				


Form





Critical EMI Comp	oonents (Capacitors, ferri	tes, etc.)		
Description	Manufacturer	Part # or Value	Qty	Component # / Location
None				
EMC Critical Deta	il Describe other EMC Design	details used to reduce high	gh frequenc	y noise.
None				
	"ELECTRONIC SIGNATUI	RE" BELOW IF POS	SIBLE)	
Authorization Sig	natures			
Customer author	orization to perform tests	 Date		
according to thi		Date		
•	•			
T+ DI/ODE	Dunnanad Dunktur and O			
rest Plan/CDF	Prepared By (please print)	Date		
Reviewed by T	ÜV Product Service Associa	ate Date		

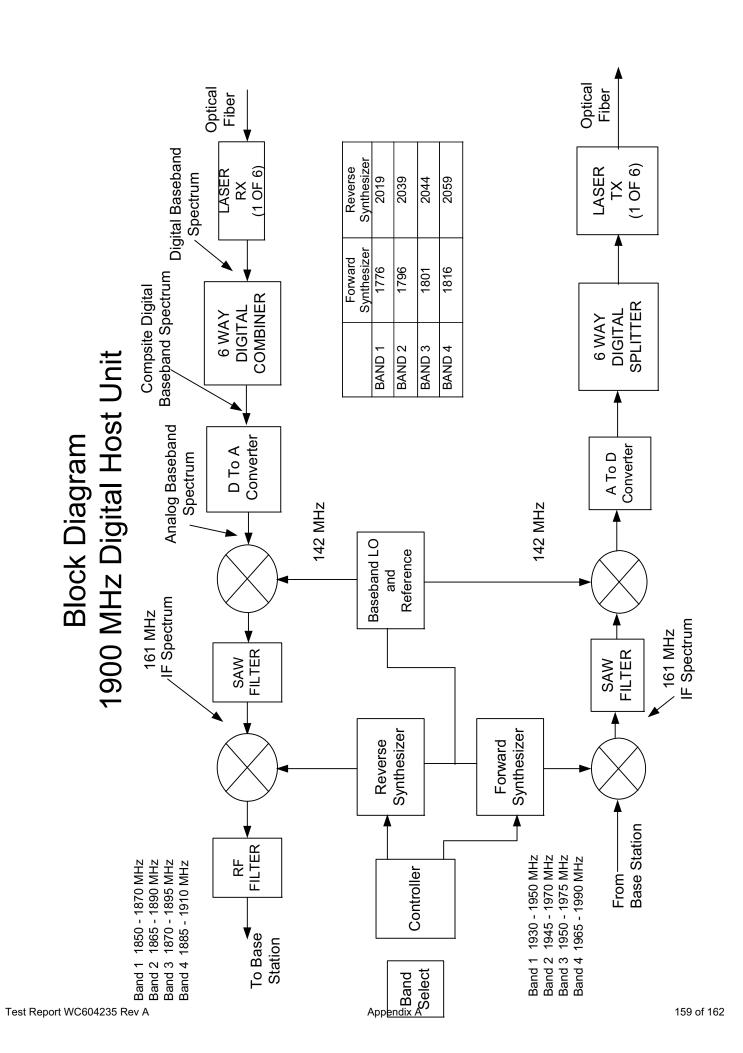

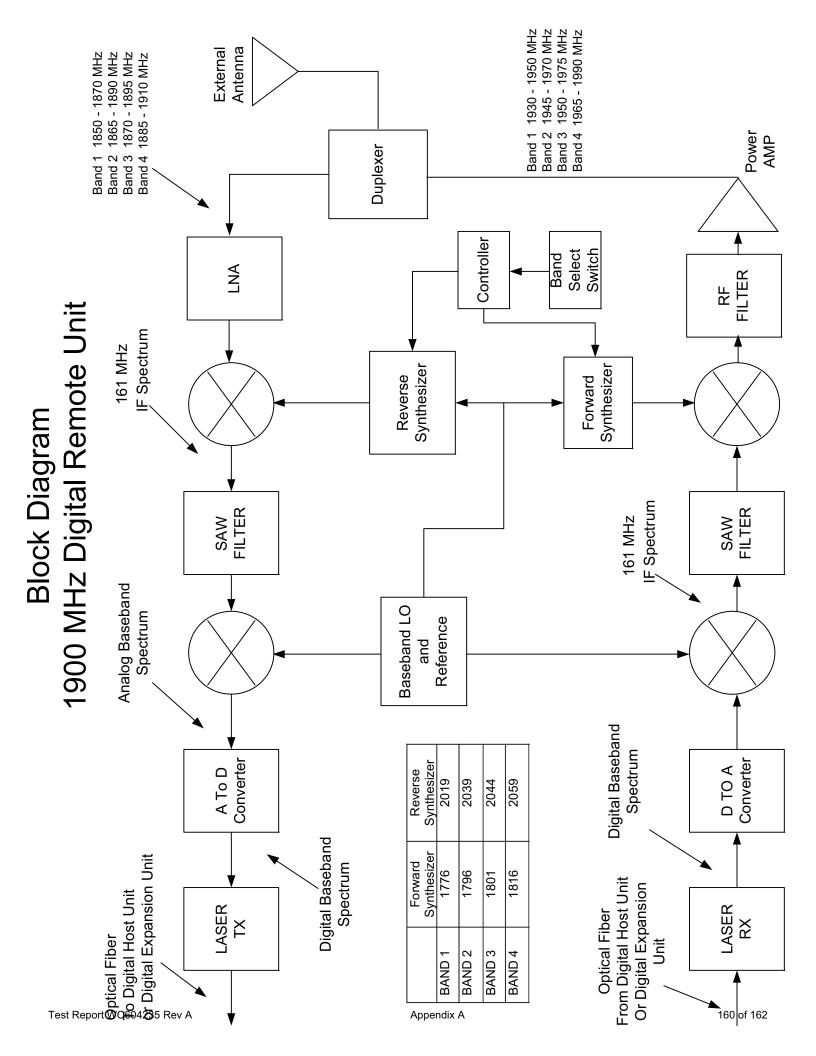



# Appendix B

Measurement Protocol





#### MEASUREMENT PROTOCOL

#### **Test Methodology**

Emissions testing is performed according to the procedures in EIA/TIA 603.

#### **Measurement Uncertainty**

The test system for conducted emissions is defined as the LISN, tuned receiver or spectrum analyzer, and coaxial cable. The test system has a measurement uncertainty of ±1.8 dB. The test system for radiated emissions is defined as the antenna, the pre-amplifier, the spectrum analyzer and the coaxial cable. The test system has a measurement uncertainty of ±4.8 dB. The equipment comprising the test systems is calibrated on an annual basis.

#### **Justification**

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into its characteristic impedance or left unterminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum emissions from the unit.

#### **Radiated Emissions**

The final level, in  $dB_{\mu}V/m$ , equals the reading from the spectrum analyzer (Level  $dB_{\mu}V$ ), adding the antenna correction factor and cable loss factor (Factor dB) to it, and subtracting the preamp gain (and duty cycle correction factor, if applicable). This result then has the limit subtracted from it to provide the Delta, which gives the tabular data as shown in the data sheets in Attachment A.

Example:

FREQ	LEVEL	CABLE/ANT/PREAMP	FINAL	POL/HGT/AZ	DELTA1
(MHz)	(dBuV)	(dB) $(dB/m)$ $(dB)$	(dBuV/m)	(m) (deg)	
, ,					
60.80	42.5Qp +	1.2 + 10.9 - 25.5 =	29.1	V 1.0 0.0	-10.9

#### **Substitution Method**

A radiated emission scan was also made, at TUV America's Wild River Lab Large Test Site, with the EUT's antenna replaced with a termination to demonstrate case radiation compliance to the -13 dBm requirement. Radiated emissions from the EUT are measured in the frequency range of 30 to 20000 MHz using a spectrum analyzer and appropriate broadband linearly polarized antennas. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimeters above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Interface cables that are closer than 40 centimeters to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimeters from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna is positioned 3 meters horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarizations and the EUT are rotated 360 degrees. The field strength levels were measured per ANSI C63.4. The EUT is then replaced with a tuned dipole antenna (below 1 GHz) or horn antenna (above 1 GHz). The substitute antenna was placed in the same polarization as the test antenna. A signal generator was used to generate a signal level that matched the highest level measured from the EUT. The signal generator level minus the cable loss from the signal generator to the substitute antenna plus the substitute antenna gain equals the spurious power level.

#### **Test Equipment**

All measurement instrumentation is traceable to the National Institute of Standards and Technology and is calibrated according to internal procedure.

 Test Report WC604235 Rev A
 Appendix B
 162 of 162

 TÜV AMERICA INC
 19333 Wild Mountain Road
 Taylors Falls MN 55084
 Tel: (651) 638-0297
 Fax: (651) 638-0298
 Rev. 080806