

2.4GHz 1608 Chip Antenna: HXDANT1608- DC-05S

Application:

WLAN, 802. 11b/g, Bluetooth, WLAN, etc ...

Features

SMD, high reliability, ultra Impact, Omni-directional ...

Part number Information

<u>RANT</u>	<u>1608</u>	<u>F</u>	<u>245</u>	<u>C</u>	<u>01</u>
(A)	(B)	(C)	(D)	(E)	(F)

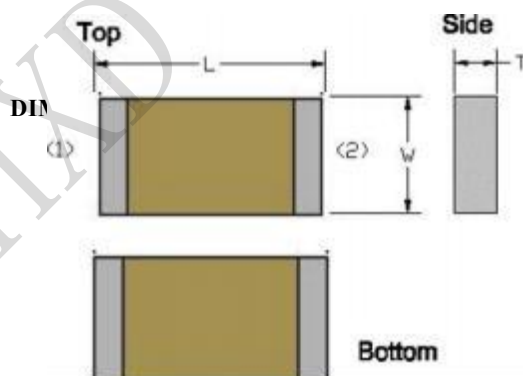
(A) Product Type	Chip Antenna
(B) Size Code	1.6x0.8mm(: 0.1mm)
(C) Material	High K material
(D) Frequency	2.4 ~ 2.5GHz
(E) Feeding mode	PIFA & Single Feeding
(F) Antenna type	Type=01

Electrical Specification

Working Frequency Range	2400 ~2500 MHz
Bandwidth	120 MHz (Min.)
Peak Gain	3.35 dBi (Typ.)
Impedance	50 Ohm
Return loss	10 dB (Min)
Polarization	Linear
Azimuth Beamwidth	Omni- directional
Operation Temperature(°C)	-40 ~85°C
Resistance to Soldering Heats	10sec. (@ 280°C)
Termination	Ni / Au (Leadless)

The specification is defined on EVB.

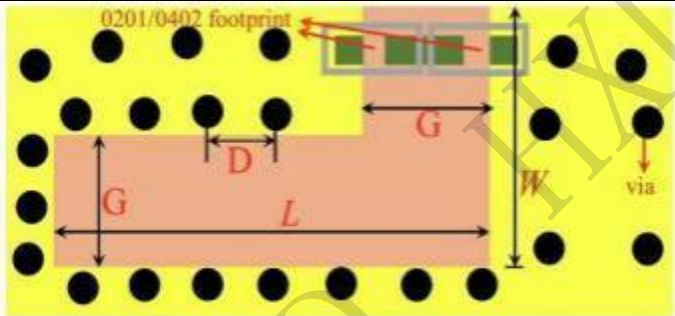
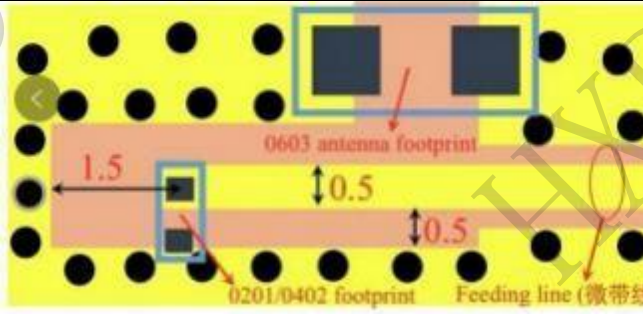
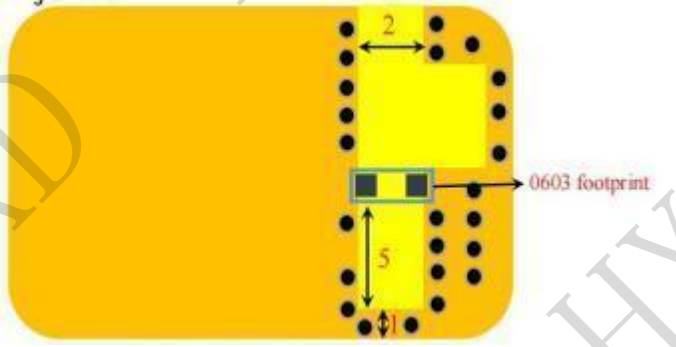
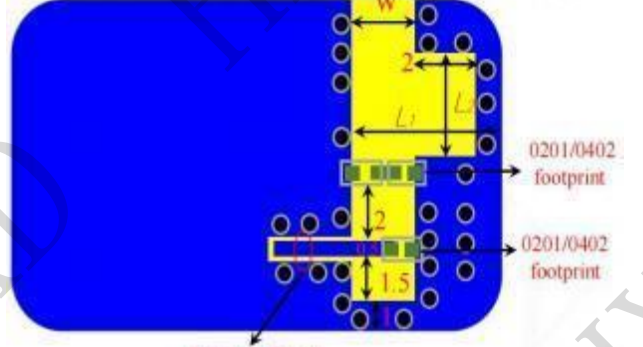
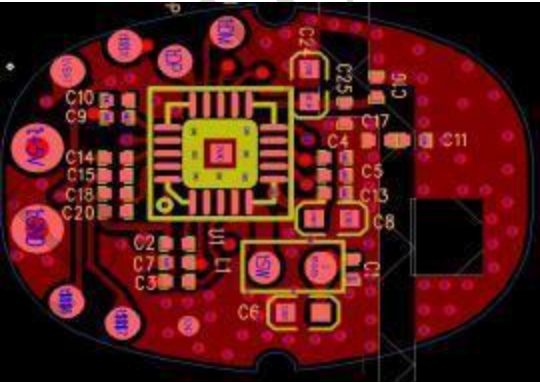
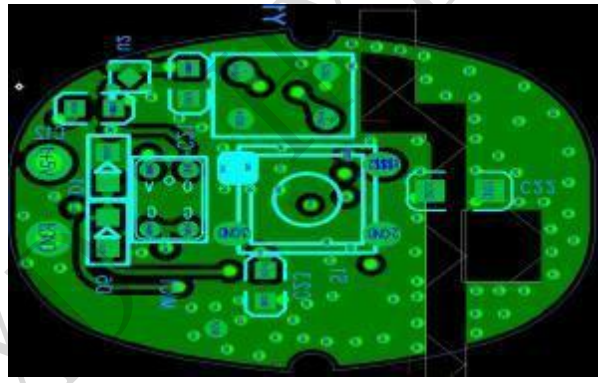
Dimension and Terminal Configuration

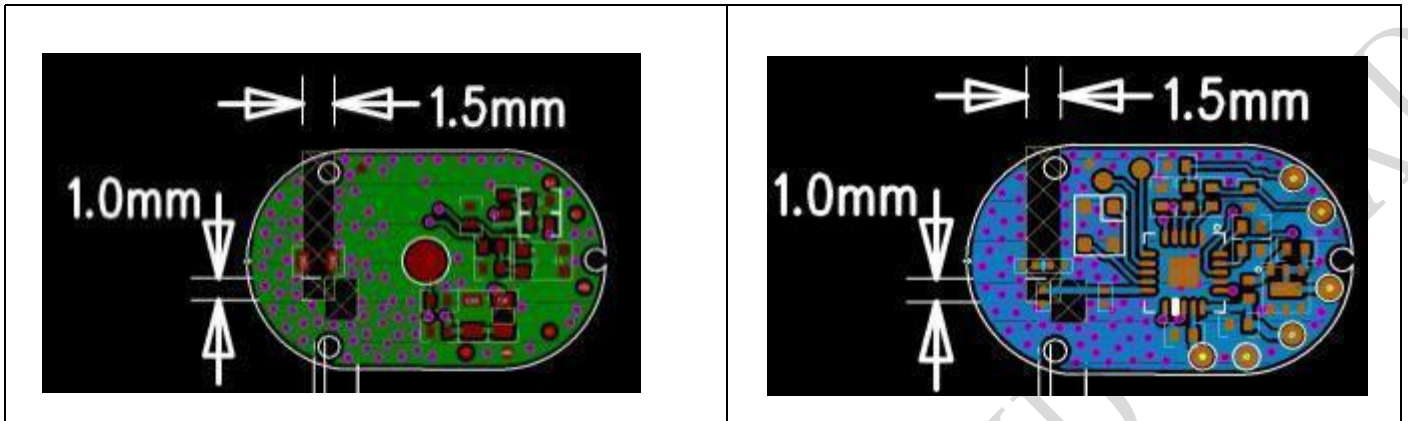
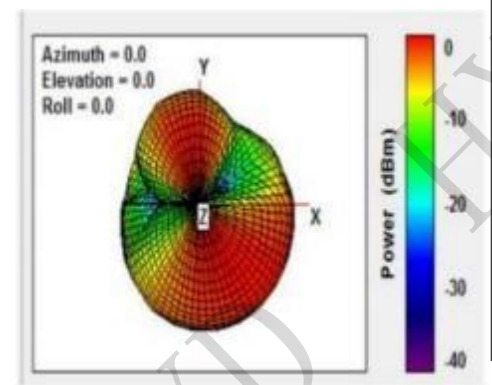
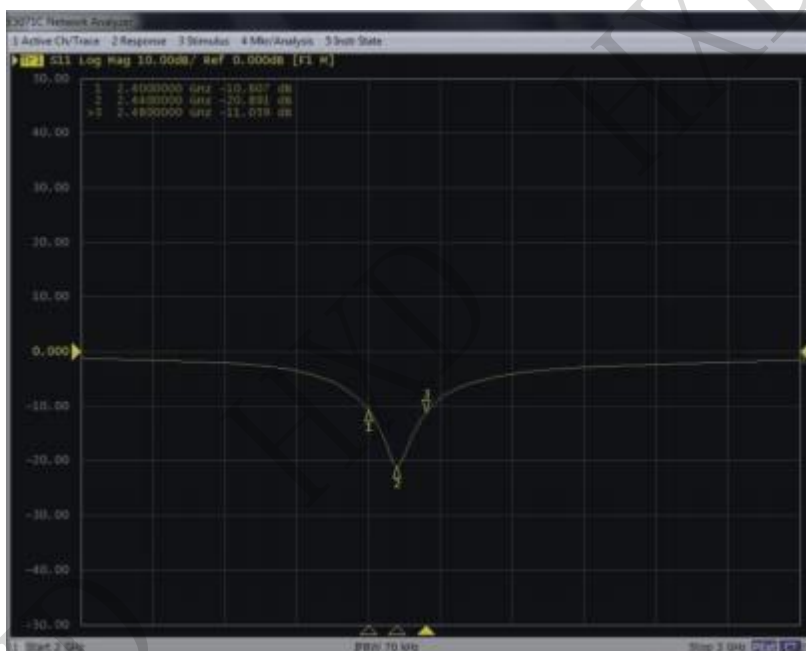


Dimension (mm)		No.	Terminal Name
L	1.60 : 0. 10	1	Feeding/ GNG
W	0 80 : 0 10	2	GND/ Feeding
T	0.80 : 0.10		

2.4GHz 1608 Chip Antenna: HXDANT1608- DC-05S

Evaluation Board Reference

	
设计标准: 1. 图示中的尺寸为标准封装, 仅作为参考; 净空区的尺寸会根据每个版型进行调整和优化。 2. 天线最优放置于PCBA的中间区域; 天线及其板后的匹配物料最优放置于板边缘。 3. 净空区周围需一排过孔, 与PCBA上的其它回路或物料进行隔离。 4. G最优为1.5~2mm, W最优为3~5mm, L最优为4~6mm, D最优为0.5~1mm。 5. 天线性能与版型、组装、佩戴等相关, 因而各版型的性能会有所不同。	
	
设计指导: 1、原则上, 净空区左侧边缘距离板边的间距 L1 应该尽量大, 且 注意与底部电池的间距。 2、净空区的宽度 W 最优为 1.5mm~2mm。 3、净空区的长度 L2 的长度为 2mm~4mm。	
	

2.4GHz 1608 Chip Antenna: HXDANT1608- DC-05S**Electrical Characteristics****Return Loss & Radiation****ELECTRICAL CHARACTERISTICSS1 1****Radiation Pattern**

2.4GHz 1608 Chip Antenna: HXDANT1608- DC-05S

Radiation

Electrical Characteristics

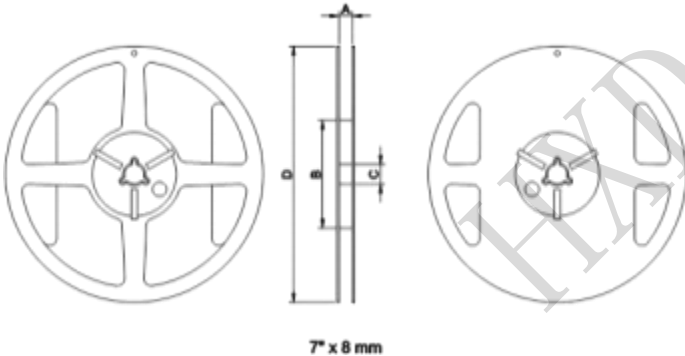
	Feature	Specification
1	Central frequency	2445MHz
2	Bandwidth	>100MHz
3	Peak gain	>3dBi
4	VSWR	<2
5	Polarization	Linear
6	Azimuth beamwidth	Omnidirectional
7	Impedance	50 Ω

2.4GHz 1608 Chip Antenna: HXDANT1608- DC-05S

Taping Specifications

Reel and Taping Specification

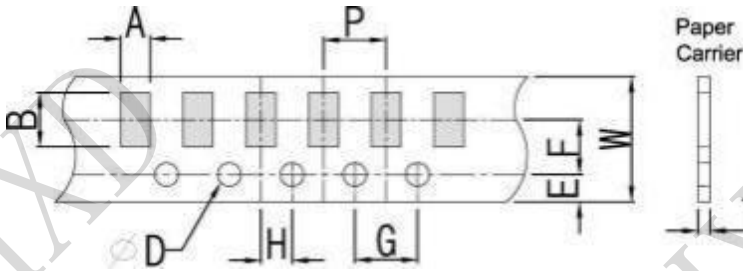
Reel Specification



7" x 8 mm

TYPE	SIZE		A	B	C	D
1608	7"	4K/ Reel	4.0±0.5	4.0±2	13.5±0.5	178±2

Tapping Specification



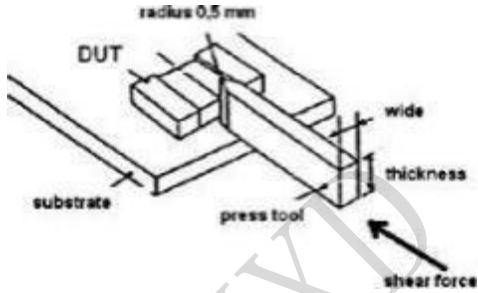
Packaging	Type	A	B	W	E	F	G	H	T	ψ D	P
Paper Type	1608	1.90±0.20	3.50±0.20	8.0±0.20	1.75±0.10	3.5±0.05	4.0±0.10	2.0±0.05	0.75±0.10	1.50±0.10	4.0±0.1

2.4GHz 1608 Chip Antenna: HXDANT1608- DC-05S

Reliability Table

Test Item	Procedure	Requirements Ceramic Type	Remark (Reference)
Electrical Characterization		Fulfill the electrical specification	User Spec.
Thermal Shock	1. Preconditioning: $50 \pm 10^\circ\text{C}$ / 1 hr , then keep for 24 ± 1 hrs at room temp. 2. Initial measure: Spec: refer Initialspec . 3. Rapid change of temperature test: -30°C to $+85^\circ\text{C}$; 100 cycles; 15 minutes at Lower category temperature; 15 minutes at Upper category temperature.	No Visible Damage. Fulfill the electrical specification.	MIL-STD-202 107
Temperature Cycling	1. Initial measure: Spec: refer Initialspec . 2. 100 Cycles (-30°C to $+85^\circ\text{C}$), Soak Mode=1 (2 Cycle/ hours). 3. Measurement at 24 ± 2 Hours after test condition.	No Visible Damage. Fulfill the electrical specification.	JESD22 JA104
High Temperature Exposure	1. Initial measure: Spec: refer Initialspec . 2. Unpowered; 500 hours @ $T=+85^\circ\text{C}$. 3. Measurement at 24 ± 2 hours after test.	No Visible Damage. Fulfill the electrical specification.	MIL-STD-202 108
Low Temperature Storage	1. Initial measure: Spec: refer Initialspec . 2. Unpowered: 500 hours @ $T= -30^\circ\text{C}$. 3. Measurement at 24 ± 2 hours after test.	No Visible Damage. Fulfill the electrical specification.	MIL-STD-202 108
Solderability (SMD Bottom Side)	Dipping method: a. Temperature: $235 \pm 5^\circ\text{C}$ b. Dipping time: $3 \pm 0.5\text{s}$	The solder should cover over 95% of the critical area of bottom side.	IEC 60384-21/22 4. 10
Soldering Heat Resistance (RSH)	Preheating temperature: $150 \pm 10^\circ\text{C}$. Preheating time: 1~2 min. Solder temperature: $260 \pm 5^\circ\text{C}$. Dipping time: $5 \pm 0.5\text{s}$	No Visible Damage.	IEC 60384-21/22 4. 10
Vibration	5 g's for 20 min. , 12 cycles each of 3 orientations Note: Use 8"X5" PCB .031" thick 7 secure points on, one long side and 2 secure points at corners of opposite sides. Parts mounted within 2" from any secure point. Test from 10-2000 Hz.	No Visible Damage.	MIL-STD-202 Method 204
Mechanical Shock	Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks) Peak value: 1,500g's Duration: 0.5ms Velocity change: 15.4 ft/s Waveform: Half-sine	No Visible Damage.	MIL-STD-202 Method 213
Humidity Bias	1. Humidity: 85% R.H. , Temperature: $85 \pm 2^\circ\text{C}$. 2. Time: 500 ± 24 hours . 3. Measurement at 24 ± 2 hrs after test condition.	No Visible Damage. Fulfill the electrical specification.	MIL-STD-202 Method 106

2.4GHz 1 6 0 8 Chip Antenna: HXDANT1608- DC-05S

Board Flex (SMD)	1. Mounting method: IR-Reflow. PCB Size (L: 100 × W:40 × T: 1.6mm) 2. Apply the load in direction of the arrow until bending reaches 2 mm .	No Visible Damage.	AEC-Q200 005
Ad hes ion	Force of 1.8Kg for 60 seconds. 	No Visible Damage Magnification of 20X or greater may be employed for inspection of the mechanical integrity of the device body terminals and body/ terminal junction.	AEC-Q200 006
Physical Dimension	Any applicab le met hod us ing X10 mag nification, micrometers, calipers, gauges, contour projectors, or other measuring equipment, capable of determining the actual specimen dimensions.	In accorda nce with specification.	JESD22 JB100

Revision History

Revision	Date	Content
1	2023/03/01	New Datasheet
2	2024/10/22	Add 2D radiation characteristic