

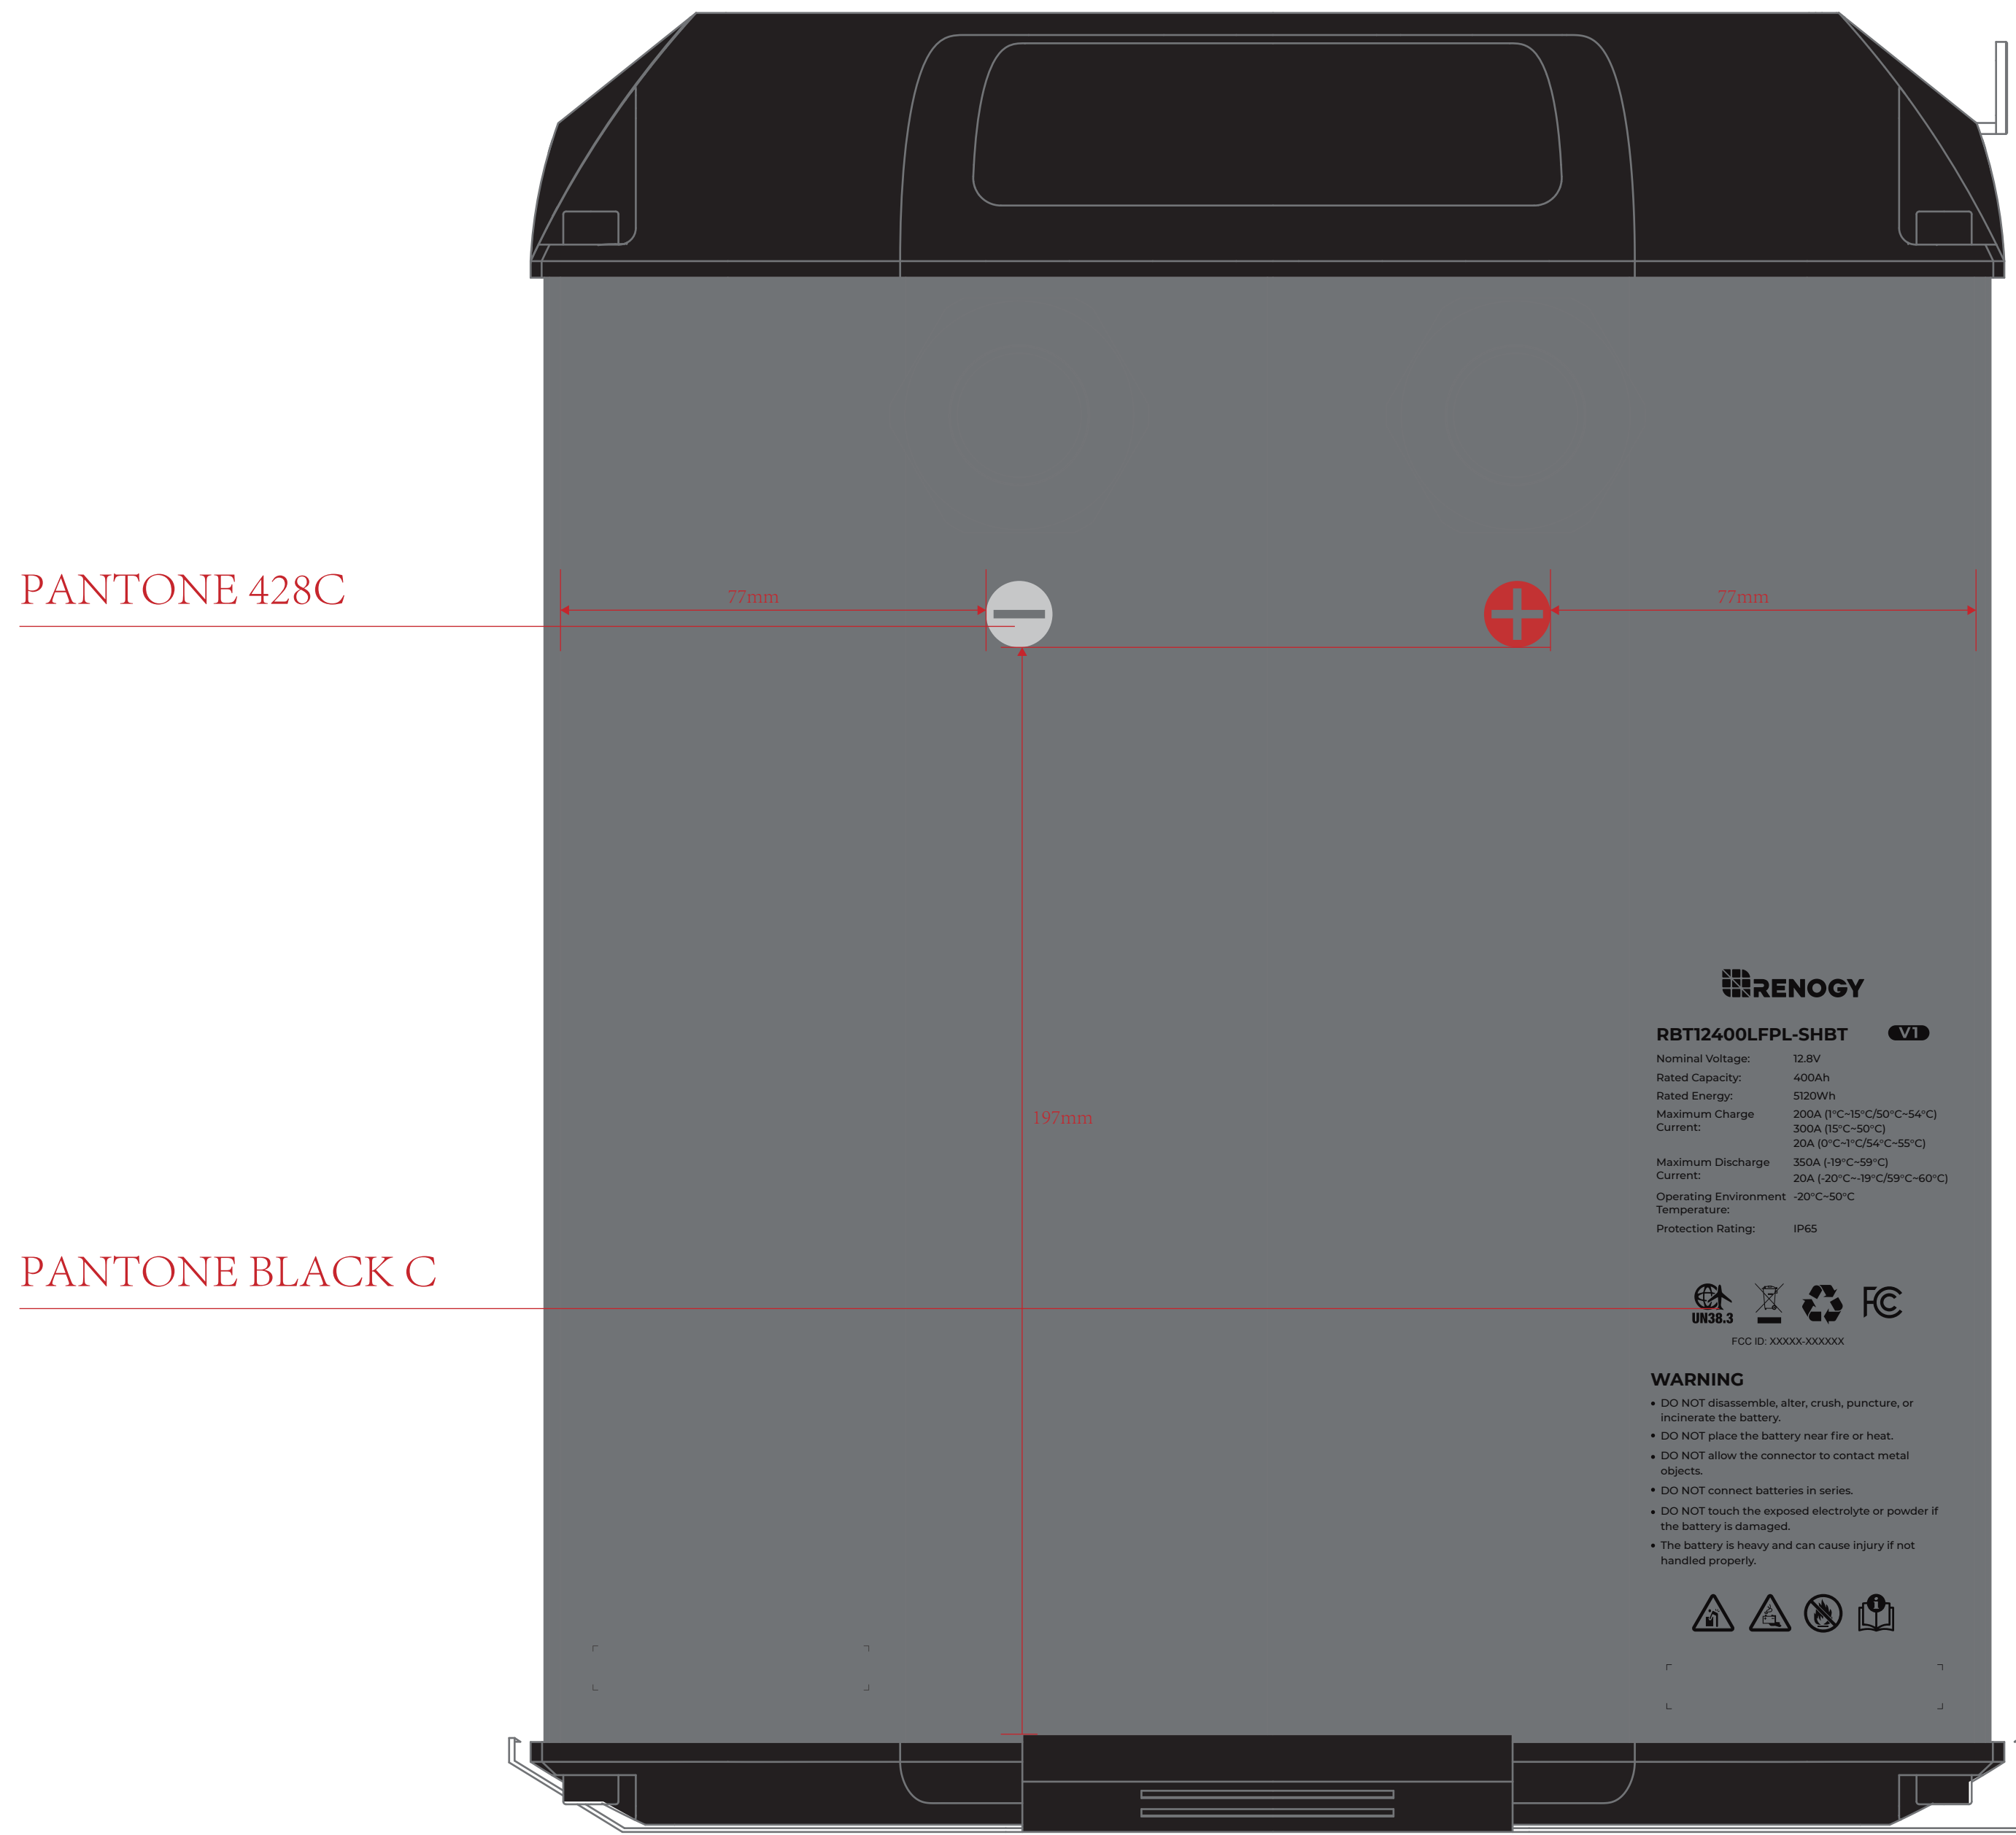
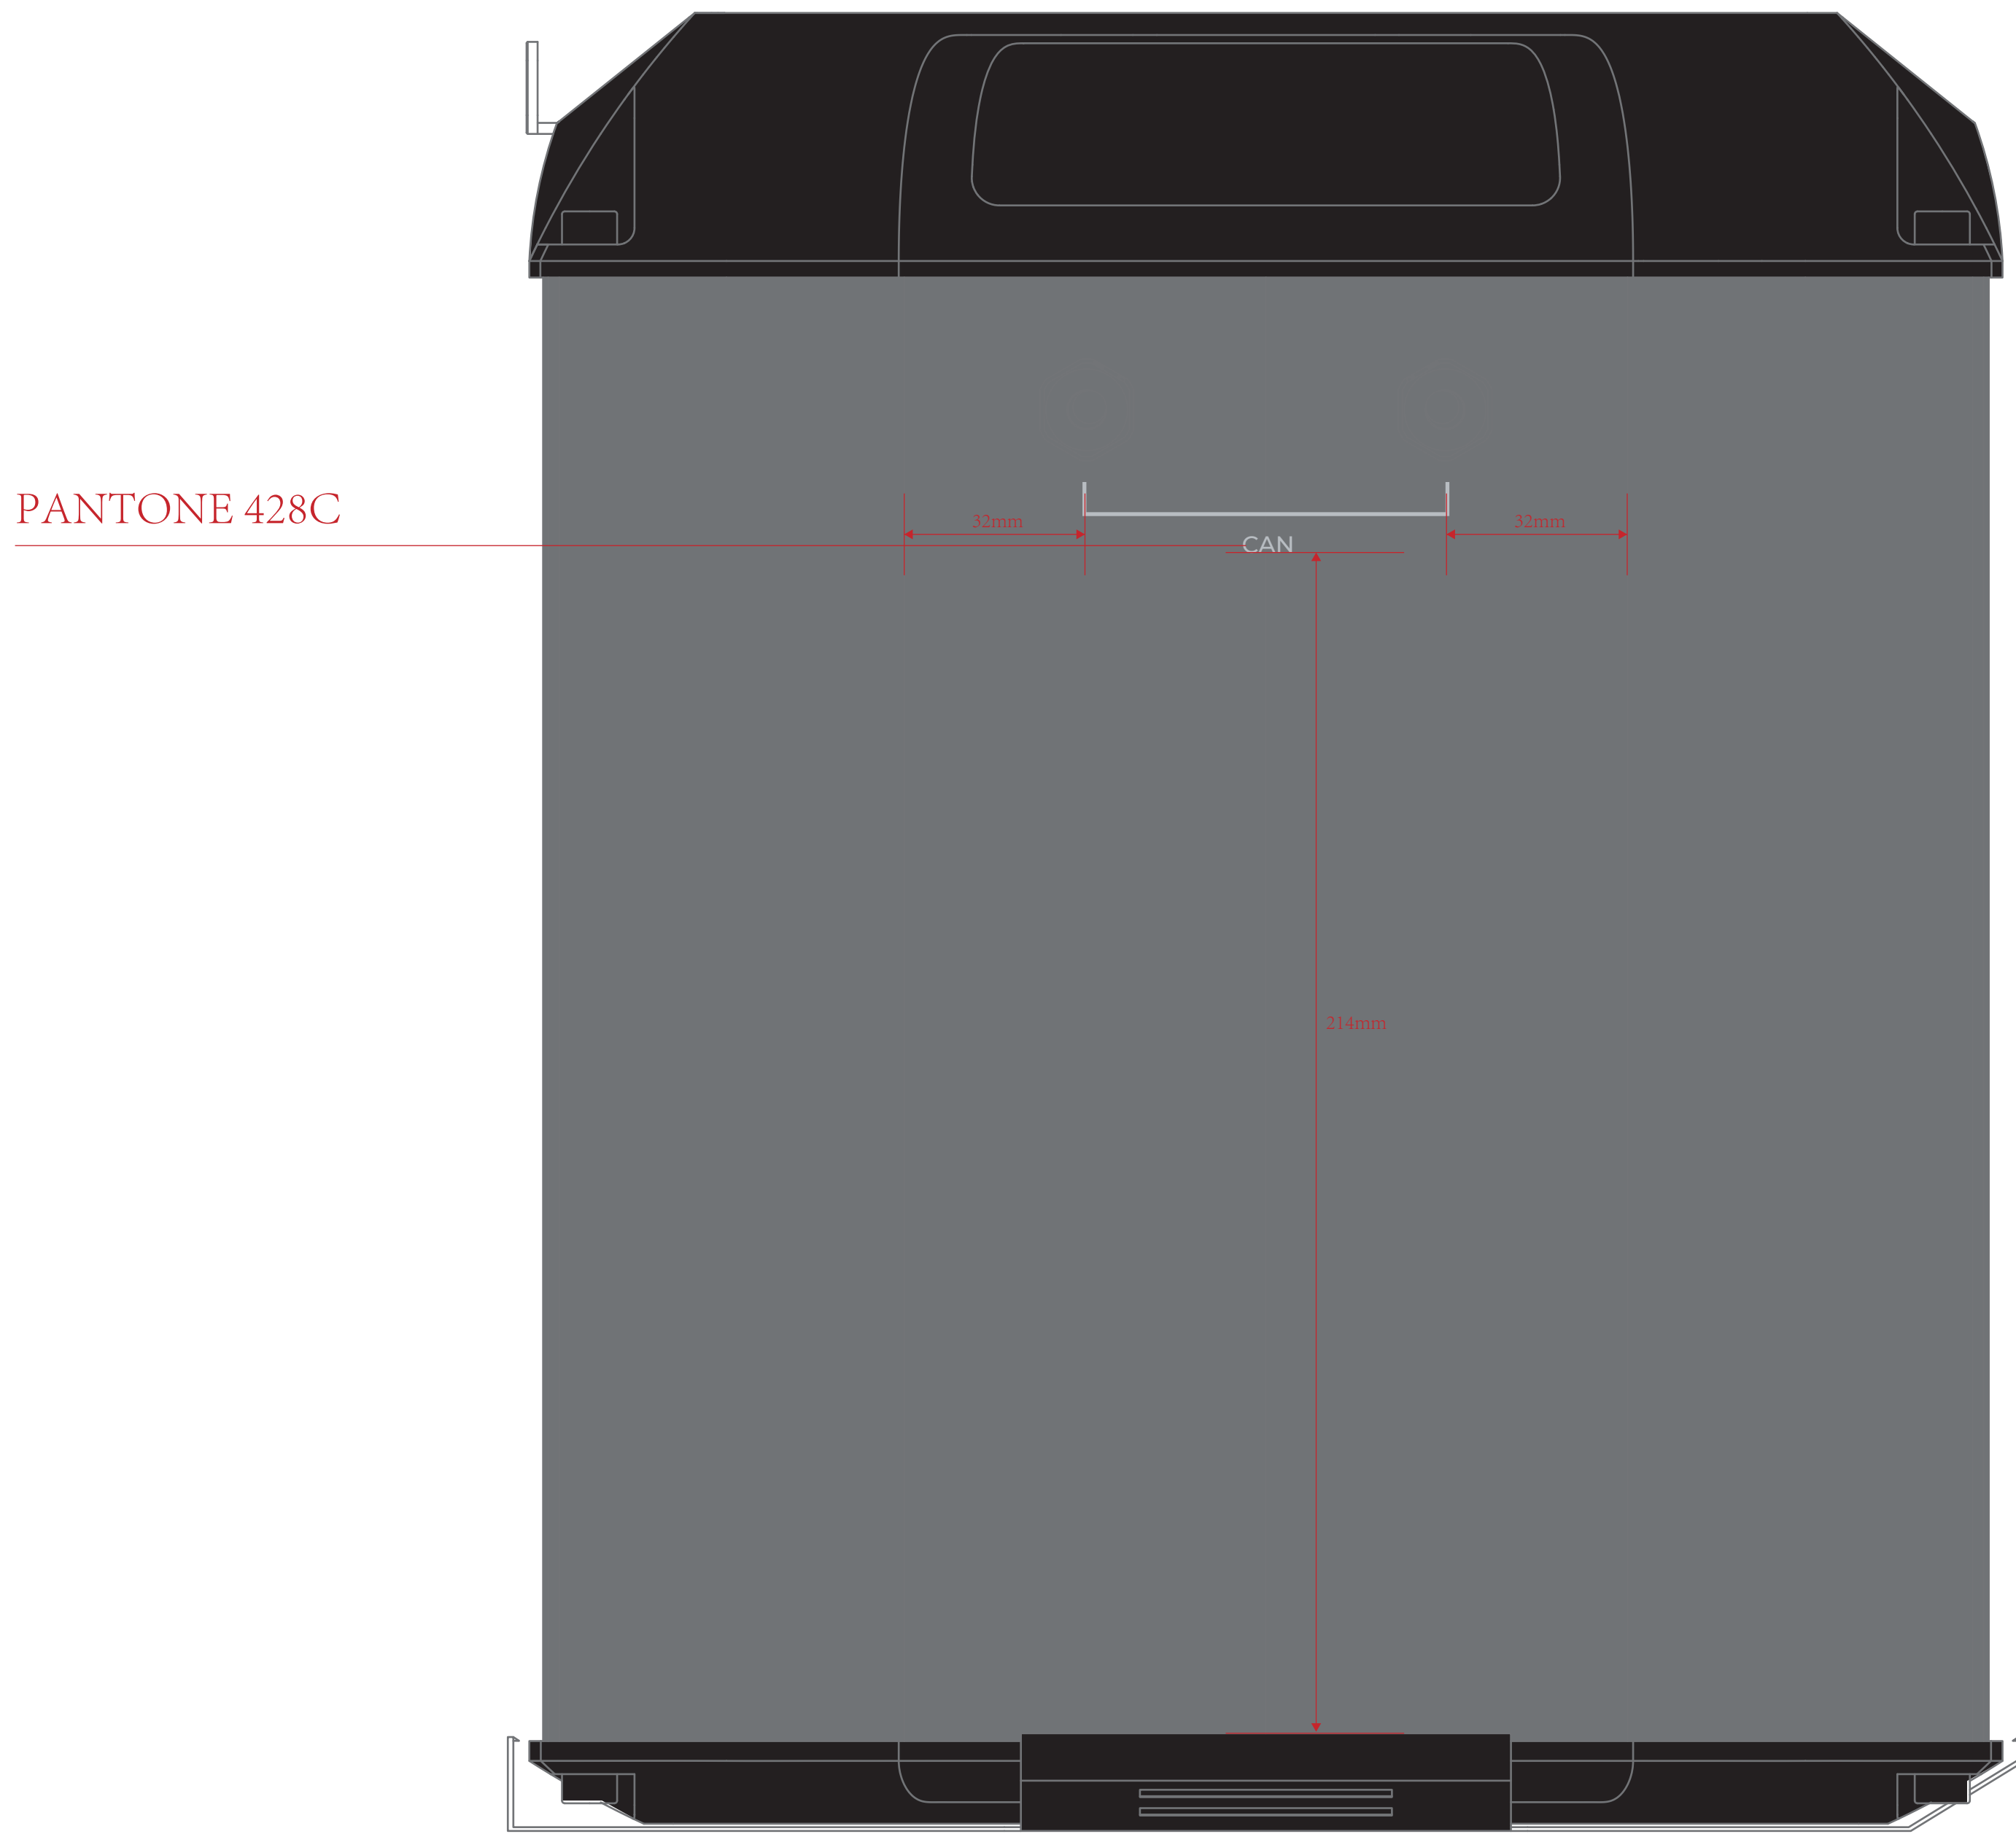


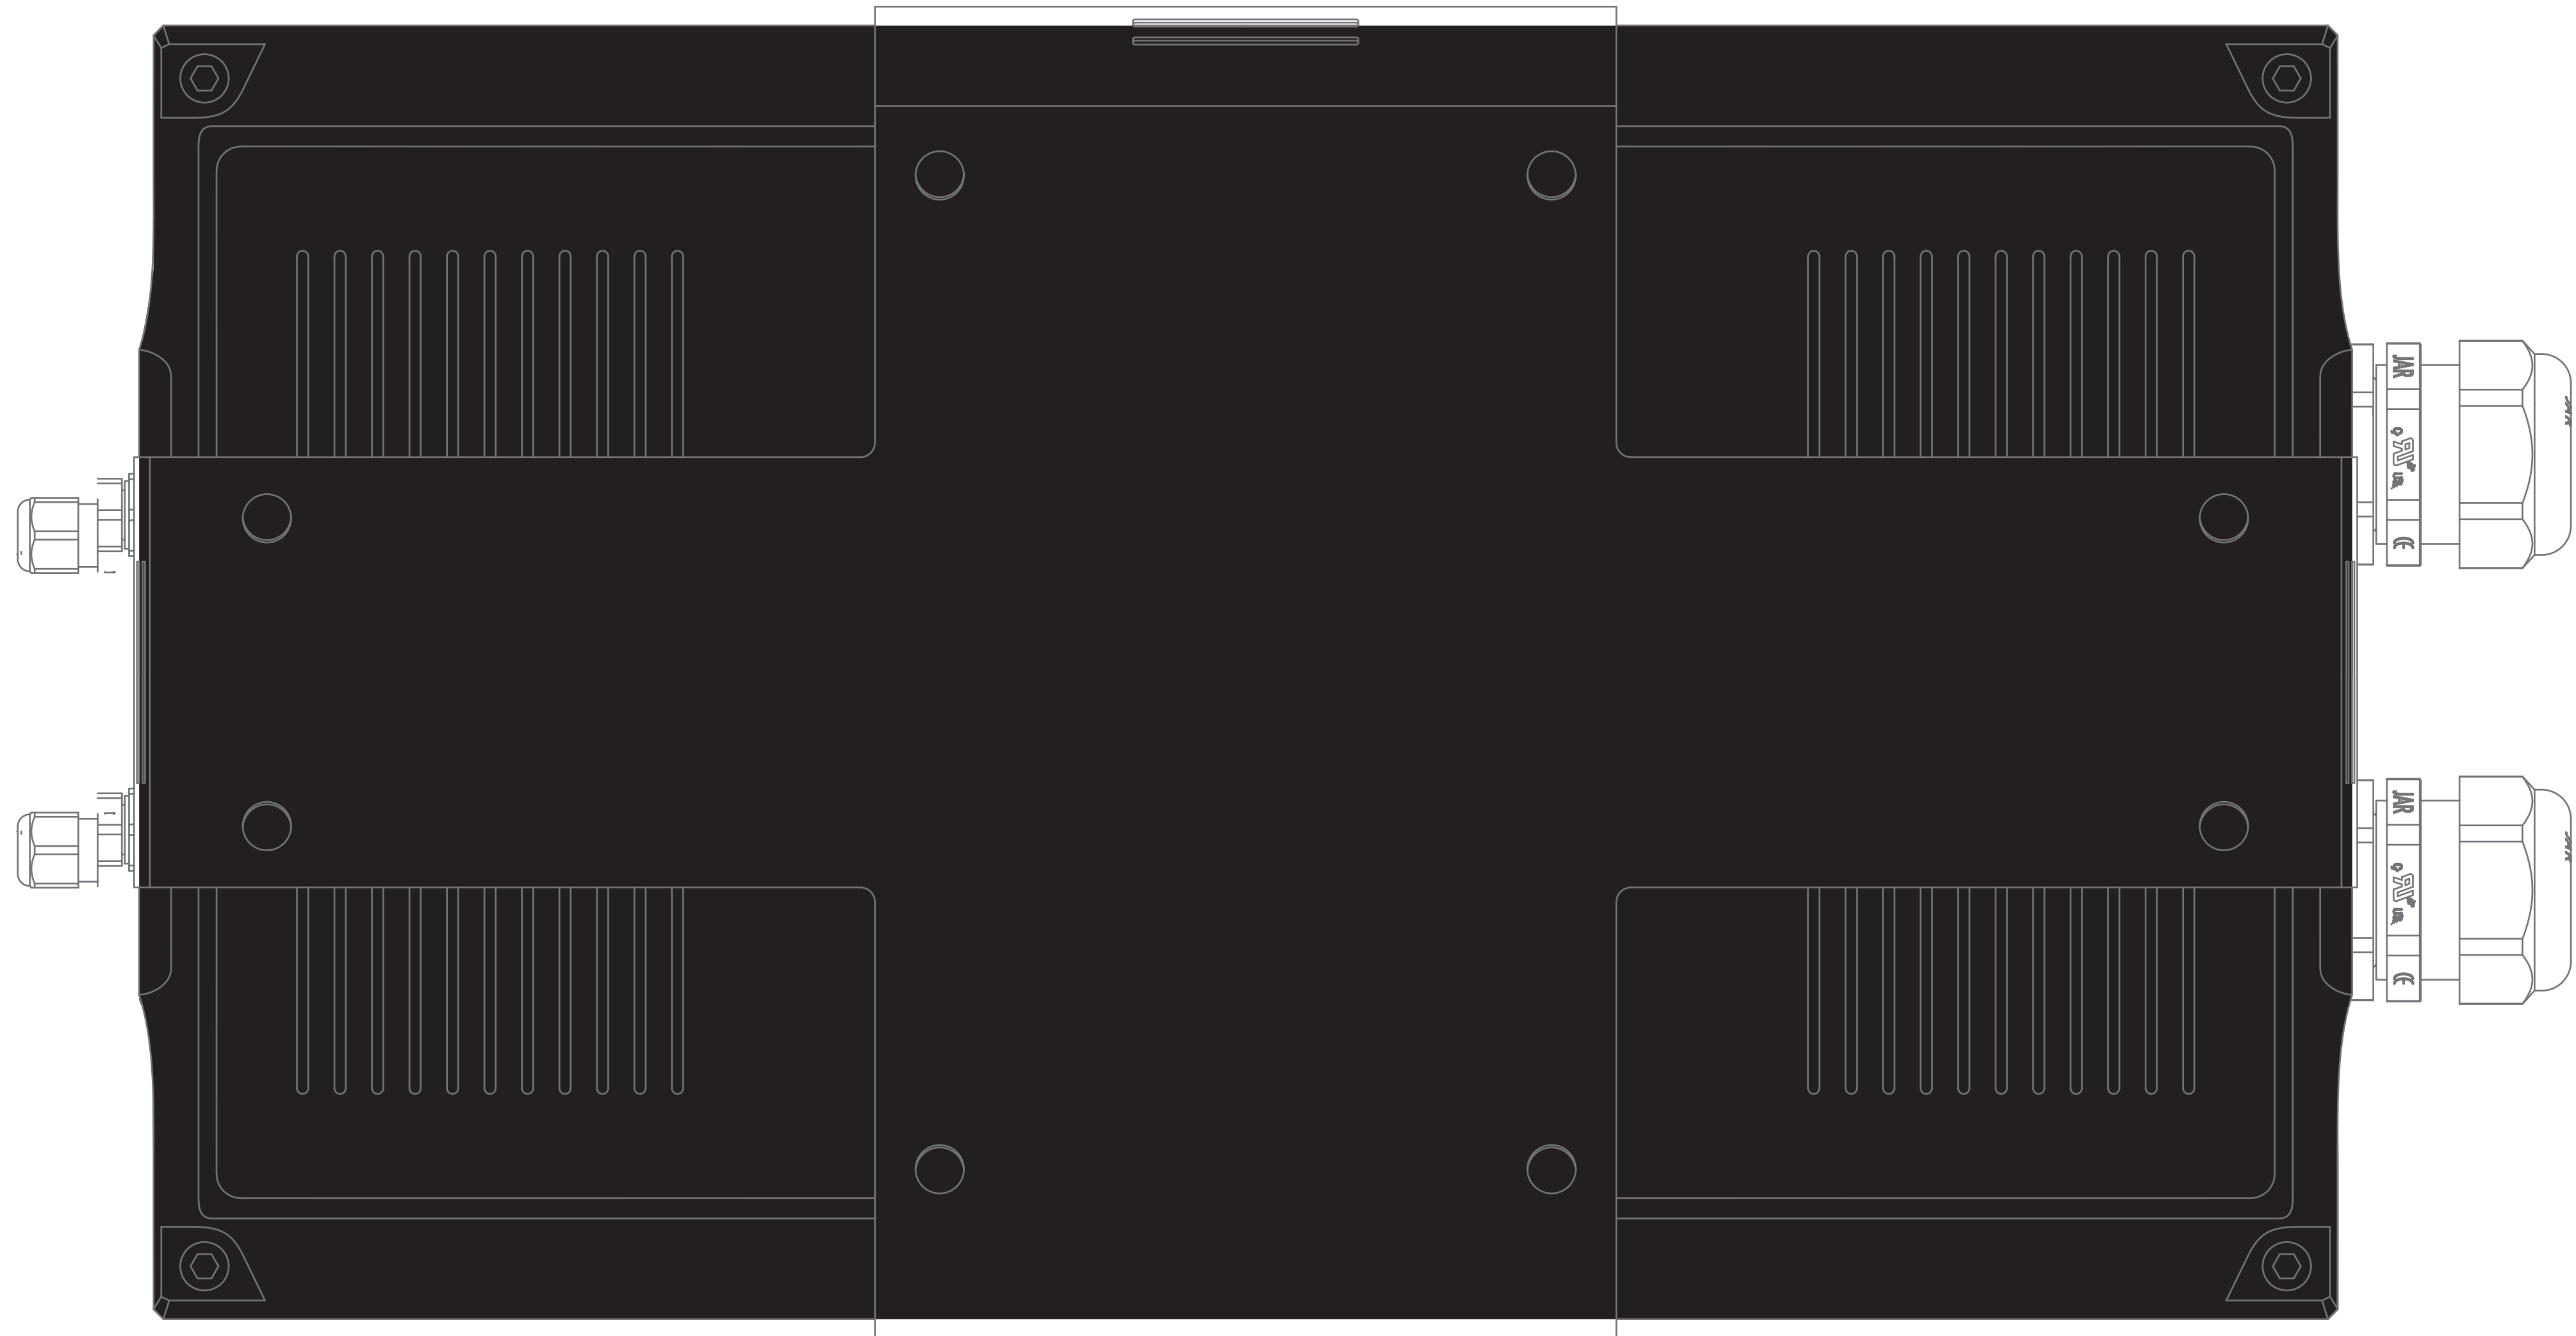

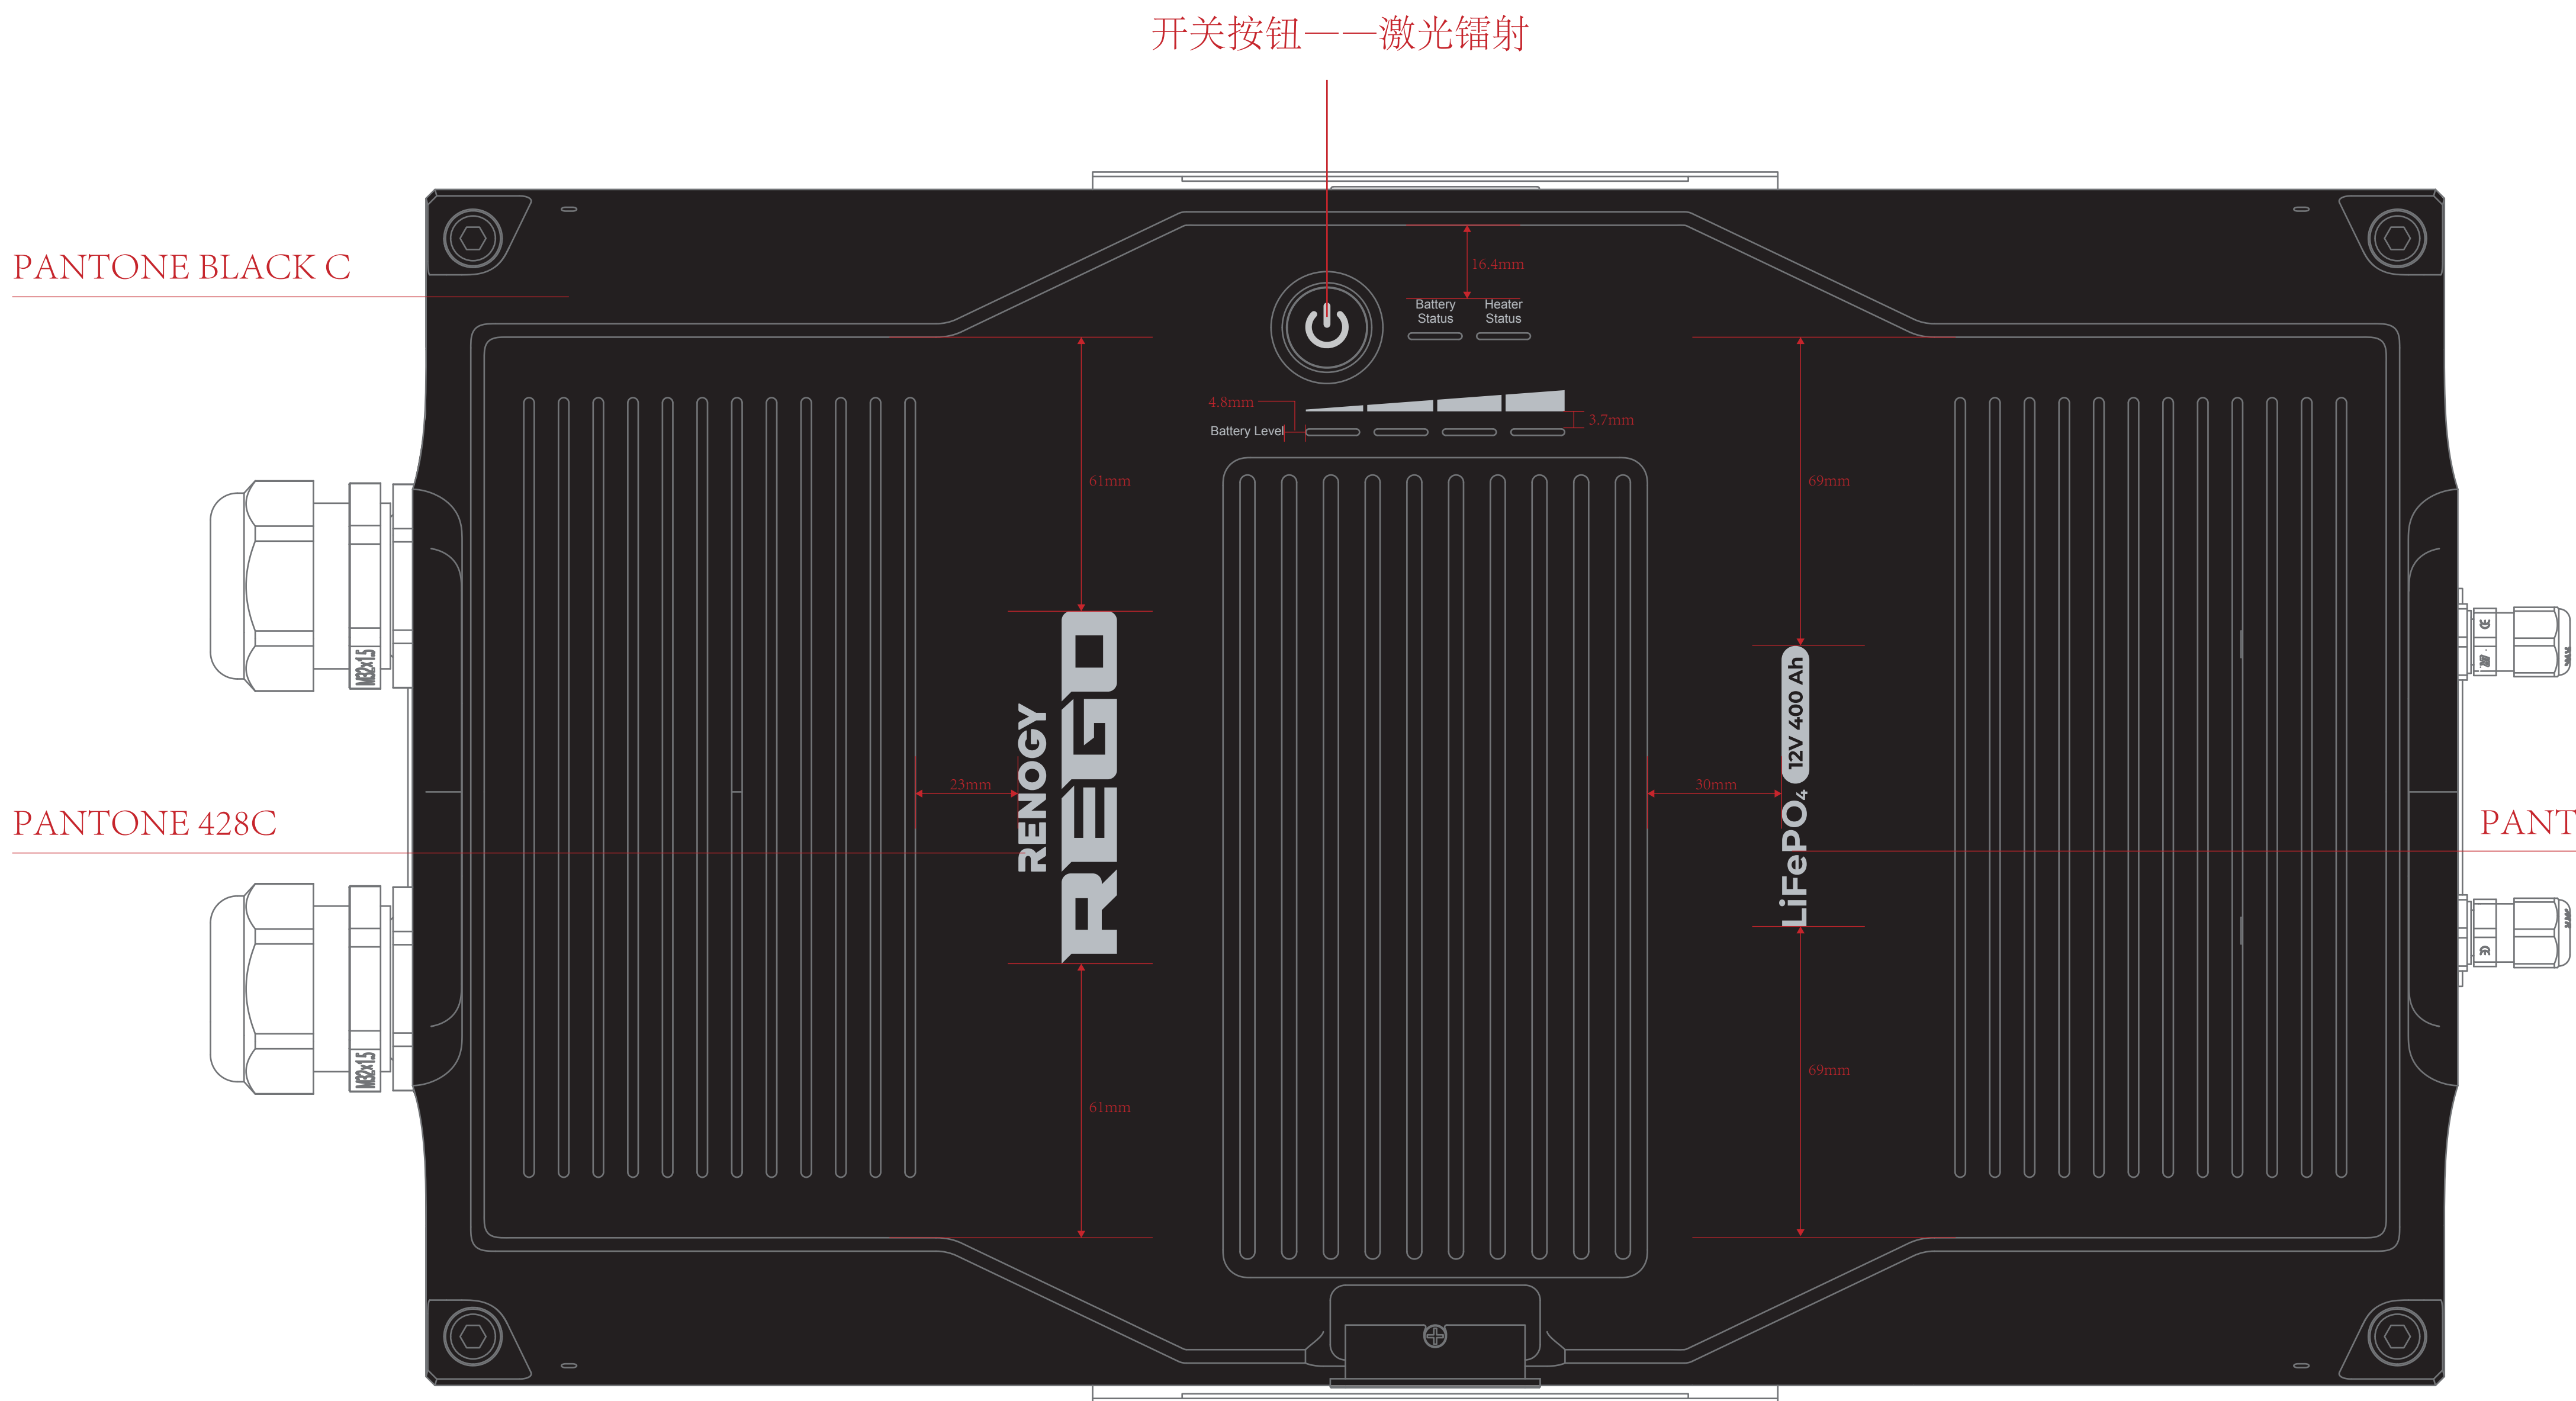

## RBT12400LFPL-SHBT

V1

|                                    |                                                                          |
|------------------------------------|--------------------------------------------------------------------------|
| Nominal Voltage:                   | 12.8V                                                                    |
| Rated Capacity:                    | 400Ah                                                                    |
| Rated Energy:                      | 5120Wh                                                                   |
| Maximum Charge Current:            | 200A (1°C~15°C/50°C~54°C)<br>300A (15°C~50°C)<br>20A (0°C~1°C/54°C~55°C) |
| Maximum Discharge Current:         | 350A (-19°C~59°C)<br>20A (-20°C~-19°C/59°C~60°C)                         |
| Operating Environment Temperature: | -20°C~50°C                                                               |
| Protection Rating:                 | IP65                                                                     |



FCC ID: 2ANPB51911000141800

### WARNING

- DO NOT disassemble, alter, crush, puncture, or incinerate the battery.
- DO NOT place the battery near fire or heat.
- DO NOT allow the connector to contact metal objects.
- DO NOT connect batteries in series.
- DO NOT touch the exposed electrolyte or powder if the battery is damaged.
- The battery is heavy and can cause injury if not handled properly.



\*148±1mm