

TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C §15.247 (FHSS) and subpart B,
RSS-247 Issue 2:2017, RSS-Gen Issue 5:2018, ICES-003 Issue 6:2016

FOR:

VISIONIC Ltd.

**EUT: Wireless ceiling PIR
presence/security detector**

Model: MP-862 PG2

FCC ID: WP3MP862PG2

IC: 1467C-MP862PG2

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Test configuration.....	5
6.3	Changes made in EUT	5
6.4	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-247 requirements	7
7.1	20 dB bandwidth	7
7.2	Carrier frequency separation	10
7.3	Number of hopping frequencies	12
7.4	Average time of occupancy	14
7.5	Peak output power	17
7.6	Field strength of spurious emissions	21
7.7	Band edge radiated emissions	34
7.8	Antenna requirements	38
8	Unintentional emissions	39
8.1	Radiated emission measurements	39
9	APPENDIX A Test equipment and ancillaries used for tests.....	43
10	APPENDIX B Test equipment correction factors.....	44
11	APPENDIX C Measurement uncertainties	51
12	APPENDIX D Test laboratory description	52
13	APPENDIX E Specification references.....	53
14	APPENDIX F Abbreviations and acronyms.....	54

1 Applicant information

Client name: Visonic Ltd.
Address: 24 Habarzel street, Tel Aviv 69710, Israel
Telephone: +972 3645 6832
Fax: +972 3645 6788
E-mail: zurir@tycoint.com
Contact name: Mr. Zuri Rubin

2 Equipment under test attributes

Product name: Wireless ceiling PIR presence/security detector
Product type: Transceiver
Model: MP-862 PG2
Serial number: NA
Hardware version: 90-208692
Software release: JS-703384
Receipt date: 18-Feb-18

3 Manufacturer information

Manufacturer name: Visonic Ltd.
Address: 24 Habarzel street, Tel Aviv 69710, Israel
Telephone: +972 3645 6832
Fax: +972 3645 6788
E-Mail: zurir@tycoint.com
Contact name: Mr. Zuri Rubin

4 Test details

Project ID: 30669
Location: Hermon Laboratories Ltd. P.O. Box 23, Binyamina 3055001, Israel
Test started: 28-Mar-18
Test completed: 10-Apr-18
Test specifications: FCC 47CFR part 15 subpart C § 15.247 (FHSS) and subpart B;
RSS-247 Issue 2:2017; RSS-Gen Issue 5:2014; ICES-003 Issue 6:2016

5 Tests summary

Test	Status
Transmitter characteristics	
Section 15.247(a)1 / RSS-247 section 5.1(c), 20 dB bandwidth	Pass
Section 15.247(b) / RSS-247 section 5.4(a), Peak output power	Pass
Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions	Pass
Section 15.247(a)1 / RSS-247 section 5.1(b), Frequency separation	Pass
Section 15.247(a)1 / RSS-247 section 5.1(c), Number of hopping frequencies	Pass
Section 15.247(a)1 / RSS-247 section 5.1(c), Average time of occupancy	Pass
Section 15.247(i)5 / RSS-102 section 2.5, RF exposure	Pass, the exhibit to the application of certification is provided
Section 15.247(d) / RSS-247 section 5.5, Emissions at band edges	Pass
Section 15.203 / RSS-Gen section 8.3, Antenna requirements	Pass
Section 15.207(a) / RSS-Gen section 8.8, Conducted emission	Not required
Unintentional emissions	
Section 15.107/ICES-003, Section 6.1, Class B, Conducted emission at AC power port	Not required
Section 15.109/ RSS-Gen section 7.1.2 /ICES-003, Section 6.2, Class B, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mrs. E. Pitt, test engineer	28-Mar-18 – 10-Apr-18	
Reviewed by:	Mrs. Y. Rapin, technical writer	25-Apr-18	
Approved by:	Mr. K. Zushchyk, projects and customer manager, EMC and radio group	31-May-18	




6 EUT description

6.1 General information

The EUT is a wireless indoor PIR detector operating in 912.750 – 919.106 MHz. The EUT is equipped with an integral antenna and is powered from 3 VDC internal battery.

6.2 Test configuration

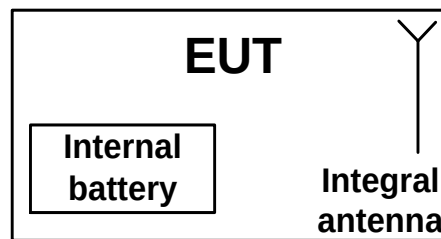

6.3 Changes made in EUT

No changes were implemented in the EUT during the testing.



6.4 Transmitter characteristics

Type of equipment						
X	Stand-alone (Equipment with or without its own control provisions)					
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)					
	Plug-in card (Equipment intended for a variety of host systems)					
Intended use		Condition of use				
	fixed	Always at a distance more than 2 m from all people				
X	mobile	Always at a distance more than 20 cm from all people				
	portable	May operate at a distance closer than 20 cm to human body				
Assigned frequency ranges		902 – 928 MHz				
Operating frequencies		912.750 – 919.106 MHz				
Maximum rated output power		At transmitter 50 Ω RF output connector			dBm	
		Peak output power			13.99 dBm	
Is transmitter output power variable?		X	No			
			Yes	continuous variable		
				stepped variable with stepsize		
				minimum RF power		
				maximum RF power		
Antenna connection						
unique coupling		standard connector		X	integral	
				X	with temporary RF connector	
				X	without temporary RF connector	
Antenna/s technical characteristics						
Type		Manufacturer		Model number		
Helical		Ocean		Visonic P.N--H-302031		
Gain		-1 dBi				
Transmitter aggregate data rate/s		50 kbps				
Type of modulation		GFSK				
Modulating test signal (baseband)		PRBS				
Transmitter power source						
X	Battery	Nominal rated voltage	3.0 VDC	Battery type	CR123A	
	DC	Nominal rated voltage				
	AC mains	Nominal rated voltage		Frequency		
Common power source for transmitter and receiver						
X yes no						
Spread spectrum technique used		X	Frequency hopping (FHSS)			
			Digital transmission system (DTS)			
			Hybrid			
Spread spectrum parameters for transmitters tested per FCC 15.247 only						
FHSS	Total number of hops		50			
	Bandwidth per hop		104.28 kHz			
	Max. separation of hops		131.7 kHz			



Test specification:	Section 15.247(a)1, RSS-247 section 5.1(3), 20 dB bandwidth		
Test procedure:	ANSI C63.10, section 7.8.7		
Test mode:	Compliance	Verdict:	PASS
Date(s):	02-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1010 hPa	Power: 3 VDC
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C and RSS-247 requirements

7.1 20 dB bandwidth

7.1.1 General

This test was performed to measure the 20 dB bandwidth of the transmitter hopping channel. Specification test limits are given in Table 7.1.1.

Table 7.1.1 The 20 dB bandwidth limits

Assigned frequency, MHz	Maximum bandwidth, kHz	Modulation envelope reference points*, dBc
902.0 – 928.0	250	20
2400.0 – 2483.5	NA	
5725.0 – 5850.0	1000	

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit modulated carrier at maximum data rate.

7.1.2.3 The transmitter bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and associated plot.

7.1.2.4 The test was repeated for each data rate and each modulation format.

Figure 7.1.1 The 20 dB bandwidth test setup



Test specification:	Section 15.247(a)1, RSS-247 section 5.1(3), 20 dB bandwidth		
Test procedure:	ANSI C63.10, section 7.8.7		
Test mode:	Compliance	Verdict: PASS	
Date(s):	02-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1010 hPa	Power: 3 VDC
Remarks:			

Table 7.1.2 The 20 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 902.0 – 928.0 MHz
DETECTOR USED: Peak
SWEEP TIME: Auto
VIDEO BANDWIDTH: ≥ RBW
MODULATION ENVELOPE REFERENCE POINTS: 20.0 dBc
FREQUENCY HOPPING: Disabled


Carrier frequency, MHz	Type of modulation	Data rate, kbps	Symbol rate, Msymbols/s	20 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
912.750	QPSK	50	NA	104.28	250	-145.72	Pass
915.863				103.87	250	-146.13	Pass
919.106				104.03	250	-145.97	Pass

Reference numbers of test equipment used

HL 3818	HL 4136							
---------	---------	--	--	--	--	--	--	--

Full description is given in Appendix A.

Plot 7.1.1 The 20 dB bandwidth test result at low frequency

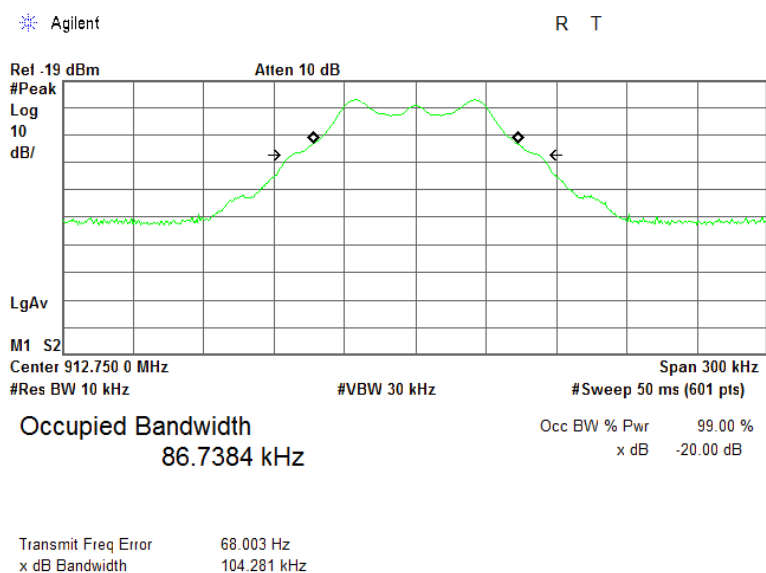




HERMON LABORATORIES

Report ID: VISRAD_FCC.30669

Date of Issue: 12-Jun-18


Test specification:	Section 15.247(a)1, RSS-247 section 5.1(3), 20 dB bandwidth		
Test procedure:	ANSI C63.10, section 7.8.7		
Test mode:	Compliance	Verdict:	PASS
Date(s):	02-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1010 hPa	Power: 3 VDC
Remarks:			

Plot 7.1.2 The 20 dB bandwidth test result at mid frequency

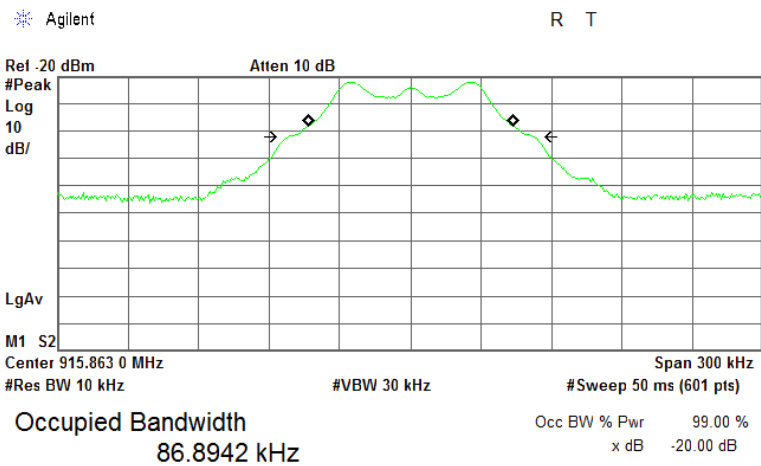

Transmit Freq Error 375.686 Hz
x dB Bandwidth 103.873 kHz

Plot 7.1.3 The 20 dB bandwidth test result at high frequency

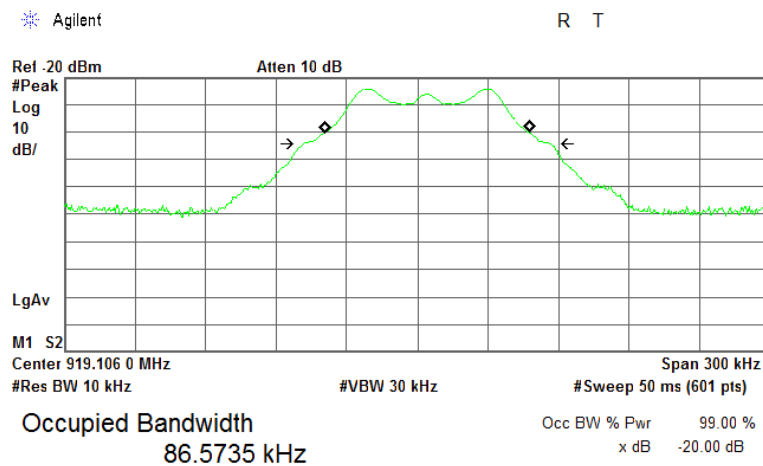

Transmit Freq Error 4.187 kHz
x dB Bandwidth 104.031 kHz



Test specification:	Section 15.247(a)1, Frequency separation		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	02-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1010 hPa	Power: 3 VDC
Remarks:			

7.2 Carrier frequency separation

7.2.1 General

This test was performed to measure frequency separation between the peaks of adjacent channels. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Carrier frequency separation limits

Assigned frequency range, MHz	Carrier frequency separation	
	Output power 30 dBm	Output power 21 dBm
902.0 – 928.0	25 kHz or 20 dB bandwidth of the hopping channel, whichever is greater	25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater
2400.0 – 2483.5		
5725.0 – 5850.0		

7.2.2 Test procedure

- 7.2.2.1** The EUT was set up as shown in Figure 7.2.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.2.2.2** The spectrum analyzer span was set to capture the carrier frequency and both of adjacent channels, the lower and the higher. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.2.2.3** The spectrum analyzer was set in max hold mode and allowed trace to stabilize.
- 7.2.2.4** The frequency separation between the peaks of adjacent channels was measured as provided in Table 7.2.2 and associated plots.

Figure 7.2.1 Carrier frequency separation test setup





HERMON LABORATORIES

Report ID: VISRAD_FCC.30669

Date of Issue: 12-Jun-18

Test specification:	Section 15.247(a)1, Frequency separation		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	02-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1010 hPa	Power: 3 VDC
Remarks:			

Table 7.2.2 Carrier frequency separation test results

ASSIGNED FREQUENCY: 902-928 MHz
 MODULATION: QPSK
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: $\geq 1\%$ of the span
 VIDEO BANDWIDTH: $\geq$ RBW
 FREQUENCY HOPPING: Enabled
 20 dB BANDWIDTH: 104.28 kHz

Carrier frequency separation, kHz	Limit, kHz	Margin*	Verdict
131.7	104.28	27.42	Pass


* - Margin = Carrier frequency separation – specification limit.

Reference numbers of test equipment used

HL 3818	HL 4136						
---------	---------	--	--	--	--	--	--

Full description is given in Appendix A.

Plot 7.2.1 Carrier frequency separation

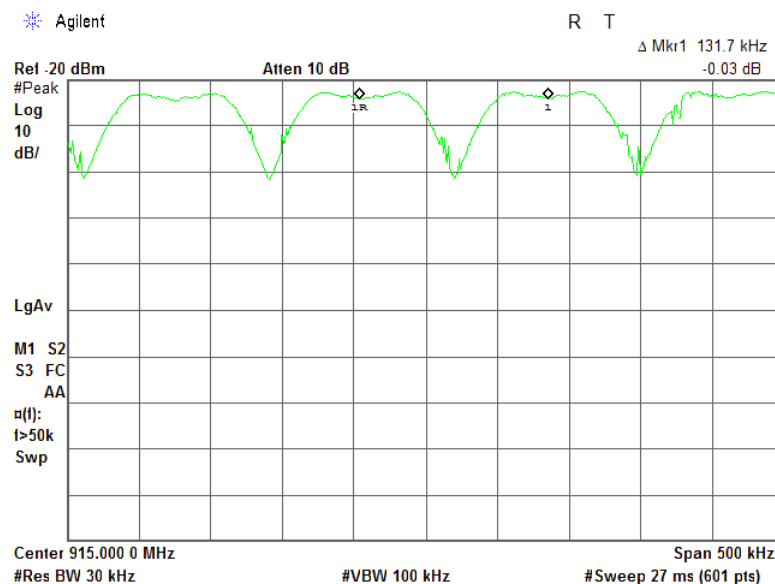

Test specification:	Section 15.247(a)1, Number of hopping frequencies		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	02-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1010 hPa	Power: 3 VDC
Remarks:			

7.3 Number of hopping frequencies

7.3.1 General

This test was performed to calculate the number of hopping frequencies used by the EUT. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Minimum number of hopping frequencies

Assigned frequency range, MHz	Number of hopping frequencies
902.0 – 928.0	50 (if the 20 dB bandwidth is less than 250 kHz) 25 (if the 20 dB bandwidth is 250 kHz or greater)
2400.0 – 2483.5	15
5725.0 – 5850.0	75

7.3.2 Test procedure

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized with frequency hopping function enabled and its proper operation was checked.

7.3.2.2 Initially the spectrum analyzer span was set equal to frequency band of operation and the resolution bandwidth was set wider than 1 % of the frequency span. If the separate hopping channels were not clearly resolved the frequency band of operation was broken to sections and the resolution bandwidth was set wider than 1 % of the frequency span of each section.

7.3.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize.

7.3.2.4 The number of frequency hopping channels was calculated as provided in Table 7.3.2 and associated plots.

Figure 7.3.1 Hopping frequencies test setup





HERMON LABORATORIES

Report ID: VISRAD_FCC.30669

Date of Issue: 12-Jun-18

Test specification:	Section 15.247(a)1, Number of hopping frequencies		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	02-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1010 hPa	Power: 3 VDC
Remarks:			

Table 7.3.2 Hopping frequencies test results

ASSIGNED FREQUENCY: 902.0 – 928.0 MHz
 MODULATION: GFSK
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: $\geq 1\%$ of the span
 VIDEO BANDWIDTH: $\geq$ RBW
 FREQUENCY HOPPING: Enabled

Number of hopping frequencies	Minimum number of hopping frequencies	Margin*	Verdict
50	50	0	Pass


* - Margin = Number of hopping frequencies – Minimum number of hopping frequencies.

Reference numbers of test equipment used

HL 3818	HL 4136						
---------	---------	--	--	--	--	--	--

Full description is given in Appendix A.

Plot 7.3.1 Number of hopping frequencies

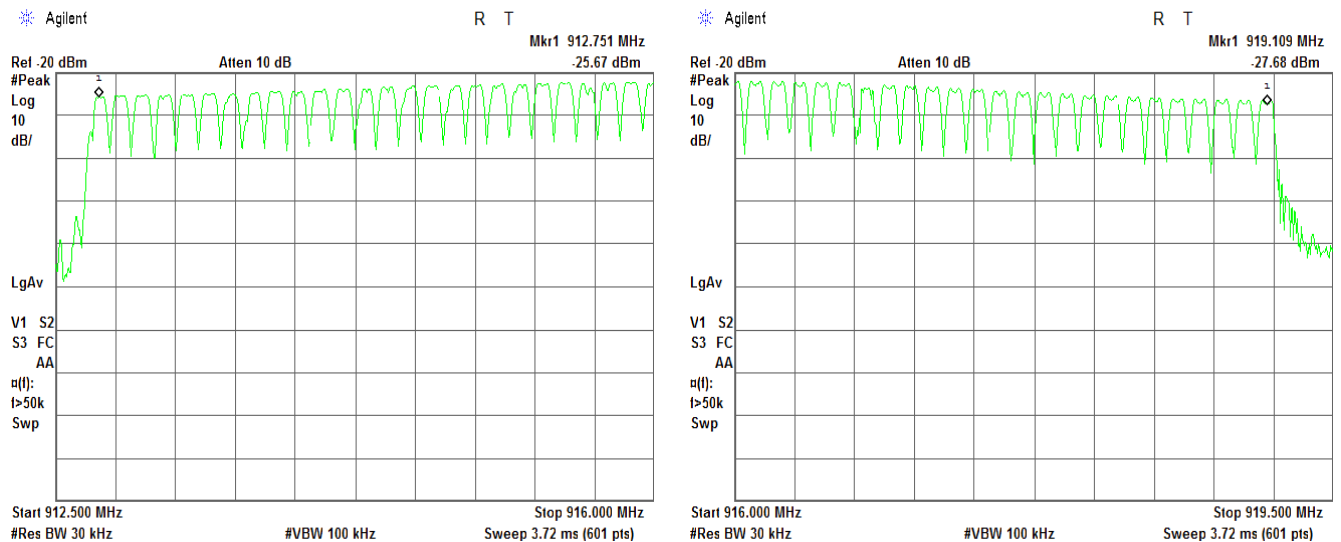

Test specification:	Section 15.247(a)1, Average time of occupancy		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	03-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: 3 VDC
Remarks:			

7.4 Average time of occupancy

7.4.1 General

This test was performed to calculate the average time of occupancy (dwell time) on any frequency channel of the EUT. Specification test limits are given in Table 7.4.1.


Table 7.4.1 Average time of occupancy limits

Assigned frequency range, MHz	Maximum average time of occupancy, s	Investigated period, s	Number of hopping frequencies
902.0 – 928.0	0.4	20.0	≥ 50
902.0 – 928.0	0.4	10.0	< 50
2400.0 – 2483.5	0.4	0.4 × N	N (≥ 15)
5725.0 – 5850.0	0.4	30.0	≥ 75

7.4.2 Test procedure

- 7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.4.2.2 The spectrum analyzer span was set to zero centered on a hopping channel.
- 7.4.2.3 The single transmission duration and period were measured with oscilloscope.
- 7.4.2.4 The average time of occupancy was calculated as the single transmission time multiplied by the investigated period and divided by the single transmission period.
- 7.4.2.5 The test was repeated at each data rate and modulation type as provided in Table 7.4.2 and associated plots.

Figure 7.4.1 Average time of occupancy test setup





Test specification:	Section 15.247(a)1, Average time of occupancy		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	03-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: 3 VDC
Remarks:			

Table 7.4.2 Average time of occupancy test results

ASSIGNED FREQUENCY: 902-928 MHz

MODULATION: GFSK

DETECTOR USED: Peak

NUMBER OF HOPPING FREQUENCIES: 50

INVESTIGATED PERIOD: 20s

FREQUENCY HOPPING: Enabled

Carrier frequency, MHz	Single transmission duration, ms	Number transmission during 20 s	Average time of occupancy*, s	Bit rate, kbps	Symbol rate, Msymbol/s	Limit, s	Margin, s**	Verdict
915.863	4.0	1	0.004	50	NA	0.4	-0.396	Pass

* - Average time of occupancy = (Single transmission duration × Investigated period) / (Single transmission period × number of hopping channels).

** - Margin = Average time of occupancy – specification limit.


Reference numbers of test equipment used

HL 3818							
---------	--	--	--	--	--	--	--


Full description is given in Appendix A.

Test specification:	Section 15.247(a)1, Average time of occupancy		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	03-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: 3 VDC
Remarks:			

Plot 7.4.1 Single transmission duration

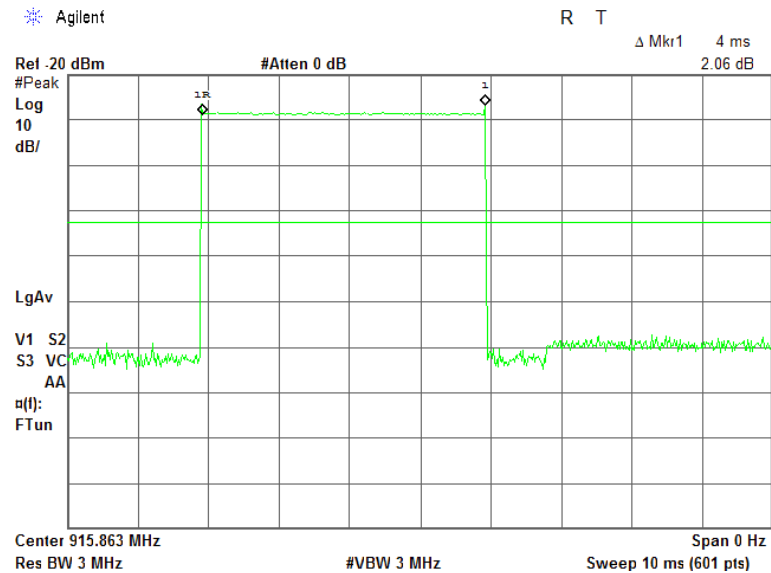

Plot 7.4.2 Number transmission

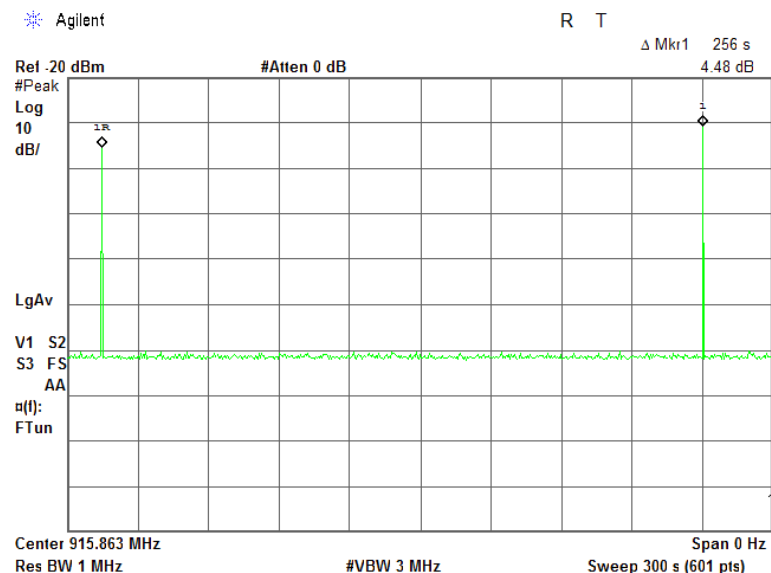



Test specification:	Section 15.247(b), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	28-Mar-18		
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1007 hPa	Power: 3 VDC
Remarks:			

7.5 Peak output power

7.5.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak output power limits

Assigned frequency range, MHz	Peak output power*		Equivalent field strength limit @ 3m, dB(μV/m)*	Maximum antenna gain, dBi
	W	dBm		
902.0 – 928.0	0.25 (<50 hopping channels)	24.0(<50 hopping channels)	125.2 (<50 hopping channels)	6.0*
	1.0 (≥50 hopping channels)	30.0 (≥50 hopping channels)	131.2 (≥50 hopping channels)	
2400.0 – 2483.5	0.125 (<75 hopping channels)	21.0(<75 hopping channels)	122.2 (<75 hopping channels)	
	1.0 (≥75 hopping channels)	30.0 (≥75 hopping channels)	131.2 (≥75 hopping channels)	
5725.0 – 5850.0	1.0	30.0	131.2	

*- Equivalent field strength limit was calculated from the peak output power as follows: $E = \sqrt{30 \times P \times G} / r$, where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

** - The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

7.5.2 Test procedure

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.

7.5.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.5.2.3 The frequency span of spectrum analyzer was set approximately 5 times wider than 20 dB bandwidth of the EUT and the resolution bandwidth was set wider than 20 dB bandwidth of the EUT. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.5.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.5.2 and associated plots.

7.5.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.

The above equation was converted in logarithmic units for 3 m test distance:


$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V/m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$

7.5.2.6 The worst test results (the lowest margins) were recorded in Table 7.5.2.



Test specification:	Section 15.247(b), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	28-Mar-18		
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1007 hPa	Power: 3 VDC
Remarks:			

Figure 7.5.1 Setup for carrier field strength measurements

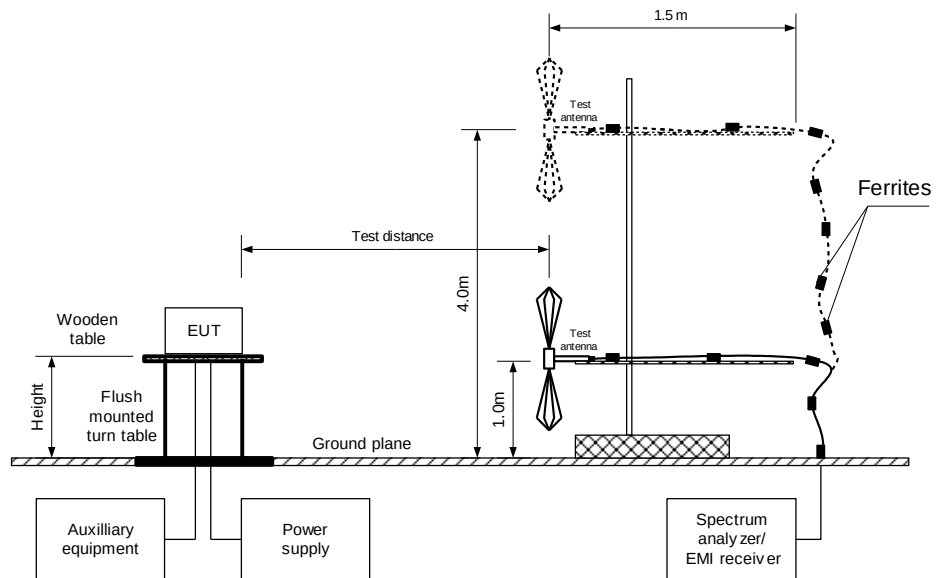



Test specification:	Section 15.247(b), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	28-Mar-18		
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1007 hPa	Power: 3 VDC
Remarks:			

Table 7.5.2 Peak output power test results

ASSIGNED FREQUENCY: 902-928 MHz
 TEST DISTANCE: 3 m
 TEST SITE: Semi anechoic chamber
 DETECTOR USED: Peak
 TEST ANTENNA TYPE: Biconilog (30 MHz – 1000 MHz)
 MODULATION: GFSK
 BIT RATE: 50 kbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 EUT 20 dB BANDWIDTH: 104.28 kHz
 RESOLUTION BANDWIDTH: 1 MHz
 VIDEO BANDWIDTH: More than RBW
 FREQUENCY HOPPING: Disabled
 NUMBER OF FREQUENCY HOPPING CHANNELS: 50

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
912.7518	106.86	Horizontal	1.45	175.0	-1	12.66	30	-17.34	Pass
915.8683	110.37	Horizontal	1.96	-180.0	-1	16.17	30	-13.83	Pass
919.1194	108.19	Horizontal	1.95	-169.0	-1	13.99	30	-16.01	Pass

*- EUT front panel refer to 0 degrees position of turntable.

** - Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$,

where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance:

$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V/m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$

***- Margin = Peak output power – specification limit.

Reference numbers of test equipment used

HL 3615	HL 4277	HL 4360	HL 5288				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Report ID: VISRAD_FCC.30669


Date of Issue: 12-Jun-18

Test specification:	Section 15.247(b), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	28-Mar-18		
Temperature: 23 °C	Relative Humidity: 48 %	Air Pressure: 1007 hPa	Power: 3 VDC
Remarks:			


Plot 7.5.1 Field strength of carrier at low frequency

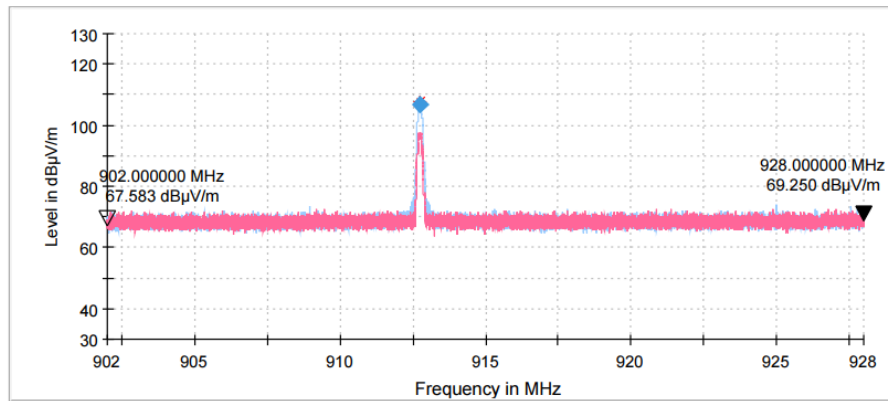

Plot 7.5.2 Field strength of carrier at mid frequency

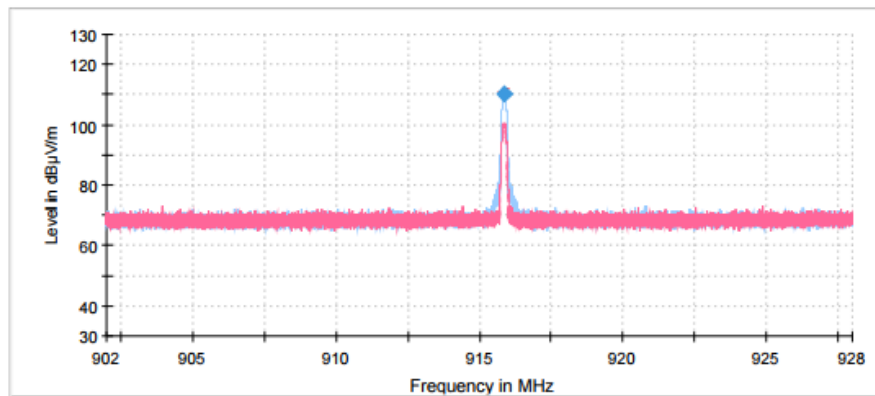

Plot 7.5.3 Field strength of carrier at high frequency

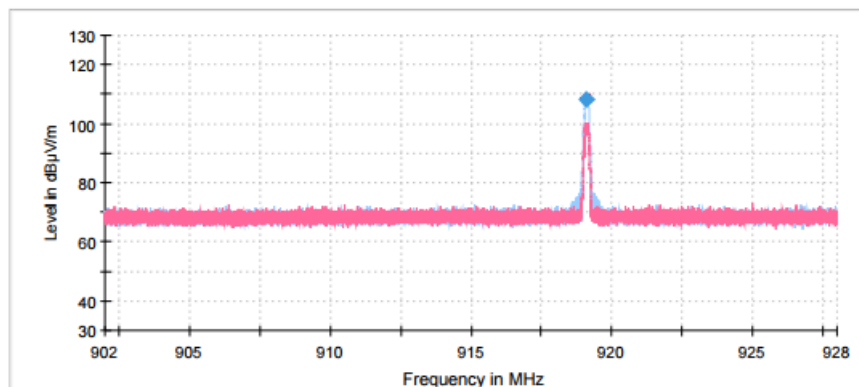



Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1007 hPa	Power: 3 VDC
Remarks:			

7.6 Field strength of spurious emissions

7.6.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.6.1.

Table 7.6.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m)***			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	20.0
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
1000 – 10 th harmonic	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S2} = \text{Lim}_{S1} + 40 \log (S1/S2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.6.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized and the performance check was conducted.

7.6.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.6.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.6.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.6.3.1 The EUT was set up as shown in Figure 7.6.2, Figure 7.6.3, energized and the performance check was conducted.

7.6.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.6.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1007 hPa	Power: 3 VDC
Remarks:			

Figure 7.6.1 Setup for spurious emission field strength measurements below 30 MHz

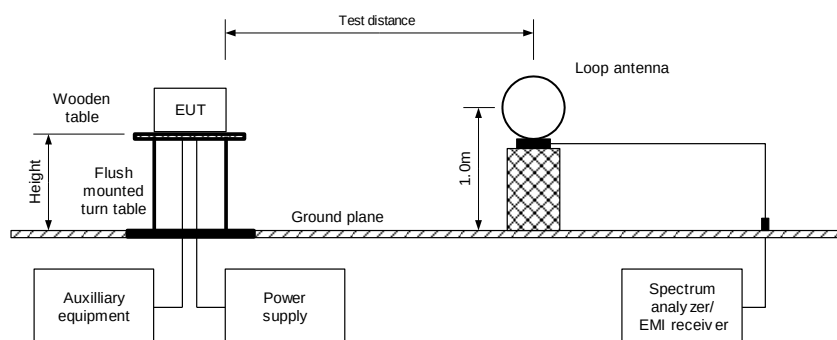


Figure 7.6.2 Setup for spurious emission field strength measurements from 30 to 1000 MHz


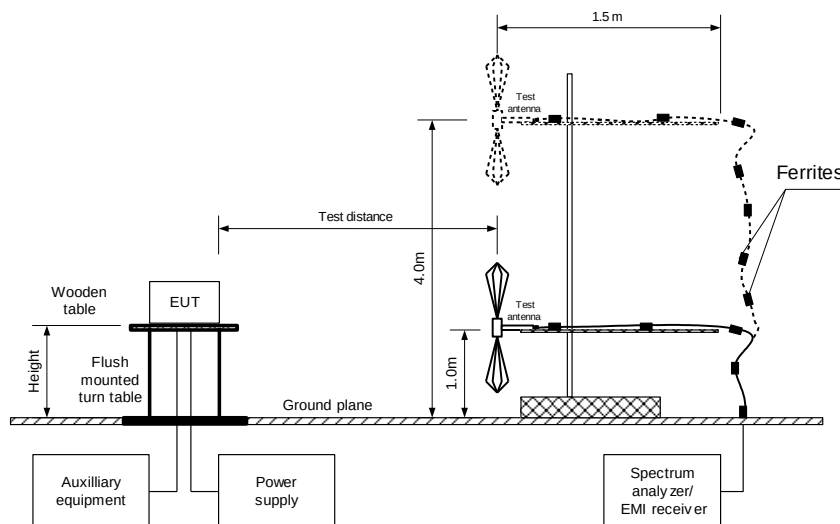


Figure 7.6.3 Setup for spurious emission field strength measurements above 1000 MHz



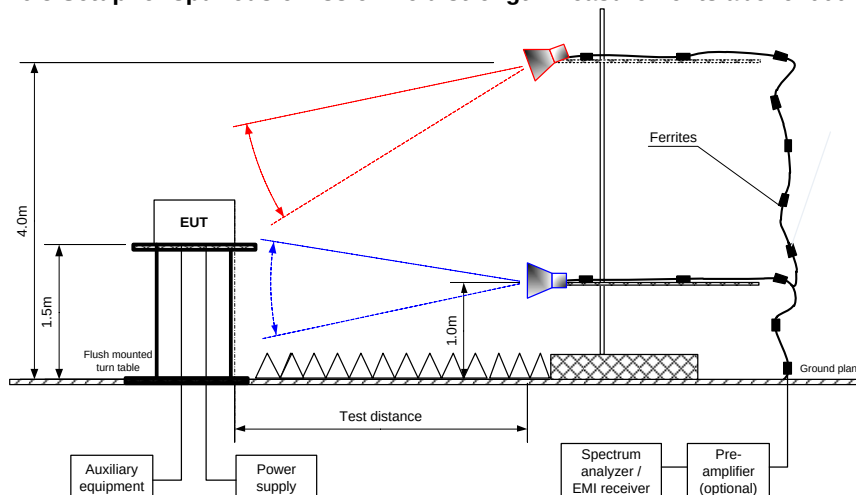

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	08-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1007 hPa	Power: 3 VDC
Remarks:			

Table 7.6.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY: 902-928 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 -10000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 BIT RATE: 50 Kbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1 MHz
 VIDEO BANDWIDTH: 3 MHz
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)
 FREQUENCY HOPPING: Disabled

Frequency, MHz	Field strength of spurious, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(μV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low carrier frequency									
1825.6675	59.69	H	1.55	39.0	106.86	47.17	20.0	27.17	Pass
5476.3925	62.84	H	1.55	-2.0		44.02		24.02	
6388.9700	57.29	H	2.09	-79.0		49.57		29.57	
Mid carrier frequency									
1831.8100	60.14	H	2.12	15.0	110.37	50.23	20.0	30.23	Pass
5495.3200	62.99	H	2.67	131.0		47.38		27.38	
6411.0300	59.34	H	1.38	139.0		51.03		31.03	
High carrier frequency									
1838.2450	56.86	H	1.29	174.0	108.19	51.35	20.0	31.35	Pass
5514.8325	59.43	H	2.68	125.0		48.76		28.76	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Attenuation below carrier – specification limit.

Reference numbers of test equipment used

HL 1915	HL 3615	HL 4277	HL 4339	HL 4360	HL 4933	HL 5111	HL 5288
---------	---------	---------	---------	---------	---------	---------	---------

Full description is given in Appendix A.



Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	08-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1007 hPa	Power: 3 VDC
Remarks:			

Table 7.6.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY: 902-928 MHz
 INVESTIGATED FREQUENCY RANGE: 1000 – 10000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 BIT RATE: 50 Kbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1000 kHz
 TEST ANTENNA TYPE: Double ridged guide
 FREQUENCY HOPPING: Disabled

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength(VBW=3 MHz)			Average field strength				Verdict
	Polarization	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB***	
Low carrier frequency											
2738.2450	H	1.81	-92.0	66.58	74.00	-7.42	66.58	38.58	54.00	-15.42	Pass
36508225	H	1.56	-40.0	61.63	74.00	-12.37	61.63	33.63	54.00	-20.37	
4563.6075	V	1.60	17.0	63.12	74.00	-10.88	63.12	35.12	54.00	-18.88	
8214.9175	V	1.56	-30.0	57.20	74.00	-16.80	57.20	29.20	54.00	-24.80	
Mid carrier frequency											
2747.8125	H	1.84	60.0	68.26	74.00	-5.74	68.26	40.26	54.00	-13.74	Pass
3663.6075	H	2.37	111.0	66.49	74.00	-7.51	66.49	38.49	54.00	-15.51	
4579.5250	V	1.57	155.0	64.32	74.00	-9.68	64.32	36.32	54.00	-17.68	
8242.8275	V	1.84	115.0	58.91	74.00	-15.09	58.91	30.91	54.00	-23.09	
9158.6225	V	2.47	135.0	60.43	74.00	-13.57	60.43	32.43	54.00	-21.57	
High carrier frequency											
2757.4650	H	1.84	39.0	65.67	74.00	-8.33	65.67	37.67	54.00	-16.33	Pass
3676.3925	H	2.12	80.0	58.49	74.00	-15.51	58.49	30.49	54.00	-23.51	
4595.6125	V	1.56	142.0	58.28	74.00	-15.72	58.28	30.28	54.00	-23.72	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Measured field strength - specification limit.

***- Margin = Calculated field strength - specification limit, where Calculated field strength = Measured field strength + average factor.

Table 7.6.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Number pulses during 100 msec	Duration, ms	Period, ms		
4	1	NA	NA	NA	-28

Average factor for pulse train shorter than 100 ms was calculated as follows:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

Average factor for pulse train longer than 100 ms was calculated as follows:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$

Reference numbers of test equipment used

HL 3615	HL 4277	HL 4339	HL 4360	HL 4933	HL 5111	HL 5288	
---------	---------	---------	---------	---------	---------	---------	--

Full description is given in Appendix A.



Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	08-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1007 hPa	Power: 3 VDC
Remarks:			

Table 7.6.5 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY: 902-928 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 BIT RATE: 50 kbps
 DUTY CYCLE: 100 %
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 VIDEO BANDWIDTH: > Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 FREQUENCY HOPPING: Disabled

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No spurious emissions have been found								

*- Margin = Measured emission - specification limit.

** - EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 1915	HL 3615	HL 4277	HL 4339	HL 4360	HL 5111	HL 5288	
---------	---------	---------	---------	---------	---------	---------	--

Full description is given in Appendix A.



Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1007 hPa	Power: 3 VDC
Remarks:			

Table 7.6.6 Restricted bands according to FCC section 15.205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Table 7.6.7 Restricted bands according to RSS-Gen

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.1905	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.29 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6



HERMON LABORATORIES


Report ID: VISRAD_FCC.30669

Date of Issue: 12-Jun-18

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1007 hPa	Power: 3 VDC
Remarks:			


Plot 7.6.1 Radiated emission measurements at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

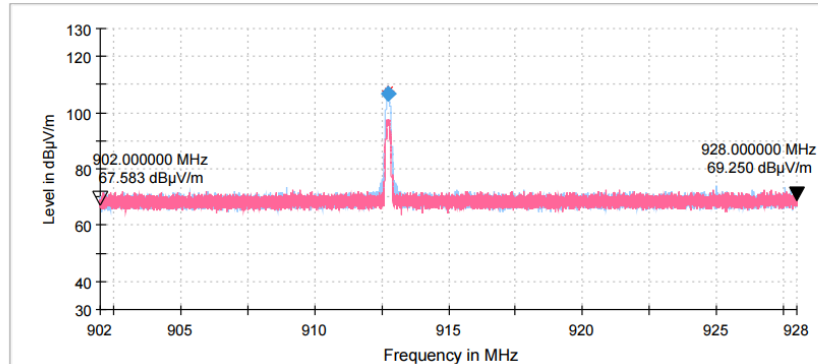


Plot 7.6.2 Radiated emission measurements at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

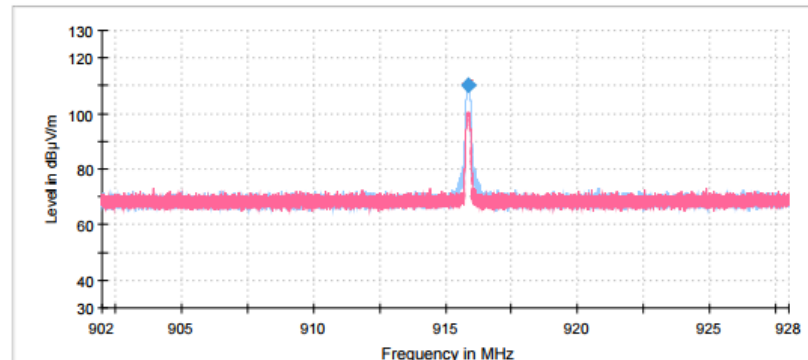

Plot 7.6.3 Radiated emission measurements at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

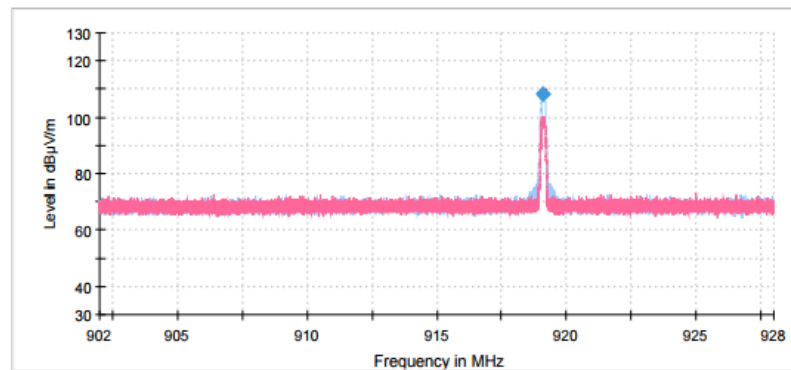



HERMON LABORATORIES


Report ID: VISRAD_FCC.30669

Date of Issue: 12-Jun-18

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1007 hPa	Power: 3 VDC
Remarks:			


Plot 7.6.4 Radiated emission measurements from 9 to 150 kHz at the low, mid and high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m

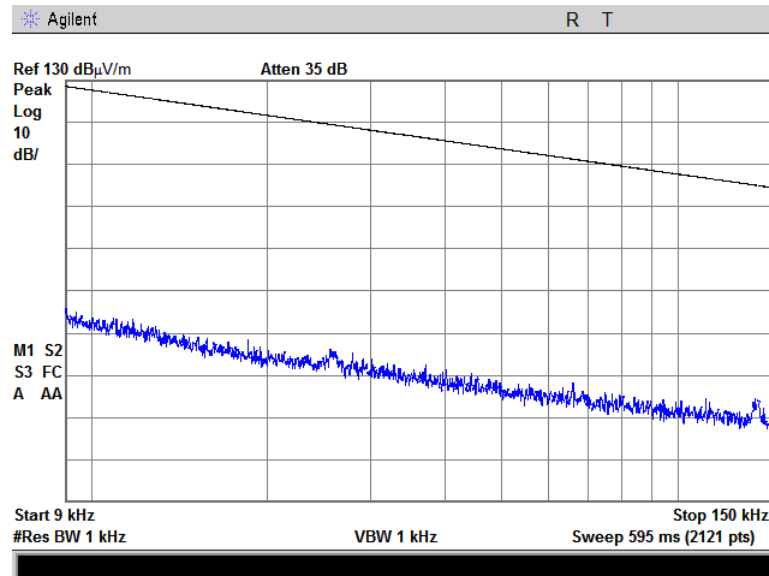

Plot 7.6.5 Radiated emission measurements from 0.15 to 30 MHz at the low, mid and high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m

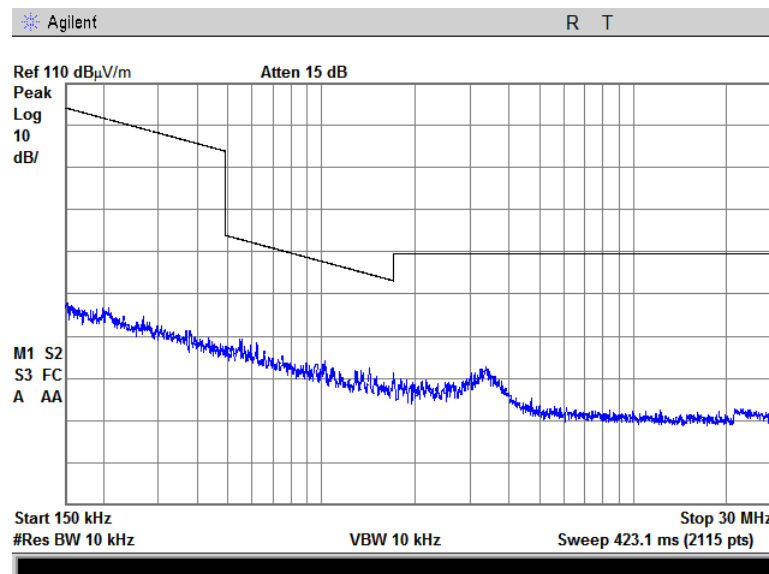




Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1007 hPa	Power: 3 VDC
Remarks:			


Plot 7.6.6 Radiated emission measurements from 30 to 902 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

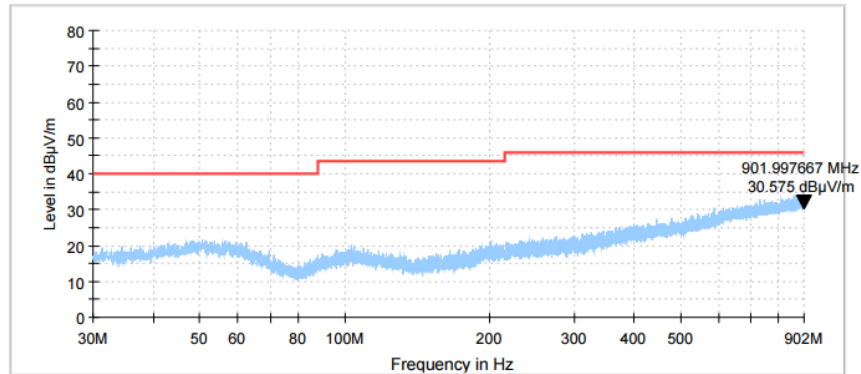


Plot 7.6.7 Radiated emission measurements from 30 to 902 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

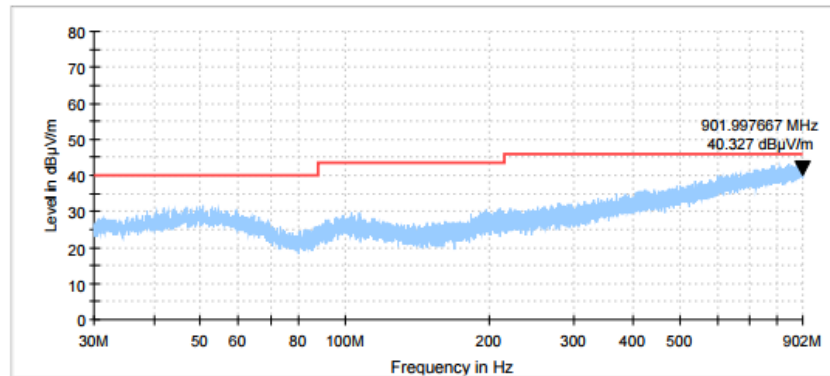

Plot 7.6.8 Radiated emission measurements from 30 to 902 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

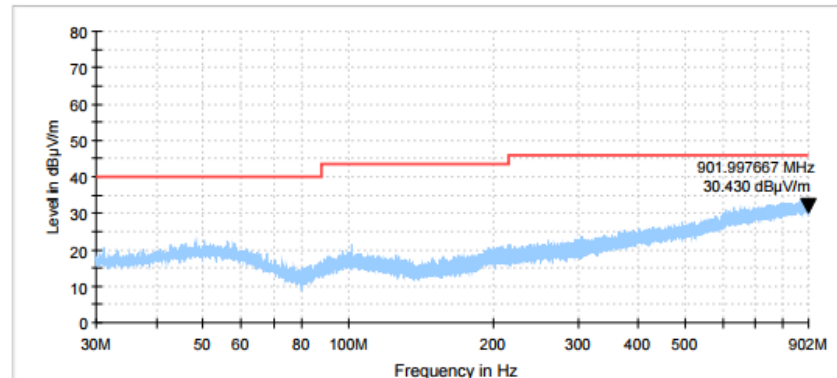




Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1007 hPa	Power: 3 VDC
Remarks:			


Plot 7.6.9 Radiated emission measurements from 928 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

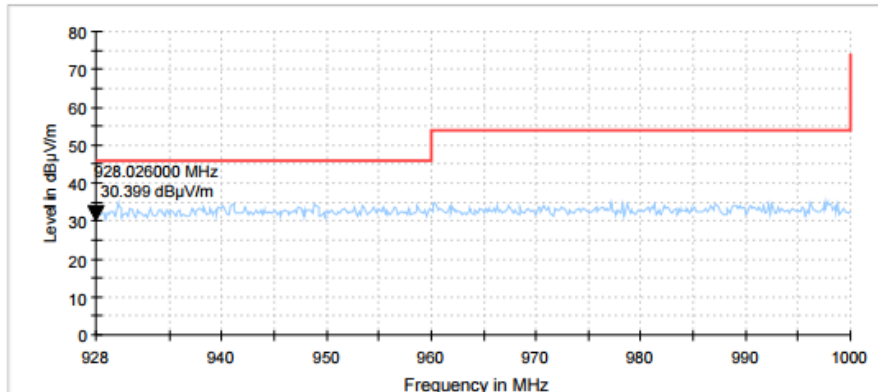


Plot 7.6.10 Radiated emission measurements from 928 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

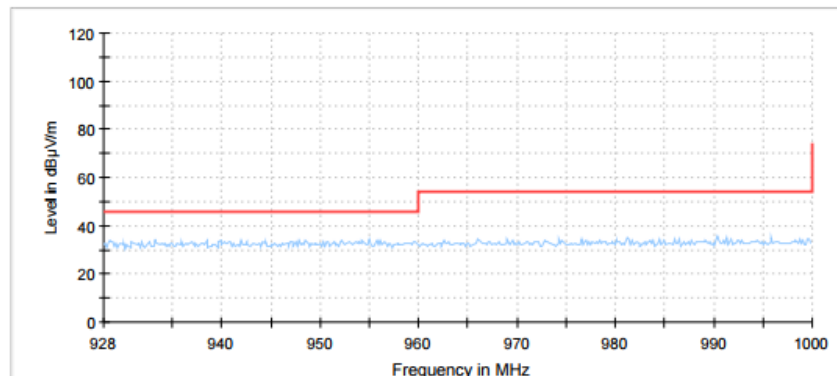

Plot 7.6.11 Radiated emission measurements from 928 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

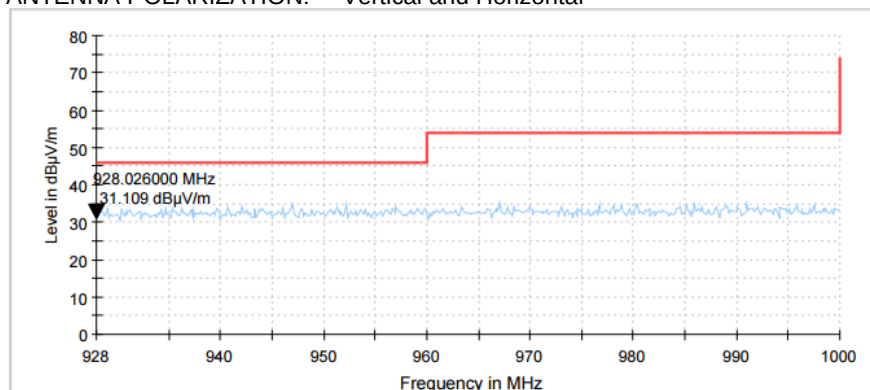




Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1007 hPa	Power: 3 VDC
Remarks:			


Plot 7.6.12 Radiated emission measurements from 1000 to 10000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

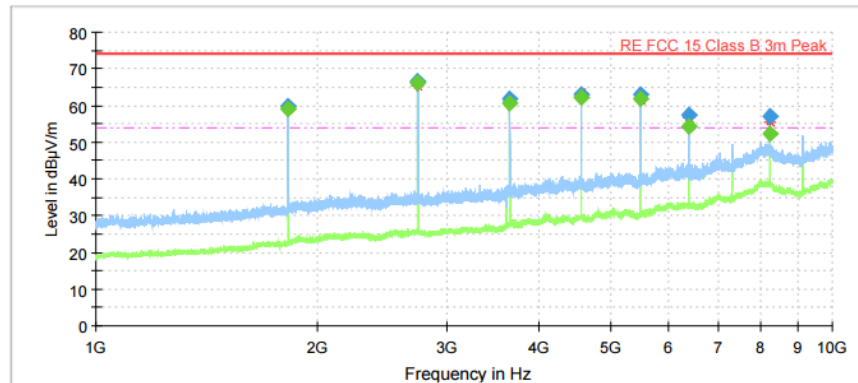

Plot 7.6.13 Radiated emission measurements from 1000 to 10000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

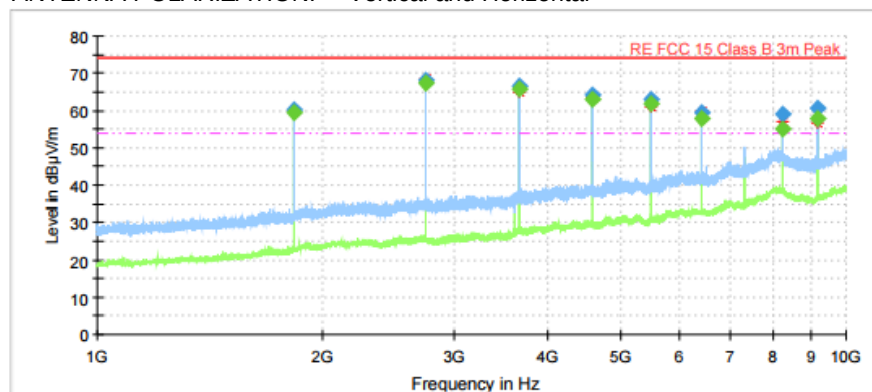



HERMON LABORATORIES


Report ID: VISRAD_FCC.30669

Date of Issue: 12-Jun-18

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1007 hPa	Power: 3 VDC
Remarks:			

Plot 7.6.14 Radiated emission measurements from 1000 to 10000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

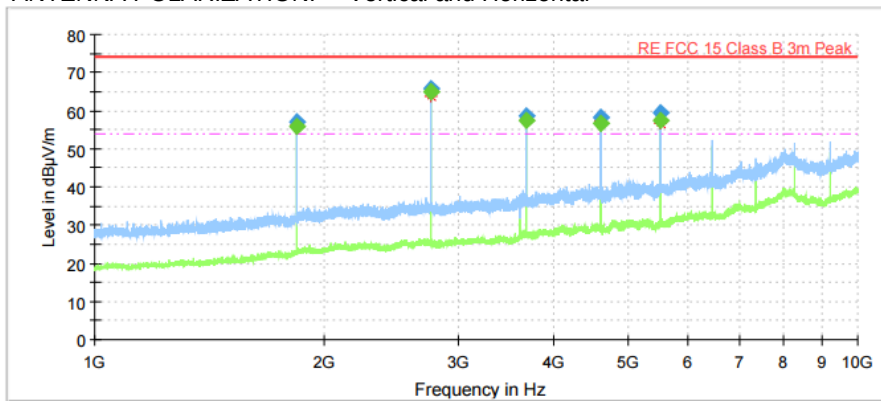




HERMON LABORATORIES

Report ID: VISRAD_FCC.30669


Date of Issue: 12-Jun-18

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1007 hPa	Power: 3 VDC
Remarks:			

Plot 7.6.15 Transmission pulse duration

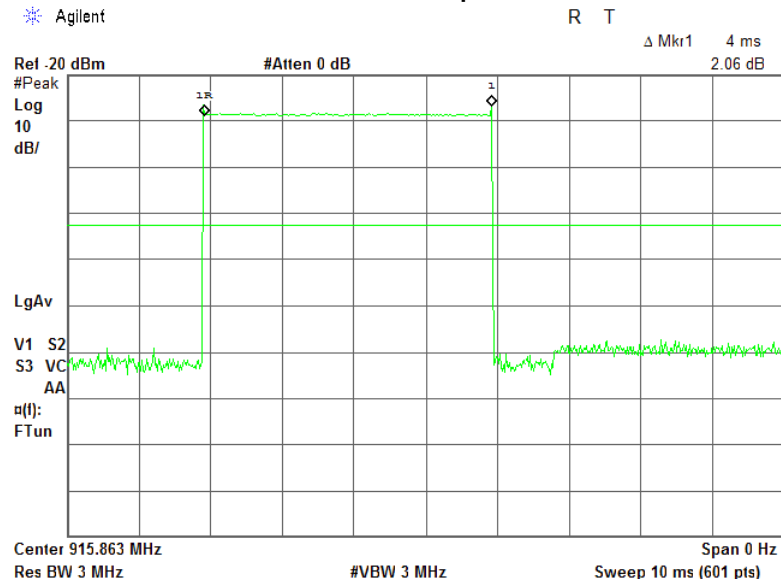

Plot 7.6.16 Transmission pulse period

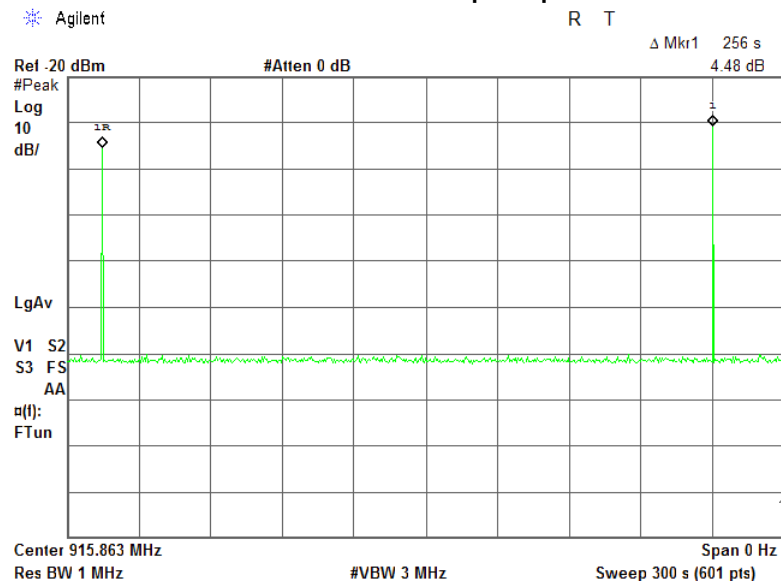

Test specification:	Section 15.247(c), Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	02-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1010 hPa	Power: 3 VDC
Remarks:			

7.7 Band edge radiated emissions

7.7.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 7.7.1.

Table 7.7.1 Band edge emission limits

Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(μV/m)	
		Peak	Average
902.0 – 928.0	20.0	74.0	54.0
2400.0 – 2483.5			
5725.0 – 5850.0			

* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

7.7.2 Test procedure

- 7.7.2.1** The EUT was set up as shown in Figure 7.7.1, energized normally modulated at the maximum data rate with its hopping function disabled and its proper operation was checked.
- 7.7.2.2** The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.7.2.3** The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.7.2.4** The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.7.2.5** The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.7.2 and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.7.2.6** The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.
- 7.7.2.7** The above procedure was repeated with the frequency hopping function enabled.

Figure 7.7.1 Band edge emission test setup





Test specification:	Section 15.247(c), Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	02-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1010 hPa	Power: 3 VDC
Remarks:			

Table 7.7.2 Band edge emission test results

ASSIGNED FREQUENCY RANGE: 902-928 MHz
 DETECTOR USED: Peak
 MODULATION: GFSK
 BIT RATE: 50 kbps
 RESOLUTION BANDWIDTH: $\geq 1\%$ of the span
 VIDEO BANDWIDTH: $\geq$ RBW

Frequency, MHz	Band edge emission, dBm	Emission at carrier, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
Frequency hopping disabled						
902	-87.30	-26.20	61.10	20.0	41.10	Pass
928	-87.77	-24.89	62.88		42.88	
Frequency hopping enabled						
902	-88.74	-28.86	59.88	20.0	39.88	Pass
928	-88.21	-27.28	60.93		40.93	

*- Margin = Attenuation below carrier – specification limit.

Reference numbers of test equipment used

HL 3818						
---------	--	--	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Report ID: VISRAD_FCC.30669


Date of Issue: 12-Jun-18

Test specification:	Section 15.247(c), Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	02-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1010 hPa	Power: 3 VDC
Remarks:			

Plot 7.7.1 The highest band edge emission at low carrier frequency with hopping function disabled

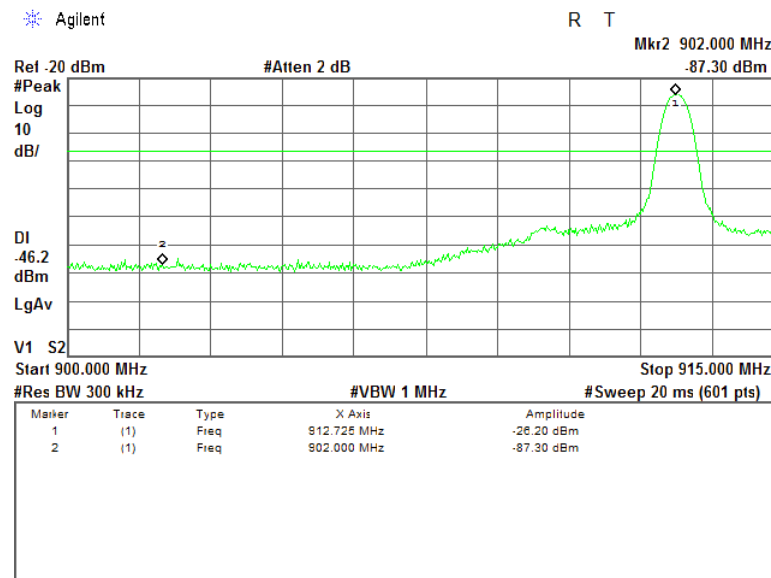

Plot 7.7.2 The highest band edge emission at high carrier frequency with hopping function disabled

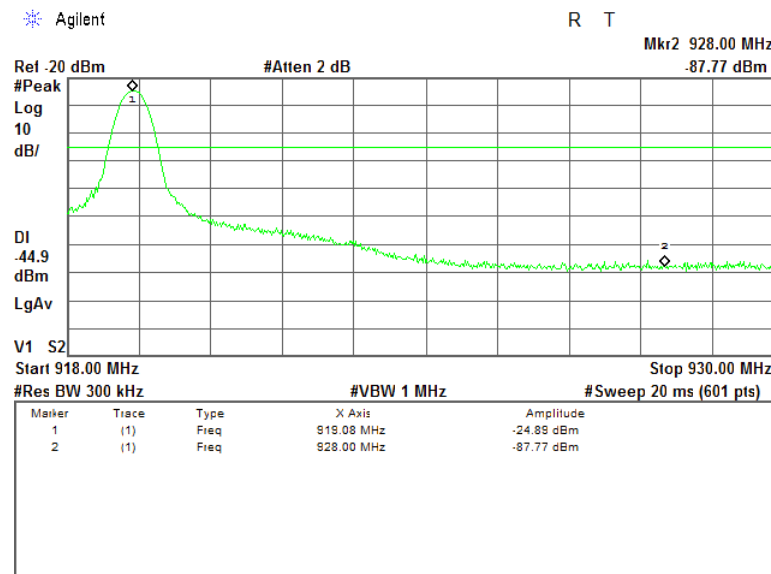




HERMON LABORATORIES

Report ID: VISRAD_FCC.30669


Date of Issue: 12-Jun-18

Test specification:	Section 15.247(c), Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	02-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1010 hPa	Power: 3 VDC
Remarks:			

Plot 7.7.3 The highest band edge emission at low carrier frequency with hopping function enabled

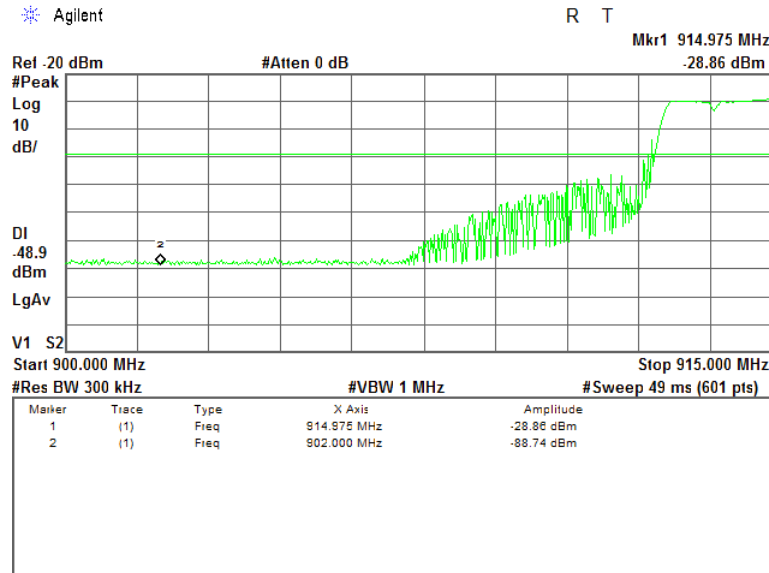

Plot 7.7.4 The highest band edge emission at high carrier frequency with hopping function enabled

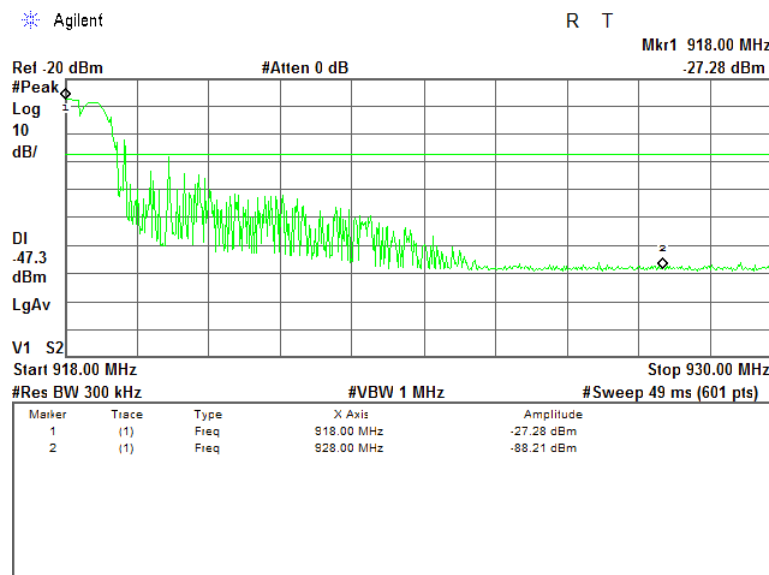



Test specification:	Section 15.203, Antenna requirements		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	09-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1010 hPa	Power:
Remarks:			

7.8 Antenna requirements


The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.8.1.

Table 7.8.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.8.1 Antenna assembly

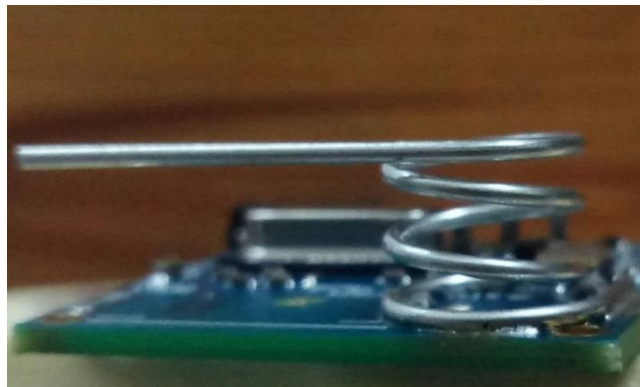

Test specification:	Section 15.109, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	10-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1010 hPa	Power: 3 VDC
Remarks:			

8 Unintentional emissions

8.1 Radiated emission measurements

8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.1.1.

Table 8.1.1 Radiated emission test limits

Frequency, MHz	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $\text{Lim}_{S2} = \text{Lim}_{S1} + 20 \log(S1/S2)$, where $S1$ and $S2$ – standard defined and test distance respectively in meters.


8.1.2 Test procedure for measurements in semi-anechoic chamber

8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photographs, energized and the performance check was conducted.

8.1.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.

8.1.2.3 The worst test results (the lowest margins) were recorded in Table 8.1.2 and shown in the associated plots.



Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

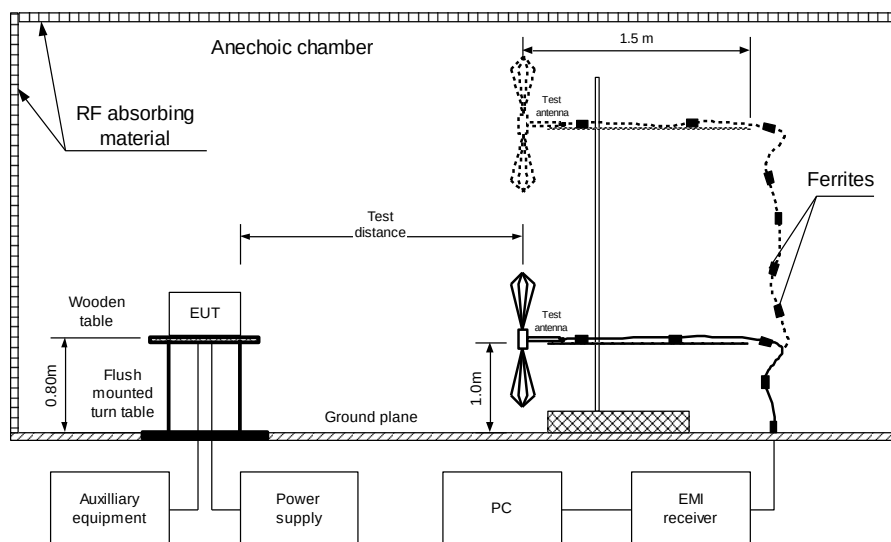



Test specification:	Section 15.109, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	10-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1010 hPa	Power: 3 VDC
Remarks:			

Photograph 8.1.1 Setup for final radiated emission measurements, general view

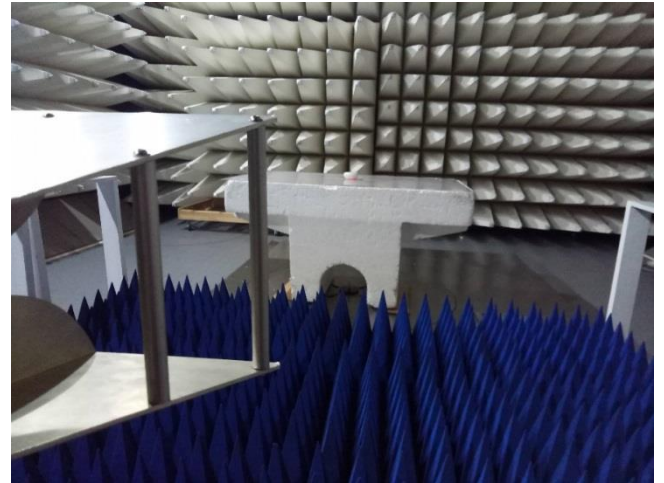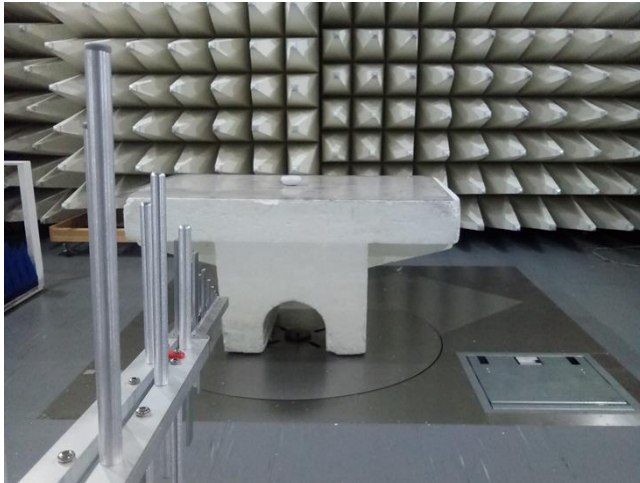

Photograph 8.1.2 Setup for final radiated emission measurements, EUT cabling





Test specification:	Section 15.109, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	10-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1010 hPa	Power: 3 VDC
Remarks:			

Table 8.1.2 Radiated emission test results

EUT SET UP: TABLE-TOP
LIMIT: Class B
EUT OPERATING MODE: Receive
TEST SITE: ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / QUASI-PEAK
FREQUENCY RANGE: 30 MHz – 1000 MHz
RESOLUTION BANDWIDTH: 120 kHz

Resolution bandwidth		120 kHz			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak						
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No emission peaks found								Pass

DETECTORS USED: PEAK / AVERAGE
FREQUENCY RANGE: 1000 MHz – 3000 MHz
RESOLUTION BANDWIDTH: 1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No emission peaks found										Pass

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 2697	HL 3001	HL 5107	HL 5110				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.



Test specification:	Section 15.109, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	10-Apr-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1010 hPa	Power: 3 VDC
Remarks:			


Plot 8.1.1 Radiated emission measurements in 30 - 1000 MHz range

TEST SITE: Anechoic chamber
LIMIT: Class B
ANTENNA POLARIZATION: Vertical & Horizontal
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

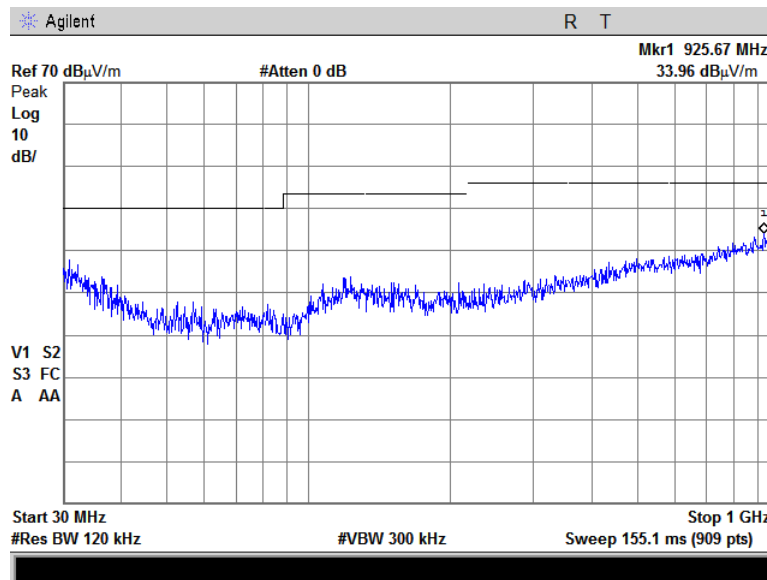

Plot 8.1.2 Radiated emission measurements above 1000 MHz, vertical antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

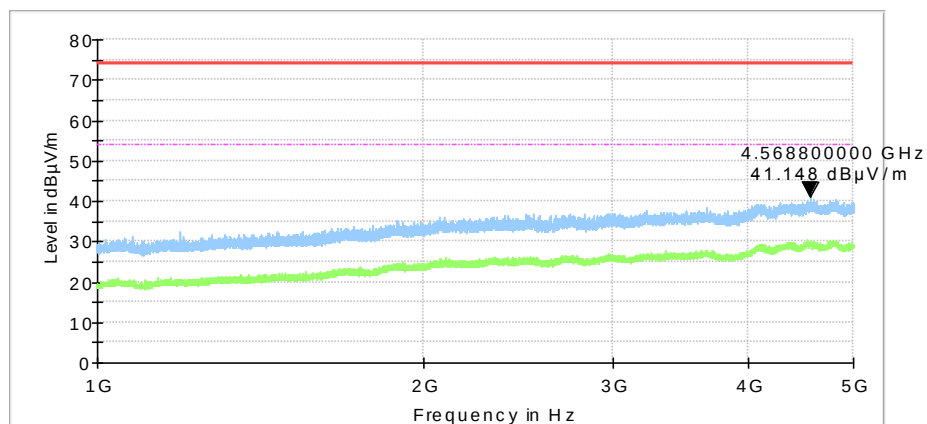

9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
1915	Antenna, Loop, Active Receiving, 1 kHz - 30 MHz	EMC Test Systems	6507	1457	11-Feb-18	11-Feb-19
2697	Antenna, 30 MHz - 3.0 GHz	Sunol Sciences. Corp.	JB3	A022805	12-May-17	12-May-18
3001	EMC Analyzer, 9 kHz to 3 GHz	Agilent Technologies	E7402A	US39440180	09-Oct-17	09-Oct-18
3615	Cable RF, 6.5 m, N type-N type, DC-6 GHz	Suhner Switzerland	RG 214/U	NA	04-Jun-17	04-Jun-18
3818	PSA Series Spectrum Analyzer, 3 Hz-44 GHz	Agilent Technologies	E4446A	MY48250288	07-May-17	07-May-18
4136	Shield Box	TESCOM CO., LTD	TC-5916A	5916A000137	04-Apr-18	04-Apr-19
4277	Test Cable , DC-18 GHz, 3.05 m, N/M - N/M	Mini-Circuits	APC-10FT-NMNM+	0748A	10-Sep-17	10-Sep-18
4339	High pass Filter, 50 Ohm, 1000 to 18000 MHz, SMA-FM / SMA-M	Micro-Tronics	HPM50115-02	1	14-May-17	14-May-18
4360	EMI Test Receiver, 20 Hz to 40 GHz.	Rohde & Schwarz	ESU40	100322	26-Dec-17	26-Dec-18
4933	Active Horn Antenna, 1 GHz to 18 GHz	COM-POWER CORPORATION	AHA-118	701046	04-Jan-18	04-Jan-19
5107	RF cable, 18 GHz, 4.5 m, N-type	Huber-Suhner	SF106A/11N/11N/4500MM	500845/6A	27-Jul-17	27-Jul-18
5111	RF cable, 40 GHz, 5.5 m, K-type	Huber-Suhner	SF102EA/11SK/11SK/5500MM	502493/2EA	09-Apr-18	09-Apr-19
5288	Trilog Antenna, 25 MHz - 8 GHz, 100W	Frankonia	ALX-8000E	809	21-Jan-18	21-Jan-19

10 APPENDIX B Test equipment correction factors

Antenna, Loop, Active Receiving, 1 kHz - 30 MHz EMC Test Systems, model: 6507, s/n 1457

HL 1915 Antenna factor

Frequency, kHz	Antenna factor, dB/m
9	-21.8
10	-23.0
20	-27.3
50	-31.3
75	-32.0
100	-32.2
150	-32.5
250	-32.8
500	-33.1
750	-33.2

Frequency, MHz	Antenna factor, dB/m
1000	-33.3
2000	-33.7
3000	-34.0
4000	-34.3
5000	-34.6
10000	-35.4
15000	-36.0
20000	-36.3
25000	-37.3
30000	-37.8

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

Antenna, 30 MHz - 3.0 GHz Sunol Sciences. Corp. Pleasanton, California USA, model: JB3, s/n A022805

HL 2697: Antenna factor

Frequency, MHz	Antenna factor, dB/m
30	21.9
35	18.2
40	14.1
45	10.4
50	8.2
60	8.1
70	8.5
80	7.9
90	7.6
100	9.9
120	14.1
140	13.0

Frequency, MHz	Antenna factor, dB/m
160	12.4
180	11.4
200	12.4
250	11.4
300	13.4
400	15.8
500	18.0
600	18.1
700	19.6
800	21.0
900	22.4
1000	23.4

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

Active Horn Antenna, 1 GHz to 18 GHz
COM-POWER CORPORATION, model: AHA-118, s/n 701046

HL 4933: Antenna factor

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
1000	-16.1
1500	-15.1
2000	-10.9
2500	-11.9
3000	-11.1
3500	-10.6
4000	-8.6
4500	-8.3
5000	-5.9
5500	-5.7
6000	-3.3
6500	-4.0
7000	-2.2
7500	-1.7
8000	1.1
8500	-0.8
9000	-1.5
9500	-0.2

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
10000	1.8
10500	1.0
11000	0.3
11500	-0.5
12000	3.1
12500	1.4
13000	-0.3
13500	-0.4
14000	2.5
14500	2.2
15000	1.9
15500	0.5
16000	2.1
16500	1.2
17000	0.6
17500	3.1
18000	4.2

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

Trilog Antenna, 25 MHz - 8 GHz, 100W
Frankonia, model: ALX-8000E, s/n: 00809

HL 5288: Antenna factor

Frequency, MHz	Antenna factor, dB/m
1000	26.9
1100	28.1
1200	28.4
1300	29.6
1400	29.1
1500	30.4
1600	30.7
1700	31.5
1800	32.3
1900	32.6
2000	32.5
2100	32.9
2200	33.5
2300	33.2
2400	33.7
2500	34.6
2600	34.7
2700	34.6
2800	35.0
2900	35.5
3000	36.2
3100	36.8
3200	36.8
3300	37.0
3400	37.5
3500	38.2

Frequency, MHz	Antenna factor, dB/m
3600	38.9
3700	39.4
3800	39.4
3900	39.6
4000	39.7
4100	39.8
4200	40.5
4300	40.9
4400	41.1
4500	41.4
4600	41.3
4700	41.6
4800	41.9
4900	42.3
5000	42.7
5100	43.0
5200	42.9
5300	43.5
5400	43.6
5500	44.3
5600	44.7
5700	45.0
5800	45.0
5900	45.3
6000	45.9

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

Cable RF, 6.5 m, N type-N type, DC-6 GHz
Suhner Switzerland, model: RG 214/U, s/n: NA

HL 3615: Insertion loss

Set / Applied, MHz	Measured, dB	Uncertainty, dB
50	0.31	+0.08 / -0.08
100	0.45	+0.08 / -0.08
200	0.66	+0.08 / -0.08
300	0.83	+0.09 / -0.09
400	0.98	+0.09 / -0.09
500	1.12	+0.09 / -0.09
600	1.26	+0.09 / -0.09
700	1.38	+0.09 / -0.09
800	1.50	+0.09 / -0.09
900	1.63	+0.09 / -0.09
1000	1.74	+0.09 / -0.09
1100	1.85	+0.09 / -0.09
1200	1.97	+0.09 / -0.09
1300	2.08	+0.09 / -0.09
1400	2.19	+0.09 / -0.09
1500	2.30	+0.09 / -0.09
1600	2.41	+0.09 / -0.09
1700	2.53	+0.09 / -0.09
1800	2.63	+0.09 / -0.09
1900	2.74	+0.09 / -0.09
2000	2.83	+0.09 / -0.09
2100	2.93	+0.11 / -0.11
2200	3.00	+0.11 / -0.11
2300	3.07	+0.11 / -0.11
2400	3.13	+0.11 / -0.11
2500	3.19	+0.15 / -0.15
2600	3.25	+0.15 / -0.15
2700	3.33	+0.15 / -0.15
2800	3.40	+0.15 / -0.15
2900	3.48	+0.15 / -0.15
3000	3.57	+0.15 / -0.15
3100	3.63	+0.17 / -0.17
3200	3.71	+0.17 / -0.17

Set / Applied, MHz	Measured, dB	Uncertainty, dB
3300	3.78	+0.17 / -0.17
3400	3.88	+0.17 / -0.17
3500	3.96	+0.17 / -0.17
3600	4.06	+0.17 / -0.17
3700	4.15	+0.17 / -0.17
3800	4.26	+0.17 / -0.17
3900	4.36	+0.17 / -0.17
4000	4.48	+0.17 / -0.17
4100	4.58	+0.22 / -0.23
4200	4.72	+0.22 / -0.23
4300	4.80	+0.22 / -0.23
4400	4.93	+0.22 / -0.23
4500	5.00	+0.22 / -0.23
4600	5.10	+0.22 / -0.23
4700	5.20	+0.22 / -0.23
4800	5.30	+0.22 / -0.23
4900	5.43	+0.22 / -0.23
5000	5.54	+0.22 / -0.23
5100	5.65	+0.22 / -0.23
5200	5.73	+0.22 / -0.23
5300	5.86	+0.22 / -0.23
5400	5.95	+0.22 / -0.23
5500	6.05	+0.22 / -0.23
5600	6.16	+0.22 / -0.23
5700	6.28	+0.22 / -0.23
5800	6.38	+0.22 / -0.23
5900	6.53	+0.22 / -0.23
6000	6.63	+0.22 / -0.23
6100	6.75	+0.22 / -0.23
6200	6.82	+0.22 / -0.23
6300	6.93	+0.22 / -0.23
6400	7.00	+0.22 / -0.23
6500	7.05	+0.22 / -0.23

Test Cable , DC-18 GHz, 3.05 m, N/M - N/M
Mini-Circuits, model: APC-10FT-NMNM+, s/n 0748A

HL 4277: Insertion loss

Set / Applied, MHz	Measured, dB	Uncertainty, dB
0.1	0.26	+0.07 / -0.07
50	0.27	+0.07 / -0.07
100	0.38	+0.07 / -0.07
200	0.55	+0.07 / -0.07
300	0.69	+0.08 / -0.09
400	0.80	+0.08 / -0.09
500	0.91	+0.08 / -0.09
600	1.00	+0.08 / -0.09
700	1.08	+0.08 / -0.09
800	1.17	+0.08 / -0.09
900	1.24	+0.08 / -0.09
1000	1.32	+0.08 / -0.09
1100	1.39	+0.12 / -0.13
1200	1.45	+0.12 / -0.13
1300	1.52	+0.12 / -0.13
1400	1.58	+0.12 / -0.13
1500	1.65	+0.12 / -0.13
1600	1.71	+0.12 / -0.13
1700	1.77	+0.12 / -0.13
1800	1.82	+0.12 / -0.13
1900	1.88	+0.12 / -0.13
2000	1.93	+0.12 / -0.13
2100	1.99	+0.12 / -0.13
2200	2.05	+0.12 / -0.13
2300	2.10	+0.12 / -0.13
2400	2.15	+0.12 / -0.13
2500	2.20	+0.17 / -0.18
2600	2.25	+0.17 / -0.18
2700	2.30	+0.17 / -0.18
2800	2.35	+0.17 / -0.18
2900	2.40	+0.17 / -0.18
3000	2.44	+0.17 / -0.18
3100	2.49	+0.19 / -0.2
3200	2.54	+0.19 / -0.2
3300	2.58	+0.19 / -0.2
3400	2.62	+0.19 / -0.2
3500	2.66	+0.19 / -0.2
3600	2.71	+0.19 / -0.2
3700	2.75	+0.19 / -0.2
3800	2.79	+0.19 / -0.2
3900	2.84	+0.19 / -0.2
4000	2.88	+0.19 / -0.2

Set / Applied, MHz	Measured, dB	Uncertainty, dB
4100	2.84	+0.19 / -0.2
4200	2.88	+0.19 / -0.2
4300	2.92	+0.3 / -0.33
4400	2.96	+0.3 / -0.33
4500	3.01	+0.3 / -0.33
4600	3.05	+0.3 / -0.33
4700	3.09	+0.3 / -0.33
4800	3.13	+0.3 / -0.33
4900	3.18	+0.3 / -0.33
5000	3.21	+0.3 / -0.33
5100	3.25	+0.3 / -0.33
5200	3.30	+0.3 / -0.33
5300	3.34	+0.3 / -0.33
5400	3.39	+0.3 / -0.33
5500	3.44	+0.3 / -0.33
5600	3.48	+0.3 / -0.33
5700	3.53	+0.3 / -0.33
5800	3.57	+0.3 / -0.33
5900	3.60	+0.3 / -0.33
6000	3.65	+0.3 / -0.33
6100	3.68	+0.3 / -0.33
6200	3.72	+0.3 / -0.33
6300	3.77	+0.3 / -0.33
6400	3.83	+0.3 / -0.33
6500	3.86	+0.3 / -0.33
6600	3.92	+0.3 / -0.33
6700	3.96	+0.3 / -0.33
6800	4.00	+0.3 / -0.33
6900	4.04	+0.3 / -0.33
7000	4.08	+0.3 / -0.33
7100	4.11	+0.3 / -0.33
7200	4.16	+0.3 / -0.33
7300	4.20	+0.3 / -0.33
7400	4.24	+0.3 / -0.33
7500	4.29	+0.3 / -0.33
7600	4.33	+0.3 / -0.33
7700	4.38	+0.3 / -0.33
7800	4.42	+0.3 / -0.33
7900	4.51	+0.3 / -0.33
8000	4.52	+0.3 / -0.33
8100	4.55	+0.34 / -0.36
8200	4.55	+0.34 / -0.36

HL 4277: Insertion loss

Set / Applied, MHz	Measured, dB	Uncertainty, dB
8300	4.57	+0.34 / -0.36
8400	4.60	+0.34 / -0.36
8500	4.60	+0.34 / -0.36
8600	4.63	+0.34 / -0.36
8700	4.63	+0.34 / -0.36
8800	4.64	+0.34 / -0.36
8900	4.65	+0.34 / -0.36
9000	4.67	+0.34 / -0.36
9100	4.69	+0.34 / -0.36
9200	4.71	+0.34 / -0.36
9300	4.73	+0.34 / -0.36
9400	4.76	+0.34 / -0.36
9500	4.78	+0.34 / -0.36
9600	4.81	+0.34 / -0.36
9700	4.85	+0.34 / -0.36
9800	4.87	+0.34 / -0.36
9900	4.89	+0.34 / -0.36
10000	4.93	+0.34 / -0.36
10100	4.96	+0.4 / -0.44
10200	4.99	+0.4 / -0.44
10300	5.02	+0.4 / -0.44
10400	5.05	+0.4 / -0.44
10500	5.08	+0.4 / -0.44
10600	5.11	+0.4 / -0.44
10700	5.14	+0.4 / -0.44
10800	5.17	+0.4 / -0.44
10900	5.19	+0.4 / -0.44
11000	5.22	+0.4 / -0.44
11100	5.25	+0.4 / -0.44
11200	5.28	+0.4 / -0.44
11300	5.31	+0.4 / -0.44
11400	5.34	+0.4 / -0.44
11500	5.38	+0.4 / -0.44
11600	5.41	+0.4 / -0.44
11700	5.45	+0.4 / -0.44
11800	5.49	+0.4 / -0.44
11900	5.53	+0.4 / -0.44
12000	5.56	+0.4 / -0.44
12100	5.60	+0.4 / -0.44
12200	5.63	+0.4 / -0.44
12300	5.68	+0.4 / -0.44
12400	5.72	+0.4 / -0.44
12500	5.75	+0.47 / -0.52
12600	5.80	+0.47 / -0.52
12700	5.84	+0.47 / -0.52
12800	5.93	+0.47 / -0.52
12900	5.94	+0.47 / -0.52
13000	5.98	+0.47 / -0.52
13100	6.03	+0.47 / -0.52

Set / Applied, MHz	Measured, dB	Uncertainty, dB
13200	6.09	+0.47 / -0.52
13300	6.17	+0.47 / -0.52
13400	6.27	+0.47 / -0.52
13500	6.37	+0.47 / -0.52
13600	6.49	+0.47 / -0.52
13700	6.57	+0.47 / -0.52
13800	6.60	+0.47 / -0.52
13900	6.61	+0.47 / -0.52
14000	6.59	+0.47 / -0.52
14100	6.57	+0.47 / -0.52
14200	6.54	+0.47 / -0.52
14300	6.53	+0.47 / -0.52
14400	6.49	+0.47 / -0.52
14500	6.48	+0.47 / -0.52
14600	6.46	+0.47 / -0.52
14700	6.46	+0.47 / -0.52
14800	6.49	+0.47 / -0.52
14900	6.51	+0.47 / -0.52
15000	6.54	+0.47 / -0.52
15100	6.57	+0.47 / -0.52
15200	6.62	+0.47 / -0.52
15300	6.64	+0.47 / -0.52
15400	6.68	+0.47 / -0.52
15500	6.71	+0.47 / -0.52
15600	6.78	+0.47 / -0.52
15700	6.79	+0.47 / -0.52
15800	6.82	+0.47 / -0.52
15900	6.88	+0.47 / -0.52
16000	6.89	+0.47 / -0.52
16100	6.96	+0.47 / -0.52
16200	6.97	+0.47 / -0.52
16300	7.02	+0.47 / -0.52
16400	7.07	+0.47 / -0.52
16500	7.12	+0.47 / -0.52
16600	7.17	+0.47 / -0.52
16700	7.20	+0.47 / -0.52
16800	7.22	+0.47 / -0.52
16900	7.23	+0.47 / -0.52
17000	7.24	+0.47 / -0.52
17100	7.27	+0.47 / -0.52
17200	7.28	+0.47 / -0.52
17300	7.28	+0.47 / -0.52
17400	7.30	+0.47 / -0.52
17500	7.34	+0.47 / -0.52
17600	7.35	+0.47 / -0.52
17700	7.39	+0.47 / -0.52
17800	7.41	+0.47 / -0.52
17900	7.41	+0.47 / -0.52
18000	7.44	+0.47 / -0.52

RF cable, 18 GHz, 6 m, N-type
Huber-Suhner, SF106A/11N/11N/4500MM, s/n 500845/6A

HL 5107: Insertion loss

Set / Applied, MHz	Measured, dB	Uncertainty, dB
0.1	0.01	±0.07
50	0.16	±0.07
100	0.23	±0.07
200	0.31	±0.08
300	0.38	±0.08
400	0.44	±0.08
500	0.50	±0.08
600	0.55	±0.08
700	0.59	±0.08
800	0.63	±0.08
900	0.67	±0.08
1000	0.71	±0.08
1100	0.74	±0.08
1200	0.78	±0.08
1300	0.81	±0.08
1400	0.84	±0.08
1500	0.87	±0.08
1600	0.90	±0.08
1700	0.93	±0.08
1800	0.96	±0.08
1900	0.98	±0.08
2000	1.01	±0.08
2500	1.14	±0.10
3000	1.26	±0.10
3500	1.37	±0.10
4000	1.47	±0.10
4500	1.57	±0.10

Set / Applied, MHz	Measured, dB	Uncertainty, dB
5000	1.67	±0.10
5500	1.76	±0.10
6000	1.86	±0.10
6500	1.94	±0.10
7000	2.02	±0.13
7500	2.09	±0.13
8000	2.15	±0.13
8500	2.21	±0.13
9000	2.28	±0.13
9500	2.35	±0.13
10000	2.41	±0.13
10500	2.47	±0.13
11000	2.54	±0.13
11500	2.59	±0.13
12000	2.67	±0.13
12500	2.73	±0.18
13000	2.80	±0.18
13500	2.85	±0.18
14000	2.92	±0.18
14500	2.98	±0.18
15000	3.04	±0.22
15500	3.09	±0.22
16000	3.15	±0.22
16500	3.20	±0.22
17000	3.25	±0.22
17500	3.31	±0.22
18000	3.36	±0.27

RF cable, 40 GHz, 5.5 m, K-type
Huber-Suhner, SF102EA/11SK/11SK/5500MM, s/n 502493/2EA,

HL 5111: Insertion loss

Set / Applied, MHz	Measured, dB	Uncertainty, dB
100	0.70	±0.07
200	0.99	±0.08
300	1.21	±0.08
500	1.56	±0.08
1000	2.20	±0.08
1500	2.69	±0.08
2000	3.11	±0.08
2500	3.50	±0.10
3000	3.85	±0.10
3500	4.16	±0.10
4000	4.47	±0.10
4500	4.74	±0.10
5000	5.03	±0.10
5500	5.30	±0.10
6000	5.57	±0.10
6500	5.76	±0.10
7000	6.00	±0.10
7500	6.20	±0.10
8000	6.44	±0.10
8500	6.67	±0.10
9000	6.82	±0.10
9500	7.04	±0.10
10000	7.18	±0.10
10500	7.36	±0.10
11000	7.55	±0.10
11500	7.75	±0.10
12000	7.90	±0.10
12500	8.08	±0.13
13000	8.19	±0.13
13500	8.39	±0.13
14000	8.58	±0.13
14500	8.76	±0.18
15000	8.92	±0.18
15500	9.03	±0.18
16000	9.18	±0.18
16500	9.34	±0.18
17000	9.51	±0.18
17500	9.66	±0.18
18000	9.80	±0.18
18500	9.94	±0.23
19000	10.05	±0.23
19500	10.22	±0.23

Set / Applied, MHz	Measured, dB	Uncertainty, dB
20000	10.32	±0.23
20500	10.48	±0.23
21000	10.60	±0.23
21500	10.73	±0.23
22000	10.87	±0.23
22500	10.97	±0.29
23000	11.09	±0.29
23500	11.26	±0.29
24000	11.37	±0.29
24500	11.50	±0.29
25000	11.61	±0.23
25500	11.72	±0.23
26000	11.87	±0.23
26500	11.99	±0.23
27000	12.09	±0.33
27500	12.24	±0.33
28000	12.34	±0.40
28500	12.47	±0.40
29000	12.61	±0.40
29500	12.70	±0.40
30000	12.86	±0.40
30500	12.92	±0.33
31000	13.09	±0.33
31500	13.16	±0.33
32000	13.33	±0.33
32500	13.40	±0.33
33000	13.62	±0.33
33500	13.70	±0.33
34000	13.88	±0.33
34500	13.97	±0.40
35000	14.05	±0.40
35500	14.23	±0.40
36000	14.25	±0.40
36500	14.46	±0.40
37000	14.49	±0.33
37500	14.72	±0.33
38000	14.77	±0.33
38500	14.97	±0.33
39000	15.04	±0.33
39500	15.22	±0.33
40000	15.63	±0.47

11 APPENDIX C Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

12 APPENDIX D Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for 1, 2, 15, 18 parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; registered by Industry Canada for electromagnetic emissions, file number IC 2186A-1 for OATS, certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-869 for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports). The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01).

Address: P.O. Box 23, Binyamina 3055001, Israel
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Michael Nikishin, EMC and radio group manager

13 APPENDIX E

Specification references

FCC 47CFR part 15: 2017	Radio Frequency Devices.
ANSI C63.2: 2016	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4: 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
ANSI C63.10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
RSS-247: 2017, Issue 2	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices
RSS-Gen: 2018, Issue 5	General Requirements for Compliance of Radio Apparatus
ICES-003: 2016, Issue 6	Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement
Public notice DA 00- 705: 2000	Filing and measurement guidelines for frequency hopping spread spectrum systems.

14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT