



RADIO TEST REPORT

Test Report No. : 26KE0014-HO-D

Applicant : Sharp Corporation
Type of Equipment : WCDMA & Tri-band (900/1800/1900) GSM Dual mode Mobile Phone/ Bluetooth enable
Model No. : 811SH
FCC ID : APYHR000051
Test standard : FCC Part 15 Subpart C
Section 15.207, Section 15.247: 2006
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.

Date of test:

August 3, 4, 2006

Tested by:

Yasuyuki Fukui
EMC Services

Approved by :

Hironobu Shimoyama
Group Leader of EMC Services



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.

*As for the range of Accreditation in NVLAP, you may refer to the WEB address, <http://ulapex.jp/emc/nvlap.htm>

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

CONTENTS	PAGE
SECTION 1: Client information	3
SECTION 2: Equipment under test (E.U.T.).....	3
SECTION 3: Test specification, procedures & results.....	4
SECTION 4: Operation of E.U.T. during testing.....	8
SECTION 5: Conducted Emission.....	10
SECTION 6: Spurious Emission	11
SECTION 7: Bandwidth	12
SECTION 8: Maximum Peak Output Power	12
SECTION 9: Carrier Frequency Separation	12
SECTION 10: Number of Hopping Frequency	12
SECTION 11: Dwell time	12
APPENDIX 1: Photographs of test setup	13
Conducted Emission	13
Spurious Emission (Radiated)	14
Worst Case Position (Horizontal: X-axis/ Vertical:Y-axis)	15
APPENDIX 2: Data of EMI test.....	16
Conducted Emission	16
Carrier Frequency Separation	21
20dB Bandwidth	23
Number of Hopping Frequency.....	25
Dwell time.....	27
Maximum Peak Output Power.....	30
Radiated Spurious Emission.....	31
Conducted Spurious Emission.....	39
99% Occupied Bandwidth	43
APPENDIX 3:Test instruments	44

SECTION 1: Client information

Company Name	:	Sharp Corporation
Address	:	2-13-1 Iida Hachihonmatsu HigashiHiroshima-City, Hiroshima, 739-0192 Japan
Telephone Number	:	+81-82-420-1592
Facsimile Number	:	+81-82-420-1852
Contact Person	:	Kazushi Okada

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment	:	WCDMA & Tri-band (900/1800/1900) GSM Dual mode Mobile Phone / Bluetooth enable
Model No.	:	811SH
Serial No.	:	004401/11/034056/2, 004401/11/034095/3
Rating	:	AC120V/60Hz
Country of Manufacture	:	Japan
Receipt Date of Sample	:	August 7, 2006
Condition of EUT	:	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT	:	No modification by the test lab.

2.2 Product Description

Model No: 811SH (referred to as the EUT in this report) is the WCDMA & Tri-band (900/1800/1900) GSM Dual mode Mobile Phone/ Bluetooth enable.

Clock frequency(ies) in the system	:	13MHz (CPU), 32.768MHz (RTC)
Equipment Type	:	Transceiver
Frequency of Operation	:	2402-2480MHz
Bandwidth & Channel spacing	:	1MHz & 1MHz
Modulation	:	FHSS
Power Supply (inner)	:	DC 2.9V
Antenna Type	:	Internal Antenna
Antenna Connector Type	:	N/A
Antenna Gain	:	0 dBi max

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part15 Subpart C : 2006

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits : 2006
Section 15.247 Operation within the bands 902-928MHz,
2400-2483.5MHz, and 5725-5850MHz : 2006

FCC 15.31 (e)

This EUT provides stable voltage(DC2.9V) constantly to RF Module regardless of input voltage. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

3.2 Procedures and results

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin*0)	Results
1	Conducted emission	FCC: ANSI C63.4:2003 7. AC powerline conducted emission measurements	FCC: Section 15.207	-	N/A	23.0dB 0.39530MHz, AV, N	Complied
2	Carrier Frequency Separation	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators	FCC: Section 15.247(a)(1)	Conducted	N/A	See data.	Complied
3	20dB Bandwidth	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators	FCC: Section 15.247(a)(1)	Conducted	N/A		Complied
4	Number of Hopping Frequency	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators	FCC: Section 15.247(a)(1)(iii)	Conducted	N/A		Complied
5	Dwell time	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators	FCC: Section 15.247(a)(1)(iii)	Conducted	N/A		Complied
6	Maximum Peak Output Power	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators	FCC: Section 15.247(b)(1)	Conducted	N/A		Complied
7	Band Edge Compliance	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators	FCC: Section 15.247(d)	Conducted	N/A		Complied
8	Spurious Emission	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators	FCC: Section 15.247(d)	Conducted/ Radiated	N/A	<Tx> 7.2dB 2483.5MHz, Hor, AV <Rx> 9.5dB 35.28MHz, Ver, QP	Complied

Note: UL Apex's EMI Work Procedures No.QPM05 and QPM15.

*0) The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.

*These tests were also referred to FCC Public Notice DA 00-705 "Guidance on Measurement for Frequency Hopping Spread Spectrum Systems".

*These tests were performed without any deviations from test procedure except for additions or exclusions.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

3.3 Addition to standards

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
1	99% Occupied Band Width	RSS-Gen 4.4.1	-	Conducted	N/A	N/A	N/A

3.4 Uncertainty

Conducted Emission

The measurement uncertainty (with a 95% confidence level) for this test is ± 2.6 dB.
The data listed in this test report has enough margin, more than the site margin.

Spurious Emission (Radiated)

The measurement uncertainty (with a 95% confidence level) for this test using Biconical antenna is ± 4.59 dB(3m)/ ± 4.58 dB(10m).

The measurement uncertainty (with a 95% confidence level) for this test using Logperiodic antenna is ± 4.62 dB(3m)/ ± 4.60 dB(10m).

The measurement uncertainty (with a 95% confidence level) for this test using Horn antenna is ± 5.27 dB.
The data listed in this test report has enough margin, more than the site margin.

Other test except Conducted Emission and Spurious Emission (Radiated)

The measurement uncertainty (with a 95% confidence level) for this test is ± 3.0 dB.

3.5 Test Location

UL Apex Co., Ltd. Head Office EMC Lab. *NVLAP Lab. code: 200572-0

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	IC4247A	19.2 x 11.2 x 7.7m	7.0 x 6.0m	Preparation room
No.2 semi-anechoic chamber	655103	IC4247A-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	IC4247A-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	IC4247A-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	-
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 shielded room	-	-	6.0 x 6.0 x 3.9m	N/A	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	N/A	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	N/A	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3 and No.4 semi-anechoic chambers and No.7 shielded room.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

3.6 Test set up, Test instruments and Data of EMI

Refer to APPENDIX 1 to 3.

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Modes

The mode used for test : Transmitting mode (Packet size DH5, Data packet: PRBS9)

-Low Channel : 2402MHz

-Mid Channel : 2441MHz


-High Channel : 2480MHz

Receiving mode

-Mid Channel : 2441MHz

Inquiry mode

4.2 Configuration and peripherals

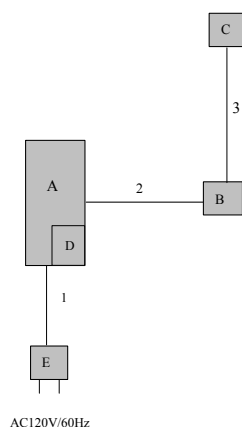

Description of Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	WCDMA & Tri-band GSM Dual mode Mobile Phone/ Bluetooth enable	811SH	004401/11/034056/2 *1), 004401/11/034095/3 *2)	SHARP Corporation	EUT
B	Hands free Microphone Unit	XN-1HU90	-	SHARP Corporation	EUT
C	Stereo Headset	XN-1HS90	-	SHARP Corporation	EUT
D	Lithium-Ion Battery	SHBAR1	-	SHARP Corporation	EUT
E	AC Adapter	SHCAA1	-	HOSIDEN	EUT

*1) Used for Conducted and Radiated emission tests

*2) Used for Antenna terminal tests

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

List of cables used

No.	Name	Length (m)	Shield	
			Cable	Connector
1	DC Cable	1.5	Unshielded	Unshielded
2	Cable for Hands free Microphone Unit	0.9	Unshielded	Unshielded
3	Stereo Headset Cable	0.75	Unshielded	Unshielded

SECTION 5: Conducted Emission

Test Procedure and conditions

EUT was placed on a wooden table of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from a Line Impedance Stabilization Network (LISN)/ Artificial mains Network (AMN) and excess AC cable was bundled in center.

For the tests on EUT with other peripherals (as a whole system)

I/O cable and AC cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. All unused 50ohm connectors of the LISN(AMN) were resistivity terminated in 50ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber or a Measurement Room.

The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

Detector	: CISPR quasi-peak and average detector (IF BW 9 kHz)
Measurement range	: 0.15-30MHz
Test data	: APPENDIX 2
Test result	: Pass

Date: August 3, 2006

Test engineer: Yasuyuki Fukui

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 6: Spurious Emission

[Conducted]

Test Procedure

The Out of Band Emission was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 3

Test result : Pass

[Radiated]

Test Procedure

EUT was placed on a urethane platform of nominal size, 1.0m by 0.5m, raised 80cm above the conducting ground plane. The Radiated Electric Field Strength intensity has been measured in a Semi Anechoic Chamber with a ground plane and at a distance of 3m(Below 10GHz) and 1m(Upper 10GHz).

The height of the measuring varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20dBc was applied to the frequency over the limit of FCC 15.209 and outside the restricted band of FCC15.205.

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver / Spectrum Analyzer	Spectrum Analyzer
Detector	QP: BW 120kHz(T/R)	PK: RBW:1MHz/VBW: 1MHz
IF Bandwidth	20dBc : RBW: 100kHz VBW: 300kHz (S/A)	AV: RBW:1MHz/VBW:10Hz 20dBc : RBW:100kHz/VBW:300kHz

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Test data : APPENDIX 2

Test result : Pass

Date: August 4, 2006

Test engineer: Yasuyuki Fukui

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 7: Bandwidth

Test Procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.

Test data	: APPENDIX 2
Test result	: Pass

SECTION 8: Maximum Peak Output Power

Test Procedure

The Maximum Peak Output Power was measured with a power meter (tested bandwidth: 50MHz) connected to the antenna port.

Test data	: APPENDIX 2
Test result	: Pass

SECTION 9: Carrier Frequency Separation

Test Procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna port.

Test data	: APPENDIX 2
Test result	: Pass

SECTION 10: Number of Hopping Frequency

Test Procedure

The Number of Hopping Frequency was measured with a spectrum analyzer connected to the antenna port.

Test data	: APPENDIX 2
Test result	: Pass

SECTION 11: Dwell time

Test Procedure

The Dwell time was measured with a spectrum analyzer connected to the antenna port.

Test data	: APPENDIX 2
Test result	: Pass

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

APPENDIX 1: Photographs of test setup

Conducted Emission

This page has been submitted for a separate exhibit

Spurious Emission (Radiated)

This page has been submitted for a separate exhibit

Worst Case Position (Horizontal: X-axis/ Vertical:Y-axis)

This page has been submitted for a separate exhibit

APPENDIX 2: Data of EMI test

Conducted Emission

DATA OF CONDUCTED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.3 Semi Anechoic Chamber
Date : 2006/08/04 02:03:52

Applicant : Sharp Corporation

Kind of EUT : WCDMA & Tri-band (900/1800/1900) GSM Dual mode Mobile

Model No. : 811SH

Serial No. : 004401/11/034056/2

Mode / Remarks : Bluetooth Tx 2402MHz , DH5

Report No. : 26KE0014-HO

Power : DC4.0V (AC Adapter : AC120V/60Hz)

Temp°C/Humi% : 22.5deg. C / 62%

Operator : Yasuyuki Fukui

LIMIT : FCC15C § 15.207 (QP) / RSS-Gen

FCC15C § 15.207 (AV) / RSS-Gen

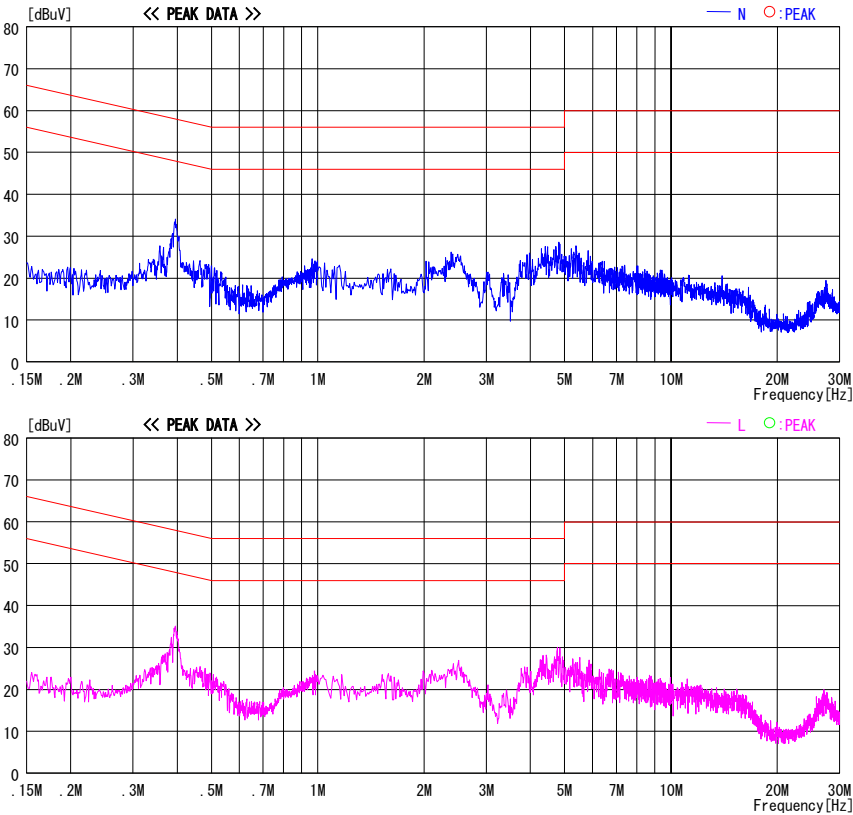


CHART:WITH FACTOR,Peak hold data.Data is uncorrected. CALCURATION:RESULT=READING+C.F(LISN LOSS+CABLE LOSS)
Except for the above table : adequate margin data below the limits.

Conducted Emission

DATA OF CONDUCTED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.3 Semi Anechoic Chamber
Date : 2006/08/04 01:48:25

Applicant : Sharp Corporation
Kind of EUT : WCDMA & Tri-band (900/1800/1900) GSM Dual mode Mobile
Model No. : 811SH
Serial No. : 004401/11/034056/2
Mode / Remarks : Bluetooth Tx 2441MHz , DH5
Report No. : 26KE0014-H0
Power : DC4.0V (AC Adapter : AC120V/60Hz)
Temp°C/Humi% : 22.5deg.C / 62%
Operator : Yasuyuki Fukui

LIMIT : FCC15C § 15.207 (QP) / RSS-Gen
FCC15C § 15.207 (AV) / RSS-Gen

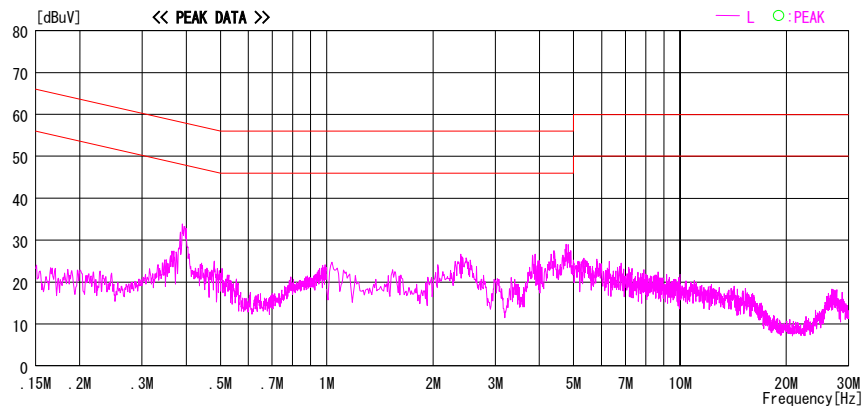
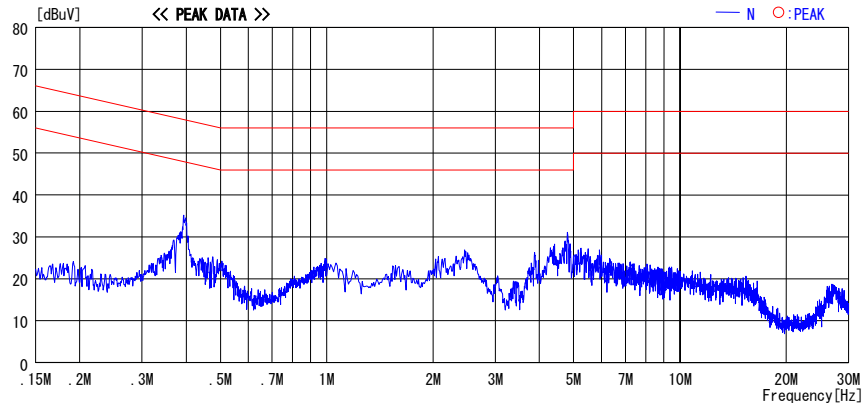


CHART:WITH FACTOR,Peak hold data.Data is uncorrected. CALCURATION:RESULT=READING+C.F(LISN LOSS+CABLE LOSS)
Except for the above table : adequate margin data below the limits.

Conducted Emission

DATA OF CONDUCTED EMISSION TEST

Applicant : Sharp Corporation
Kind of EUT : WCDMA & Tri-band (900/1800/1900) GSM Dual mode Mobile Phone / Bluetooth enable
Model No. : 811SH
Serial No. : 004401/11/034056/2
Mode / Remarks : Bluetooth Tx 2480MHz , DH5

UL Apex Co., Ltd. Head Office EMC Lab. No.3 Semi Anechoic Chamber
Date : 2006/08/04 02:12:52

Report No. : 26KE0014-HO
Power : DC4.0V (AC Adapter : AC120V/60Hz)
Temp°C/Humi% : 22.5deg. C / 62%
Operator : Yasuyuki Fukui

LIMIT : FCC15C §15.207 (QP) / RSS-Gen
FCC15C §15.207 (AV) / RSS-Gen

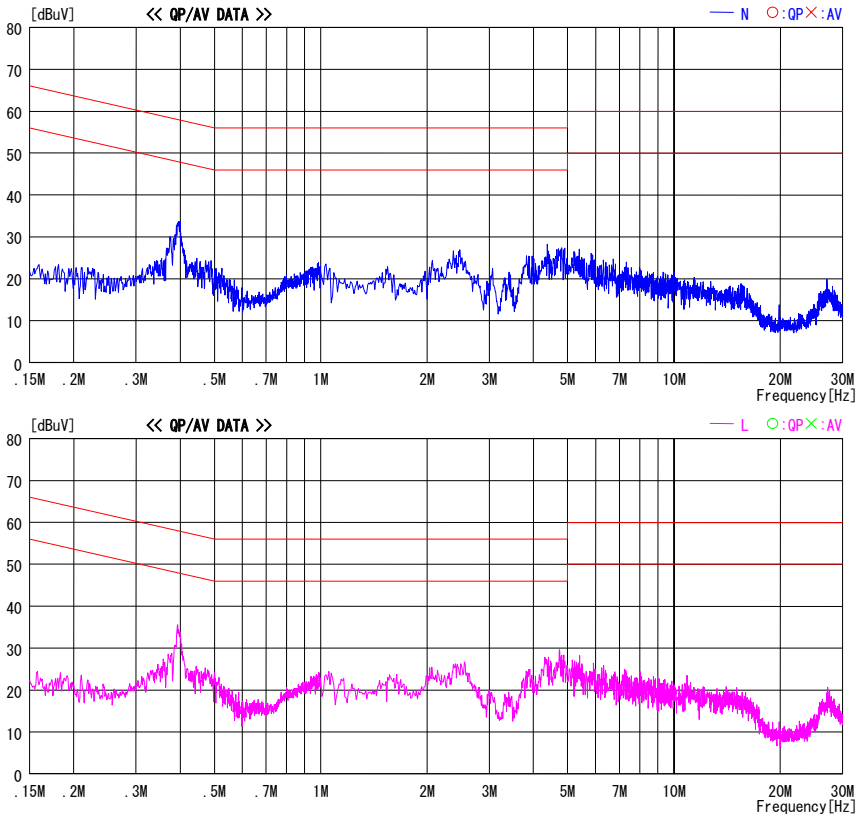


CHART:WITH FACTOR,Peak hold data.Data is uncorrected. CALCURATION:RESULT=READING+C.F(LISN LOSS+CABLE LOSS)
Except for the above table : adequate margin data below the limits.

Conducted Emission

DATA OF CONDUCTED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.3 Semi Anechoic Chamber

Applicant : Sharp Corporation

Kind of EUT : WCDMA & Tri-band (900/1800/1900) GSM Dual mode Mobile

Model No. : 811SH

Serial No. : 004401/11/034056/2

Mode / Remarks : Bluetooth Rx 2441MHz , DH5

LIMIT : FCC15C § 15.207 (QP) / RSS-Gen

FCC15C § 15.207 (AV) / RSS-Gen

Report No. : 26KE0014-HO

Power : DC4.0V (AC Adapter : AC120V/60Hz)

Temp/C/Humi% : 22.5deg. C / 62%

Operator : Yasuyuki Fukui

Date : 2006/08/04 02:08:18

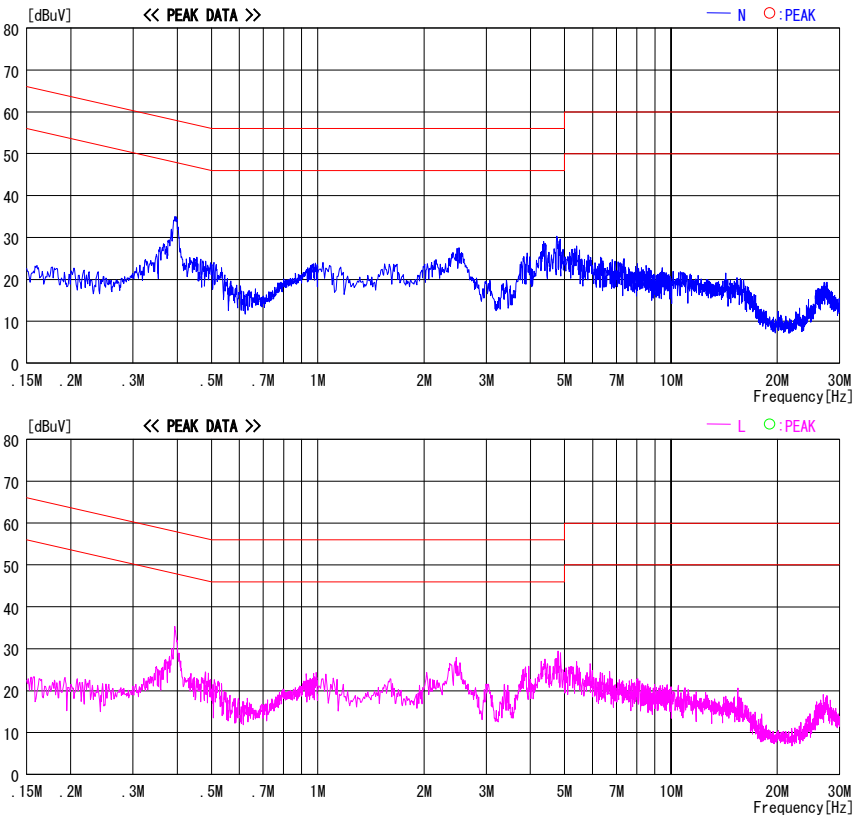


CHART:WITH FACTOR,Peak hold data.Data is uncorrected. CALCURATION:RESULT=READING+C.F(LISN LOSS+CABLE LOSS)
Except for the above table : adequate margin data below the limits.

Conducted Emission


DATA OF CONDUCTED EMISSION TEST

Applicant : Sharp Corporation
Kind of EUT : WCDMA & Tri-band (900/1800/1900) GSM Dual mode Mobile
Phone / Bluetooth enable
Model No. : 811SH
Serial No. : 004401/11/034056/2
Mode / Remarks : Bluetooth Tx 2480MHz , DH5

UL Apex Co., Ltd. Head Office EMC Lab. No.3 Semi Anechoic Chamber
Date : 2006/08/04 02:12:52

Report No. : 26KE0014-HO
Power : DC4.0V (AC Adapter : AC120V/60Hz)
Temp/C/Humi% : 22.5deg.C / 62%
Operator : Yasuyuki Fukui

LIMIT : FCC15C § 15.207 (QP) / RSS-Gen
FCC15C § 15.207 (AV) / RSS-Gen

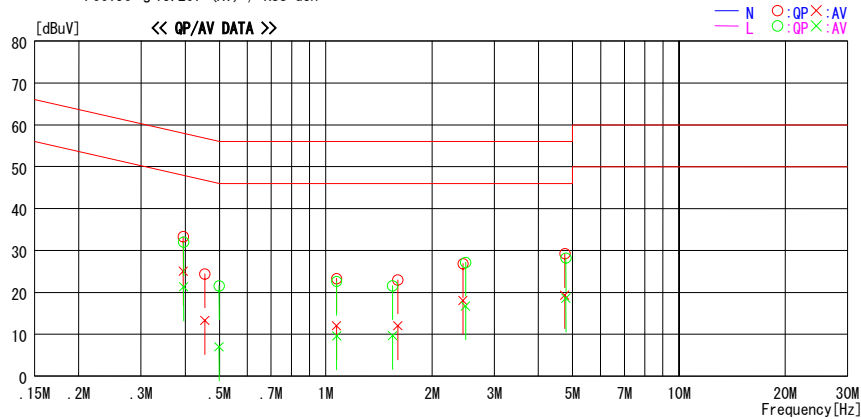

Frequency [MHz]	Reading Level		Corr. Factor	Results		Limit		Margin		Phase
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]	
0.39530	33.1	24.8	0.2	33.3	25.0	58.0	48.0	24.7	23.0	N
0.45471	24.2	13.1	0.2	24.4	13.3	56.8	46.8	32.4	33.5	N
1.07318	23.0	11.7	0.3	23.3	12.0	56.0	46.0	32.7	34.0	N
1.59938	22.7	11.7	0.3	23.0	12.0	56.0	46.0	33.0	34.0	N
2.44331	26.4	17.7	0.4	26.8	18.1	56.0	46.0	29.2	27.9	N
4.75067	28.7	18.8	0.6	29.3	19.4	56.0	46.0	26.7	26.6	N
0.39622	31.8	21.1	0.2	32.0	21.3	57.9	47.9	25.9	26.6	L
0.49920	21.4	6.8	0.2	21.6	7.0	56.0	46.0	34.4	39.0	L
1.07359	22.3	9.3	0.3	22.6	9.6	56.0	46.0	33.4	36.4	L
1.54592	21.3	9.4	0.3	21.6	9.7	56.0	46.0	34.4	36.3	L
2.48764	26.8	16.3	0.4	27.2	16.7	56.0	46.0	28.8	29.3	L
4.78640	27.5	17.9	0.7	28.2	18.6	56.0	46.0	27.8	27.4	L

CHART:WITH FACTOR,Peak hold data.Data is uncorrected. CALCURATION:RESULT=READING+C.F (LISN LOSS+CABLE LOSS)
Except for the above table : adequate margin data below the limits.


Carrier Frequency Separation

UL Apex Co., Ltd.
Head Office EMC Lab. No.6 Shielded Room

COMPANY	: Sharp Corporation	REGULATION	: FCC Part15 Subpart C 15.247(a)(1)
EQUIPMENT	: WCDMA & Tri-band (900/1800/1900)	TEST DISTANCE	: -
	GSM Dual mode Mobile Phone / Bluetooth enable	DATE	: 08/08/2006
MODEL	: 811SH	TEMPERATURE	: 25deg.C
S/ N	: 004401/11/034095/3	HUMIDITY	: 55%
POWER	: DC4.0V	ENGINEER	: Yasuyuki Fukui
MODE	: Transmitting mode (Hopping On)/Inquiry mode		

Ch	Freq. [MHz]	Channel separation [MHz]	Limit
Low	2402.0	1.000	>0.940 (20dB Bandwidth or 25[kHz])(whichever is greater))
Mid	2441.0	1.000	>0.955 (20dB Bandwidth or 25[kHz])(whichever is greater))
High	2480.0	1.000	>0.940 (20dB Bandwidth or 25[kHz])(whichever is greater))
Inquiry	2441.0	2.000	>0.835 (20dB Bandwidth or 25[kHz])(whichever is greater))

Carrier Frequency Separation

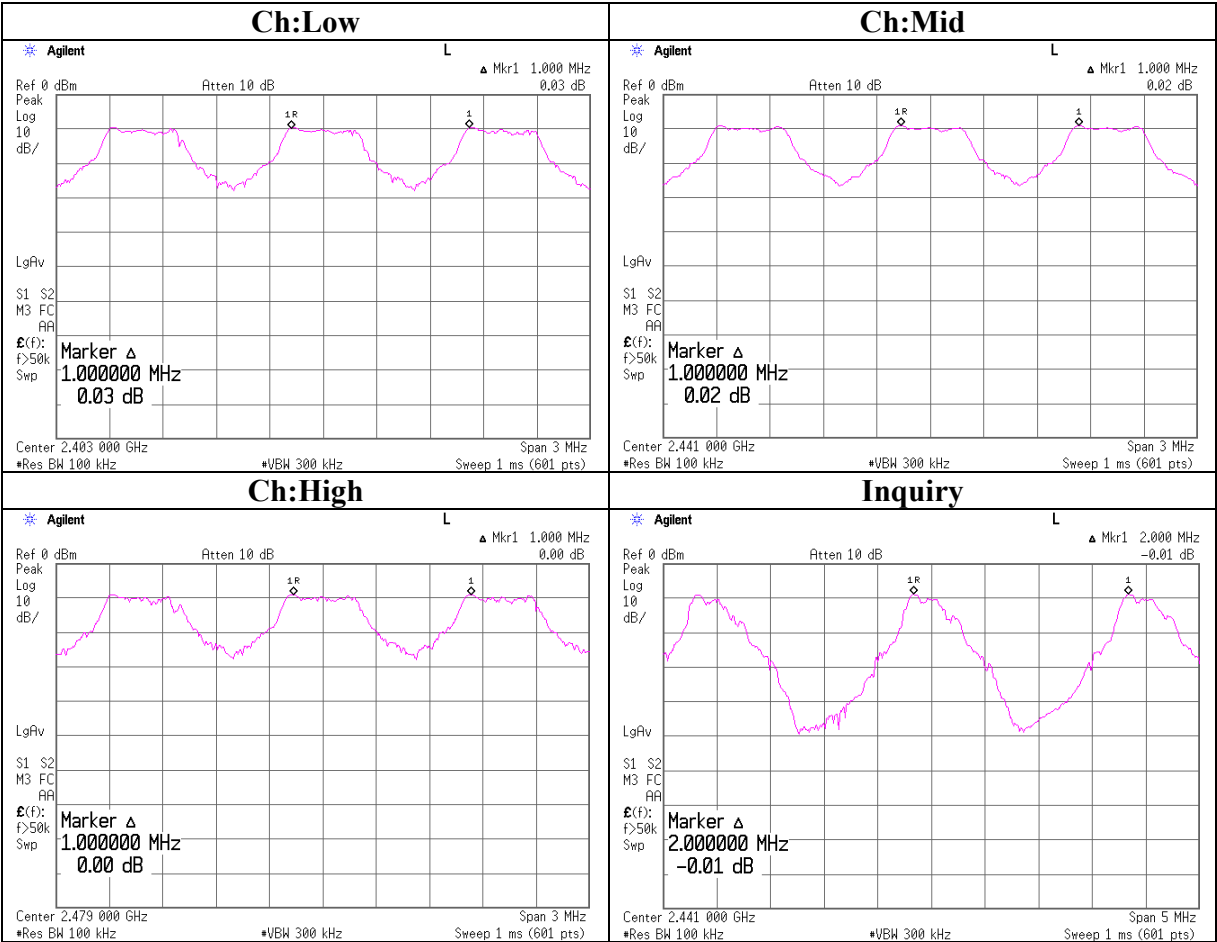


20dB Bandwidth

UL Apex Co., Ltd.
Head Office EMC Lab. No.7 Shielded Room

COMPANY	: Sharp Corporation	REGULATION	: FCC Part15 Subpart C 15.247(a)(1)
EQUIPMENT	: WCDMA & Tri-band (900/1800/1900)	TEST DISTANCE	: -
	GSM Dual mode Mobile Phone / Bluetooth enable	DATE	: 08/08/2006
MODEL	: 811SH	TEMPERATURE	: 25deg.C
S/ N	: 004401/11/034095/3	HUMIDITY	: 55%
POWER	: DC4.0V	ENGINEER	: Yasuyuki Fukui
MODE	: Transmitting mode (Hopping On)/Inquiry mode		

Ch	Freq.	20dB Bandwidth	Limit
	[MHz]	[MHz]	[MHz]
Low	2402.0	0.940	-
Mid	2441.0	0.955	-
High	2480.0	0.940	-
Inquiry	2441.0	0.835	-

20dB Bandwidth

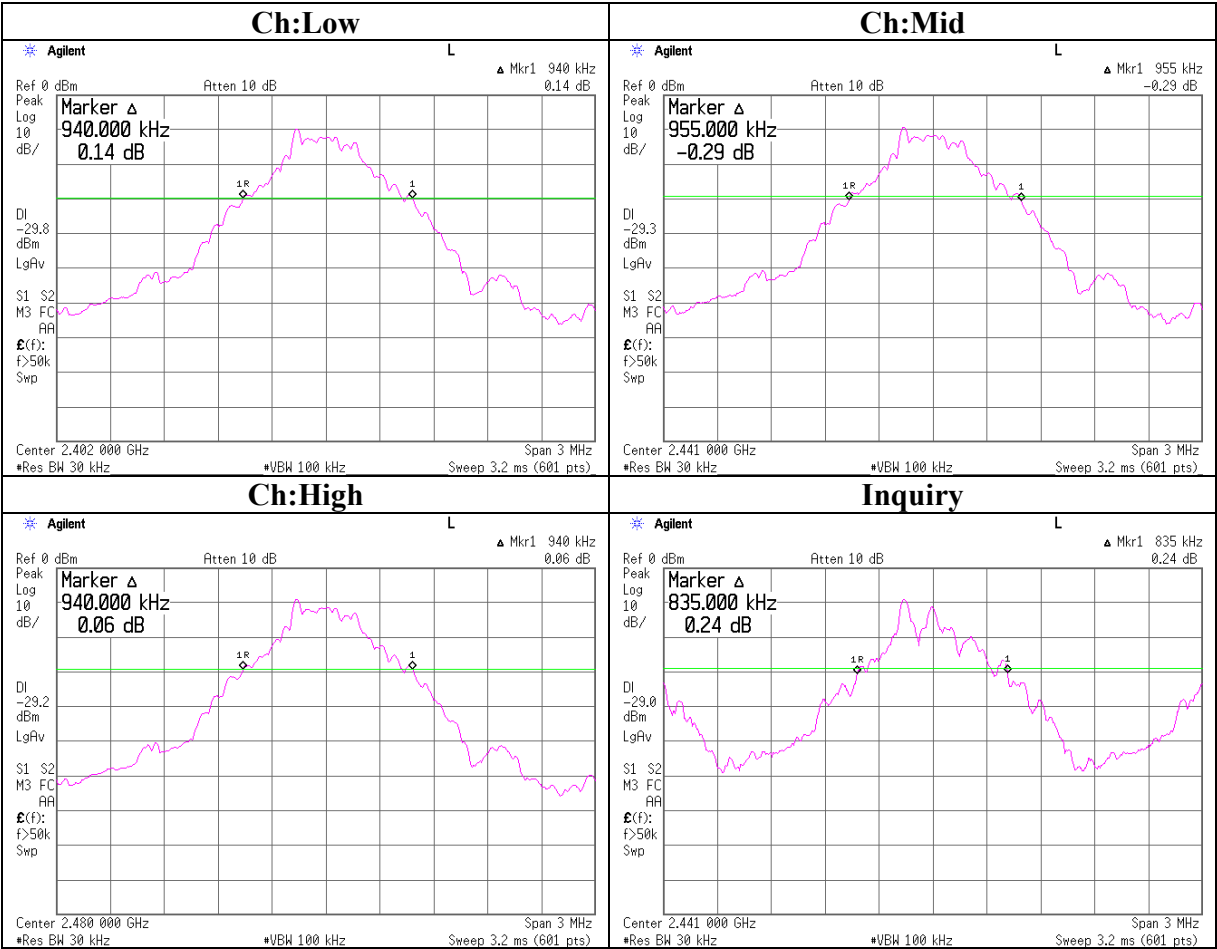

Number of Hopping Frequency


UL Apex Co., Ltd.
Head Office EMC Lab. No.6 Measurement Room

COMPANY	: Sharp Corporation	REGULATION	: FCC Part15 Subpart C 15.247(a)(1)(iii)
EQUIPMENT	: WCDMA & Tri-band (900/1800/1900) GSM Dual mode Mobile Phone / Bluetooth enable	TEST DISTANCE	: -
MODEL	: 811SH	DATE	: 08/08/2006
S/ N	: 004401/11/034095/3	TEMPERATURE	: 25deg.C
POWER	: DC4.0V	HUMIDITY	: 55%
MODE	: Transmitting mode (Hopping On)/Inquiry mode	ENGINEER	: Yasuyuki Fukui

Mode	Number of channel [time]	Limit [time]
Tx(Hoppng on)	79	≥ 15

Mode	Number of channel [time]	Limit [time]
Inquiry	32	≥ 15

Number of Hopping Frequency

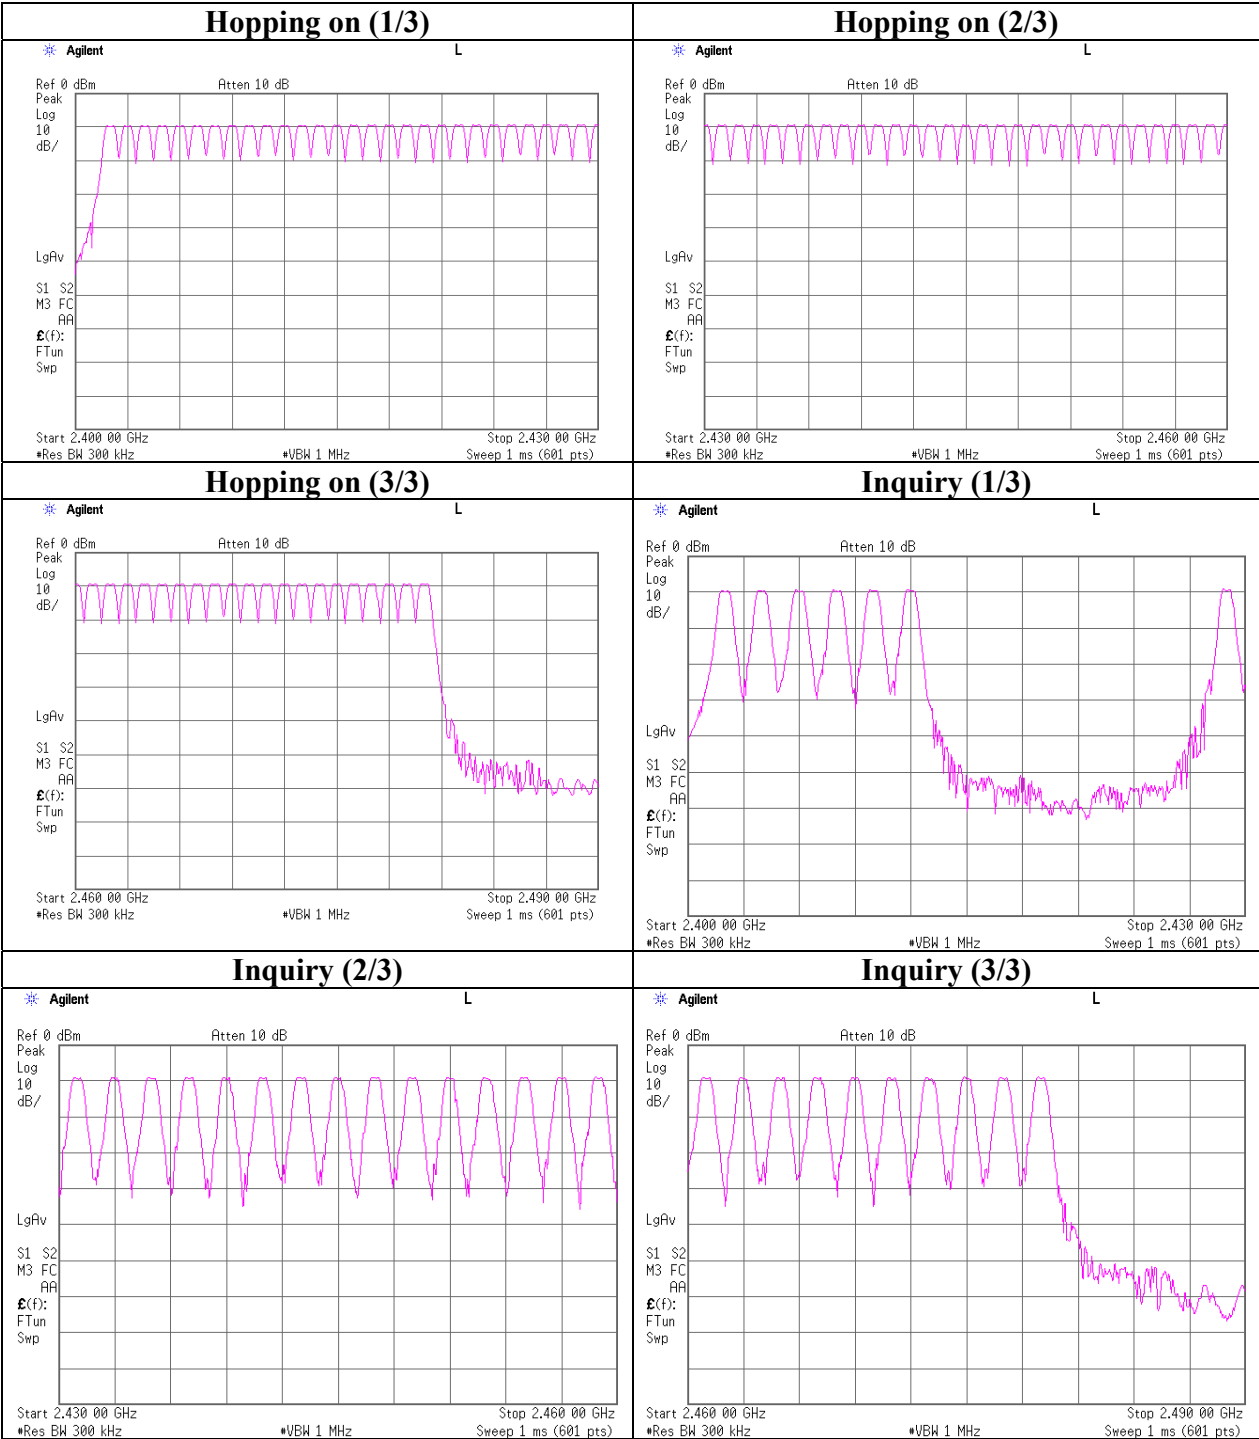

Dwell time

UL Apex Co., Ltd.
Head Office EMC Lab. No.6 Measurement Room


COMPANY : Sharp Corporation
EQUIPMENT : WCDMA & Tri-band (900/1800/1900)
GSM Dual mode Mobile Phone / Bluetooth enable
MODEL : 811SH
S/N : 004401/11/034095/3
POWER : DC4.0V
MODE : Transmitting mode (Hopping On)/Inquiry mode

REGULATION : FCC Part15 Subpart C 15.247(a)(1)(iii)
TEST DISTANCE : -
DATE : 08/08/2006
TEMPERATURE : 25deg.C
HUMIDITY : 55%
ENGINEER : Yasuyuki Fukui


Mode	Number of transmission in a 31.6(79 Hopping x 0.4) / 12.8(32 Hopping x 0.4)second period	Length of transmission time [msec]	Result [msec]	Limit [msec]
DH1	50.0times /5sec. x 31.6 = 316.0imes *	0.430	136	400
DH3	31.6times/5sec. x 31.6 = 199.7 times *	1.703	340	400
DH5	21times/5sec. x 31.6 = 132.7times*	2.900	385	400
Inquiry	101times / 1sec. x 12.8 = 1292 times	0.135	174	400

*Average data of 5 tests

Dwell time

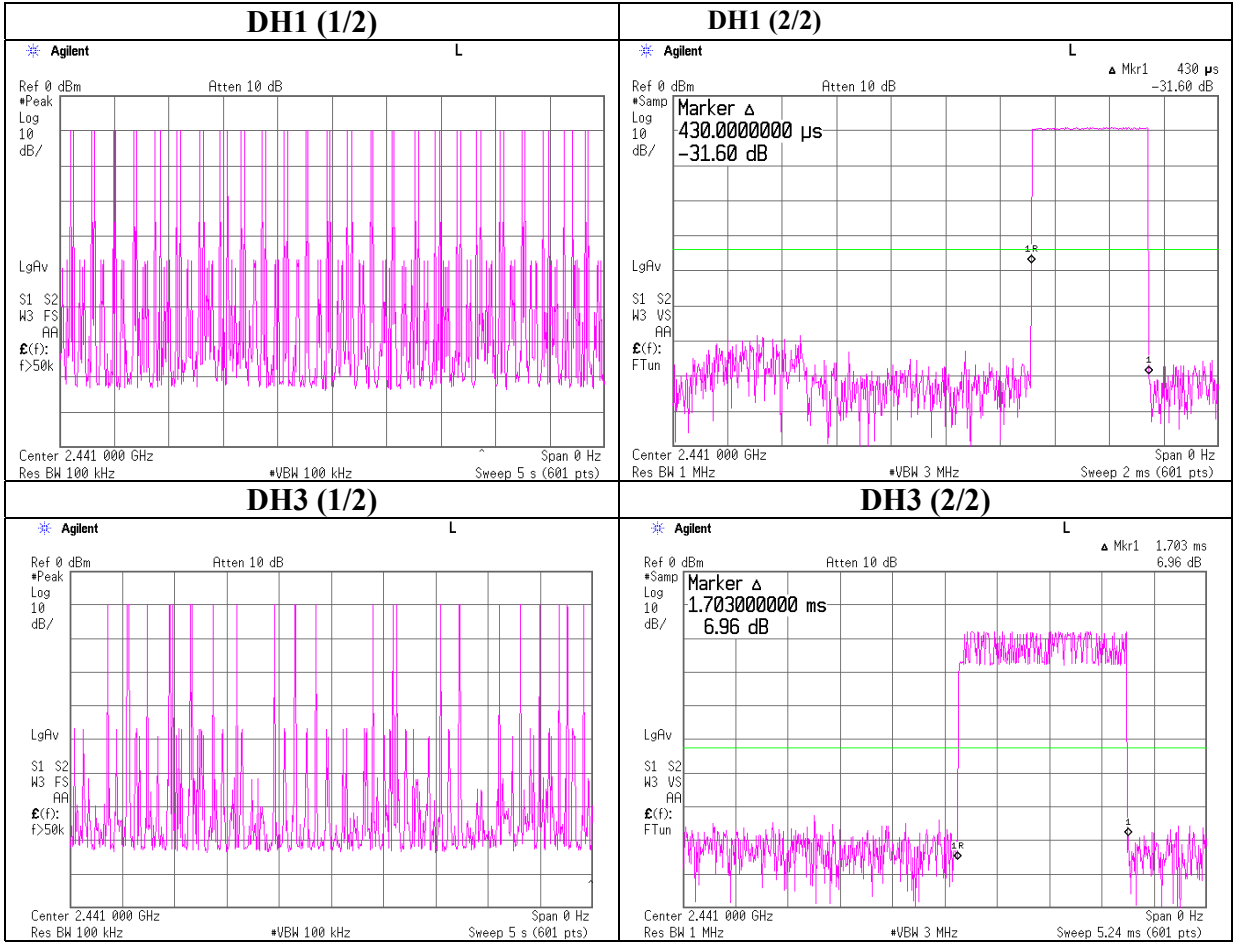

Dwell time

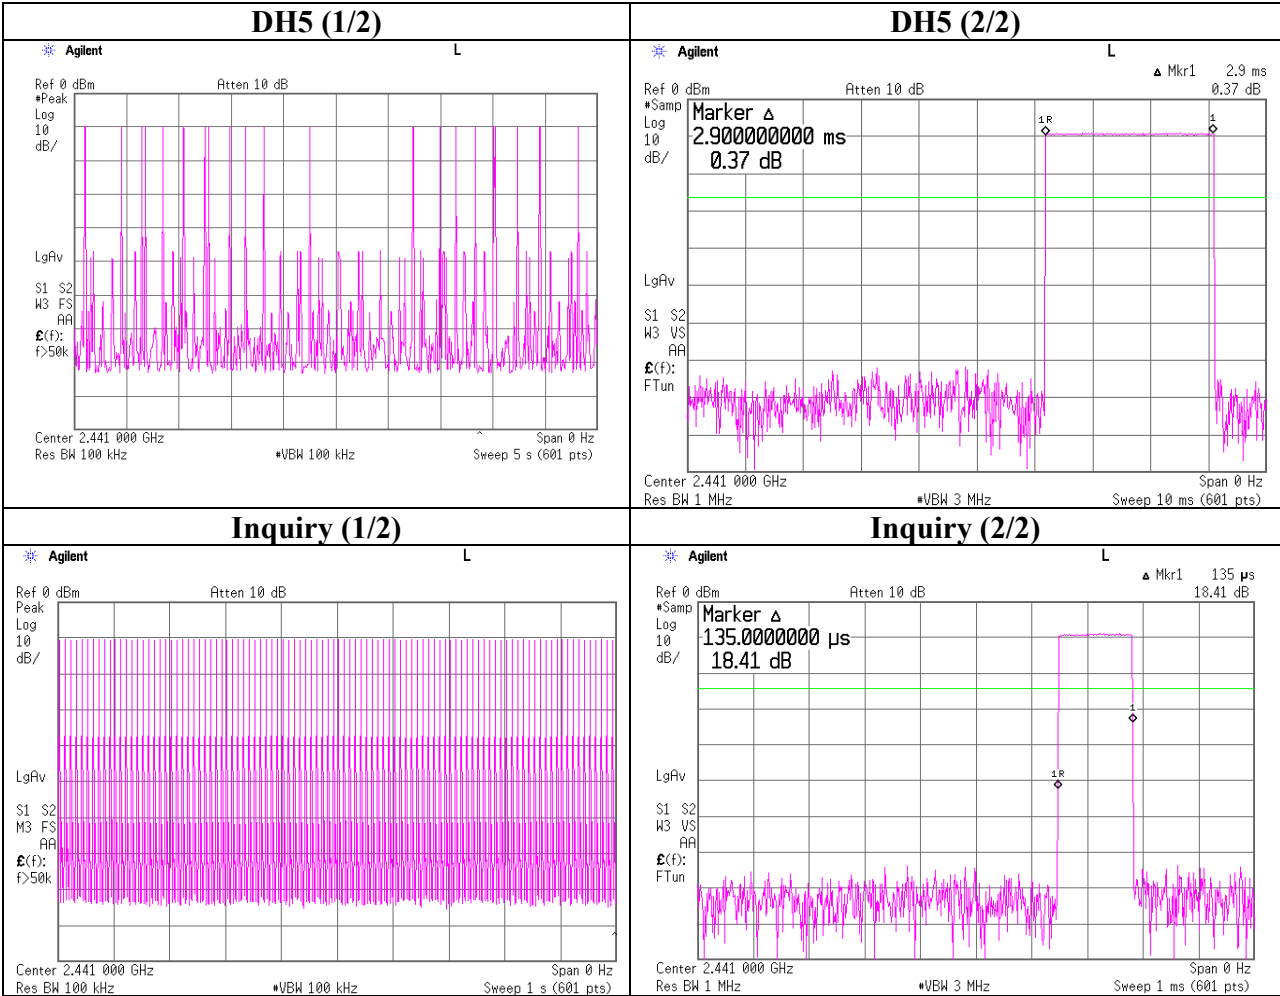

Maximum Peak Output Power

UL Apex Co., Ltd.
Head Office EMC Lab. No.6 Measurement Room

COMPANY	: Sharp Corporation	REGULATION	: FCC Part15 Subpart C 15.247(b)(1)
EQUIPMENT	: WCDMA & Tri-band (900/1800/1900) GSM Dual mode Mobile Phone / Bluetooth enable	TEST DISTANCE	: -
MODEL	: 811SH	DATE	: 08/08/2006
S/ N	: 004401/11/034095/3	TEMPERATURE	: 25deg.C
POWER	: DC4.0V	HUMIDITY	: 55%
MODE	: Transmitting mode (Hopping On)/Inquiry mode	ENGINEER	: Yasuyuki Fukui

Ch	Freq. [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Limit		Margin [dB]
					[dBm]	[mW]	[dBm]	[mW]	
Low	2402.0	-9.26	0.50	10.15	1.39	1.38	30.00	1000	28.61
Mid	2441.0	-8.82	0.37	10.15	1.70	1.48	30.00	1000	28.30
High	2480.0	-9.27	0.43	10.15	1.31	1.35	30.00	1000	28.70
Inquiry	2441.0	-9.25	0.37	10.15	1.27	1.34	20.97	125	19.70

Sample Calculation:

Result = Reading + Cable Loss (supplied by customer)+ Attenuator

* In the above table, factor 0.0dB represents no use of Atten. and/or Filter.

Radiated Spurious Emission

* The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.


DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.3 Semi Anechoic Chamber

Date : 2006/08/03 21:47:54

Applicant : Sharp Corporation
Kind of EUT :
WCDMA & Tri-band (900/1800/1900) GSM Dual mode Mobile
Phone / Bluetooth enable
Model No. : 811SH
Serial No. : 004401/11/034056/2
Mode / Remarks : Bluetooth Tx 2402MHz, DH5, EUT max-axis (H:X, V:Y)
Report No. : 26KE0014-HO
Power : DC 4.0V (AC adapter: AC120V/60Hz)
Temp./Humi. : 24deg. C / 65%
Operator : Yasuyuki Fukui

LIMIT : FCC15C § 15.247(d) 3m, below 1GHz:QP / RSS-Gen / RSS-210
Except for the data below : adequate margin data below the limits.

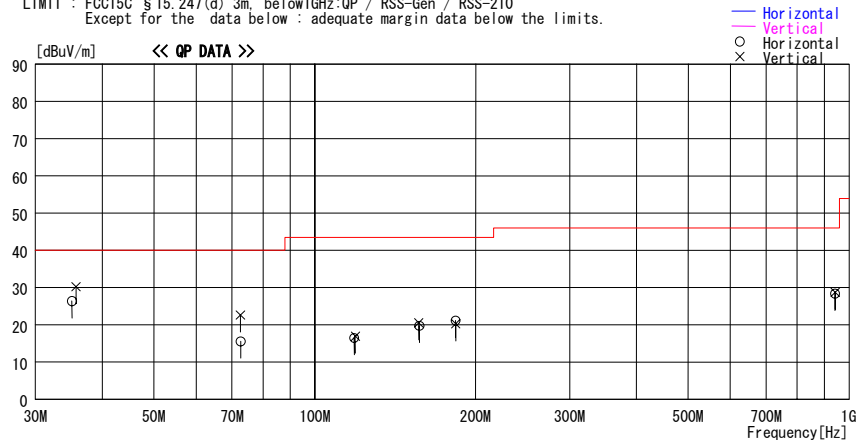

Frequency	Reading	DET	Antenna Factor	Loss & Gain	Level	Angle	Height	Polar.	Limit	Margin
[MHz]	[dBuV]		[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]
35.130	34.8	QP	16.6	-25.0	26.4	298	300	Hori.	40.0	13.6
35.720	38.9	QP	16.3	-25.0	30.2	203	100	Vert.	40.0	9.8
72.580	39.8	QP	7.2	-24.4	22.6	174	100	Vert.	40.0	17.4
72.660	32.8	QP	7.2	-24.4	15.6	34	300	Hori.	40.0	24.4
118.559	26.9	QP	13.3	-23.7	16.5	79	300	Hori.	43.5	27.0
119.099	27.2	QP	13.4	-23.7	16.9	208	100	Vert.	43.5	26.6
156.630	28.2	QP	15.6	-23.3	20.5	261	100	Vert.	43.5	23.0
156.900	27.4	QP	15.6	-23.3	19.7	21	300	Hori.	43.5	23.8
183.360	27.4	QP	16.8	-23.1	21.1	91	300	Hori.	43.5	22.4
183.630	26.5	QP	16.8	-23.1	20.2	76	100	Vert.	43.5	23.3
942.700	24.2	QP	22.4	-17.9	28.7	7	100	Vert.	46.0	17.3
941.700	23.9	QP	22.4	-17.9	28.4	287	100	Hori.	46.0	17.6

CHART: WITH FACTOR / ANT TYPE : -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

Radiated Spurious Emission

* The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.


DATA OF RADIATED EMISSION TEST

Applicant : Sharp Corporation
Kind of EUT :
WCDMA & Tri-band (900/1800/1900) GSM Dual mode Mobile
Phone / Bluetooth enable
Model No. : 811SH
Serial No. : 004401/11/034056/2
Mode / Remarks : Bluetooth Tx 2441MHz, DH5, EUT max-axis (H:X, V:Y)

UL Apex Co., Ltd. Head Office EMC Lab. No.3 Semi Anechoic Chamber
Date : 2006/08/03 22:07:47

Report No. : 26KE0014-HO
Power : DC 4.0V (AC adapter: AC120V/60Hz)
Temp./Humi. : 24deg.C / 65%
Operator : Yasuyuki Fukui

LIMIT : FCC15C §15.247(d) 3m, below1GHz:QP / RSS-Gen / RSS-210
Except for the data below : adequate margin data below the limits.

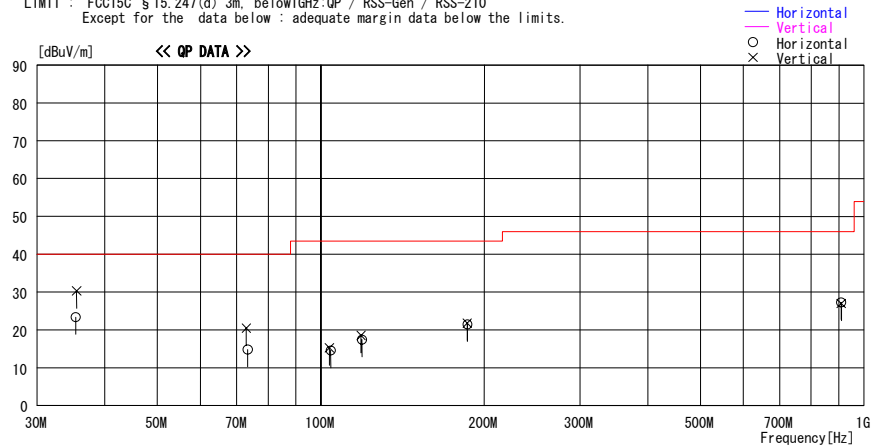

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
			Factor [dB/m]	Gain [dB]						
35.400	31.9	QP	16.5	-25.0	23.4	98	300	Hori.	40.0	16.6
35.495	38.9	QP	16.4	-25.0	30.3	206	100	Vert.	40.0	9.7
73.350	31.9	QP	7.2	-24.3	14.8	169	300	Hori.	40.0	25.2
72.930	37.6	QP	7.2	-24.4	20.4	219	100	Vert.	40.0	19.6
103.710	27.6	QP	11.5	-23.9	15.2	169	100	Vert.	43.5	28.3
104.250	26.9	QP	11.6	-23.9	14.6	241	300	Hori.	43.5	28.9
118.559	28.9	QP	13.3	-23.7	18.5	351	100	Vert.	43.5	25.0
119.099	27.8	QP	13.4	-23.7	17.5	172	300	Hori.	43.5	26.0
186.060	27.8	QP	16.8	-23.1	21.5	355	300	Hori.	43.5	22.0
186.060	28.1	QP	16.8	-23.1	21.8	248	100	Vert.	43.5	21.7
908.300	23.8	QP	21.7	-18.2	27.3	26	100	Hori.	46.0	18.7
908.700	23.5	QP	21.7	-18.2	27.0	235	100	Vert.	46.0	19.0


CHART: WITH FACTOR / ANT. TYPE : -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN
CALCULATION: RESULT = READING + ANT. FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

Radiated Spurious Emission

* The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.

DATA OF RADIATED EMISSION TEST

Applicant : Sharp Corporation
Kind of EUT : WCDMA & Tri-band (900/1800/1900) GSM Dual mode Mobile
Phone / Bluetooth enable
Model No. : 811SH
Serial No. : 004401/11/034056/2
Mode / Remarks : Bluetooth Tx 2480MHz, DH5, EUT max-axis (H:X, V:Y)
Report No. : 26KE0014-HO
Power : DC 4.0V (AC adapter: AC120V/60Hz)
Temp./Humi. : 24deg.C / 65%
Operator : Yasuyuki Fukui
UL Apex Co., Ltd. Head Office EMC Lab. No.3 Semi Anechoic Chamber
Date : 2006/08/03 22:44:12
LIMIT : FCC15C § 15.247(d) 3m, below 1GHz:QP / RSS-Gen / RSS-210
Except for the data below : adequate margin data below the limits.

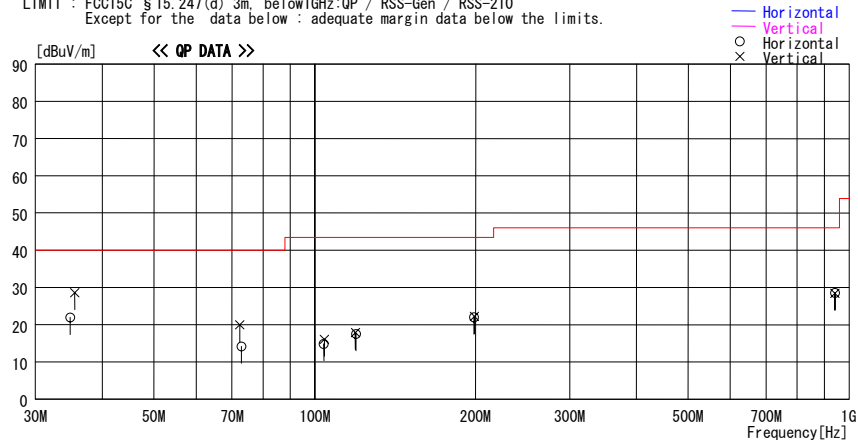

Frequency	Reading	DET	Antenna Factor	Loss & Gain	Level	Angle	Height	Polar.	Limit	Margin
[MHz]	[dBuV]		[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]
34.860	30.1	QP	16.8	-25.0	21.9	141	300	Hori.	40.0	18.1
35.548	37.2	QP	16.4	-25.0	28.6	201	100	Vert.	40.0	11.4
72.390	37.2	QP	7.2	-24.4	20.0	174	100	Vert.	40.0	20.0
72.930	31.4	QP	7.2	-24.4	14.2	199	300	Hori.	40.0	25.8
103.980	27.2	QP	11.5	-23.9	14.8	8	300	Hori.	43.5	28.7
104.223	28.4	QP	11.6	-23.9	16.1	62	100	Vert.	43.5	27.4
119.099	28.2	QP	13.4	-23.7	17.9	127	100	Vert.	43.5	25.6
119.369	27.9	QP	13.4	-23.7	17.6	139	300	Hori.	43.5	25.9
198.480	27.9	QP	17.1	-23.0	22.0	191	300	Hori.	43.5	21.5
199.020	28.1	QP	17.1	-23.0	22.2	49	100	Vert.	43.5	21.3
942.311	24.1	QP	22.4	-17.9	28.6	137	100	Hori.	46.0	17.4
941.322	23.9	QP	22.4	-17.9	28.4	356	100	Vert.	46.0	17.6

CHART: WITH FACTOR / ANT TYPE : -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

Radiated Spurious Emission

* The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.


DATA OF RADIATED EMISSION TEST

Applicant : Sharp Corporation
Kind of EUT : WCDMA & Tri-band (900/1800/1900) GSM Dual mode Mobile
Phone / Bluetooth enable
Model No. : 811SH
Serial No. : 004401/11/034056/2
Mode / Remarks : Bluetooth Rx 2441MHz, DH5, EUT max-axis (H:X, V:Y)

UL Apex Co., Ltd. Head Office EMC Lab. No.3 Semi Anechoic Chamber
Date : 2006/08/03 21:08:19

Report No. : 26KE0014-HO
Power : DC 4.0V (AC adapter: AC120V/60Hz)
Temp./Humi. : 24deg. C / 65%
Operator : Yasuyuki Fukui

LIMIT : FCC15C §15.247(d) 3m, below1GHz:QP / RSS-Gen / RSS-210
Except for the data below : adequate margin data below the limits.

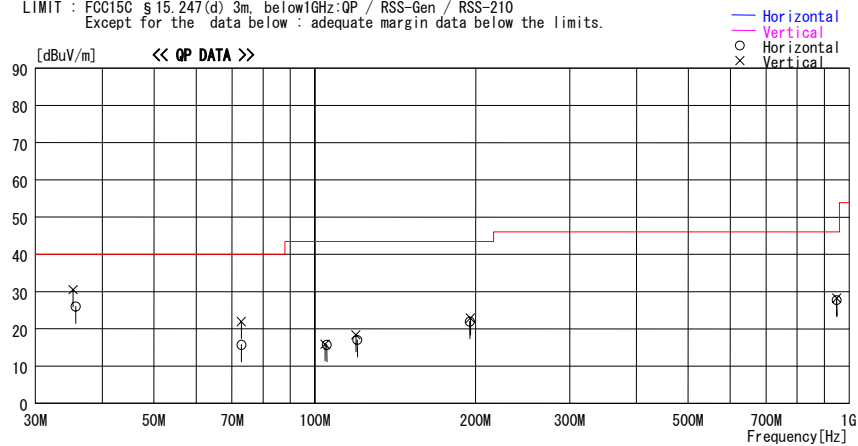

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit	Margin
			Factor [dB/m]	Gain [dB]					[dBuV/m]	[dB]
35.280	38.9	QP	16.6	-25.0	30.5	153	100	Vert.	40.0	9.5
35.670	34.7	QP	16.3	-25.0	26.0	271	300	Hori.	40.0	14.0
72.930	32.9	QP	7.2	-24.4	15.7	170	300	Hori.	40.0	24.3
72.880	39.2	QP	7.2	-24.4	22.0	218	100	Vert.	40.0	18.0
104.520	28.2	QP	11.6	-23.9	15.9	349	100	Vert.	43.5	27.6
105.330	27.9	QP	11.7	-23.9	15.7	97	300	Hori.	43.5	27.8
119.369	28.7	QP	13.4	-23.7	18.4	271	100	Vert.	43.5	25.1
120.179	27.2	QP	13.5	-23.7	17.0	60	300	Hori.	43.5	26.5
194.970	27.9	QP	17.0	-23.0	21.9	19	300	Hori.	43.5	21.6
195.510	28.9	QP	17.0	-23.0	22.9	354	100	Vert.	43.5	20.6
949.090	23.4	QP	22.6	-17.8	28.2	188	100	Vert.	46.0	17.8
948.710	22.9	QP	22.6	-17.8	27.7	350	100	Hori.	46.0	18.3

CHART:WITH FACTOR / ANT TYPE : -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz-:HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

Test report No. : 26KE0014-HO-D
Page : 35 of 44
Issued date : August 22, 2006
FCC ID : APYHR000051

Radiated Spurious Emission

DATA OF SPURIOUS EMISSIONS(1GHz to 26GHz)

UL Apex Co., Ltd.
Head Office EMC Lab. No.3Semi Anechoic Chamber

Company	: Sharp Corporation	REPORT NO	: 26KE0014-HO
Equipment	: WCDMA & Tri-band (900/1800/1900) GSM Dual mode Mobile Phone / Bluetooth enable	REGULATION	: Fcc Part15 Subpart C 15.247(d)
Model	: 811SH	TEST DISTANCE	: 3/1m
Sample No.	: 004401/11/034056/2	DATE	: 08/04/2006
Power	: DC4.0V (AC 120 V / 60 Hz)	TEMPERATURE	: 23deg.C
Mode	: Bluetooth Hopping Off Tx 2402MHz	HUMIDITY	: 61%
Remarks	: Hor X , Ver Y-axis	ENGINEER	: Yasuyuki Fukui

PK DETECT (RBW: 1MHz, VBW: 1MHz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]						[dBuV/m]			[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	2039.7	42.9	40.8	31.3	33.0	2.1	0.0	43.3	41.2	74.0	30.7	32.8
2	2390.0	42.2	41.8	30.6	32.8	2.2	0.0	42.2	41.8	74.0	31.8	32.2
3	4804.0	45.8	45.7	35.7	31.6	3.5	0.4	53.8	53.7	74.0	20.2	20.3
4	7206.0	43.1	42.1	37.5	32.1	4.3	0.3	53.1	52.1	74.0	20.9	21.9
5	9608.0	42.8	43.9	36.6	33.1	5.0	0.7	52.0	53.1	74.0	22.0	20.9
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
6	24020.0	43.9	44.2	39.1	31.6	8.1	0.0	50.0	50.3	74.0	24.0	23.7

AV DETECT (RBW: 1MHz, VBW: 10Hz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]						[dBuV/m]			[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	2039.7	31.6	30.8	31.3	33.0	2.1	0.0	32.0	31.2	54.0	22.0	22.8
2	2390.0	30.9	31.2	30.6	32.8	2.2	0.0	30.9	31.2	54.0	23.1	22.8
3	4804.0	35.8	35.9	35.7	31.6	3.5	0.4	43.8	43.9	54.0	10.2	10.1
4	7206.0	30.2	30.1	37.5	32.1	4.3	0.3	40.2	40.1	54.0	13.8	13.9
5	9608.0	31.2	30.9	36.6	33.1	5.0	0.7	40.4	40.1	54.0	13.6	13.9
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
6	24020.0	32.6	33.1	39.1	31.6	8.1	0.0	38.7	39.2	54.0	15.3	14.8

* Reference data

20dBc(Fundamental 2402MHz) (RBW: 100kHz, VBW: 300kHz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit 20dBc [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]						[dBuV/m]			[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	2402.0	93.0	89.5	30.6	32.8	2.2	0.0	93.0	89.5	-	-	-
2	2400.0	43.8	42.8	30.6	32.8	2.2	0.0	43.8	42.8	Funda-20dB	29.2	26.7

Test Distance 1.0m : Distance Factor(Dfac) = 20log(3/1.0) = 9.5dB

*Except for the above table : All other spurious emissions were less than 20dB for the limit.

*In the frequency over the fifth harmonic, the noise from the EUT was not seen.The data above is its base noise.

*The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.

*Hi-Pass Fiter was not used for factor 0.0dB of the above table.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

Radiated Spurious Emission

DATA OF SPURIOUS EMISSIONS(1GHz to 26GHz)

UL Apex Co., Ltd.
Head Office EMC Lab. No.3Semi Anechoic Chamber

Company	: Sharp Corporation	REPORT NO	: 26KE0014-HO
Equipment	: WCDMA & Tri-band (900/1800/1900) GSM Dual mode Mobile Phone / Bluetooth enable	REGULATION	: Fcc Part15 Subpart C 15.247(d)
Model	: 811SH	TEST DISTANCE	: 3/1m
Sample No.	: 004401/11/034056/2	DATE	: 08/04/2006
Power	: DC4.0V (AC 120 V / 60 Hz)	TEMPERATURE	: 23deg.C
Mode	: Bluetooth Hopping Off Tx 2441MHz	HUMIDITY	: 61%
Remarks	: Hor X , Ver Y-axis	ENGINEER	: Yasuyuki Fukui

PK DETECT (RBW: 1MHz, VBW: 1MHz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]						[dBuV/m]			[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	2033.9	42.0	40.8	31.3	33.0	2.1	0.0	42.4	41.2	74.0	31.6	32.8
2	4882.0	41.2	41.9	36.2	31.6	3.5	0.4	49.7	50.4	74.0	24.3	23.6
3	7323.0	41.9	42.8	37.9	32.2	4.3	0.5	52.4	53.3	74.0	21.6	20.7
4	9764.0	42.8	43.7	36.6	33.2	5.0	0.7	51.9	52.8	74.0	22.1	21.2
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
5	24410.0	44.2	43.9	39.1	31.1	8.2	0.0	50.9	50.6	74.0	23.1	23.4

AV DETECT (RBW: 1MHz, VBW: 10Hz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]						[dBuV/m]			[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	2033.9	31.0	30.9	31.3	33.0	2.1	0.0	31.4	31.3	54.0	22.6	22.7
2	4882.0	29.6	30.2	36.2	31.6	3.5	0.4	38.1	38.7	54.0	15.9	15.3
3	7323.0	30.8	30.5	37.9	32.2	4.3	0.5	41.3	41.0	54.0	12.7	13.0
4	9764.0	31.4	31.7	36.6	33.2	5.0	0.7	40.5	40.8	54.0	13.5	13.2
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
5	24410.0	32.9	32.1	39.1	31.1	8.2	0.0	39.6	38.8	54.0	14.4	15.2

* Reference data

20dBc(Fundamental 2441MHz) (RBW: 100kHz, VBW: 300kHz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit 20dBc [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]	[dBuV]					[dBuV/m]	[dBuV/m]		[dB]	[dB]
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	2441.0	90.1	87.4	30.5	32.7	2.2	0.0	90.1	87.4	-	-	-

Test Distance 1.0m : Distance Factor(Dfac) = 20log(3/1.0) = 9.5dB

*Except for the above table : All other spurious emissions were less than 20dB for the limit.

*In the frequency over the fifth harmonic, the noise from the EUT was not seen.The data above is its base noise.

*The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.

*Hi-Pass Filter was not used for factor 0.0dB of the above table.

Radiated Spurious Emission

DATA OF SPURIOUS EMISSIONS(1GHz to 26GHz)

UL Apex Co., Ltd.
Head Office EMC Lab. No.3Semi Anechoic Chamber

Company	: Sharp Corporation	REPORT NO	: 26KE0014-HO
Equipment	: WCDMA & Tri-band (900/1800/1900) GSM Dual mode Mobile Phone / Bluetooth enable	REGULATION	: Fcc Part15 Subpart C 15.247(d)
Model	: 811SH	TEST DISTANCE	: 3/1m
Sample No.	: 004401/11/034056/2	DATE	: 08/04/2006
Power	: DC4.0V (AC 120 V / 60 Hz)	TEMPERATURE	: 23deg.C
Mode	: Bluetooth Hopping Off Tx 2480MHz	HUMIDITY	: 61%
Remarks	: Hor X , Ver Y-axis	ENGINEER	: Yasuyuki Fukui

PK DETECT (RBW: 1MHz, VBW: 1MHz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]						[dBuV/m]			[dBuV/m]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	2041.3	42.7	41.7	31.3	33.0	2.1	0.0	43.1	42.1	74.0	30.9	31.9
2	2483.5	52.8	53.2	30.4	32.7	2.3	0.0	52.8	53.2	74.0	21.2	20.8
3	4960.0	45.2	44.1	36.6	31.6	3.5	0.4	54.1	53.0	74.0	19.9	21.0
4	7440.0	42.8	42.2	38.2	32.3	4.3	0.7	53.7	53.1	74.0	20.3	20.9
5	9920.0	43.9	43.1	36.5	33.2	5.1	0.7	53.0	52.2	74.0	21.0	21.8
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
6	24800.0	44.2	43.8	39.3	30.6	8.3	0.0	51.7	51.3	74.0	22.3	22.7

AV DETECT (RBW: 1MHz, VBW: 10Hz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]						[dBuV/m]			[dBuV/m]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	2041.3	30.9	31.8	31.3	33.0	2.1	0.0	31.3	32.2	54.0	22.7	21.8
2	2483.5	46.1	45.8	30.4	32.7	2.3	0.0	46.1	45.8	54.0	7.9	8.2
3	4960.0	30.7	32.3	36.6	31.6	3.5	0.4	39.6	41.2	54.0	14.4	12.8
4	7440.0	30.7	30.2	38.2	32.3	4.3	0.7	41.6	41.1	54.0	12.4	12.9
5	9920.0	30.2	29.6	36.5	33.2	5.1	0.7	39.3	38.7	54.0	14.7	15.3
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
6	24800.0	32.1	31.8	39.3	30.6	8.3	0.0	39.6	39.3	54.0	14.4	14.7

* Reference data

20dBc(Fundamental 2480MHz) (RBW: 100kHz, VBW: 300kHz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit 20dBc [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]						[dBuV/m]			[dB]	[dB]
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	2480.0	88.2	85.4	30.4	32.7	2.3	0.0	88.2	85.4	-	-	-

Test Distance 1.0m : Distance Factor(Dfac) = 20log(3/1.0) = 9.5dB

*Except for the above table : All other spurious emissions were less than 20dB for the limit.

*In the frequency over the fifth harmonic, the noise from the EUT was not seen. The data above is its base noise.

*The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.

*Hi-Pass Filter was not used for factor 0.0dB of the above table.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

Radiated Spurious Emission

DATA OF SPURIOUS EMISSIONS(1GHz to 26GHz)

UL Apex Co., Ltd.
Head Office EMC Lab. No.3Semi Anechoic Chamber

Company	: Sharp Corporation	REPORT NO	: 26KE0014-HO
Equipment	: WCDMA & Tri-band (900/1800/1900) GSM Dual mode Mobile Phone / Bluetooth enable	REGULATION	: Fcc Part15 Subpart C 15.247(d)
Model	: 811SH	TEST DISTANCE	: 3/1m
Sample No.	: 004401/11/034056/2	DATE	: 08/04/2006
Power	: DC4.0V (AC 120 V / 60 Hz)	TEMPERATURE	: 23deg.C
Mode	: Bluetooth Hopping Off Rx 2441MHz	HUMIDITY	: 61%
Remarks	: Hor X , Ver Y-axis	ENGINEER	: Yasuyuki Fukui

PK DETECT (RBW: 1MHz, VBW: 1MHz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]						[dBuV/m]			[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	2012.5	41.8	41.3	31.3	33.0	2.1	0.0	42.2	41.7	74.0	31.8	32.3
2	7121.5	42.3	43.1	37.0	32.0	4.2	0.0	51.5	52.3	74.0	22.5	21.7

AV DETECT (RBW: 1MHz, VBW: 10Hz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]						[dBuV/m]			[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	2012.5	30.1	31.1	31.3	33.0	2.1	0.0	30.5	31.5	54.0	23.5	22.5
2	7121.5	30.5	30.9	37.0	32.0	4.2	0.0	39.7	40.1	54.0	14.3	13.9

* Reference data

Test Distance 1.0m : Distance Factor(Dfac) = $20\log(3/1.0) = 9.5\text{dB}$

*Except for the above table : All other spurious emissions were less than 20dB for the limit.


*In the frequency over the fifth harmonic, the noise from the EUT was not seen.The data above is its base noise.

*The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.

*Hi-Pass Filter was not used for factor 0.0dB of the above table.


Conducted Spurious Emission

Ch:Low

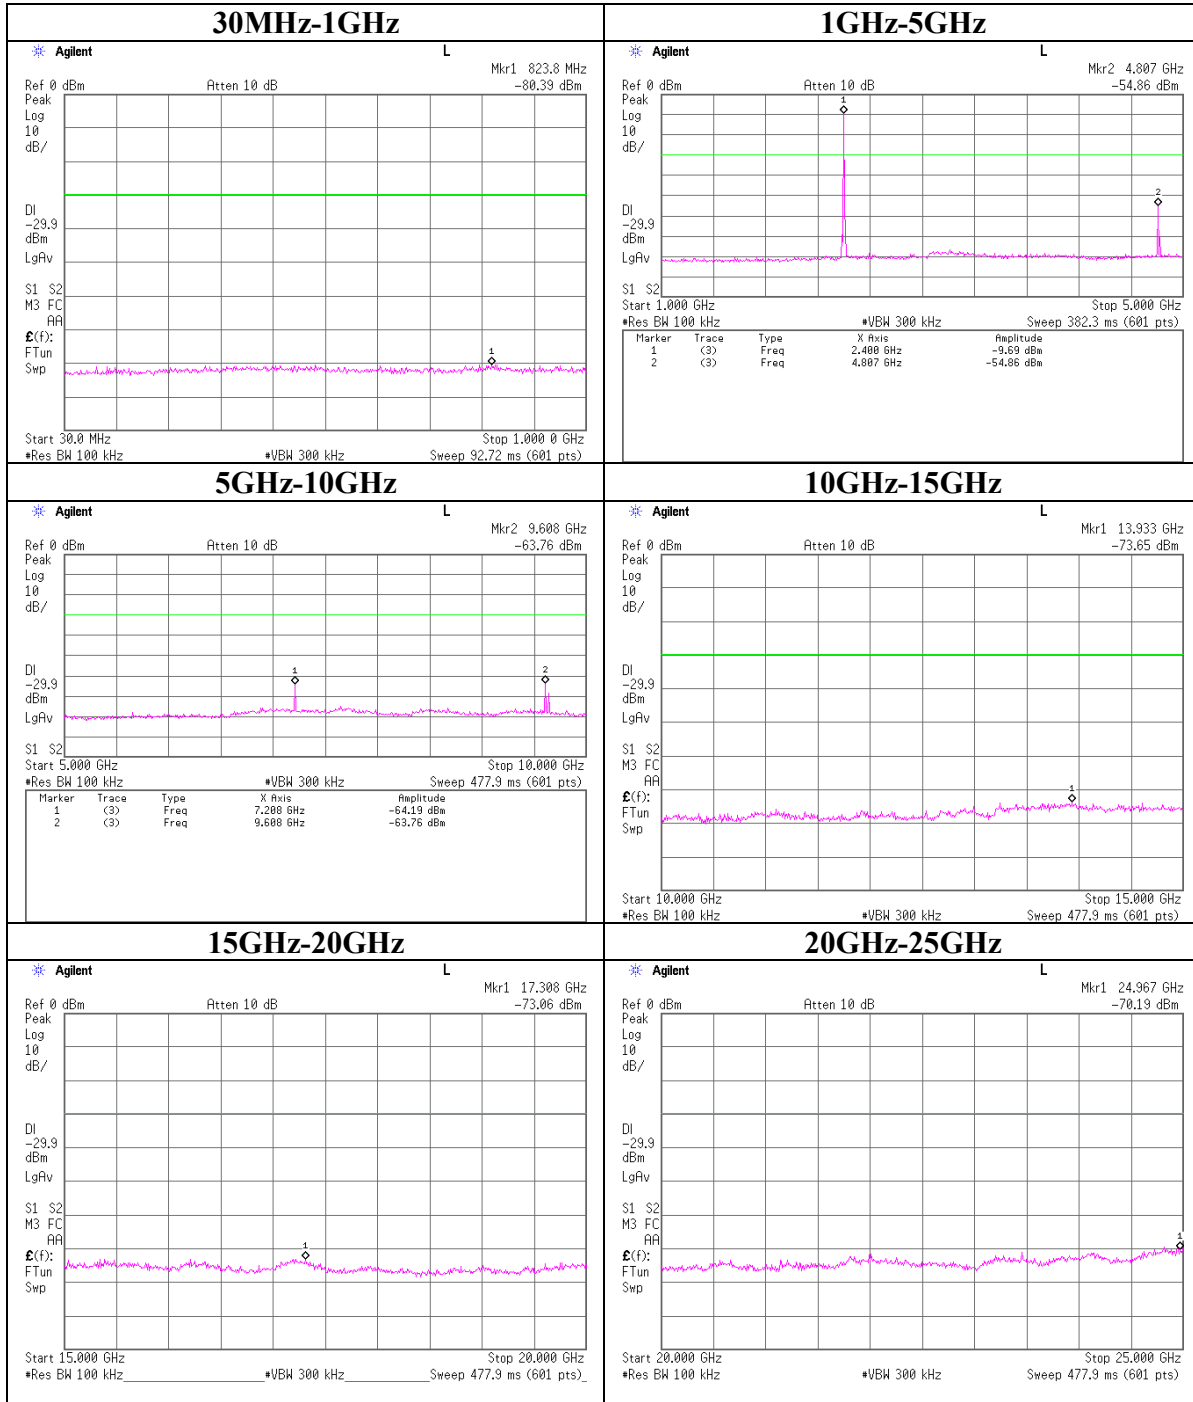


Conducted Spurious Emission

Ch:Mid

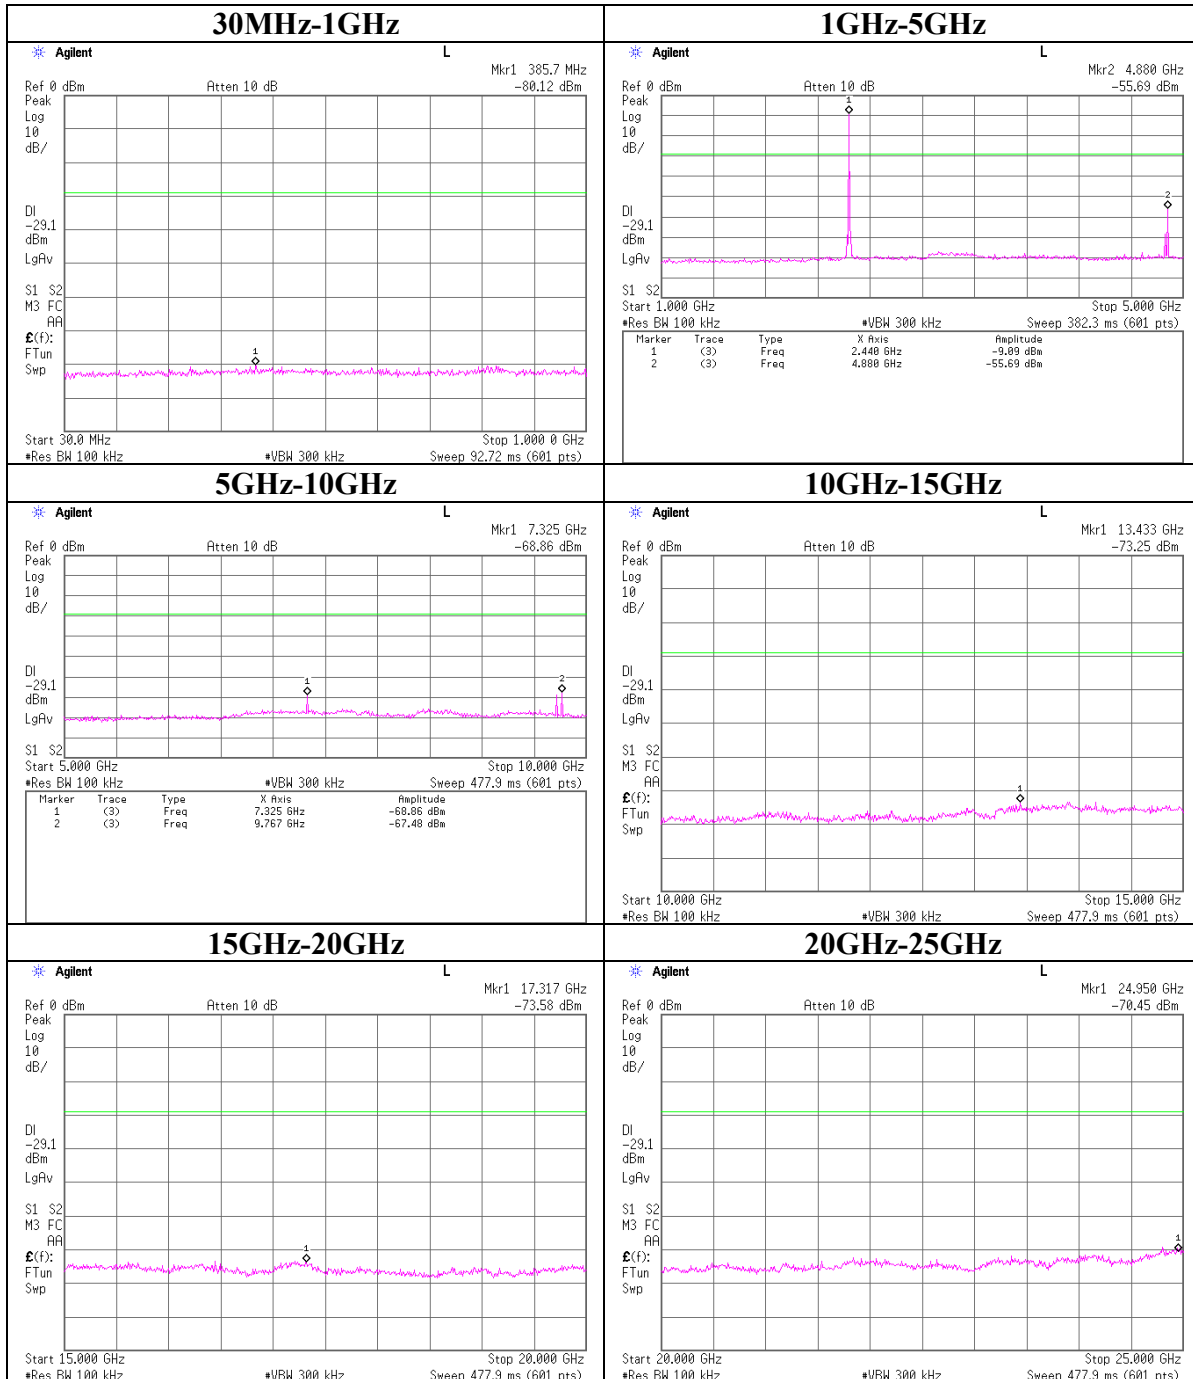


Conducted Spurious Emission
Ch:High

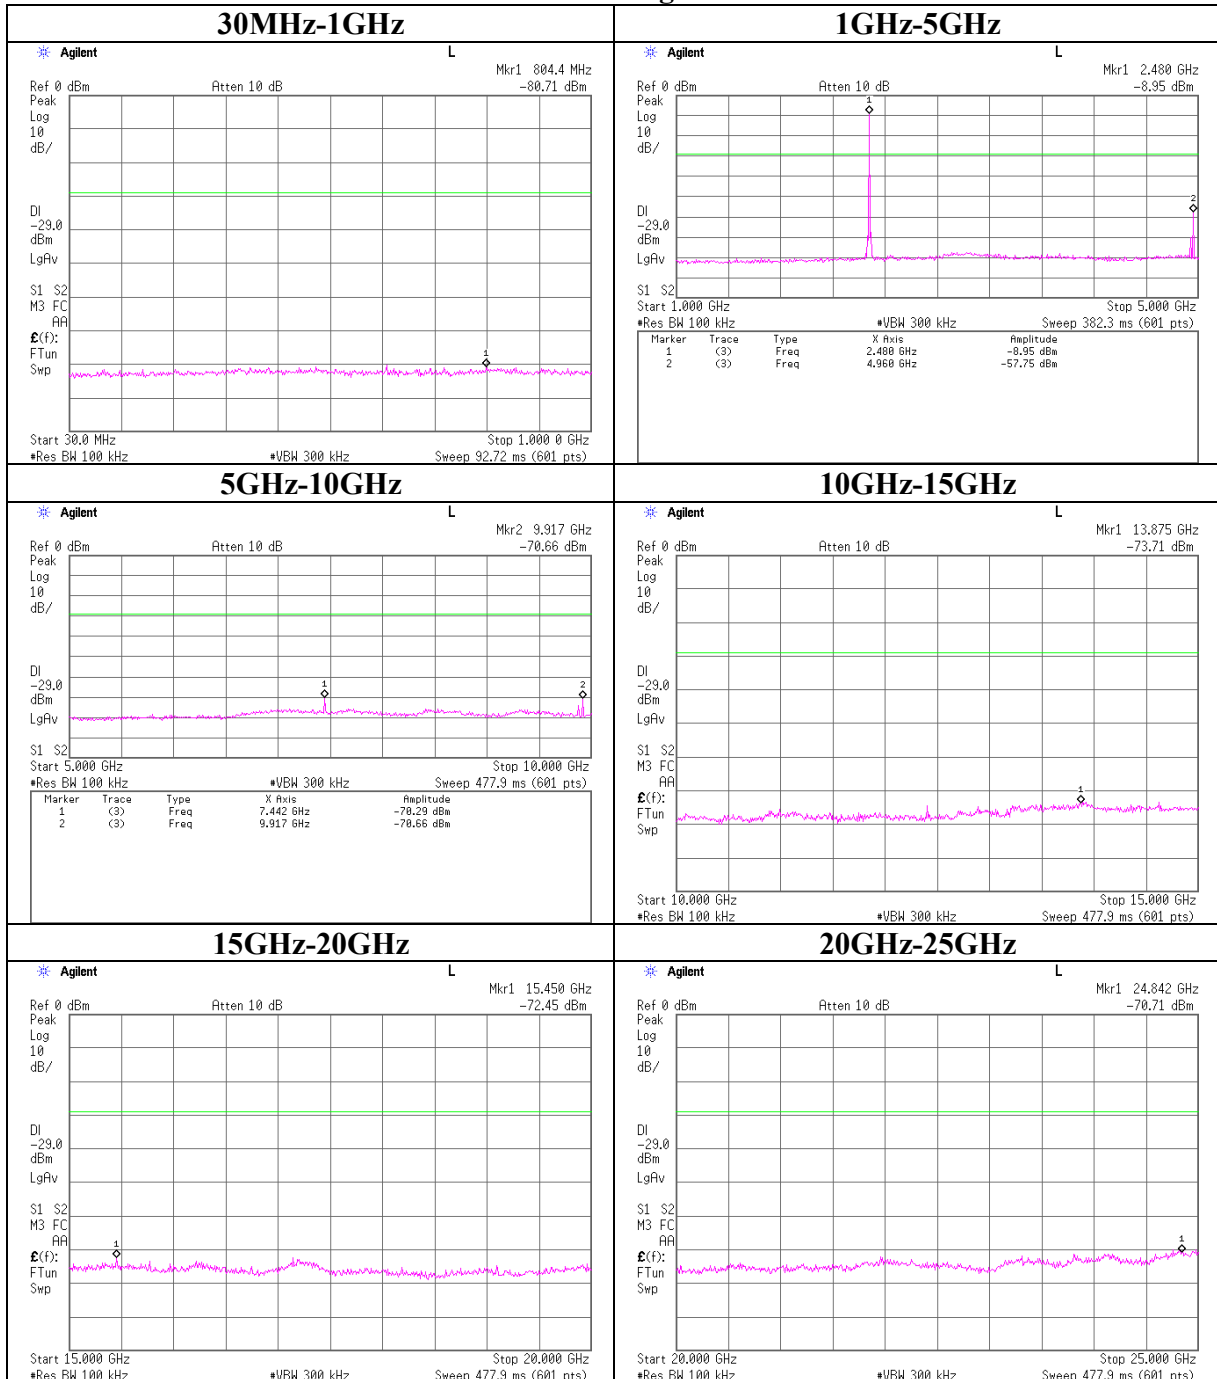


Conducted Spurious Emission

Band Edge compliance

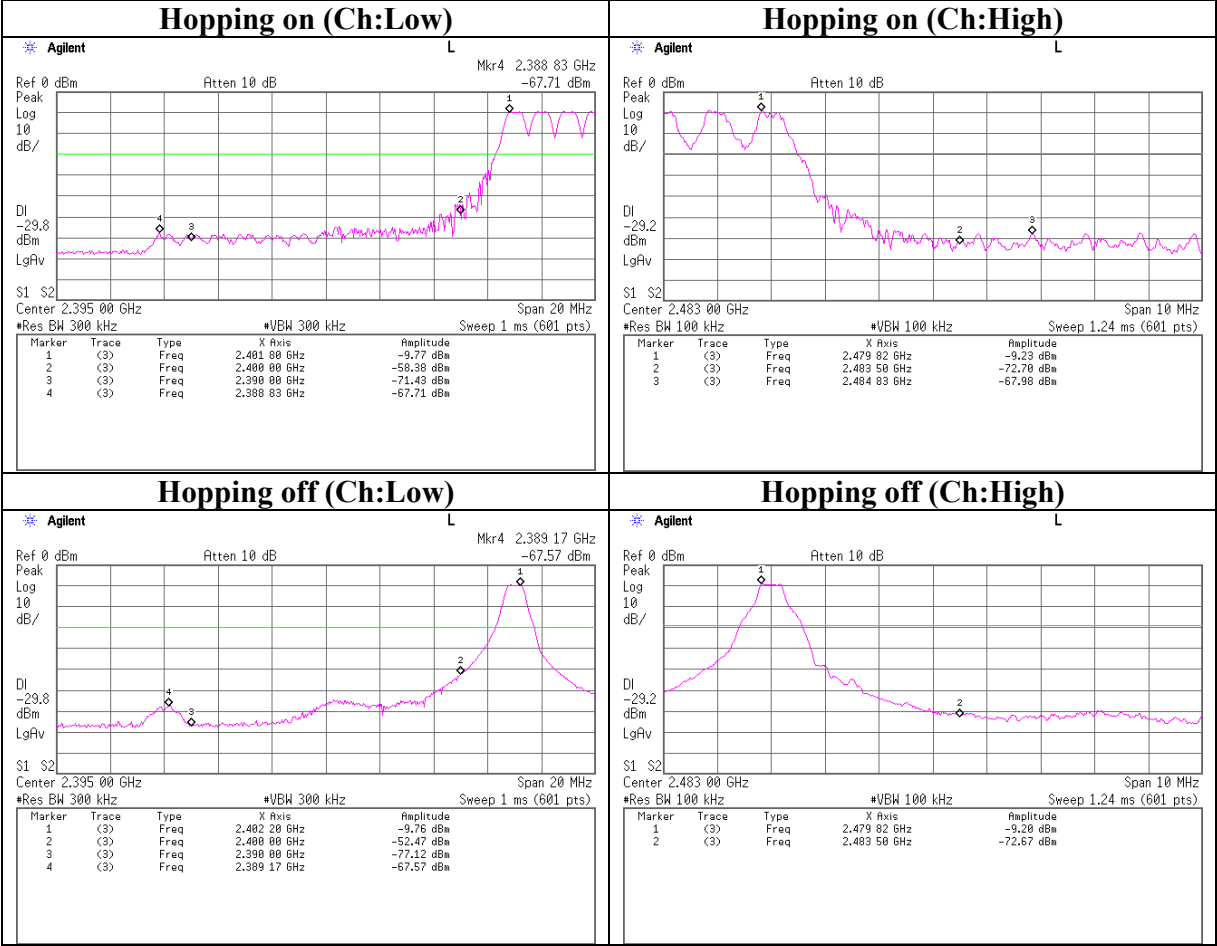

99% Occupied Bandwidth

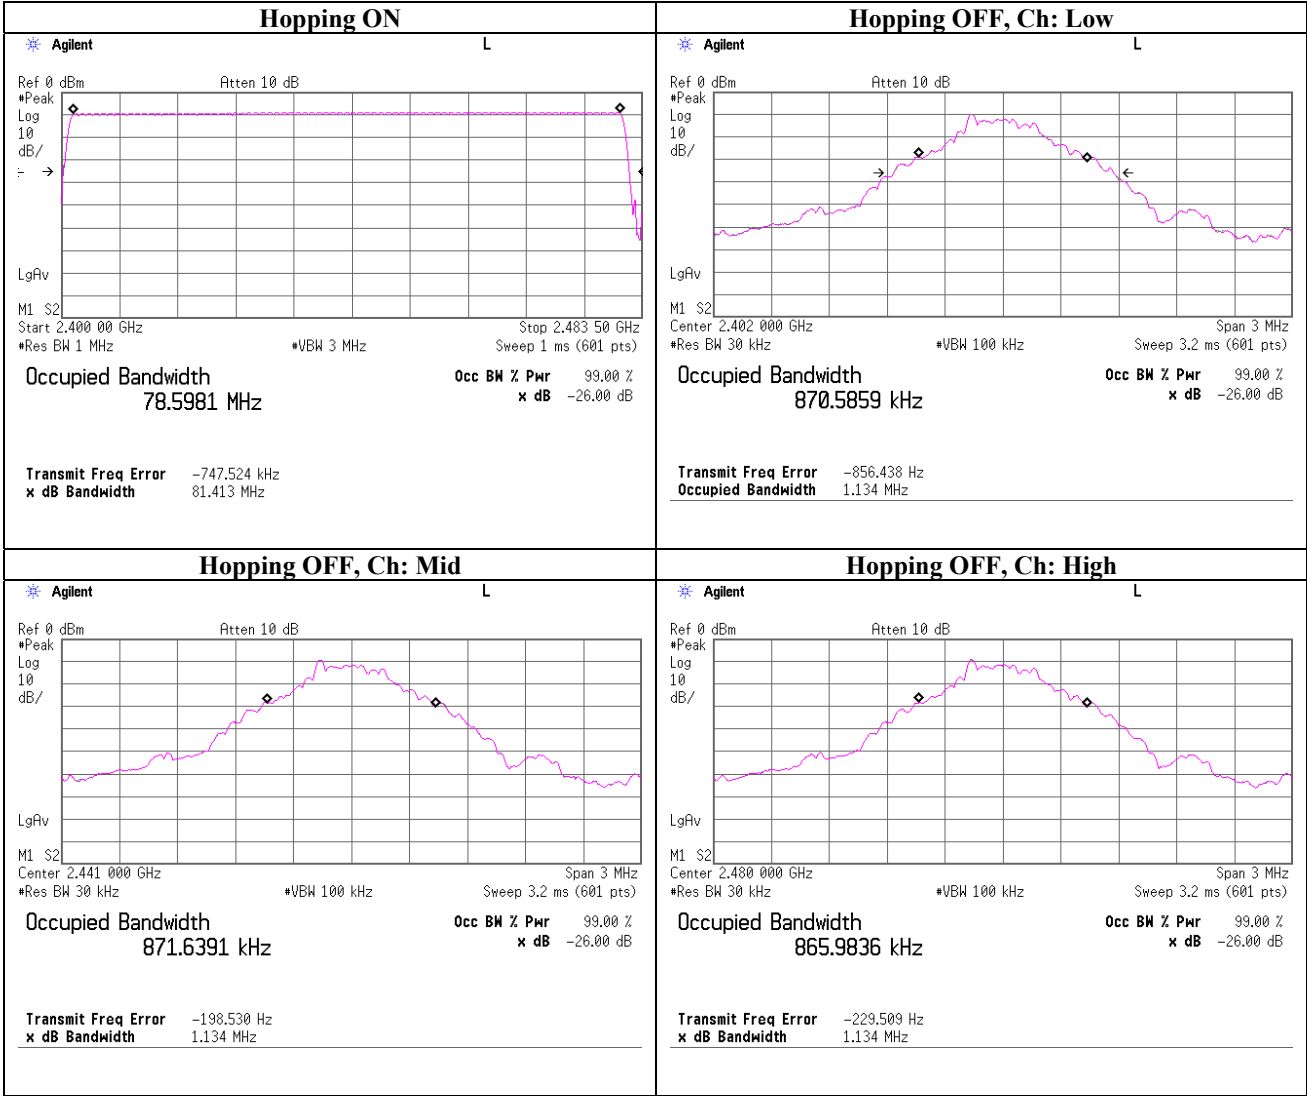

APPENDIX 3:Test instruments

EMI test equipment

Control No.	Instrument	Manufacturer	Model No	Test Item	Calibration Date * Interval(month)
MSA-03	Spectrum Analyzer	Agilent	E4448A	AT	2005/09/16 * 12
MCC-25	Microwave Cable 1G-26.5GHz	Suhner	SUCOFLEX104	AT	2005/08/30 * 12
MAT-23	Attenuator(10dB) (above1GHz)	Orient Microwave	BX10-0476-00	AT	2006/03/18 * 12
MOS-16	Thermo-Hygrometer	Custom	CTH-180	AT	2006/01/19 * 24
MHA-05	Horn Antenna	Schwarzbeck	BBHA9120D	RE	2006/01/09 * 12
MPA-11	MicroWave System Amplifier	Agilent	83017A	RE	2006/03/27 * 12
MCC-56	Microwave Cable	Suhner	SUCOFLEX104	Above 1GHz RE	2006/04/15 * 12
MSA-06	Spectrum Analyzer	Agilent	E4407B	RE	2006/05/24 * 12
MAT-30	Attenuator(6dB)	TME	UFA-01	RE	2006/03/11 * 12
MLA-03	Logperiodic Antenna	Schwarzbeck	USLP9143	RE	2006/01/29 * 12
MBA-03	Biconical Antenna	Schwarzbeck	BBA9106	RE	2006/01/29 * 12
MCC-51	Coaxial cable	UL Apex	-	RE	2006/03/11 * 12
MPA-13	Pre Amplifier	SONOA INSTRUMENT	310	RE	2006/03/25 * 12
MOS-13	Thermo-Hygrometer	Custom	CTH-180	RE/CE	2006/01/19 * 24
MRENT-39	Spectrum Analyzer	Advantest	R3273	RE	2006/07/25 * 12
MLS-07	LISN(AMN)	Schwarzbeck	NSLK8127	CE (EUT)	2006/02/06 * 12
MHA-06	Horn Antenna	Schwarzbeck	BBHA9120D	RE	2006/01/09 * 12
MHA-02	Horn Antenna	EMCO	3160-09	RE (MW)	2006/01/09 * 12
MHF-07	High Pass Filter	Tokimec	TF323DCA	RE	2006/05/20 * 12
MRENT-34	Power sensor	Anritsu	MA2411B	Power Measuremenrt	2006/04/25 * 12
MRENT-35	Power Meter	Anritsu	ML2496A	Power Measuremenrt	2006/04/25 * 12
MAEC-03	Anechoic Chamber	TDK	Semi Anechoic Chamber 3m	RE / CE	2006/03/03 * 12
MSTW-14	EMI measurement program	TSJ	TEPTO-DV	RE/CE	-

All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

Test Item:

CE: AC Main Conducted Emission

AT: Antenna Terminal Conducted Spurious Emission, Maximum Peak Output Power

Carrier Frequency Separation, 20dB Bandwidth, Number of Hopping Frequency, Dwell time

RE: Radiated Spurious Emission

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)