



TEST REPORT

No. I21N04067-RF-LTE

for

HMD Global Oy

Smart Phone

Model Name: TA-1446

FCC ID: 2AJOTTA-1446

with

Hardware Version: V01

Software Version: 00WW_0_031

Issued Date: 2022-03-22

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

SAICT, Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000.

Tel:+86(0)755-33322000, Fax:+86(0)755-33322001

Email: yewu@saict.ac.cn. www.saict.ac.cn



No. I21N04067-RF-LTE

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I21N04067-RF-LTE	Rev.0	1st edition	2022-03-22

CONTENTS

1. SUMMARY OF TEST REPORT	4
1.1. TEST ITEMS.....	4
1.2. TEST STANDARDS	4
1.3. TEST RESULT	4
1.4. TESTING LOCATION	4
1.5. PROJECT DATA	4
1.6. SIGNATURE.....	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT.....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. GENERAL DESCRIPTION	6
4. REFERENCE DOCUMENTS.....	7
5. LABORATORY ENVIRONMENT.....	8
6. SUMMARY OF TEST RESULTS.....	9
7. STATEMENT.....	12
8. TEST EQUIPMENTS UTILIZED.....	13
ANNEX A: MEASUREMENT RESULTS	14
A.1 OUTPUT POWER.....	14
A.2 FIELD STRENGTH OF SPURIOUS RADIATION.....	39
A.3 FREQUENCY STABILITY	53
A.4 OCCUPIED BANDWIDTH.....	57
A.5 EMISSION BANDWIDTH	84
A.6 BAND EDGE COMPLIANCE.....	111
A.7 CONDUCTED SPURIOUS EMISSION	126
A.8 PEAK-TO-AVERAGE POWER RATIO.....	131

1. SUMMARY OF TEST REPORT

1.1. Test Items

Description	Smart Phone
Model Name	TA-1446
Applicant's name	HMD Global Oy
Manufacturer's Name	HMD Global Oy

1.2. Test Standards

FCC Part 2/22/24/27	10-1-19 Edition
ANSI C63.26	2015
KDB971168 D01	v03r01

1.3. Test Result

All test items are passed. Please refer to "6 Summary of Test Results" for detail.

1.4. Testing Location


Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000

1.5. Project Data


Testing Start Date: 2022-02-14

Testing End Date: 2022-03-21


1.6. Signature



Tan Pei
(Prepared this test report)



Huang Qiuqin
(Reviewed this test report)



Zhang Hao
(Approved this test report)



2. CLIENT INFORMATION

2.1. Applicant Information

Company Name: HMD Global Oy
Address /Post: Bertel Jungin aukio 9, 02600 Espoo, Finland
Contact Person: Reza Serafat
Contact Email: reza.serafat@hmdglobal.com
Telephone: +393 31 6272922
Fax: /

2.2. Manufacturer Information

Company Name: HMD Global Oy
Address /Post: Bertel Jungin aukio 9, 02600 Espoo, Finland
Contact Person: Reza Serafat
Contact Email: reza.serafat@hmdglobal.com
Telephone: +393 31 6272922
Fax: /

3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT

(AE)

3.1. About EUT

Description	Smart Phone
Model Name	TA-1446
FCC ID	2AJOTTA-1446
Frequency Bands	LTE Bands 2,4,5,7,12,13,17,66
Antenna	Integrated
Extreme vol. Limits	3.60V to 4.35V (nominal: 3.80V)
Condition of EUT as received	No abnormality in appearance

Note1: Components list, please refer to documents of the manufacturer; it is also included in the original test record of SAICT.

Note2: The Declaration of changes from Initial TA-1471 to Variant TA-1446 is as below:

TA-1446 is single SIM, TA-1471 is dual SIM.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version	Sample Arrival Date
UT03aa	353906800005507	V01	00WW_0_031	2022-02-14
UT04aa	353906800005721	V01	00WW_0_031	2022-02-14

*EUT ID: is used to identify the test sample in the lab internally.

UT03aa is used for conduction test, UT04aa is used for radiation test.

3.3. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE2	RF Cable

AE1	
Model	GH5781
Manufacturer	Shenzhen Aerospace Electronic Co.,Ltd
Capacitance	2400 mAh
Nominal Voltage	3.80 V

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) is a model Smart Phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.



4. REFERENCE DOCUMENTS

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-19 Edition
FCC Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS	10-1-19 Edition
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-19 Edition
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-19 Edition
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB971168 D01	Power Meas License Digital Systems	v03r01

5. LABORATORY ENVIRONMENT

Shielded room did not exceed following limits along the RF testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz>60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	>2 M Ω
Ground system resistance	< 4 Ω

Fully-anechoic chamber did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2M Ω
Ground system resistance	< 4 Ω
Voltage Standing Wave Ratio (VSWR)	$\leq$ 6 dB, from 1 to 18 GHz, 3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	F	Fail
	NA	Not applicable
	NM	Not measured
Location Column	A/B/C/D	The test is performed in test location A, B, C or D which are described in section 1.4 of this report

NOTE: As the frequency band range of LTE Band 12(699-716MHz) overlaps the range of LTE Band 17(704-716MHz), LTE Band 66(1710-1780MHz) overlaps the range of LTE Band 4(1710-1755MHz), The channel bandwidth and other perating parameters for LTE Band 17 are fully supported by LTE Band 12, the channel bandwidth and other perating parameters for LTE Band 4 are fully supported by LTE Band 66, the miximum output power of LTE Band 12 is larger than the LTE Band 17, the miximum output power of LTE Band 66 is larger than the LTE Band 4, we just need to test all the cases of LTE Band 12, LTE Band 66.

LTE Band 2

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/24.232	A.1	P
2	Field Strength of Spurious Radiation	2.1053/24.238	A.2	P
3	Frequency Stability	2.1055/24.235	A.3	P
4	Occupied Bandwidth	2.1049/24.238	A.4	P
5	Emission Bandwidth	2.1049/24.238	A.5	P
6	Band Edge Compliance	2.1051/24.238	A.6	P
7	Conducted Spurious Emission	2.1051/24.238	A.7	P
8	Peak-to-Average Power Ratio	24.232/ KDB971168 D01	A.8	P

**LTE Band 5**

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/22.913	A.1	P
2	Field Strength of Spurious Radiation	2.1053/22.917	A.2	P
3	Frequency Stability	2.1055/22.355	A.3	P
4	Occupied Bandwidth	2.1049/22.917	A.4	P
5	Emission Bandwidth	2.1049/22.917	A.5	P
6	Band Edge Compliance	2.1051/22.917	A.6	P
7	Conducted Spurious Emission	2.1051/22.917	A.7	P
8	Peak-to-Average Power Ratio	KDB971168 D01	A.8	P

LTE Band 7

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/27.50(h)	A.1	P
2	Field Strength of Spurious Radiation	2.1053/27.53(m)	A.2	P
3	Frequency Stability	2.1055/27.54	A.3	P
4	Occupied Bandwidth	2.1049/27.53(m)	A.4	P
5	Emission Bandwidth	2.1049/27.53(m)	A.5	P
6	Band Edge Compliance	2.1051/27.53(m)	A.6	P
7	Conducted Spurious Emission	2.1051/27.53(m)	A.7	P
8	Peak-to-Average Power Ratio	27.50(a)/ KDB971168 D01	A.8	P

LTE Band 12

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/27.50(c)	A.1	P
2	Field Strength of Spurious Radiation	2.1053/27.53(g)	A.2	P
3	Frequency Stability	2.1055/27.54	A.3	P
4	Occupied Bandwidth	2.1049/27.53(g)	A.4	P
5	Emission Bandwidth	2.1049/27.53(g)	A.5	P
6	Band Edge Compliance	2.1051/27.53(g)	A.6	P
7	Conducted Spurious Emission	2.1051/27.53(g)	A.7	P
8	Peak-to-Average Power Ratio	27.50(a)/ KDB971168 D01	A.8	P

LTE Band 13

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/27.50(b)	A.1	P
2	Field Strength of Spurious Radiation	2.1053/27.53(c)	A.2	P
3	Frequency Stability	2.1055/27.54	A.3	P
4	Occupied Bandwidth	2.1049/27.53(c)	A.4	P
5	Emission Bandwidth	2.1049/27.53(c)	A.5	P
6	Band Edge Compliance	2.1051/27.53(c)	A.6	P
7	Conducted Spurious Emission	2.1051/27.53(c)	A.7	P
8	Peak-to-Average Power Ratio	27.50(a)/ KDB971168 D01	A.8	P

LTE Band 66

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/27.50(d)	A.1	P
2	Field Strength of Spurious Radiation	2.1053/27.53(h)	A.2	P
3	Frequency Stability	2.1055/27.54	A.3	P
4	Occupied Bandwidth	2.1049/27.53(h)	A.4	P
5	Emission Bandwidth	2.1049/27.53(h)	A.5	P
6	Band Edge Compliance	2.1051/27.53(h)	A.6	P
7	Conducted Spurious Emission	2.1051/27.53(h)	A.7	P
8	Peak-to-Average Power Ratio	27.50(a)/ KDB971168 D01	A.8	P



7. STATEMENT

This report is the same as No.I21N04075-RF-LTE. All the original values are quoted directly. We did not perform any additional test case.

Since the information of samples in this report is provided by the client, the laboratory is not responsible for the authenticity of sample information.

This report takes measured values as criterion of test conclusion. The test conclusion meets the limit requirements.

8. TEST EQUIPMENTS UTILIZED

NO.	Description	TYPE	Manufacture	series number	CAL DUE DATE
1	Test Receiver	ESR7	R&S	101676	2022-11-24
2	BiLog Antenna	3142E	ETS-Lindgren	0224831	2024-05-27
3	Horn Antenna	3117	ETS-Lindgren	00066577	2022-04-02
4	Horn Antenna	QSH-SL-18 -26-S-20	Q-par	17013	2023-01-06
5	Antenna	BBHA 9120D	Schwarzbeck	1593	2022-12-05
6	Antenna	VUBA 9117	Schwarzbeck	207	2023-07-15
7	Antenna	QWH-SL-18 -40-K-SG	Q-par	15979	2023-01-06
8	preamplifier	83017A	Agilent	MY39501110	/
9	Signal Generator	SMB100A	R&S	179725	2022-11-24
10	Fully Anechoic Chamber	FACT3-2.0	ETS-Lindgren	1285	2023-05-29
11	Spectrum Analyzer	FSV40	R&S	101192	2023-01-13
12	Universal Radio Communication Tester	CMU200	R&S	114545	2023-01-13
13	Universal Radio Communication Tester	CMW500	R&S	152499	2022-07-15
14	Temperature Chamber	SH-241	ESPEC	92007516	2022-10-15
15	DC Power Supply	U3606A	Agilent Technologies	MY50450012	2022-11-13
16	Spectrum Analyzer	FSW26	R&S	102197	2022.11.24

Test software

Item	Name	Vesion
Radiated	EMC32	V10.50.40

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

Reference

FCC: CFR Part 2.1046, 22.913, 24.232, 27.50

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation.

This result contains peak output power and ERP/EIRP measurements for the EUT.

In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

A.1.2.2 Measurement result

LTE band 2

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	1909.3	22.28	21.38
		1880.0	22.29	21.47
		1850.7	22.36	21.62
	1 RB low	1909.3	22.28	21.42
		1880.0	22.30	21.52
		1850.7	22.35	21.64
	50% RB mid	1909.3	22.40	21.37
		1880.0	22.41	21.39
		1850.7	22.47	21.47
	100% RB	1909.3	21.35	20.39
		1880.0	21.36	20.44
		1850.7	21.48	20.49
3MHz	1 RB high	1908.5	22.51	21.52
		1880.0	22.35	21.66
		1851.5	22.38	21.61
	1 RB low	1908.5	22.31	21.46
		1880.0	22.34	21.69
		1851.5	22.43	21.61
	50% RB mid	1908.5	21.39	20.39
		1880.0	21.39	20.44
		1851.5	21.42	20.47

	100% RB	1908.5	21.39	20.32
		1880.0	21.36	20.36
		1851.5	21.42	20.40
5MHz	1 RB high	1907.5	22.62	21.45
		1880.0	22.23	21.54
		1852.5	22.26	21.50
	1 RB low	1907.5	22.24	21.42
		1880.0	22.26	21.56
		1852.5	22.33	21.53
	50% RB mid	1907.5	21.40	20.36
		1880.0	21.37	20.40
		1852.5	21.44	20.48
	100% RB	1907.5	21.39	20.30
		1880.0	21.39	20.31
		1852.5	21.39	20.36
10MHz	1 RB high	1905.0	22.77	21.40
		1880.0	22.33	21.54
		1855.0	22.37	21.63
	1 RB low	1905.0	22.31	21.44
		1880.0	22.36	21.64
		1855.0	22.44	21.67
	50% RB mid	1905.0	21.36	20.36
		1880.0	21.40	20.37
		1855.0	21.48	20.42
	100% RB	1905.0	21.47	20.43
		1880.0	21.46	20.34
		1855.0	21.41	20.35
15MHz	1 RB high	1902.5	22.67	21.43
		1880.0	22.21	21.29
		1857.5	22.29	21.50
	1 RB low	1902.5	22.59	21.35
		1880.0	22.38	21.45
		1857.5	22.38	21.59
	50% RB mid	1902.5	21.83	20.37
		1880.0	21.47	20.38
		1857.5	21.53	20.43
	100% RB	1902.5	21.58	20.39
		1880.0	21.65	20.29
		1857.5	21.56	20.35

20MHz	1 RB high	1900.0	22.54	21.75
		1880.0	22.49	21.54
		1860.0	22.56	21.62
	1 RB low	1900.0	22.44	21.53
		1880.0	22.64	21.57
		1860.0	22.62	21.80
	50% RB mid	1900.0	21.95	20.87
		1880.0	21.91	20.92
		1860.0	22.00	20.94
	100% RB	1900.0	21.93	20.91
		1880.0	21.91	20.87
		1860.0	21.93	20.91

Note: Expanded measurement uncertainty is $U = 0.49 \text{ dB}$, $k = 1.96$

LTE band 5

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	848.3	22.60	21.72
		836.5	22.39	21.61
		824.7	22.45	21.74
	1 RB low	848.3	22.41	21.74
		836.5	22.40	21.62
		824.7	22.47	21.72
	50% RB mid	848.3	22.51	21.57
		836.5	22.52	21.62
		824.7	22.59	21.71
	100% RB	848.3	21.52	20.56
		836.5	21.52	20.56
		824.7	21.64	20.72
3MHz	1 RB high	847.5	22.59	21.75
		836.5	22.50	21.80
		825.5	22.55	21.91
	1 RB low	847.5	22.51	21.78
		836.5	22.54	21.77
		825.5	22.52	21.91
	50% RB mid	847.5	21.59	20.64
		836.5	21.58	20.64
		825.5	21.66	20.64
	100% RB	847.5	21.54	20.52
		836.5	21.53	20.49
		825.5	21.52	20.52
5MHz	1 RB high	846.5	22.37	21.78
		836.5	22.39	21.72
		826.5	22.41	21.69
	1 RB low	846.5	22.43	21.71
		836.5	22.41	21.76
		826.5	22.43	21.69
	50% RB mid	846.5	21.64	20.60
		836.5	21.61	20.56
		826.5	21.63	20.62
	100% RB	846.5	21.57	20.58
		836.5	21.58	20.53
		826.5	21.59	20.54
10MHz	1 RB high	844.0	22.53	21.88



No. I21N04067-RF-LTE

		836.5	22.55	21.86
		829.0	22.56	21.91
	1 RB low	844.0	22.48	21.82
		836.5	22.49	21.79
		829.0	22.56	21.84
	50% RB mid	844.0	21.64	20.63
		836.5	21.64	20.62
		829.0	21.68	20.67
	100% RB	844.0	21.66	20.62
		836.5	21.60	20.56
		829.0	21.68	20.66

Note: Expanded measurement uncertainty is $U = 0.49\text{dB}$, $k = 1.96$

LTE band 7

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
5MHz	1 RB high	2567.5	21.18	20.52
		2535.0	21.23	20.63
		2502.5	21.15	20.46
	1 RB low	2567.5	21.18	20.49
		2535.0	21.22	20.60
		2502.5	21.13	20.45
	50% RB mid	2567.5	20.37	19.51
		2535.0	20.35	19.46
		2502.5	20.27	19.38
	100% RB	2567.5	20.30	19.40
		2535.0	20.36	19.42
		2502.5	20.27	19.35
10MHz	1 RB high	2565.0	21.32	20.65
		2535.0	21.28	20.56
		2505.0	21.31	20.45
	1 RB low	2565.0	21.26	20.60
		2535.0	21.25	20.47
		2505.0	21.18	20.35
	50% RB mid	2565.0	20.34	19.35
		2535.0	20.39	19.38
		2505.0	20.29	19.38
	100% RB	2565.0	20.33	19.40
		2535.0	20.37	19.41
		2505.0	20.33	19.38
15MHz	1 RB high	2562.5	21.30	20.55
		2535.0	21.30	20.63
		2507.5	21.28	20.60
	1 RB low	2562.5	21.19	20.52
		2535.0	21.18	20.51
		2507.5	21.17	20.46
	50% RB mid	2562.5	20.30	19.47
		2535.0	20.34	19.48
		2507.5	20.24	19.38
	100% RB	2562.5	20.33	19.40
		2535.0	20.38	19.46
		2507.5	20.34	19.37

20MHz	1 RB high	2560.0	21.09	20.41
		2535.0	21.09	20.46
		2510.0	21.15	20.49
	1 RB low	2560.0	20.97	20.39
		2535.0	20.91	20.30
		2510.0	20.94	20.36
	50% RB mid	2560.0	20.33	19.41
		2535.0	20.37	19.42
		2510.0	20.28	19.33
	100% RB	2560.0	20.27	19.27
		2535.0	20.31	19.41
		2510.0	20.23	19.28

Note: Expanded measurement uncertainty is $U = 0.49$ dB, $k = 1.96$

LTE band 12

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	715.3	22.89	21.79
		707.5	22.54	21.87
		699.7	22.53	21.79
	1 RB low	715.3	22.50	21.79
		707.5	22.53	21.74
		699.7	22.52	21.76
	50% RB mid	715.3	22.67	21.66
		707.5	22.64	21.61
		699.7	22.64	21.70
	100% RB	715.3	21.68	20.66
		707.5	21.65	20.72
		699.7	21.57	20.74
3MHz	1 RB high	714.5	22.80	21.76
		707.5	22.62	21.87
		700.5	22.56	21.90
	1 RB low	714.5	22.58	21.82
		707.5	22.56	21.82
		700.5	22.57	21.74
	50% RB mid	714.5	21.68	20.68
		707.5	21.63	20.68
		700.5	21.61	20.73
	100% RB	714.5	21.61	20.60
		707.5	21.57	20.71
		700.5	21.55	20.66
5MHz	1 RB high	713.5	22.53	21.75
		707.5	22.52	21.81
		701.5	22.54	21.80
	1 RB low	713.5	22.52	21.71
		707.5	22.48	21.76
		701.5	22.45	21.72
	50% RB mid	713.5	21.71	20.64
		707.5	21.62	20.62
		701.5	21.68	20.73
	100% RB	713.5	21.61	20.61
		707.5	21.60	20.51
		701.5	21.62	20.66

10MHz	1 RB high	711.0	22.68	21.88
		707.5	22.67	21.98
		704.0	22.66	21.98
	1 RB low	711.0	22.53	21.77
		707.5	22.53	21.82
		704.0	22.54	21.81
	50% RB mid	711.0	21.69	20.67
		707.5	21.70	20.62
		704.0	21.65	20.73
	100% RB	711.0	21.74	20.72
		707.5	21.66	20.61
		704.0	21.63	20.64

Note: Expanded measurement uncertainty is $U = 0.49$ dB, $k = 1.96$

LTE band 13

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
5MHz	1 RB high	784.5	22.47	21.75
		782.0	22.51	21.68
		779.5	22.55	21.84
	1 RB low	784.5	22.53	21.70
		782.0	22.51	21.72
		779.5	22.53	21.82
	50% RB mid	784.5	21.66	20.64
		782.0	21.70	20.72
		779.5	21.71	20.67
	100% RB	784.5	21.65	20.59
		782.0	21.69	20.63
		779.5	21.67	20.58
10MHz	1 RB high	782.0	22.62	21.91
	1 RB low	782.0	22.70	22.01
	50% RB mid	782.0	21.73	20.71
	100% RB	782.0	21.79	20.74

Note: Expanded measurement uncertainty is U = 0.49 dB, k = 1.96

LTE band 66

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	1779.3	22.36	21.49
		1745.0	22.24	21.45
		1710.7	22.23	21.48
	1 RB low	1779.3	22.33	21.47
		1745.0	22.25	21.49
		1710.7	22.24	21.44
	50% RB mid	1779.3	22.50	21.41
		1745.0	22.37	21.39
		1710.7	22.30	21.35
	100% RB	1779.3	21.43	20.47
		1745.0	21.30	20.36
		1710.7	21.29	20.31
3MHz	1 RB high	1778.5	22.36	21.64
		1745.0	22.23	21.55
		1711.5	22.28	21.50
	1 RB low	1778.5	22.40	21.64
		1745.0	22.28	21.55
		1711.5	22.28	21.52
	50% RB mid	1778.5	21.46	20.42
		1745.0	21.33	20.30
		1711.5	21.32	20.35
	100% RB	1778.5	21.43	20.35
		1745.0	21.28	20.28
		1711.5	21.31	20.28
5MHz	1 RB high	1777.5	22.27	21.36
		1745.0	22.12	21.35
		1712.5	22.15	21.32
	1 RB low	1777.5	22.25	21.38
		1745.0	22.16	21.41
		1712.5	22.13	21.37
	50% RB mid	1777.5	21.45	20.45
		1745.0	21.34	20.31
		1712.5	21.32	20.30
	100% RB	1777.5	21.43	20.40
		1745.0	21.30	20.28
		1712.5	21.30	20.22
10MHz	1 RB high	1775.0	22.37	21.58

		1745.0	22.23	21.45
		1715.0	22.24	21.42
		1775.0	22.35	21.52
	1 RB low	1745.0	22.34	21.49
		1715.0	22.27	21.46
		1775.0	21.44	20.38
	50% RB mid	1745.0	21.36	20.33
		1715.0	21.34	20.30
		1775.0	21.44	20.38
	100% RB	1745.0	21.37	20.33
		1715.0	21.37	20.30
15MHz	1 RB high	1772.5	22.23	21.55
		1745.0	22.11	21.40
		1717.5	22.13	21.45
	1 RB low	1772.5	22.27	21.57
		1745.0	22.20	21.49
		1717.5	22.18	21.48
	50% RB mid	1772.5	21.38	20.38
		1745.0	21.30	20.32
		1717.5	21.27	20.27
	100% RB	1772.5	21.42	20.34
		1745.0	21.36	20.29
		1717.5	21.26	20.22
20MHz	1 RB high	1770.0	22.11	21.32
		1745.0	21.96	21.18
		1720.0	21.97	21.18
	1 RB low	1770.0	22.11	21.32
		1745.0	22.03	21.30
		1720.0	22.07	21.29
	50% RB mid	1770.0	21.35	20.36
		1745.0	21.28	20.28
		1720.0	21.26	20.21
	100% RB	1770.0	21.33	20.28
		1745.0	21.26	20.25
		1720.0	21.21	20.20

Note: Expanded measurement uncertainty is $U = 0.49\text{dB}$, $k = 1.96$

A.1.3 Radiated

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 27.50(d) specifies "Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP".


Rule Part 27.50(h)(2) specifies "Mobile stations are limited to 2.0 watts EIRP".

Rule Part 27.50(c) specifies "Portable stations (hand-held de-vices) are limited to 3 watts ERP".


Rule Part 27.50(a)(3) specifies "For mobile and portable stations transmitting in the 2305–2315 MHz band or the 2350–2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth."

A.1.3.2 Method of Measurement

1. For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, EUT was placed on a 80 cm high non-conductive stand at a 3 meter test distance from the receive antenna. For radiated measurements performed at frequencies above 1 GHz, EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. Receiving antenna was placed on the antenna mast 3 meters from the EUT. For emission measurements. The receiving antenna shall be varied from 1 m to 4 m in height above the reference ground in a search for the relative positioning that produces the maximum radiated signal level. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

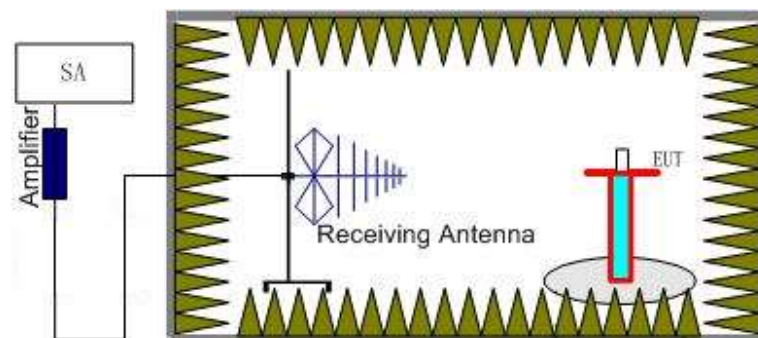

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

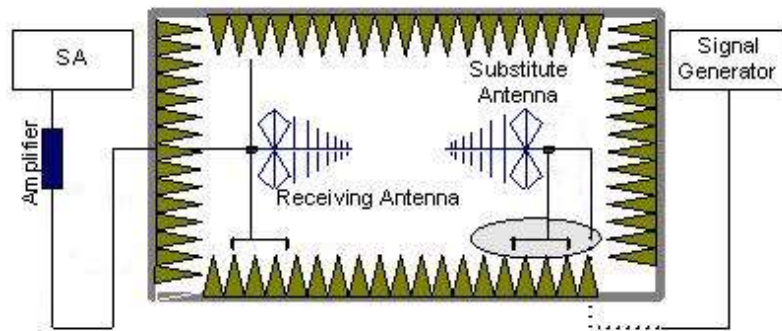

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna and adjusts the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna.

The cable loss (P_{cl}), the substitution Antenna Gain(dBi) (G_a) and the amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{Ag} - P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dB}$.

A.1.3.3 Measurement result

LTE Band 2- EIRP Part 24. 232(b)

Limits: $\leq 33\text{dBm}$ (2W)

LTE Band 2_1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1850.70	-16.32	-29.30	8.10	21.08	33.00	H
1880.00	-16.04	-29.40	8.10	21.46	33.00	H
1909.30	-15.48	-29.30	8.10	21.93	33.00	H

LTE Band 2_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1851.50	-16.38	-29.30	8.10	21.02	33.00	H
1880.00	-16.09	-29.40	8.10	21.41	33.00	H
1908.50	-15.57	-29.30	8.10	21.83	33.00	H

LTE Band 2_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1852.50	-16.46	-29.30	8.10	20.94	33.00	H
1880.00	-16.13	-29.40	8.10	21.37	33.00	H
1907.50	-15.62	-29.30	8.10	21.78	33.00	H

LTE Band 2_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1855.00	-16.50	-29.30	8.10	20.90	33.00	H
1880.00	-16.19	-29.40	8.10	21.31	33.00	H
1905.00	-15.66	-29.30	8.10	21.74	33.00	H

LTE Band 2_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1857.50	-16.55	-29.30	8.10	20.85	33.00	H
1880.00	-16.24	-29.40	8.10	21.26	33.00	H
1902.50	-15.77	-29.30	8.10	21.63	33.00	H

LTE Band 2_20 MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1860.00	-16.56	-29.30	8.10	20.84	33.00	H
1880.00	-16.30	-29.40	8.10	21.20	33.00	H
1900.00	-15.73	-29.30	8.10	21.67	33.00	H

**LTE Band 2 1.4MHz 16QAM**

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1850.70	-16.37	-29.30	8.10	21.03	33.00	H
1880.00	-16.12	-29.40	8.10	21.38	33.00	H
1909.30	-15.38	-29.30	8.10	22.03	33.00	H

LTE Band 2 3MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1851.50	-16.45	-29.30	8.10	20.96	33.00	H
1880.00	-16.17	-29.40	8.10	21.33	33.00	H
1908.50	-15.51	-29.30	8.10	21.89	33.00	H

LTE Band 2 5MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1852.50	-16.54	-29.30	8.10	20.87	33.00	H
1880.00	-16.30	-29.40	8.10	21.20	33.00	H
1907.50	-15.60	-29.30	8.10	21.80	33.00	H

LTE Band 2 10MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1855.00	-16.45	-29.30	8.10	20.95	33.00	H
1880.00	-16.23	-29.40	8.10	21.27	33.00	H
1905.00	-15.70	-29.30	8.10	21.70	33.00	H

LTE Band 2 15MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1857.50	-16.51	-29.30	8.10	20.90	33.00	H
1880.00	-16.28	-29.40	8.10	21.22	33.00	H
1902.50	-15.78	-29.30	8.10	21.63	33.00	H

LTE Band 2 20 MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1860.00	-16.55	-29.30	8.10	20.86	33.00	H
1880.00	-16.34	-29.40	8.10	21.16	33.00	H
1900.00	-15.90	-29.30	8.10	21.50	33.00	H

Peak EIRP (dBm)=P_{Mea}(-15.38dBm)-(P_{cl}+P_{Ag})(-29.30dB)+G_a(8.10dB) =22.03dBm

**LTE Band 5- ERP Part 22.913(a)****Limits:** ≤38.45dBm (7W)**LTE Band 5_1.4MHz_QPSK**

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
824.70	-9.19	-33.60	-0.79	2.15	21.47	38.45	V
836.50	-9.29	-33.50	-0.74	2.15	21.33	38.45	V
848.30	-9.30	-33.50	-0.73	2.15	21.32	38.45	V

LTE Band 5_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
825.50	-9.26	-33.60	-0.84	2.15	21.35	38.45	V
836.50	-9.40	-33.50	-0.74	2.15	21.22	38.45	V
847.50	-9.36	-33.50	-0.73	2.15	21.26	38.45	V

LTE Band 5_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
826.50	-9.27	-33.60	-0.84	2.15	21.34	38.45	V
836.50	-9.35	-33.50	-0.74	2.15	21.27	38.45	V
846.50	-9.32	-33.50	-0.73	2.15	21.30	38.45	V

LTE Band 5_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
829.00	-9.30	-33.60	-0.84	2.15	21.31	38.45	V
836.50	-9.51	-33.50	-0.74	2.15	21.10	38.45	V
844.00	-9.31	-33.50	-0.78	2.15	21.25	38.45	V

**LTE Band 5 1.4MHz 16QAM**

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
824.70	-9.31	-33.60	-0.79	2.15	21.35	38.45	V
836.50	-9.44	-33.50	-0.74	2.15	21.17	38.45	V
848.30	-9.60	-33.50	-0.73	2.15	21.01	38.45	V

LTE Band 5 3MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
825.50	-9.37	-33.60	-0.84	2.15	21.24	38.45	V
836.50	-9.51	-33.50	-0.74	2.15	21.11	38.45	V
847.50	-9.64	-33.50	-0.73	2.15	20.97	38.45	V

LTE Band 5 5MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
826.50	-9.44	-33.60	-0.84	2.15	21.17	38.45	V
836.50	-9.59	-33.50	-0.74	2.15	21.02	38.45	V
846.50	-9.75	-33.50	-0.73	2.15	20.87	38.45	V

LTE Band 5 10MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
829.00	-9.42	-33.60	-0.84	2.15	21.19	38.45	V
836.50	-9.67	-33.50	-0.74	2.15	20.95	38.45	V
844.00	-9.76	-33.50	-0.78	2.15	20.81	38.45	V

Peak ERP (dBm)=P_{Mea}(-9.19dBm)-(P_{ci}+P_{Ag})(-33.60dB)+G_a(-0.79dB) -2.15dB =21.47dBm

**LTE Band 7- EIRP Part 27.50(h)(2)****Limits:** ≤33 dBm (2W)**LTE Band 7_5MHz_QPSK**

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2502.50	-17.16	-28.70	10.70	22.24	33.00	H
2535.00	-17.43	-28.60	10.70	21.87	33.00	H
2567.50	-17.25	-28.60	10.70	22.05	33.00	H

LTE Band 7_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2505.00	-17.30	-28.70	10.70	22.10	33.00	H
2535.00	-17.50	-28.60	10.70	21.80	33.00	H
2565.00	-17.35	-28.60	10.70	21.96	33.00	H

LTE Band 7_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2507.50	-17.37	-28.70	10.70	22.03	33.00	H
2535.00	-17.53	-28.60	10.70	21.77	33.00	H
2562.50	-17.33	-28.60	10.70	21.98	33.00	H

LTE Band 7_20MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2510.00	-17.50	-28.70	10.70	21.90	33.00	H
2535.00	-17.61	-28.60	10.70	21.69	33.00	H
2560.00	-17.46	-28.60	10.70	21.84	33.00	H

**LTE Band 7_5MHz_16QAM**

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2502.50	-17.32	-28.70	10.70	22.08	33.00	H
2535.00	-17.35	-28.60	10.70	21.95	33.00	H
2567.50	-17.41	-28.60	10.70	21.89	33.00	H

LTE Band 7_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2505.00	-17.39	-28.70	10.70	22.02	33.00	H
2535.00	-17.41	-28.60	10.70	21.89	33.00	H
2565.00	-17.55	-28.60	10.70	21.75	33.00	H

LTE Band 7_15MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2507.50	-17.45	-28.70	10.70	21.95	33.00	H
2535.00	-17.46	-28.60	10.70	21.84	33.00	H
2562.50	-17.54	-28.60	10.70	21.76	33.00	H
2502.50	-17.16	-28.70	10.70	22.24	33.00	H

LTE Band 7_20MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
2510.00	-17.51	-28.70	10.70	21.90	33.00	H
2535.00	-17.45	-28.60	10.70	21.86	33.00	H
2560.00	-17.47	-28.60	10.70	21.83	33.00	H

Peak EIRP (dBm)=P_{Mea}(-17.16dBm)-(P_{cl}+P_{Ag})(-28.70dB)+G_a(10.70dB)=22.24dBm

LTE Band 12 - ERP Part 27.50(c)(10)
Limits: ≤34.77dBm (3W)

LTE Band 12 1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
699.70	-11.89	-34.80	-0.93	2.15	19.83	34.77	V
707.50	-11.20	-34.70	-0.91	2.15	20.45	34.77	V
715.30	-11.49	-34.70	-0.68	2.15	20.38	34.77	V

LTE Band 12 3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
700.50	-11.94	-34.80	-0.97	2.15	19.75	34.77	V
707.50	-11.30	-34.70	-0.91	2.15	20.35	34.77	V
714.50	-11.62	-34.70	-0.64	2.15	20.29	34.77	V

LTE Band 12 5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
701.50	-11.89	-34.80	-0.97	2.15	19.79	34.77	V
707.50	-11.25	-34.70	-0.91	2.15	20.40	34.77	V
713.50	-11.70	-34.70	-0.64	2.15	20.21	34.77	V

LTE Band 12 10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
704.00	-11.99	-34.80	-0.97	2.15	19.69	34.77	V
707.50	-11.39	-34.70	-0.91	2.15	20.25	34.77	V
711.00	-11.72	-34.70	-0.64	2.15	20.18	34.77	V

**LTE Band 12_1.4MHz_16QAM**

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
699.70	-12.08	-34.80	-0.93	2.15	19.64	34.77	V
707.50	-11.21	-34.70	-0.91	2.15	20.43	34.77	V
715.30	-11.53	-34.70	-0.68	2.15	20.34	34.77	V

LTE Band 12_3MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
700.50	-11.98	-34.80	-0.97	2.15	19.70	34.77	V
707.50	-11.29	-34.70	-0.91	2.15	20.36	34.77	V
714.50	-11.65	-34.70	-0.64	2.15	20.25	34.77	V

LTE Band 12_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
701.50	-12.08	-34.80	-0.97	2.15	19.60	34.77	V
707.50	-11.49	-34.70	-0.91	2.15	20.15	34.77	V
713.50	-11.89	-34.70	-0.64	2.15	20.02	34.77	V

LTE Band 12_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
704.00	-12.09	-34.80	-0.97	2.15	19.59	34.77	V
707.50	-11.40	-34.70	-0.91	2.15	20.24	34.77	V
711.00	-11.79	-34.70	-0.64	2.15	20.11	34.77	V

Peak ERP (dBm)=P_{Mea}(-11.20Bm)-(P_{cl}+P_{Ag})(-34.70dB)+G_a(-0.91dB) -2.15dB =20.45dBm

**LTE Band 13- ERP Part 27.50(b)(10)****Limits:** ≤34.77dBm (3W)**LTE Band 13_5MHz_QPSK**

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
779.50	-13.14	-34.00	-0.08	2.15	18.63	34.77	V
782.00	-13.60	-34.00	-0.13	2.15	18.12	34.77	V
784.50	-12.82	-34.00	-0.13	2.15	18.90	34.77	V

LTE Band 13_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
782.00	-13.49	-34.00	-0.13	2.15	18.23	34.77	V

LTE Band 13_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
779.50	-13.42	-34.00	-0.08	2.15	18.35	34.77	V
782.00	-13.71	-34.00	-0.13	2.15	18.01	34.77	V
784.50	-13.16	-34.00	-0.13	2.15	18.56	34.77	V

LTE Band 13_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
782.00	-13.62	-34.00	-0.13	2.15	18.10	34.77	V

Peak ERP (dBm)=P_{Mea}(-12.82dBm)-(P_{cl}+P_{Ag})(-34.00dB)+G_a(-0.13dB) -2.15dB =18.90dBm

**LTE Band 66- EIRP Part 27.50(d)****Limits:** ≤30dBm (1W)**LTE Band 66_1.4MHz_QPSK**

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1710.70	-16.61	-29.60	8.10	21.10	30.00	H
1745.00	-16.03	-29.50	8.10	21.57	30.00	H
1779.30	-16.72	-29.50	8.10	20.88	30.00	H

LTE Band 66_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1711.50	-16.70	-29.60	8.10	21.00	30.00	H
1745.00	-16.22	-29.50	8.10	21.39	30.00	H
1778.50	-16.81	-29.50	8.10	20.79	30.00	H

LTE Band 66_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1712.50	-16.69	-29.60	8.10	21.01	30.00	H
1745.00	-16.15	-29.50	8.10	21.45	30.00	H
1777.50	-16.85	-29.50	8.10	20.76	30.00	H

LTE Band 66_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1715.00	-16.80	-29.60	8.10	20.90	30.00	H
1745.00	-16.30	-29.50	8.10	21.30	30.00	H
1775.00	-16.78	-29.50	8.10	20.82	30.00	H

LTE Band 66_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1717.50	-16.92	-29.60	8.10	20.78	30.00	H
1745.00	-16.24	-29.50	8.10	21.36	30.00	H
1772.53	-16.79	-29.50	8.10	20.81	30.00	H

LTE Band 66_20MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1720.00	-16.96	-29.60	8.10	20.74	30.00	H
1745.00	-17.30	-29.50	8.10	20.30	30.00	H
1770.00	-16.88	-29.50	8.10	20.72	30.00	H

LTE Band 66 1.4MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1710.70	-16.88	-29.60	8.10	20.83	30.00	H
1745.00	-16.13	-29.50	8.10	21.48	30.00	H
1779.30	-16.82	-29.50	8.10	20.78	30.00	H

LTE Band 66 3MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1711.50	-16.99	-29.60	8.10	20.71	30.00	H
1745.00	-16.20	-29.50	8.10	21.40	30.00	H
1778.50	-16.86	-29.50	8.10	20.74	30.00	H

LTE Band 66 5MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1712.50	-16.96	-29.60	8.10	20.74	30.00	H
1745.00	-16.18	-29.50	8.10	21.42	30.00	H
1777.50	-16.96	-29.50	8.10	20.64	30.00	H

LTE Band 66 10MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1715.00	-17.05	-29.60	8.10	20.65	30.00	H
1745.00	-16.25	-29.50	8.10	21.36	30.00	H
1775.00	-17.03	-29.50	8.10	20.57	30.00	H

LTE Band 66 15MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1717.50	-17.11	-29.60	8.10	20.59	30.00	H
1745.00	-16.20	-29.50	8.10	21.40	30.00	H
1772.53	-16.99	-29.50	8.10	20.61	30.00	H

LTE Band 66 20MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1720.00	-17.04	-29.60	8.10	20.66	30.00	H
1745.00	-16.11	-29.50	8.10	21.49	30.00	H
1770.00	-16.89	-29.50	8.10	20.71	30.00	H

Peak EIRP (dBm)=P_{Mea}(-16.03dBm)-(P_{cl}+P_{Ag})(-29.50dB)+G_a(8.10dB) =21.57dBm

ANALYZER SETTINGS:

RBW = VBW = 8MHz for occupied bandwidths equal to or less than 5MHz.

RBW = VBW = 20MHz for occupied bandwidths equal to or greater than 10MHz.

Note: The maximum value of expanded measurement uncertainty for this test item is U =

2.87dB(30MHz-3GHz)/3.35dB(3GHz-18GHz)/2.68dB(18GHz-40GHz), k = 2

Note: Both of Vertical and Horizontal polarizations are evaluated, but only the worst case is recorded in this report.

6A.2 FIELD STRENGTH OF SPURIOUS RADIATION

Reference

FCC: CFR 2.1053, 22.917, 24.238, 27.53


A.2.1 Measurement Method

This measurement is carried out in fully-anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz as outlined in Part 22.917, 24.238, 27.53(h). The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE Bands 2,4,5,7,12,13,17,66,

The procedure of radiated spurious emissions is as follows:

1. For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, EUT was placed on a 80 cm high non-conductive stand at a 3 meter test distance from the receive antenna. For radiated measurements performed at frequencies above 1 GHz, EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. Receiving antenna was placed on the antenna mast 3 meters from the EUT. For emission measurements. The receiving antenna shall be varied from 1 m to 4 m in height above the reference ground in a search for the relative positioning that produces the maximum radiated signal level. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

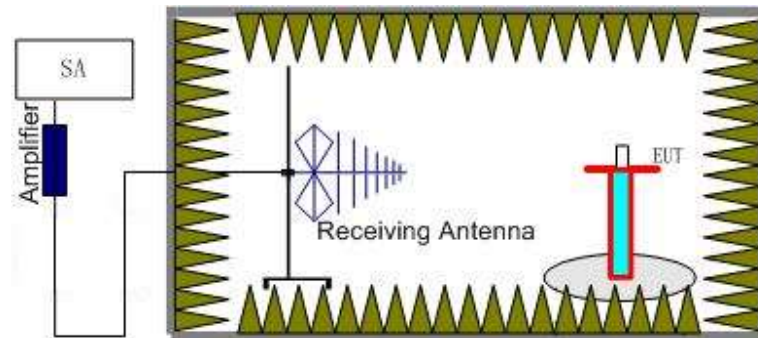

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

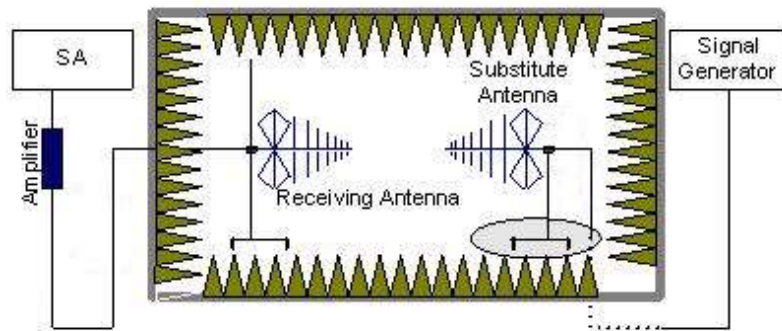

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna and adjusts the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain(dBi) (G_a) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dB}$.

A.2.2 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the LTE Bands 2,4,5,7,12,13,17,66. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the LTE Bands 2,4,5,7,12,13,17,66. into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this. Only worst case result is given below.

LTE Band 2, 1.4MHz, QPSK, Channel 18607

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
12951.90	-37.63	2.50	13.80	-26.33	-13.00	H
17000.00	-42.39	2.90	14.50	-30.79	-13.00	H
17453.33	-41.84	2.90	14.50	-30.24	-13.00	H
17576.67	-39.43	3.30	12.80	-29.93	-13.00	H
17764.29	-39.48	3.60	12.80	-30.28	-13.00	H
17989.52	-37.74	3.20	12.80	-28.14	-13.00	H

LTE Band 2, 1.4MHz, QPSK, Channel 18900

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
13157.14	-38.25	2.30	13.30	-27.25	-13.00	H
17280.00	-42.19	3.20	14.50	-30.89	-13.00	H
17465.24	-40.98	2.90	14.50	-29.38	-13.00	H
17525.71	-39.10	2.90	12.80	-29.20	-13.00	H
17814.76	-39.05	3.60	12.80	-29.85	-13.00	H
17953.33	-37.32	3.20	12.80	-27.72	-13.00	H

LTE Band 2, 1.4MHz, QPSK, Channel 19193

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
11452.86	-38.65	2.60	10.50	-30.75	-13.00	H
13362.38	-41.94	2.30	13.30	-30.94	-13.00	H
17524.76	-39.56	2.90	12.80	-29.66	-13.00	H
17605.24	-39.27	3.30	12.80	-29.77	-13.00	H
17838.10	-39.54	3.60	12.80	-30.34	-13.00	H
17980.95	-37.59	3.20	12.80	-27.99	-13.00	H

LTE Band 2, 1.4MHz, 16QAM, Channel 18607

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
12951.90	-37.92	2.50	13.80	-26.62	-13.00	H
17153.33	-43.36	2.90	14.50	-31.76	-13.00	H
17503.81	-39.62	2.90	12.80	-29.72	-13.00	H
17548.57	-39.49	2.90	12.80	-29.59	-13.00	H
17819.05	-40.33	3.60	12.80	-31.13	-13.00	H
17993.81	-37.78	3.20	12.80	-28.18	-13.00	H

LTE Band 2, 1.4MHz, 16QAM, Channel 18900

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
13157.14	-40.21	2.30	13.30	-29.21	-13.00	H
17287.62	-42.79	3.20	14.50	-31.49	-13.00	H
17517.14	-40.58	2.90	12.80	-30.68	-13.00	H
17643.33	-39.72	3.30	12.80	-30.22	-13.00	H
17836.67	-40.57	3.60	12.80	-31.37	-13.00	H
17979.52	-38.22	3.20	12.80	-28.62	-13.00	H

LTE Band 2, 1.4MHz, 16QAM, Channel 19193

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
11452.86	-38.54	2.60	10.50	-30.64	-13.00	H
13362.38	-42.26	2.30	13.30	-31.26	-13.00	H
17442.86	-41.98	2.90	14.50	-30.38	-13.00	H
17595.71	-39.97	3.30	12.80	-30.47	-13.00	H
17840.00	-39.64	3.60	12.80	-30.44	-13.00	H
17955.24	-37.57	3.20	12.80	-27.97	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.87\text{dB}(30\text{MHz}-3\text{GHz})/3.35\text{dB}(3\text{GHz}-18\text{GHz})/2.68\text{dB}(18\text{GHz}-40\text{GHz})$, $k = 2$

LTE Band 5, 1.4MHz, QPSK, Channel 20407

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
8723.63	-52.50	2.00	12.00	-44.65	-13.00	H
9101.13	-51.25	2.20	11.60	-44.00	-13.00	H
9302.88	-50.32	2.00	11.60	-42.87	-13.00	H
9472.25	-50.04	2.10	11.60	-42.69	-13.00	V
9722.00	-50.45	2.20	11.20	-43.60	-13.00	H
9788.25	-51.11	2.30	11.20	-44.36	-13.00	H

LTE Band 5, 1.4MHz, QPSK, Channel 20525

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
8421.00	-51.84	1.80	11.30	-44.49	-13.00	H
9093.38	-51.87	2.20	11.60	-44.62	-13.00	H
9299.50	-50.32	2.00	11.60	-42.87	-13.00	H
9472.25	-50.69	2.10	11.60	-43.34	-13.00	V
9718.00	-50.81	2.20	11.20	-43.96	-13.00	H
9781.75	-50.29	2.30	11.20	-43.54	-13.00	H

LTE Band 5, 1.4MHz, QPSK, Channel 20643

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
5087.63	-48.89	1.20	12.50	-39.74	-13.00	H
8478.75	-46.60	1.80	11.30	-39.25	-13.00	H
9109.50	-51.10	2.10	11.60	-43.75	-13.00	H
9326.63	-48.47	2.00	11.60	-41.02	-13.00	H
9476.88	-51.20	2.10	11.60	-43.85	-13.00	V
9737.50	-50.68	2.20	11.20	-43.83	-13.00	H

LTE Band 5, 1.4MHz, 16QAM, Channel 20407

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
7321.13	-52.90	1.70	12.00	-44.75	-13.00	H
9095.88	-50.76	2.20	11.60	-43.51	-13.00	H
9296.13	-50.59	2.00	11.60	-43.14	-13.00	H
9424.88	-50.96	2.10	11.60	-43.61	-13.00	H
9726.00	-51.06	2.20	11.20	-44.21	-13.00	H
9891.38	-51.18	2.20	11.20	-44.33	-13.00	H

LTE Band 5, 1.4MHz, 16QAM, Channel 20525

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
8431.88	-51.50	1.80	11.30	-44.15	-13.00	H
9093.75	-51.36	2.20	11.60	-44.11	-13.00	H
9299.00	-49.94	2.00	11.60	-42.49	-13.00	H
9474.88	-50.41	2.10	11.60	-43.06	-13.00	V
9734.13	-50.50	2.20	11.20	-43.65	-13.00	H
9788.63	-50.73	2.30	11.20	-43.98	-13.00	H

LTE Band 5, 1.4MHz, 16QAM, Channel 20643

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
5086.88	-49.15	1.20	12.50	-40.00	-13.00	H
8478.38	-47.03	1.80	11.30	-39.68	-13.00	H
9107.00	-51.46	2.10	11.60	-44.11	-13.00	H
9326.50	-48.50	2.00	11.60	-41.05	-13.00	H
9475.63	-50.74	2.10	11.60	-43.39	-13.00	V
9734.75	-50.11	2.20	11.20	-43.26	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.87\text{dB}(30\text{MHz}-3\text{GHz})/3.35\text{dB}(3\text{GHz}-18\text{GHz})/2.68\text{dB}(18\text{GHz}-40\text{GHz})$, $k = 2$

LTE Band 7, 5 MHz, QPSK, Channel 20775

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
16990.48	-55.14	2.90	16.50	-41.54	-25.00	H
17277.62	-53.08	3.20	14.50	-41.78	-25.00	H
17505.24	-50.06	2.90	12.80	-40.16	-25.00	H
17572.86	-49.69	3.30	12.80	-40.19	-25.00	H
17838.10	-49.98	3.60	12.80	-40.78	-25.00	H
17980.95	-47.86	3.20	12.80	-38.26	-25.00	H

LTE Band 7, 5 MHz, QPSK, Channel 21100

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
16985.24	-55.00	2.90	16.50	-41.40	-25.00	H
17369.05	-53.20	3.20	14.50	-41.90	-25.00	H
17502.86	-50.18	2.90	12.80	-40.28	-25.00	H
17598.57	-49.36	3.30	12.80	-39.86	-25.00	H
17777.14	-49.99	3.60	12.80	-40.79	-25.00	H
17990.95	-47.99	3.20	12.80	-38.39	-25.00	H

LTE Band 7, 5 MHz, QPSK, Channel 21425

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
16966.19	-55.14	2.90	16.50	-41.54	-25.00	H
17122.86	-53.69	2.90	14.50	-42.09	-25.00	H
17271.90	-53.10	3.20	14.50	-41.80	-25.00	H
17449.05	-51.76	2.90	14.50	-40.16	-25.00	H
17526.19	-50.04	2.90	12.80	-40.14	-25.00	H
17836.67	-50.08	3.60	12.80	-40.88	-25.00	H

LTE Band 7, 5 MHz, 16QAM, Channel 20775

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
16965.24	-54.94	2.90	16.50	-41.34	-25.00	H
17288.10	-53.00	3.20	14.50	-41.70	-25.00	H
17457.14	-52.00	2.90	14.50	-40.40	-25.00	H
17596.67	-49.40	3.30	12.80	-39.90	-25.00	H
17838.10	-50.03	3.60	12.80	-40.83	-25.00	H
17934.76	-47.81	3.20	12.80	-38.21	-25.00	H

LTE Band 7, 5 MHz, 16QAM, Channel 21100

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
16984.76	-55.12	2.90	16.50	-41.52	-25.00	H
17284.29	-53.09	3.20	14.50	-41.79	-25.00	H
17521.90	-50.14	2.90	12.80	-40.24	-25.00	H
17532.86	-49.72	2.90	12.80	-39.82	-25.00	H
17780.48	-49.88	3.60	12.80	-40.68	-25.00	H
17993.81	-47.71	3.20	12.80	-38.11	-25.00	H

LTE Band 7, 5 MHz, 16QAM, Channel 21425

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
16995.71	-54.89	2.90	16.50	-41.29	-25.00	H
17280.95	-53.40	3.20	14.50	-42.10	-25.00	H
17484.29	-51.77	2.90	14.50	-40.17	-25.00	H
17613.81	-49.24	3.30	12.80	-39.74	-25.00	H
17820.95	-50.01	3.60	12.80	-40.81	-25.00	H
17996.19	-48.05	3.20	12.80	-38.45	-25.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.87\text{dB}(30\text{MHz}-3\text{GHz})/3.35\text{dB}(3\text{GHz}-18\text{GHz})/2.68\text{dB}(18\text{GHz}-40\text{GHz})$, $k = 2$

LTE Band 12, 1.4MHz, QPSK, Channel 23017

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
8748.38	-51.86	2.00	12.00	-44.01	-13.00	H
9118.88	-52.19	2.10	11.60	-44.84	-13.00	V
9219.13	-50.83	2.10	11.60	-43.48	-13.00	H
9471.88	-50.72	2.10	11.60	-43.37	-13.00	V
9740.13	-51.03	2.20	11.20	-44.18	-13.00	H
9789.50	-49.85	2.30	11.20	-43.10	-13.00	H

LTE Band 12, 1.4MHz, QPSK, Channel 23095

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
7281.38	-52.67	1.90	12.00	-44.72	-13.00	H
9109.38	-51.86	2.10	11.60	-44.51	-13.00	H
9225.50	-49.51	2.10	11.60	-42.16	-13.00	H
9475.38	-50.40	2.10	11.60	-43.05	-13.00	V
9736.63	-50.91	2.20	11.20	-44.06	-13.00	H
9898.63	-47.83	2.20	11.20	-40.98	-13.00	H

LTE Band 12, 1.4MHz, QPSK, Channel 23173

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
8578.88	-50.77	2.00	12.00	-42.92	-13.00	H
9099.88	-51.40	2.20	11.60	-44.15	-13.00	H
9300.38	-50.10	2.00	11.60	-42.65	-13.00	H
9472.38	-50.79	2.10	11.60	-43.44	-13.00	V
9759.75	-51.04	2.20	11.20	-44.19	-13.00	H
9796.75	-51.09	2.30	11.20	-44.34	-13.00	H

LTE Band 12, 1.4MHz, 16QAM, Channel 23017

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
8382.00	-52.17	1.80	11.30	-44.82	-13.00	H
9103.50	-51.49	2.20	11.60	-44.24	-13.00	H
9301.63	-50.98	2.00	11.60	-43.53	-13.00	H
9473.75	-51.18	2.10	11.60	-43.83	-13.00	V
9748.38	-50.86	2.20	11.20	-44.01	-13.00	H
9789.50	-49.54	2.30	11.20	-42.79	-13.00	H

LTE Band 12, 1.4MHz 16QAM, Channel 23095

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
7221.00	-52.86	1.80	12.00	-44.81	-13.00	V
9103.63	-51.24	2.20	11.60	-43.99	-13.00	H
9295.38	-50.48	2.00	11.60	-43.03	-13.00	H
9476.38	-50.85	2.10	11.60	-43.50	-13.00	V
9764.00	-50.10	2.30	11.20	-43.35	-13.00	H
9898.88	-50.20	2.20	11.20	-43.35	-13.00	H

LTE Band 12, 1.4MHz, 16QAM, Channel 23173

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
8578.50	-50.95	2.10	12.00	-43.20	-13.00	H
9102.38	-51.34	2.20	11.60	-44.09	-13.00	H
9305.88	-49.66	2.00	11.60	-42.21	-13.00	H
9475.63	-50.76	2.10	11.60	-43.41	-13.00	V
9742.13	-50.28	2.20	11.20	-43.43	-13.00	H
9803.00	-50.80	2.30	11.20	-44.05	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.87\text{dB}(30\text{MHz}-3\text{GHz})/3.35\text{dB}(3\text{GHz}-18\text{GHz})/2.68\text{dB}(18\text{GHz}-40\text{GHz})$, $k = 2$

LTE Band 13, 5 MHz, QPSK, Channel 23205

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1561.00	-59.08	0.70	8.10	-53.83	-40.00	H
8569.88	-51.82	2.10	12.00	-44.07	-13.00	H
9301.13	-50.05	2.00	11.60	-42.60	-13.00	H
9348.38	-48.81	2.00	11.60	-41.36	-13.00	H
9716.50	-50.07	2.20	11.20	-43.22	-13.00	H
9803.63	-50.50	2.30	11.20	-43.75	-13.00	H

LTE Band 13, 5 MHz, QPSK, Channel 23230

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1562.50	-58.56	0.70	8.10	-53.31	-40.00	V
9098.63	-51.39	2.20	11.60	-44.14	-13.00	H
9297.75	-50.54	2.00	11.60	-43.09	-13.00	H
9378.25	-50.31	2.00	11.60	-42.86	-13.00	H
9735.75	-50.20	2.20	11.20	-43.35	-13.00	H
9804.38	-50.41	2.30	11.20	-43.66	-13.00	H

LTE Band 13, 5 MHz, QPSK, Channel 23255

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1568.00	-58.42	0.70	8.10	-53.17	-40.00	V
9101.63	-51.45	2.20	11.60	-44.20	-13.00	H
9295.25	-50.22	2.00	11.60	-42.77	-13.00	H
9475.13	-50.55	2.10	11.60	-43.20	-13.00	V
9743.38	-50.76	2.20	11.20	-43.91	-13.00	H
9781.75	-51.11	2.30	11.20	-44.36	-13.00	H

LTE Band 13, 5 MHz, 16QAM, Channel 23205

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1572.00	-58.34	0.70	8.10	-53.09	-40.00	V
8374.13	-51.26	1.80	11.30	-43.91	-13.00	H
8569.88	-51.02	2.10	12.00	-43.27	-13.00	H
9088.00	-51.02	2.20	11.60	-43.77	-13.00	H
9310.88	-50.13	2.00	11.60	-42.68	-13.00	H
9348.63	-49.58	2.00	11.60	-42.13	-13.00	H

LTE Band 13, 5 MHz, 16QAM, Channel 23230

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1565.50	-59.23	0.70	8.10	-53.98	-40.00	V
8422.88	-51.76	1.80	11.30	-44.41	-13.00	H
9101.63	-51.62	2.20	11.60	-44.37	-13.00	H
9301.88	-49.74	2.00	11.60	-42.29	-13.00	H
9474.63	-50.52	2.10	11.60	-43.17	-13.00	V
9741.63	-50.13	2.20	11.20	-43.28	-13.00	H

LTE Band 13, 5 MHz, 16QAM, Channel 23255

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1564.50	-58.37	0.70	8.10	-53.12	-40.00	V
9102.00	-50.81	2.20	11.60	-43.56	-13.00	H
9303.25	-49.84	2.00	11.60	-42.39	-13.00	H
9479.50	-50.19	2.10	11.60	-42.84	-13.00	V
9730.38	-51.11	2.20	11.20	-44.26	-13.00	H
9800.63	-49.70	2.30	11.20	-42.95	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.87\text{dB}(30\text{MHz}-3\text{GHz})/3.35\text{dB}(3\text{GHz}-18\text{GHz})/2.68\text{dB}(18\text{GHz}-40\text{GHz})$, $k = 2$

LTE Band 66, 1.4MHz QPSK, Channel 131979

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
11971.43	-32.73	2.60	11.00	-24.33	-13.00	H
17351.90	-41.84	3.20	14.50	-30.54	-13.00	H
17496.19	-41.17	2.90	14.50	-29.57	-13.00	H
17571.43	-38.53	3.30	12.80	-29.03	-13.00	H
17839.05	-37.71	3.60	12.80	-28.51	-13.00	H
17998.10	-36.42	3.20	12.80	-26.82	-13.00	H

LTE Band 66, 1.4MHz, QPSK, Channel 132322

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
12211.90	-36.50	2.60	12.60	-26.50	-13.00	H
17241.90	-42.01	3.20	14.50	-30.71	-13.00	H
17523.81	-38.34	2.90	12.80	-28.44	-13.00	H
17609.52	-39.21	3.30	12.80	-29.71	-13.00	H
17705.24	-40.07	3.30	12.80	-30.57	-13.00	H
17997.62	-38.08	3.20	12.80	-28.48	-13.00	H

LTE Band 66, 1.4MHz, QPSK, Channel 132665

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
12451.90	-35.40	2.60	12.60	-25.40	-13.00	H
16947.62	-44.52	2.90	16.50	-30.92	-13.00	H
17382.38	-40.96	3.20	14.50	-29.66	-13.00	H
17585.71	-38.18	3.30	12.80	-28.68	-13.00	H
17836.67	-38.67	3.60	12.80	-29.47	-13.00	H
17991.43	-36.14	3.20	12.80	-26.54	-13.00	H

LTE Band 66, 1.4MHz, 16QAM, Channel 131979

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
11971.43	-33.02	2.60	11.00	-24.62	-13.00	H
17290.95	-42.60	3.20	14.50	-31.30	-13.00	H
17472.38	-41.44	2.90	14.50	-29.84	-13.00	H
17590.95	-40.15	3.30	12.80	-30.65	-13.00	H
17786.19	-40.40	3.60	12.80	-31.20	-13.00	H
17948.57	-38.08	3.20	12.80	-28.48	-13.00	H

LTE Band 66, 1.4MHz, 16QAM, Channel 132322

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
12211.90	-37.32	2.60	12.60	-27.32	-13.00	H
17363.33	-42.88	3.20	14.50	-31.58	-13.00	H
17507.62	-39.40	2.90	12.80	-29.50	-13.00	H
17612.86	-39.62	3.30	12.80	-30.12	-13.00	H
17802.86	-39.46	3.60	12.80	-30.26	-13.00	H
17962.38	-37.54	3.20	12.80	-27.94	-13.00	H

LTE Band 66, 1.4MHz, 16QAM, Channel 132665

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
12451.90	-34.85	2.60	12.60	-24.85	-13.00	H
16937.62	-44.03	2.90	16.50	-30.43	-13.00	H
17413.33	-41.76	2.90	14.50	-30.16	-13.00	H
17558.57	-39.81	2.90	12.80	-29.91	-13.00	H
17820.95	-39.92	3.60	12.80	-30.72	-13.00	H
17985.71	-37.37	3.20	12.80	-27.77	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.87\text{dB}(30\text{MHz}-3\text{GHz})/3.35\text{dB}(3\text{GHz}-18\text{GHz})/2.68\text{dB}(18\text{GHz}-40\text{GHz})$, $k = 2$



A.3 FREQUENCY STABILITY

Reference

FCC: CFR Part 2.1055, 22.355, 24.235, 27.54.

A.3.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of PCS 1900 and GSM850, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.3.2 Measurement Limit

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d) (2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.60V and 4.35V, with a nominal voltage of 3.80V. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance from -5.5 % and +12.6 %. For the purposes of measuring frequency stability these voltage limits are to be used.

A.3.3 Measurement results

LTE Band 2, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.60	25	36	0.014	0.021
3.80	15	27	0.009	0.016
4.35	5	54	0.003	0.031

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
-30	24	-20	0.014	0.012
-20	14	40	0.008	0.023
-10	-14	-3	0.008	0.002
0	-20	-6	0.012	0.003
10	33	6	0.019	0.003
20	48	51	0.028	0.029
30	36	19	0.021	0.011
40	47	27	0.027	0.016
50	20	28	0.012	0.016

Expanded measurement uncertainty is 10 Hz, $k = 2$

LTE Band 5, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.60	1	29	0.001	0.017
3.80	-14	-12	0.008	0.007
4.35	26	48	0.015	0.028

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
-30	13	15	0.008	0.009
-20	-7	23	0.004	0.013
-10	5	44	0.003	0.025
0	28	54	0.016	0.031
10	43	6	0.025	0.003
20	53	9	0.031	0.005
30	-9	25	0.005	0.014
40	4	53	0.002	0.031
50	49	48	0.028	0.028

Expanded measurement uncertainty is 10Hz, $k = 2$

LTE Band 7, 5MHz bandwidth (worst case of all bandwidths)
Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.60	-8	56	0.005	0.032
3.80	60	32	0.035	0.018
4.35	-13	-17	0.008	0.010

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
-30	42	37	0.024	0.021
-20	-9	58	0.005	0.033
-10	32	0	0.018	0.000
0	-19	16	0.011	0.009
10	56	57	0.032	0.033
20	3	-12	0.002	0.007
30	10	27	0.006	0.016
40	48	58	0.028	0.033
50	60	24	0.035	0.014

Expanded measurement uncertainty is 10 Hz, $k = 2$
LTE Band 12, 1.4MHz bandwidth (worst case of all bandwidths)
Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.60	23	50	0.013	0.029
3.80	8	42	0.005	0.024
4.35	7	-7	0.004	0.004

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
-30	49	11	0.028	0.006
-20	32	10	0.018	0.006
-10	57	48	0.033	0.028
0	20	36	0.012	0.021
10	32	-7	0.018	0.004
20	-2	6	0.001	0.003
30	-3	12	0.002	0.007
40	53	3	0.031	0.002
50	-2	-12	0.001	0.007

Expanded measurement uncertainty is 10Hz, $k = 2$

LTE Band 13, 5MHz bandwidth (worst case of all bandwidths)
Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.60	29	60	0.017	0.035
3.80	25	53	0.014	0.031
4.35	23	29	0.013	0.017

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
-30	-10	-12	0.006	0.007
-20	22	22	0.013	0.013
-10	35	-3	0.020	0.002
0	14	-1	0.008	0.001
10	22	16	0.013	0.009
20	16	9	0.009	0.005
30	49	44	0.028	0.025
40	23	52	0.013	0.030
50	15	46	0.009	0.027

Expanded measurement uncertainty is 10Hz, k = 2

LTE Band 66, 1.4MHz bandwidth (worst case of all bandwidths)
Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.60	3	31	0.002	0.018
3.80	-12	5	0.007	0.003
4.35	33	22	0.019	0.013

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
-30	14	1	0.008	0.001
-20	-5	17	0.003	0.010
-10	16	49	0.009	0.028
0	21	60	0.012	0.035
10	3	7	0.002	0.004
20	58	18	0.033	0.010
30	9	13	0.005	0.008
40	56	32	0.032	0.018
50	-17	2	0.010	0.001

Expanded measurement uncertainty is 10Hz, k = 2

A.4 OCCUPIED BANDWIDTH

Reference

FCC: CFR Part 2.1049, 22.917, 24.238, 27.53.

A.4.1 Occupied Bandwidth Results

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- d) Set the detection mode to peak, and the trace mode to max hold.
- e) Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

LTE band 2,BW1.4MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
1880	1.082	1.089

LTE band 2 , BW1.4MHz Bandwidth,QPSK (99% BW)

LTE band 2 , BW1.4MHz Bandwidth,16QAM (99% BW)


LTE band 2,3MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
1880	2.679	2.680

LTE band 2 , 3MHz Bandwidth,QPSK (99% BW)



LTE band 2 , 3MHz Bandwidth,16QAM (99% BW)



LTE band 2,5MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
1880	4.488	4.488

LTE band 2 , 5MHz Bandwidth,QPSK (99% BW)



LTE band 2 , 5MHz Bandwidth,16QAM (99% BW)



LTE band 2,10MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
1880	8.941	8.951

LTE band 2 , 10MHz Bandwidth,QPSK (99% BW)



LTE band 2 , 10MHz Bandwidth,16QAM (99% BW)



LTE band 2,15MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
1880	13.415	13.454

LTE band 2 , 15MHz Bandwidth,QPSK (99% BW)



LTE band 2 , 15MHz Bandwidth,16QAM (99% BW)



LTE band 2,20MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
1880	17.884	17.922

LTE band 2 , 20MHz Bandwidth,QPSK (99% BW)



LTE band 2 , 20MHz Bandwidth,16QAM (99% BW)



LTE band 5, BW1.4MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
836.5	1.081	1.088

LTE band 5 , BW1.4MHz Bandwidth, QPSK (99% BW)



LTE band 5 , BW1.4MHz Bandwidth,16QAM (99% BW)



LTE band 5 , 3MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
836.5	2.681	2.680

LTE band 5 , 3MHz Bandwidth, QPSK (99% BW)




LTE band 5 , 3MHz Bandwidth,16QAM (99% BW)



LTE band 5 , 5MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
836.5	4.488	4.490

LTE band 5 , 5MHz Bandwidth, QPSK (99% BW)

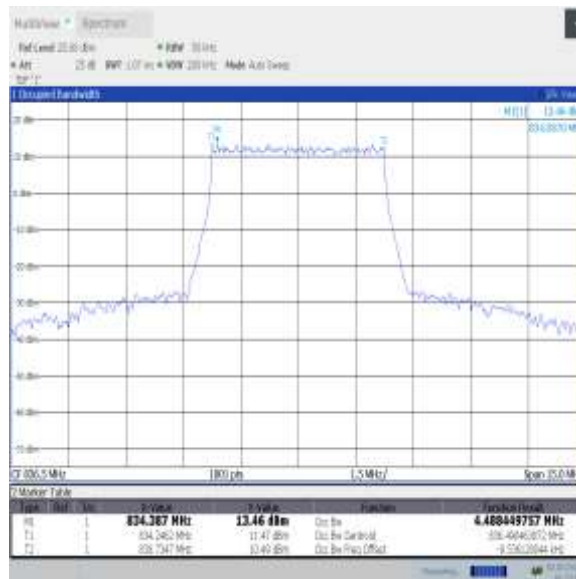

LTE band 5 , 5MHz Bandwidth,16QAM (99% BW)



LTE band 5 , 10MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
836.5	8.979	8.950

LTE band 5 , 10MHz Bandwidth, QPSK (99% BW)



LTE band 5 , 10MHz Bandwidth,16QAM (99% BW)



LTE band 7 , 5MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
2535	4.489	4.491

LTE band 7 , 5MHz Bandwidth, QPSK (99% BW)



LTE band 7 , 5MHz Bandwidth,16QAM (99% BW)



LTE band 7 , 10MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
2535	8.954	8.953

LTE band 7 , 10MHz Bandwidth, QPSK (99% BW)



LTE band 7 , 10MHz Bandwidth,16QAM (99% BW)



LTE band 7 , 15MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
2535	13.455	13.471

LTE band 7 , 15MHz Bandwidth,QPSK (99% BW)



LTE band 7 , 15MHz Bandwidth,16QAM (99% BW)




LTE band 7 , 20MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
2535	17.884	17.906

LTE band 7 , 20MHz Bandwidth,QPSK (99% BW)



LTE band 7 , 20MHz Bandwidth,16QAM (99% BW)

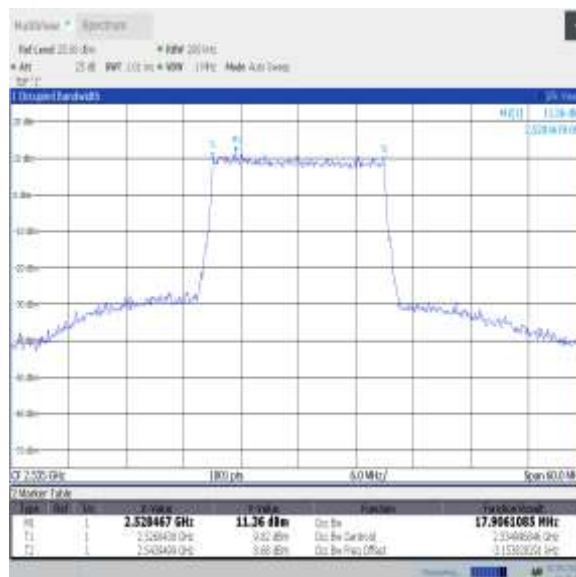

LTE band 12 , BW1.4MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
707.5	1.083	1.089

LTE band 12 , BW1.4MHz Bandwidth, QPSK (99% BW)



LTE band 12 , BW1.4MHz Bandwidth,16QAM (99% BW)



LTE band 12 , 3MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
707.5	2.681	2.675

LTE band 12 , 3MHz Bandwidth, QPSK (99% BW)



LTE band 12 , 3MHz Bandwidth,16QAM (99% BW)



LTE band 12 , 5MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
707.5	4.486	4.490

LTE band 12 , 5MHz Bandwidth, QPSK (99% BW)



LTE band 12 , 5MHz Bandwidth,16QAM (99% BW)



LTE band 12 , 10MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
707.5	8.959	8.950

LTE band 12 , 10MHz Bandwidth, QPSK (99% BW)



LTE band 12 , 10MHz Bandwidth,16QAM (99% BW)



LTE band 13 , 5MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
782	4.488	4.488

LTE band 13 , 5MHz Bandwidth, QPSK (99% BW)



LTE band 13 , 5MHz Bandwidth,16QAM (99% BW)



LTE band 13 , 10MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
782	8.942	8.956

LTE band 13 , 10MHz Bandwidth, QPSK (99% BW)



LTE band 13 , 10MHz Bandwidth,16QAM (99% BW)



LTE band 66 , BW1.4MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
1745	1.086	1.082

LTE band 66 , BW1.4MHz Bandwidth, QPSK (99% BW)

LTE band 66 , BW1.4MHz Bandwidth,16QAM (99% BW)


LTE band 66 , 3MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
1745	2.683	2.677

LTE band 66 , 3MHz Bandwidth, QPSK (99% BW)



LTE band 66 , 3MHz Bandwidth,16QAM (99% BW)



LTE band 66 , 5MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
1745	4.489	4.490


LTE band 66 , 5MHz Bandwidth, QPSK (99% BW)

LTE band 66 , 5MHz Bandwidth,16QAM (99% BW)


LTE band 66 , 10MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
1745	8.952	8.956

LTE band 66 , 10MHz Bandwidth, QPSK (99% BW)

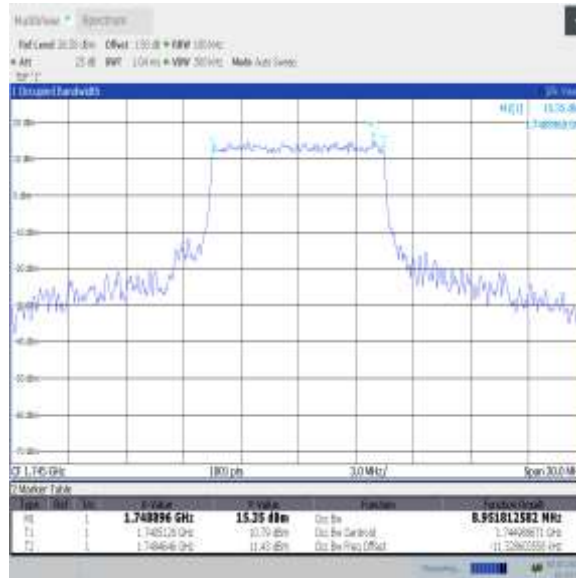

LTE band 66 , 10MHz Bandwidth,16QAM (99% BW)




LTE band 66 , 15MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
1745	13.438	13.461

LTE band 66 , 15MHz Bandwidth,QPSK (99% BW)




LTE band 66 , 15MHz Bandwidth,16QAM (99% BW)

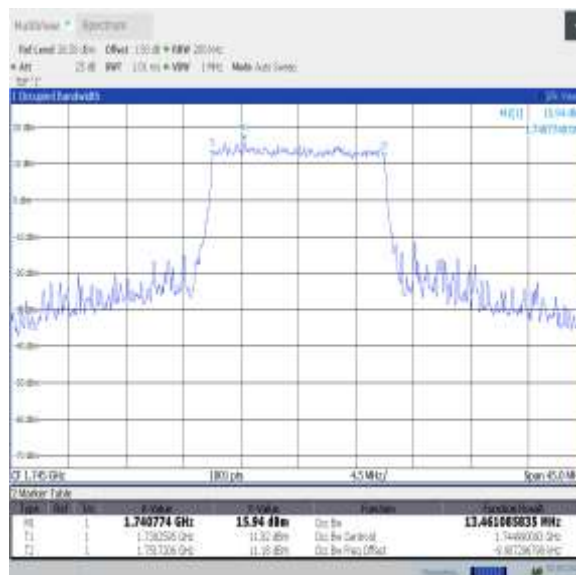


LTE band 66 , 20MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%)(MHz)	
	QPSK	16QAM
1745	17.904	17.891

LTE band 66 , 20MHz Bandwidth,QPSK (99% BW)

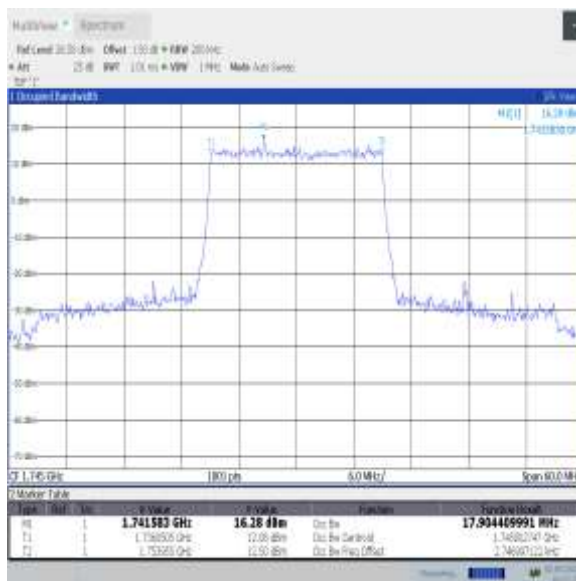

LTE band 66 , 20MHz Bandwidth,16QAM (99% BW)

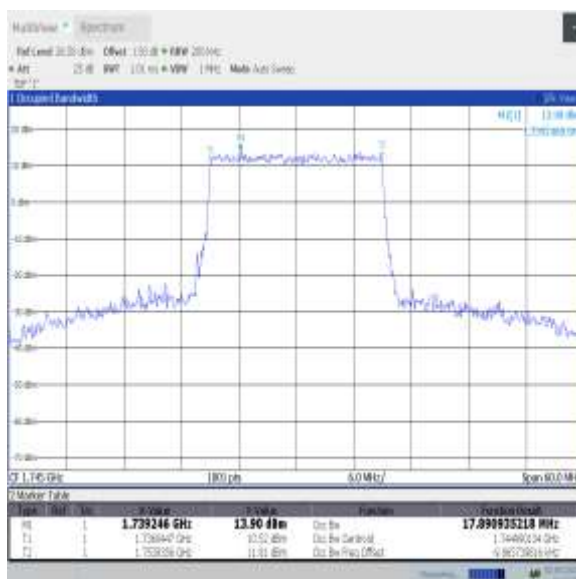

Note: Expanded measurement uncertainty is U = 3428 Hz, k = 2



A.5 EMISSION BANDWIDTH

Reference

FCC: CFR Part 2.1049, 22.917, 24.238, 27.53.

A.5.1 Emission Bandwidth Results

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- d) Set the detection mode to peak, and the trace mode to max hold.
- e) Use the 26dB bandwidth function of the spectrum analyzer and report the measured bandwidth.

A.5.2 Emission Bandwidth Results

Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

LTE band 2,BW1.4MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
1880	1.26	1.29

LTE band 2 , BW1.4MHz Bandwidth, QPSK (-26dBc BW)

LTE band 2 , BW1.4MHz Bandwidth,16QAM (-26dBc BW)


LTE band 2 , 3MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
1880	2.88	2.87

LTE band 2 , 3MHz Bandwidth, QPSK (-26dBc BW)



LTE band 2 , 3MHz Bandwidth,16QAM (-26dBc BW)



LTE band 2,5MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
1880	4.97	4.95

LTE band 2 , 5MHz Bandwidth, QPSK (-26dBc BW)



LTE band 2 , 5MHz Bandwidth,16QAM (-26dBc BW)



LTE band 2,10MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
1880	9.71	9.71

LTE band 2 , 10MHz Bandwidth, QPSK (-26dBc BW)



LTE band 2 , 10MHz Bandwidth,16QAM (-26dBc BW)




LTE band 2,15MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
1880	14.74	14.79

LTE band 2 , 15MHz Bandwidth, QPSK (-26dBc BW)



LTE band 2 , 15MHz Bandwidth,16QAM (-26dBc BW)

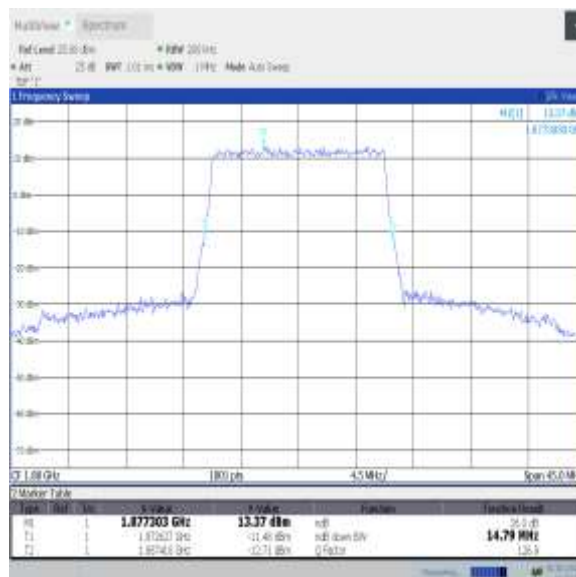

LTE band 2,20MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
1880	19.30	19.30

LTE band 2 , 20MHz Bandwidth, QPSK (-26dBc BW)



LTE band 2 , 20MHz Bandwidth,16QAM (-26dBc BW)



LTE band 5, BW1.4MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
836.5	1.25	1.29

LTE band 5 , BW1.4MHz Bandwidth, QPSK (-26dBc BW)



LTE band 5 , BW1.4MHz Bandwidth,16QAM (-26dBc BW)




LTE band 5 , 3MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
836.5	2.88	2.87

LTE band 5 , 3MHz Bandwidth, QPSK (-26dBc BW)



LTE band 5 , 3MHz Bandwidth,16QAM (-26dBc BW)

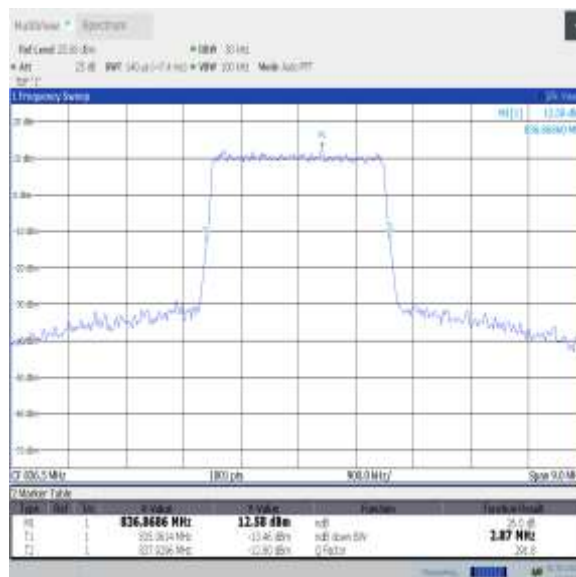

LTE band 5 , 5MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
836.5	4.96	4.97

LTE band 5 , 5MHz Bandwidth, QPSK (-26dBc BW)



LTE band 5 , 5MHz Bandwidth,16QAM (-26dBc BW)



LTE band 5 , 10MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
836.5	9.80	9.83

LTE band 5 , 10MHz Bandwidth, QPSK (-26dBc BW)




LTE band 5 , 10MHz Bandwidth,16QAM (-26dBc BW)




LTE band 7 , 5MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
2535	4.97	4.96

LTE band 7 , 5MHz Bandwidth, QPSK (-26dBc BW)

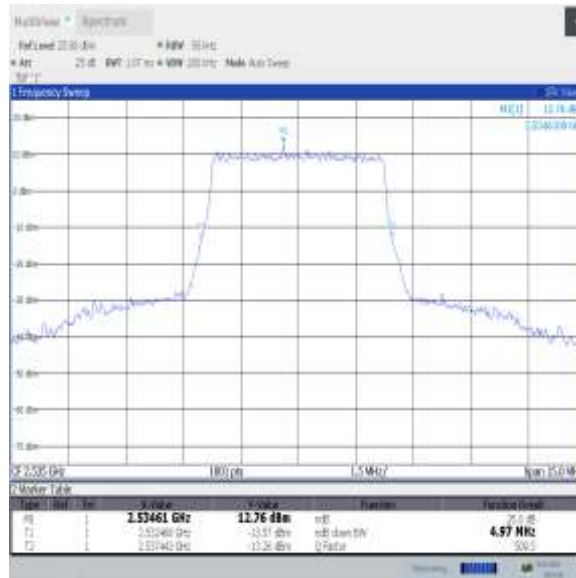

LTE band 7 , 5MHz Bandwidth,16QAM (-26dBc BW)

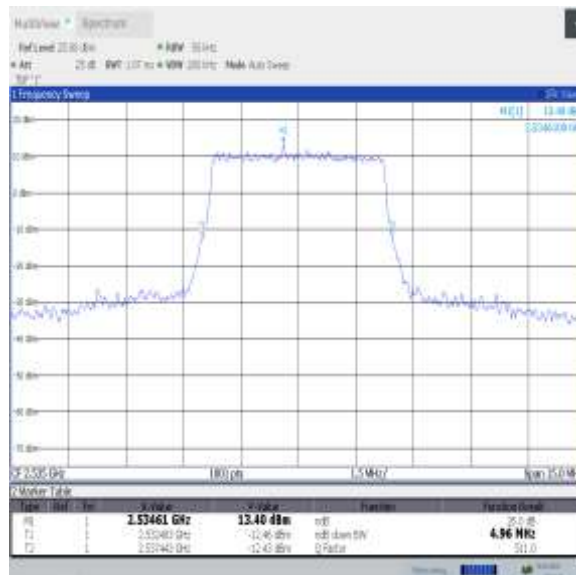


LTE band 7 , 10MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
2535	9.71	9.80

LTE band 7 , 10MHz Bandwidth, QPSK (-26dBc BW)



LTE band 7 , 10MHz Bandwidth,16QAM (-26dBc BW)

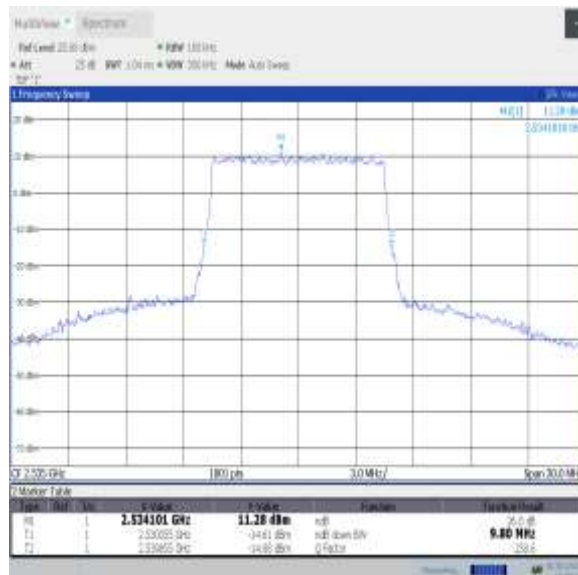

LTE band 7 , 15MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
2535	14.79	14.84

LTE band 7 , 15MHz Bandwidth, QPSK (-26dBc BW)




LTE band 7 , 15MHz Bandwidth,16QAM (-26dBc BW)



LTE band 7 , 20MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
2535	19.30	19.30

LTE band 7 , 20MHz Bandwidth, QPSK (-26dBc BW)

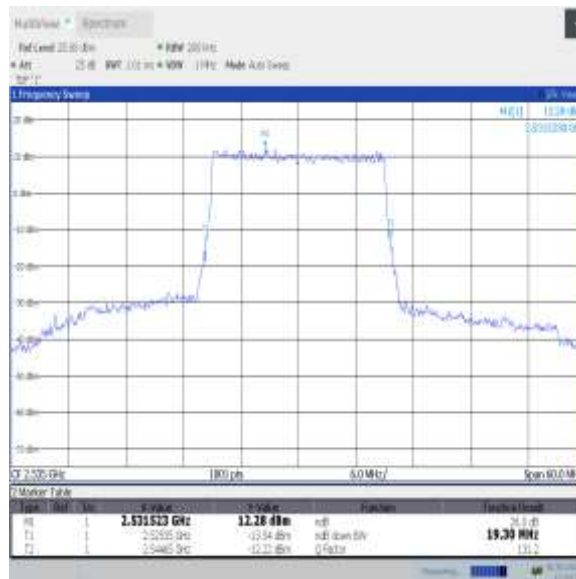


LTE band 7 , 20MHz Bandwidth,16QAM (-26dBc BW)



LTE band 12 , BW1.4MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
707.5	1.26	1.29

LTE band 12 , BW1.4MHz Bandwidth, QPSK (-26dBc BW)

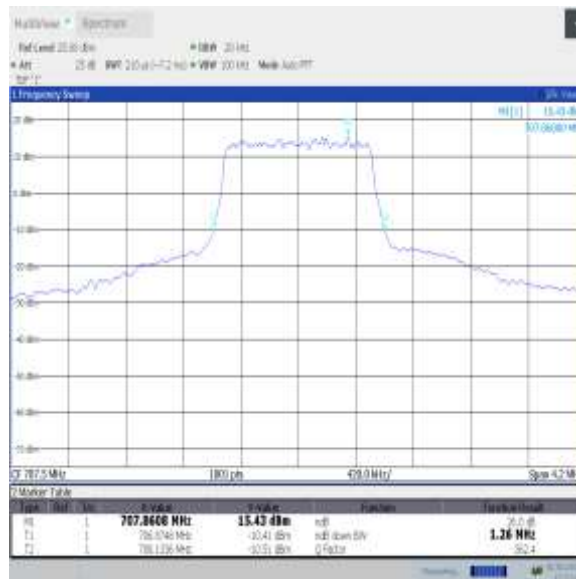

LTE band 12 , BW1.4MHz Bandwidth,16QAM (-26dBc BW)



LTE band 12 , 3MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
707.5	2.87	2.87

LTE band 12 , 3MHz Bandwidth, QPSK (-26dBc BW)



LTE band 12 , 3MHz Bandwidth,16QAM (-26dBc BW)



LTE band 12 , 5MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
707.5	4.95	4.95

LTE band 12 , 5MHz Bandwidth, QPSK (-26dBc BW)



LTE band 12 , 5MHz Bandwidth,16QAM (-26dBc BW)




LTE band 12 , 10MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
707.5	9.92	9.74

LTE band 12 , 10MHz Bandwidth, QPSK (-26dBc BW)



LTE band 12 , 10MHz Bandwidth,16QAM (-26dBc BW)

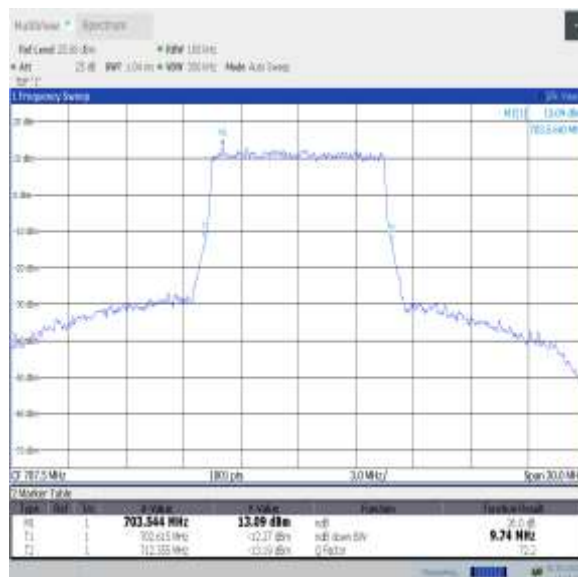

LTE band 13 , 5MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
782	4.96	4.96

LTE band 13 , 5MHz Bandwidth, QPSK (-26dBc BW)



LTE band 13 , 5MHz Bandwidth,16QAM (-26dBc BW)





Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
782	9.86	9.71

[illegible]

MultiView ☒ Spectrum

Ref Level: 20.00 dBm ☒ RBW: 1.00 MHz

Att: 25 dB BW: 1.00 MHz ☒ VSWR: 200 MHz Mode: Auto Sweep

1 Frequency Sweep

785.746 MHz 14.00 dBm 3.0 MHz/ 30.0 MHz

Table	Unit	X Value	Y Value	Function	Function Result
dB		785.746 MHz	14.00 dBm	dB	20.0 dB
T1		777.145 MHz	-11.25 dBm	dB down BW	9.71 MHz
T2		795.555 MHz	-11.25 dBm	Q Factor	30.0

LTE band 66 , BW1.4MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
1745	1.28	1.25

LTE band 66 , BW1.4MHz Bandwidth, QPSK (-26dBc BW)



LTE band 66 , BW1.4MHz Bandwidth,16QAM (-26dBc BW)



LTE band 66 , 3MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
1745	2.88	2.87

LTE band 66 , 3MHz Bandwidth, QPSK (-26dBc BW)



LTE band 66 , 3MHz Bandwidth,16QAM (-26dBc BW)




LTE band 66 , 5MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
1745	4.97	4.96

LTE band 66 , 5MHz Bandwidth, QPSK (-26dBc BW)



LTE band 66 , 5MHz Bandwidth,16QAM (-26dBc BW)

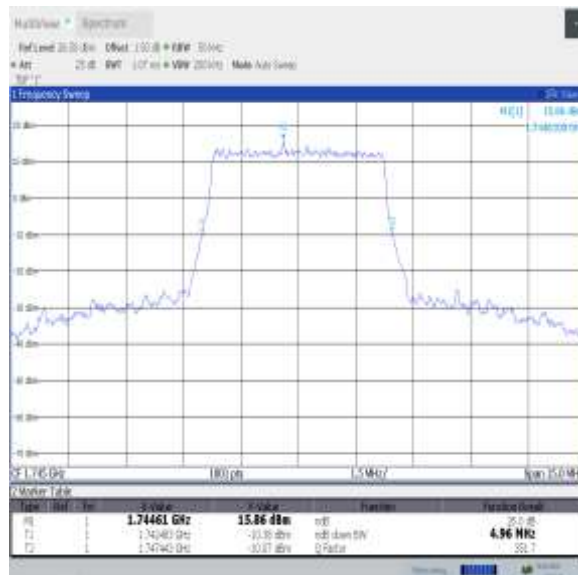

LTE band 66 , 10MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
1745	9.80	9.89

LTE band 66 , 10MHz Bandwidth, QPSK (-26dBc BW)



LTE band 66 , 10MHz Bandwidth,16QAM (-26dBc BW)



LTE band 66 , 15MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
1745	14.97	14.74

LTE band 66 , 15MHz Bandwidth, QPSK (-26dBc BW)




LTE band 66 , 15MHz Bandwidth,16QAM (-26dBc BW)



LTE band 66 , 20MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
1745	19.42	19.36

LTE band 66 , 20MHz Bandwidth, QPSK (-26dBc BW)

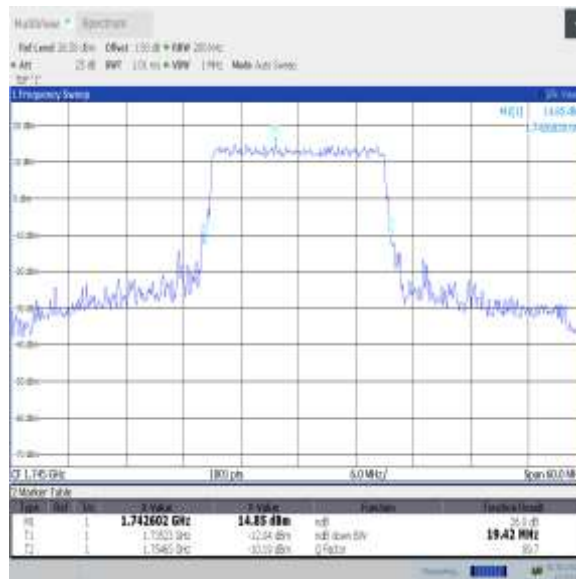

LTE band 66 , 20MHz Bandwidth,16QAM (-26dBc BW)



Note: Expanded measurement uncertainty is $U = 3428 \text{ Hz}$, $k = 2$

A.6 BAND EDGE COMPLIANCE

Reference

FCC: CFR Part 2.1051, 22.917, 24.238, 27.53.

A.6.1 Measurement limit

Part 22.917 For operations in the 824–849MHz band, the FCC limit is $43 + 10 \log (P)$ dB below the transmitter power(P) in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

Part 27.53(m) specifies for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Part 27.53(g) states for operations in the 600 MHz band and the 698–746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

A.6.2 Measurement Procedure

The testing follows ANSI C63.26

- a) The EUT was connected to spectrum analyzer and system simulator via a power divider.
- b) The band edges of low and high channels for the highest RF powers were measured.
- c) Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
- d) Set spectrum analyzer with RMS detector.
- e) The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- f) Checked that all the results comply with the emission limit line.


A.6.3 Measurement result

Only worst case result is given below

LTE band 2

OBW: 1RB-low_offset

LOW BAND EDGE BLOCK-1RB-low_offset

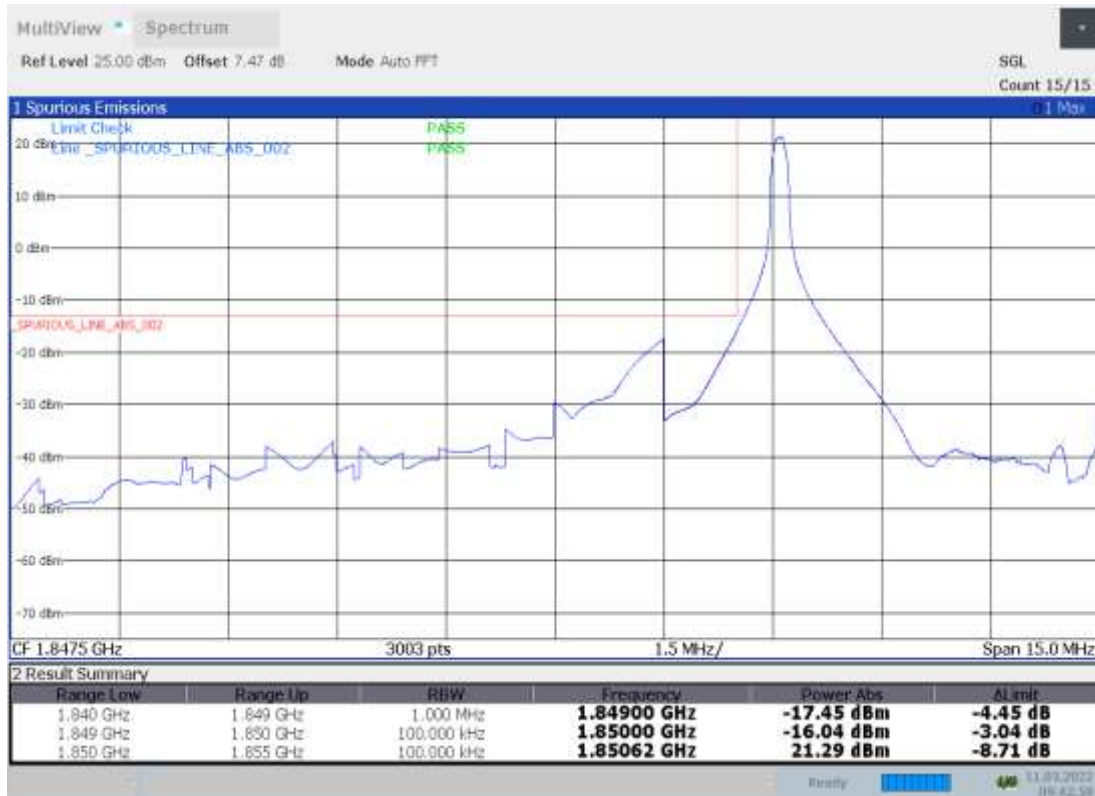

HIGH BAND EDGE BLOCK-1RB-high_offset



LOW BAND EDGE BLOCK-20MHz-100%RB



HIGH BAND EDGE BLOCK-20MHz-100%RB



LTE band 5

OBW: 1RB-low_offset

LOW BAND EDGE BLOCK-1RB-low_offset



HIGH BAND EDGE BLOCK-1RB-high_offset



LOW BAND EDGE BLOCK-10MHz-100%RB




HIGH BAND EDGE BLOCK-10MHz-100%RB



LTE band 7


LOW BAND EDGE BLOCK-1RB-low_offset

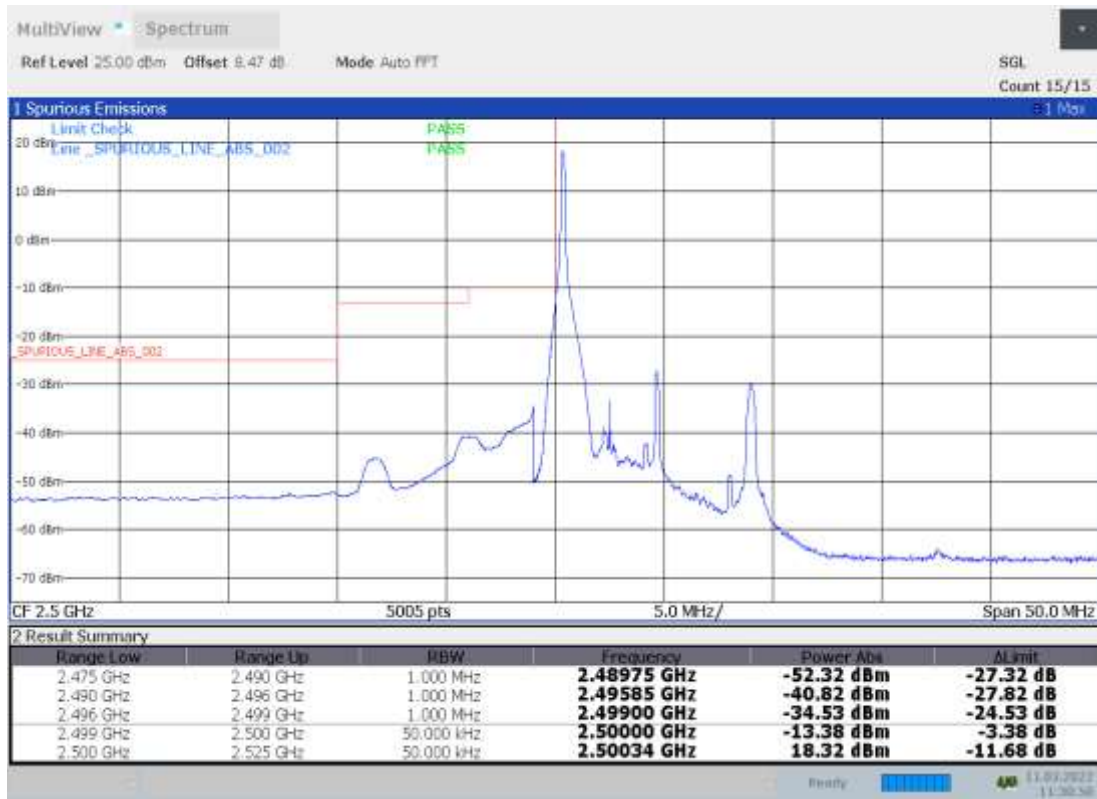

HIGH BAND EDGE BLOCK-1RB-high_offset



LOW BAND EDGE BLOCK-20MHz-100%RB

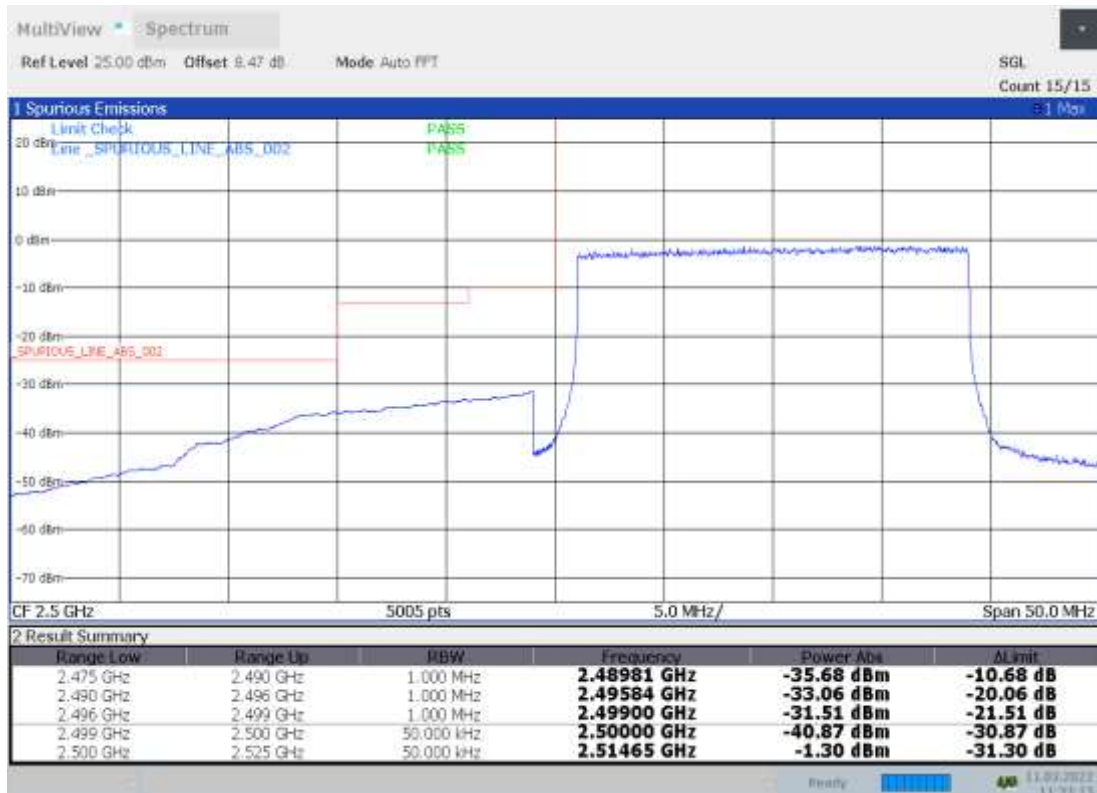

HIGH BAND EDGE BLOCK-20MHz-100%RB




LTE band 12

LOW BAND EDGE BLOCK-1RB-low_offset



HIGH BAND EDGE BLOCK-1RB-high_offset

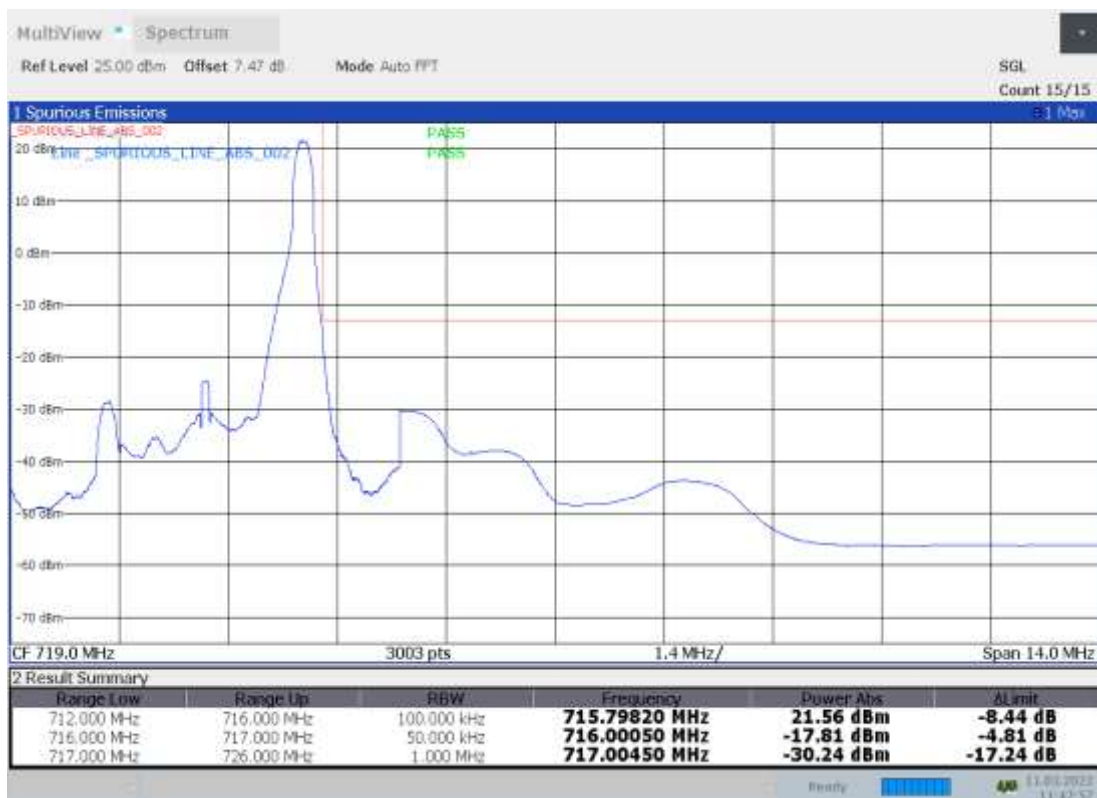

LOW BAND EDGE BLOCK-10MHz-100%RB




HIGH BAND EDGE BLOCK-10MHz-100%RB



LTE band 13

LOW BAND EDGE BLOCK-1RB-low_offset

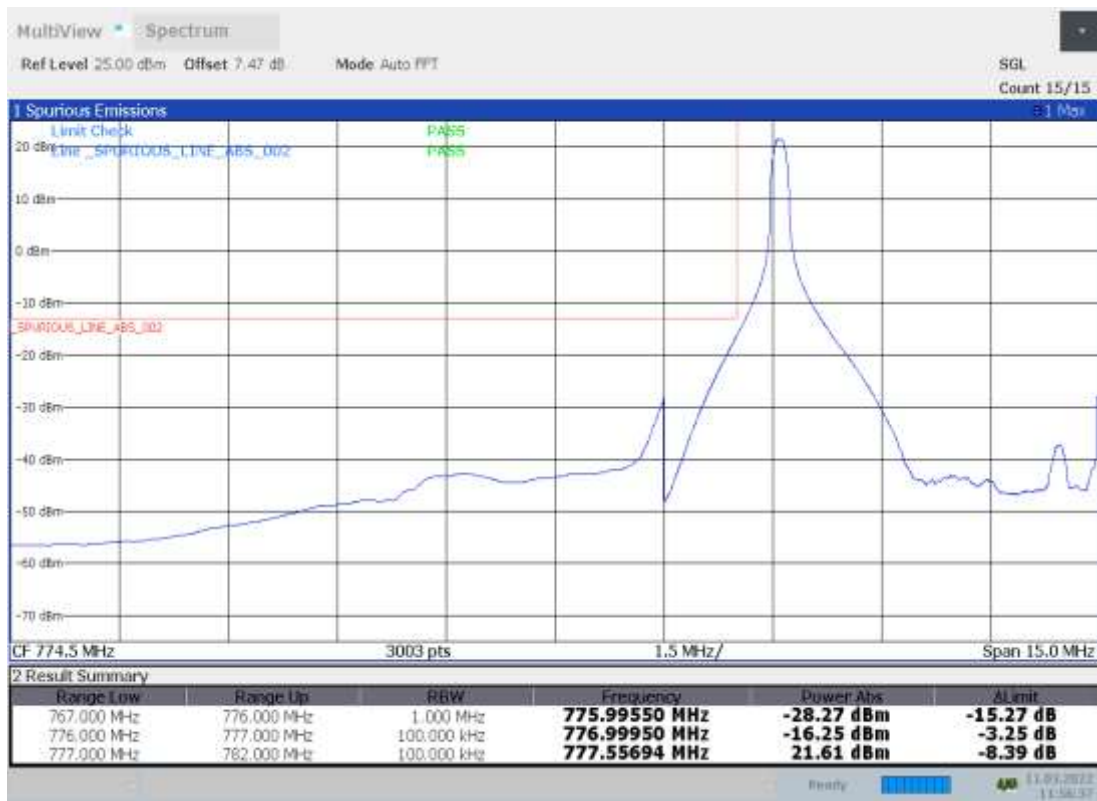

HIGH BAND EDGE BLOCK-1RB-high_offset



LOW BAND EDGE BLOCK-5MHz-100%RB




HIGH BAND EDGE BLOCK-5MHz-100%RB



LTE band 66

LOW BAND EDGE BLOCK-1RB-low_offset

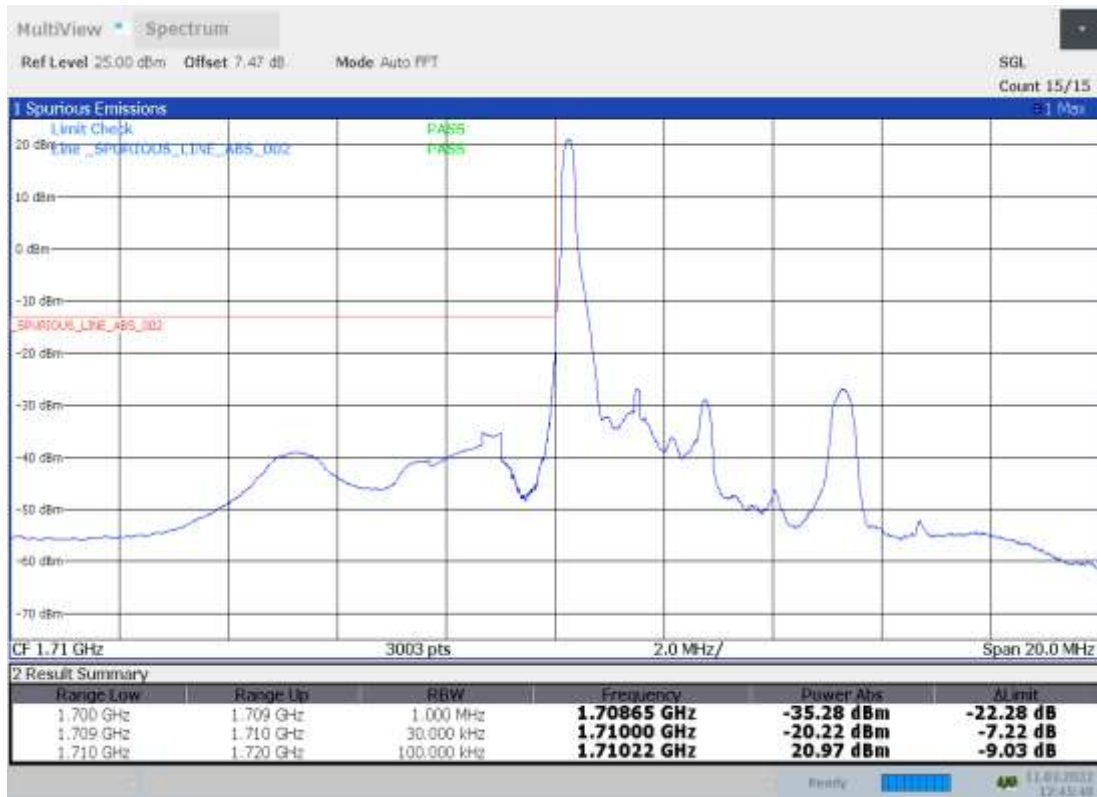

HIGH BAND EDGE BLOCK-1RB-high_offset



LOW BAND EDGE BLOCK-20MHz-100%RB



HIGH BAND EDGE BLOCK-20MHz-100%RB



Note: Expanded measurement uncertainty is $U = 0.49\text{dB}(100\text{kHz}-2\text{GHz})/1.21\text{dB}(2\text{GHz}-26.5\text{GHz})$, $k = 1.96$

A.7 CONDUCTED SPURIOUS EMISSION

Reference

FCC: CFR Part 2.1051, 22.917, 24.238, 27.53.

A.7.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1051 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 9 GHz, data taken from 10 MHz to 25 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is set to 30001 which is greater than span/RBW.

A. 7.2 Measurement Limit

Part 22.917, Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Part 27.53(m)(4) specifies for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Part 27.53(a) states for mobile and portable stations operating in the 2305–2315 MHz and 2350–2360 MHz bands: By a factor of not less than: $43 + 10 \log(P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log(P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log(P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log(P)$ dB on all frequencies between 2328 and 2337 MHz;

By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz; By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.


A. 7.3 Measurement result

Only worst case result is given below

LTE band 2 : 30MHz – 19.1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

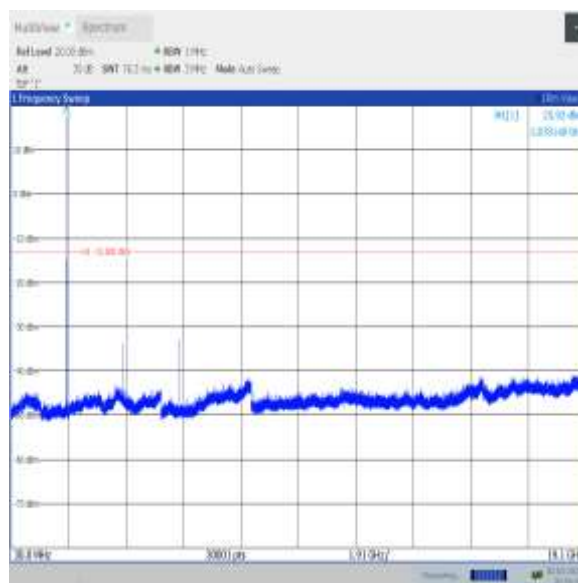

LTE band 5 : 30MHz – 8.49GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

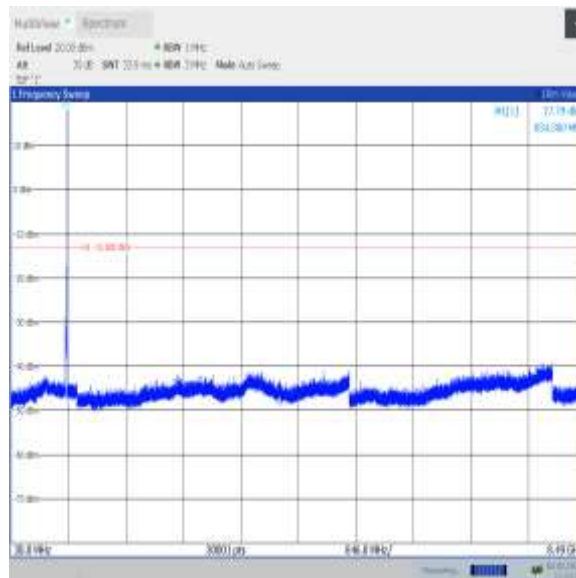

LTE band 7: 30MHz – 25.7GHz

Spurious emission limit –25dBm.


NOTE: peak above the limit line is the carrier frequency.

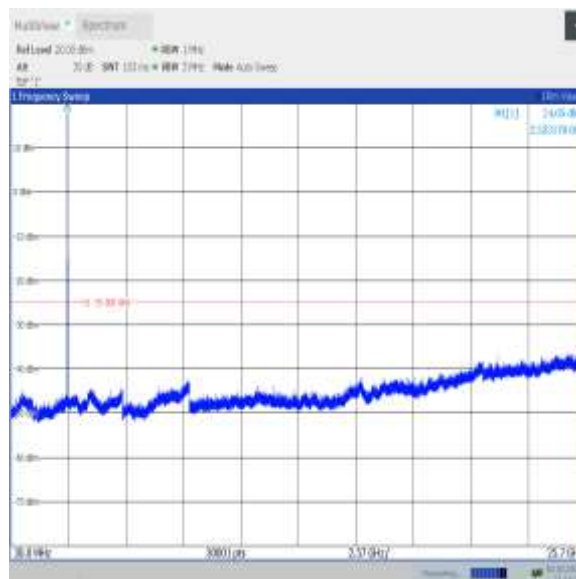

LTE band 12: 30MHz – 7.16GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

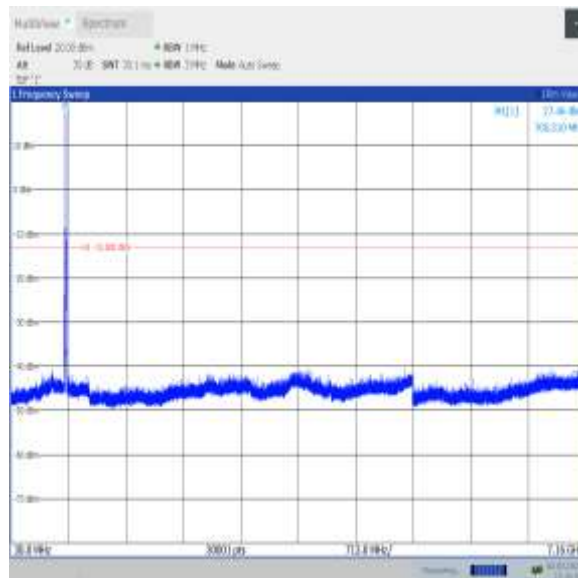

LTE band 13: 30MHz – 7.87GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

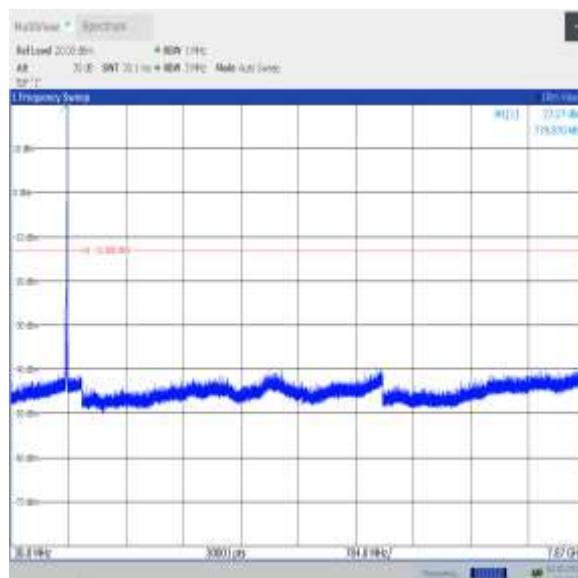

LTE band 66: 30MHz – 17.8GHz

Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

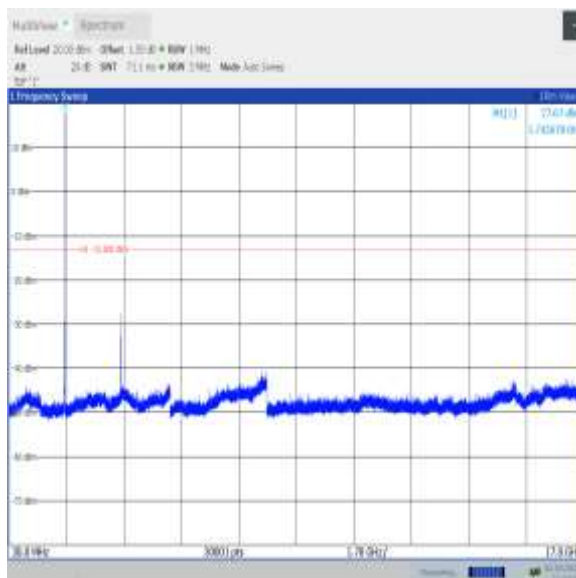

Note: Expanded measurement uncertainty is $U = 0.49\text{dB}(100\text{KHz}-2\text{GHz})/1.21\text{dB}(2\text{GHz}-26.5\text{GHz})$, $k = 1.96$

A.8 PEAK-TO-AVERAGE POWER RATIO

Reference

FCC: CFR Part 24.232, 27.50(d), KDB971168 D01(5.7).

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval to 1 ms
- e) Record the maximum PAPR level associated with a probability of 0.1%

A.8.1 Measurement limit

not exceed 13 dB

A.8.2 Measurement results

Only worst case result is given below



Frequency(MHz)	Bandwidth(MHz)	PAPR(dB)	
		QPSK	16QAM
1880.0	20	5.50	6.26

Keysight ADS Spectrum Analyzer window showing a plot of Power (dBm) versus Frequency (GHz). The plot displays a signal (red line) and a noise floor (blue line). The signal is centered around 0.5 GHz. The noise floor is relatively flat, around -10 dBm. The signal peak is at approximately 0.5 GHz with a power of about 10 dBm. The plot is titled "Spectrum" and shows "Ref Level: 10.00 dBm", "Att: 11 dB", and "Mod Time: 10.00".

MultiView • Spectrum

Ref Level: 10.00 dBm • Adj R: 20.00 dB

* Att: 11 dB Mode: Time 2.0 ms

11.00 dBm

1.00 GHz

2 View of Summary

Summary: 10.00 dBm


Trace	Peak	Power	10%	5%	0.1%
Trace 1	21.50 dBm	20.72 dBm	7.45 dB	2.94 dB	1.00 dB

10.00 dBm


LTE band 5

Frequency(MHz)	Bandwidth(MHz)	PAPR(dB)	
		QPSK	16QAM
836.5	10	5.54	6.36

LTE band 5, 10MHz Bandwidth, QPSK (PAPR)

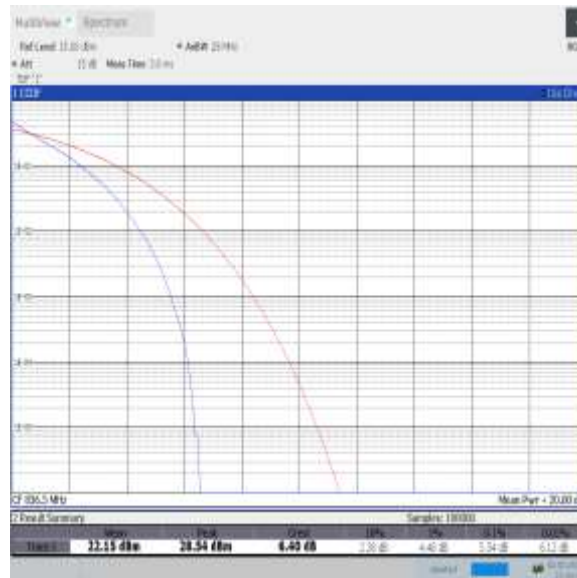


LTE band 5, 10MHz Bandwidth, 16QAM (PAPR)

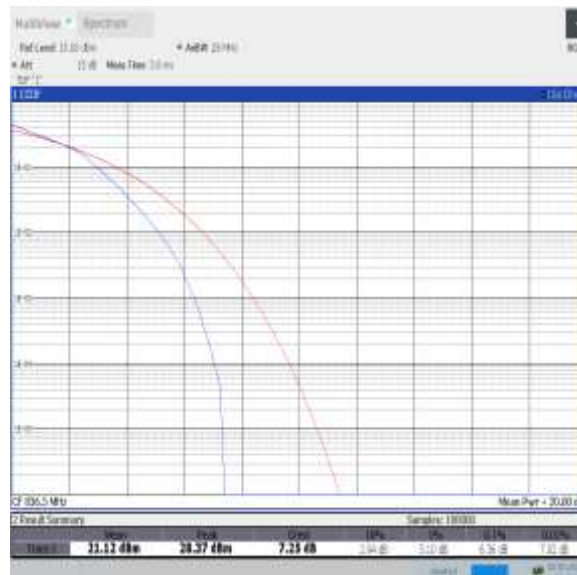


LTE band 7

Frequency(MHz)	Bandwidth(MHz)	PAPR(dB)	
		QPSK	16QAM
2535.0	20	6.02	6.72

LTE band 7, 20MHz Bandwidth, QPSK (PAPR)

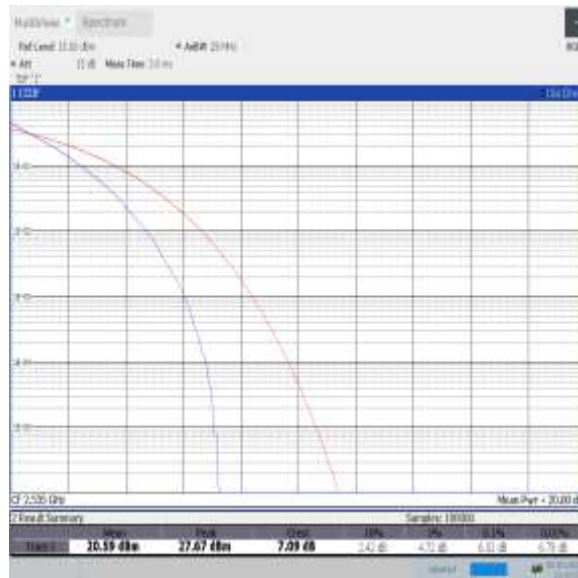


LTE band 7, 20MHz Bandwidth, 16QAM (PAPR)

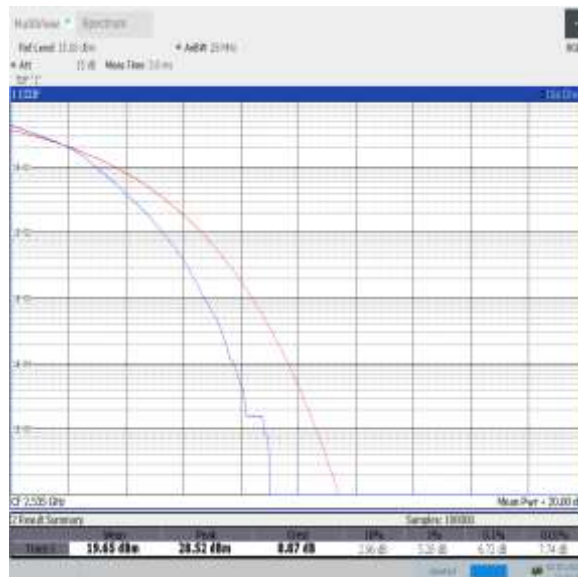


LTE band 12

Frequency(MHz)	Bandwidth(MHz)	PAPR(dB)	
		QPSK	16QAM
707.5	10	5.38	6.16

LTE band 12, 10MHz Bandwidth, QPSK (PAPR)

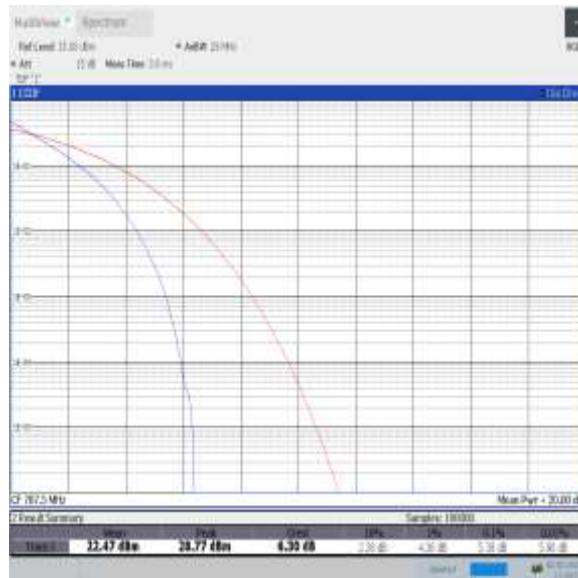

LTE band 12, 10MHz Bandwidth, 16QAM (PAPR)

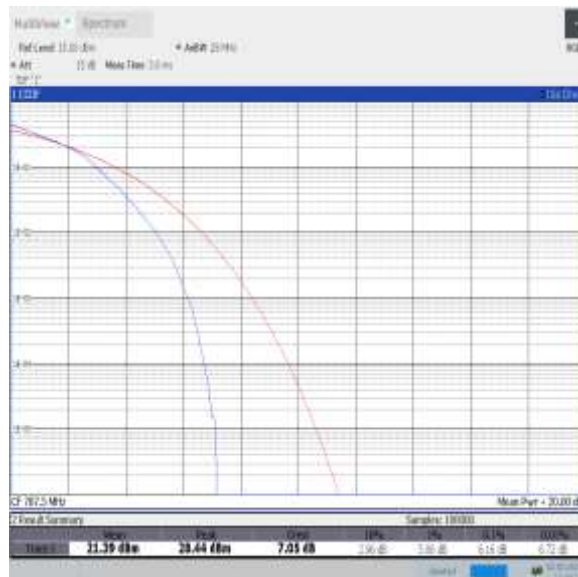



Frequency(MHz)	Bandwidth(MHz)	PAPR(dB)	
		QPSK	16QAM
782.0	10	5.42	6.28

MultiView - Spectrum

Ref Level: 11.00 dBm * Auto (2000)

* Att: 11 dB Meas Time: 0.00 s

11.22

-10 dBm

10 dBm

0 dBm

-10 dBm

-20 dBm

-30 dBm

-40 dBm

-50 dBm

-60 dBm

-70 dBm

-80 dBm

-90 dBm

-100 dBm

11.2

11.4

11.6

11.8

12.0

12.2

12.4

12.6

12.8

13.0

13.2

13.4

13.6

13.8

14.0

14.2

14.4

14.6

14.8

15.0

15.2

15.4

15.6

15.8

16.0

16.2

16.4

16.6

16.8

17.0

17.2

17.4

17.6

17.8

18.0

18.2

18.4

18.6

18.8

19.0

19.2

19.4

19.6

19.8

20.0

20.2

20.4

20.6

20.8

21.0

21.2

21.4

21.6

21.8

22.0

22.2

22.4

22.6

22.8

23.0

23.2

23.4

23.6

23.8

24.0

24.2

24.4

24.6

24.8

25.0

25.2

25.4

25.6

25.8

26.0

26.2

26.4

26.6

26.8

27.0

27.2

27.4

27.6

27.8

28.0

28.2

28.4

28.6

28.8

29.0

29.2

29.4

29.6

29.8

30.0

30.2

30.4

30.6

30.8

31.0

31.2

31.4

31.6

31.8

32.0

32.2

32.4

32.6

32.8

33.0

33.2

33.4

33.6

33.8

34.0

34.2

34.4

34.6

34.8

35.0

35.2

35.4

35.6

35.8

36.0

36.2

36.4

36.6

36.8

37.0

37.2

37.4

37.6

37.8

38.0

38.2

38.4

38.6

38.8

39.0

39.2

39.4

39.6

39.8

40.0

40.2

40.4

40.6

40.8

41.0

41.2

41.4

41.6

41.8

42.0

42.2

42.4

42.6

42.8

43.0

43.2

43.4

43.6

43.8

44.0

44.2

44.4

44.6

44.8

45.0

45.2

45.4

45.6

45.8

46.0

46.2

46.4

46.6

46.8

47.0

47.2

47.4

47.6

47.8

48.0

48.2

48.4

48.6

48.8

49.0

49.2

49.4

49.6

49.8

50.0

50.2

50.4

50.6

50.8

51.0

51.2

51.4

51.6

51.8

52.0

52.2

52.4

52.6

52.8

53.0

53.2

53.4

53.6

53.8

54.0

54.2

54.4

54.6

54.8

55.0

55.2

55.4

55.6

55.8

56.0

56.2

56.4

56.6

56.8

57.0

57.2

57.4

57.6

57.8

58.0

58.2

58.4

58.6

58.8

59.0

59.2

59.4

59.6

59.8

60.0

60.2

60.4

60.6

60.8

61.0

61.2

61.4

61.6

61.8

62.0

62.2

62.4

62.6

62.8

63.0

63.2

63.4

63.6

63.8

64.0

64.2

64.4

64.6

64.8

65.0

65.2

65.4

65.6

65.8

66.0

66.2

66.4

66.6

66.8

67.0

67.2

67.4

67.6

67.8

68.0

68.2

68.4

68.6

68.8

69.0

69.2

69.4

69.6

69.8

70.0

70.2

70.4

70.6

70.8

71.0

71.2

71.4

71.6

71.8

72.0

72.2

72.4

72.6

72.8

73.0

73.2

73.4

73.6

73.8

74.0

74.2

74.4

74.6

74.8

75.0

75.2

75.4

75.6

75.8

76.0

76.2

76.4

76.6

76.8

77.0

77.2

77.4

77.6

77.8

78.0

78.2

78.4

78.6

78.8

79.0

79.2

79.4

79.6

79.8

80.0

80.2

80.4

80.6

80.8

81.0

81.2

81.4

81.6

81.8

82.0

82.2

82.4

82.6

82.8

83.0

83.2

83.4

83.6

83.8

84.0

84.2

84.4

84.6

84.8

85.0

85.2

85.4

85.6

85.8

86.0

86.2

86.4

86.6


8

[illegible]


LTE band 66

Frequency(MHz)	Bandwidth(MHz)	PAPR(dB)	
		QPSK	16QAM
2593.0	20	5.40	6.22

LTE band 66, 20MHz Bandwidth, QPSK (PAPR)

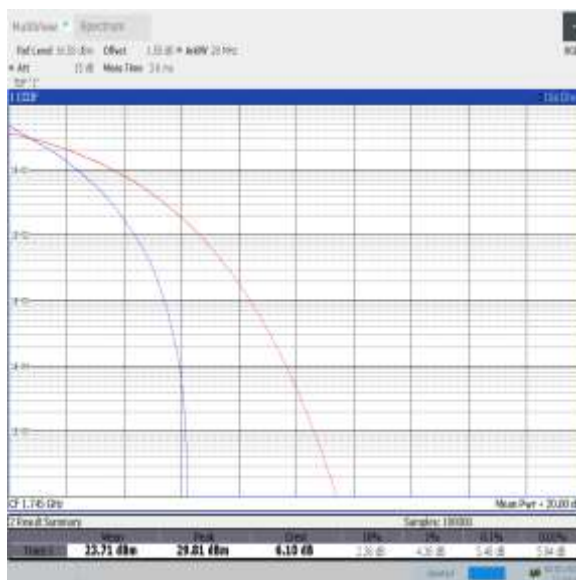

LTE band 66, 20MHz Bandwidth, 16QAM (PAPR)

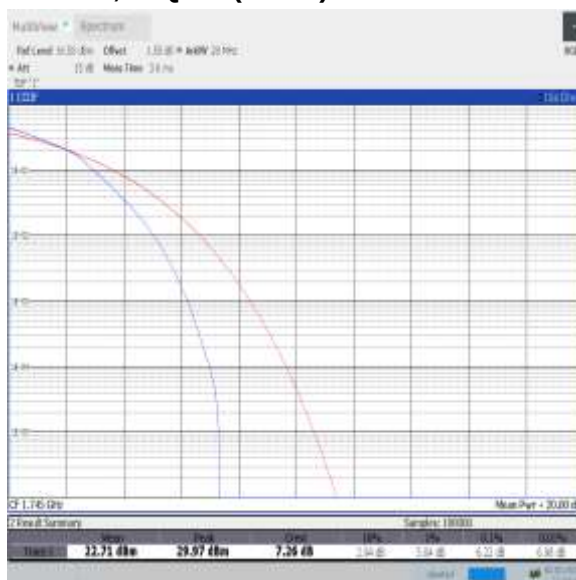

Note: Expanded measurement uncertainty is $U = 0.48$, $k = 2$

END OF REPORT