
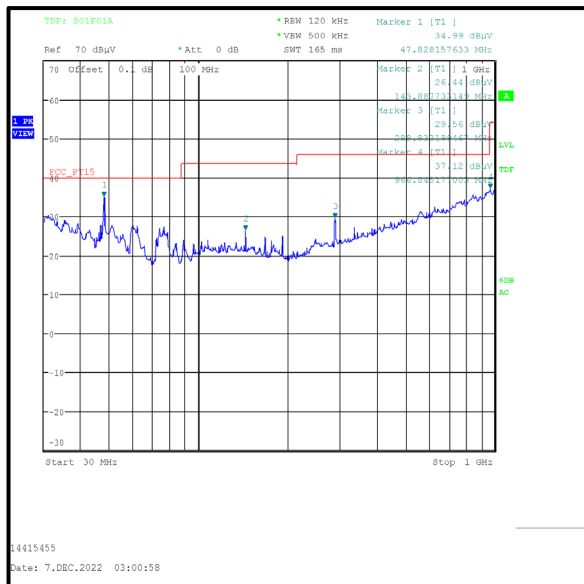
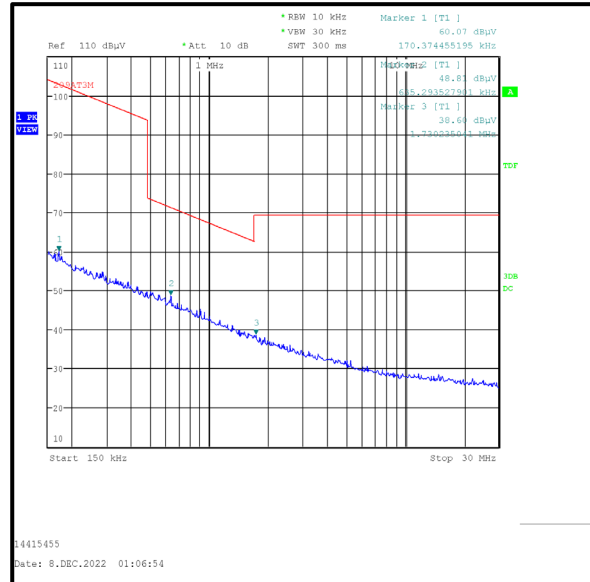


**Transmitter Radiated Emissions (continued)****Results: Quasi-Peak / Middle Channel / LE2M / Metal Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
167.877	Horizontal	24.3	43.5	19.2	Complied

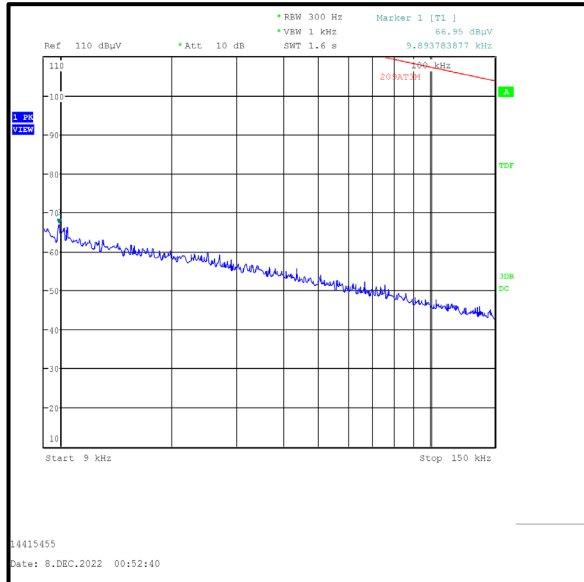

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

## 5.2 Transmitter Radiated Emissions >1 GHz

### Test Summary:

<b>Test Engineer:</b>	Nick Steele	<b>Test Dates:</b>	05 December 2022 to 07 December 2022
<b>Test Sample Serial Number:</b>	60481413 / 5225102-1 & 60481423 / 5225100-2		

<b>FCC Reference:</b>	Parts 15.247(d) & 15.209(a)
<b>ISED Canada Reference:</b>	RSS-Gen 6.13 & 8.9 / RSS-247 5.5
<b>Test Method Used:</b>	FCC KDB 558074 Sections 8.1 c)3), 8.5 & 8.6 referencing ANSI C63.10 Sections 6.3, 6.6, 11.11 & 11.12
<b>Frequency Range</b>	1 GHz to 25 GHz

### Environmental Conditions:

<b>Temperature (°C):</b>	20 to 22
<b>Relative Humidity (%):</b>	38

### Note(s):

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. All other emissions shown on the pre-scans were investigated and found to be ambient, > 20 dB below the appropriate limit or below the noise floor of the measurement system.
3. The emission shown on the 1 GHz to 3 GHz plot is the EUT fundamental.
4. \*In accordance with ANSI C63.10 Section 6.6.4.3, Note 1, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.
5. Pre-scans above 1 GHz were performed in a fully anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT.
6. Final measurements above 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
7. Pre-scans were performed and a marker placed on the highest measured level of the appropriate plot. The test receiver resolution bandwidth was set to 1 MHz and video bandwidth 3 MHz. The sweep time was set to auto. Peak and average measurements were performed with their own appropriate detectors during the pre-scan measurements.
8. The reference level for the emission in the non-restricted band was established by following ANSI C63.10 Section 11.11.2 procedure.
9. -20 dBc limit applies in non-restricted band as the conducted output power measurements were performed using a peak detector.

**Transmitter Radiated Emissions (continued)****Results: Bottom Channel / Peak / LE2M / Plastic Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2489.500	Horizontal	49.6	54.0*	4.4	Complied
2514.308	Horizontal	50.6	54.0*	3.4	Complied
2530.500	Horizontal	50.2	54.0*	3.8	Complied
2546.000	Horizontal	50.4	54.0*	3.6	Complied
4803.190	Horizontal	53.4	74.0	20.6	Complied
7207.400	Horizontal	51.0	54.0*	3.0	Complied

**Results: Bottom Channel / Average / LE2M / Plastic Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Duty cycle correction (dB)	Corrected Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
4803.970	Horizontal	43.3	4.8	48.1	54.0	5.9	Complied

**Results: Middle Channel / Peak / LE2M / Plastic Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2328.667	Horizontal	49.3	54.0*	4.7	Complied
2384.500	Horizontal	51.5	54.0*	2.5	Complied
2392.577	Horizontal	49.2	54.0*	4.8	Complied
2553.026	Horizontal	49.3	54.0*	4.7	Complied
4881.335	Horizontal	54.2	74.0	19.8	Complied
7318.630	Horizontal	50.3	54.0*	3.7	Complied

**Results: Middle Channel / Average / LE2M / Plastic Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Duty cycle correction (dB)	Corrected Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
4879.370	Horizontal	43.9	4.8	48.7	54.0	5.3	Complied





**Transmitter Radiated Emissions (continued)****Results: Top Channel / Peak / LE2M / Plastic Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2336.808	Horizontal	50.4	54.0*	3.6	Complied
2353.103	Horizontal	50.8	54.0*	3.2	Complied
2368.679	Horizontal	52.7	54.0*	1.3	Complied
2384.500	Horizontal	51.5	54.0*	2.5	Complied
4959.270	Horizontal	53.5	74.0	20.5	Complied
7441.330	Horizontal	49.1	54.0*	4.9	Complied

**Results: Top Channel / Average / LE2M / Plastic Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Duty cycle correction (dB)	Corrected Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
4959.880	Horizontal	42.1	4.8	46.9	54.0	7.1	Complied

Transmitter Radiated Emissions (continued)

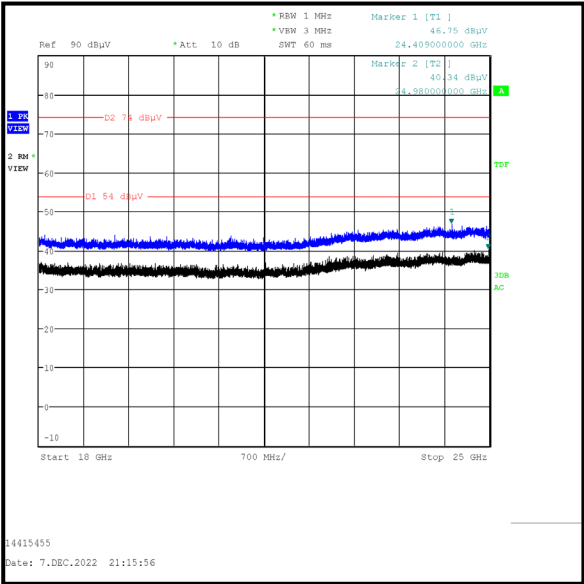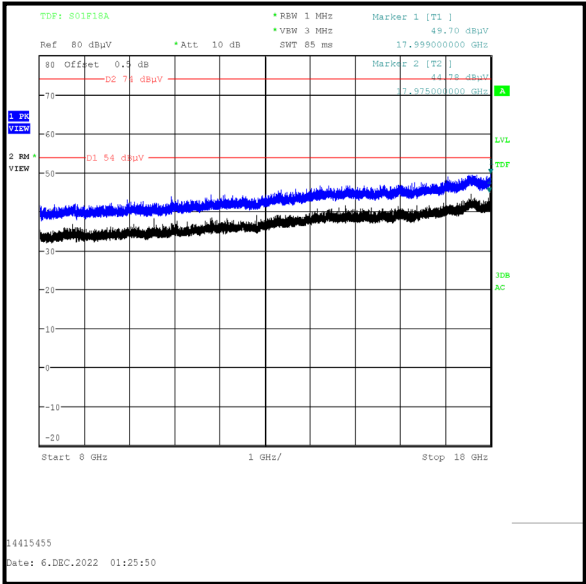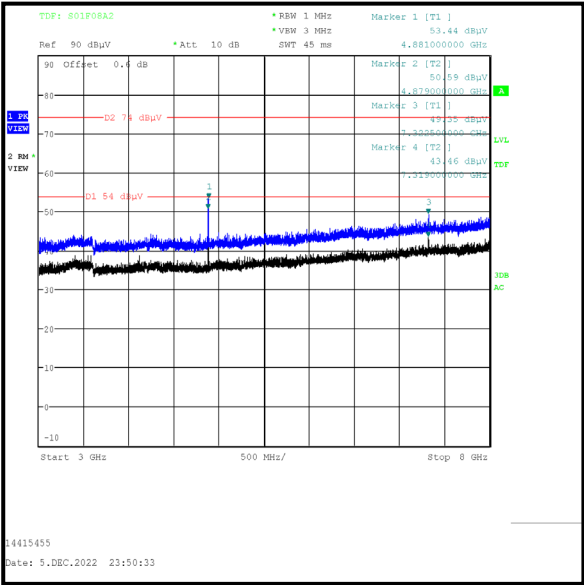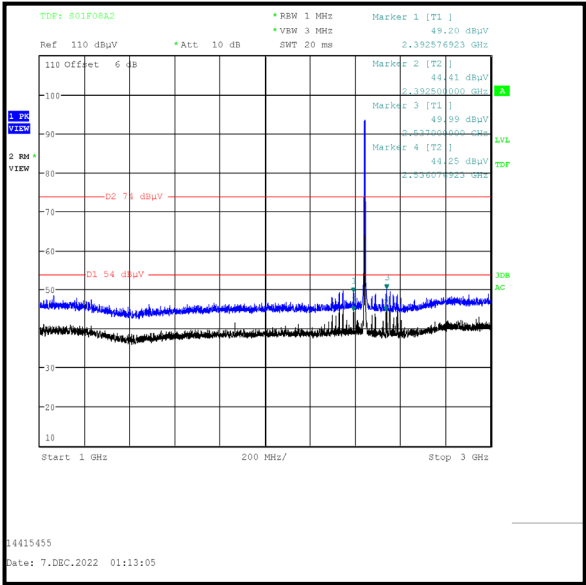

**Transmitter Radiated Emissions (continued)****Results: Bottom Channel / Peak / LE2M / Metal Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2274.526	Horizontal	46.5	54.0*	7.5	Complied
2290.500	Horizontal	46.4	54.0*	7.6	Complied
2450.500	Horizontal	46.0	54.0*	8.0	Complied
2500.000	Horizontal	45.7	54.0*	8.3	Complied
4803.119	Horizontal	60.3	74.0	13.7	Complied
7207.651	Horizontal	52.7	54.0*	1.3	Complied

**Results: Bottom Channel / Average / LE2M / Metal Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Duty cycle correction (dB)	Corrected Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
4803.455	Horizontal	50.0	2.4	52.4**	54.0	1.6	Complied

**Results: Middle Channel / Peak / LE2M / Metal Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2280.526	Horizontal	45.9	54.0*	8.1	Complied
2296.500	Horizontal	47.7	54.0*	6.3	Complied
2312.654	Horizontal	47.6	54.0*	6.4	Complied
2328.500	Horizontal	46.2	54.0*	7.8	Complied
4879.087	Horizontal	60.7	74.0	13.3	Complied
7318.862	Horizontal	52.9	54.0*	1.1	Complied

**Results: Middle Channel / Average / LE2M / Metal Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Duty cycle correction (dB)	Corrected Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
4879.183	Horizontal	50.2	2.4	52.6**	54.0	1.4	Complied





**Transmitter Radiated Emissions (continued)****Results: Top Channel / Peak / LE2M / Metal Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2304.526	Horizontal	45.9	54.0*	8.1	Complied
2323.000	Horizontal	46.1	54.0*	7.9	Complied
2352.500	Horizontal	45.6	54.0*	8.4	Complied
2367.000	Horizontal	45.6	54.0*	8.4	Complied
4960.897	Horizontal	60.1	74.0	13.9	Complied
7438.894	Horizontal	53.0	54.0*	1.0	Complied

**Results: Top Channel / Average / LE2M / Metal Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Duty cycle correction (dB)	Corrected Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
4959.407	Horizontal	49.3	2.4	51.7**	54.0	2.3	Complied

Transmitter Radiated Emissions (continued)

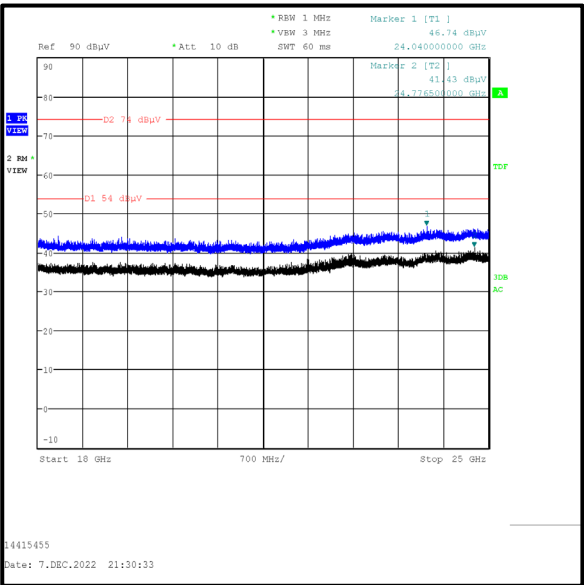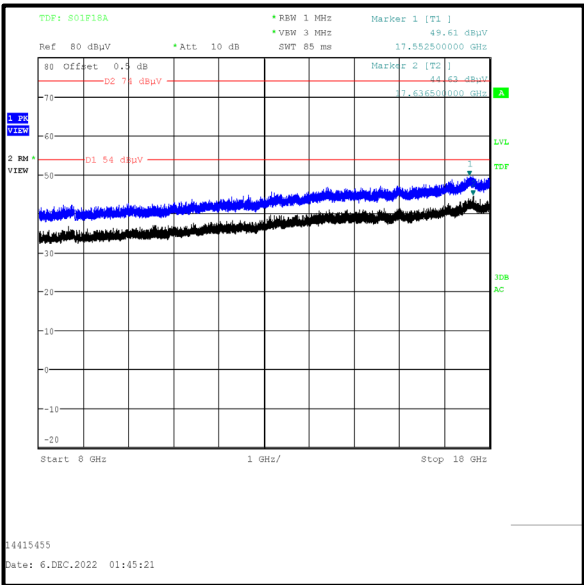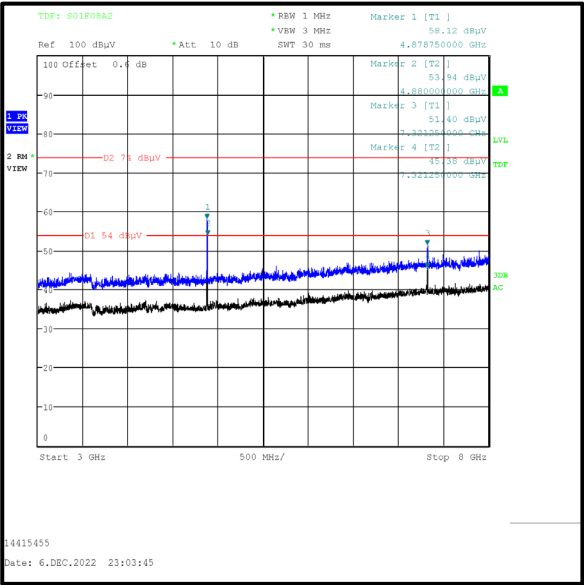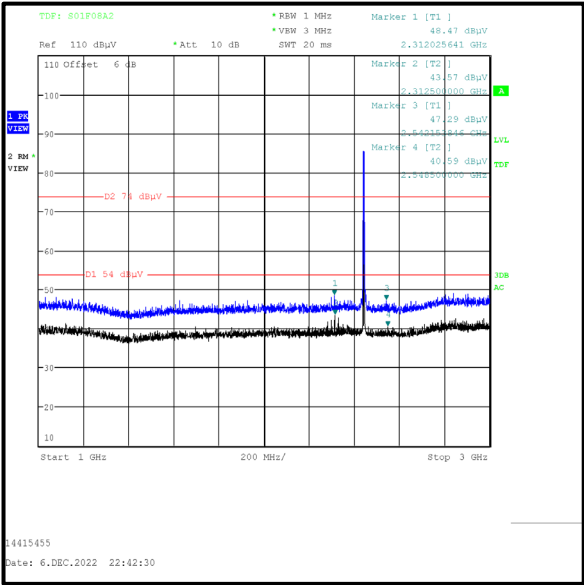



**5.3 Transmitter Band Edge Radiated Emissions****Test Summary:**

<b>Test Engineer:</b>	Nick Steele	<b>Test Dates:</b>	06 December 2022 & 07 December 2022
<b>Test Sample Serial Number:</b>	60481413 / 5225102-1 & 60481423 / 5225100-2		

<b>FCC Reference:</b>	Parts 15.247(d) & 15.209(a)
<b>ISED Canada Reference:</b>	RSS-Gen 6.13 / RSS-247 5.5
<b>Test Method Used:</b>	KDB 558074 Section 8.7 referencing ANSI C63.10 Sections 11.11, 11.12 & 11.13

**Environmental Conditions:**

<b>Temperature (°C):</b>	20 to 22
<b>Relative Humidity (%):</b>	34 to 38

**Transmitter Band Edge Radiated Emissions (continued)****Note(s):**

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. As the lower band edge is adjacent to a non-restricted band, only peak measurements are required. In accordance with ANSI C63.10 Section 11.11.1, the test method in Section 11.11.3 was followed: the test receiver resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The test receiver was left to sweep for a sufficient length of time in order to maximise the carrier level and out-of-band emissions. A marker and corresponding reference level line were placed on the peak of the carrier. As the maximum peak conducted output power was measured using a peak detector in accordance with ANSI C63.10 Section 11.9.1.1 an out-of-band limit line was placed 20 dB (ANSI C63.10 Section 11.11.1(a)) below the peak level. A marker was placed on the band edge spot frequencies. Marker frequency and levels were recorded.
3. As the upper band edge is adjacent to a restricted band, both peak and average measurements were recorded by placing a marker at the edge of the band. For peak measurements the test receiver resolution bandwidth was set to 1 MHz and the video bandwidth 3 MHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. For average measurements the test receiver resolution bandwidth was set to 1 MHz and the video bandwidth 3 MHz. An RMS detector was used, sweep time was set to auto and trace mode was trace averaging over 300 sweeps. A marker was placed on the band edge spot frequencies and a second marker placed on the highest emission level in the adjacent restricted band of operation (where a higher level emission was present). Marker frequencies and levels were recorded.
4. There is a restricted band 10 MHz below the lower band edge. The test receiver was set up as follows: the RBW set to 1 MHz, the VBW set to 3 MHz, with the sweep time set to auto couple. Peak and average measurements were performed with peak and RMS detectors respectively. Markers were placed on the highest point on each trace.
5. As the EUT had a duty cycle < 98% the duty cycle correction factor has been applied to the upper band edge average results.
6. \* -20 dBc limit.

**Transmitter Band Edge Radiated Emissions (continued)****Results: Peak / LE / Plastic Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2399.700	Horizontal	43.7	72.9*	29.2	Complied
2400.000	Horizontal	40.5	72.9*	32.4	Complied
2483.500	Horizontal	60.8	74.0	13.2	Complied

**Results: Average / LE / Plastic Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Duty cycle correction (dB)	Corrected Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2483.500	Horizontal	47.6	2.0	49.6	54.0	4.4	Complied

**Results: 2310 MHz to 2390 MHz Restricted Band / Peak / LE / Plastic Lid**


Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2353.520	Horizontal	49.1	74.0	24.9	Complied

**Results: 2310 MHz to 2390 MHz Restricted Band / Average / LE / Plastic Lid**


Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Duty cycle correction (dB)	Corrected Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2338.080	Horizontal	35.7	2.0	37.7	54.0	16.3	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: LE / Plastic Lid

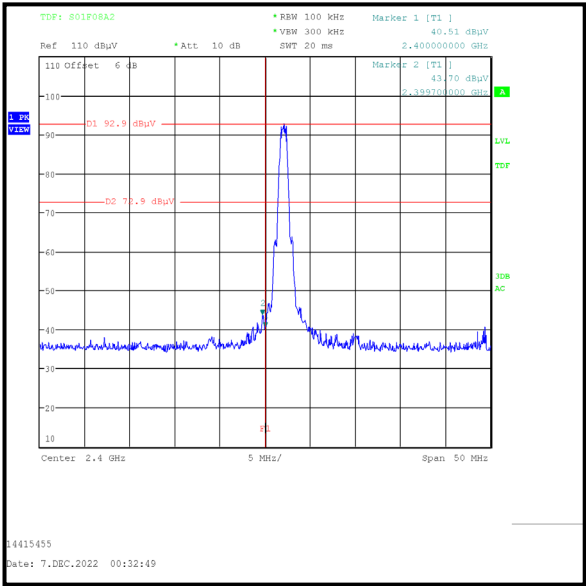

Lower Band Edge

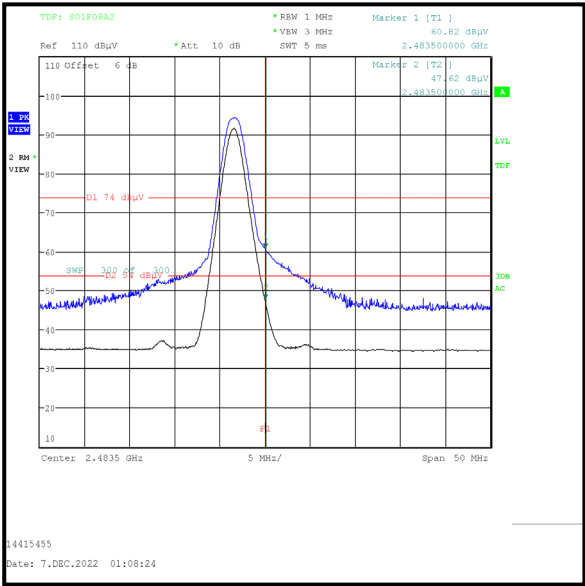

Upper Band Edge

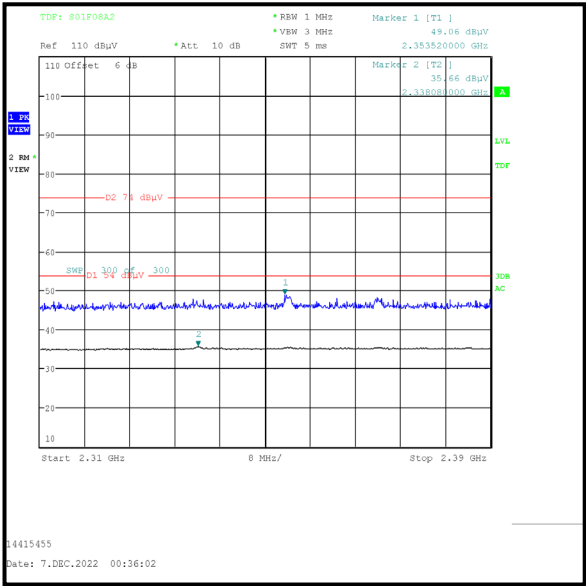

2310 MHz to 2390 MHz Restricted Band

**Transmitter Band Edge Radiated Emissions (continued)****Results: Peak / LE2M / Plastic Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2400.000	Horizontal	60.3	72.9*	12.6	Complied
2483.500	Horizontal	60.8	74.0	13.2	Complied

**Results: Average / LE2M / Plastic Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Duty cycle correction (dB)	Corrected Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2483.500	Horizontal	46.4	4.8	51.2	54.0	2.8	Complied

**Results: 2310 MHz to 2390 MHz Restricted Band / Peak / LE2M / Plastic Lid**


Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2354.240	Horizontal	49.5	74.0	24.5	Complied

**Results: 2310 MHz to 2390 MHz Restricted Band / Average / LE2M / Plastic Lid**


Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Duty cycle correction (dB)	Corrected Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2368.400	Horizontal	35.3	4.8	40.1	54.0	13.9	Complied

### Transmitter Band Edge Radiated Emissions (continued)


### Results: LE2M / Plastic Lid

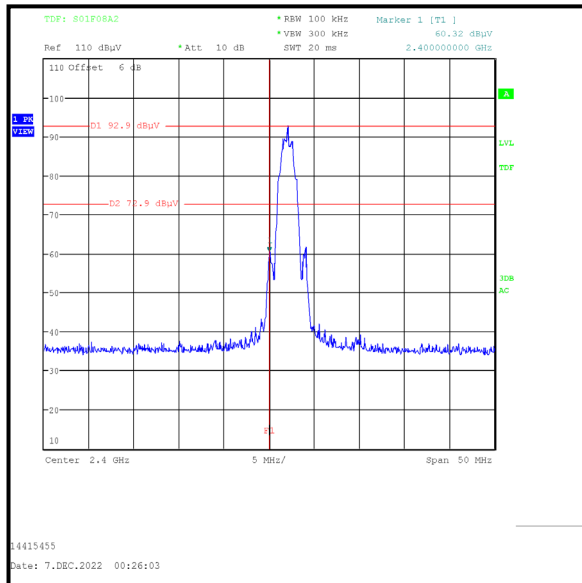

### Lower Band Edge

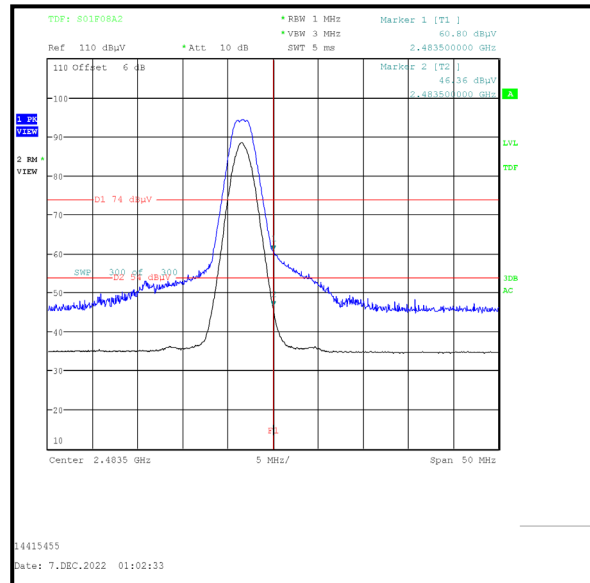

Upper Band Edge

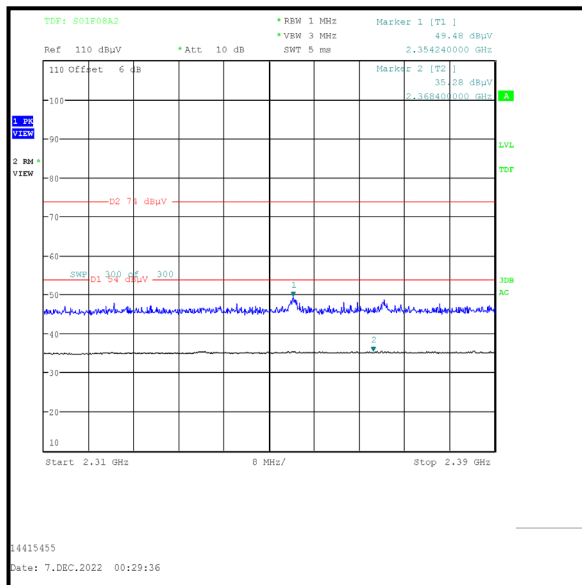

## 2310 MHz to 2390 MHz Restricted Band

**Transmitter Band Edge Radiated Emissions (continued)****Results: Peak / Coded S2 / Plastic Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2399.750	Horizontal	43.4	73.0*	29.6	Complied
2400.000	Horizontal	40.3	73.0*	32.7	Complied
2483.500	Horizontal	60.4	74.0	13.6	Complied

**Results: Average / Coded S2 / Plastic Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Duty cycle correction (dB)	Corrected Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2483.500	Horizontal	47.9	2.0	49.9	54.0	4.1	Complied

**Results: 2310 MHz to 2390 MHz Restricted Band / Peak / Coded S2 / Plastic Lid**


Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2353.680	Horizontal	49.0	74.0	25.0	Complied

**Results: 2310 MHz to 2390 MHz Restricted Band / Average / Coded S2 / Plastic Lid**


Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Duty cycle correction (dB)	Corrected Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2354.400	Horizontal	35.6	2.0	37.6	54.0	16.4	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Coded S2 / Plastic Lid

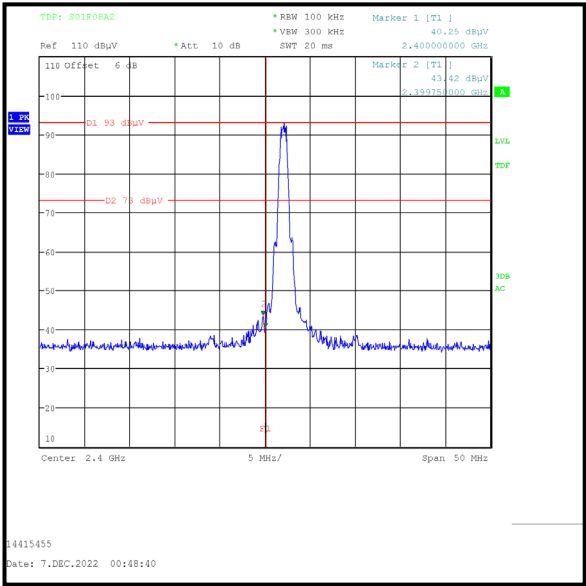

Lower Band Edge

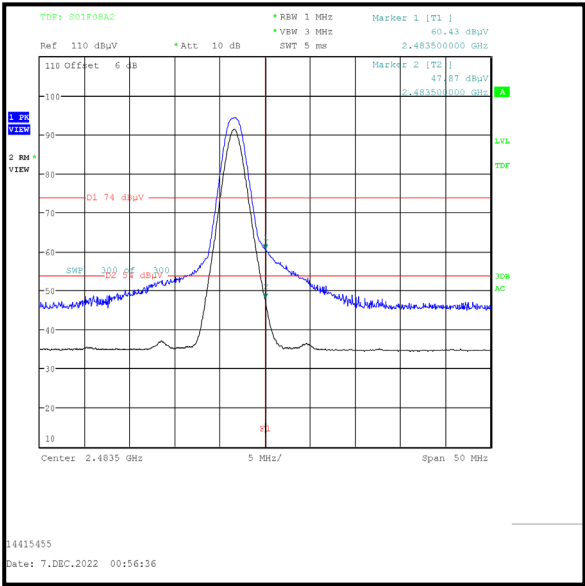

Upper Band Edge

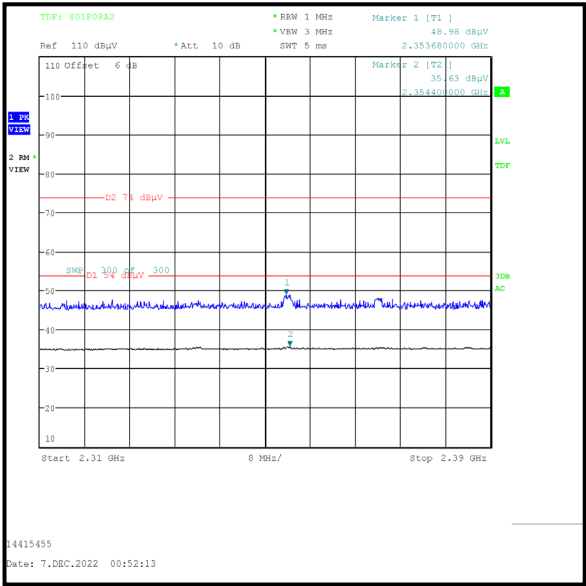

2310 MHz to 2390 MHz Restricted Band



**Transmitter Band Edge Radiated Emissions (continued)****Results: Peak / Coded S8 / Plastic Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2399.800	Horizontal	43.4	72.9	29.5	Complied
2400.000	Horizontal	39.9	72.9	33.0	Complied
2483.500	Horizontal	60.7	74.0	13.3	Complied

**Results: Average / Coded S8 / Plastic Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Duty cycle correction (dB)	Corrected Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2483.500	Horizontal	47.0	2.0	49.0	54.0	5.0	Complied

**Results: 2310 MHz to 2390 MHz Restricted Band / Peak / Coded S8 / Plastic Lid**


Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2354.160	Horizontal	49.1	74.0	24.9	Complied

**Results: 2310 MHz to 2390 MHz Restricted Band / Average / Coded S8 / Plastic Lid**


Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Duty cycle correction (dB)	Corrected Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2338.000	Horizontal	35.6	2.0	37.6	54.0	16.4	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Coded S8 / Plastic Lid

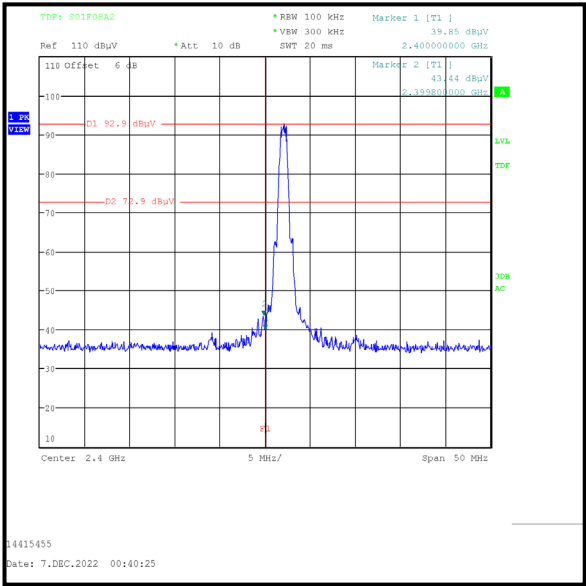

Lower Band Edge

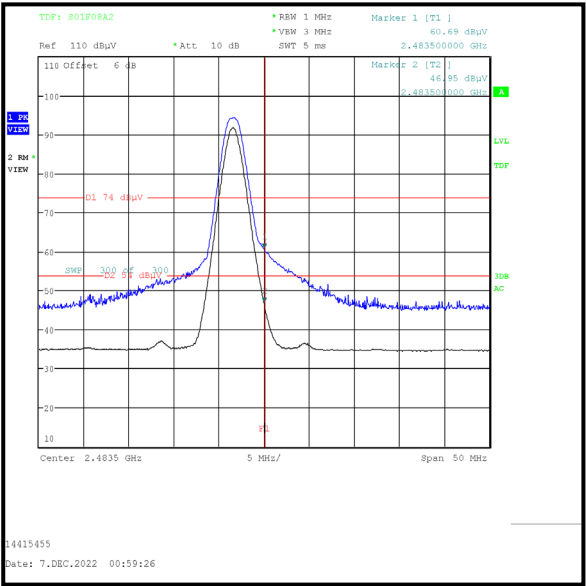

Upper Band Edge

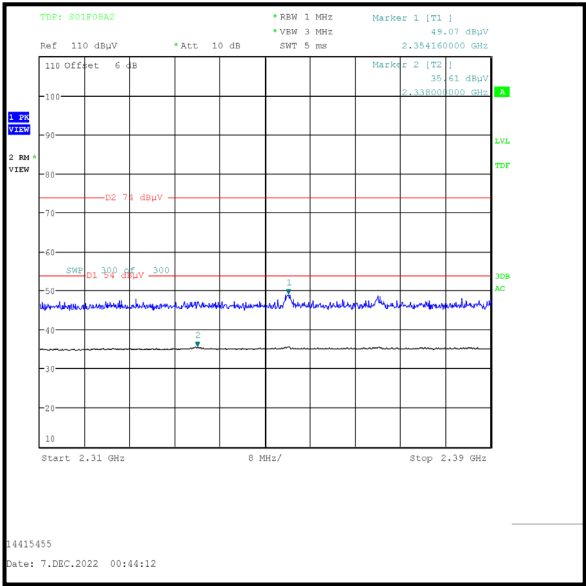

2310 MHz to 2390 MHz Restricted Band

**Transmitter Band Edge Radiated Emissions (continued)****Results: Peak / LE / Metal Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2399.650	Horizontal	39.0	64.3*	25.3	Complied
2400.000	Horizontal	37.0	64.3*	27.3	Complied
2483.500	Horizontal	55.2	74.0	18.8	Complied

**Results: Average / LE / Metal Lid**




Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Duty cycle correction (dB)	Corrected Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2483.500	Horizontal	39.1	2.0	41.1	54.0	12.9	Complied

**Results: 2310 MHz to 2390 MHz Restricted Band / Peak / LE / Metal Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2342.480	Horizontal	48.5	74.0	25.5	Complied

**Results: 2310 MHz to 2390 MHz Restricted Band / Average / LE / Metal Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2365.640	Horizontal	35.5	54.0	18.5	Complied

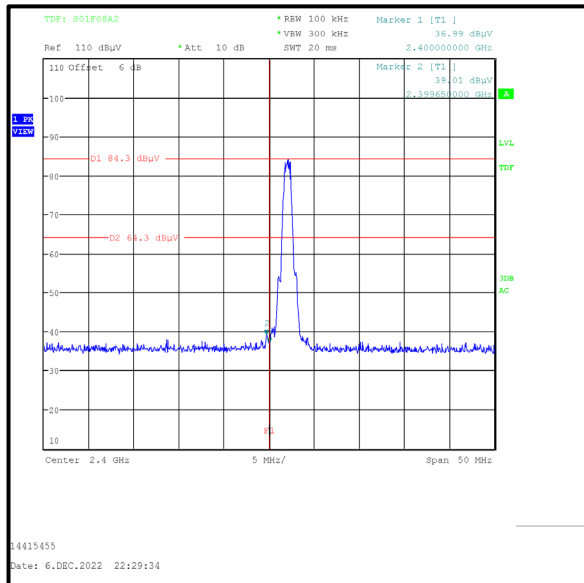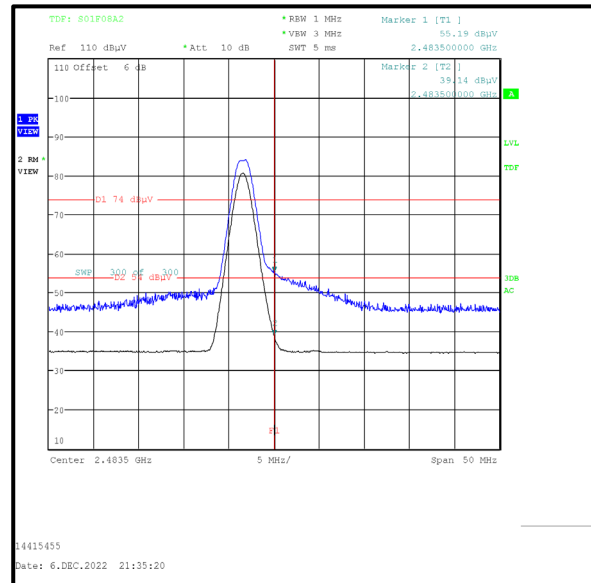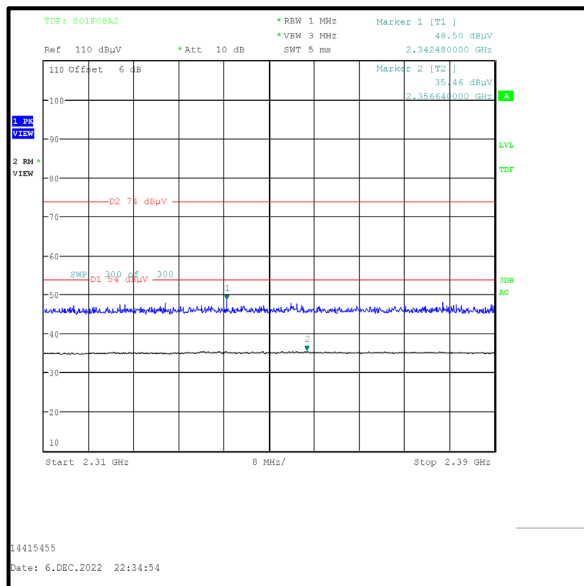**Transmitter Band Edge Radiated Emissions (continued)****Results: LE / Metal Lid****Lower Band Edge****Upper Band Edge****2310 MHz to 2390 MHz Restricted Band**

**Transmitter Band Edge Radiated Emissions (continued)****Results: Peak / LE2M / Metal Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2400.000	Horizontal	52.4	64.3*	11.9	Complied
2483.500	Horizontal	55.5	74.0	18.5	Complied

**Results: Average / LE2M / Metal Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Duty cycle correction (dB)	Corrected Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2483.500	Horizontal	39.8	4.8	44.6	54.0	9.4	Complied

**Results: 2310 MHz to 2390 MHz Restricted Band / Peak / LE2M / Metal Lid**


Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2369.760	Horizontal	47.9	74.0	26.1	Complied

**Results: 2310 MHz to 2390 MHz Restricted Band / Average / LE2M / Metal Lid**


Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2368.400	Horizontal	35.4	54.0	18.6	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: LE2M / Metal Lid

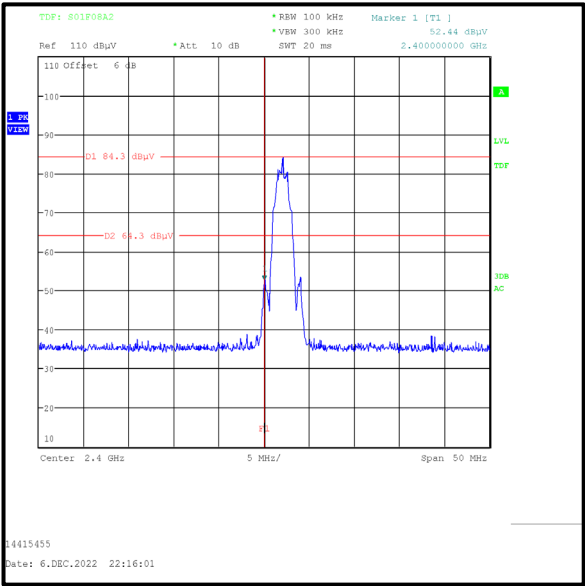

Lower Band Edge

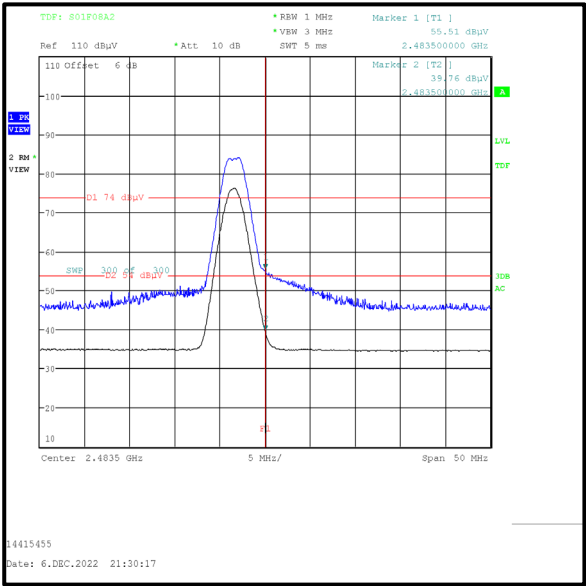

Upper Band Edge

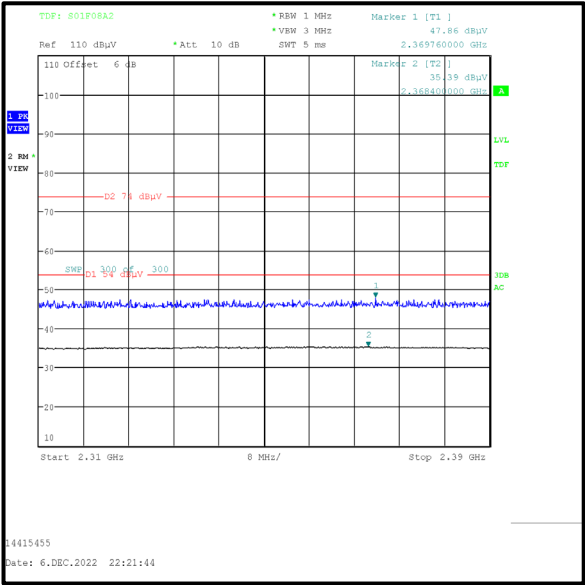

2310 MHz to 2390 MHz Restricted Band

**Transmitter Band Edge Radiated Emissions (continued)****Results: Peak / Coded S2 / Metal Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2399.650	Horizontal	38.7	64.3*	25.6	Complied
2400.000	Horizontal	38.4	64.3*	25.9	Complied
2483.500	Horizontal	55.1	74.0	18.9	Complied
2483.650	Horizontal	55.9	74.0	18.1	Complied

**Results: Average / Coded S2 / Metal Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Duty cycle correction (dB)	Corrected Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2483.500	Horizontal	37.6	2.0	39.6	54.0	14.4	Complied

**Results: 2310 MHz to 2390 MHz Restricted Band / Peak / Coded S2 / Metal Lid**


Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2375.600	Horizontal	48.2	74.0	25.8	Complied

**Results: 2310 MHz to 2390 MHz Restricted Band / Average / Coded S2 / Metal Lid**


Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2368.400	Horizontal	35.4	54.0	18.6	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Coded S2 / Metal Lid

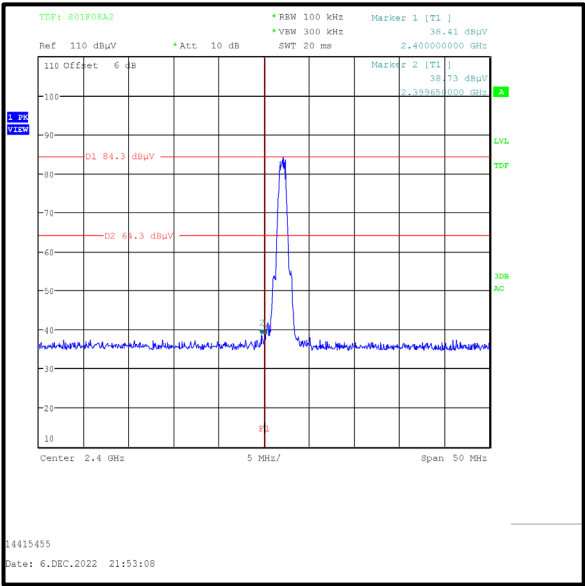

Lower Band Edge

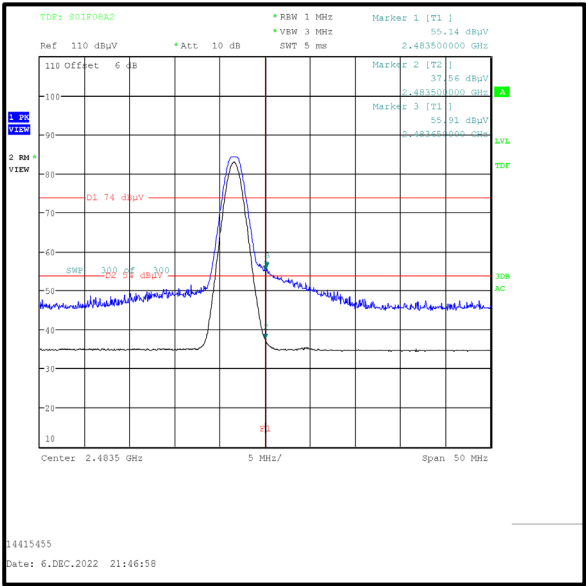

Upper Band Edge

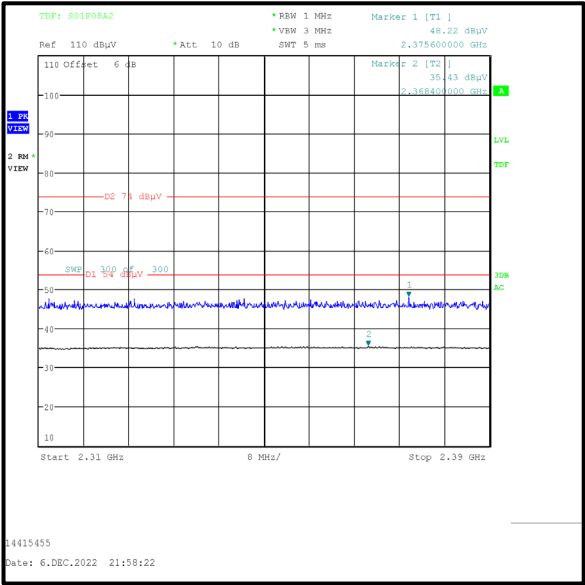

2310 MHz to 2390 MHz Restricted Band



**Transmitter Band Edge Radiated Emissions (continued)****Results: Peak / Coded S8 / Metal Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2399.850	Horizontal	41.2	64.2*	23.0	Complied
2400.000	Horizontal	37.5	64.2*	26.7	Complied
2483.500	Horizontal	54.7	74.0	19.3	Complied
2483.700	Horizontal	55.2	74.0	18.8	Complied

**Results: Average / Coded S8 / Metal Lid**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Duty cycle correction (dB)	Corrected Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2483.500	Horizontal	38.2	2.0	40.2	54.0	13.8	Complied

**Results: 2310 MHz to 2390 MHz Restricted Band / Peak / Coded S8 / Metal Lid**


Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2345.040	Horizontal	48.4	74.0	25.6	Complied

**Results: 2310 MHz to 2390 MHz Restricted Band / Average / Coded S8 / Metal Lid**


Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2345.280	Horizontal	35.4	54.0	18.6	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: Coded S8 / Metal Lid

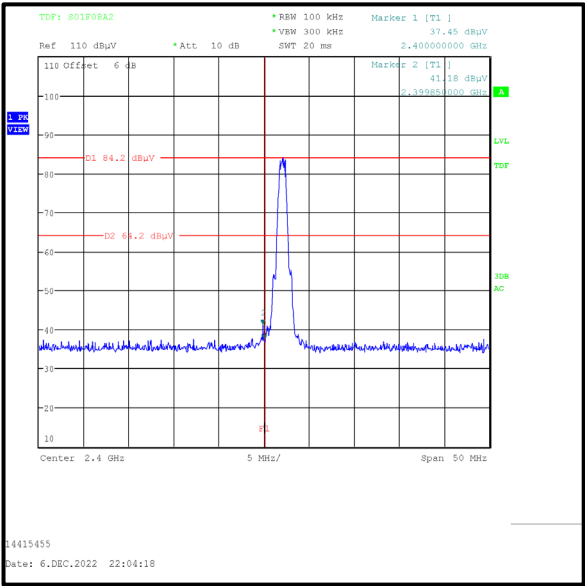

Lower Band Edge

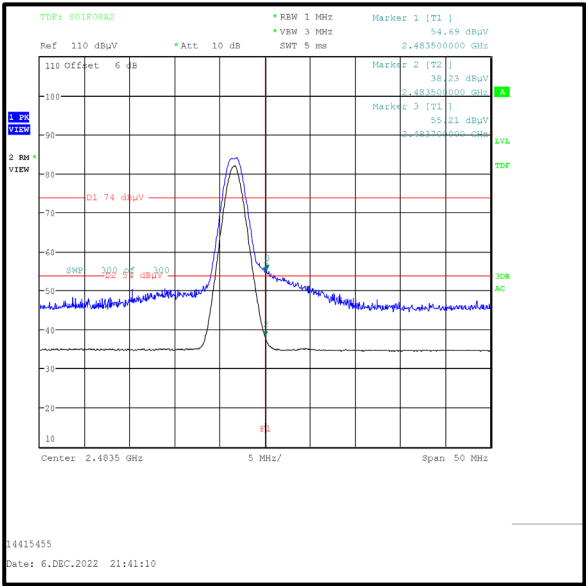

Upper Band Edge

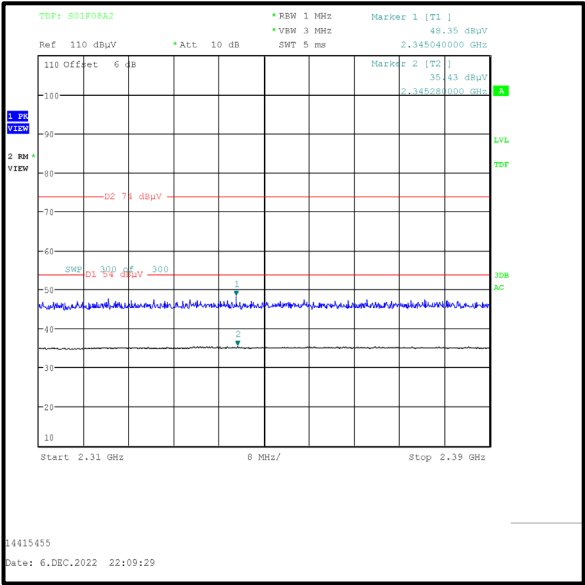

2310 MHz to 2390 MHz Restricted Band

--- END OF REPORT ---