

FCC PART 15.247

TEST REPORT

For

Hangzhou AiXiangJi Technology Co., Ltd

Room 701, Building 3, More Center, No.87 GuDun Road, Hangzhou, Zhejiang, China

FCC ID: 2ANDL-TYWE2S

Report Type: Original Report	Product Type: WIFI Module
Test Engineer: <u>Chris Wang</u> <i>Chris. Wang</i>	
Report Number: <u>RSHA170915001-00A</u>	
Report Date: <u>2017-09-27</u>	
Reviewed By: <u>Oscar Ye</u> <i>Oscar. Ye</i> RF Leader	
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS	11
TEST EQUIPMENT LIST	12
FCC§15.247 (i), §1.1310& §2.1091 – MAXIMUM PERMISSIBLE EXPOSURE (MPE)	13
APPLICABLE STANDARD	13
CALCULATED FORMULARY:.....	13
CALCULATED DATA:.....	13
FCC §15.203 - ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE	15
CORRECTED FACTOR & MARGIN CALCULATION	16
TEST RESULTS SUMMARY	16
TEST DATA	16
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	19
APPLICABLE STANDARD	19
EUT SETUP	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	20
TEST PROCEDURE	20
CORRECTED AMPLITUDE & MARGIN CALCULATION	20
TEST RESULTS SUMMARY	20
TEST DATA	21
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST DATA	31

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST DATA	38
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	40
APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST DATA	40
FCC §15.247(e) - POWER SPECTRAL DENSITY	44
APPLICABLE STANDARD	44
TEST PROCEDURE	44
TEST DATA	44

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Hangzhou AiXiangJi Technology Co., Ltd
Tested Model	TYWE2S
Product Type	WIFI Module
Dimension	15mm(L)*17.3mm(W)* 2.8mm(H)
Power Supply	DC3.3V

**All measurement and test data in this report was gathered from production sample serial number: 20170915003.
(Assigned by the BACL. The EUT supplied by the applicant was received on 2017-09-15)*

Objective

This report is prepared on behalf of Hangzhou AiXiangJi Technology Co., Ltd in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB558074 D01 DTS Meas Guidance v04.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	4.88dB
Occupied Bandwidth		0.5kHz
Temperature		1.0
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Test channel list is as below:

For 802.11b, 802.11g and 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11;

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

Equipment Modifications

No modification was made to the EUT tested.


EUT Exercise Software

RF test tool: Secure CRT.exe

Pre-scan with all the data rates, and the worst case was performed as below:

Mode	Data rate	Power level
802.11b	1 Mbps	0
802.11g	6 Mbps	0
802.11n-HT20	MCS0	0

802.11n-HT20 Mode Middle Channel

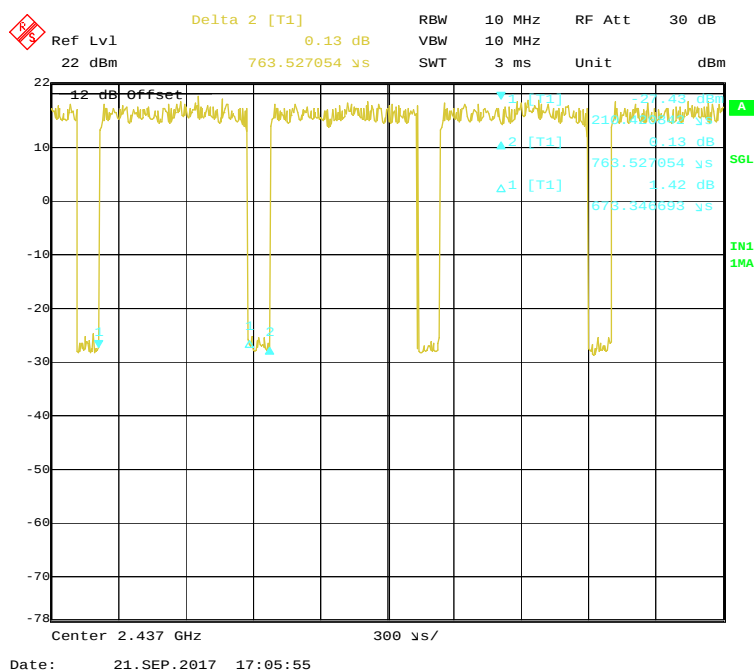

Mode	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting	10log(1/x)
802.11b	90.72%	4299	0.23	1kHz	0.423
802.11g	88.54%	703	1.42	3kHz	0.529
802.11n-HT20	88.09%	673	1.49	3kHz	0.551

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152
Hangzhou AiXiangJi	Debug Board	/	/

External I/O Cable


Cable Description	Shielding Type	Length (m)	From Port	To
/	/	/	/	/

Block Diagram of Test Setup


For Conducted Emissions:

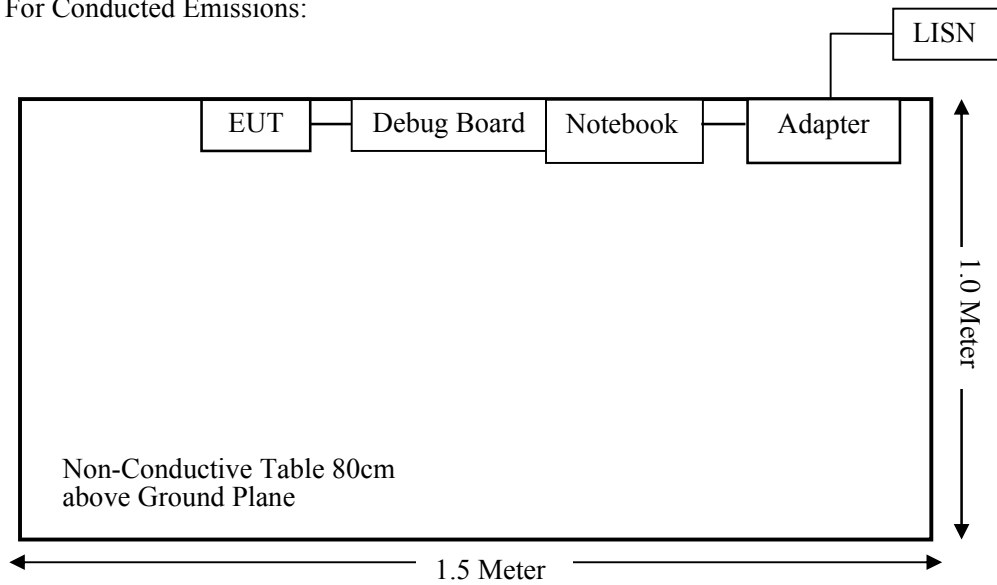

For Radiated Emissions (Below 1GHz):

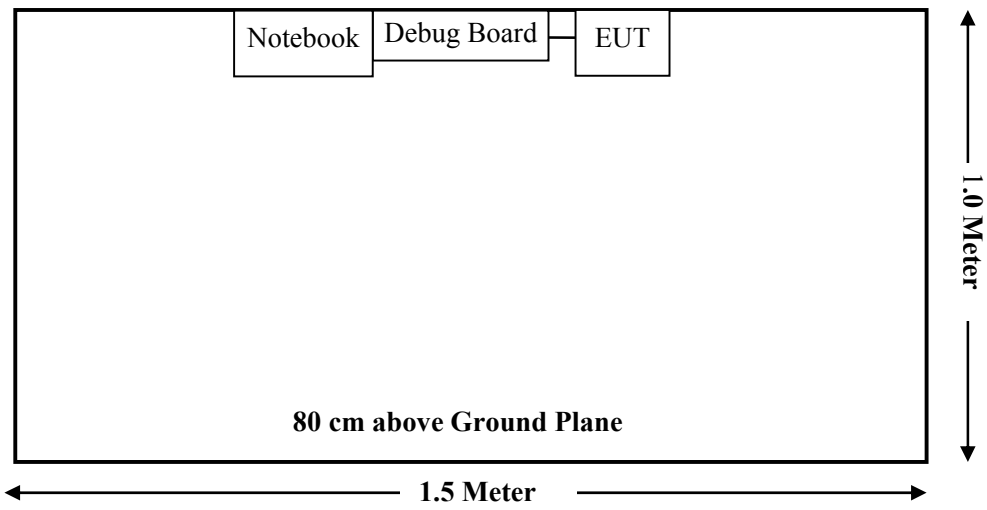

For Radiated Emissions (Above 1GHz):

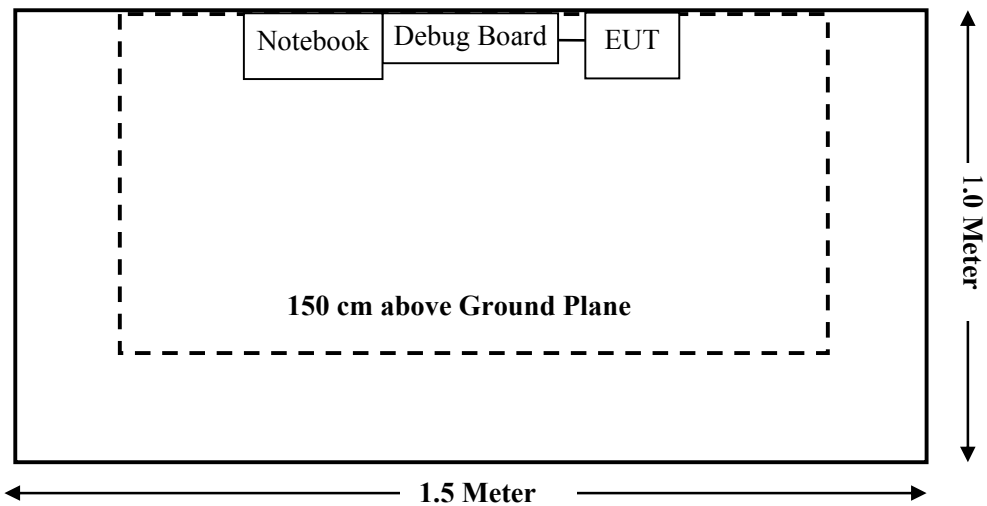

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2016-11-25	2017-11-24
Sunol Sciences	Broadband Antenna	JB3	A040914-2	2016-01-09	2019-01-08
Sonoma Instrument	Pre-amplifier	310N	171205	2017-08-15	2018-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2017-08-15	2018-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2016-11-25	2017-11-24
ETS-LINDGREN	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
Narda	Pre-amplifier	AFS42-00101800	2001270	2016-12-12	2017-12-11
Heatsink Required	Amplifier	QLW-18405536-J0	15964001009	2016-12-12	2017-12-11
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2017-08-15	2018-08-14
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2016-09-21	2017-09-21
Hangzhou AiXiangJi	RF Cable	N/A	N/A	2017-09-18	2018-09-17
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2016-11-25	2017-11-24
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2016-10-10	2017-10-09
Rohde & Schwarz	LISN	ENV216	3560655016	2016-11-25	2017-11-24
BACL	BACL-EMC	V1.0	CE001	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2017-01-10	2018-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2017-08-15	2018-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1310& §2.1091 – MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency Range	Antenna Gain		Target Output Power		Evaluation Distance	Power Density	MPE Limit
	(MHz)	(dBi)	(numeric)	(dBm)	(mW)	(cm)	(mW/cm ²)	(mW/cm ²)
802.11b	2412~2462	3.00	2.00	16.0	39.81	20	0.0158	1
802.11g		3.00	2.00	21.0	125.89	20	0.0500	1
802.11n-HT20		3.00	2.00	21.5	141.25	20	0.0561	1

Note: For the above target output power are all declared by the manufacturer.

Result: The device meet FCC MPE at 20 cm distance.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a PCB antenna arrangement for Wi-Fi, which the antenna gain is 3dBi; fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

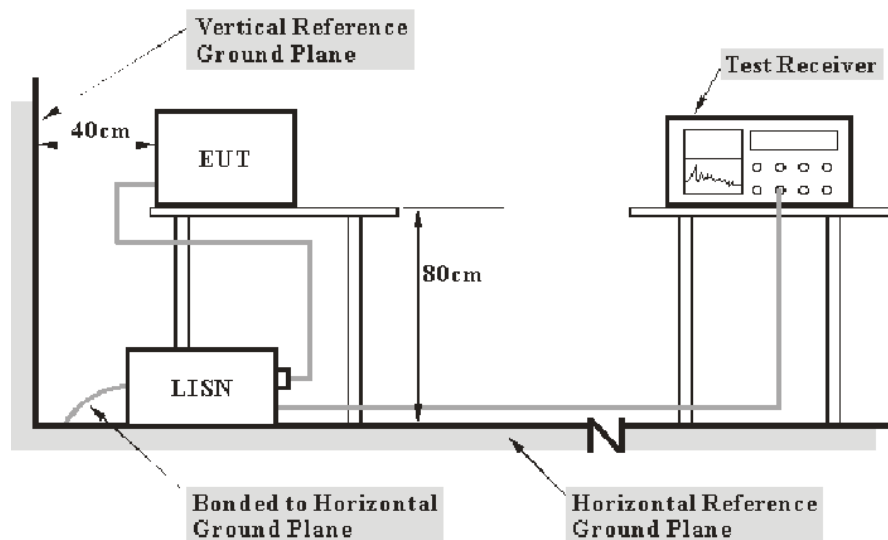

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Reading}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data


Environmental Conditions

Temperature:	25
Relative Humidity:	50 %
ATM Pressure:	101.2 kPa

The testing was performed by Chris Wang on 2017-09-24.


EUT operation mode: Transmitting in 802.11n-HT20 mode high channel. (worst case)

AC 120V/60 Hz, Line

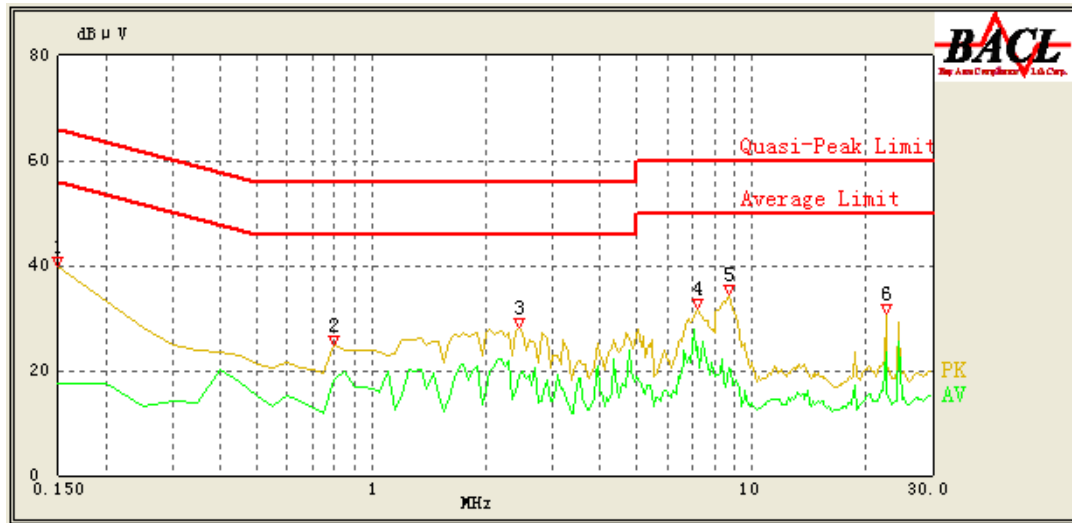

Frequency (MHz)	Reading (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corr. (dB)	Limit (dBμV)	Margin (dB)	Comment
0.150	39.94	QP	9.000	L1	16.06	66.00	26.06	Compliance
0.150	17.53	AV	9.000	L1	16.06	56.00	38.47	Compliance
0.800	24.67	QP	9.000	L1	15.93	56.00	31.33	Compliance
0.800	18.12	AV	9.000	L1	15.93	46.00	27.88	Compliance
2.450	28.08	QP	9.000	L1	15.85	56.00	27.92	Compliance
2.450	19.02	AV	9.000	L1	15.85	46.00	26.98	Compliance
7.200	31.74	QP	9.000	L1	15.99	60.00	28.26	Compliance
7.200	24.41	AV	9.000	L1	15.99	50.00	25.59	Compliance
8.700	34.57	QP	9.000	L1	16.03	60.00	25.43	Compliance
8.750	20.40	AV	9.000	L1	16.03	50.00	29.60	Compliance
22.550	30.94	QP	9.000	L1	16.45	60.00	29.06	Compliance
22.600	23.49	AV	9.000	L1	16.45	50.00	26.51	Compliance

AC 120V/60 Hz, Neutral

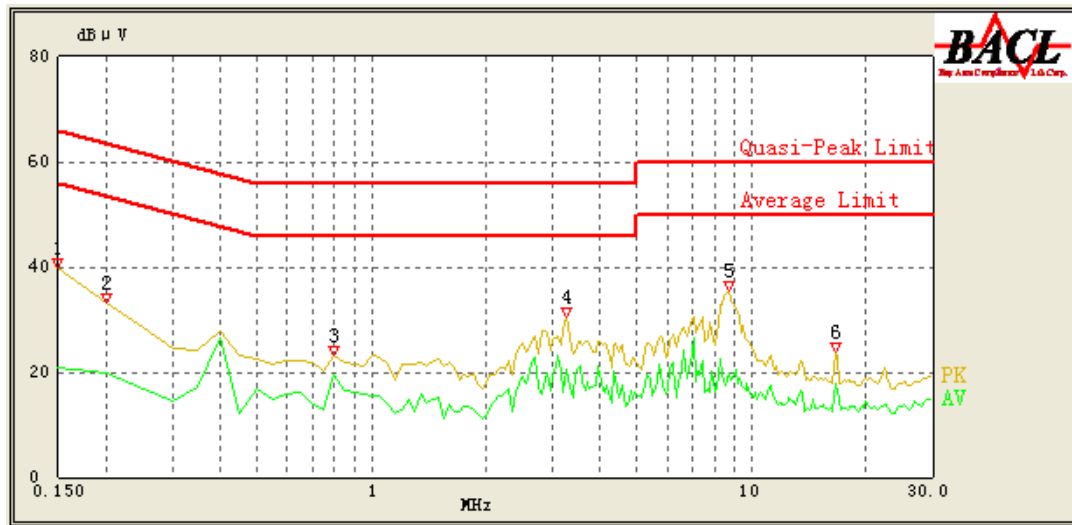

Frequency (MHz)	Reading (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corr. (dB)	Limit (dBμV)	Margin (dB)	Comment
0.150	39.79	QP	9.000	N	16.06	66.00	26.21	Compliance
0.150	20.70	AV	9.000	N	16.06	56.00	35.30	Compliance
0.200	33.09	QP	9.000	N	16.05	64.57	31.48	Compliance
0.200	19.71	AV	9.000	N	16.05	54.57	34.86	Compliance
0.800	23.18	QP	9.000	N	15.97	56.00	32.82	Compliance
0.800	19.39	AV	9.000	N	15.97	46.00	26.61	Compliance
3.250	30.52	QP	9.000	N	15.89	56.00	25.48	Compliance
3.250	20.38	AV	9.000	N	15.89	46.00	25.62	Compliance
8.750	35.56	QP	9.000	N	15.96	60.00	24.44	Compliance
8.750	19.91	AV	9.000	N	15.96	50.00	30.09	Compliance
16.700	23.67	QP	9.000	N	16.06	60.00	36.33	Compliance
16.700	17.98	AV	9.000	N	16.06	50.00	32.02	Compliance

Note:

1) Corr.=LISN VDF (Voltage Division Factor) + Cable Loss


2) Margin = Limit – Reading

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

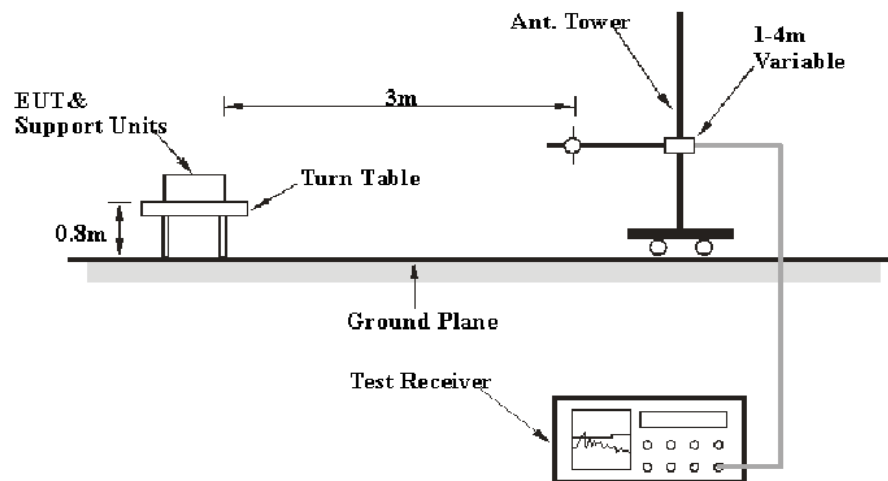

Above 1GHz:

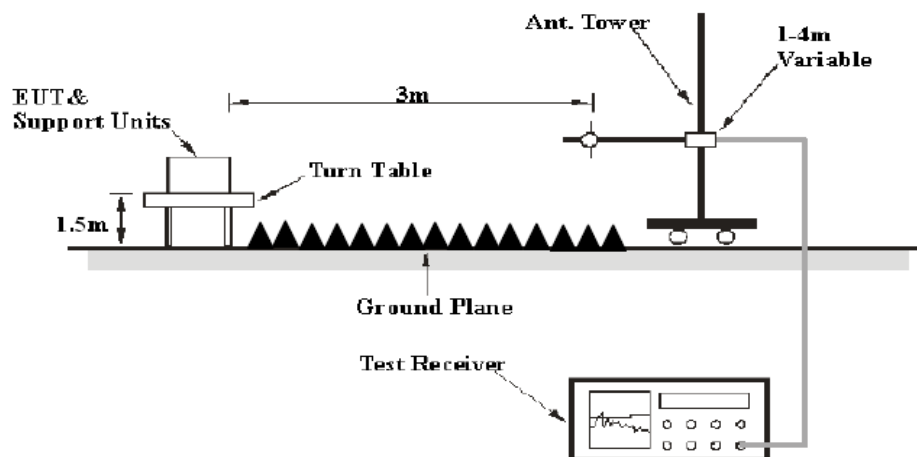

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP

Frequency Range	RBW	Video B/W	Duty cycle	Detector
1GHz – 25GHz	1MHz	3 MHz	Any	PK
	1MHz	10 Hz	>98%	Ave.
	1MHz	1/T	<98%	

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data**Environmental Conditions**

Temperature:	25
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Chris Wang on 2017-09-19.

EUT operation mode: Transmitting (Scan with X-Axis, Y-Axis and Z-Axis position, the worst case X-Axis was recorded)

30MHz-25GHz

802.11b Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
108.12	39.80	QP	210	146	V	-13.64	26.16	43.50	17.34
2412.00	111.21	PK	274	184	V	-4.90	106.31	/	/
2412.00	107.92	Ave	274	184	V	-4.90	103.02	/	/
2412.00	111.33	PK	219	194	H	-4.90	106.43	/	/
2412.00	108.03	Ave	219	194	H	-4.90	103.13	/	/
2390.00	58.54	PK	208	105	H	-4.96	53.58	74.00	20.42
2390.00	48.37	Ave	208	105	H	-4.96	43.41	54.00	10.59
1593.60	49.22	PK	32	125	V	-7.67	41.55	74.00	32.45
1593.60	34.64	Ave	32	125	V	-7.67	26.97	54.00	27.03
3072.00	46.97	PK	210	150	V	-1.88	45.09	74.00	28.91
3072.00	39.93	Ave	210	150	V	-1.88	38.05	54.00	15.95
4824.00	53.05	PK	143	248	H	2.52	55.57	74.00	18.43
4824.00	48.51	Ave	143	248	H	2.52	51.03	54.00	2.97
7236.00	35.21	PK	180	116	H	9.83	45.04	74.00	28.96
7236.00	24.33	Ave	180	116	H	9.83	34.16	54.00	19.84

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Middle Channel (2437 MHz)									
108.12	39.83	QP	108	112	V	-13.64	26.19	43.50	17.31
2437.00	110.90	PK	335	202	V	-4.83	106.07	/	/
2437.00	106.65	Ave	335	202	V	-4.83	101.82	/	/
2437.00	111.07	PK	54	181	H	-4.83	106.24	/	/
2437.00	106.82	Ave	54	181	H	-4.83	101.99	/	/
1593.60	48.79	PK	322	110	V	-7.67	41.12	74.00	32.88
1593.60	34.53	Ave	322	110	V	-7.67	26.86	54.00	27.14
3072.00	46.93	PK	264	223	V	-1.88	45.05	74.00	28.95
3072.00	39.89	Ave	264	223	V	-1.88	38.01	54.00	15.99
4874.00	52.80	PK	195	235	H	2.63	55.43	74.00	18.57
4874.00	48.29	Ave	195	235	H	2.63	50.92	54.00	3.08
6537.00	38.96	PK	153	198	H	8.36	47.32	74.00	26.68
6537.00	26.64	Ave	153	198	H	8.36	35.00	54.00	19.00
7311.00	35.12	PK	143	127	H	9.95	45.07	74.00	28.93
7311.00	24.24	Ave	143	127	H	9.95	34.19	54.00	19.81
High Channel (2462 MHz)									
108.12	39.86	QP	281	189	V	-13.64	26.22	43.50	17.28
2462.00	111.24	PK	62	170	V	-4.76	106.48	/	/
2462.00	107.18	Ave	62	170	V	-4.76	102.42	/	/
2462.00	111.37	PK	344	112	H	-4.76	106.61	/	/
2462.00	107.31	Ave	344	112	H	-4.76	102.55	/	/
2483.50	59.43	PK	10	233	H	-4.71	54.72	74.00	19.28
2483.50	48.53	Ave	10	233	H	-4.71	43.82	54.00	10.18
1593.60	48.85	PK	356	186	V	-7.67	41.18	74.00	32.82
1593.60	34.60	Ave	356	186	V	-7.67	26.93	54.00	27.07
4924.00	52.84	PK	203	130	H	2.74	55.58	74.00	18.42
4924.00	48.28	Ave	203	130	H	2.74	51.02	54.00	2.98
6537.00	39.00	PK	14	102	H	8.36	47.36	74.00	26.64
6537.00	26.69	Ave	14	102	H	8.36	35.05	54.00	18.95
7386.00	34.98	PK	103	187	H	10.06	45.04	74.00	28.96
7386.00	24.15	Ave	103	187	H	10.06	34.21	54.00	19.79

802.11g Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
108.12	39.79	QP	230	211	V	-13.64	26.15	43.50	17.35
2412.00	112.77	PK	256	245	V	-4.90	107.87	/	/
2412.00	103.99	Ave	256	245	V	-4.90	99.09	/	/
2412.00	113.20	PK	173	185	H	-4.90	108.30	/	/
2412.00	104.42	Ave	173	185	H	-4.90	99.52	/	/
2390.00	62.90	PK	309	145	H	-4.96	57.94	74.00	16.06
2390.00	52.34	Ave	309	145	H	-4.96	47.38	54.00	6.62
1593.60	49.60	PK	219	188	V	-7.67	41.93	74.00	32.07
1593.60	33.90	Ave	219	188	V	-7.67	26.23	54.00	27.77
3072.00	46.55	PK	265	204	V	-1.88	44.67	74.00	29.33
3072.00	39.52	Ave	265	204	V	-1.88	37.64	54.00	16.36
4824.00	51.07	PK	58	214	H	2.52	53.59	74.00	20.41
4824.00	40.47	Ave	58	214	H	2.52	42.99	54.00	11.01
7236.00	34.67	PK	254	193	H	9.83	44.50	74.00	29.50
7236.00	24.83	Ave	254	193	H	9.83	34.66	54.00	19.34
Middle Channel (2437 MHz)									
108.12	39.82	QP	34	219	V	-13.64	26.18	43.50	17.32
2437.00	112.80	PK	272	224	V	-4.83	107.97	/	/
2437.00	104.03	Ave	272	224	V	-4.83	99.20	/	/
2437.00	113.22	PK	278	163	H	-4.83	108.39	/	/
2437.00	104.44	Ave	278	163	H	-4.83	99.61	/	/
1593.60	49.66	PK	137	103	V	-7.67	41.99	74.00	32.01
1593.60	33.85	Ave	137	103	V	-7.67	26.18	54.00	27.82
3072.00	46.53	PK	82	129	V	-1.88	44.65	74.00	29.35
3072.00	39.54	Ave	82	129	V	-1.88	37.66	54.00	16.34
4874.00	51.05	PK	123	154	H	2.63	53.68	74.00	20.32
4874.00	40.44	Ave	123	154	H	2.63	43.07	54.00	10.93
6545.40	39.38	PK	85	210	V	8.38	47.76	74.00	26.24
6545.40	26.64	Ave	85	210	V	8.38	35.02	54.00	18.98
7311.00	34.58	PK	217	169	H	9.95	44.53	74.00	29.47
7311.00	24.74	Ave	217	169	H	9.95	34.69	54.00	19.31

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
108.12	39.85	QP	318	186	V	-13.64	26.21	43.50	17.29
2462.00	112.77	PK	227	136	V	-4.76	108.01	/	/
2462.00	103.98	Ave	227	136	V	-4.76	99.22	/	/
2462.00	113.17	PK	255	206	H	-4.76	108.41	/	/
2462.00	104.39	Ave	255	206	H	-4.76	99.63	/	/
2483.50	64.36	PK	355	213	H	-4.71	59.65	74.00	14.35
2483.50	54.47	Ave	355	213	H	-4.71	49.76	54.00	4.24
1593.60	49.48	PK	283	113	V	-7.67	41.81	74.00	32.19
1593.60	33.65	Ave	283	113	V	-7.67	25.98	54.00	28.02
4924.00	50.96	PK	324	212	H	2.74	53.70	74.00	20.30
4924.00	40.34	Ave	324	212	H	2.74	43.08	54.00	10.92
6545.40	39.44	PK	2	244	V	8.38	47.82	74.00	26.18
6545.40	26.66	Ave	2	244	V	8.38	35.04	54.00	18.96
7386.00	34.48	PK	118	237	H	10.06	44.54	74.00	29.46
7386.00	24.63	Ave	118	237	H	10.06	34.69	54.00	19.31


802.11n-HT20 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
108.12	39.89	QP	335	150	V	-13.64	26.25	43.50	17.25
2412.00	112.47	PK	247	123	V	-4.90	107.57	/	/
2412.00	102.72	Ave	247	123	V	-4.90	97.82	/	/
2412.00	112.56	PK	30	201	H	-4.90	107.66	/	/
2412.00	102.81	Ave	30	201	H	-4.90	97.91	/	/
2390.00	65.11	PK	256	145	H	-4.96	60.15	74.00	13.85
2390.00	53.53	Ave	256	145	H	-4.96	48.57	54.00	5.43
1592.20	49.86	PK	97	185	V	-7.68	42.18	74.00	31.82
1592.20	32.53	Ave	97	185	V	-7.68	24.85	54.00	29.15
3072.00	46.24	PK	215	132	V	-1.88	44.36	74.00	29.64
3072.00	39.73	Ave	215	132	V	-1.88	37.85	54.00	16.15
4824.00	52.06	PK	248	229	H	2.52	54.58	74.00	19.42
4824.00	41.04	Ave	248	229	H	2.52	43.56	54.00	10.44
7236.00	35.03	PK	18	150	H	9.83	44.86	74.00	29.14
7236.00	24.41	Ave	18	150	H	9.83	34.24	54.00	19.76


Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Middle Channel (2437 MHz)									
108.12	39.84	QP	95	236	V	-13.64	26.2	43.50	17.30
2437.00	112.46	PK	164	235	V	-4.83	107.63	/	/
2437.00	102.71	Ave	164	235	V	-4.83	97.88	/	/
2437.00	112.58	PK	212	196	H	-4.83	107.75	/	/
2437.00	102.83	Ave	212	196	H	-4.83	98.00	/	/
1592.20	49.92	PK	16	225	V	-7.68	42.24	74.00	31.76
1592.20	32.66	Ave	16	225	V	-7.68	24.98	54.00	29.02
3072.00	46.26	PK	304	228	V	-1.88	44.38	74.00	29.62
3072.00	39.74	Ave	304	228	V	-1.88	37.86	54.00	16.14
4874.00	51.97	PK	181	223	H	2.63	54.60	74.00	19.40
4874.00	40.94	Ave	181	223	H	2.63	43.57	54.00	10.43
6670.00	38.88	PK	73	226	H	8.68	47.56	74.00	26.44
6670.00	25.97	Ave	73	226	H	8.68	34.65	54.00	19.35
7311.00	34.96	PK	155	193	H	9.95	44.91	74.00	29.09
7311.00	24.38	Ave	155	193	H	9.95	34.33	54.00	19.67
High Channel (2462 MHz)									
108.12	39.86	QP	327	111	V	-13.64	26.22	43.50	17.28
2462.00	112.90	PK	9	240	V	-4.76	108.14	/	/
2462.00	103.15	Ave	9	240	V	-4.76	98.39	/	/
2462.00	113.01	PK	248	128	H	-4.76	108.25	/	/
2462.00	103.26	Ave	248	128	H	-4.76	98.50	/	/
2483.50	66.23	PK	204	244	H	-4.71	61.52	74.00	12.48
2483.50	53.88	Ave	204	244	H	-4.71	49.17	54.00	4.83
1592.20	49.93	PK	329	205	V	-7.68	42.25	74.00	31.75
1592.20	32.67	Ave	329	205	V	-7.68	24.99	54.00	29.01
4924.00	52.37	PK	204	162	H	2.74	55.11	74.00	18.89
4924.00	41.43	Ave	204	162	H	2.74	44.17	54.00	9.83
6670.00	38.85	PK	73	118	V	8.68	47.53	74.00	26.47
6670.00	25.99	Ave	73	118	V	8.68	34.67	54.00	19.33
7386.00	35.34	PK	304	132	H	10.06	45.40	74.00	28.60
7386.00	24.81	Ave	304	132	H	10.06	34.87	54.00	19.13

Conducted Spurious Emissions at Antenna Port


802.11b Low Channel

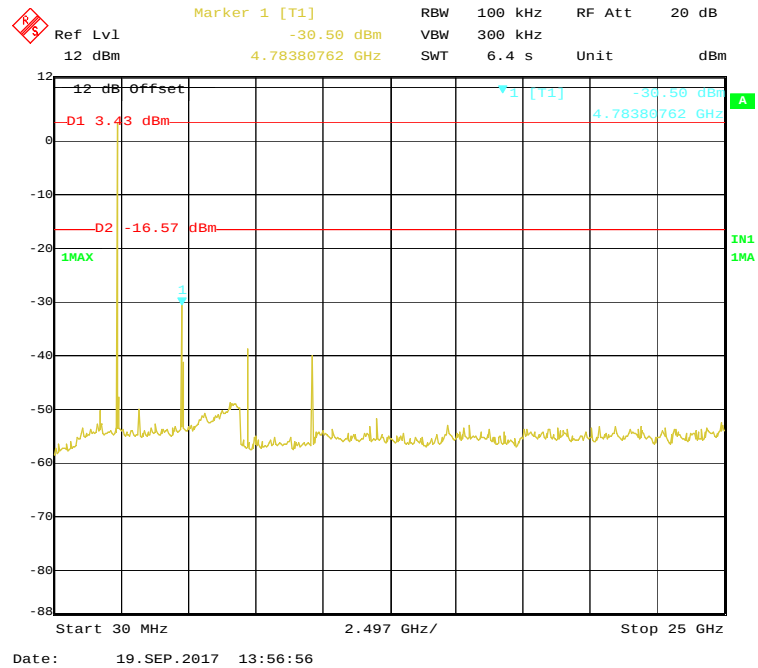


802.11b Middle Channel

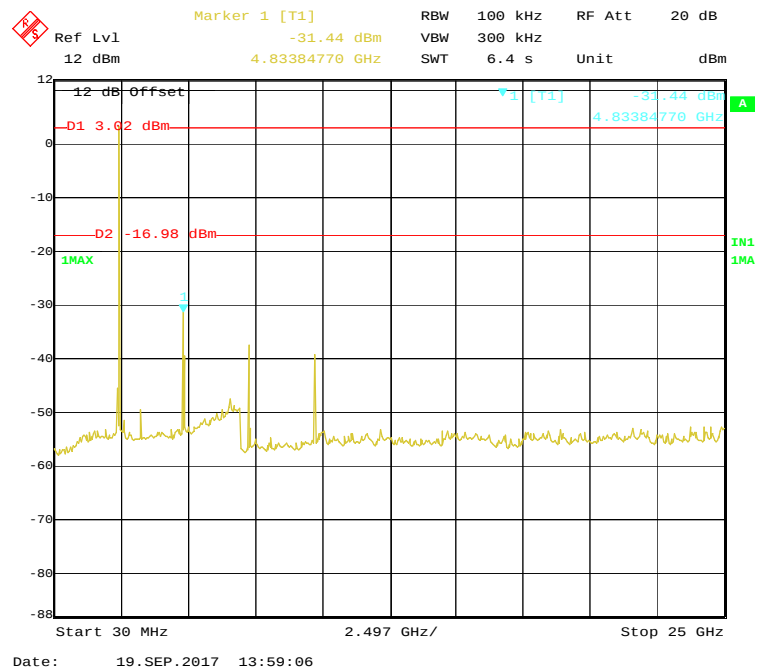


802.11b High Channel

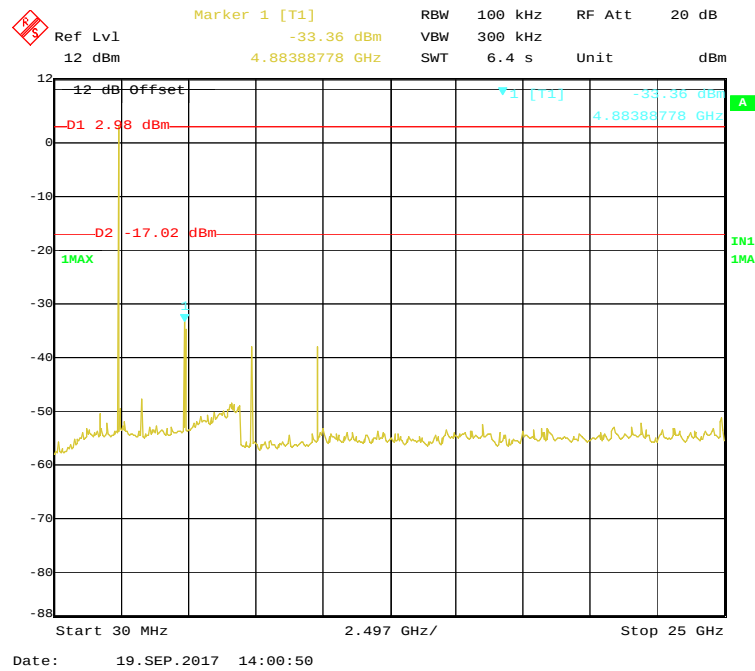


802.11g Low Channel

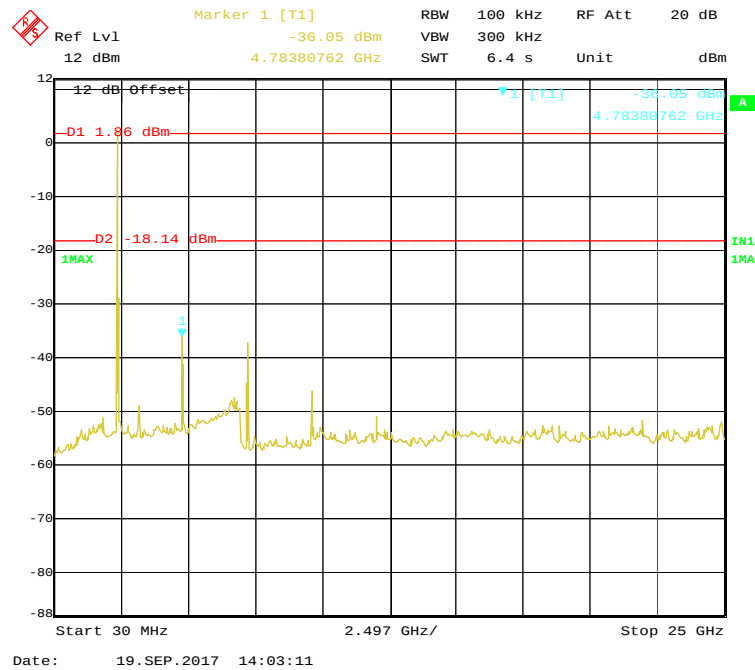


802.11g Middle Channel

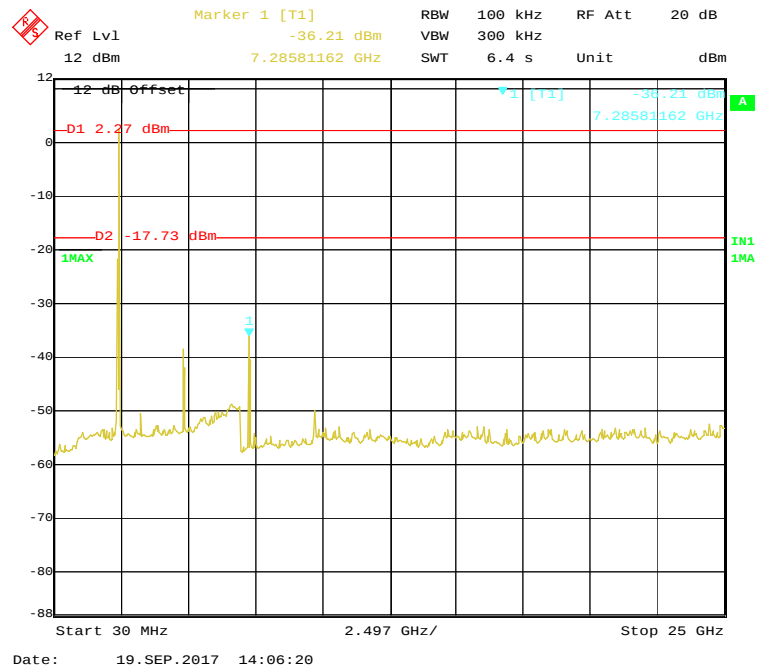


802.11g High Channel

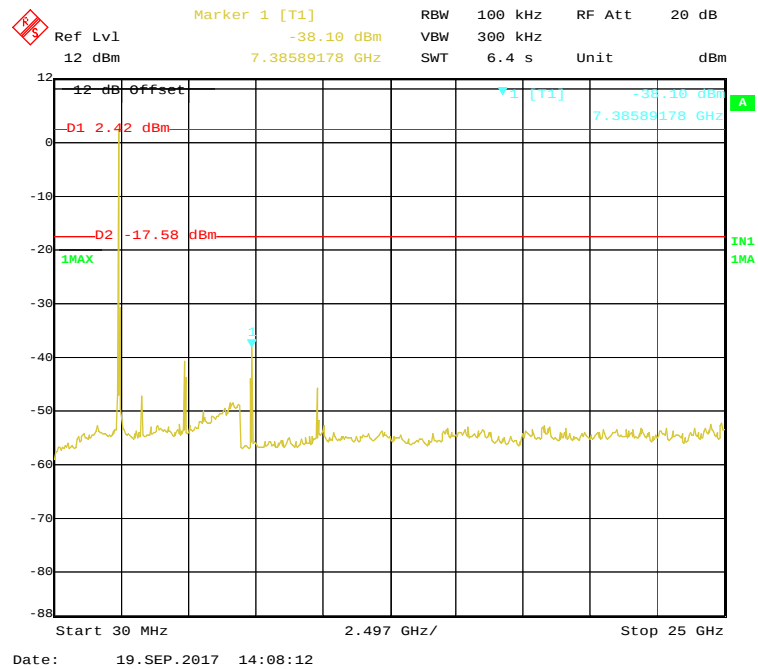


802.11n-HT20 Low Channel

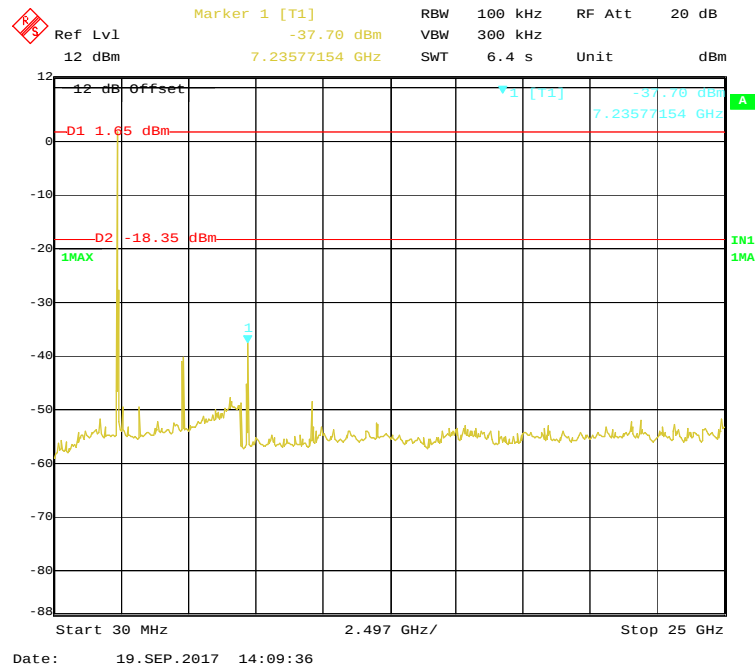

802.11n-HT20 Middle Channel

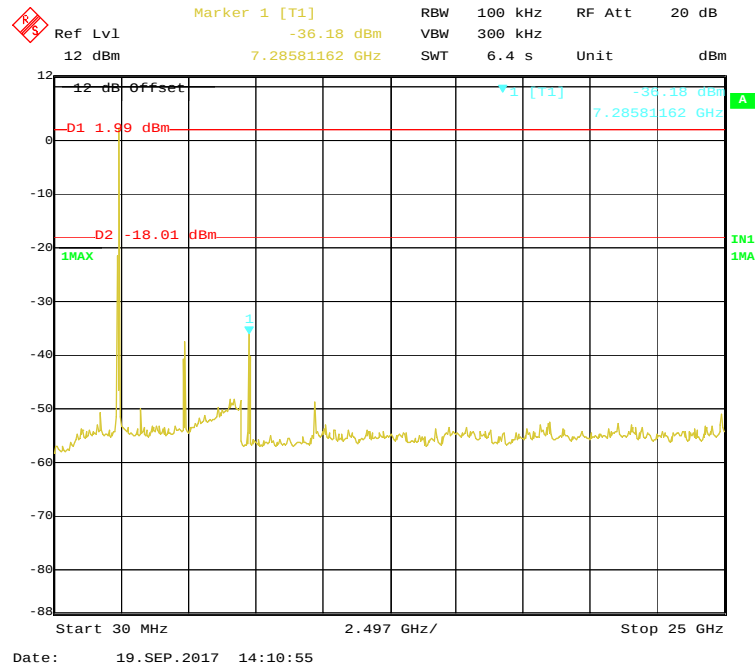

802.11n-HT20 High Channel

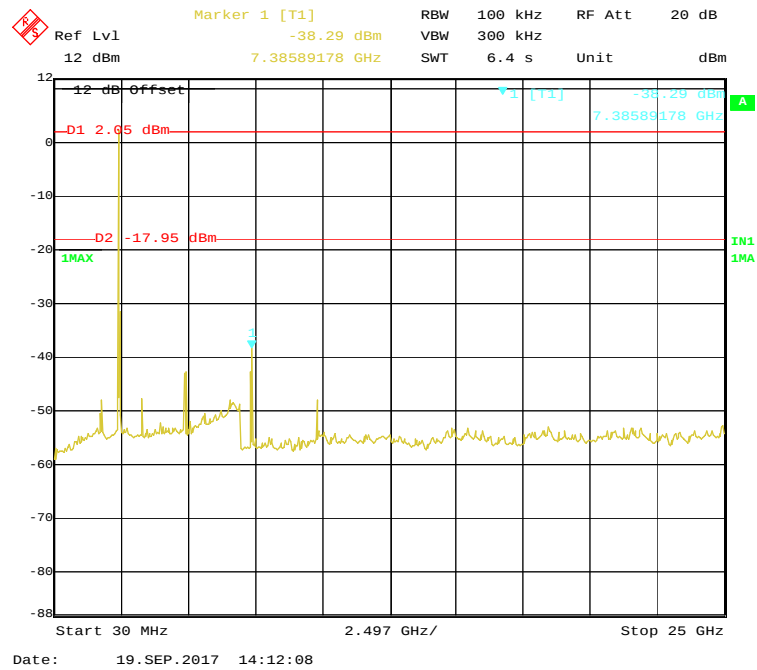


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions

Temperature:	25
Relative Humidity:	50 %
ATM Pressure:	101.1 kPa

The testing was performed by Chris Wang on 2017-09-18.

EUT operation mode: Transmitting

Test Result: Pass.

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
802.11b mode			
Low	2412	9.018	≥ 0.5
Middle	2437	9.018	≥ 0.5
High	2462	9.018	≥ 0.5
802.11g mode			
Low	2412	16.413	≥ 0.5
Middle	2437	16.413	≥ 0.5
High	2462	16.413	≥ 0.5
802.11n-HT20 mode			
Low	2412	17.375	≥ 0.5
Middle	2437	17.375	≥ 0.5
High	2462	17.375	≥ 0.5

Delta 1 [T1] -0.10 dB
 RBW 100 kHz RF Att 30 dB
 Ref Lvl 22 dBm VSWR 300 kHz
 22 dBm 9.01803607 MHz SWT 7.5 ms Unit dBm

12 dB Offset
 D1 5.48 dBm
 D2 0.52 dBm
 1MAX
 1MA
 1 [T1]
 1 [T1]
 -8.76 dBm
 2.40758116 GHz
 -6.10 dBm
 9.01803607 MHz

Center 2.412 GHz 3 MHz/ Span 30 MHz

Date: 18.SEP.2017 07:40:56

Ref Lvl 22 dBm Delta 1 [T1] 0.05 dB RBW 100 kHz RF Att 30 dB
 22 dBm 9.01803607 MHz VBW 300 kHz SWT 7.5 ms Unit dBm

12 dB Offset

D1 5.49 dBm D2 0.51 dBm

1MAX 1MIN

Center 2.437 GHz 3 MHz/ Span 30 MHz

2.43258116 GHz -6.92 dBm

9.01803607 MHz

[illegible]

Delta 1 [T1]
0.11 dB
16.41282565 MHz

RBW 100 kHz
VBW 300 kHz
SWT 7.5 ms

RF Att 30 dB
Unit dBm

Ref Lvl 22 dBm



12 dB Offset

D1 0.73 dBm
D2 -5.27 dBm
1MAX


2.40385371 GHz
5.11 dB
36.41282565 MHz

Center 2.412 GHz
3 MHz/
Span 30 MHz


Date: 18.SEP.2017 07:52:47

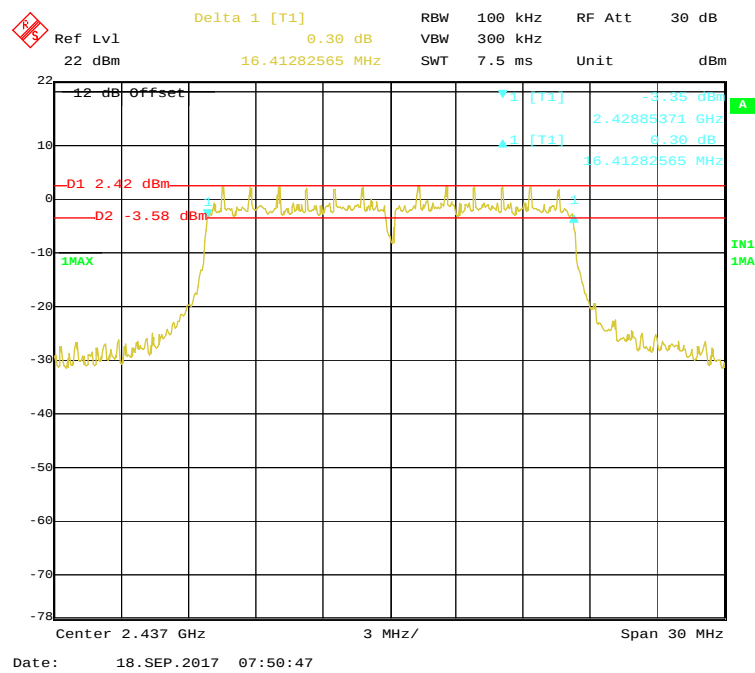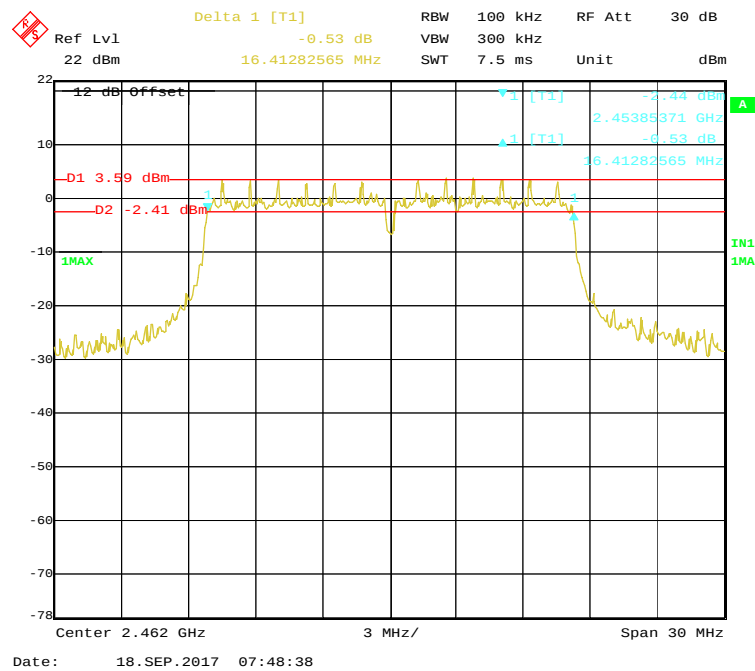802.11g Middle Channel**802.11g High Channel**


802.11n-HT20 Low Channel

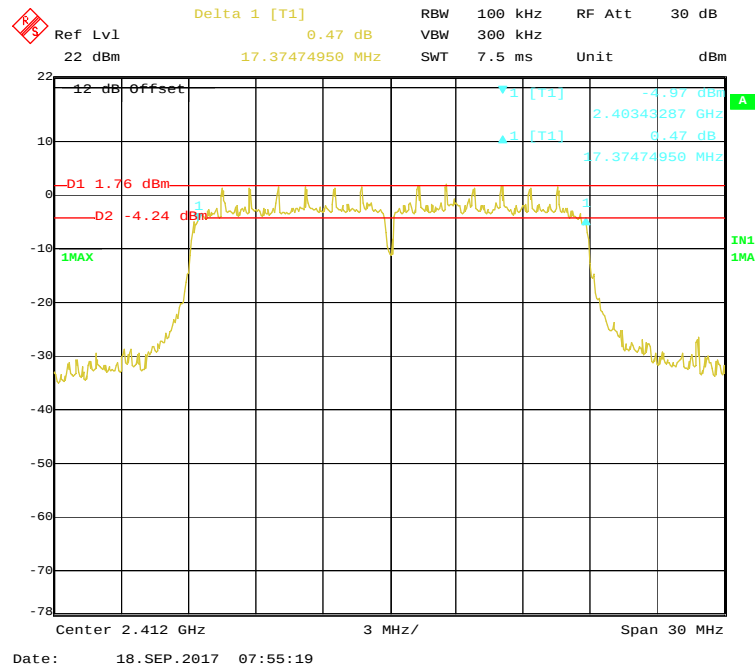

802.11n-HT20 Middle Channel

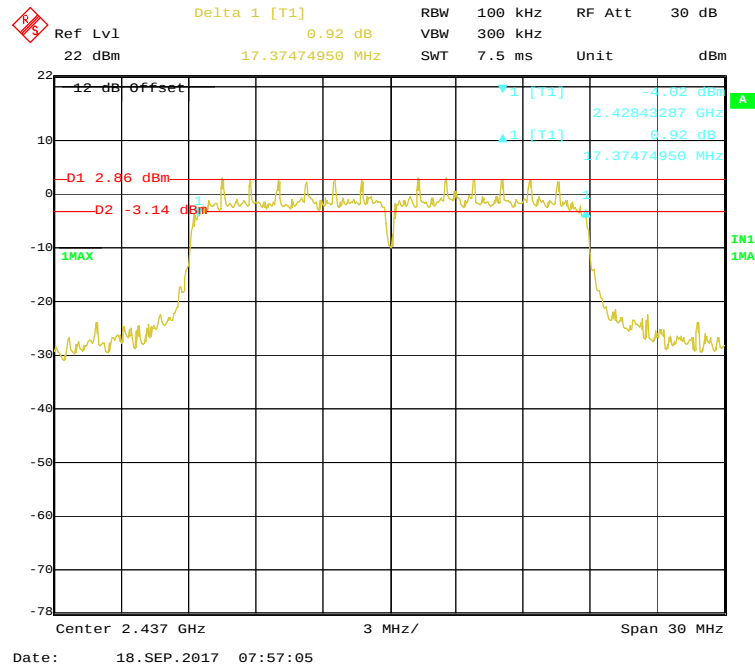

802.11n-HT20 High Channel

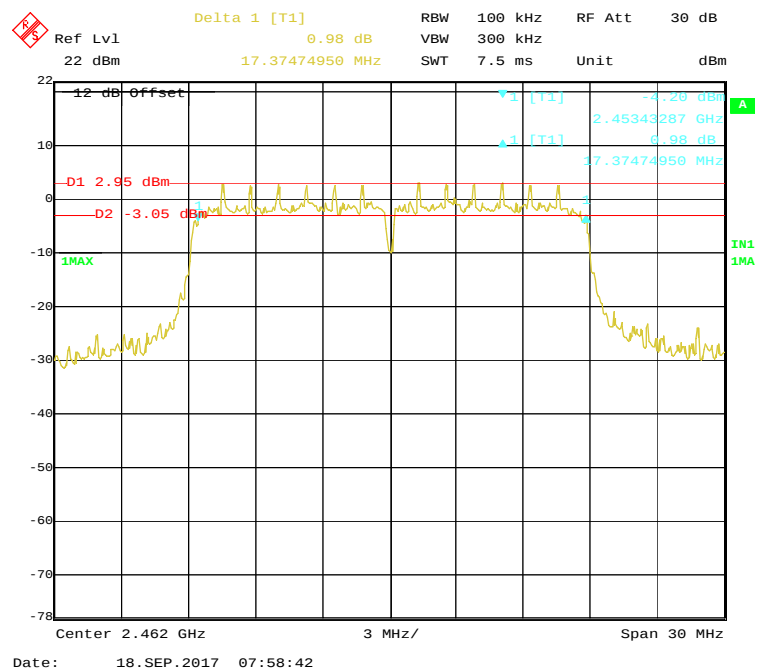


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	25
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Chris Wang on 2017-09-18.

EUT operation mode: Transmitting

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
802.11b				
Low	2412	15.47	30	Pass
Middle	2437	15.35	30	Pass
High	2462	15.71	30	Pass
802.11g				
Low	2412	20.67	30	Pass
Middle	2437	20.85	30	Pass
High	2462	20.91	30	Pass
802.11n-HT20				
Low	2412	20.69	30	Pass
Middle	2437	20.72	30	Pass
High	2462	21.13	30	Pass

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data**Environmental Conditions**


Temperature:	25
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Chris Wang on 2017-09-19.


Test Result: *Compliance*

Band Edge


802.11b Mode Left Side

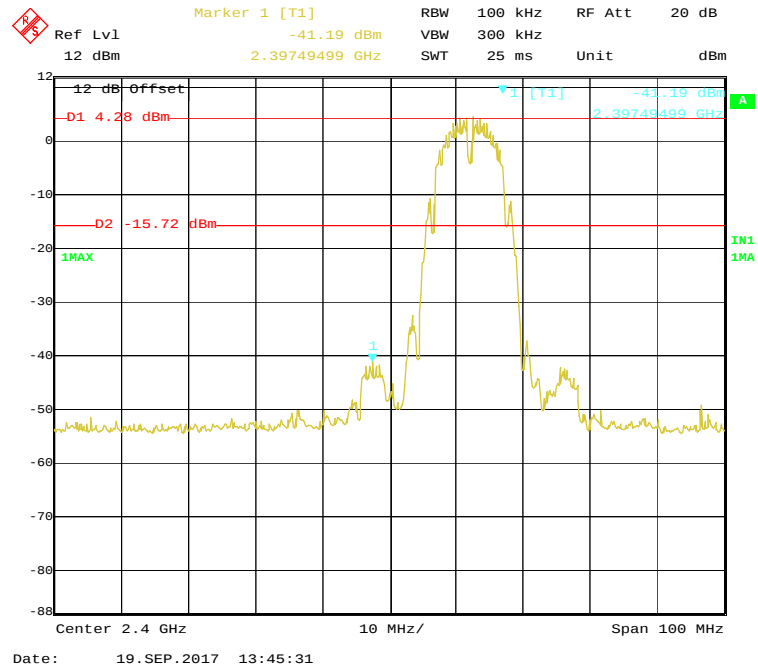


802.11b Mode Right Side

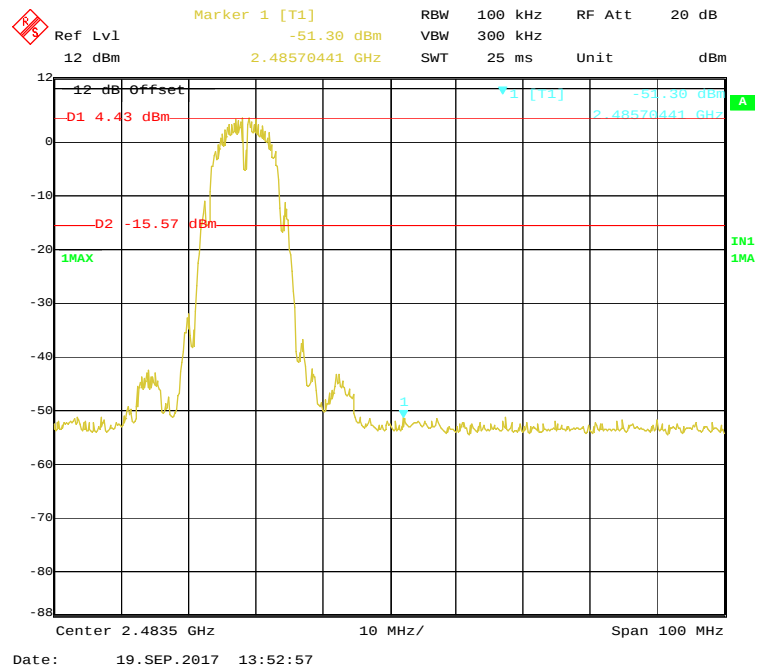


802.11g Mode Left Side

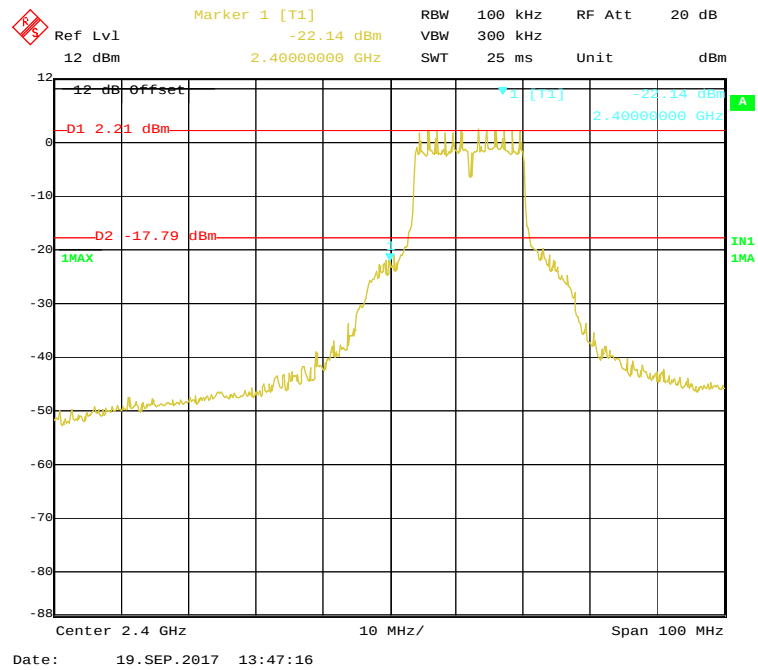


802.11g Mode Right Side

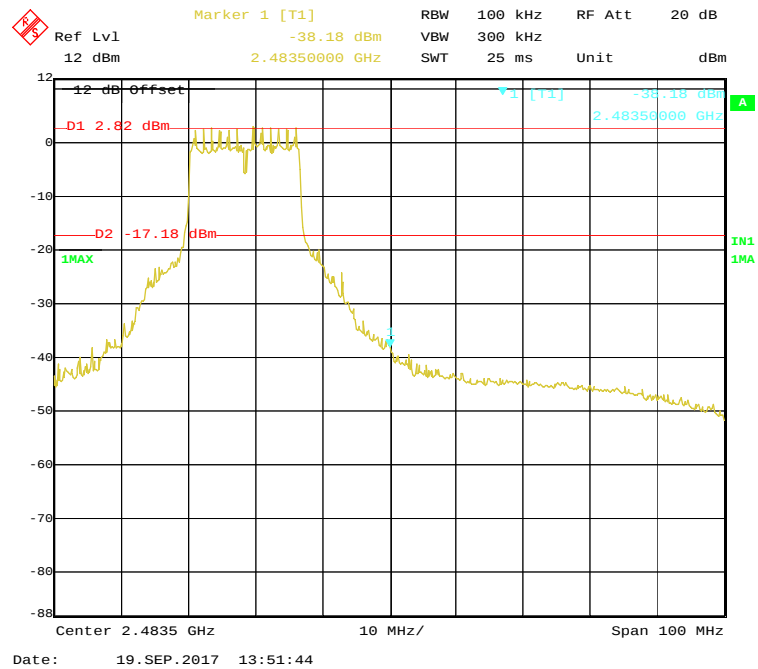

802.11n-HT20 Mode Left Side

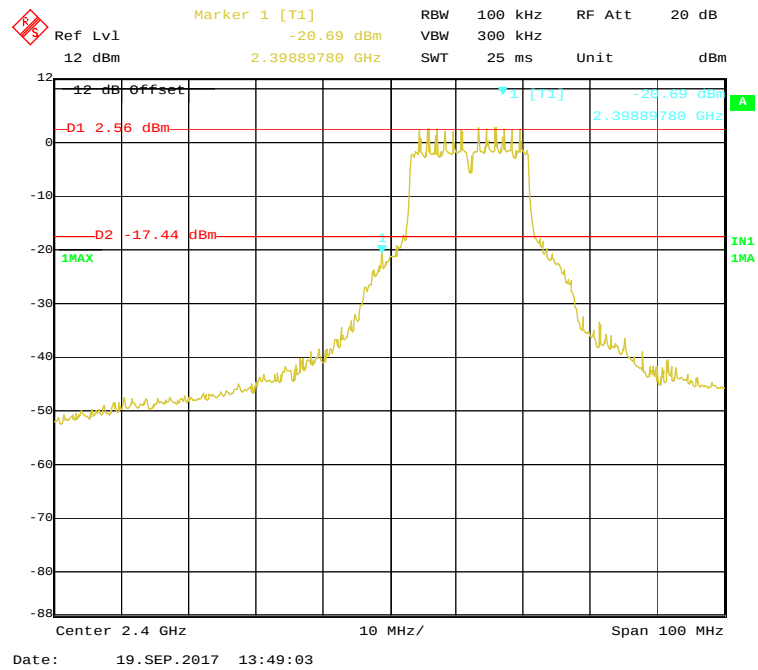

802.11n-HT20 Mode Right Side

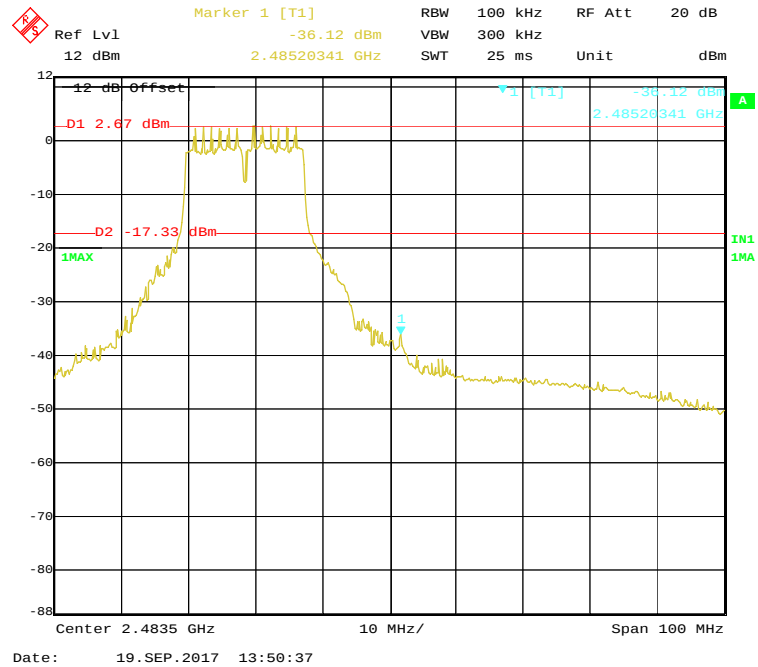

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB558074 D01 DTS Meas Guidance v04 sub-clause 10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

Temperature:	25
Relative Humidity:	50 %
ATM Pressure:	101.1 kPa


The testing was performed by Chris Wang on 2017-09-19.

EUT operation mode: Transmitting


Test Result: Pass

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b mode			
Low	2412	-10.79	≤ 8
Middle	2437	-11.37	≤ 8
High	2462	-11.03	≤ 8
802.11g mode			
Low	2412	-12.26	≤ 8
Middle	2437	-12.11	≤ 8
High	2462	-12.12	≤ 8
802.11n-HT20 mode			
Low	2412	-13.51	≤ 8
Middle	2437	-13.45	≤ 8
High	2462	-13.16	≤ 8


802.11b Low Channel

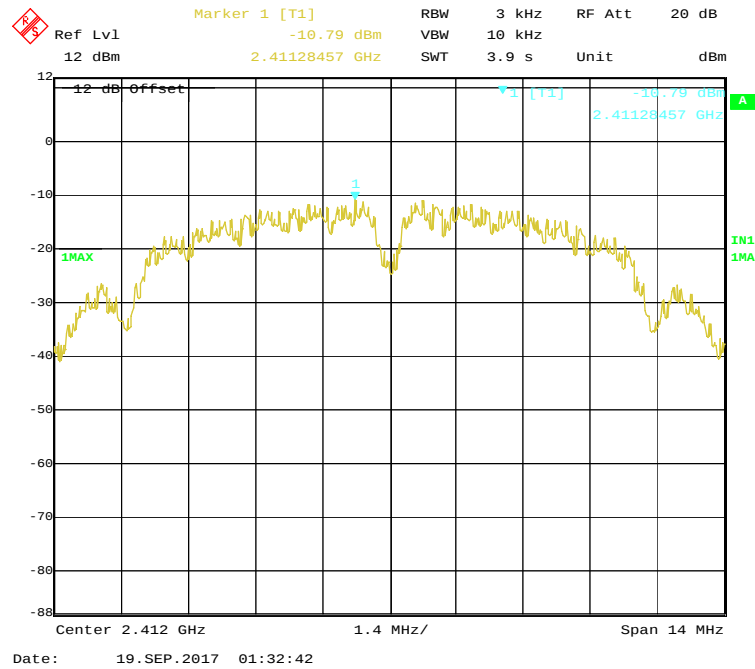


802.11b Middle Channel

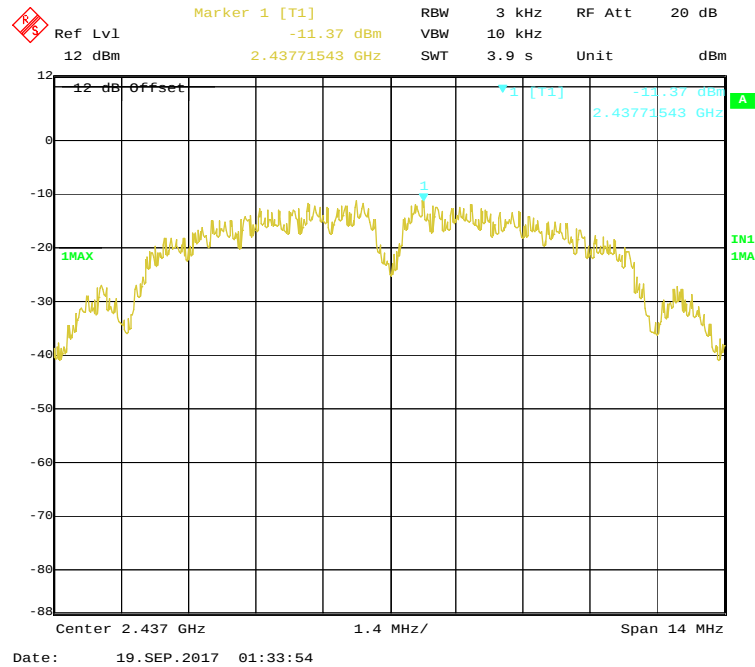


802.11b High Channel

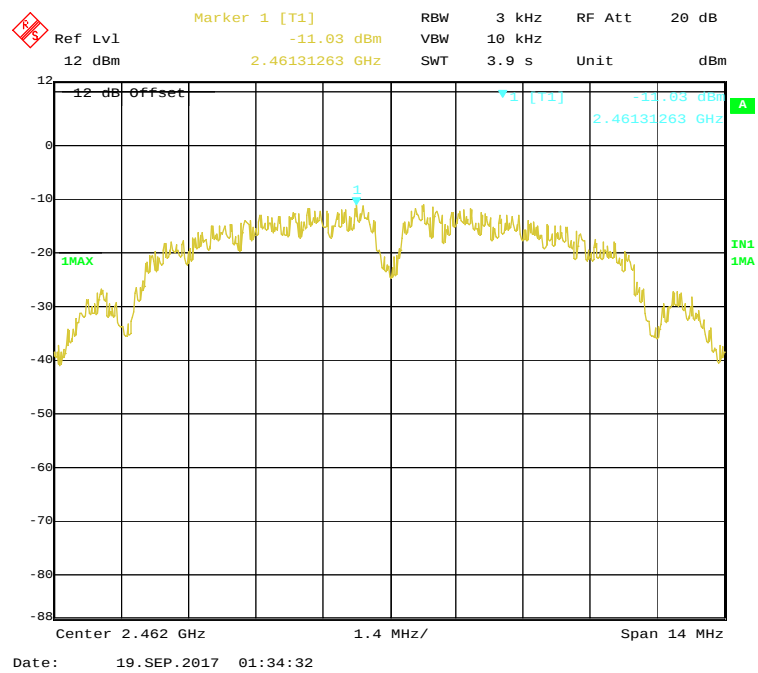


802.11g Low Channel

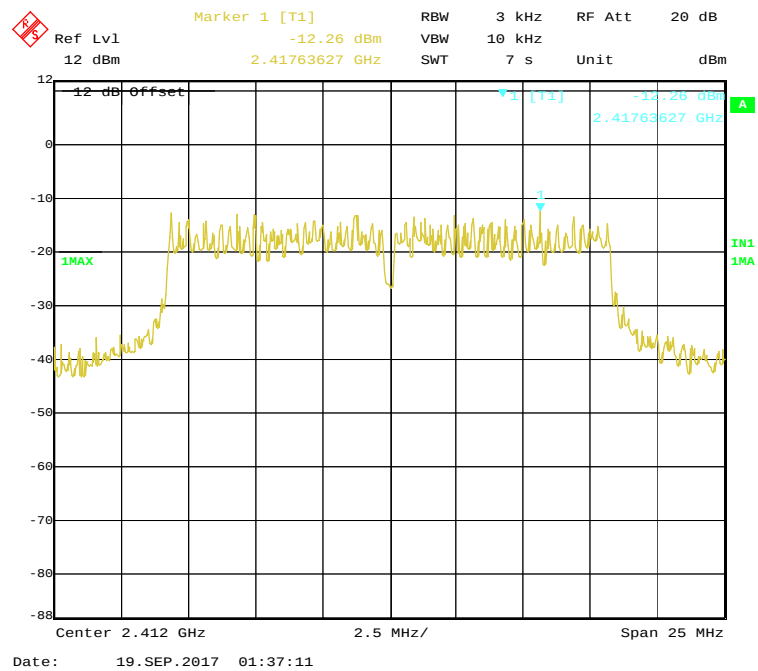


802.11g Middle Channel

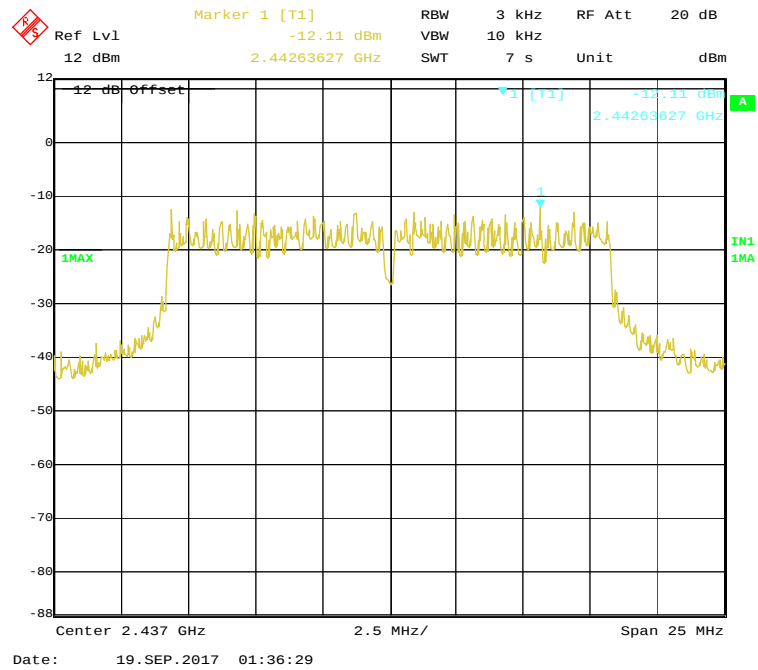


802.11g High Channel

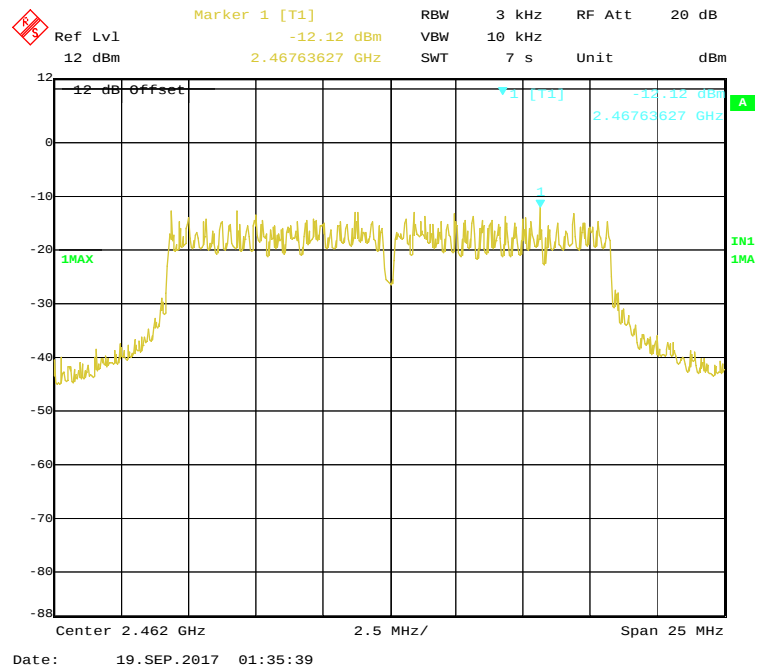


802.11n-HT20 Low Channel

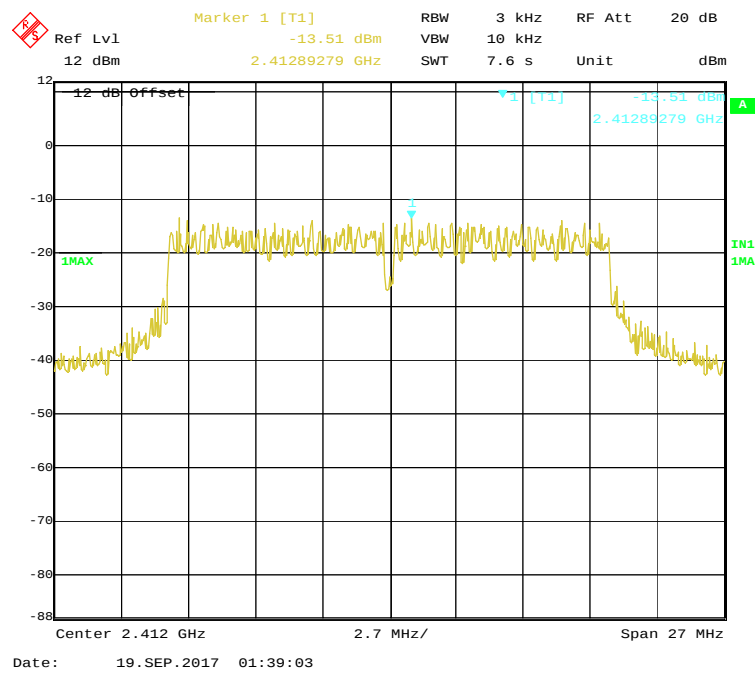

802.11n-HT20 Middle Channel

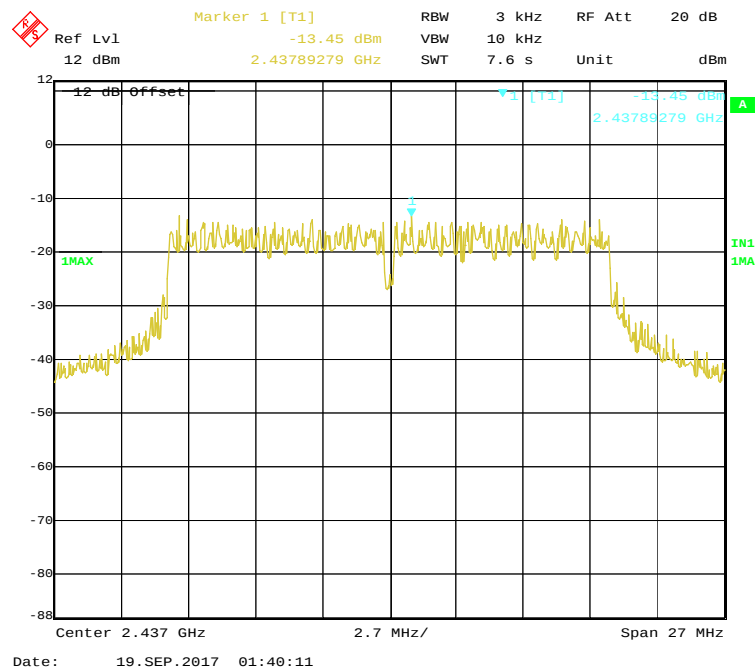

802.11n-HT20 High Channel

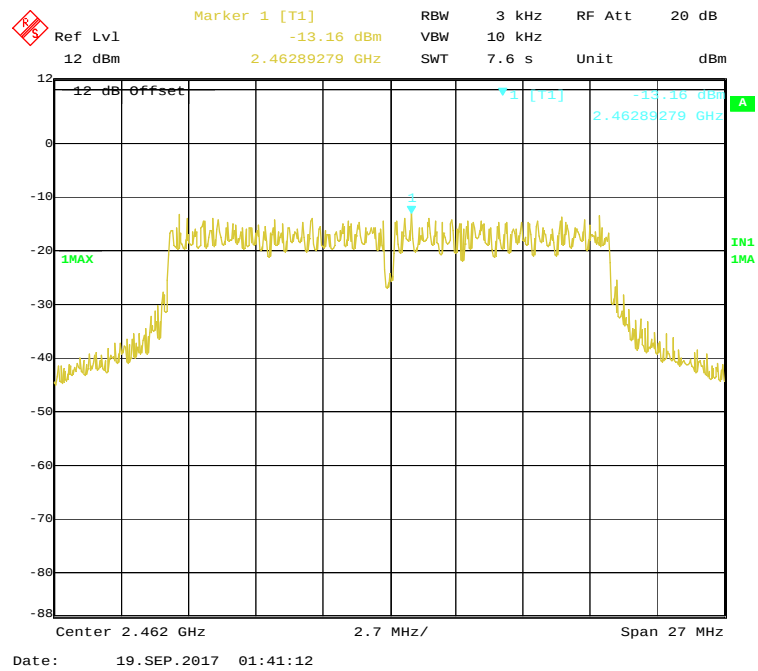

*****END OF REPORT*****